

PEAK TO AVERAGE POWER (PAPR) - BAND n66



XMIT 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	27-Feb-20	27-Feb-21
Generator - Signal	Keysight	N5171B-506	TEW	2-May-18	2-May-21

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Power Ratio (PAPR) was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed the rule part defined limit.

The PAPR measurement method is described in ANSI C63.26 section 5.2.3.4.
The PAPR was measured using the CCDF function of the spectrum analyzer.

Per 27.50(d)(2), the PAPR limit shall not exceed 13 dB for more than the ANSI described 0.1% of the time.

RF conducted emissions testing was performed only on one port. The testing was performed on the same version of hardware (AHFIG) as the original certification test. The AHFIG antenna ports are essentially electrically identical (the RF power variation between antenna ports is small as shown in the original certification testing) and antenna port 4 was selected to perform the testing under this effort as allowed by ANSI C63.26-2015 paragraph 5.7.2

5G NR carrier bandwidths of 5MHz, 10MHz, 15MHz, and 20MHz with QPSK, 16QAM, 64QAM and 256QAM modulation types were verified under this effort. The 5G NR carriers/modulation types for this testing are set up according to 3GPP TS 38.141-1 Test Models and are NR-FR1-TM 1.1 (QPSK modulation type), NR-FR1-TM 3.1 (16QAM modulation type), NR-FR1-TM 3.1 (64QAM modulation type), and NR-FR1-TM 3.1a (256QAM modulation type).

PEAK TO AVERAGE POWER (PAPR) - BAND n66



TstTx 2020.06.06.0 BETA XMtr 2020.03.25.0


EUT: AHFIG		Work Order: NOKI0016
Serial Number: K9191322351		Date: 18-Jun-20
Customer: Nokia Solutions and Networks		Temperature: 22.7 °C
Attendees: Mitchell Hill, John Rattanaovong		Humidity: 51.6% RH
Project: None		Barometric Pres.: 1015 mbar
Tested by: Brandon Hobbs	Power: 54 VDC	Job Site: TX05
TEST SPECIFICATIONS		Test Method
FCC 27:2020		ANSI C63.26:2015
COMMENTS		
All measurement path losses were accounted for in the reference level offset including any attenuators, filters and DC blocks. The carrier was set to maximum for all testing.		
DEVIATIONS FROM TEST STANDARD		
None		
Configuration #	2	Signature
		PAPR Value (dB) PAPR Limit (dB) Results
Port 4, Band n66, 2110 MHz - 2200 MHz		
5 MHz Bandwidth		
QPSK Modulation		
Low Channel 2112.5 MHz		7.1 13 Pass
Mid Channel 2155 MHz		7.1 13 Pass
High Channel 2197.5 MHz		7.1 13 Pass
16-QAM Modulation		
Low Channel 2112.5 MHz		7.3 13 Pass
Mid Channel 2155 MHz		7.3 13 Pass
High Channel 2197.5 MHz		7.3 13 Pass
64-QAM Modulation		
Low Channel 2112.5 MHz		7.1 13 Pass
Mid Channel 2155 MHz		7.1 13 Pass
High Channel 2197.5 MHz		7.1 13 Pass
256-QAM Modulation		
Low Channel 2112.5 MHz		7.2 13 Pass
Mid Channel 2155 MHz		7.2 13 Pass
High Channel 2197.5 MHz		7.2 13 Pass
10 MHz Bandwidth		
QPSK Modulation		
Low Channel 2115 MHz		7.1 13 Pass
Mid Channel 2155 MHz		7.1 13 Pass
High Channel 2195 MHz		7.1 13 Pass
16-QAM Modulation		
Low Channel 2115 MHz		7.3 13 Pass
Mid Channel 2155 MHz		7.3 13 Pass
High Channel 2195 MHz		7.3 13 Pass
64-QAM Modulation		
Low Channel 2115 MHz		7.1 13 Pass
Mid Channel 2155 MHz		7.1 13 Pass
High Channel 2195 MHz		7.1 13 Pass
256-QAM Modulation		
Low Channel 2115 MHz		7.2 13 Pass
Mid Channel 2155 MHz		7.2 13 Pass
High Channel 2195 MHz		7.2 13 Pass
15 MHz Bandwidth		
QPSK Modulation		
Low Channel 2117.5 MHz		7.2 13 Pass
Mid Channel 2155 MHz		7.1 13 Pass
High Channel 2192.5 MHz		7.1 13 Pass
16-QAM Modulation		
Low Channel 2117.5 MHz		7.2 13 Pass
Mid Channel 2155 MHz		7.2 13 Pass
High Channel 2192.5 MHz		7.2 13 Pass
64-QAM Modulation		
Low Channel 2117.5 MHz		7.1 13 Pass
Mid Channel 2155 MHz		7.1 13 Pass
High Channel 2192.5 MHz		7.1 13 Pass
256-QAM Modulation		
Low Channel 2117.5 MHz		7.1 13 Pass
Mid Channel 2155 MHz		7.1 13 Pass
High Channel 2192.5 MHz		7.1 13 Pass
20 MHz Bandwidth		
QPSK Modulation		
Low Channel 2120 MHz		7.1 13 Pass
Mid Channel 2155 MHz		7.0 13 Pass
High Channel 2190 MHz		7.1 13 Pass
16-QAM Modulation		
Low Channel 2120 MHz		7.1 13 Pass
Mid Channel 2155 MHz		7.1 13 Pass
High Channel 2190 MHz		7.2 13 Pass
64-QAM Modulation		
Low Channel 2120 MHz		7.1 13 Pass
Mid Channel 2155 MHz		7.0 13 Pass
High Channel 2190 MHz		7.1 13 Pass
256-QAM Modulation		
Low Channel 2120 MHz		7.0 13 Pass
Mid Channel 2155 MHz		7.0 13 Pass
High Channel 2190 MHz		7.1 13 Pass

PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Low Channel 2112.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.11	13	Pass

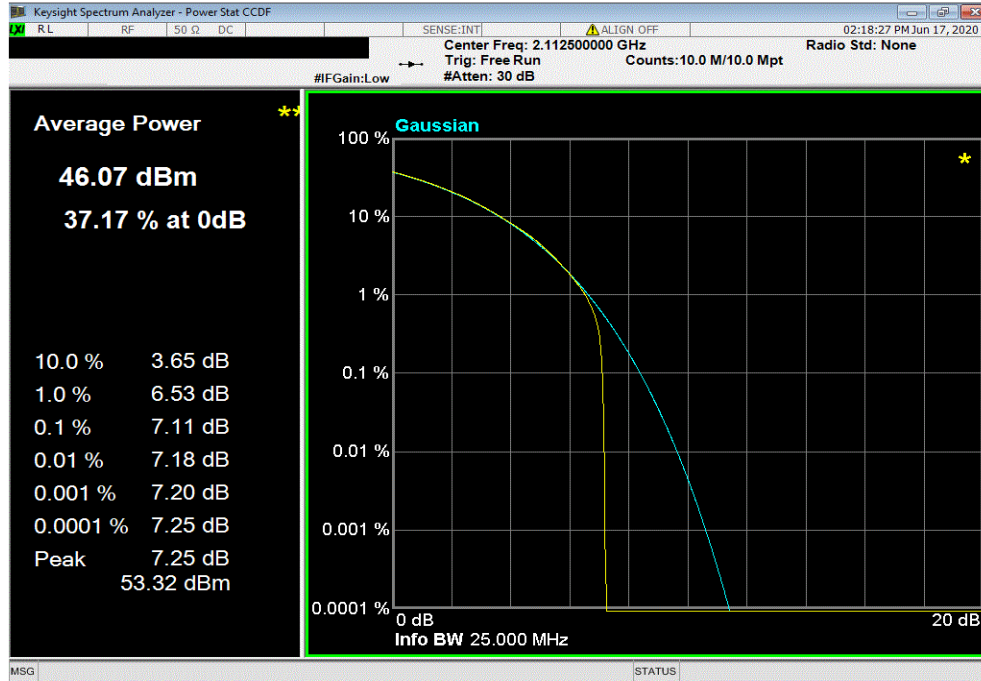

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.1	13	Pass

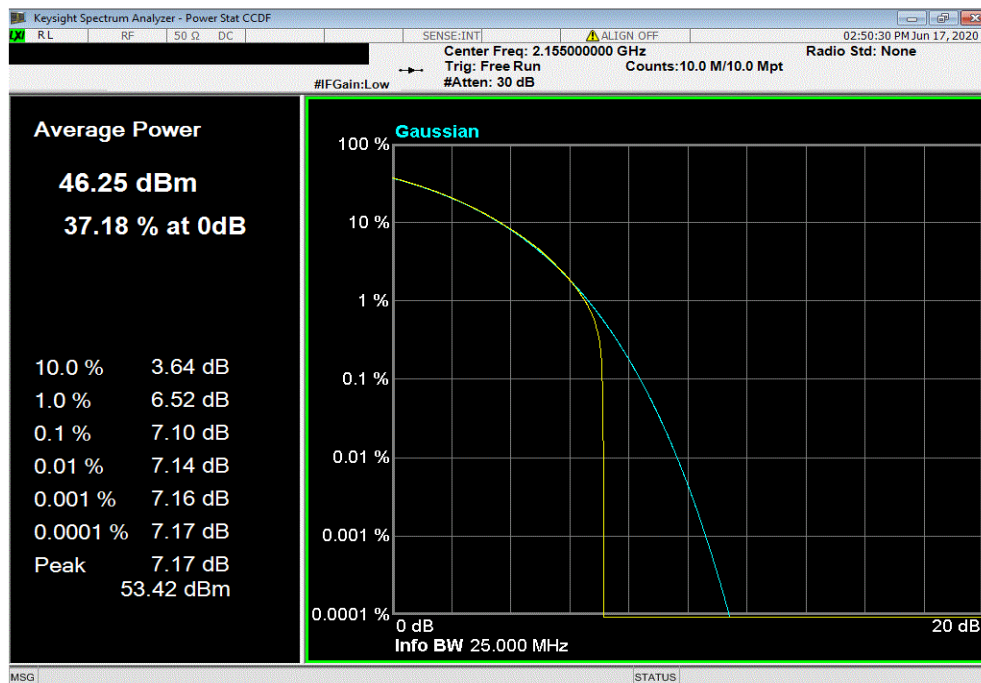


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, QPSK Modulation, High Channel 2197.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.11	13	Pass

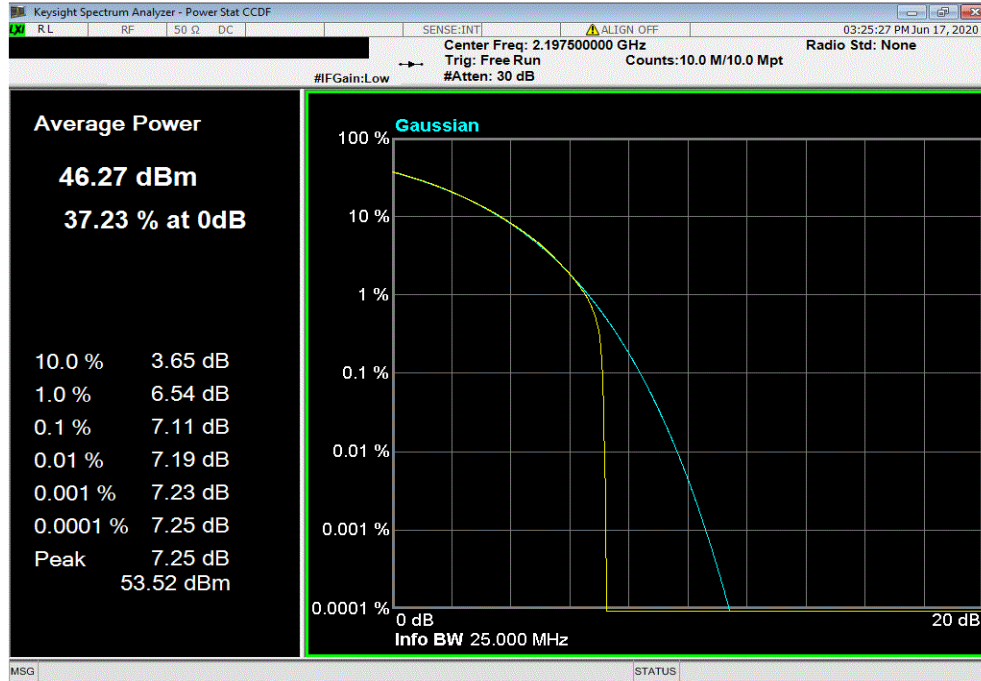

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Low Channel 2112.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.26	13	Pass

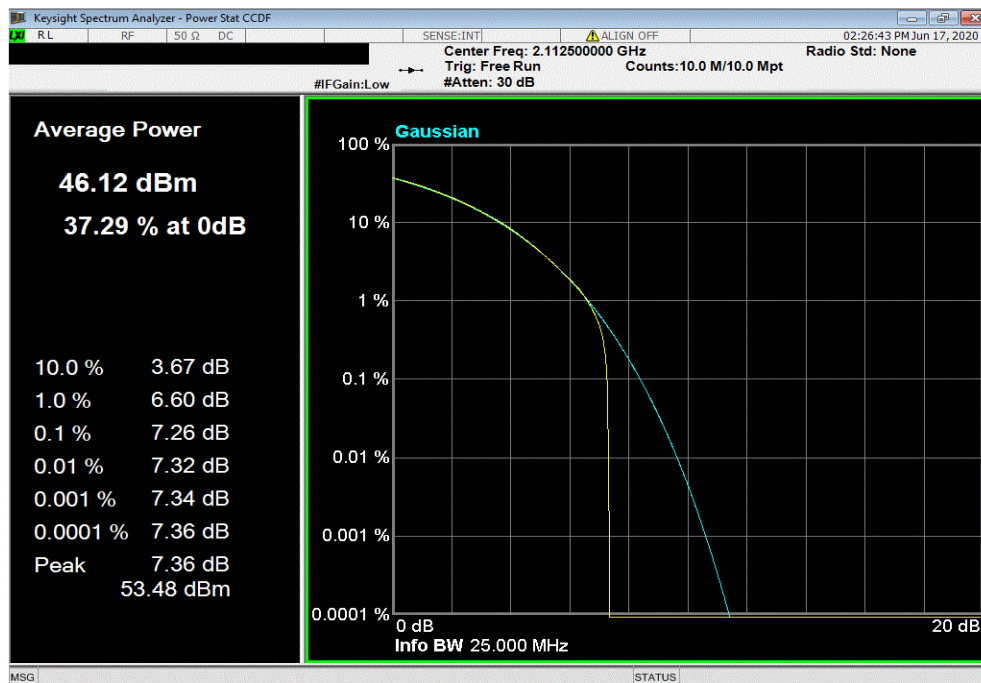


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.27	13	Pass

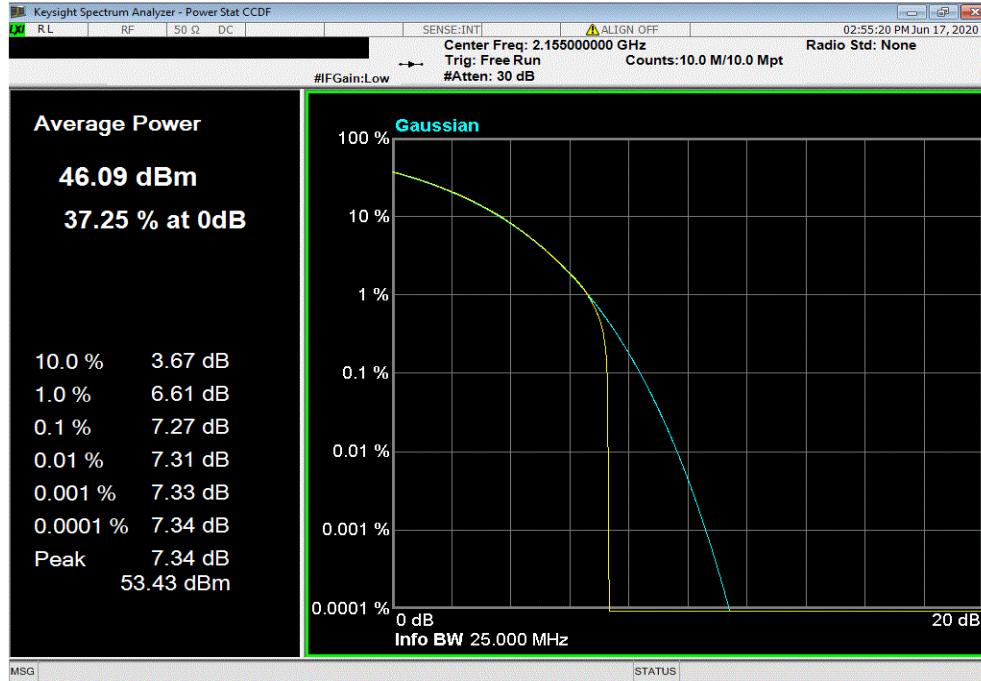

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 16-QAM Modulation, High Channel 2197.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.26	13	Pass

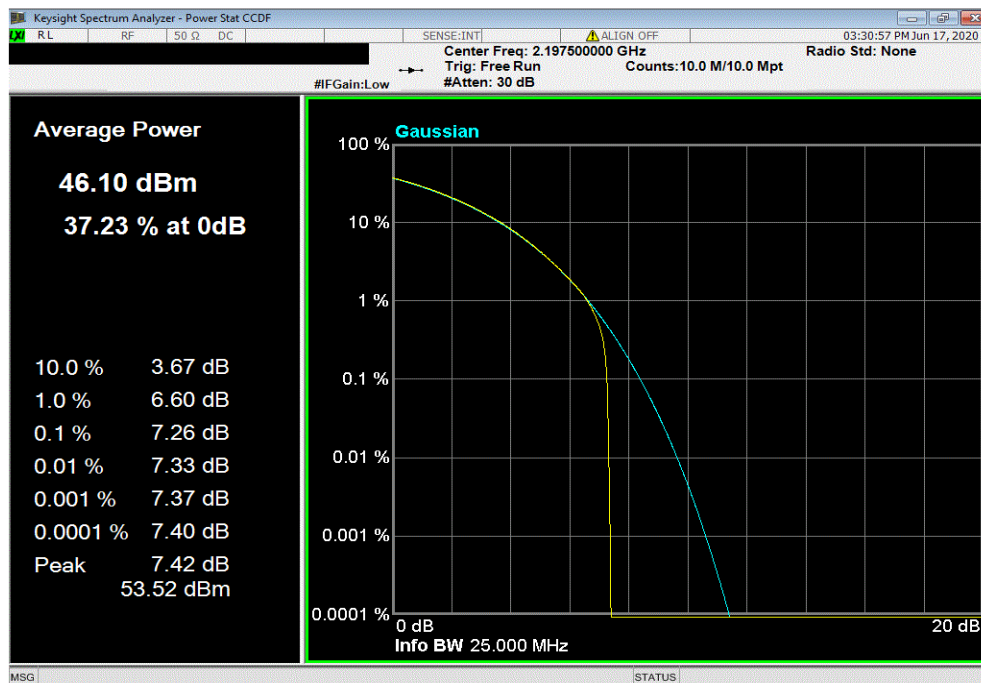


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 64-QAM Modulation, Low Channel 2112.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.09	13	Pass

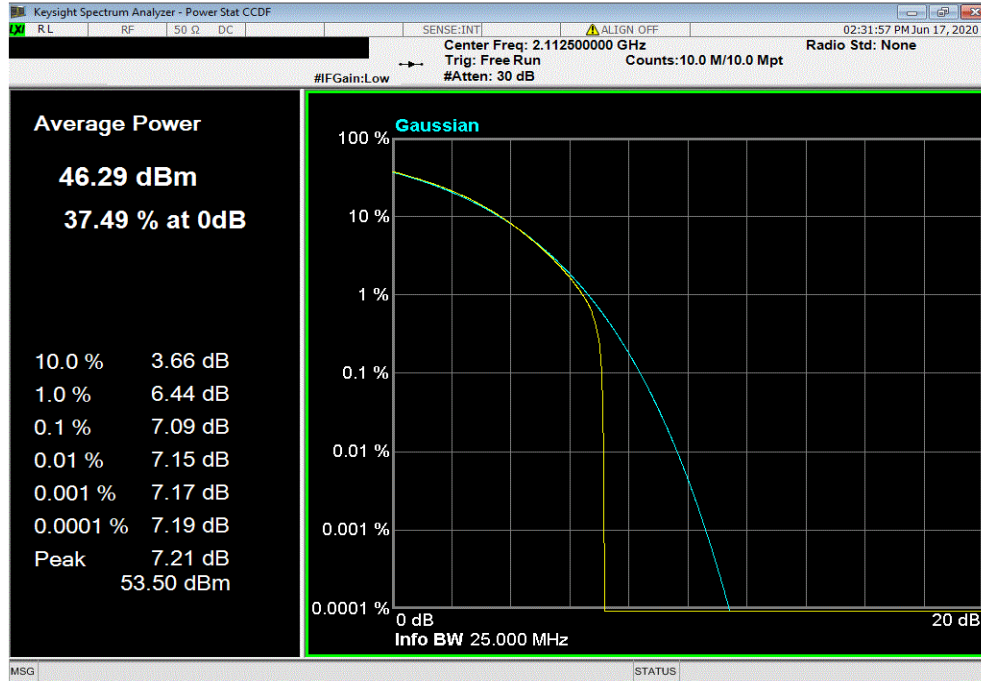

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.08	13	Pass

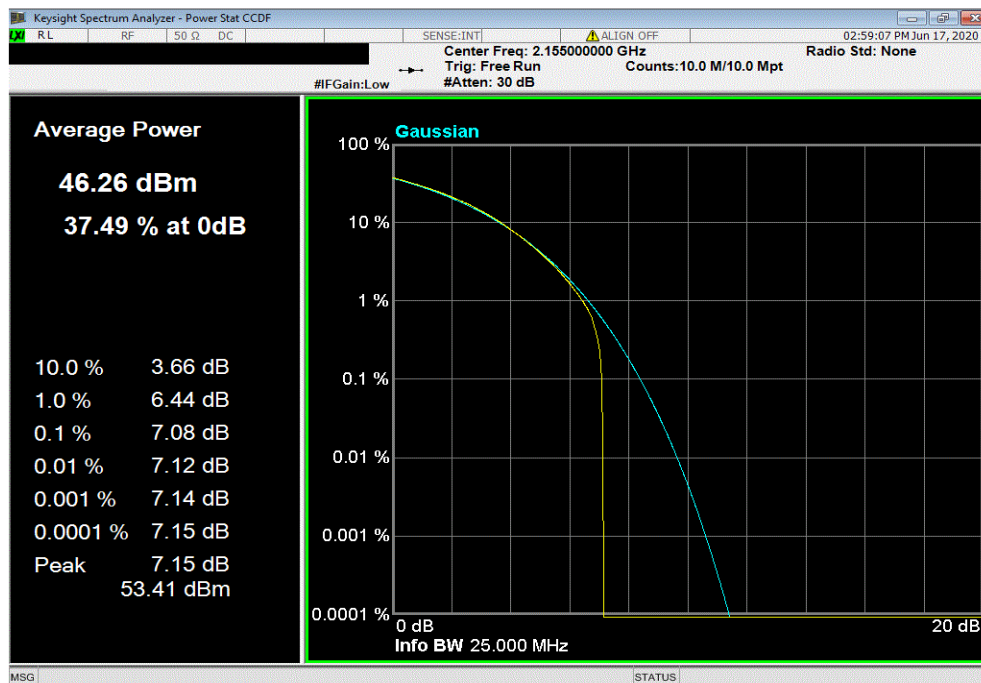


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 64-QAM Modulation, High Channel 2197.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.09	13	Pass

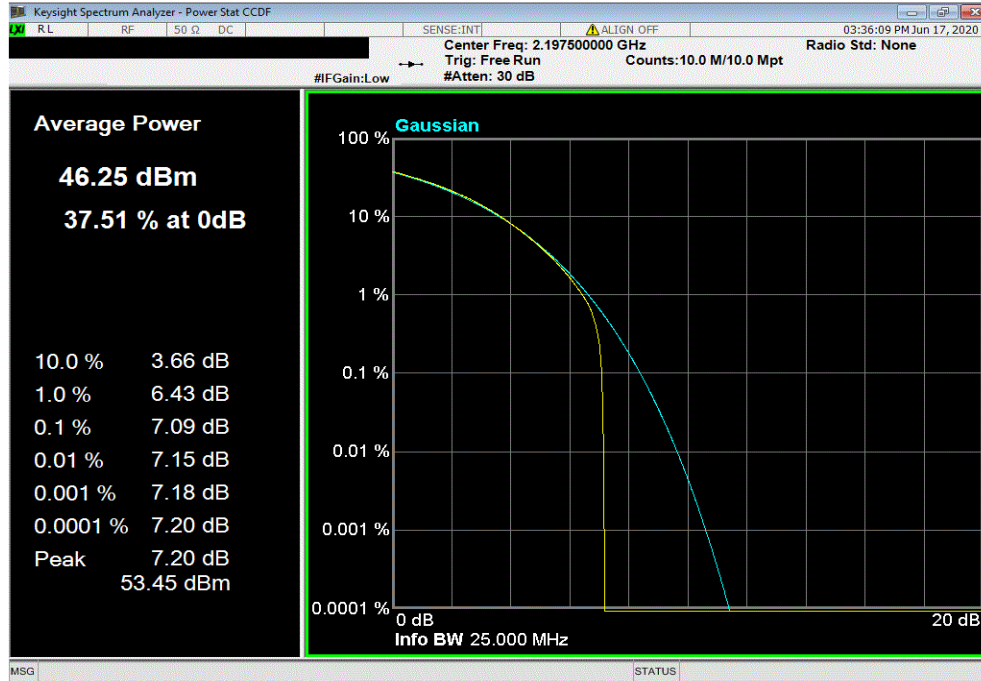

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 256-QAM Modulation, Low Channel 2112.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.18	13	Pass

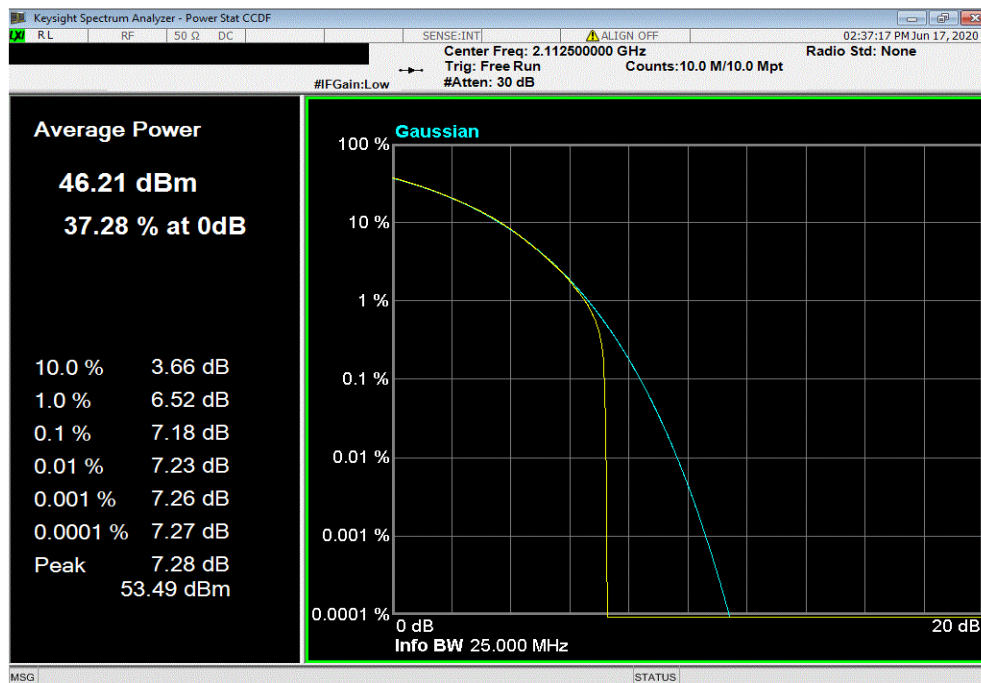


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 256-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.17	13	Pass

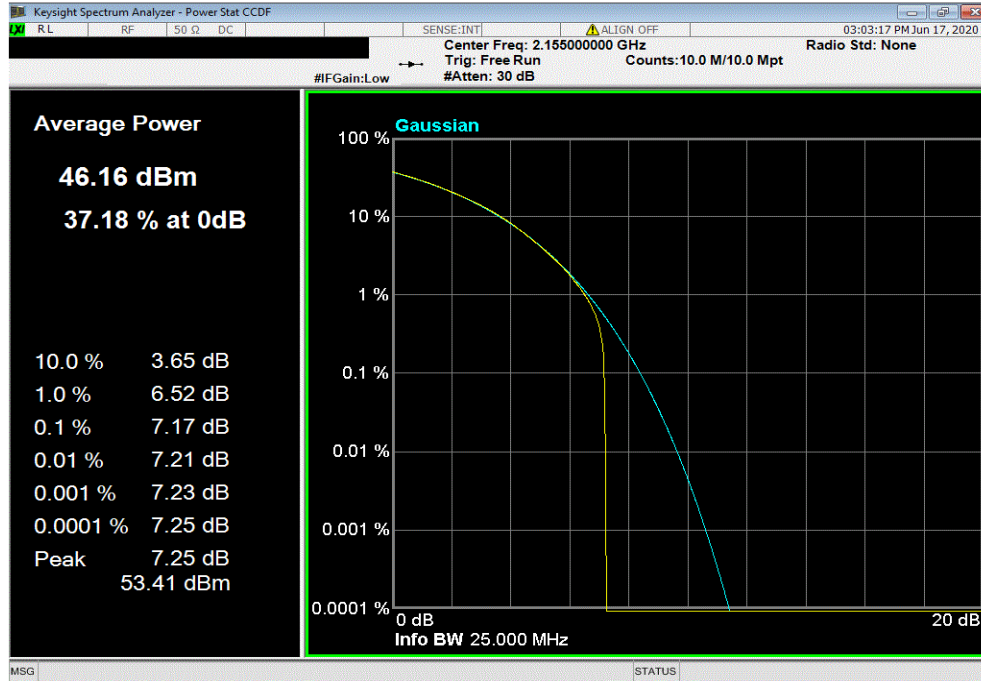

Port 4, Band n66, 2110 MHz - 2200 MHz, 5 MHz Bandwidth , 256-QAM Modulation, High Channel 2197.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.16	13	Pass

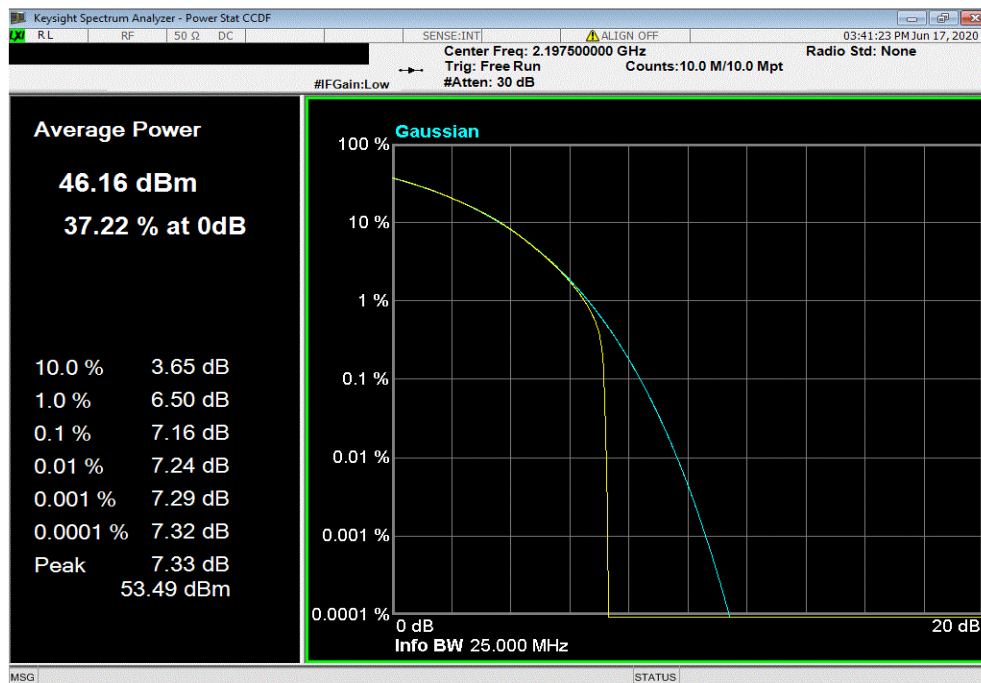


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth , QPSK Modulation, Low Channel 2115 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.13	13	Pass

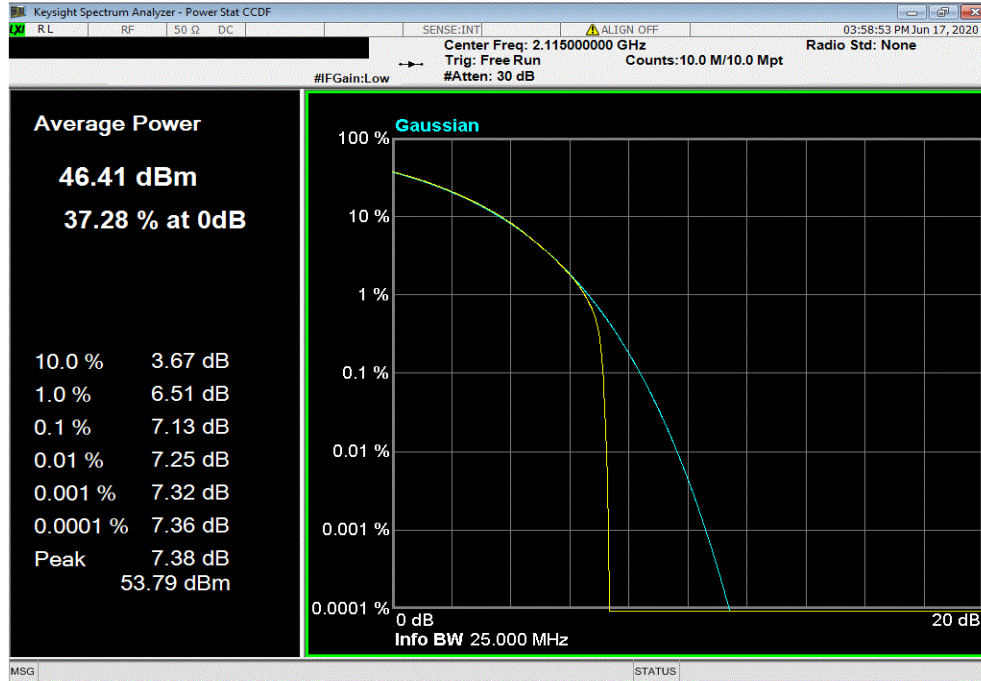

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth , QPSK Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.1	13	Pass

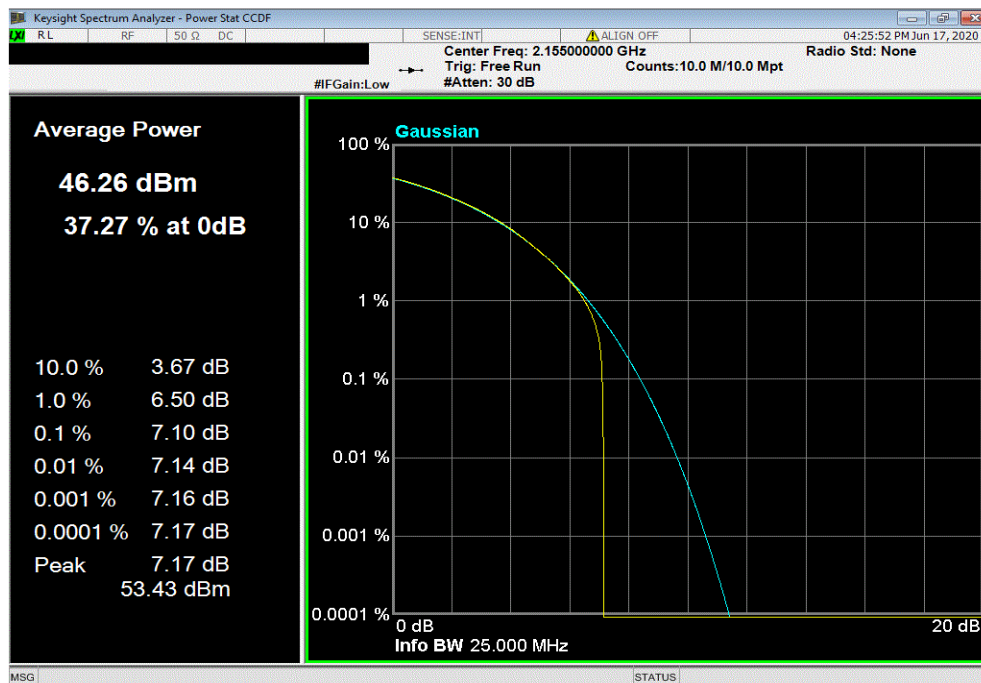


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, QPSK Modulation, High Channel 2195 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.12	13	Pass

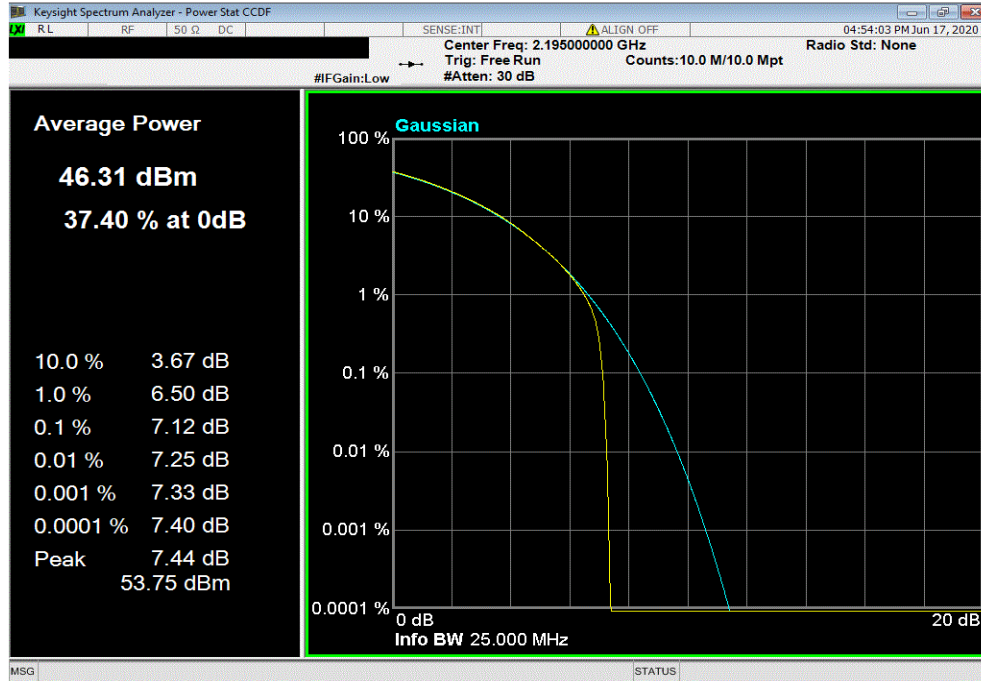

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 16-QAM Modulation, Low Channel 2115 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.27	13	Pass

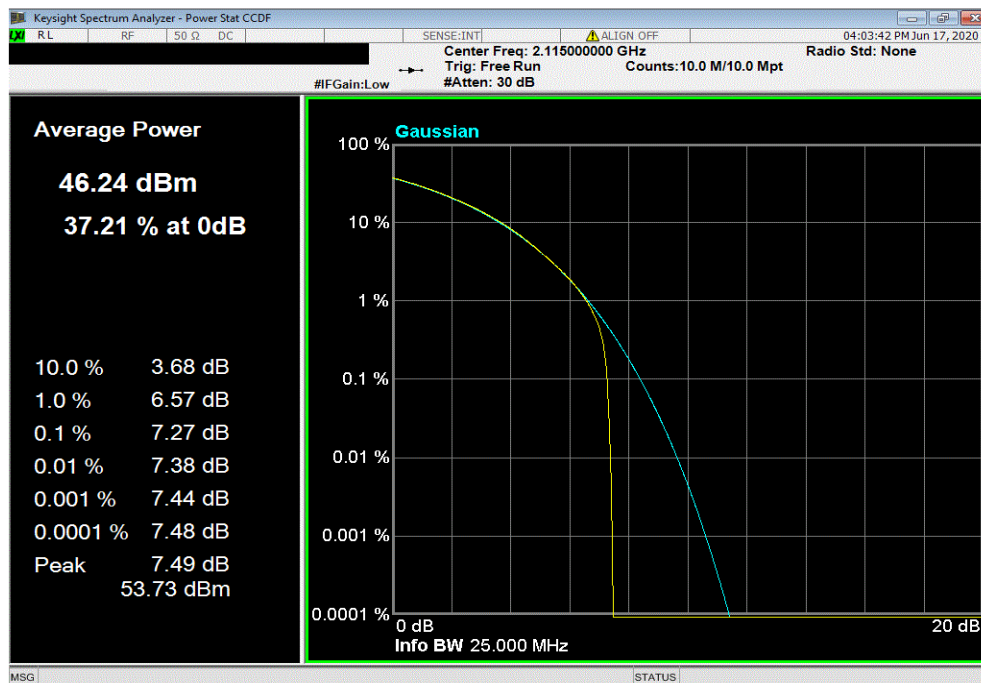


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.25	13	Pass

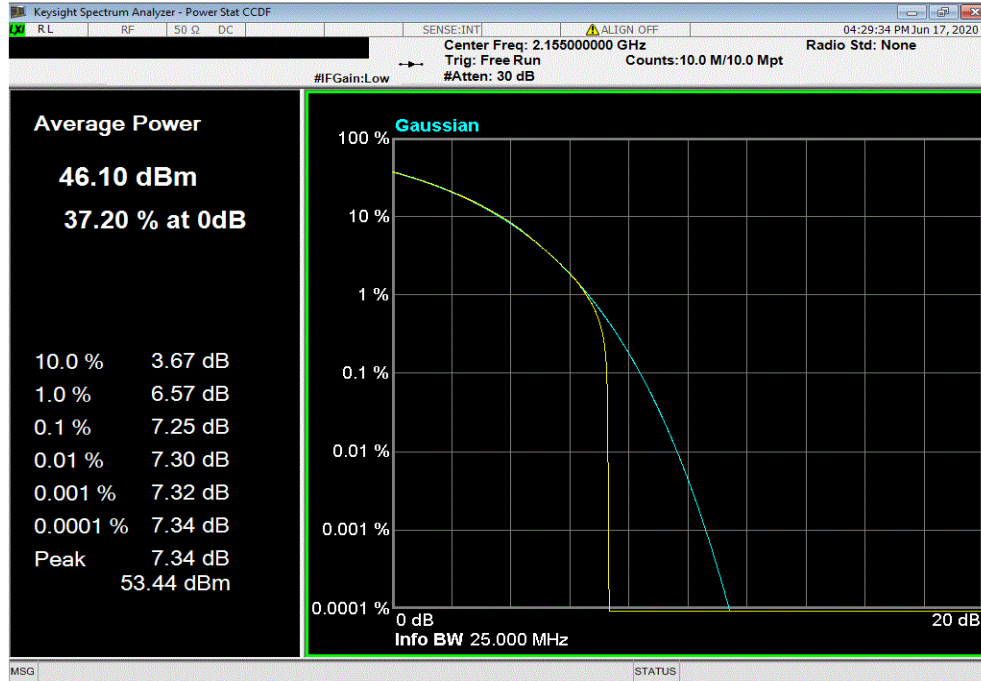

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 16-QAM Modulation, High Channel 2195 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.26	13	Pass

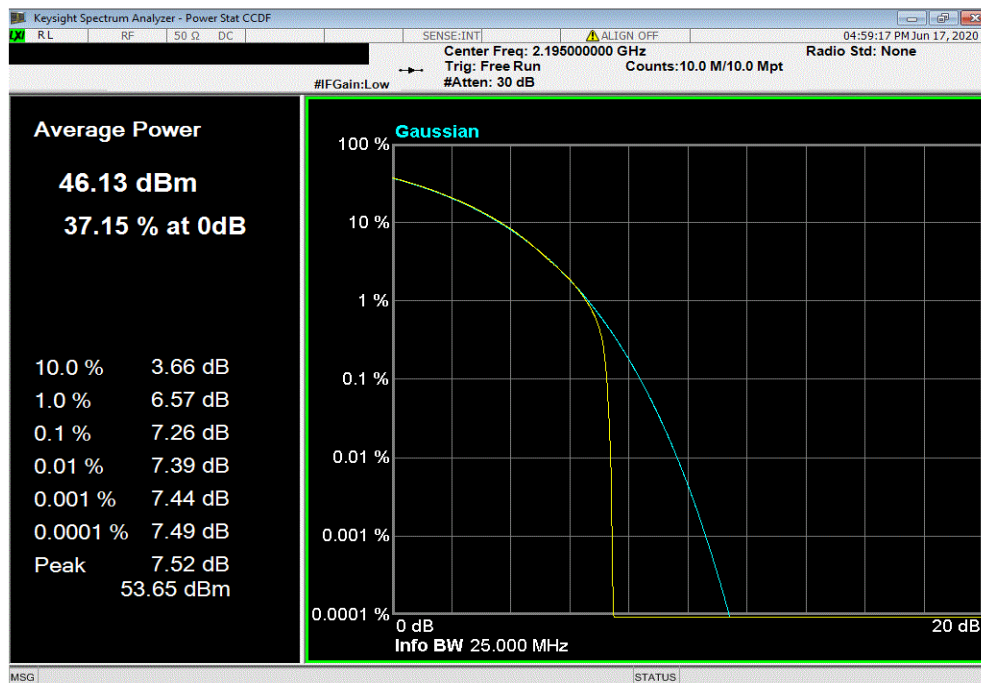


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 64-QAM Modulation, Low Channel 2115 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.14	13	Pass

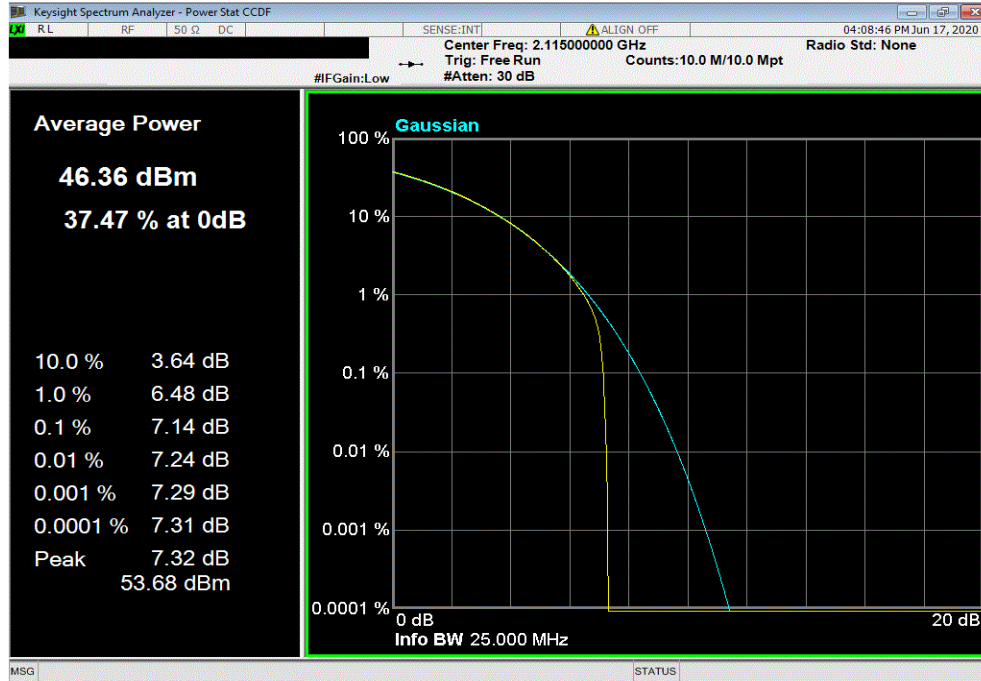

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.1	13	Pass

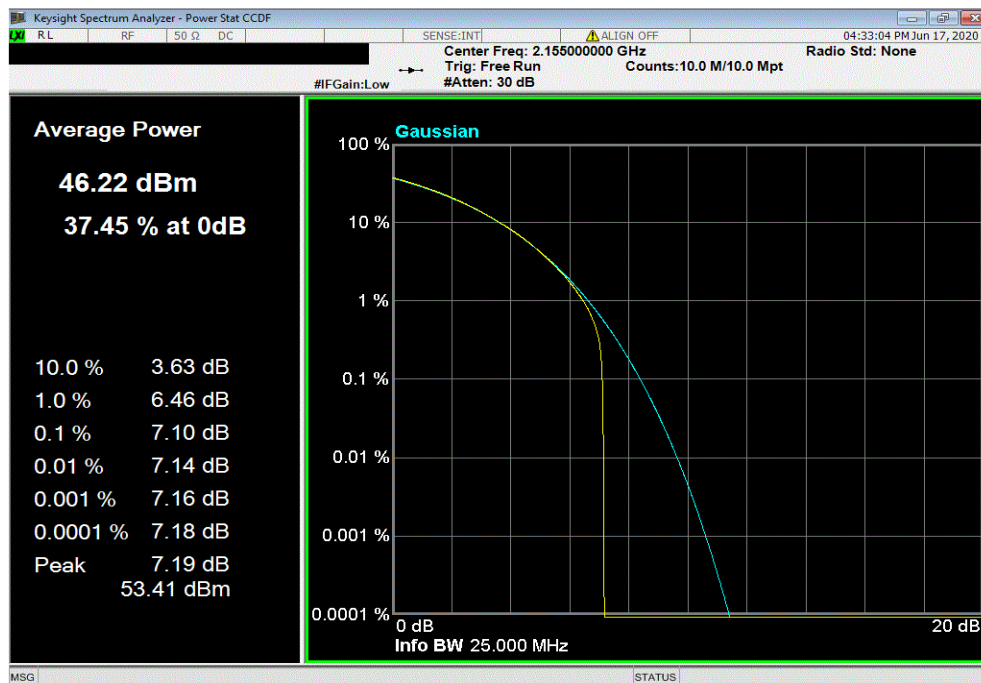


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 64-QAM Modulation, High Channel 2195 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.12	13	Pass

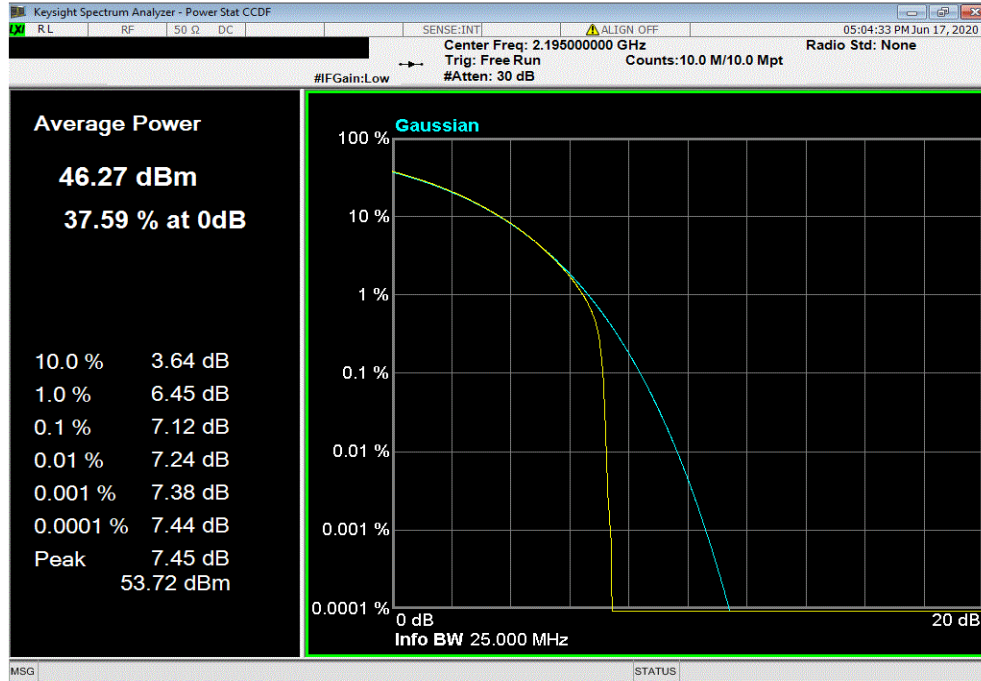

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, Low Channel 2115 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.19	13	Pass

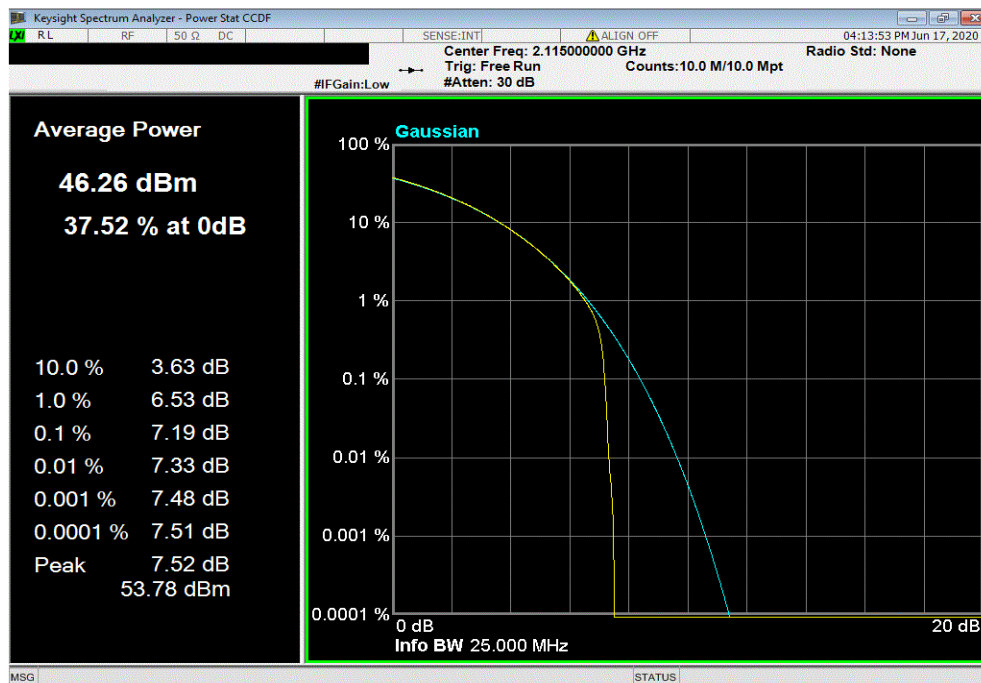


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.18	13	Pass

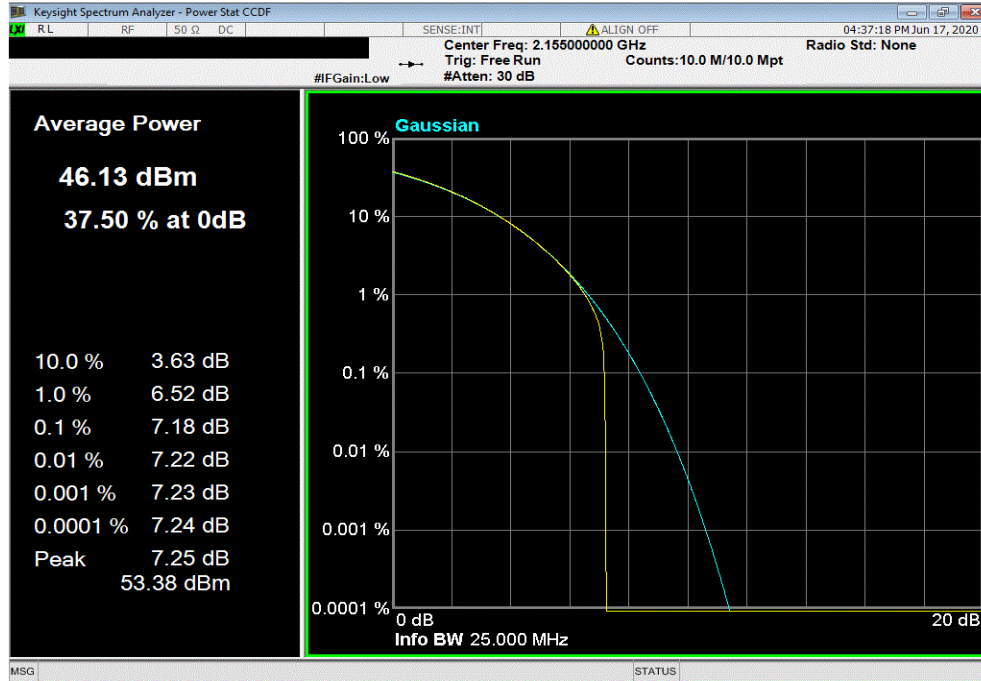

Port 4, Band n66, 2110 MHz - 2200 MHz, 10 MHz Bandwidth, 256-QAM Modulation, High Channel 2195 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.2	13	Pass

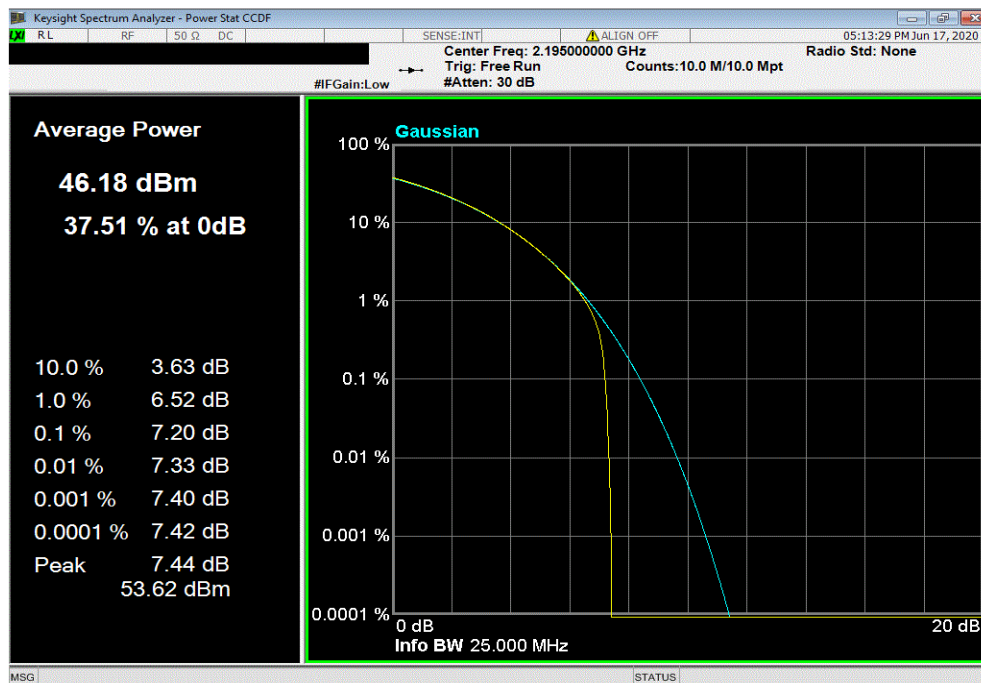


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, QPSK Modulation, Low Channel 2117.5 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.15	13	Pass			

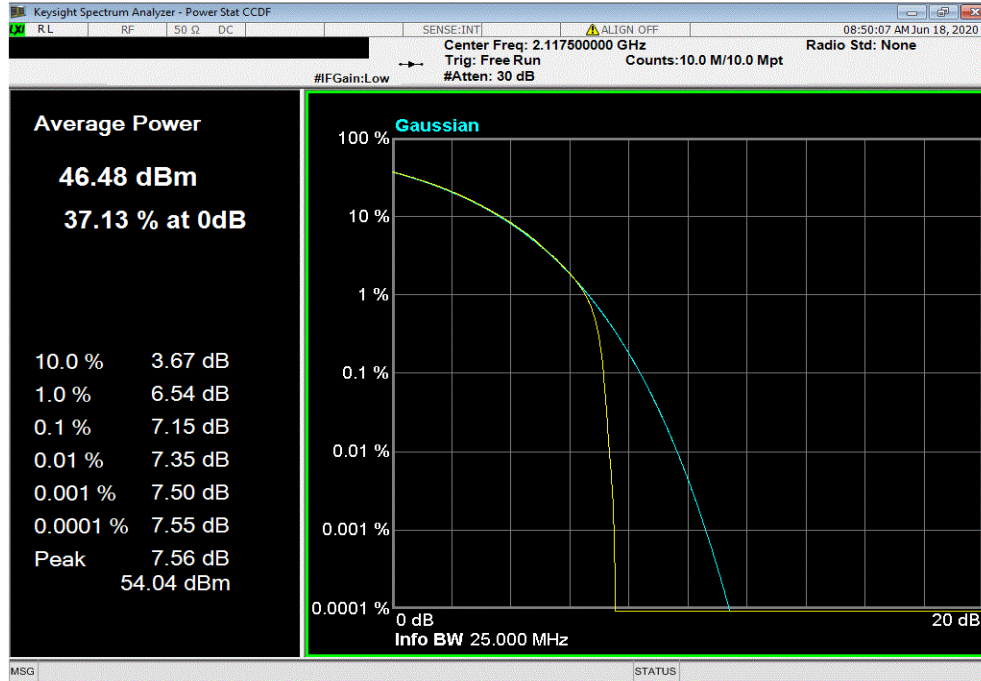

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz						
	PAPR Value (dB)	PAPR Limit (dB)	Results			
	7.08	13	Pass			

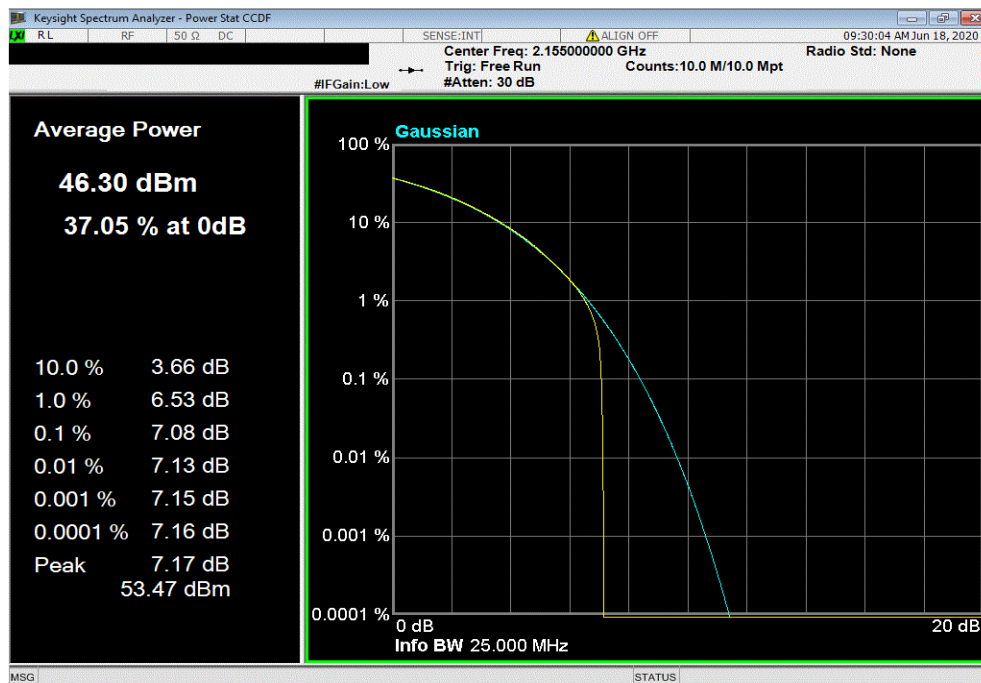


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, QPSK Modulation, High Channel 2192.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.14	13	Pass

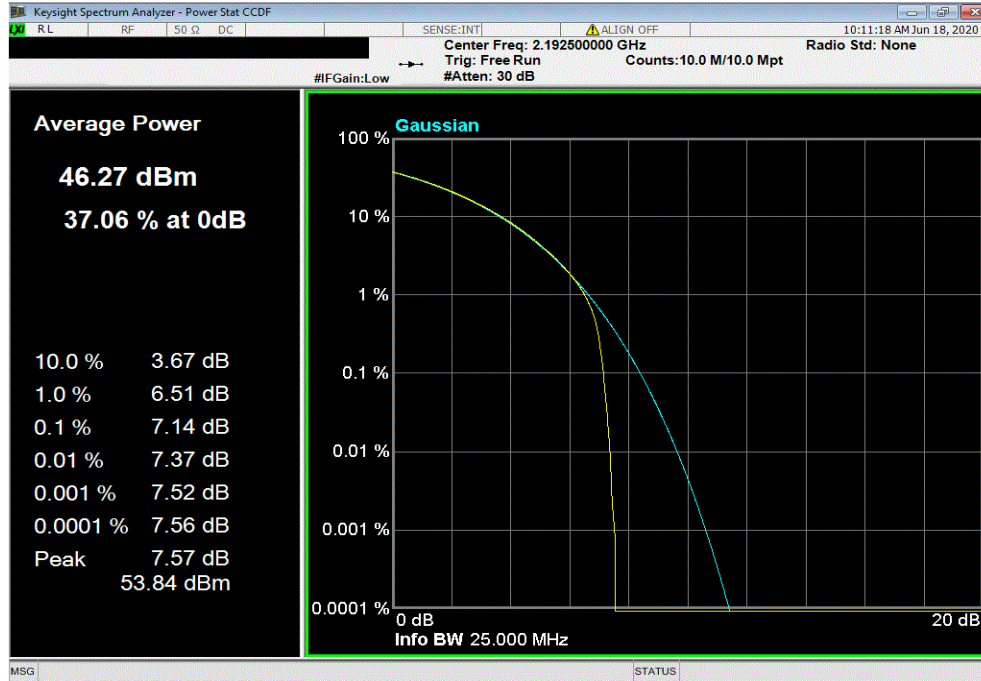

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 16-QAM Modulation, Low Channel 2117.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.21	13	Pass

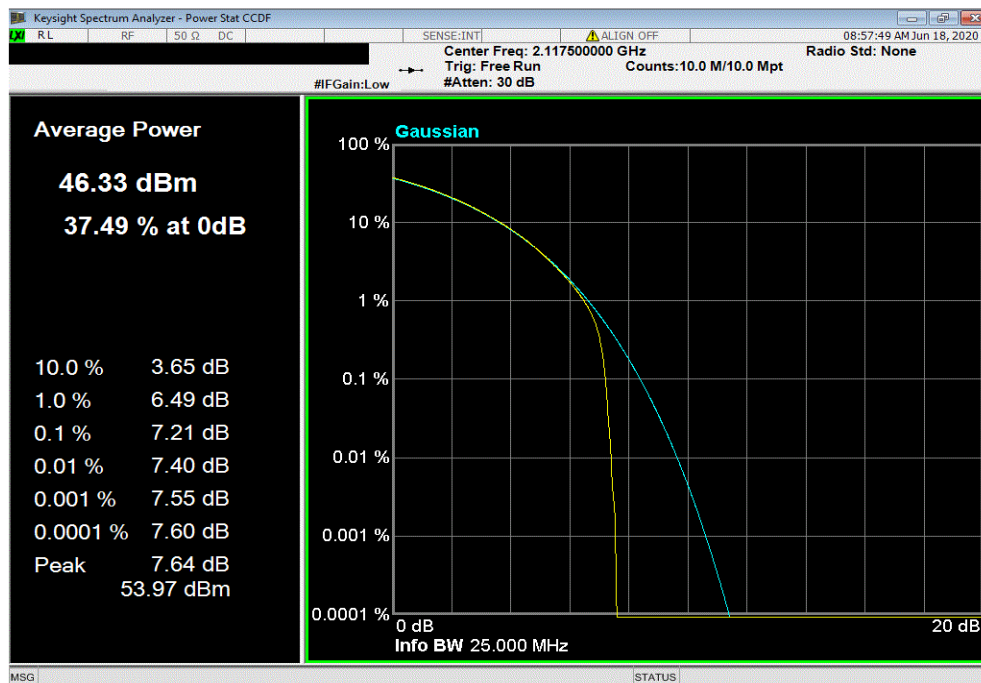


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.15	13	Pass

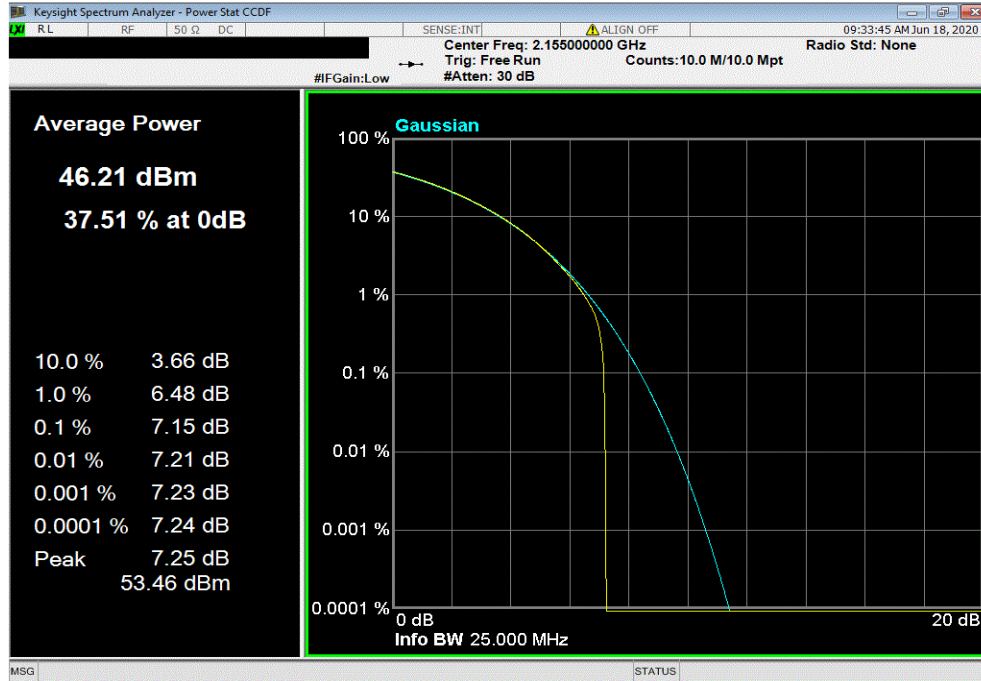

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 16-QAM Modulation, High Channel 2192.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.22	13	Pass

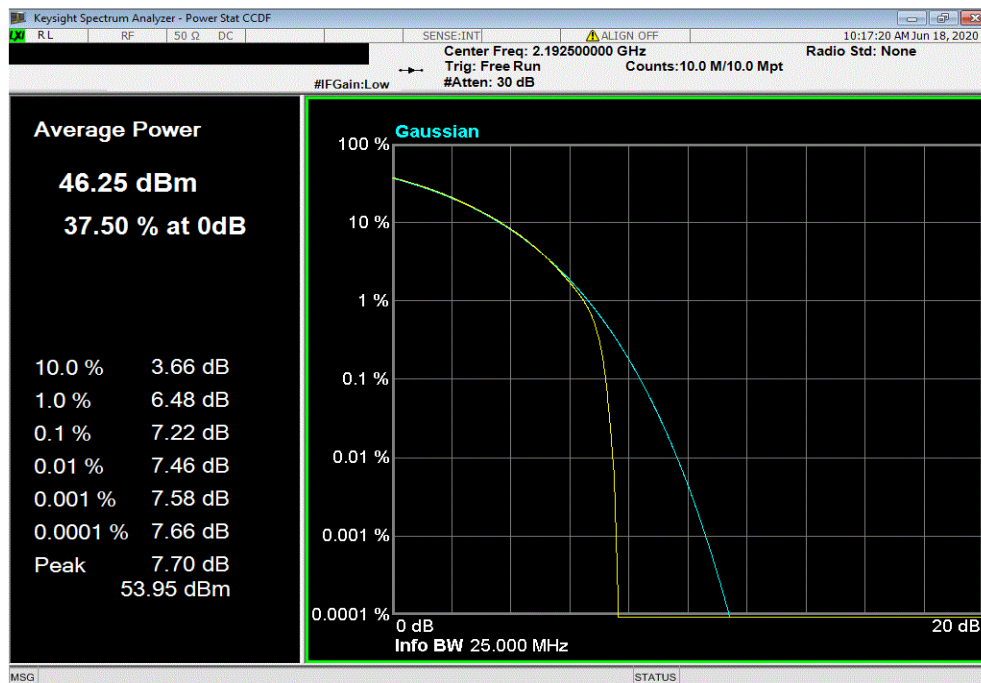


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth , 64-QAM Modulation, Low Channel 2117.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.09	13	Pass

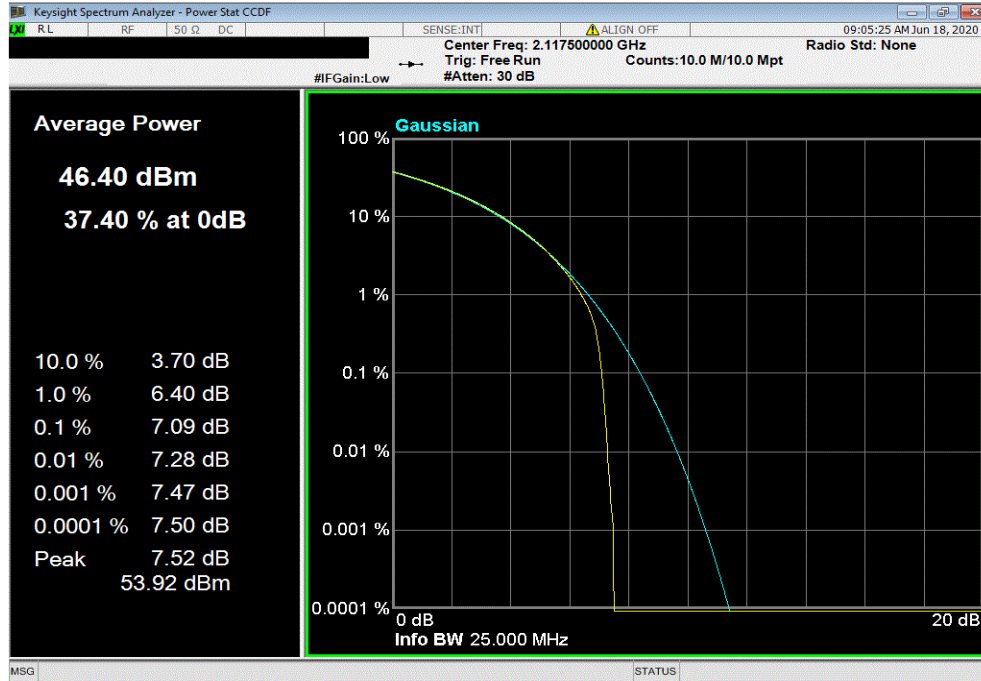

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth , 64-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.07	13	Pass

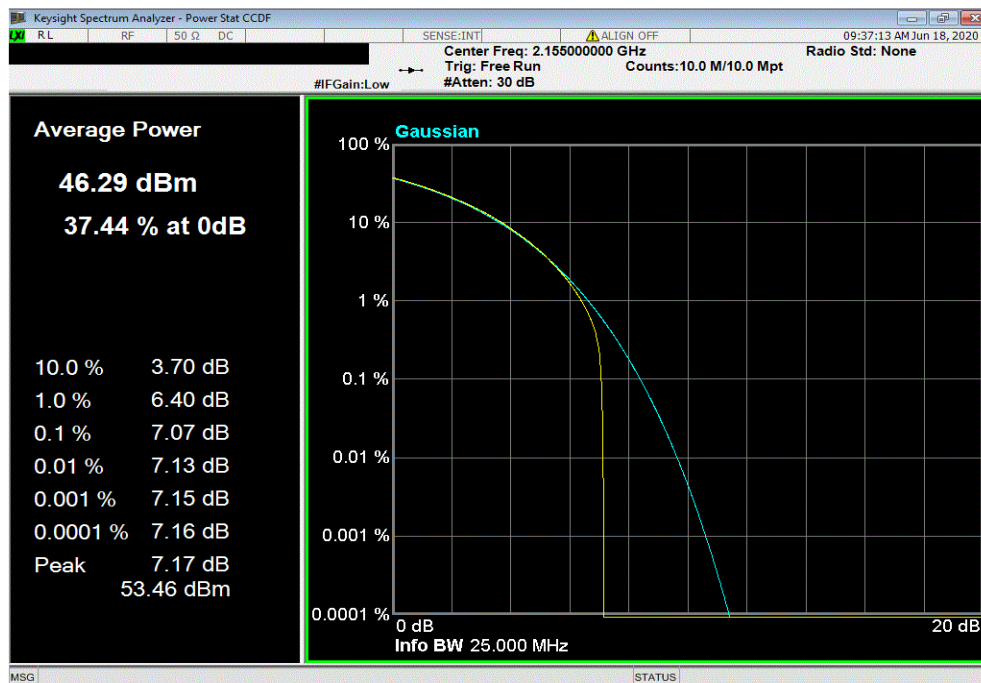


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth , 64-QAM Modulation, High Channel 2192.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.13	13	Pass

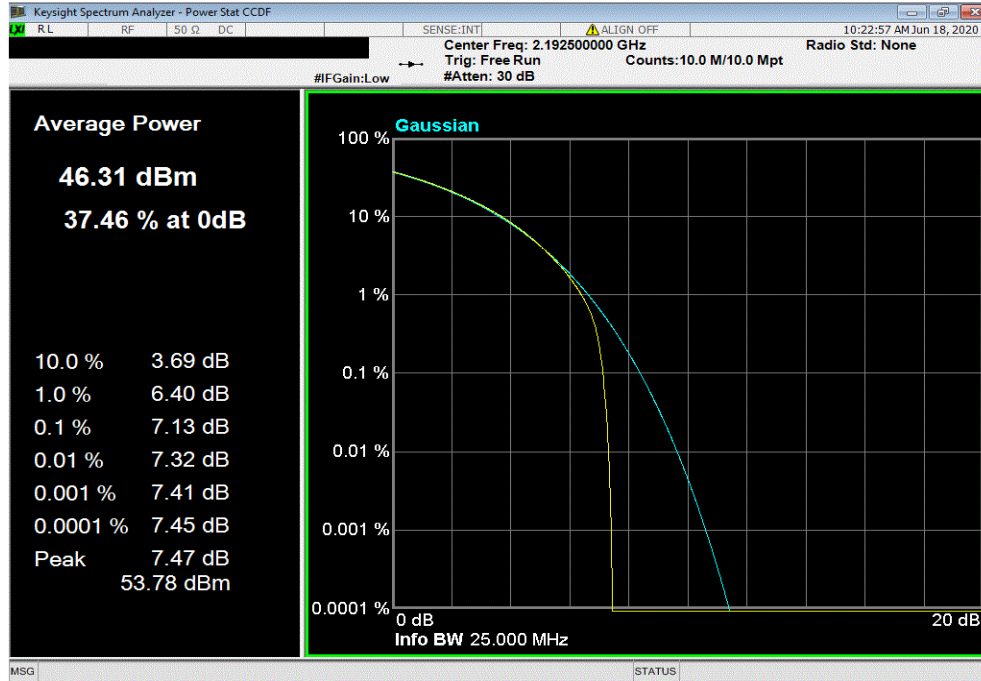

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth , 256-QAM Modulation, Low Channel 2117.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.11	13	Pass

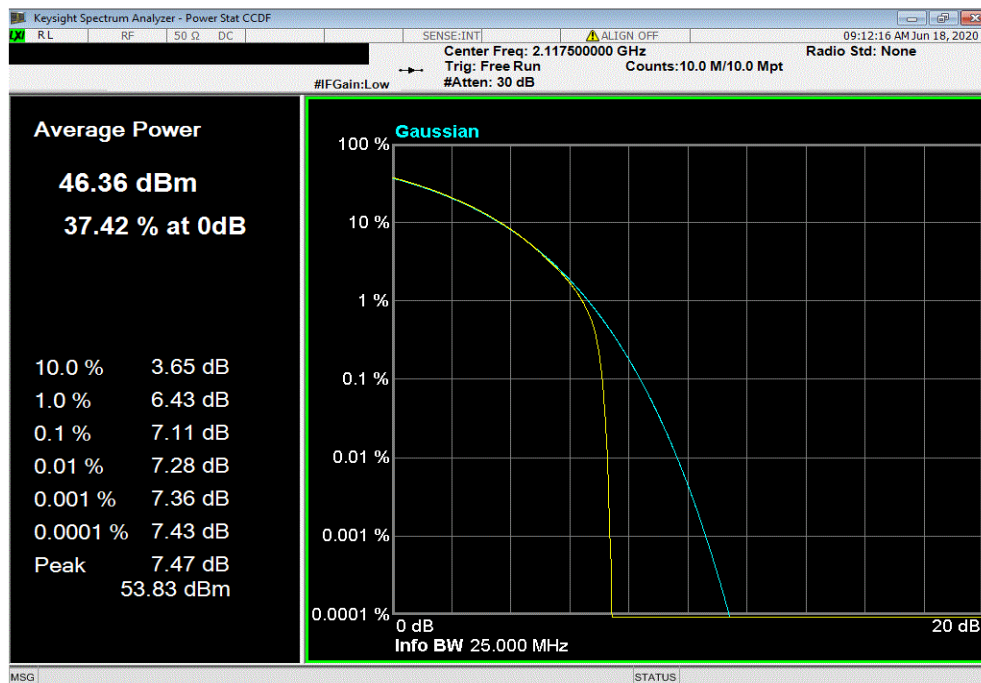


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.08	13	Pass

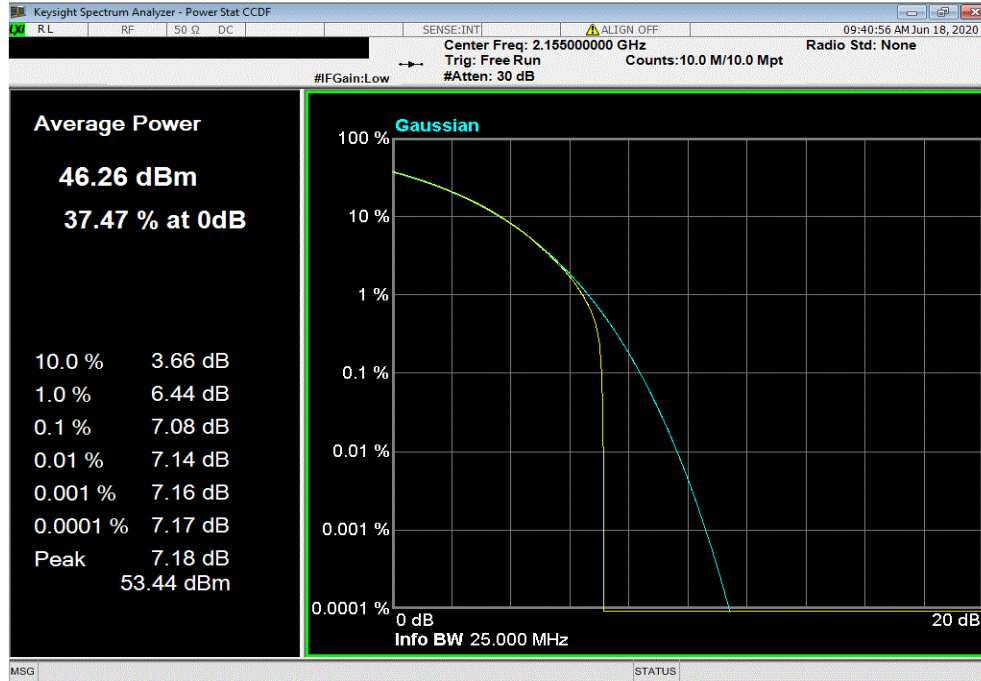

Port 4, Band n66, 2110 MHz - 2200 MHz, 15 MHz Bandwidth, 256-QAM Modulation, High Channel 2192.5 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.14	13	Pass

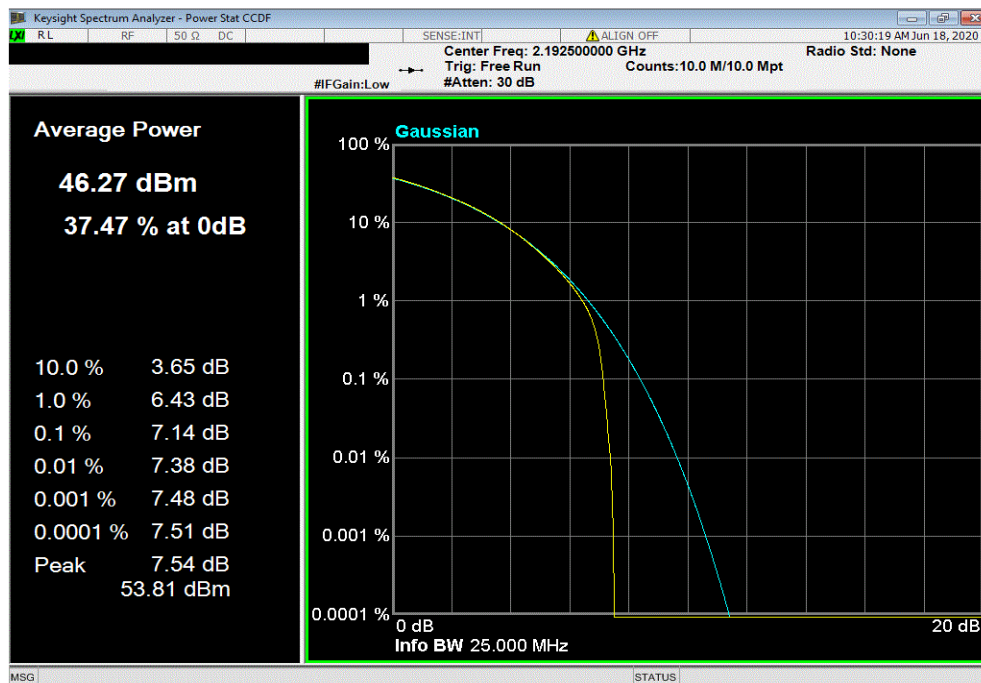


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, QPSK Modulation, Low Channel 2120 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.06	13	Pass

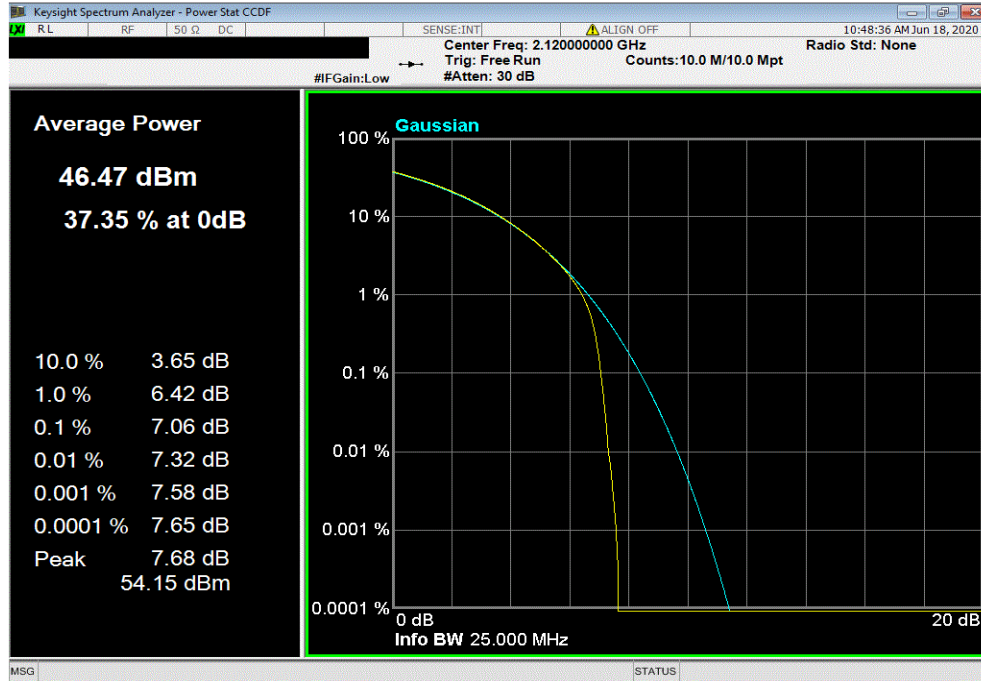

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, QPSK Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7	13	Pass

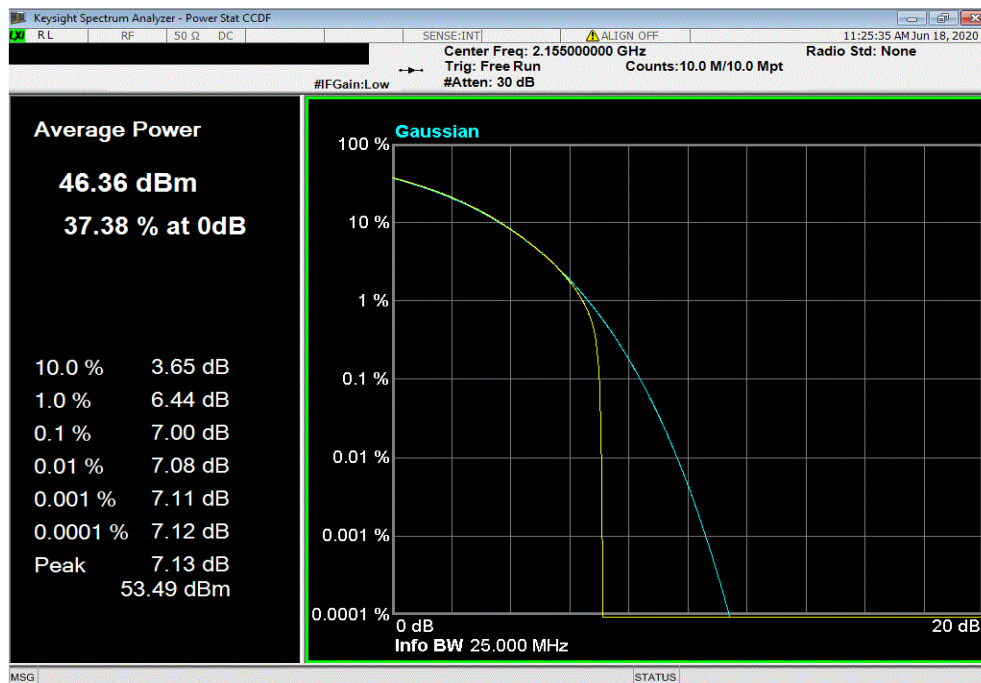


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, QPSK Modulation, High Channel 2190 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.12	13	Pass

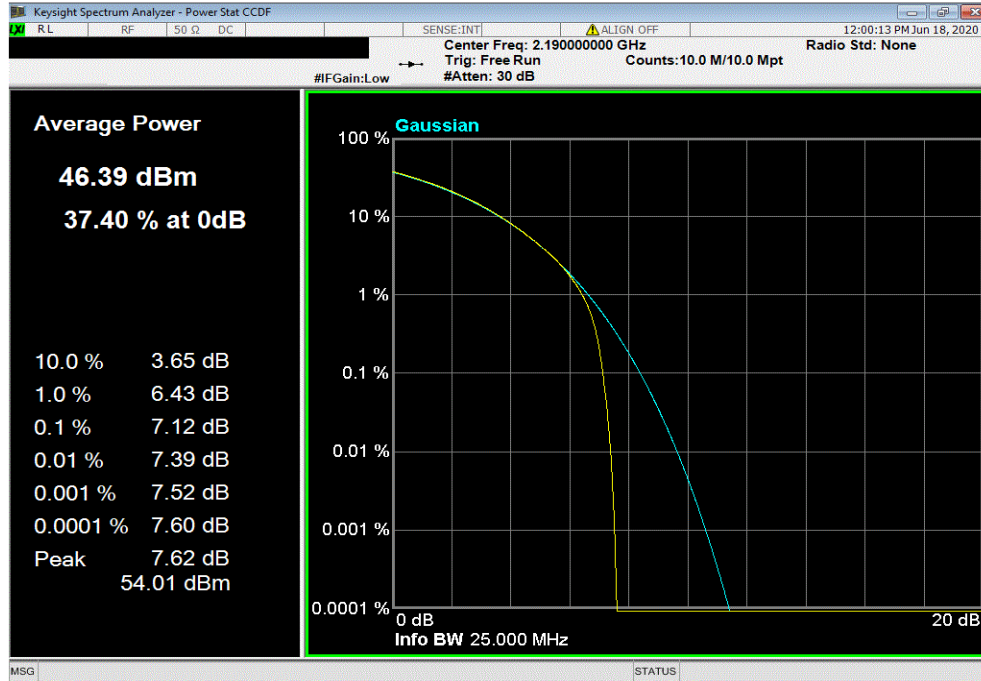

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 16-QAM Modulation, Low Channel 2120 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.14	13	Pass

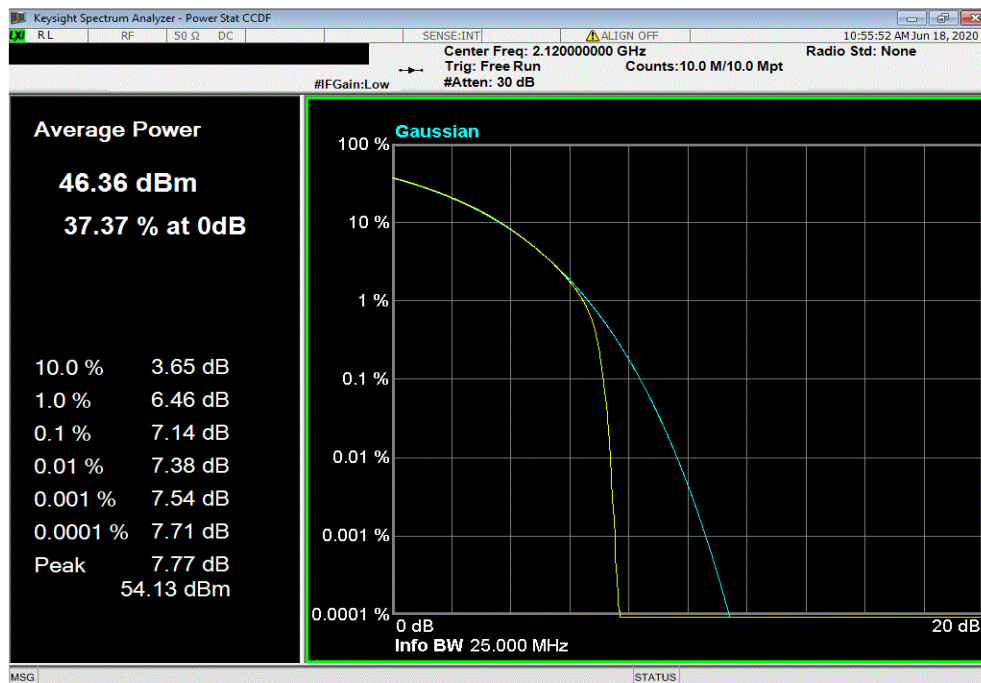


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TbTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 16-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.06	13	Pass

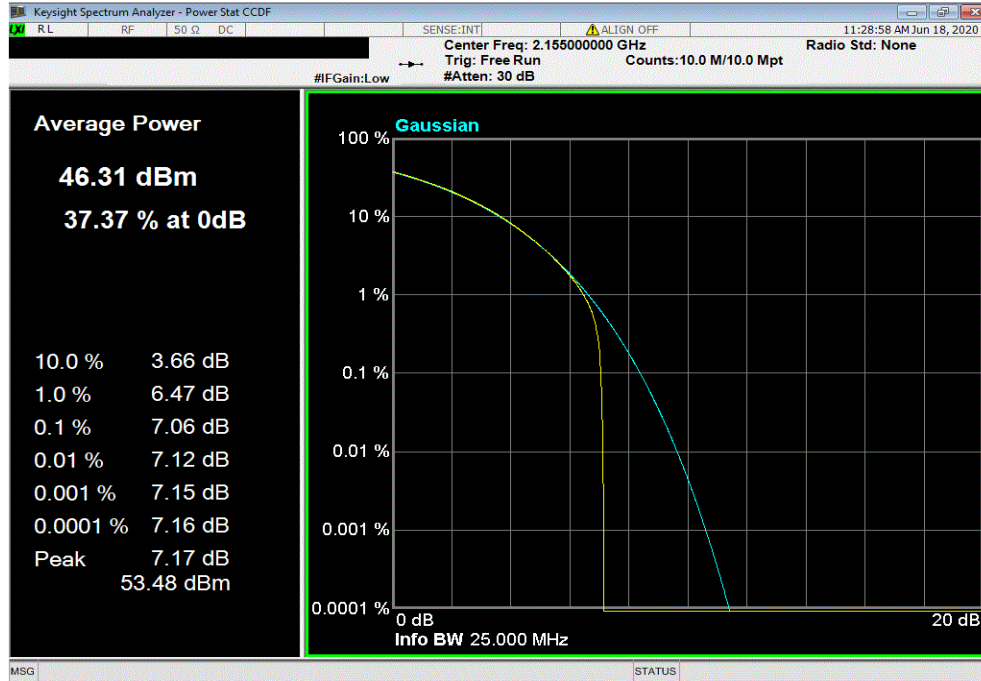

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 16-QAM Modulation, High Channel 2190 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.16	13	Pass

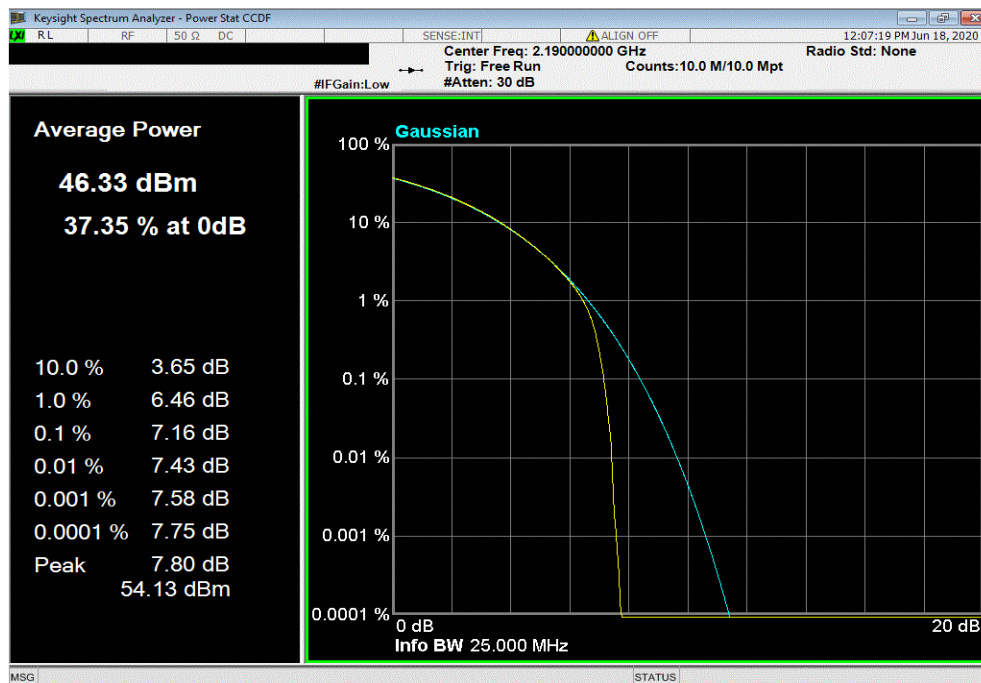


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 64-QAM Modulation, Low Channel 2120 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.08	13	Pass

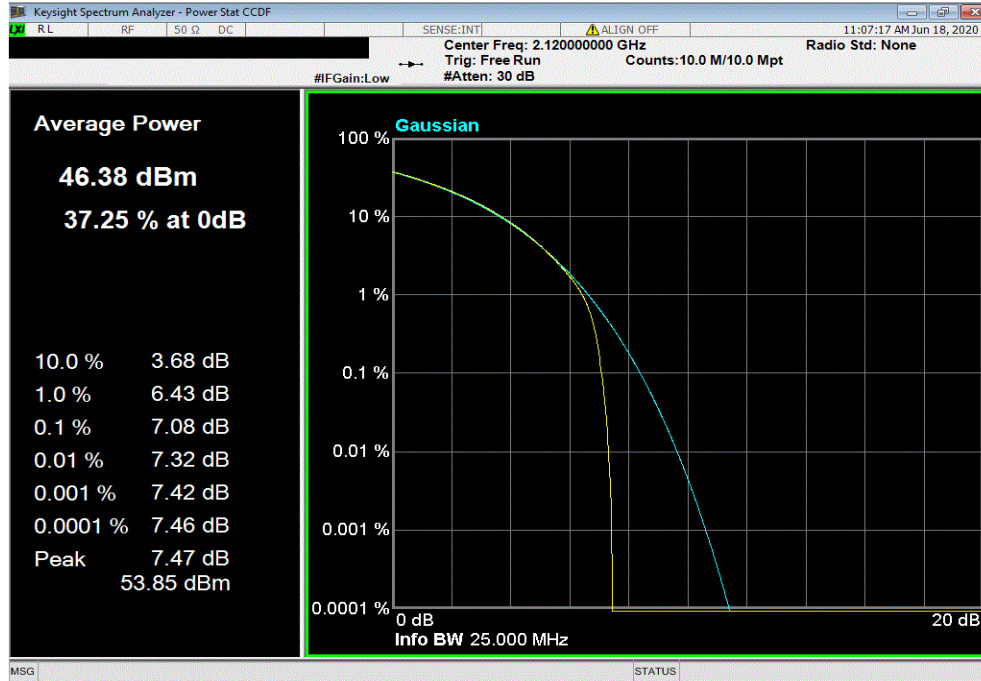

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 64-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7	13	Pass

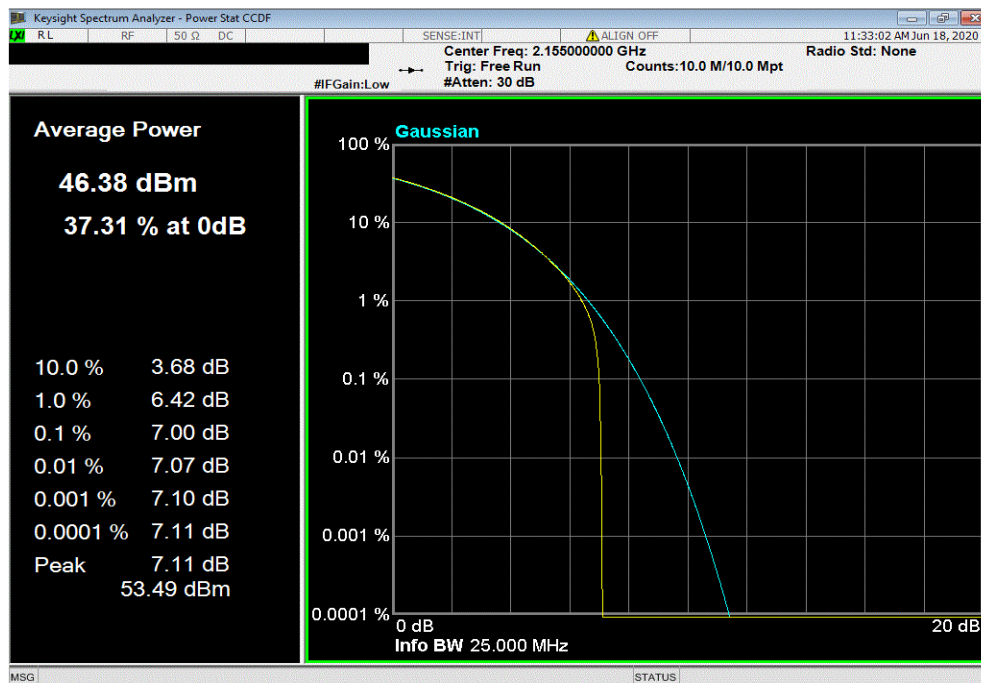


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 64-QAM Modulation, High Channel 2190 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.11	13	Pass

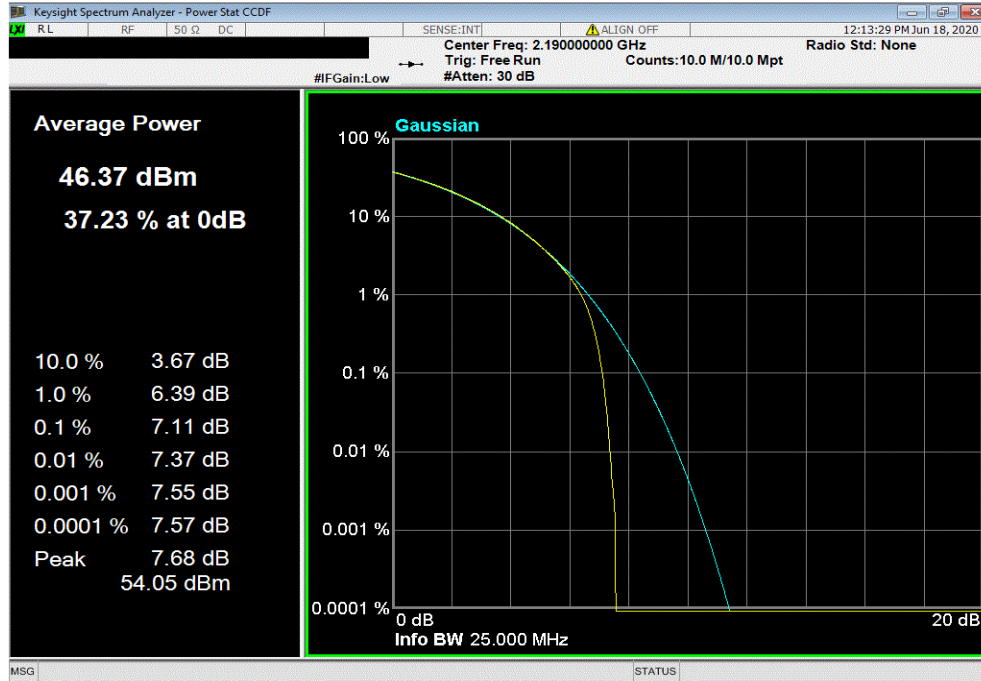

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Low Channel 2120 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.04	13	Pass

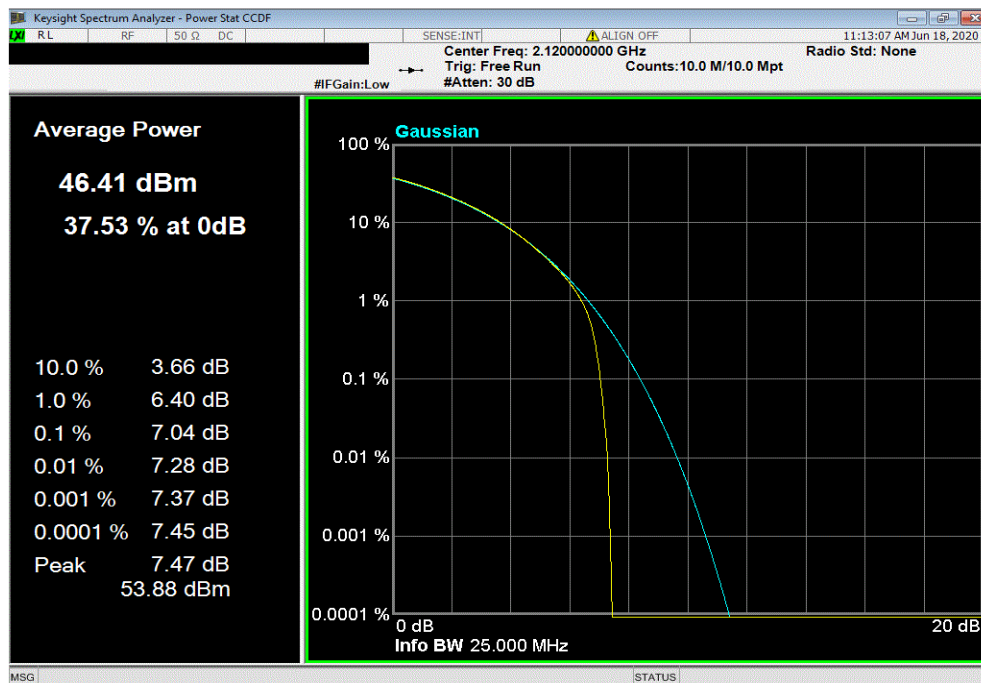


PEAK TO AVERAGE POWER (PAPR) - BAND n66




TMTx 2020.06.08.0 BETA XMIT 2020.03.25.0

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, Mid Channel 2155 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				6.98	13	Pass

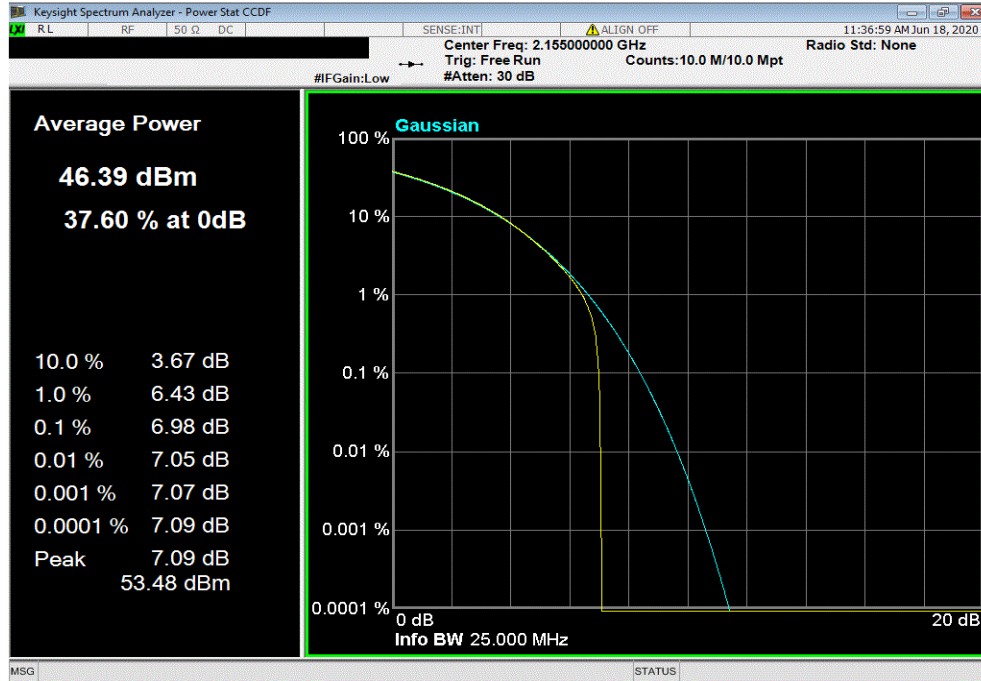

Port 4, Band n66, 2110 MHz - 2200 MHz, 20 MHz Bandwidth, 256-QAM Modulation, High Channel 2190 MHz						
				PAPR Value (dB)	PAPR Limit (dB)	Results
				7.11	13	Pass

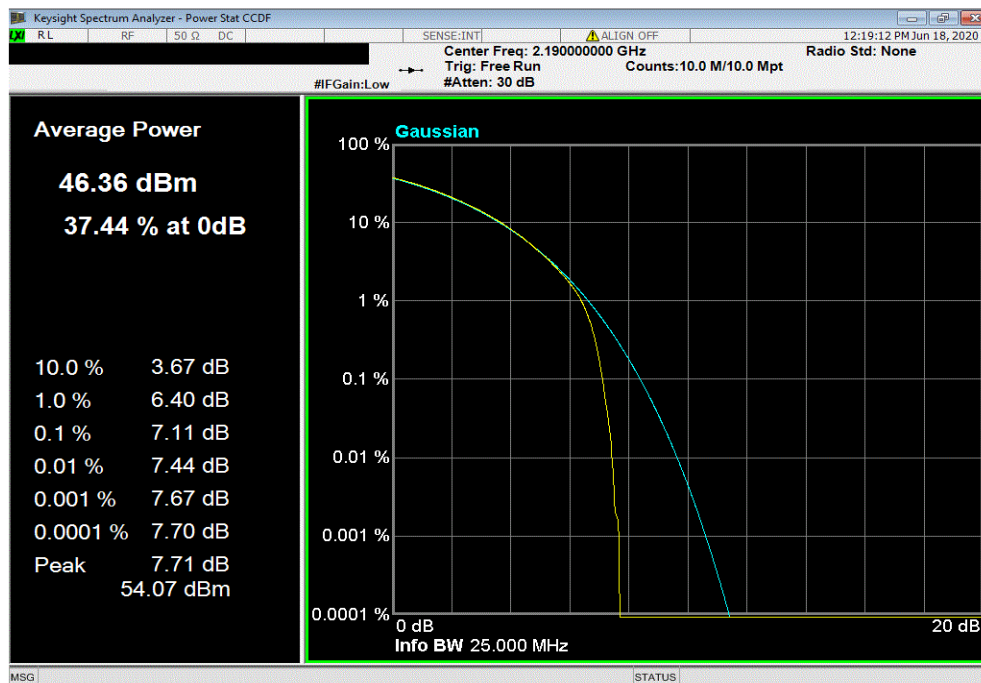

BAND EDGE COMPLIANCE - BAND 25



XMIT 2020.03.25.0

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	27-Feb-20	27-Feb-21
Generator - Signal	Keysight	N5171B-506	TEW	2-May-18	2-May-21

TEST DESCRIPTION

Prior to making the measurements the setup including cables and attenuator was calibrated with a signal generator and a power meter.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in the available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge.

All limits were adjusted by a factor of $[-10 \cdot \log(4)]$ dB to account for the device operation as a 4 port MIMO transmitter, as per FCC KDB 622911.

Per FCC 24.238(a) the power of any emission outside of the authorized operating frequency range cannot exceed -13 dBm. The limit is adjusted to -19 dBm $[-13 \text{ dBm} - 10 \log(4)]$ per FCC KDB 662911D01 v02r01 because the BTS may operate as a 4 port MIMO transmitter.

Per FCC 24.238(b) emissions seen up to 1 MHz outside of authorized operating frequency range band edges shall be measured with a RBW of 1% of the measured emission bandwidth. Any emission seen to be > 1 MHz further outside the band edges shall be measured with a RBW of 1 MHz. However, a narrower RBW of at least 1% of the emission bandwidth is still allowed provided that the measured power is integrated over the full reference bandwidth of 1 MHz.

RF conducted emissions testing was performed only on one port. The testing was performed on the same version of hardware (AHFIG) as the original certification test. The AHFIG antenna ports are essentially electrically identical (the RF power variation between antenna ports is small as shown in the original certification testing) and antenna port 4 was selected to perform the testing under this effort as allowed by ANSI C63.26-2015 paragraph 5.7.2i.

Carrier bandwidths of 10, 15, & 20MHz were verified using NB IoT GB carriers under this effort. The LTE modulation type for this testing was set up according to 3GPP TS 36.141 E-UTRA Test Models and is "E-TM 1.1 (QPSK modulation type) with N-TM (narrow band IoT)".

BAND EDGE COMPLIANCE - BAND 25



TstTx 2020.06.06.0 BETA XMIR 2020.03.25.0


EUT: AHFIG		Work Order: NOKI0016	
Serial Number: K9191322351		Date: 23-Jun-20	
Customer: Nokia Solutions and Networks		Temperature: 22.6 °C	
Attendees: Mitchell Hill, John Rattavong		Humidity: 52.1% RH	
Project: None		Barometric Pres.: 1016 mbar	
Tested by: Brandon Hobbs		Power: 54 VDC	
Job Site: TX05			
TEST SPECIFICATIONS		Test Method	
FCC 24E:2020		ANSI C63.26:2015	
COMMENTS			
All measurement path losses were accounted for in the reference level offset including any attenuators, filters and DC blocks. The carrier was set to maximum for all testing.			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	6	Signature	
		Frequency Range	Measured Freq (MHz)
			Max Value (dBm)
			Limit < (dBm)
			Result
Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz			
10 MHz Bandwidth			
QPSK Modulation			
	Low Channel 1935 MHz	1	1930.0
	Low Channel 1935 MHz	2	1928.5
	Low Channel 1935 MHz	3	1927.8
	High Channel 1990 MHz	1	1995.0
	High Channel 1990 MHz	2	1996.5
	High Channel 1990 MHz	3	1997.0
15 MHz Bandwidth			
QPSK Modulation			
	Low Channel 1937.5 MHz	1	1930.0
	Low Channel 1937.5 MHz	2	1928.5
	Low Channel 1937.5 MHz	3	1927.5
	High Channel 1987.5 MHz	1	1995.0
	High Channel 1987.5 MHz	2	1996.5
	High Channel 1987.5 MHz	3	1997.2
20 MHz Bandwidth			
QPSK Modulation			
	Low Channel 1940 MHz	1	1930.0
	Low Channel 1940 MHz	2	1928.5
	Low Channel 1940 MHz	3	1927.7
	High Channel 1985 MHz	1	1995.0
	High Channel 1985 MHz	2	1996.5
	High Channel 1985 MHz	3	1997.2

BAND EDGE COMPLIANCE - BAND 25




TbTx 2020.06.08.0 BETA XMt 2020.03.25.0

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, Low Channel 1935 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
1	1930	-23.27	-19	Pass		

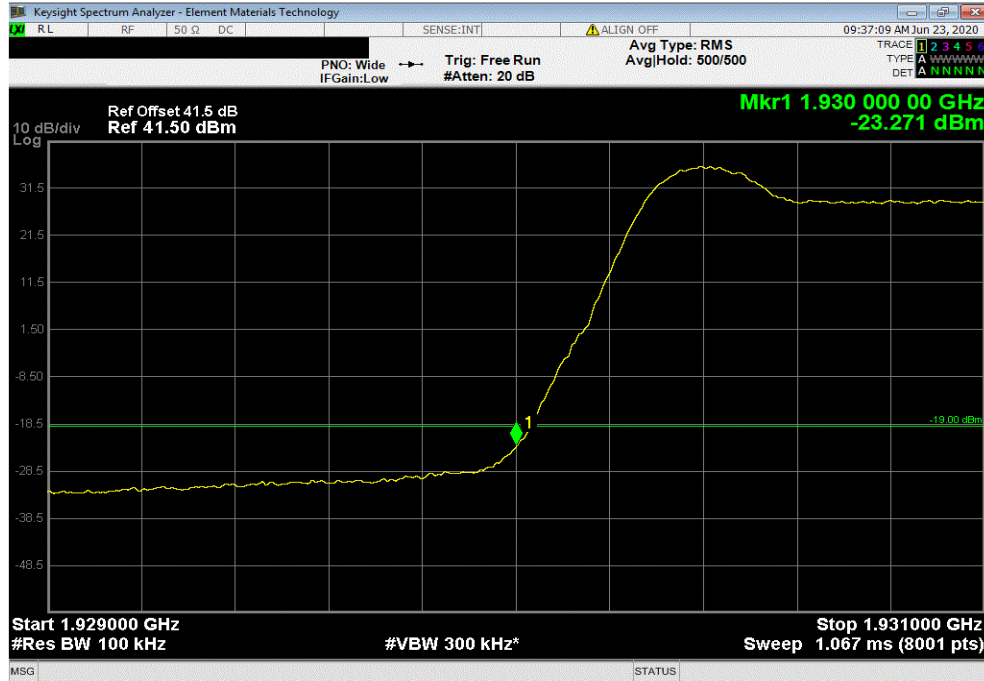

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, Low Channel 1935 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
2	1928.5	-23.60	-19	Pass		

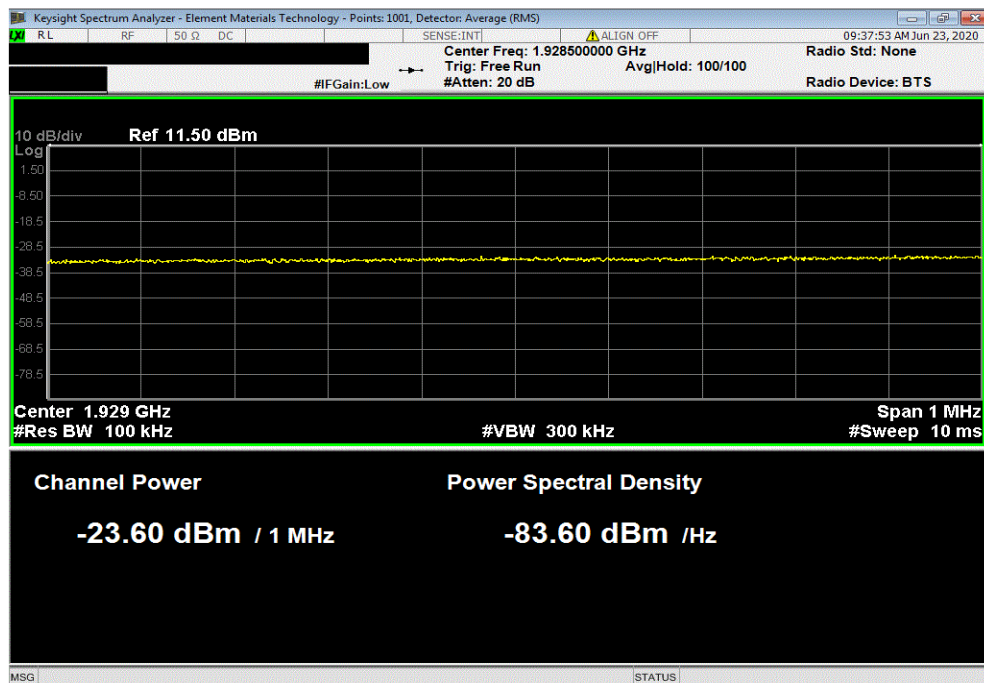


BAND EDGE COMPLIANCE - BAND 25




TbTx 2020.06.08.0 BETA XMit 2020.03.25.0

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, Low Channel 1935 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
3	1927.8	-22.72	-19	Pass		

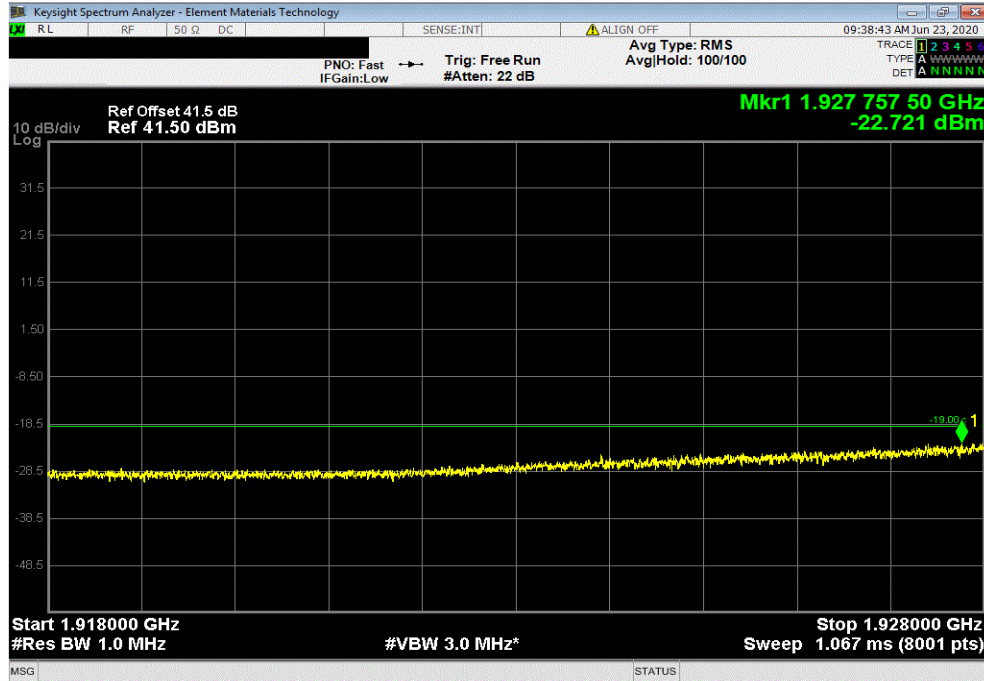

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, High Channel 1990 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
1	1995.0	-22.32	-19	Pass		

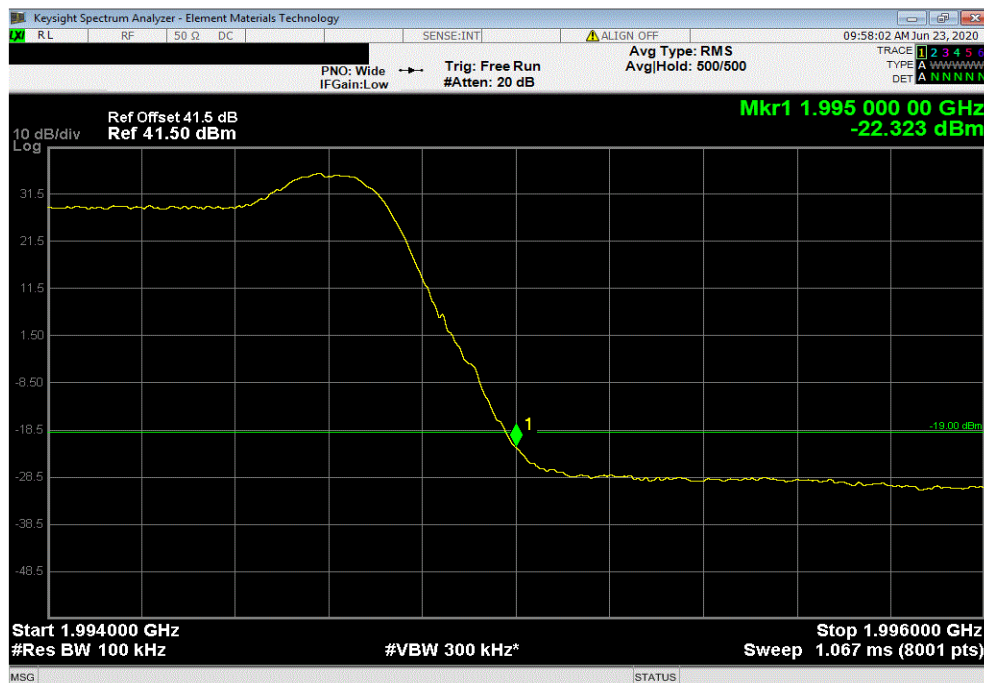


BAND EDGE COMPLIANCE - BAND 25




TbTx 2020.06.08.0 BETA XMt 2020.03.25.0

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, High Channel 1990 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
2	1996.5	-22.18	-19	Pass		

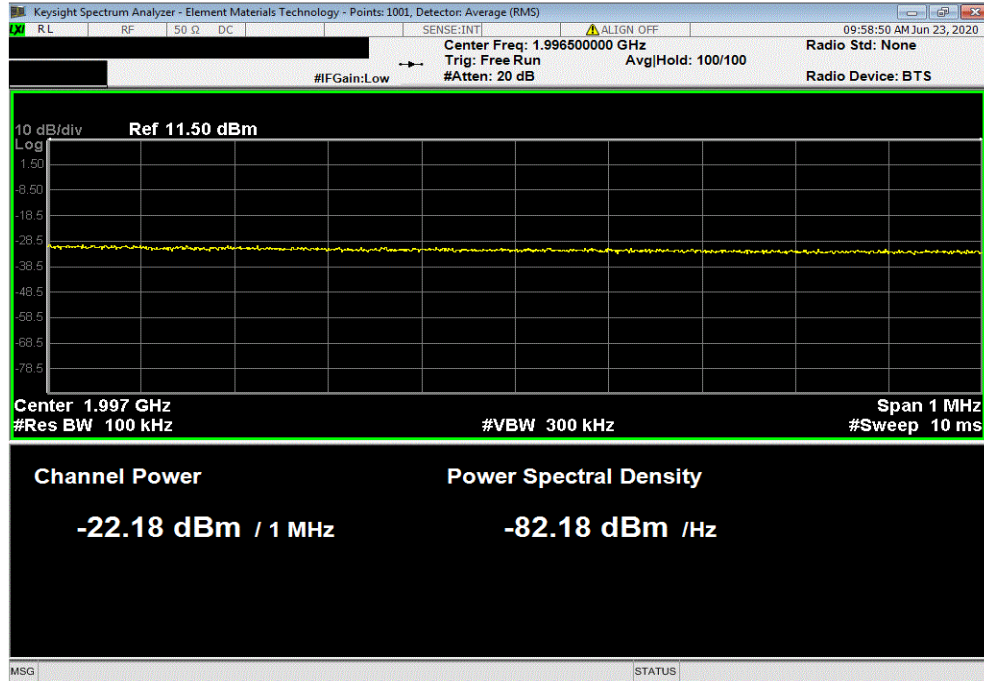

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 10 MHz Bandwidth, QPSK Modulation, High Channel 1990 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
3	1997.0	-21.43	-19	Pass		

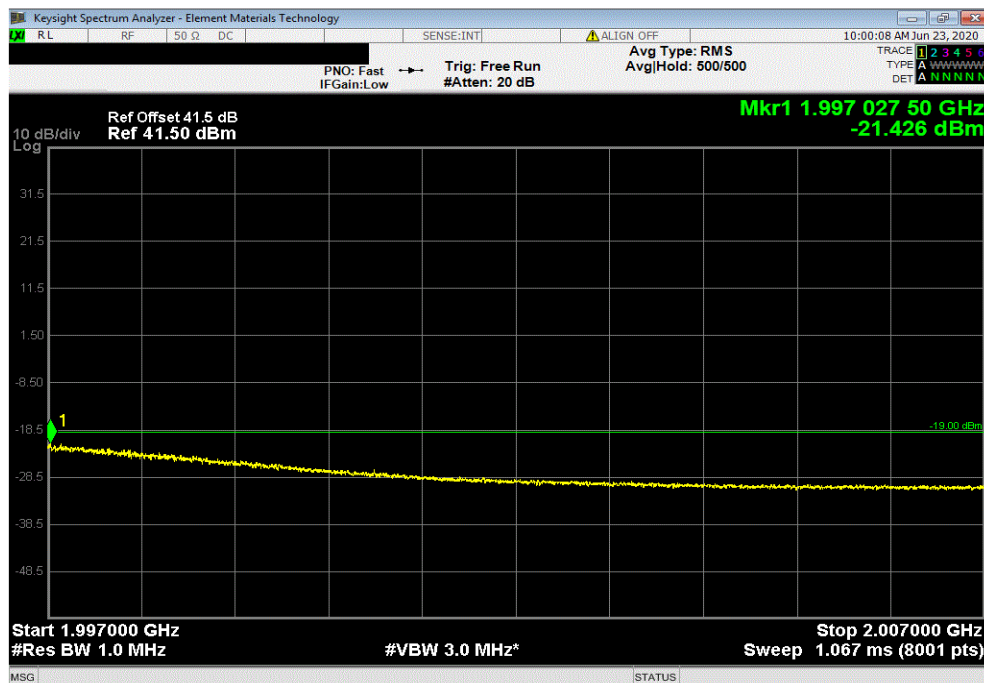


BAND EDGE COMPLIANCE - BAND 25




TMTx 2020.06.08.0 BETA XMt 2020.03.25.0

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, Low Channel 1937.5 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
1	1930.0	-25.52	-19	Pass		

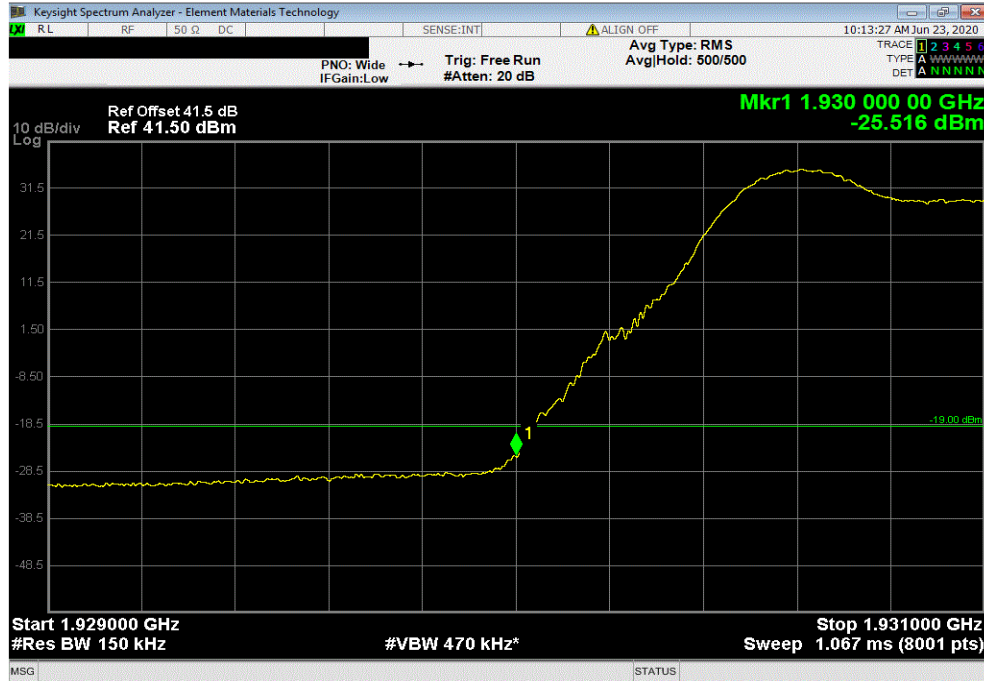

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, Low Channel 1937.5 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
2	1928.5	-24.58	-19	Pass		

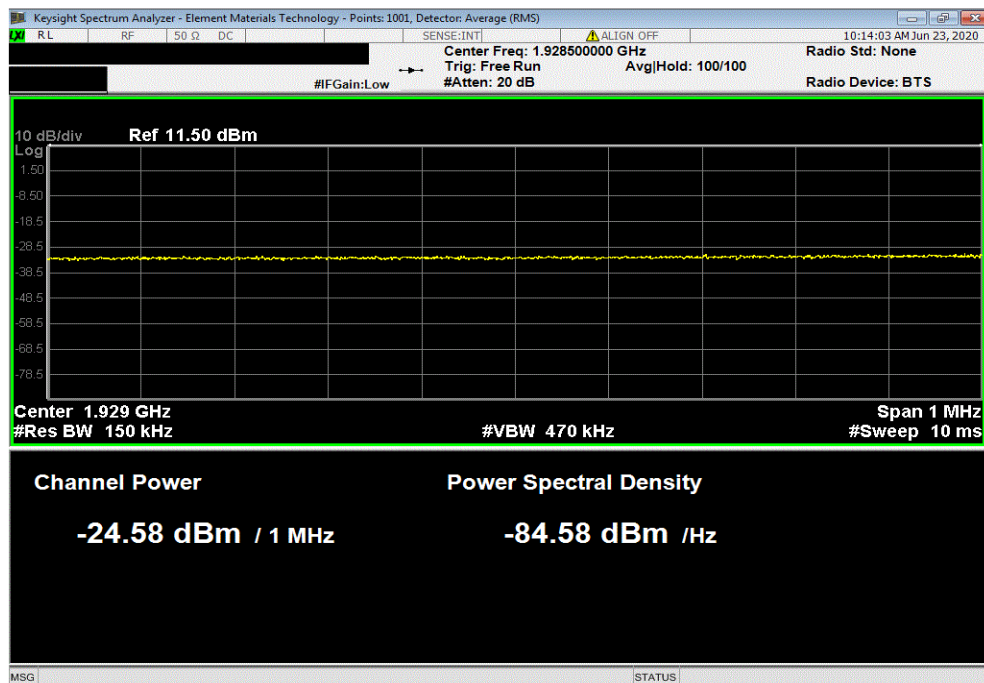


BAND EDGE COMPLIANCE - BAND 25




TMTx 2020.06.08.0 BETA XMt 2020.03.25.0

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, Low Channel 1937.5 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
3	1927.5	-22.87	-19	Pass		

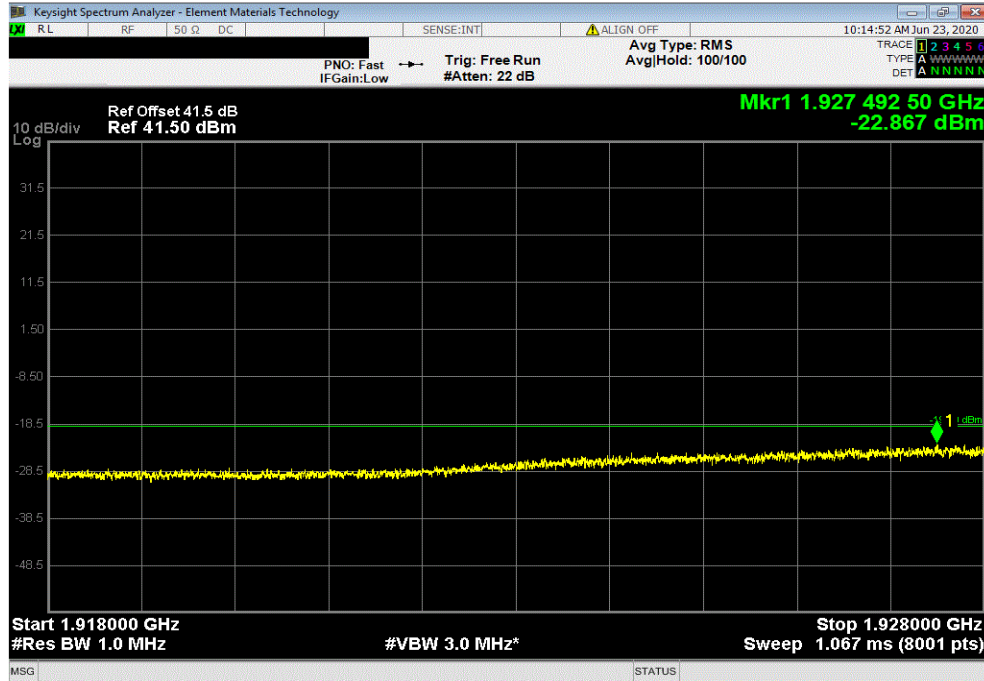

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, High Channel 1987.5 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
1	1995.0	-23.52	-19	Pass		

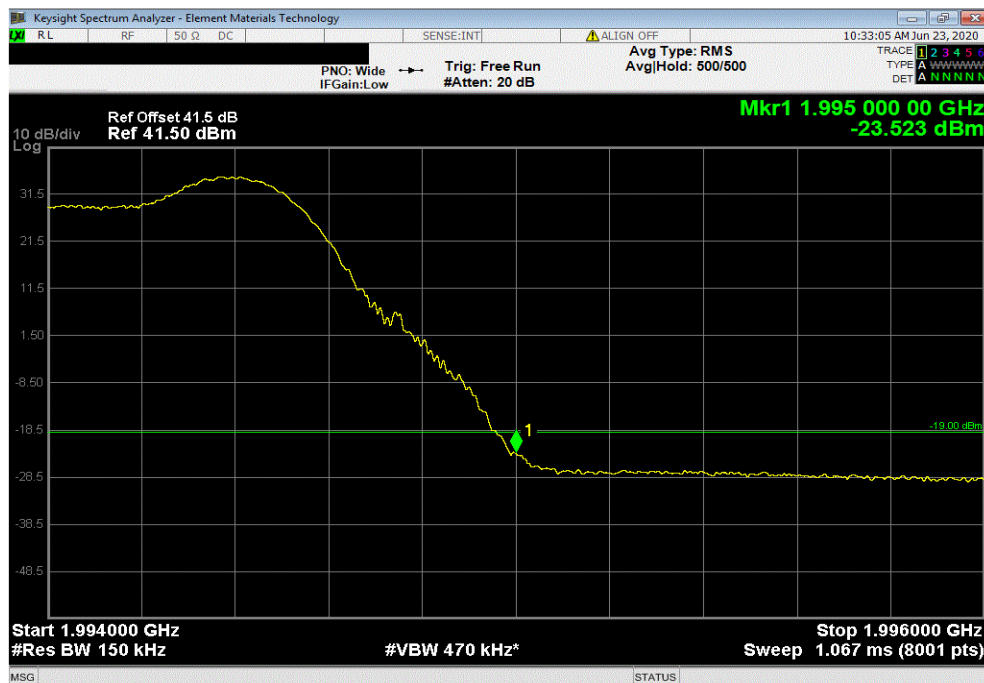


BAND EDGE COMPLIANCE - BAND 25




TbTx 2020.06.08.0 BETA XMt 2020.03.25.0

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, High Channel 1987.5 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
2	1996.5	-21.30	-19	Pass		

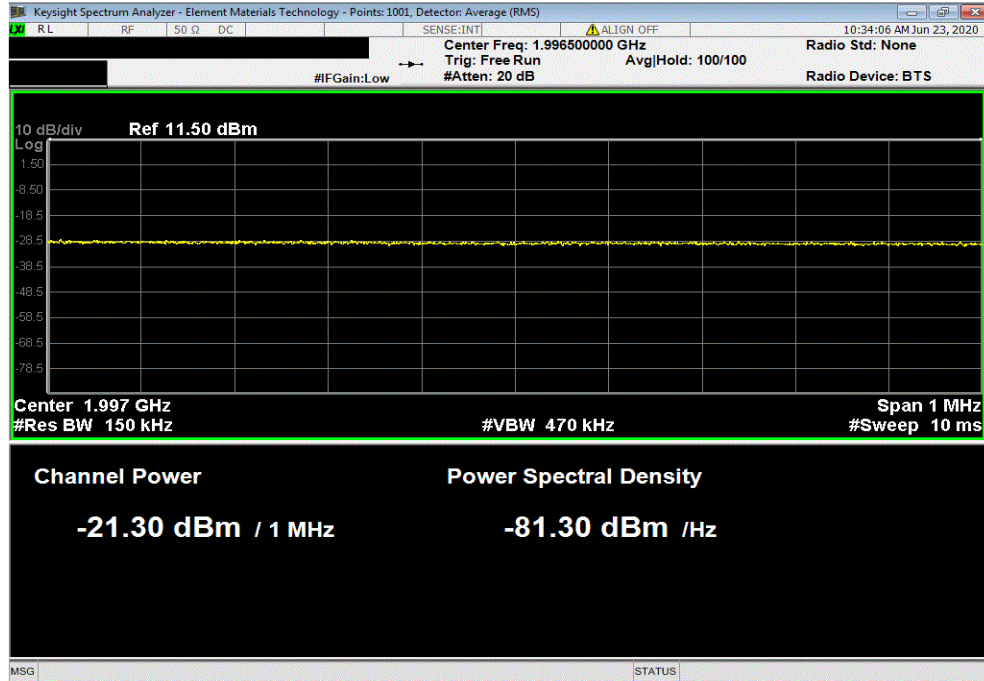

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 15 MHz Bandwidth, QPSK Modulation, High Channel 1987.5 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
3	1997.2	-21.07	-19	Pass		

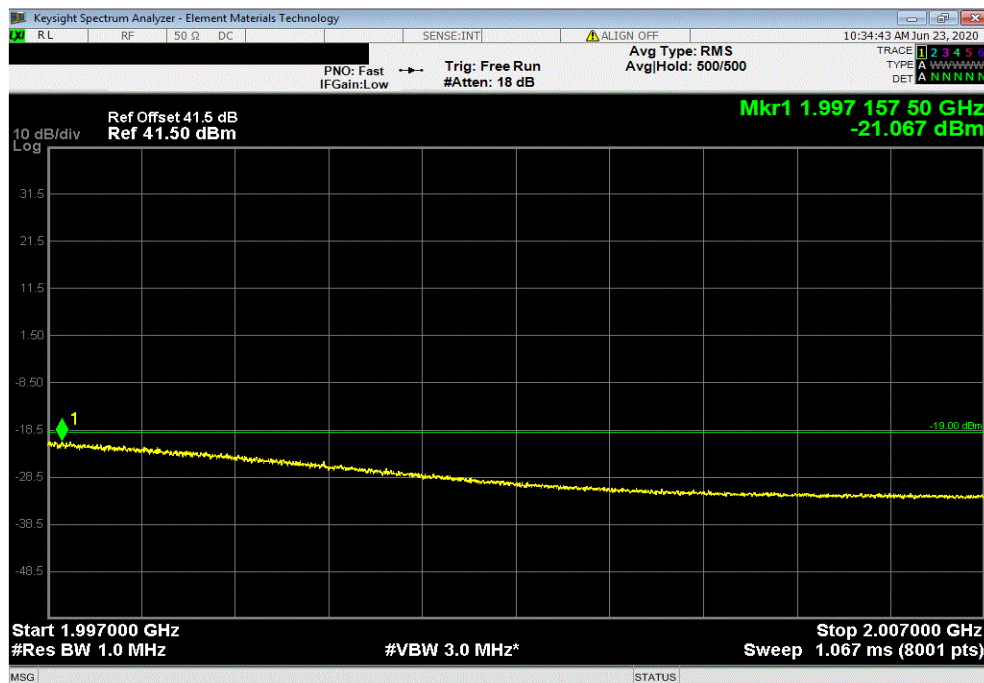


BAND EDGE COMPLIANCE - BAND 25




TbTx 2020.06.08.0 BETA XMt 2020.03.25.0

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, Low Channel 1940 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
1	1930.0	-24.07	-19	Pass		

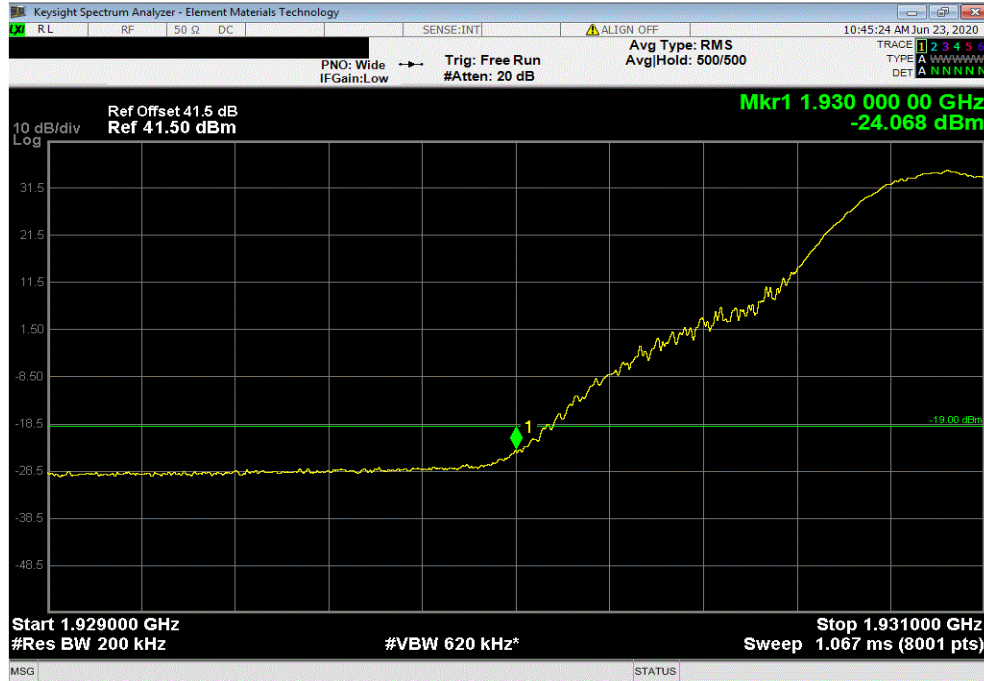

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, Low Channel 1940 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
2	1928.5	-22.89	-19	Pass		

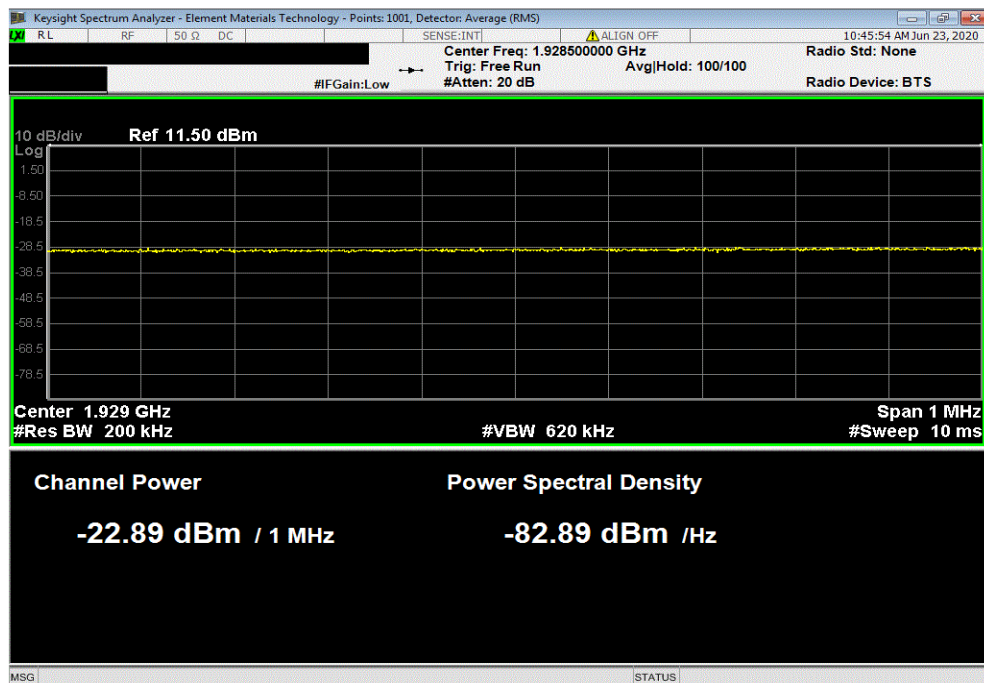


BAND EDGE COMPLIANCE - BAND 25




TbTx 2020.06.08.0 BETA XMt 2020.03.25.0

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, Low Channel 1940 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
3	1927.7	-21.21	-19	Pass		

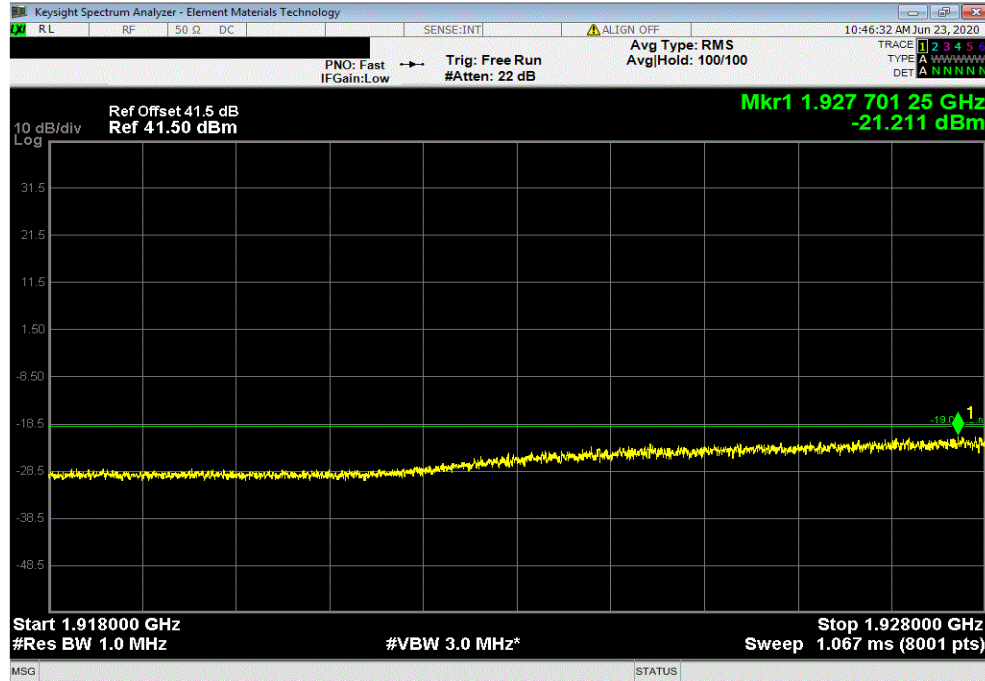

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, High Channel 1985 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
1	1995.0	-22.34	-19	Pass		

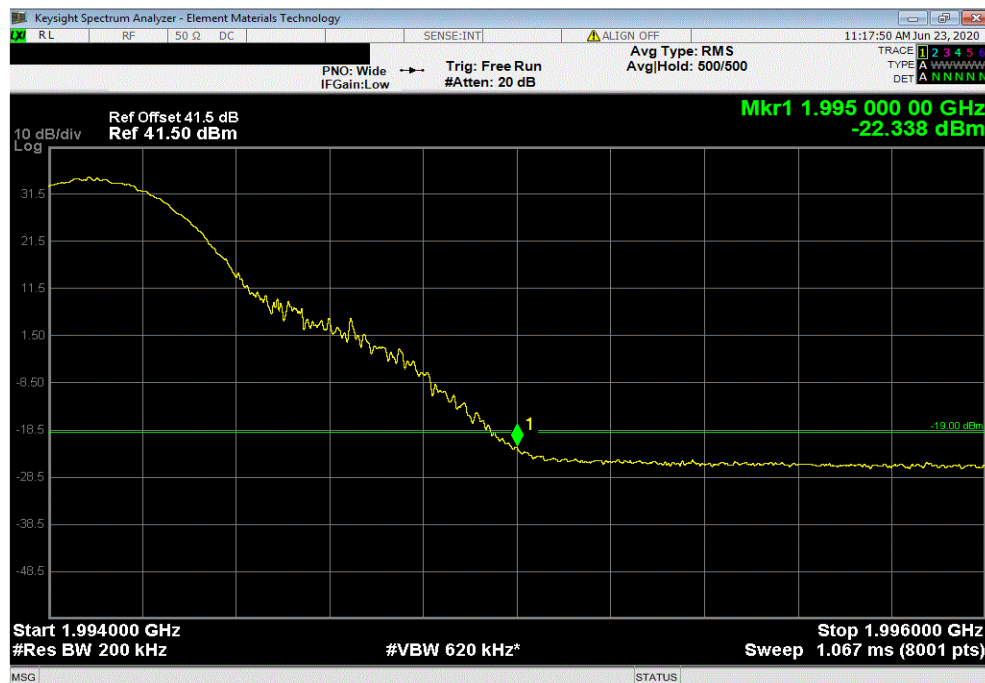


BAND EDGE COMPLIANCE - BAND 25



TbTx 2020.06.08.0 BETA XMI 2020.03.25.0

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, High Channel 1985 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
2	1996.5	-19.46	-19	Pass		

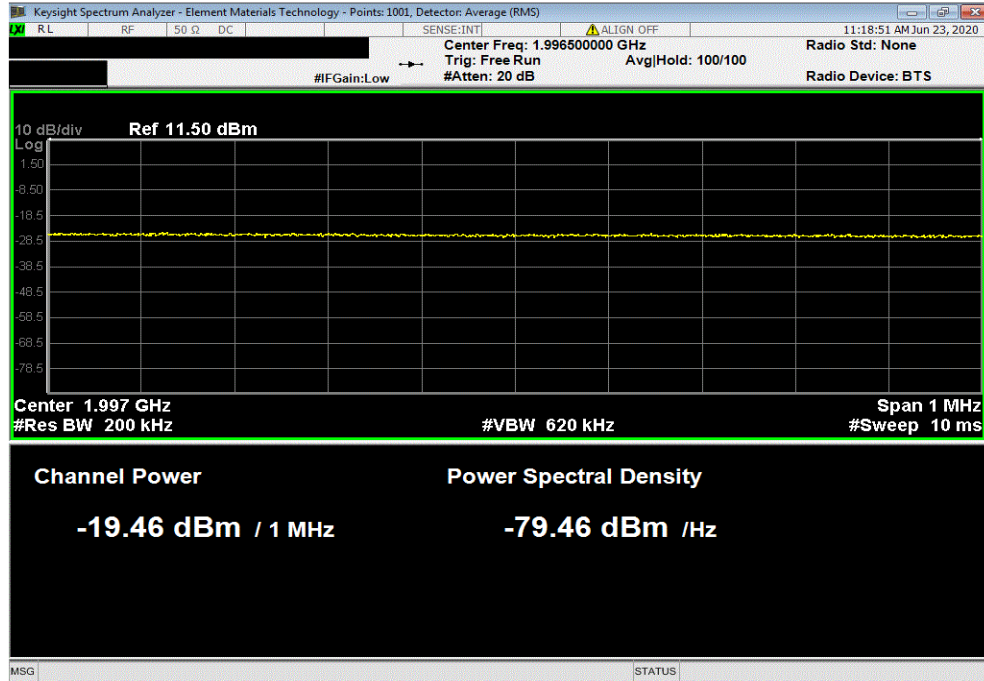

Port 4, Band 25 NB IoT, 1930 MHz - 1995 MHz, 20 MHz Bandwidth, QPSK Modulation, High Channel 1985 MHz						
Frequency Range	Measured Freq (MHz)	Max Value (dBm)	Limit < (dBm)	Result		
3	1997.2	-19.57	-19	Pass		

