

# **EMC Technologies Pty Ltd**

ABN 82 057 105 549 176 Harrick Road, Keilor Park Victoria 3042, Australia

Ph: + 613 9365 1000 Fax: + 613 9331 7455 Email: sales@emctech.com.au

# RADIO TEST REPORT FOR CERTIFICATION to FCC PART 15 Subpart C (Section 15.247)

**Test Sample:** Envision Wireless Area Controller

Model: LFC8400

FCC ID: VBO-LFC8400 Report Number: M150113-11A

(This report superseded M150113-11)

**Tested for:** Philips Dynalite

Issue Date: 13 July 2015

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.





This document is issued in accordance with NATA's accreditation requirements. The results of tests, calibrations and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing calibration and inspection reports.

This document shall not be reproduced except in full.

Report No.: M150113-11A Page 2 of 30

# RADIO TEST REPORT FOR CERTIFICATION to FCC PART 15 Subpart C (Section 15.247)

EMC Technologies Report No.: M150113-11A

Issue Date: 13 July 2015

## **Contents**

1.0	INTRODUCTION	4
2.0	GENERAL INFORMATION	5
3.0	ANTENNA REQUIREMENT (§15.203)	7
4.0	CONDUCTED EMISSIONS (§15.207)	7
5.0	DTS 6 dB BANDWIDTH (§15.247 (a)(2))	10
6.0	PEAK OUTPUT POWER (§15.247 (b)(3))	13
7.0	BAND-EDGE EMISSION MEASUREMENTS	16
8.0	SPURIOUS EMISSION MEASUREMENTS (§15.247 (d))	18
9.0	POWER SPECTRAL DENSITY (§15.247 (d))	26
10.0	RADIO FREQUENCY EXPOSURE (HAZARD)	29
11.0	COMPLIANCE STATEMENT	29
12.0	UNCERTAINTY	29
APPEI	NDIX A MEASUREMENT INSTRUMENT DETAILS	30



Report No.: M150113-11A Page 3 of 30

## RADIO TEST REPORT FOR CERTIFICATION

to

FCC PART 15 Subpart C (Section 15.247)

**Report Number:** M150113-11A (Supersedes Report M150113-11)

Test Sample: Envision Wireless Area Controller

Model: LFC8400 FCC ID: VBO-LFC8400

**Equipment Type:** Intentional Radiator (Transceiver)

Manufacturer: Philips Dynalite

Address: 6/691 Gardeners Road. Mascot NSW 2020 Australia

**Phone:** +61 (0)2 9019 8939

Contact: Rana Singh

Email: rana.singh@philips.com

Test Standards: FCC Part 15 – Radio Frequency Devices

FCC Part 15 Subpart C - Intentional Radiators

**Section 15.247** – Operation within the bands 902-928 MHz, 2400-2483.5

MHz, and 5725-5850 MHz

ANSI C63.10 - 2009

American National Standard of Procedures for Compliance Testing of

Unlicensed Wireless Devices

M. Shassenpai

KDB 558074 v03r02

Guidance for Performing Compliance Measurements on Digital Transmission

Systems (DTS) Operating Under §15.247

**Test Date:** 23<sup>rd</sup> and 26<sup>th</sup> March 2015

Test Engineer: Mahan Ghassempouri

Attestation: I hereby certify that the device(s) described herein were tested as described

in this report and that the data included is that which was obtained during

such testing.

Authorised Signatory: Chris Zombolas

**Technical Director** 

**EMC Technologies Pty Ltd** 





Report No.: M150113-11A Page 4 of 30

# RADIO TEST REPORT FOR CERTIFICATION to FCC PART 15 Subpart C (Section 15.247)

#### 1.0 INTRODUCTION

Radio testing was performed on the Dynalite Envision Wireless Area Controller Model: LFC 8400.

Test results and procedures were performed in accordance with the following Federal Communications Commission (FCC) standards/regulations:

47 CFR, Part 15, Subpart C Rules for intentional radiators (particularly section 15.247)

Section 15.203: Antenna requirements

Section 15.205: Restricted bands of operation Section 15.207: Conducted Emission Limits

Section 15.209: Radiated Emission Limits (General requirements)

Section 15.247: Operation in the bands 902-928 MHz, 2400-2483.5 MHz,

5725-5850 MHz

The test sample **complied** with the requirements of 47 CFR, Part 15 Subpart C - Section 15.247.

The measurement procedure used was in accordance with ANSI C63.10-2009. The instrumentation conformed to the requirements of ANSI C63.2-2009.

## 1.1 Summary of Results

FCC Part 15 Subpart C	Test Performed	Results
15.203	Antenna requirement	Complied
15.205	Operation in restricted Band	Complied
15.207	Conducted emissions limits	Complied
15.209	Radiated emissions limits	Complied
15.247 (a)(2)	Minimum 6 dB Bandwidth	Complied
15.247 (b)(3)	Peak Output Power	Complied
15.247 (c)	Antenna Gain > 6 dBi	N/A as EUT uses integral antenna with less than 6 dBi gain with no external antenna connector
15.247 (d)	Out of Band Emissions	Complied
15.247 (e)	Peak Power Spectral Density	Complied
15.247 (f)	Hybrid Systems	N/A assessed to digital modulation requirements
15.247 (g)	Hopping channel application	N/A assessed to digital modulation requirements
15.247 (h)	Incorporation of intelligence within FHSS	N/A assessed to digital modulation requirements
15.247 (i)	Radio Frequency Hazard	Complied

N/A: Not Applicable

## 1.2 Modifications by EMC Technologies

No modifications were required to achieve compliance.





Report No.: M150113-11A Page 5 of 30

## 2.0 GENERAL INFORMATION

(Information supplied by the Client)

#### 2.1 EUT (Transmitter) Details

The RF transmitter was a Bluetooth Low Energy device operating in 2.4 GHz band. It used a PCB antenna. A temporary SMA connector was mounted on the device to provide a means for measuring conducted output power. Transmitter specifications are shown in below table.

**Test Sample:** Envision Wireless Area Controller

Model Number: LFC8400

**DC Supply Port Voltage Rating:** 12 to 24 VDC (Nominal),

PoE Voltage Rating: 42.5 to 57 VDC Supported Radio Standards: ZigBee (DSSS)

Operating Frequency Range: 2400 MHz to 2483.5 MHz

Low Channel: 2405 MHz Middle Channel: 2450 MHz High Channel: 2480 MHz

Nominal Output Power: -2.5 dBm e.i.r.p
Channel Avoidance Mechanism: Non-adaptive device

Number of Channels: 16
Nominal Channel Bandwidth: 5 MHz
Maximum Gain of Antenna Assembly: -7 dBi

Operating Temperature Range: -5 °C to 50 °C

## 2.2 EUT (Host) Details

The LFC8400 is a Wireless Area Controller. It was controlled and monitored by Envision Project Software. A wireless ZigBee Luminaire was controlled by the RF output from Envision Wireless Area Controller. The product was housed in a plastic enclosure approximately  $97mm(L) \times 110mm(W) \times 39mm(H)$ .

The device was designed to operate from either an external DC supply or Power over Ethernet (PoE).

#### 2.3 Test Procedure

Radio measurements were performed in accordance with the procedures of ANSI C63.10-2009. KDB 558074 v03r02 - Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 was used to demonstrate compliance with FCC part 47CFR15.247.





Report No.: M150113-11A Page 6 of 30

## 2.4 Test Facility

#### 2.4.1 General

Measurements were performed at EMC Technologies' laboratory in Keilor Park, Victoria Australia. EMC Technologies Pty Ltd is listed by the FCC as a test laboratory able to perform compliance testing for the public. EMC Technologies is listed as an FCC part 47CFR2.948 test lab and may perform the testing required under Parts 15 and 18 – FCC Registration Number 90560

EMC Technologies Pty Ltd has also been accredited as a Conformity Assessment Body (CAB) by Australian Communications and Media Authority (ACMA) under the APECTEL MRA and is designated to perform compliance testing on equipment subject to Declaration of Conformity (DoC) and Certification under Parts 15 & 18 of the FCC Commission's rules – **Registration Number 494713 & Designation number AU0001.** 

EMC Technologies' indoor open are test site (iOATS) has been accepted by Industry Canada for the performance of radiated measurements in accordance with RSS-Gen Issue 8 - Industry Canada iOATS number - IC 3569B

#### 2.4.2 NATA Accreditation

NATA is the Australian National laboratory accreditation body and has accredited EMC Technologies to operate to the IEC/ISO17025 requirements. A major requirement for accreditation is the assessment of the company and its personnel as being technically competent in testing to the standards. This requires fully documented test procedures, continued calibration of all equipment to the National Standard at the National Measurements Institute (NMI), NPL (UK), NIST (USA) and an internal quality system to ISO 9002. NATA has mutual recognition agreements with the National Voluntary Laboratory Accreditation Program (NVLAP) and the American Association for Laboratory Accreditation (A<sup>2</sup>LA).

EMC Technologies is accredited in Australia by the National Association of Testing Authorities (NATA). All testing in this report has been conducted in accordance with EMC Technologies' scope of NATA accreditation.

The current full scope of accreditation can be found on the NATA website: www.nata.asn.au

It also includes a large number of emissions, immunity, SAR, EMR and Safety standards.

# 2.5 Test Equipment Calibration

Measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent NATA registered laboratory such as Agilent Technologies (Australia) Pty Ltd, Rohde and Schwarz, NMI, NPL or NIST. All equipment calibration is traceable to Australia national standards at the National Measurements Institute. The reference antenna calibration was performed by NPL and the working antennas (BiLog and horn) calibrated by EMC Technologies. The complete list of test equipment used for the measurements, including calibration dates and traceability is contained in Appendix A





Report No.: M150113-11A Page 7 of 30

## FCC PART 15 Subpart C (Section 15.247)

## 3.0 ANTENNA REQUIREMENT (§15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

EUT uses a permanently attached PCB antenna therefore considered sufficient to comply with the provisions of this section. There is no external antenna connector available to the user.

## 4.0 CONDUCTED EMISSIONS (§15.207)

#### 4.1. Test procedure

The arrangement specified in ANSI C63.4: 2009 was adhered to for the conducted EMI measurements. The EUT was placed in the RF screened enclosure and a CISPR EMI Receiver as defined in ANSI C63.2: 2009 was used to perform the measurements.

The EMI Receiver was operated under program control using the Max-Hold function and automatic frequency scanning, measurement and data logging techniques. The specified 0.15 MHz to 30 MHz frequency range was sub-divided into sub-ranges to ensure that all short duration peaks were captured.

The various operating modes of the system were investigated. For each of the sub-ranges, the EMI receiver was set to continuous scan with the Peak detector set to Max-Hold mode. The Quasi-Peak detector and the Average detector were then invoked to measure the actual Quasi-Peak and Average level of the most significant peaks, which were detected.

The voltage levels were automatically measured in software and compared to the test limit. The method of calculation was as follows:

**VEMI = VRx + LBPF** 

Where: VEMI = the Measured EMI voltage in dBµV to be compared to the limit.

VRx = the Voltage in  $dB\mu V$  read directly at the EMI receiver.

LBPF = the insertion loss in dB of the cables and the Limiter and Band Pass Filter.

#### 4.2. Results

The measurement data pertaining to each frequency sub-range were concatenated to form a single graph of (peak) amplitude versus frequency. This was performed for both Active and Neutral lines and the composite graph was subsequently plotted. A list of the highest relevant peaks and the respective Quasi-Peak and Average values were also plotted on the graph.






## Active Line, 0.15 - 30 MHz

Philips Dynalite Envision Wireless Area Controller Conducted Emissions (0.15 - 30 MHz)

Limit1: FCC\_BQPN Limit2: FCC\_BAVN FCC PART 15 CLASS B CONDUCTED QP LIMITS (2002)
FCC PART 15 CLASS B CONDUCTED AVERAGE LIMIT (2002)

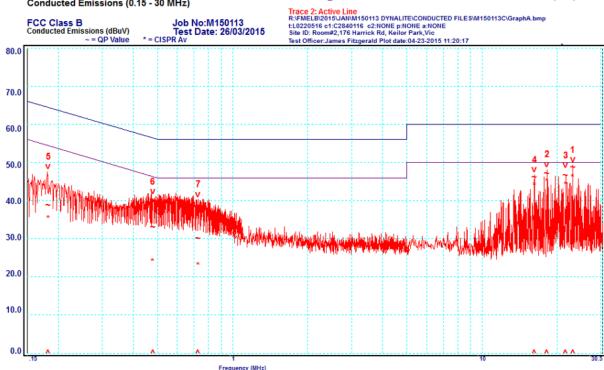


Peak	Frequency MHz	Line	Measured QP Level dB <sub>µ</sub> V	QP Limit dBμV	ΔQP ±dB	Measured AV Level dB <sub>µ</sub> V	ΑV Limit dBμV	ΔAV ±dB
1	23.13	Active	48.6	60.0	-11.4	46.0	50.0	-4.0
2	18.24	Active	47.1	60.0	-12.9	44.8	50.0	-5.2
3	21.66	Active	46.5	60.0	-13.5	44.0	50.0	-6.0
4	16.23	Active	46.1	60.0	-13.9	43.8	50.0	-6.2
5	0.183	Active	38.8	64.4	-25.6	35.2	54.4	-19.2
6	0.48	Active	33.1	56.3	-23.2	23.8	46.3	-22.5
7	0.727	Active	30.0	56.0	-26.0	22.9	46.0	-23.1





## Neutral Line, 0.15 - 30 MHz

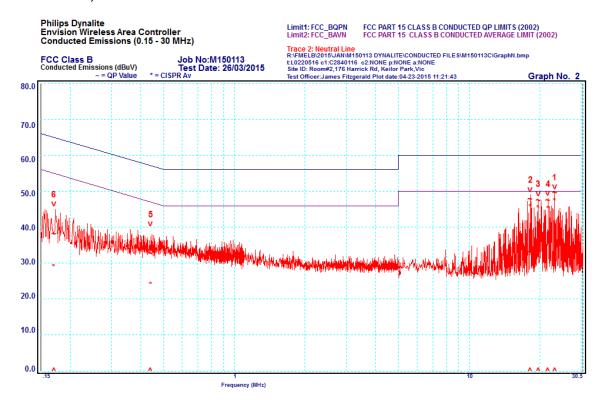

Peak	Frequency MHz	Line	Measured QP Level dB <sub>µ</sub> V	QP Limit dBμV	∆QP ±dB	Measured AV Level dB <sub>µ</sub> V	ΑV Limit dBμV	ΔAV ±dB
1	23.13	Neutral	49.5	60.0	-10.5	47.0	50.0	-3.0*
2	18.24	Neutral	47.7	60.0	-12.3	45.4	50.0	-4.6
3	19.71	Neutral	47.4	60.0	-12.6	45.1	50.0	-4.9
4	21.66	Neutral	47.4	60.0	-12.6	45.0	50.0	-5.0
5	0.44	Neutral	32.7	57.0	-24.3	23.8	47.0	-23.2
6	0.17	Neutral	38.0	64.9	-26.9	28.8	54.9	-26.1

<sup>\*</sup> The result is within measurement uncertainty.






Report No.: M150113-11A Page 10 of 30

# 5.0 DTS 6 dB BANDWIDTH (§15.247 (a)(2))

Minimum 6 dB bandwidth shall be at least 500 kHz. Measurements were performed on low, middle and high channel. Care was taken so that the bandwidth measurement was not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq$  6 dB.

#### 5.1. Results

Measurement results are shown in the following graphs.

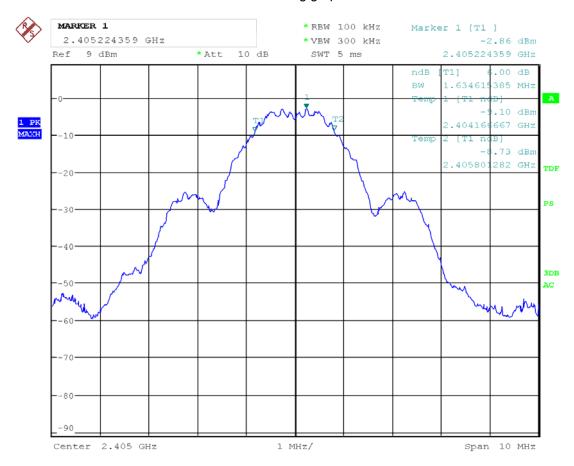


Modulation	6 dB Bandwidth (MHz)	Limit (kHz)	Result
DSSS	1.635	> 500	Pass

Graph 1: 6 dB bandwidth, low channel





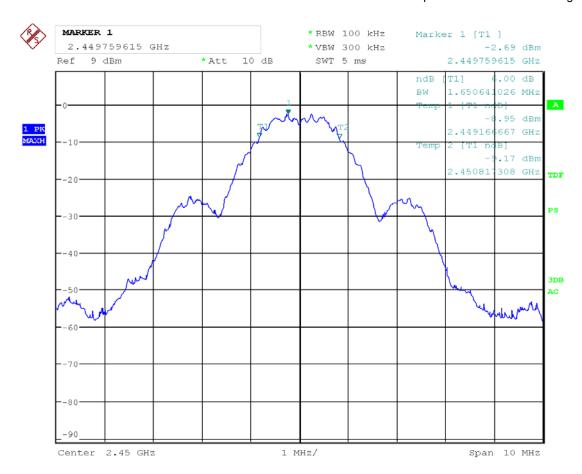


Modulation6 dB<br/>Bandwidth<br/>(MHz)Limit<br/>(kHz)ResultDSSS1.651> 500Pass

Graph 2: 6 dB bandwidth, middle channel





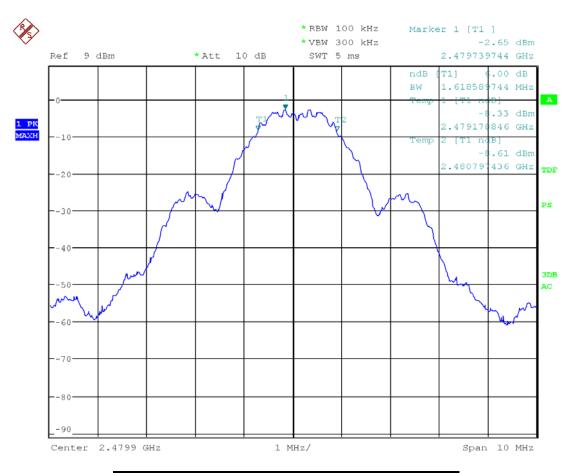

Modulation	6 dB Bandwidth (MHz)	Limit (kHz)	Result
DSSS	1.619	>500	Pass

Graph 3: 6 dB bandwidth, high channel






Report No.: M150113-11A Page 13 of 30

# 6.0 PEAK OUTPUT POWER (§15.247 (b)(3))

As there was a temporary antenna connector available on the PCB the test was performed using conducted measurement. Maximum peak conducted power method (clause 9.1.1 of KDB 558074 v03r02) was used for measurement. Cable loss between connector and spectrum analyser were accounted for in reading.

#### 6.1. Results

Measurement results are shown in the following graphs.

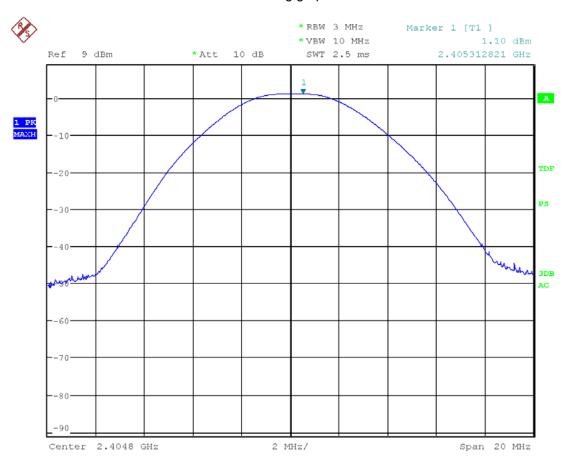


Channel	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Low	1.1	30	-28.9	Pass

**Graph 4: Conducted power, low channel** 





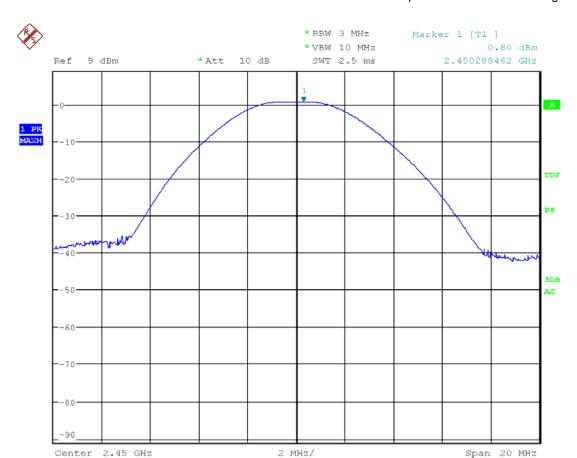


Channel	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
Middle	0.8	30	-29.2	Pass

Graph 5: Conducted power, middle channel





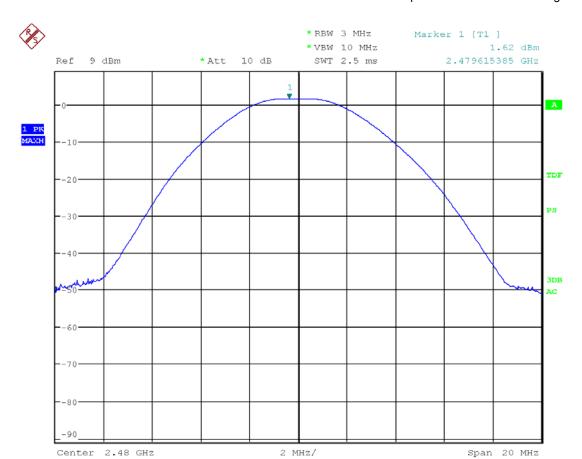

Channel	Conducted Power (dBm)	Limit (dBm)	Margin (dB)	Result
High	1.6	30	-28.4	Pass

**Graph 6: Conducted power, high channel** 





Report No.: M150113-11A Page 16 of 30

# 7.0 BAND-EDGE EMISSION MEASUREMENTS


Band edge emission were investigated according to KDB 558074 D01 v03r02 clause 13. Emissions within 2 MHz of an authorized band edge were measured using the marker-delta method (KDB 558074 D01 v03r02 clause 13.2). Results from section 6 of this report were used for in band emission values. In band emission were obtained using 3 MHz resolution bandwidth, instead of 1 MHz, which represents worse case.

#### 7.1. Results

All emissions above and below the edge of the authorised band were more than 20 dB below the in band intentional emission.

The upper band edge fell into a restricted band of operation (2483.5 MHz-2500 MHz). Emissions were below the -41.20 dBm (500  $\mu$ V/m @ 3 m distance) limit of FCC Part 15.209.

Measurement results are shown in the following graphs.

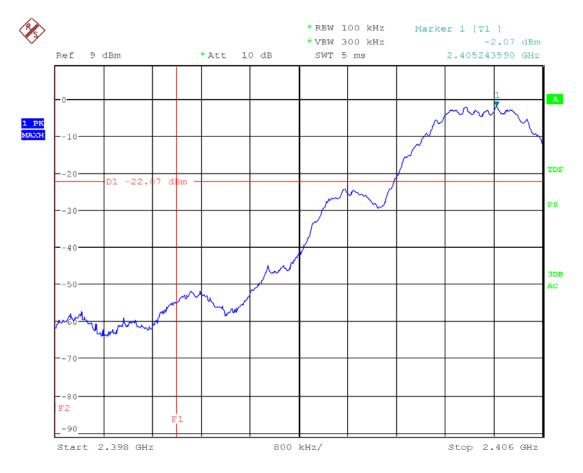


Vertical marker F1 was positioned at 2400 MHz. Horizontal line D1 was set to the level 20 dB lower than the maximum in band emission.

In Band Emission (dBm)	Delta (dB)	Band Edge Emission (dBm)	Limit (dBm)	Margin (dB)	Result
1.10	>45.00	<-43.90	-18.90	<-25.00	Pass

**Graph 7: Lower band-edge emissions** 





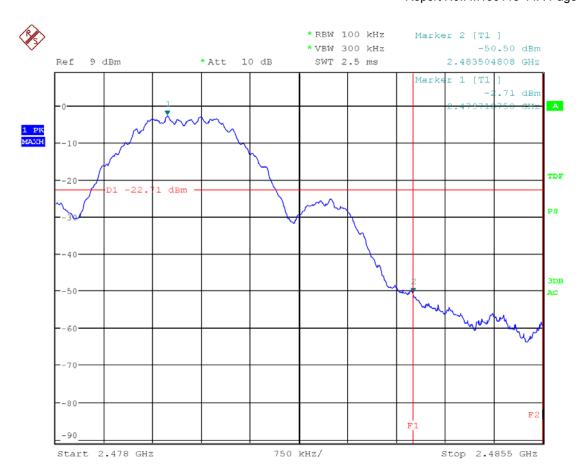

Vertical marker F1 was positioned at 2483.5 MHz. Horizontal line D1 was set to the level 20 dB lower than the maximum in band emission.

In Band Emission (dBm)	Delta (dB)	Band Edge Emission (dBm)	Limit (dBm)	Margin (dB)	Result
1.62	47.79	-46.17	-41.20	-4.97	Pass

**Graph 8: Upper band-edge emissions** 

All emissions were more than 20 dB below the maximum in-band emission.






Report No.: M150113-11A Page 18 of 30

# 8.0 SPURIOUS EMISSION MEASUREMENTS (§15.247 (d))

#### 8.1. Emission in non-restricted bands

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Conducted method was used according to clause 11 of KDB 558074 D01.

#### **8.1.1.** Results

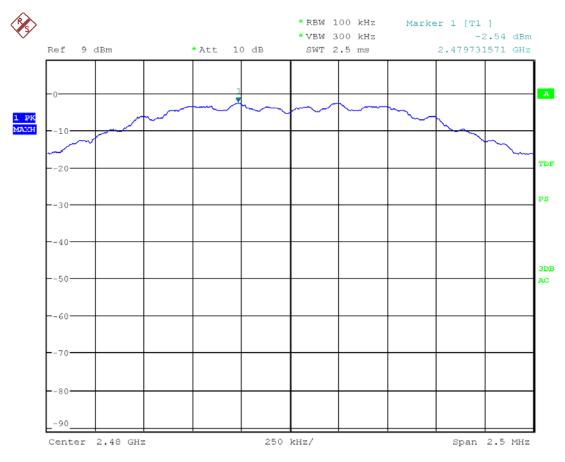


Peak	Frequency (MHz)	SA Reading (dBm)
1	2479.73	-2.54


Graph 9: Reference level measurement (in band emission)





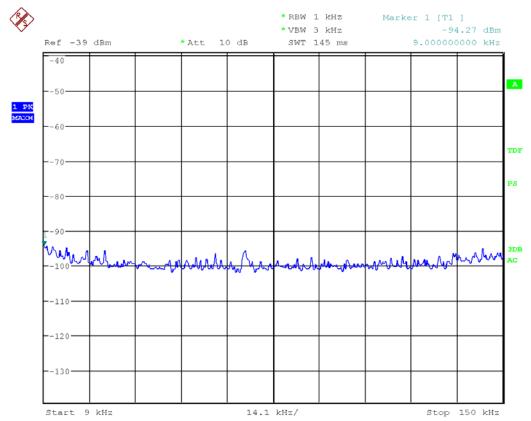


Graph 10: Conducted spurious emissions (non-restricted band), 9 kHz-150 kHz

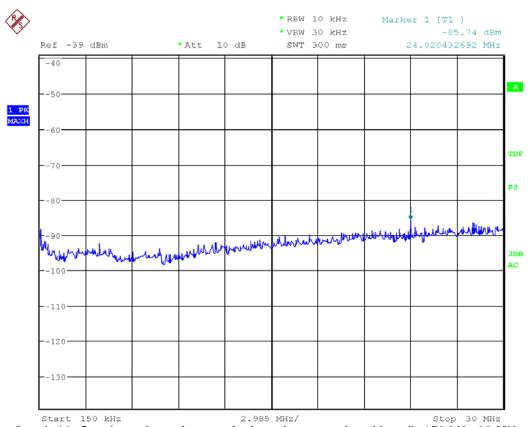


Graph 11: Conducted spurious emissions (non-restricted band), 150 kHz-30 MHz





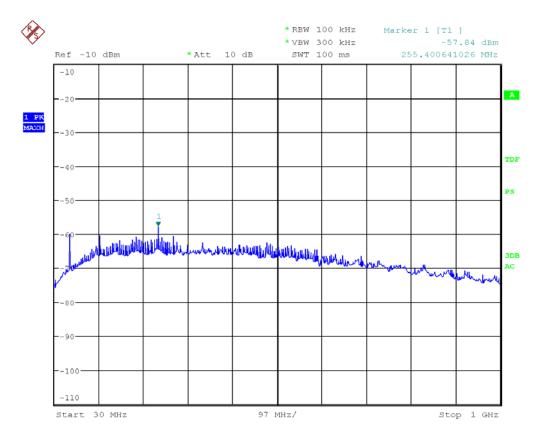

Graph 12: Conducted spurious emissions (non-restricted band), 30 MHz-1 GHz

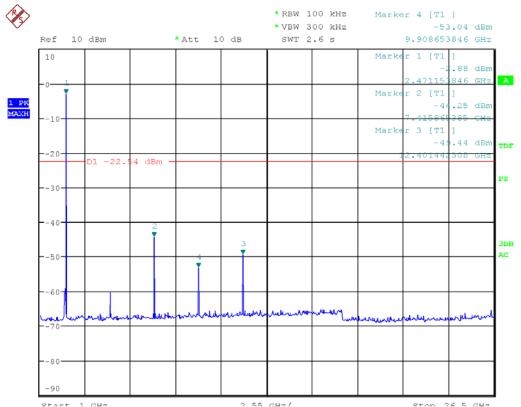

Graph 13: Conducted spurious emissions (non-restricted band), 1 GHz-26.5 GHz

Horizontal line D1 was set to the level 20 dB lower than in band emission (figure 9).

All emissions were more than 20 dB below the maximum in-band emission.





Report No.: M150113-11A Page 21 of 30

## 8.2. Emission in restricted bands (radiated)

In order to ensure the compliance to the requirements of emission in restricted bands, radiated measurements were performed. Frequency range of 9 kHz to 26.5 GHz was investigated for any emissions falling in restricted frequency bands. Limits of FCC 15.209 were applied.

The EUT was placed 1.5 metres above the floor during the test (note: deviation from ANSI C63.10: 2009). The EUT was checked in three orthogonal planes to determine maximum emission, only the worst case is reproduced for the report.

Radiated EMI tests were performed inside a compliant CISPR16-1-4 semi-anechoic chamber for a 2m x 2m test volume up to 18 GHz, at a test distance of 10, 3 and 1 metres. The EUT was set up on the table top (placed on turntable) of total height 150 cm above the ground plane. The test frequency range was sub-divided into smaller bands with sufficient frequency resolution to permit reliable display and identification of possible EMI peaks while also permitting fast frequency scan times. A calibrated loop antenna was used for measurements between 9 kHz and 30 MHz. A calibrated Biconilog antenna was used for measurements between 30 MHz and 1000 MHz. Calibrated EMCO 3160 and EMCO 3160 standard gain horn antennas were used for measurements between 1 to 26.5 GHz.

The measurement of emissions between 30 - 1000 MHz was measured with the resolution bandwidth of 120 kHz and the video bandwidth of 300 kHz.

The measurement of emissions above 1000 MHz was measured using a following setting: Peak measurements setting: RBW = VBW = 1 MHz

Average measurements setting: RBW = 1 MHz and VBW = 10 Hz

The receiver bandwidth was set to 6 dB.

The EUT was slowly rotated with the Peak Detector set to Max-Hold. This was performed for two antenna heights. When an emission was located, it was positively identified and its maximum level found by rotating the automated turntable and by varying the antenna height. The procedure was repeated with the device orientated in three orthogonal axis to further maximise the emission.

Each significant peak was investigated with the Quasi-peak, Peak or Average Detectors as appropriate. The measurement data for each frequency range was corrected for cable losses, antenna factors and preamplifier gain. This process was performed for both horizontal and vertical antenna polarisations.

The field strength was calculated automatically by the software using all the pre-stored calibration data. The method of calculation is shown below:

E = V + AF - G + L

Where:

 $\mathbf{E}$  = Radiated Field Strength in dB $\mu$ V/m.

V = EMI Receiver Voltage in dBμV. (measured value)
 AF = Antenna Factor in dB. (stored as a data array)
 G = Preamplifier Gain in dB. (stored as a data array)

L = Cable loss in dB. (stored as a data array of Insertion Loss versus frequency)

#### Example Field Strength Calculation


Assuming a receiver reading of 34.0 dB $_{\mu}V$  is obtained at 90 MHz, the Antenna Factor at that frequency is 9.2 dB. The cable loss is 1.9 dB while the preamplifier gain is 20 dB. The resulting Field Strength is therefore as follows:

 $34.0 + 9.2 + 1.9 - 20 = 25.1 \text{ dB}\mu\text{V/m}$ 





## 8.2.1. Results

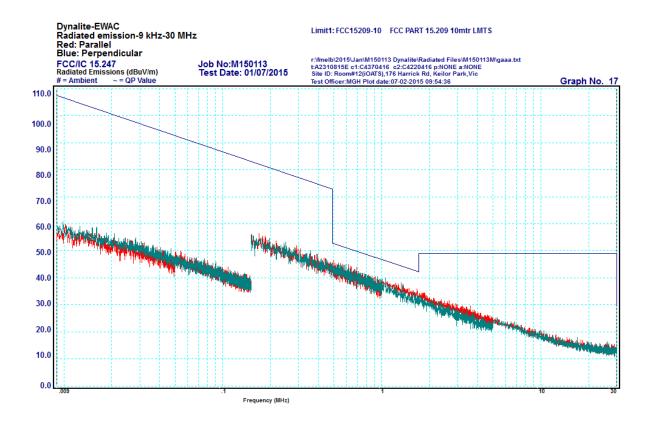


No emissions from the EUT were detected above the system noise floor.

Graph 14: Radiated emission, 9 kHz-30 MHz, loop antenna





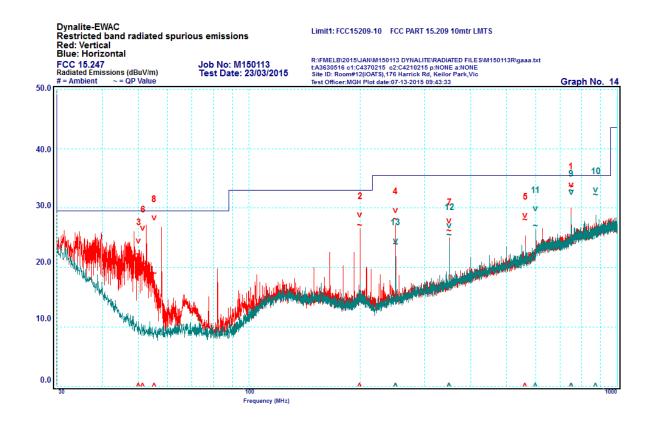


Graph 15: 25 MHz - 1 GHz, radiated emissions in restricted bands

Peak	Frequency (MHz)	Polarisation	Measured QP Level (dBμV/m)	QP LIMIT (dBμV/m)	∆QP ±dB
1	750.08	Vertical	33.7	35.5	-1.8
2	200.00	Vertical	27.0	33.3	-6.0
3	50.18	Vertical	22.2	29.5	-7.3
4	250.00	Vertical	28.1	35.5	-7.4
5	562.57	Vertical	28.0	35.5	-7.5
6	51.54	Vertical	20.7	29.5	-8.8
7	350.00	Vertical	26.1	35.5	-9.4
8	55.28	Vertical	19.0	29.5	-10.5
9	750.09	Horizontal	32.9	35.5	-2.6
10	875.12	Horizontal	32.2	35.5	-3.3
11	600.02	Horizontal	27.0	35.5	-8.5
12	350.00	Horizontal	25.4	35.5	-10.1
13	250.00	Horizontal	23.9	35.5	-11.6





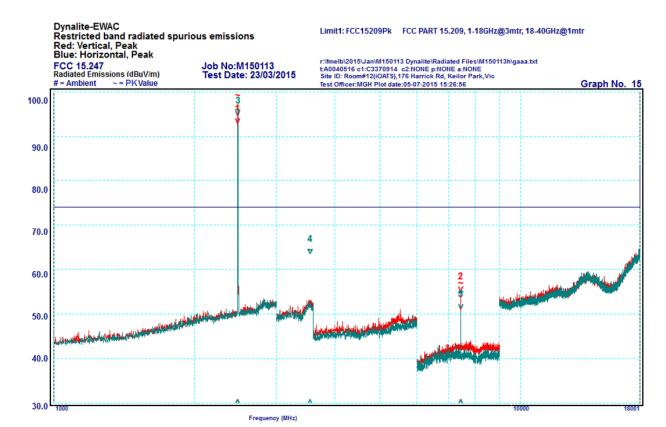

Graph 16: 1 GHz - 18 GHz, radiated emissions in restricted bands, peak detector


Peak	Frequency	Polarisation	Measured Peak Level	Peak LIMIT	∆Peak
	(MHz)		(dBμV/m)	(dBμV/m)	±dB
1	2479.47	Vertical	99.1	74	Note
2	7438.19	Vertical	56.8	74	-17.2
3	2480.5	Horizontal	95.8	74	Note
4	3541.24	Horizontal	64.3	74	-9.7
5	7441.29	Horizontal	54.8	74	-19.2

Note: Intentional radiation is excluded from measurement

A preamplifier was used in the frequency range of 6 GHz - 9 GHz to provide more detailed investigation of the spectrum.





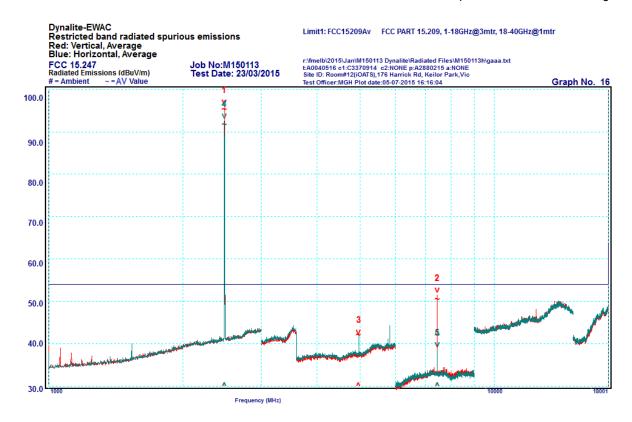

Graph 17: 1 GHz - 18 GHz, radiated emissions in restricted bands, average detector

Peak	Frequency	Polarisation	Measured Peak Level	Peak LIMIT	∆Peak
	(MHz)		(dBμV/m)	(dBμV/m)	±dB
1	2479.78	Vertical	95.2	54.0	Note
2	7438.66	Vertical	50.5	54.0	-3.5
3	4958.94	Horizontal	41.9	54.0	-12.1
4	2479.78	Horizontal	91.6	54.0	Note
5	7438.46	Horizontal	42.0	54.0	-12.0

Note: Intentional radiation is excluded from measurement

A preamplifier was used in the frequency range of 6 GHz - 9 GHz and 15 GHz - 18 GHz to provide more detail investigation of the spectrum.

Frequency range of 18 GHz to 26.5 GHz was also investigated. No emission were detected in the range of 18 GHz to 26.5 GHz






# 9.0 POWER SPECTRAL DENSITY (§15.247 (d))

The PKPSD method according to KDB 558074 was used to demonstrate compliance.

#### 9.1. Results

Measurement results are shown in the following graphs.

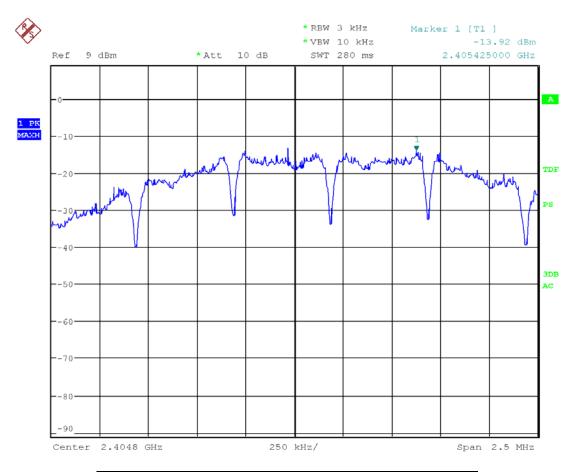


 Channel
 Peak PSD (dBm/3 kHz)
 Limit (dBm)
 Margin (dB)
 Result

 Low
 -13.92
 8
 21.92
 Pass

Graph 18: Transmitter peak power spectral density, low channel





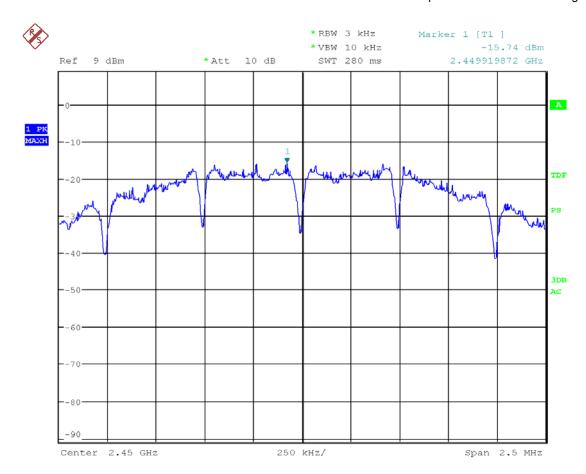


 Channel
 Peak PSD (dBm/3 kHz)
 Limit (dBm)
 Margin (dB)
 Result

 Middle
 -15.74
 8
 -23.74
 Pass

Graph 19: Transmitter peak power spectral density, middle channel





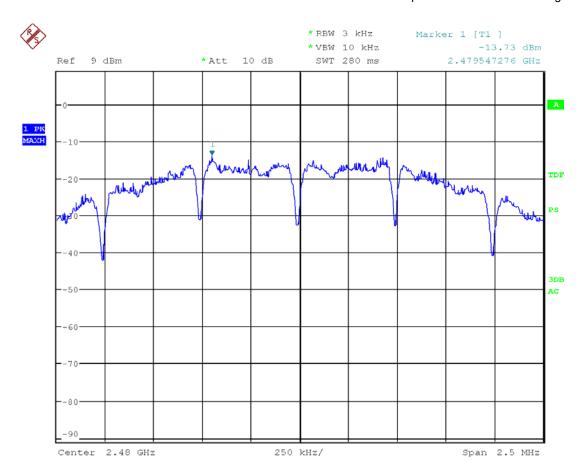

Channel	Peak PSD (dBm/3 kHz)	Limit (dBm)	Margin (dB)	Result
High	-13.73	8	-21.73	Pass

Graph 20: Transmitter peak power spectral density, high channel





Report No.: M150113-11A Page 29 of 30

## 10.0 RADIO FREQUENCY EXPOSURE (HAZARD) (§15.247 (i))

The EUT complies with FCC requirements for human exposure. Refer to EMC Technologies test report No. M150113-3.

#### 11.0 COMPLIANCE STATEMENT

Dynalite Envision Wireless Area Controller, Model: LFC8400 tested on behalf of Philips Dynalite, **complied** with the requirements of 47 CFR, Part 15 Subpart C - Rules for Radio Frequency Devices (intentional radiators), Section 15.247 - Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

Summary of results are shown in below table:

FCC Part 15 Subpart C	Test Performed	Results
15.203	Antenna requirement	Complied
15.205	Operation in restricted Band	Complied
15.207	Conducted emissions limits	Complied
15.209	Radiated emissions limits	Complied
15.247 (a)(2)	Minimum 6 dB bandwidth	Complied
15.247 (b)(3)	Peak output power	Complied
15.247 (c)	Antenna gain > 6 dBi	N/A as the EUT uses integral antenna with less than 6 dBi gain and there is no external antenna connector
15.247 (d)	Out of band emissions	Complied
15.247 (e)	Peak power spectral density	Complied
15.247 (f)	Hybrid systems	N/A as the EUT uses digital modulation
15.247 (g)	Hopping channel application	N/A as the EUT uses digital modulation
15.247 (h)	Incorporation of intelligence within FHSS	N/A as the EUT uses digital modulation
15.247 (i)	Radio Frequency Hazard	Complied

#### 12.0 UNCERTAINTY

EMC Technologies has evaluated the equipment and the methods used to perform the emissions testing. The estimated measurement uncertainty for emissions tests shown within this report are as follows:

Conducted Emissions:	9 kHz to 30 MHz	±3.2 dB
Radiated Emissions:	9 kHz to 30 MHz 30 MHz to 300 MHz 300 MHz to 1000 MHz 1 GHz to 18 GHz 18 GHz to 26 GHz	±4.1 dB ±5.1 dB ±4.7 dB ±4.6 dB ±5.1 dB
Peak Output Power:		±1.5 dB
Peak Power Spectral Density:		±1.5 dB

The above expanded uncertainties are based on standard uncertainties multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.





Report No.: M150113-11A Page 30 of 30

# **APPENDIX A**

## **MEASUREMENT INSTRUMENT DETAILS**

Equipment Type	Make/Model/Serial Number	Last Cal. dd/mm/yy	Due Date dd/mm/yy	Cal. Interval
Chamber	Frankonia SAC-10-2 (R-139)	8/1/2015	8/1/2016	1 Year, *1
EMI Receiver	R&S ESU40 20 Hz – 40 GHz Sn: 100392 (R-140)	09/10/2014	09/10/2015	1 Year, *2
	R&S ESU40 20 Hz – 40 GHz Sn: 100182 (R-037)	12/02/2015	12/02/2016	1 Year, *2
	HP 8546A Sn: 3549A00290 (R-009)	02/10/2014	02/10/2015	1 Year, *2
Antennas	EMCO 6502 Active Loop A-231 9kHz-30MHz Sn. 9311-2801	20/08/2012	20/08/2015	3 Year, *2
	SUNOL JB6 BICONILOG 30 – 6000 MHz Sn. A012312 (A-363)	16/05/2014	16/05/2016	2 Year, *2
	EMCO 3115 Broadband Horn 1 – 18 GHz Sn. 8908-3282 (A-004)	09/05/2013	09/05/2016	3 Year, *1
	ETS-Lindgren Horn 3160-09 18-26.5 GHz Sn. 66032 (A-307)	12/11/2012	12/11/2015	3 Year, *1
	ETS-Lindgren Horn 3160-10 26.5-40 GHz Sn. 66032 (A-306)	12/11/2012	12/11/2015	3 Year, *1

Note \*1. Internal NATA calibration.

Note \*2. External NATA / A2LA calibration



