

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE

FCC Part 15 Certification Measurement

PRODUCT : TFT LCD TV Monitor

MODEL/TYPE NO : SLTV20MS3D / NONE

FCC ID : VEN-SLTV20MS3D

APPLICANT : Resource International

990 South Rogers Circle Suite 4 Boca Raton FL 33487, USA

Attn.: Eduardo Velasquez / Product Manager

MANUFACTURER : ADGOD CO., LTD.

906, Gayang Technotown, 1487, Gayang 3-dong, Gangseo-gu,

Seoul, 157-793, Korea

FCC CLASSIFICATION : Class B Personal computers and peripherals

RULE PART(S) : FCC Part 15 Subpart B

FCC PROCEDURE : Certification

TEST REPORT No. : ETLE070605.373

DATES OF TEST : June 05, 2007 ~ June 20, 2007

REPORT ISSUE DATE : June 21, 2007

TEST LABORATORY : ETL Inc. (FCC Registration Number : 95422)

This TFT LCD TV Monitor, Model SLTV20MS3D has been tested in accordance with the measurement procedures specified in ANSI C63.4-2003 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Chon Sik, Kim / Chief Engineer

ETL Inc.

#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea Tel: 82-2-858-0786 Fax: 82-2-858-0788



Table of Contents

FCC Measurement Report

- 1. Introduction
- 2. Product Information
- 3. Description of Tests
- 4. Test Condition
- 5. Test Results
 - 5.1 Summary of Test Results
 - **5.2 Conducted Emissions Measurement**
 - **5.3 Radiated Emissions Measurement**
 - 5.4 Antenna Power Conduction Measurement
 - 5.5 Picture Sensitivity
 - 5.6 Noise figure measurement
- 6. Sample Calculation
- 7. List of test Equipment used for Measurement

Appendix A. FCC ID Label and Location

Appendix B. Test Setup Photographs

Appendix C. External Photographs

Appendix D. Internal Photographs

Appendix E. Block Diagram



FCC MEASUREMENT REPORT

Scope – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

General Information

Applicant Name : Resource International

Address : 990 South Rogers Circle Suite 4 Boca Raton FL 33487, USA

Attention : Eduardo Velasquez / Product Manager

EUT Type : TFT LCD TV Monitor

• Model Number : SLTV20MS3D

• **S/N**: N/A

FCC Rule Part(s): FCC Part 15 Subpart B

• Test Procedure : ANSI C63.4-2003

• FCC Classification : Class B Personal computers and peripherals

Dates of Tests: June 05, 2007 ~ June 20, 2007

Place of Tests: ETL Inc. Testing Lab.

Radiated Emission test;

#584, Sangwhal-ri, Ganam-myeon, Yoju-gun,

Gyeonggi-do, 469-885, Korea

Conducted Emission test; ETL Inc. Testing Lab.

371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

• Test Report No. : ETLE070605.373

Report no. ETLE070605.373, Page 3 of 23

Head Office: # 371-51 Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea Tel : 82-2-858-0786 Fax : 82-2-858-0788



1. INTRODUCTION

The measurement test for radiated and conducted emission test were conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.4-2003 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.4-2003 and registered to the Federal Communications Commission (FCC Registration Number: 95422).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.4-2003) was used in determining radiated and conducted emissions from the Resource International. Model: SLTV20MS3D



2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the Model: SLTV20MS3D.

2.2 General Specification

| Product Name | | 15 inch TFT-LCD TV | |
|------------------------|-------------------------|-------------------------------|--|
| | Туре | Amorphous Silicon TFT-LCD | |
| | Size | 20 inch (diagonal length) | |
| | Resolution | 1366(H) × 768(V) | |
| I CD Danel | Pixel Pitch | 0,324 mm × 0,324 mm | |
| LCD Panel | Contrast Ratio | 600 : 1 (Typ.) | |
| | Brightness | 550 cd/m ² | |
| | Active Area | 444,0 mm × 249,0 mm | |
| | Viewing Angle | 178 ° / 178 ° | |
| | | VHF : 2~13 UHF : 14~69 | |
| TV Broadcasting System | n | Cable : 1, 14~135 | |
| | | ATSC/QAM Digital Channel | |
| Audio Output | | 5W × 2 / Stereo & MTS | |
| | Horizontal Frequency | 30 ~ 61 KHz | |
| PC Monitor | Vertical Frequency | 60 ~ 75 Hz | |
| PC WOTHLOT | Colors | 16,7M colors (6 bit with FRC) | |
| | Optimal Resolution | WXGA: 1360(H) × 768(V) | |
| Dower | Adaptor Input | 100 V ~ 240 V (Free Voltage) | |
| Power | Adaptor Output | DC 24 V | |
| Power Consumption | In-Operation | <90 W | |
| rower Consumption | Power-Saving Mode / OFF | <5 W | |
| Energy Saving Mode | | VESA DPMS | |



3. DESCRIPTION OF TESTS

3.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 0,15 MHz to 30 MHz using a 50 Ω / 50 uH LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "guasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1,5 m x 0,8 m wooden table which is placed 0,4 m away from the vertical wall and 1,5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner ϕ 1,2 cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0,15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup in Appendix B.

Report no. ETLE070605.373, Page 6 of 23



3.2 Radiated Emission Measurement

Radiated emission measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2003. The measurements were performed over the frequency range of 30 MHz to 1 GHz using antenna as the input transducer to a spectrum analyzer or a field intensity meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120 kHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determined the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 3 m. The test equipment was laced on a wooden turn-table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120 kHz or 1 MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0,8 m high nonmetallic 1m x 1,5 m table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.


Report no. ETLE070605.373, Page 7 of 23



3.3 Antenna-Conducted Power Measurements

Power on the receive antenna terminals was to be determined by measurement of the voltage present at these terminals. An antenna-conducted power measurement is performed with the EUT antenna terminals connected directly to a spectrum analyzer, if the antenna impedance matches the impedance of the measuring instrument. Otherwise, use an impedance-matching network to connect the measuring instrument to the antenna terminals of the EUT. Losses in decibels in any impedance-matching network used are added to the measured value in dBuV.

With the EUT tuned to one of the frequency over which device operates , measure both the frequency and voltage present at the antenna input terminals over the frequency range specified in the individual equipment requirements. Repeat this measurement with the receiver tuned to another frequency until the numbers of frequencies specified have been successively measured. Power on the receive antenna terminals is the ratio of V^2/R , where V is the loss-corrected voltage measured at the antenna terminals, and R is the impedance of the measuring instrument.

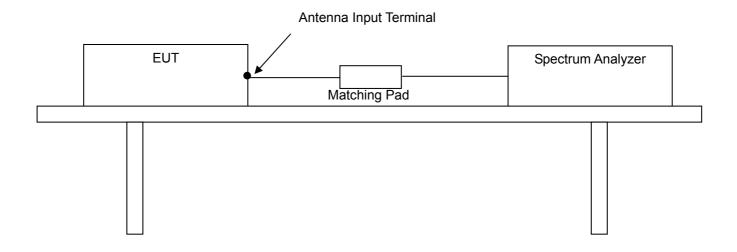

Report no. ETLE070605.373, Page 8 of 23



4. TEST CONDITION

4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

4.2 EUT operation

| Operating Mode | The worst operating condition |
|--|-------------------------------|
| Stand by mode | X |
| 1360 X 768, 60 Hz, Full "H" pattern display mode | 0 |
| Color bar display mode | 0 |

O: Worst case investigated during the Test

4.3 Support Equipment Used

| Description | Model Name | Serial No. | Manufacturer |
|-------------|---------------------|------------|----------------|
| Computer | DHM(DIMENSION 4600) | FNTGB1S | DELL |
| DVD Player | DVH4083 | NONE | DM TECH |
| DVD Player | DVR-530S | NONE | Ellion Digital |
| Keyboard | SK-8000 | NONE | DELL |
| Mouse | M-S48a | NONE | NONE |
| Earphone | NONE | NONE | NONE |

4.4 Type of Cables Used


| Device from | Device to | Type of I/O port | Length(m) | Type of shield |
|-------------|--------------|------------------|-----------|----------------|
| EUT | Computer | RGB | 1,5 | Shielded |
| EUT | Computer | Audio Out | 1,2 | Shielded |
| EUT | DVD Player | Component | 1,8 | Shielded |
| EUT | DVD Player | RCA | 1,5 | Shielded |
| EUT | DVD Player | Audio out | 1,5 | Shielded |
| EUT | DVD Player | HDMI | 1,8 | Shielded |
| EUT | DVD Player | Component | 1,8 | Shielded |
| EUT | DVD Player | Audio out | 1,5 | Shielded |
| EUT | DVD Player | S-Video | 1,5 | Shielded |
| EUT | Adapter | DC INPUT | 1,2 | Shielded |
| EUT | ANT. | ANT. | >3,0 | Shielded |
| EUT | ANT. | ANT. | >3,0 | Shielded |
| Computer | Power socket | AC INPUT | 1,0 | Unshielded |
| DVD Player | Power socket | AC INPUT | 1,0 | Unshielded |
| DVD Player | Power socket | AC INPUT | 1,0 | Unshielded |

Report no. ETLE070605.373, Page 9 of 23



ETL FCC TEST REPORT

4.5 The setup drawing(s)

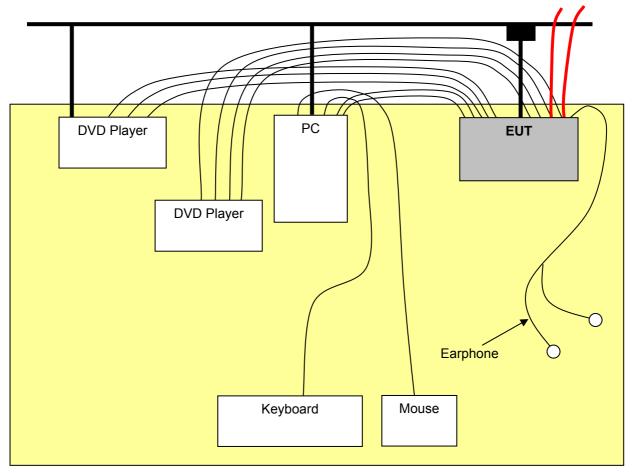

: Data Line

Power Line

Adapter

Antenna



5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

| FCC Rule | Measurement Required | Result |
|-----------|--|-----------------------|
| 15.107 | Conducted Emission Measurement | Passed by 7,90 dB |
| 15.109 | Radiated Emission Measurement | Passed by 3,40 dB |
| 15.111 | Antenna Power Conduction Measurement | Passed by 2,00 dB |
| 15.117(f) | Picture Sensitivity | ⊠ met ☐ not met ☐ N/A |
| 15.117(g) | Noise Figure Measurement | ⊠ met □ not met □ N/A |
| 15.119 | Closed caption decoder requirements | ⊠ met ☐ not met ☐ N/A |
| 15.120 | Program blocking technology requirements | □ met □ not met □ N/A |

The data collected shows that the **Resource International / TFT LCD TV Monitor / SLTV20MS3D** complied with technical requirements of above rules part 15.107 and 15.109 Class B Limits and CISPR Publication 22 & Part 15 Subpart B Unintentional radiators and the TV Broadcast Receiver section of the FCC Rules.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.



5.2 Conducted Emissions Measurement

| EUT | TFT LCD TV Monitor / SLTV20MS3D (SN: N/A) |
|---------------------|--|
| Limit apply to | FCC Part 15. 107 Class B |
| Test Date | June 11, 2007 |
| Operating Condition | 1360 X 768, 60 Hz, Full "H" pattern display mode |
| Result | Passed by 9,00 dB |

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth : 9 kHz)

| Frequency | Res [dB | | Phase | | | Margin [dB] | |
|-----------|------------|---------|----------|------------|---------|----------------|---------|
| [MHz] | Quasi-peak | Average | (*L/**N) | Quasi-peak | Average | Q.Peak | Average |
| 0,188 | 47,2 | 45,1 | N | 64,1 | 54,1 | 16,9 | 9,0 |
| 0,249 | 42,7 | 39,0 | N | 61,8 | 51,8 | 19,1 | 12,8 |
| 0,472 | 36,9 | 32,3 | Н | 56,5 | 46,5 | 19,6 | 14,2 |
| 0,506 | 38,4 | 33,8 | Н | 56,0 | 46,0 | 17,6 | 12,2 |
| 1,188 | 37,5 | 32,1 | N | 56,0 | 46,0 | 18,5 | 14,0 |
| 1,217 | 37,6 | 32,0 | N | 56,0 | 46,0 | 18,5 | 14,0 |
| 1,319 | 37,4 | 32,4 | N | 56,0 | 46,0 | 18,5 | 13,6 |
| 27,033 | 42,3 | 40,5 | N | 60,0 | 50,0 | 17,7 | 9,5 |


NOTES:

- 1. * H : HOT Line, **N : Neutral Line
- 2. Margin value = Limit Result
- 3. Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz \sim 30 MHz according to the FCC Part 15

Test Engineer: Hyung-min, Choi

Report no. ETLE070605.373, Page 12 of 23



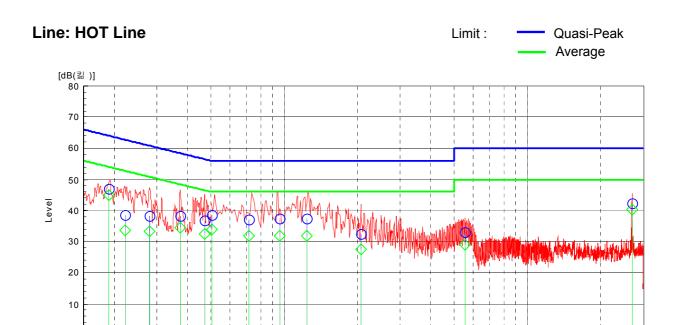

Frequency

5.00


10.00

Line: Neutral Line

0.50

1.00

0.15

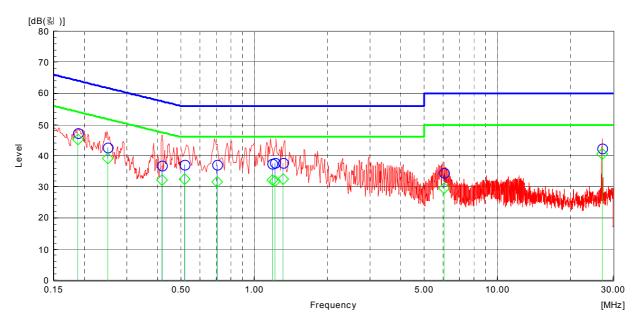

Report no. ETLE070605.373, Page 13 of 23

Head Office: # 371-51 Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea Tel : 82-2-858-0786 Fax : 82-2-858-0788

30.00

[MHz]



| EUT | TFT LCD TV Monitor / SLTV20MS3D (SN: N/A) |
|---------------------|---|
| Limit apply to | FCC Part 15. 107 Class B |
| Test Date | June 11, 2007 |
| Operating Condition | Color bar display mode |
| Result | Passed by 7,90 dB |

Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth : 9 kHz)

| Frequency | Res [dB | | Phase | [| | Margin [dB] | |
|-----------|------------|---------|----------|------------|---------|----------------|---------|
| [MHz] | Quasi-peak | Average | (*L/**N) | Quasi-peak | Average | Q.Peak | Average |
| 0,189 | 48,0 | 46,1 | N | 64,0 | 54,0 | 16,0 | 7,9 |
| 0,253 | 45,0 | 41,8 | N | 61,6 | 51,6 | 16,6 | 9,8 |
| 0,458 | 37,1 | 32,4 | Н | 56,7 | 46,7 | 19,6 | 14,3 |
| 0,571 | 38,8 | 34,6 | Н | 56,0 | 46,0 | 17,2 | 11,4 |
| 0,942 | 39,0 | 34,1 | Н | 56,0 | 46,0 | 17,0 | 11,9 |
| 5,801 | 36,1 | 32,5 | N | 60,0 | 50,0 | 23,9 | 17,5 |
| 27,033 | 41,3 | 39,5 | Н | 60,0 | 50,0 | 18,7 | 10,5 |

NOTES:

- H: HOT Line, **N: Neutral Line
 Margin value = Limit Result
- Measurement were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15





Frequency

5.00


10.00

Line: Neutral Line

0.50

1.00

0.15

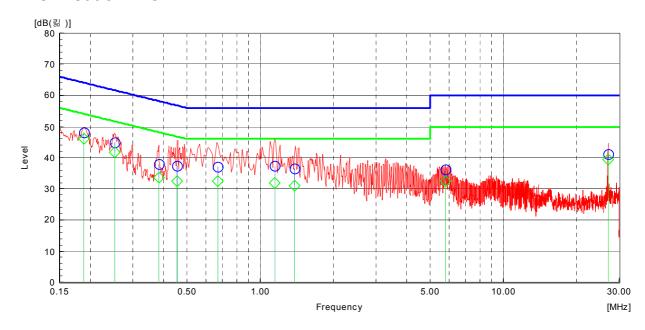

Report no. ETLE070605.373, Page 15 of 23

Head Office: # 371-51 Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea Tel : 82-2-858-0786 Fax : 82-2-858-0788 **EMC Lab :** #584 Sangwhal-ri, Ganam-myeon, Yoju-gun, Gyounggi-do, 469-885, Korea 30.00

[MHz]



5.3 Radiated Emissions Measurement

| EUT | TFT LCD TV Monitor / SLTV20MS3D (SN: N/A) |
|---------------------|--|
| Limit apply to | FCC Part 15. 109 |
| Test Date | June 07, 2006 |
| Operating Condition | 1360 X 768, 60 Hz, Full "H" pattern display mode |
| Result | Passed by 3,40 dB |

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical.

Detector mode: CISPR Quasi – Peak mode (6 dB Bandwidth: 120 kHz)

| Frequency [MHz] | Reading [dB μ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB] | Result [dBμV/m] | Limit [dB μ V/m] | Margin [dB] |
|--------------------|----------------------|--------------------------|--------------------|--------------------|--------------------|-------------------------|----------------|
| 67,82 | 17,25 | V | 9,78 | 2,18 | 29,20 | 40,0 | 10,80 |
| 144,07 | 23,22 | Н | 12,62 | 3,46 | 39,30 | 43,5 | 4,20 |
| 152,88 | 23,45 | Н | 12,75 | 3,59 | 39,80 | 43,5 | 3,70 |
| 333,27 | 23,53 | Н | 13,17 | 5,90 | 42,60 | 46,0 | 3,40 |
| 382,29 | 19,89 | Н | 14,19 | 6,42 | 40,50 | 46,0 | 5,50 |
| 482,07 | 16,77 | Н | 16,37 | 7,46 | 40,60 | 46,0 | 5,40 |
| 497,79 | 15,89 | Н | 16,53 | 7,58 | 40,00 | 46,0 | 6,00 |
| 531,07 | 14,32 | Н | 17,28 | 8,10 | 39,70 | 46,0 | 6,30 |

NOTES:

- 1. * H : Horizontal polarization , ** V : Vertical polarization
- 2. Result = Reading + Antenna factor + Cable loss
- 3. Margin value = Limit Result
- 4. The measurement was performed for the frequency range 30 MHz 1 000 MHz according to FCC Part 15. 109 CISPR Publication 22. Class B.

Test Engineer : Hyung-min, Choi

Report no. ETLE070605.373, Page 16 of 23



ETL FCC TEST REPORT

| EUT | TFT LCD TV Monitor / SLTV20MS3D (SN: N/A) |
|---------------------|---|
| Limit apply to | FCC Part 15. 109 |
| Test Date | June 07, 2006 |
| Operating Condition | Color bar display mode |
| Result | Passed by 4,60 dB |

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi – Peak mode (6 dB Bandwidth: 120 kHz)

| Frequency [MHz] | Reading [dB μ V] | Polarization (*H/**V) | Ant. Factor [dB/m] | Cable Loss [dB] | Result [dBμV/m] | Limit [dB μ V/m] | Margin [dB] |
|-----------------|----------------------|--------------------------|--------------------|--------------------|--------------------|-------------------------|----------------|
| 55,22 | 18,71 | V | 11,69 | 2,10 | 32,50 | 40,0 | 7,50 |
| 67,49 | 23,39 | V | 9,84 | 2,17 | 35,40 | 40,0 | 4,60 |
| 143,86 | 20,32 | V | 12,62 | 3,46 | 36,40 | 43,5 | 7,10 |
| 152,71 | 20,76 | Н | 12,75 | 3,59 | 37,10 | 43,5 | 6,40 |
| 331,81 | 21,28 | Н | 13,14 | 5,88 | 40,30 | 46,0 | 5,70 |
| 383,09 | 17,07 | Н | 14,20 | 6,43 | 37,70 | 46,0 | 8,30 |
| 497,99 | 14,29 | Н | 16,53 | 7,58 | 38,40 | 46,0 | 7,60 |
| 529,77 | 14,37 | Н | 17,25 | 8,08 | 39,70 | 46,0 | 6,30 |

NOTES:

- 1. H: Horizontal polarization, ** V: Vertical polarization
- 2. Result = Reading + Antenna factor + Cable loss
- 3. Margin value = Limit Result
- 4. The measurement was performed for the frequency range 30 MHz 1 000 MHz according to FCC Part 15. 109 CISPR Publication 22. Class B.

Test Engineer : Hyung-min, Choi

Report no. ETLE070605.373, Page 17 of 23



5.4 Antenna power conduction measurement

| EUT | TFT LCD TV Monitor / SLTV20MS3D (SN: N/A) | | |
|---------------------|---|--|--|
| Limit apply to | FCC Part15 Subpart B Section 15.111 | | |
| Test Date | June 14, 2007 | | |
| Operating Condition | CH 2~69 | | |
| Result | Passed by 2,00 dB | | |

Antenna power conduction test data

| Test port | Tuned Frequency [MHz] | Meter Reading [dB <i>μ</i> V] | Correction Factor [dB] | Result [dB//\display] | Limit [dB μ V] | Margin [dB] |
|-----------|-----------------------------|-------------------------------------|------------------------------|--------------------------|-----------------------|----------------|
| | 630,750 | 18,4 | 7,8 | 26,2 | 50,0 | 23,8 |
| Analog | 2 058,000 | 22,2 | 9,0 | 31,2 | 50,0 | 18,8 |
| | 2 400,750 | 26,1 | 9,2 | 35,3 | 50,0 | 14,7 |
| | 1 405,375 | 35,2 | 8,4 | 43,6 | 50,0 | 6,4 |
| | 1 465,750 | 39,6 | 8,4 | 48,0 | 50,0 | 2,0 |
| Digital | 1 503,125 | 37,9 | 8,5 | 46,4 | 50,0 | 3,6 |
| | 1 526,125 | 36,7 | 8,5 | 45,2 | 50,0 | 4,8 |
| | 2 069,500 | 35,7 | 9,0 | 44,7 | 50,0 | 5,3 |

NOTES:

- 1. The other frequencies has 10 dB margin at least.
- 2. Result = Meter Reading + Correction Factor.

 Margin value = Limit Result
- 3. Measurements using the CISPR Quasi-peak mode and 1 MHz resolution peak mode for above 1 GHz, The limits are 2.0 nW in the frequency range from 30 MHz to 5 000 MHz.


Test Engineer: Hyung-min, Choi

Report no. ETLE070605.373, Page 18 of 23


Head Office: # 371-51 Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea Tel : 82-2-858-0786 Fax : 82-2-858-0788



ANALOG TUNER

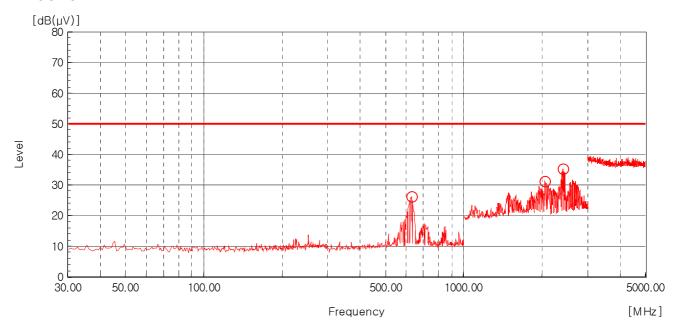

DIGITAL TUNER

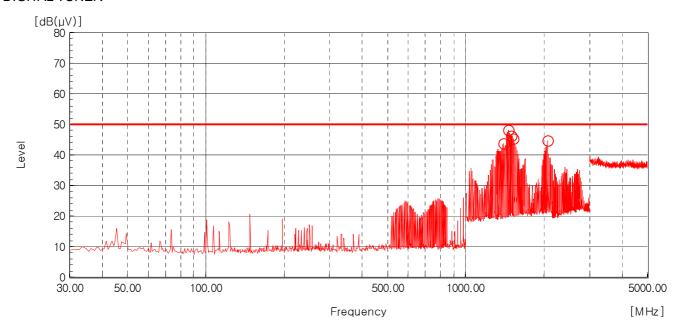

Head Office: # 371-51 Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea Tel: 82-2-858-0786 Fax: 82-2-858-0788

EMC Lab: #584 Sangwhal-ri, Ganam-myeon, Yoju-gun, Gyounggi-do, 469-885, Korea



ETL FCC TEST REPORT

5.5 Picture sensitivity

| EUT | TFT LCD TV Monitor / SLTV20MS3D (SN: N/A) | | |
|---------------------|---|--|--|
| Limit apply to | FCC Part15 Subpart B Section 15.117(f) | | |
| Test Date | June 14, 2007 | | |
| Operating Condition | Color bar display | | |
| Result | Passed | | |

Picture sensitivity test data

Analog Tuner Model name: TAFM-H103H Digital Tuner Model name: TUN-ALK52A

| Measured Channel | Average Level [dB μV] | Result (dB) | Limit (dB) |
|---------------------|-----------------------------|----------------|---------------|
| VHF | 25,70 | 1 20 | < 8 |
| UHF | 26,90 | 1,20 | |

NOTES:

- 1. Result = UHF band average value VHF band average value
- 2. Measurements using 50 Ω / 75 Ω matching transformer between spectrum analyzer and TV broadcast receiver.

Test Engineer: Hyung-min, Choi

Report no. ETLE070605.373, Page 20 of 23

Head Office: # 371-51 Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea Tel : 82-2-858-0786 Fax : 82-2-858-0788



ETL FCC TEST REPORT

5.6 Noise figure measurement

| Measured Channel | Limit (dB) |
|---------------------|---------------|
| 471,25 | |
| 549,25 | - 14 |
| 723,25 | < 14 |
| 801,25 | |

NOTES:

1. The limits shall not exceed 14 dB in the all television channels.

Report no. ETLE070605.373, Page 21 of 23



6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

FS = RA + AF + CF

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

 $dB(\mu V) = 20 \log_{10} (uV)$: Equation

Example : @ 333,27 MHz

Class A Limit = 46,00 dBuV/m

Reading = 23,53 dBuV

Antenna Factor + Cable Loss = 13,17 + 5,90 = 19,07 dBuV/m

Total = 42,60 dBuV/m

Margin = 46,00 - 42,60 = 3,40 dB

= 3,40 dB below Limit

Report no. ETLE070605.373, Page 22 of 23



7. List of test equipments used for measurements

| Test Equipment | | Model | Mfg. | Serial No. | Cal. Due Date |
|----------------|-------------------|----------|--------------|------------|---------------|
| \boxtimes | Receiver | ESVS 10 | R&S | 835165/001 | 08.05.03 |
| \boxtimes | EMI TEST Receiver | ESPI3 | R&S | 100478 | 07.10.17 |
| \boxtimes | LISN | 3816/2 | EMCO | 1001 | 07.10.17 |
| | LISN | 3816/2 | EMCO | 1002 | 07.10.17 |
| \boxtimes | LogBicon | VULB9160 | Schwarz Beck | 3082 | 07.08.11 |
| \boxtimes | Spectrum Analyzer | E7405A | Agilent | US41160290 | 07.10.18 |
| | MATCHING PAD | RAM | R&S | 836964/009 | 07.10.17 |
| \boxtimes | Turn-Table | DETT-03 | Daeil EMC | - | N/A |
| | Antenna Master | DEAM-03 | Daeil EMC | - | N/A |