

UL Korea, Ltd

www.ulk.co.kr

 Project:
 07CA28584

 File:
 MC15663

 Date:
 July 5, 2007

 Model:
 NS 16100 NN

# **Evaluation Report**

For

## **FCC Certification**

### Copyright © 2005 Underwriters Laboratories Inc.

UL Korea, Ltd . authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

Project Number: 07CA28584 File Number MC15663 Page 2 of 21

Model Number: NS 16100 NN

#### TEST REPORT DETAILS

Test Report No. 07CA28584-FCC

Tests Performed By: UL Korea Ltd.

33<sup>rd</sup> FL. Gangnam Finance Center, 737 Yeoksam-dong,

Kangnam-ku, Seoul, 135-984, Korea

Test site: BWS TECH INC.

611-1, Maesan-ri, Mohyeon-myeon, Cheoin-gu, Yongin-si,

Gyeonggi-do 449-853, Korea

Applicant: Novera Optics Korea Inc.

KT Second Research Center 463-1 Jeonmin-dong, Yuseong-gu,

Daejeon, 305-811 Korea

Applicant Contact: Jae-Ho, Song

Title: Chief research engineer Phone: 82-42-602-3758

E-mail: Jae-ho.song@noveraoptics.co.kr

Test Report Date: July 5, 2007

Product Type: WDM-PON ONT

FCC ID: VEWNS16100NN

Product standards FCC Part 15 Subpart B Class B

FCC Classification: Class B Computing Device Peripheral

FCC Procedure : Certification

Model Number: NS 16100 NN(Basic), PNY16-ONT-125

Trade Name: TurboLIGHT16, SpeedLIGHT16, PONy Express<sup>TM</sup> 16

Sample Serial Number: None (Proto type)

Sample Receive Date: June 18, 2007

Testing Start Date: June 25, 2007

Date Testing Complete: June 25, 2007

Overall Results: PASS

UL Korea Ltd. reports apply only to the specific samples tested under stated test conditions. All samples tested were in good operating condition throughout the entire test program. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. UL Korea Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from UL Korea Ltd. issued reports.

Project Number: 07CA28584 File Number MC15663

Model Number: NS 16100 NN

**TEST SUMMARY** 

### Test Result

| Requirement – Test                       | Reference standards            | Result | Verdict  |
|--|--------------------------------|--------|----------|
| Conducted Disturbance at the mains ports | FCC Part 15 Subpart B, Class B | Pass   | Complied |
| Radiated Disturbance                     |                                | Pass   | Complied |

The tests listed in the Summary of Testing section of this report have been performed and the results recorded by UL Korea, Ltd. in accordance with the procedures stated in each test requirement and specification. The applicant determined the list of tests performed were applicable to the Equipment Under Test. As a result, the subject product has been verified to comply or not comply as noted in the Summary of Testing with each test specification. The test results relate only to the items tested.

The equipment under test has

met the technical requirements

not met the technical requirements

Tested by

Jea Woon, Choi, Project Engineer

Conformity Assessment Services - 3014ASEO

UL Korea Ltd.

July 23, 2007

Reviewed by

Kyungyong, Kim, Senior Project Engineer

Kayorng Erm

Page

3 of 21

Conformity Assessment Services - 3014ASEO

UL Korea Ltd.

July 23, 2007

Project Number: 07CA28584 File Number MC15663 Page

Model Number: NS 16100 NN

## **Report Directory**

4 of 21

| 1. E | EQUIPMENT UNDER TEST(EUT)           | 5  |
|------|-------------------------------------|----|
| 1.1  | EQUIPMENT DESCRIPTION               | 5  |
| 1.2  | EQUIPMENT MARKING PLATE             | 6  |
| 1.3  | EQUIPMENT USED DURING TEST          |    |
| 1.4  | INPUT/OUTPUT PORTS                  |    |
| 1.5  | EUT INTERNAL OPERATING FREQUENCIES: |    |
| 1.6  | Power Interface:                    | 8  |
| 2. E | EUT OPERATION MODES:                | 9  |
| 3. E | EUT CONFIGURATIONS:                 | 9  |
| 4. C | CONDUCTED EMISSION                  | 10 |
| 5. R | RADIATED EMISSION                   | 14 |
| APPE | ENDIX A                             | 18 |
| Acci | REDITATIONS AND AUTHORIZATIONS      | 18 |
| APPE | NDIX B                              | 19 |
| MEA  | SUREMENT UNCERTAINTIES              | 19 |
| APPE | NDIX C                              | 20 |
| EUT  | MODIFICATIONS                       | 20 |

Project Number: 07CA28584 File Number MC15663 Page 5 of 21

Model Number: NS 16100 NN

### 1. EQUIPMENT UNDER TEST(EUT)

### 1.1 Equipment Description

SpeedLIGHT 16 and T urboLIGHT 16 are designed for the realization of high-speed access networks. The equip ment enables symmetric and dedicated high-band width optical data links to deliver services such as video, Internet and voice communications. Existing subscriber devices such as xDSL or cable-modems have limitations in distance and data rates. SpeedLIGHT 16 and T urboLIGHT 16 are optimum solutions for complementing these limitations by enabling efficient and cost-effective optical connectivity for FTTC and FTTB network applications.

SpeedLIGHT 16 and/or TurboLIGHT 16 system consists of Optical Line Terminals (OLT), Remote Nodes (RN) and Optical Network Terminals (ONT). A fiber trunk path is used from CO to the passive RN in the subscriber area. A fiber trunk path is used from the RN to each ONT. The ONT can be connected to an electrical switch for connectivity to multiple users. The ONT converts the optical signal from the OLT into an electric signal at the remote location. It also converts the electric signal into an optical signal for transmission to the OLT. The ONT is auto matically allocated with a dense WDM optical wavelength for a dedicated and independent connection to the OLT.


The following are the technical specification of the ONT product


| Optical Interface                                   |                                       |  |  |  |  |
|---|---------------------------------------|--|--|--|--|
| Optical cable                                       | Single mode optical fiber             |  |  |  |  |
| Line Rate   | 125 Mbps                              |  |  |  |  |
| Ooptical Interface                                  | SC/APC connetor                       |  |  |  |  |
| Input optical data power                            | -33 dBm to -5 dBm(E-band)             |  |  |  |  |
| Output optical data power -10 dBm to +3 dBm(C-band) |                                       |  |  |  |  |
| BLS input power -12 dBm to +5 dBm(C-band)           |                                       |  |  |  |  |
| <u> </u>  | Ethernet Port                         |  |  |  |  |
| Operation mode                                      | Fast Ethernet / Auto-Negotiation Mode |  |  |  |  |
| Electrical interface                                | RJ-45 connector                       |  |  |  |  |
| Environmental Conditions                            |                                       |  |  |  |  |
| Operating temperature                               | 0℃ ~ 50℃                              |  |  |  |  |
| Operating humidity 5% ~ 85%                         |                                       |  |  |  |  |

Project Number: 07CA28584 File Number MC15663 Page 6 of 21

Model Number: NS 16100 NN

### 1.2 Equipment Marking Plate

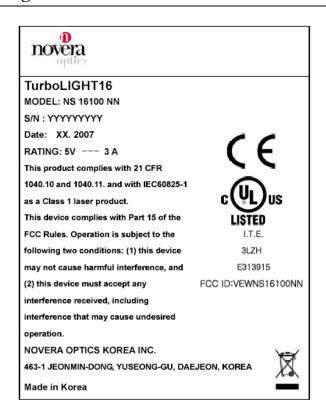

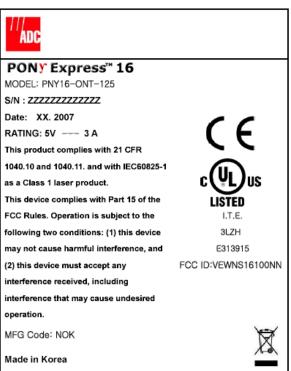

UL Korea, Ltd. 33<sup>rd</sup> FL, Gangnam Finance Center, 737 Yeoksam-dong, Gangnam-gu, Seoul 135-984 Korea Tel: +82.2.2009.9000, Fax:+82.2.2009.9405

Project Number: 07CA28584 File Number MC15663 Page 7 of 21

Model Number: NS 16100 NN

## 1.3 Equipment Used During Test

| Use* | Product Type                | Manufacturer             | Model        | Comments |
|------|-----------------------------|--------------------------|--------------|----------|
| EUT  | WDM-PON ONT                 | Novera Optics Korea Inc. | NS 16100 NN  |          |
| AE   | WDM-PON OLT                 | Novera Optics Korea Inc. | NS 16 1G CO  |          |
| AE   | Adapter                     | AULT KOREA Corp          | PW118        | 2(EA)    |
| AE   | RN                          | Novera Optics Korea Inc. | RN AWG 1:16B |          |
| AE   | Performance Analysis System | Spirent Communications   | SMB-600B     |          |

<sup>\*</sup> Note: EUT - Equipment Under Test, AE - Auxiliary/Associated Equipment, SIM - Simulator (Not Subjected to Test)

## 1.4 Input/Output Ports

| Port | Name        | Type* | Cable    | Cable       | Comments                                 |
|------|-------------|-------|----------|-------------|--|
| #    |             |       | Max. >3m | Shielded    |  |
| 1    | Mains       | AC    | 1.5m     | Unshielded  | Connected with EUT/Adaptor               |
| 2    | 100 Base-FX | TP    | 10.0m    | Optic cable | Connected to RN (OPTICAL)                |
| 3    | Ethernet TX | TP    | 10.0m    | Shielded    | Connected to Performance Analysis System |

Note:

\*AC = AC Power Port DC = DC Power Port N/E = Non-Electrical

I/O = Signal Input or Output Port (Not Involved in Process Control)

TP = Telecommunication Ports

Project Number: 07CA28584 File Number MC15663 Page 8 of 21

Model Number: NS 16100 NN

## 1.5 EUT Internal Operating Frequencies:

| Frequency (MHz) | (MHz) Description Frequency (MHz)   |       | Description                 |  |  |
|-----------------|-------------------------------------|-------|-----------------------------|--|--|
| 100.0           | I <sup>2</sup> C(CPU to Tranceiver) | 125.0 | Data(Tranceiver to 6063 SW) |  |  |
| 100.0           | SMI/Data(CPU to 6063 SW)            | 25.0  | SW Clock                    |  |  |
| 133.0           | SDRam bus                           | 250.0 | TX                          |  |  |
| 25.0            | CPU Clock                           | -     | -                           |  |  |

## 1.6 Power Interface:

| Mode<br># | Voltage<br>(V) | Current (A) | Power (W) | Frequency (DC/AC-Hz) | Phases<br>(#)   | Comments                |
|-----------|----------------|-------------|-----------|----------------------|-----------------|-------------------------|
| Rated     | 100-250Vac     | 0.5         | -         | 50 - 60HZ            | Single<br>Phase | Input of AC/DC Adapter  |
| Rated     | +5 DC          | 3.0         | -         | -                    | -               | Output of AC/DC Adapter |
| Rated     | +5 DC          | 2.0         | 10.0      | -                    | -               | EUT                     |


Project Number: 07CA28584 File Number MC15663 Page 9 of 21

Model Number: NS 16100 NN

## 2. EUT Operation Modes:

| Mode # | Description  |
|--------|--|
| 1      | Communication link and Data transmission function  |
|        | Emission & Immnity tests have been performed by establishing optic communication links between ONT and OLT OCU through RN interface. To simulator and check the optic communication link quality, the Performance Aanalysis System(SMB-600B)) was used for Ethernet packet data sending / receiving of 100 Mbps LAN port and 1000 Mbps optic port of EUT FX, TX ports. |

## 3. EUT Configurations:

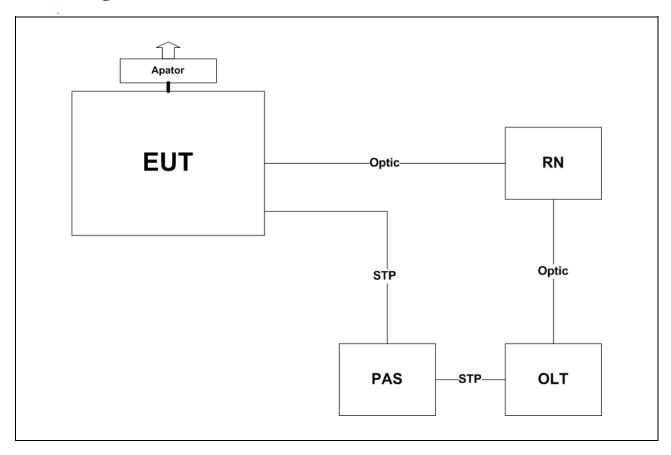

Project Number: 07CA28584 File Number MC15663 Page 10 of 21

Model Number: NS 16100 NN

## 4. CONDUCTED EMISSION

|  | TEST: Limits of mains terminal disturbance voltage   |                  |                         |              |       |                  |  |  |
|--|--|------------------|-------------------------|--------------|-------|------------------|--|--|
|  | Measurements were made on a ground plane that extends 1-meter minimum beyond all sides of the system under test. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN. |                  |                         |              |       |                  |  |  |
| Parameters rec   | quired p   | rior to the test | Laboratory Ambient Tem  | perature     |       | 10 to 40 °C      |  |  |
|  |  |                  | Relative Humidity       |              |       | 10 to 90 %       |  |  |
| Parameters rec   | corded d   | luring the test  | Laboratory Ambient Tem  | perature     |       | 26°C             |  |  |
|  |  |                  | Relative Humidity       |              |       | 46%              |  |  |
|  |  |                  | Frequency range on each | side of line | Me    | easurement Point |  |  |
| Fully configured sample scanned over the following frequency range |  |                  | 150kHz to 30MHz         |              | Mains |                  |  |  |
|  |  |                  | Limits - Class A        |              |       |                  |  |  |
|  |  |                  | Limit (dBµV)            |              |       |                  |  |  |
| Frequency (M   | Hz)  | Quasi-Peak       | Results Average         |              | ge    | Results          |  |  |
| 0.15 to 0.:  | 50   | 79               | N/A                     | 66           |       | N/A              |  |  |
| 0.50 to 3  | 0  | 73               | N/A                     | 60           |       | N/A              |  |  |
|  |  |                  | Limits - Class B        |              |       |                  |  |  |
|  |  |                  | Limit (                 | $(dB\mu V)$  |       |                  |  |  |
| Frequency (M   | Hz)  | Quasi-Peak       | Results                 | Avera        | ge    | Results          |  |  |
| 0.15 to 0.:  | 50   | 66 to 56         | Pass                    | 56 to        | 46    | Pass             |  |  |
| 0.50 to 5  | 5  | 56               | Pass                    | 46 Pas       |       | Pass             |  |  |
| 5 to 30  |  | 60               | Pass                    | 50           |       | Pass             |  |  |

| Test Equipment Used  |               |                         |            |              |              |  |  |  |  |
|--|---------------|-------------------------|------------|--------------|--------------|--|--|--|--|
| Description Manufacturer Model Identifier Cal. Date Cal. Due |               |                         |            |              |              |  |  |  |  |
| Test Receiver  | Rohde&Schwarz | ESPI                    | 100063     | 2006. 11. 09 | 2007. 11. 09 |  |  |  |  |
| Artificial Mains Network                                     | PMM           | L3-25                   | 1110K70403 | 2006. 09. 09 | 2007. 09. 09 |  |  |  |  |
| LISN   | FCC           | FCC-LISN-<br>50-50-2-02 | 03074      | 2006. 11. 13 | 2007. 11. 13 |  |  |  |  |

Project Number: 07CA28584 File Number MC15663 Page 11 of 21

Model Number: NS 16100 NN

Figure 1 Conducted Emission Test Setup





Project Number: 07CA28584 File Number MC15663 Page 12 of 21

Model Number: NS 16100 NN

Table 1. Test data for conducted emission:


| Test<br>Frequency |       | ection<br>etor |       | ding<br>dBuV) | 2     Level(dRitV)   Limit (dRitV) |       | Level(dBuV) |       | (dBuV) | Margin (dB) |      |
|-------------------|-------|----------------|-------|---------------|------------------------------------|-------|-------------|-------|--------|-------------|------|
| (MHz)             | Cable | LISN           | QP    | AV            |                                    | QP    | AV          | QP    | AV     | QP          | AV   |
| 0.150             | 0.06  | 0.03           | 50.95 | -             | Н                                  | 51.04 | -           | 66.00 | 56.00  | 14.96       | -    |
| 0.202             | 0.07  | 0.10           | 49.33 | -             | Н                                  | 49.05 | -           | 64.60 | 54.15  | 15.10       | -    |
| 0.270             | 0.07  | 0.16           | 43.07 | -             | Н                                  | 43.30 | -           | 62.60 | 52.56  | 19.30       | -    |
| 0.338             | 0.08  | 0.22           | 40.43 | -             | N                                  | 40.73 | -           | 60.70 | 50.15  | 19.97       | -    |
| 0.406             | 0.08  | 0.26           | 38.46 | -             | N                                  | 38.80 | -           | 58.70 | 49.56  | 19.90       | -    |
| 0.538             | 0.07  | 0.30           | 38.76 | -             | N                                  | 39.13 | -           | 56.00 | 46.00  | 16.87       | -    |
| 1.210             | 0.04  | 0.43           | 36.63 | -             | N                                  | 37.10 | -           | 56.00 | 46.00  | 18.90       | -    |
| 2.218             | 0.03  | 0.56           | 39.46 | -             | Н                                  | 40.05 | -           | 56.00 | 46.00  | 15.95       | -    |
| 2.758             | 0.04  | 0.59           | 46.57 | 37.97         | Н                                  | 47.20 | 38.60       | 56.00 | 46.00  | 8.80        | 7.40 |
| 5.918             | 0.06  | 0.90           | 38.03 | -             | N                                  | 38.99 | _           | 60.00 | 50.00  | 21.01       | -    |
| 8.142             | 0.06  | 1.00           | 35.08 | -             | N                                  | 36.14 | -           | 60.00 | 50.00  | 23.86       | -    |
| 23.742            | 0.08  | 1.48           | 33.62 |               | N                                  | 35.18 |             | 60.00 | 50.00  | 24.82       | _    |

<sup>\*</sup> Note: Margin (dB)= Limit (dBuV) - Level (dBuV)


<sup>\*</sup> Note: If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.

Model Number: NS 16100 NN

Figure 2. Operating condition:

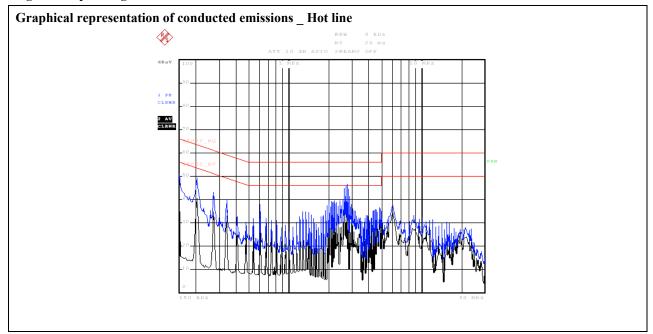



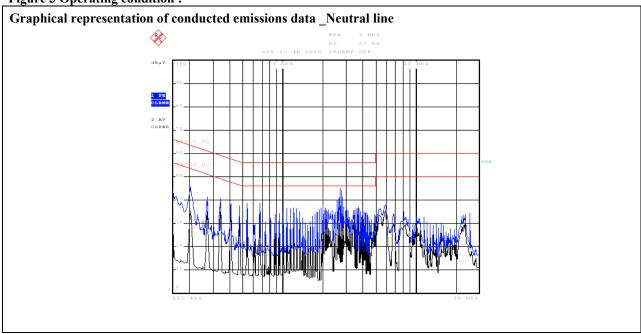

Project Number: 07CA28584 File Number MC15663 Page 14 of 21

Model Number: NS 16100 NN


### 5. RADIATED EMISSION

|            | TEST: Limits for radiate   | TEST: Limits for radiated disturbance |                                 |  |  |  |  |  |  |  |
|------------|--|---------------------------------------|---------------------------------|--|--|--|--|--|--|--|
| Method     | Measurements were made at Open area test site that complies to CISPR 16/ANSI C63.4.  Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 10-meter. The EUT was rotated 360° about its azimuth with the receive antenna located at 1, 2, 3 and 4 meter heights in both horizontal and vertical polarities. Final measurements (quasi-peak or average as noted) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4-meters. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. |                                       |                                 |  |  |  |  |  |  |  |
| Parameters | s required prior to the test   | Laboratory Ambient Temperature        | 10 to 40 °C                     |  |  |  |  |  |  |  |
|            |  | Relative Humidity                     | 10 to 90 %                      |  |  |  |  |  |  |  |
| Parameters | s recorded during the test   | Laboratory Ambient Temperature        | 31°C                            |  |  |  |  |  |  |  |
|            |  | Relative Humidity                     | 40%                             |  |  |  |  |  |  |  |
|            |  | Frequency range                       | Measurement Point               |  |  |  |  |  |  |  |
|            | igured sample scanned over<br>ing frequency range  | 30MHz – 2GHz                          | (10 meter measurement distance) |  |  |  |  |  |  |  |
|            |  | Limits - Class A                      |                                 |  |  |  |  |  |  |  |
|            | 0.01   | Limit (dBμV/m)                        |                                 |  |  |  |  |  |  |  |
| F          | requency (MHz)   | Quasi-Peak                            | Results                         |  |  |  |  |  |  |  |
|            | 30 to 230  | 40                                    | N/A                             |  |  |  |  |  |  |  |
|            | 230 to 1000  | 47                                    | N/A                             |  |  |  |  |  |  |  |
|            |  | Limits - Class B                      |                                 |  |  |  |  |  |  |  |
|            | (100)  | Limit (dBµV/r                         | n)                              |  |  |  |  |  |  |  |
| F          | requency (MHz)   | Quasi-Peak                            | Results                         |  |  |  |  |  |  |  |
|            | 30 to 230  | 30 Pass                               |                                 |  |  |  |  |  |  |  |
|            | 230 to 1000  | 37 Pass                               |                                 |  |  |  |  |  |  |  |
|            | 1000 to 2000 43.5(Average) Pass  |                                       |                                 |  |  |  |  |  |  |  |
| Supplemen  | ntary information:   |                                       |                                 |  |  |  |  |  |  |  |

| Test Equipment Used            |                 |          |            |              |              |
|--------------------------------|-----------------|----------|------------|--------------|--------------|
| Description                    | Manufacturer    | Model    | Identifier | Cal. Date    | Cal. Due     |
| Test Receiver                  | Rohde&Schwarz   | ESPI     | 100063     | 2006. 11. 09 | 2007. 11. 09 |
| Bilog antenna                  | Rohde & Schwarz | VULB9160 | 9160-3122  | 2006. 12. 29 | 2007. 12. 29 |
| Antenna mast                   | DEAIL           | JAC-3    | N/A        | N/A          | N/A          |
| Antenna Turtable<br>Controller | DEAIL           | JAC-2    | N/A        | N/A          | N/A          |

Model Number: NS 16100 NN

Figure 4. Photo of Radiated emission test setup

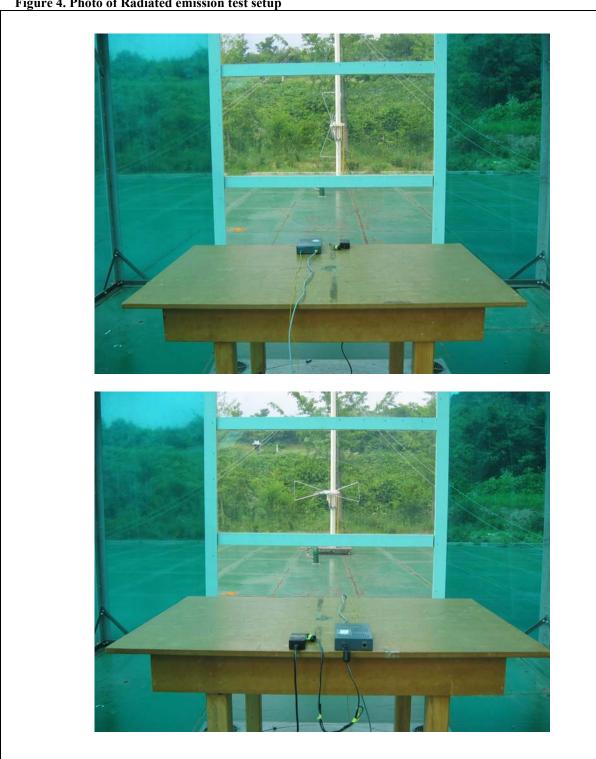

Project Number: 07CA28584 File Number MC15663 Page 16 of 21

Model Number: NS 16100 NN



Project Number: 07CA28584 File Number MC15663 Page 17 of 21

Model Number: NS 16100 NN

Table 2 Radiated emission Test data:

| Test<br>Frequency<br>(MHz) | Meter<br>Reading<br>(dB $\mu$ V) | Detector<br>(Pk/QP) | Polarity<br>(V/H) | Azimuth (Degrees) | Antenna<br>Height<br>(m) | Gain/Loss<br>Factor(dB) | Transducer<br>Factor<br>(dB/m) | Level<br>dBuV/m | Limit<br>dBuV/m | Margin<br>[dB] |
|----------------------------|----------------------------------|---------------------|-------------------|-------------------|--------------------------|-------------------------|--------------------------------|-----------------|-----------------|----------------|
| 73.72                      | 15.05                            | QP                  | V                 | 90                | 1.0                      | 1.88                    | 9.76                           | 26.70           | 30.00           | 3.30           |
| 200.03                     | 13.23                            | QP                  | Н                 | 90                | 2.0                      | 3.15                    | 10.12                          | 26.50           | 30.00           | 3.50           |
| 250.02                     | 17.06                            | QP                  | Н                 | 90                | 1.8                      | 3.51                    | 11.83                          | 32.40           | 37.00           | 4.60           |
| 300.02                     | 16.31                            | QP                  | Н                 | 90                | 1.7                      | 3.88                    | 13.41                          | 33.60           | 37.00           | 3.40           |
| 666.67                     | 6.77                             | QP                  | Н                 | 90                | 1.5                      | 5.96                    | 20.56                          | 33.30           | 37.00           | 3.70           |
| 933.35                     | 1.34                             | QP                  | Н                 | 90                | 1.2                      | 7.38                    | 24.08                          | 32.80           | 37.00           | 4.20           |

Supplementary information:

This table is to be use when Gain/Loss and Transducer Factors are provided separately.

#### No peak emission was detected at the frequency range above 1000MHz.

\* Note: Margin (dB)= Limit (dBuV) - Level (dBuV)

<sup>\*</sup> Note: If no frequencies are specified in the tables, no measurement for quasi-peak or average was necessary.

Project Number: 07CA28584 File Number MC15663 Page 18 of 21

Model Number: NS 16100 NN

### Appendix A

#### **Accreditations and Authorizations**



MIC: Designated as a testing laboratory by Radio Research Laboratory in accordance with the Regulation on Designation of Testing Laboratory for Information and Communication Equipment.

Registration No.: KR0017



KOLAS: Accredited by Korea Laboratory Accreditation Scheme (KOLAS) as Testing Laboratory in accordance with the provisions of Article 23 of the National Standards Act. These criteria encompass the requirements of ISO/IEC 17025:2000. For a scope listing search at http://kolas.kats.go.kr/02\_english/m02\_01\_s01.asp?OlapCode=KOLU19



FCC: Details of the measurement facilities used for these tests have been filed with the Federal Communications Commission's Laboratory in Columbia, Maryland and accepted in a letter dated July 17, 2005 (Reg. No. 553281). As a Conformity Assessment Body (CAB), our organization is designated to perform compliance testing on equipment subject to Declaration Of Conformity (DOC) and Certification under Part 15 and 18 of the Commission's Rules in a letter dated July 14, 2005.



VCCI: Accepted as an Associate Member to the VCCI. The measurement facilities detailed in this test report have been registered in accordance with Regulations for Voluntary Control Measures, Article 8. Registration Nos.: (Radiated Emissions) R-2414, (Conducted Emissions) C-2641.

Project Number: 07CA28584 File Number MC15663 Page 19 of 21

Model Number: NS 16100 NN

## Appendix B

#### **Measurement Uncertainties**

| Test                | Uncertainty |
|---------------------|-------------|
| Radiated Emissions  | ±3.56 dB    |
| Conducted Emissions | ±5.52 dB    |

Project Number: File Number MC15663 Page 20 of 21 07CA28584

Model Number: NS 16100 NN

## Appendix C

#### **EUT Modifications**

| Items | Description  |
|-------|--|
| #1    | Added two Clamp type ferrite core(E-TECH Electronics / RU65B) on the DC input cable of AC/DC Adapter with 1turn. |
| #2    | Added 3 copper tape between external shield case and main PCB GND.   |
| #3    | Added 3 ferrite bead(TDK/HF70R6H6X10H0.8) on the DC input port.  |



Project Number: 07CA28584 File Number MC15663 Page 21 of 21

Model Number: NS 16100 NN

