

Operational description of the RF remote control

1. The inside is produced and shaken by crystal of 315MHz.
2. MCU receiver key single and transmit signal through RF circuit of 315MHz principle of the receiver.

(please see figure 1)

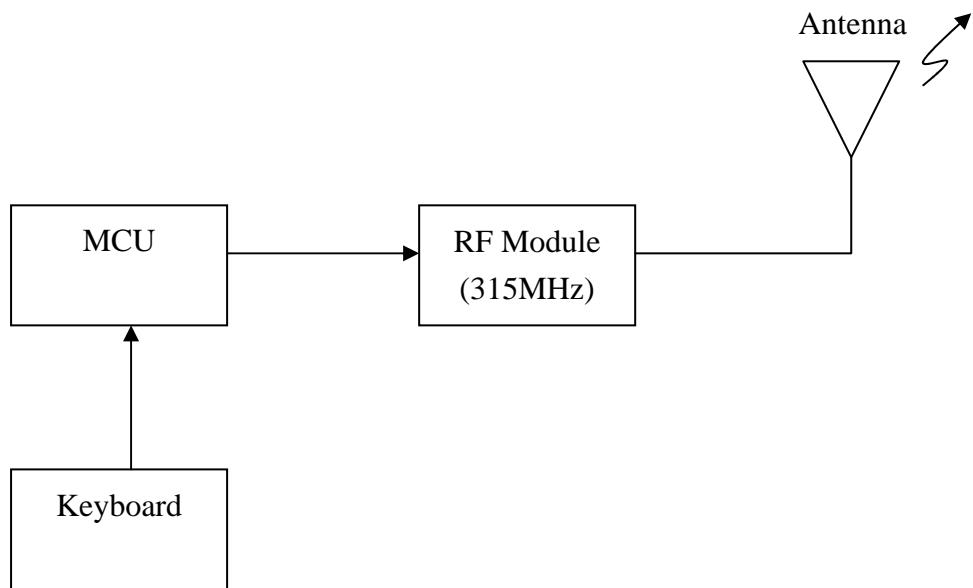


Figure 1