



FCC PART18 TEST REPORT

Report No.: 20250517G11023X-E

Product Name: Microwave Oven

Trade Name: Midea

Model No. : TJE17GYYS-S00N0A, TJE17GYYY-S00N0A

FCC ID : VG8TJE18GXX

Applicant: Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd.

Received Date: 2025.05.15

Test Data: 2025.05.20-2025.05.23

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China

Report Query E-Mail: manager@ccic-set.com

Feedback E-Mail: integrity@ccic-set.com

Report Query Tel: 0755-26627338

Feedback Tel: 0755-86185963

This test report consists of **27** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product Name: Microwave Oven

Model No.: TJE17GYY-S00N0A, TJE17GYYY-S00N0A

Trade name: Midea

Applicant.....: Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd.

Applicant Address: No.6, Yong An Road, Beijiao, Shunde, Foshan, China

Manufacturer.....: Guangdong Midea Kitchen Appliances Manufacturing Co., Ltd.

Manufacturer Address: No.6, Yong An Road, Beijiao, Shunde, Foshan, China

Test Standards: 47 CFR Part 18
47 CFR Part 15 Subpart B

Test Result.....: PASS

Tested by: Deng Shanfei
Deng Shanfei, Test Engineer 2025.05.26

Reviewed by: Sun Jiaohui
Sun Jiaohui, Senior Engineer 2025.05.26

Approved by: Chris You
Chris You, Manager 2025.05.26

**TABLE OF CONTENTS**

1.	GENERAL INFORMATION	5
1.1	GENERAL DESCRIPTION OF EUT	5
1.2	Test Standards and Results	6
1.3	Facilities and Accreditations	7
1.3.1	Facilities	7
1.3.2	Test Environment Conditions	7
1.3.3	Measurement Uncertainty	8
2.	EQUIPMENTS LIST	9
3.	EMC EMISSION TEST	10
3.1	Test Procedure	10
3.1.1	Frequency For Normal Voltage	10
3.1.2	Frequency For Line Voltage	10
3.1.3	Measurement data.....	11
3.2	RADIATION HAZARD TEST	11
3.2.1	Test Setup	11
3.2.2	Limit	11
3.2.3	Test results	11
3.3	RF OUTPUT POWER MEASUREMENT	12
3.3.1	Test Standard	12
3.3.2	EUT Operating mode	12
3.3.3	Test Data	12
4.	CONDUCTED EMISSION	13
4.1.1	Conducted Emission Limit	13
4.1.2	Test Procedure	13
4.1.3	Test Setup	13
5.	RADIATED EMISSION	18
5.1.1	Radiated Emission Limits	18
5.1.2	Test Setup	18
5.1.3	Test Procedure	19
APPENDIX I: PHOTOGRAPHS OF EMC TEST CONFIGURATION		26



Change History		
Issue	Date	Reason for change
1.0	2025.05.26	First edition



1. GENERAL INFORMATION

1.1 GENERAL DESCRIPTION OF EUT

EUT Name	Microwave Oven
Trade Name.....	Midea
Model.....	TJE17GYYS-S00N0A, TJE17GYYY-S00N0A model designations as follow: T: Touch type keypad; J: Indicates upper and lower hot air convection function; E: Indicates power code; 17: Indicates cavity capacity is 17 liters; G: Indicates the design No.; YY or YYY: "Y" = 0-9, A-Z or blank, indicates different appearance; -S00N0A: "S" indicates stainless steel Cavity; "00N0" indicates the design No., "A" indicates the voltage of the United States. The model of TJE17GS7-S00N0A was selected for the final testing.
Power Supply	208/240V AC/60Hz
Rated input Power(microwave):	6000W
Rated output Power(microwave):	2000W
Rated Input Power (Convection)	3000W
Frequency	2450MHz (Class B / Group 2)
Magnetron Model.....	2M303K
Magnetron Manufacturer ...:	TOSHIBA
Description of Support Units:	-Load for power output measurement: 2000 milliliters of water in the beaker located in the center of the oven. -Load for frequency measurement: 1400 milliliters of water in the beaker located in the center of the oven. -Load for measurement of radiation on second and third harmonic: Two loads, one of 1400 and the other of 600 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner. -Load for all other measurements: 1400 milliliters of water, with the beaker located in the center of the oven.

Note 1: The EUT have the following typical setups during the test:

Setup1: Microwave heating mode (According to FCC PART 18);

Setup2: Convection mode (According to FCC PART 15B, digital device)

The tests were conducted respectively at two voltages, namely 208V and 240V.

Note 2: All the patterns have been tested and only the worst results are recorded in the report.

Note 3: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 18:

No.	Identity	Document Title
1	47 CFR Part 18	Radio Frequency Devices
2	47 CFR Part 15 Subpart B	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

Emission			
Standard	Item	Class / Severity	Result
47 CFR PART 18	Conducted Emission (150 kHz to 30 MHz)	18.307(b)	PASS
	Radiated Emission (30 MHz to1 GHz)	18.305(b)	PASS
47 CFR PART 15	Conducted Emission (150 kHz to 30 MHz)	15.107	PASS
	Radiated Emission (30 MHz to1 GHz)	15.109	PASS



1.3 Facilities and Accreditations

1.3.1 Facilities

☒ CCIC-SET Lab 1

Address: Electronic Testing Building, No.43, Shahe Road, Xili Street, Nanshan District, Shenzhen, Guangdong, China

FCC-Registration No.: CN1283

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283.

ISED Registration: 11185A, CAB number: CN0064

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

CNAS L1659

CCIC Southern Testing Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

☐ CCIC-SET Lab 4

Address: No.125, Hongmei Section, Wangsha Road, Hongmei Town, Dongguan City, Guangdong Province, China

CNAS L1659

CCIC Southern Testing Co., Ltd. CCIC is a third party testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L1659.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15°C- 35°C
Relative Humidity (%):	25% -75%



Atmospheric Pressure (kPa):	86kPa-106kPa
-----------------------------	--------------

1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	$U_c = 3.2 \text{ dB (k = 2)}$
Uncertainty of Radiated Emission:(30MHz~1 GHz)	$U_c = 5.8 \text{ dB (k = 2)}$
Uncertainty of Radiated Emission:(1~18 GHz)	$U_c = 5.1 \text{ dB (k = 2)}$



2. EQUIPMENTS LIST

A. Equipment List:

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	Rohde & Schwarz	ESR3	A181103297	2025.03.18	2026.03.17
LISN	ROHDE&SCHWARZ	NSLK 8127	A210803670	2024.07.26	2025.07.25
Shield Room	Xinju Electronics	L9000*W4500* H3100	A181003230	2023.07.30	2026.07.29
EMI Test Receiver	ROHDE&SCHWARZ	ESIB7	A0501375	2025.01.13	2026.01.12
Broadband Ant.	ETC	MCTD2786	A150402239	2025.04.27	2026.04.26
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2024.02.28	2027.02.27
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2025.04.25	2026.04.24
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2023.08.02	2026.08.01
EMI Horn Ant.	ETC	1209	A150402241	2024.05.18	2026.05.10
Spectrum Analyzer	ROHDE&SCHWARZ	ESW26	A180502935	2025.04.25	2026.04.24
Portable Spectrometer	ROHDE&SCHWARZ	FSH8	A140401672	2025.01.24	2026.01.23
Prode	ROHDE&SCHWARZ	TSEMF-B1	A140401671	2025.01.24	2026.01.23

3. EMC EMISSION TEST

3.1 Test Procedure

Test Requirement: 47 CFR PART 18

Test Method: FCC/OST MP-5:1986

Power Supply: 208&240V AC/60Hz

Frequency Range: 2400-2500MHz

Detector: Peak

Limit: ISM equipment may be operated at any frequency above 9KHz and the frequency band 2400-2500MHz is allocated for use by ISM equipment

ISM frequency	Tolerance
6.78 MHz	±15.0 kHz
13.56 MHz	±7.0 kHz
27.12 MHz	±163.0 kHz
40.68 MHz	±20.0 kHz
915 MHz	±13.0 MHz
2,450 MHz	±50.0 MHz
5,800 MHz	±75.0 MHz
24,125 MHz	±125.0 MHz
61.25 GHz	±250.0 MHz
122.50 GHz	±500.0 MHz
245.00 GHz	±1.0 GHz

3.1.1 Frequency For Normal Voltage

The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 2000mL water load was placed in the center of the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.

3.1.2 Frequency For Line Voltage

The EUT was operated / warmed by at least 10 minutes of use with a 2000mL water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.

3.1.3 Measurement data

Operating Mode	Frequency(MHz)
Normal Voltage	2433.7-2470.2
Line Voltage	2434.5-2470.7

3.2 RADIATION HAZARD TEST

3.2.1 Test Setup

The EUT was set-up according to the FCC MP-5 and FCC Part 18 for radiation Hazard measurement. The measurement was using a microwave leakage meter to measure the radiation leakage in the as-received condition with the oven door closed A 1400mL water load in a breaker was located in the center of the oven and the microwave oven was set to maximum power. While the oven operating, the microwave meter will check the leakage and then record the maximum leakage.

3.2.2 Limit

A maximum of 1.0mW/cm² is allowed in according with the applicable FCC standards

3.2.3 Test results

Test location	Test result (mW/cm ²)	Limit(mW/cm ²)	Verdict
Left side	0.26	1.0	Pass
Right side	0.21	1.0	Pass
Front	0.45	1.0	Pass
Rear	0.28	1.0	Pass

There was no microwave leakage exceeding a power level of 0.45 m W/cm² observed at any point 5cm or more from the external surface of the oven.

3.3 RF OUTPUT POWER MEASUREMENT

3.3.1 Test Standard

Test Requirement	47 CFR PART 18
Test Method	FCC/OST MP-5:1986
Power Supply	208&240V AC/60Hz

3.3.2 EUT Operating mode

Test the EUT in microwave mode with full power.

A quantity of 1 000 g +/-5 g of water is added to the container and its actual mass obtained. The food support for microwave heating is placed in the center of the support immediately. The oven is operated and the time for the water temperature to attain 20 +/-2 °C is measured. The oven is then switched off and the final water temperature is measured with in 60s.

3.3.3 Test Data

Mass of Water(g)	Mass of the container(g)	ambient temperature (°C)	Initial temperature(°C)	Final temperature(°C)	Heating Time(S)	Output Power(Watt)
2000	377	18.4	9.5	21.8	60	1728.42

Formula:

The microwave power output is calculated from the formula

$$P = \frac{4,187 \cdot m_w (T_1 - T_0) + 0,55 \cdot m_c (T_1 - T_A)}{t}$$

where

P is the microwave power output, (W);

m_w is the mass of the water, (g);

m_c is the mass of the container, (g);

T_A is the ambient temperature, (°C);

T_0 is the initial temperature of the water, (°C);

T_1 is the final temperature of the water, (°C);

t is the heating time, in seconds, excluding the magnetron filament heating-up time. $\langle A_1 \rangle$

The microwave power output is stated in watts, rounded to the nearest 50 W.

4. CONDUCTED EMISSION

4.1.1 Conducted Emission Limit

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50


Note:

- The limit decreases linearly with the logarithm of the frequency in the range 0.05 MHz to 0.5 MHz.
- The lower limit is applicable at the transition frequency.

4.1.2 Test Procedure


The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides 50 Ω /50 μ H of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

4.1.3 Test Setup

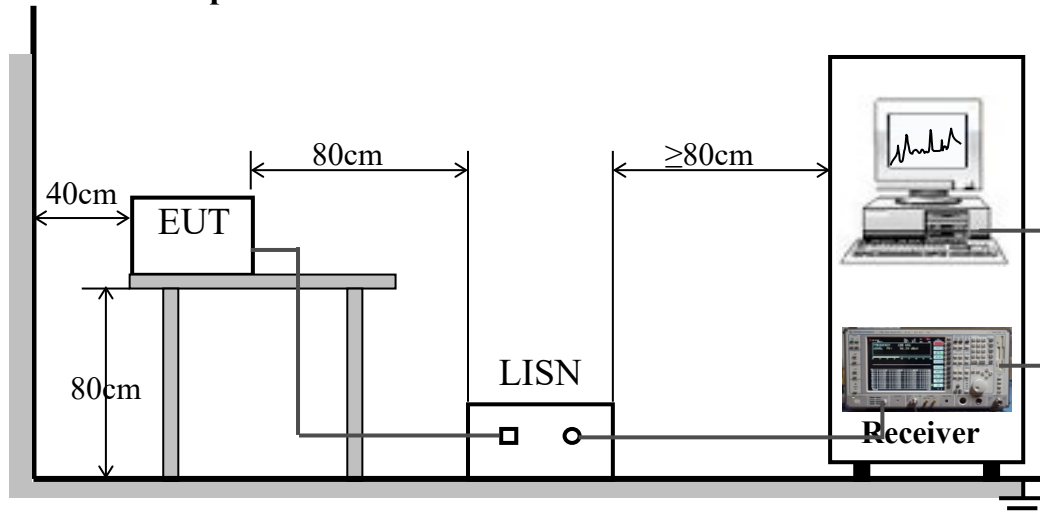

A. Test Result:


Mains terminal disturbance voltage, Setup 1, L1 phase, 240V

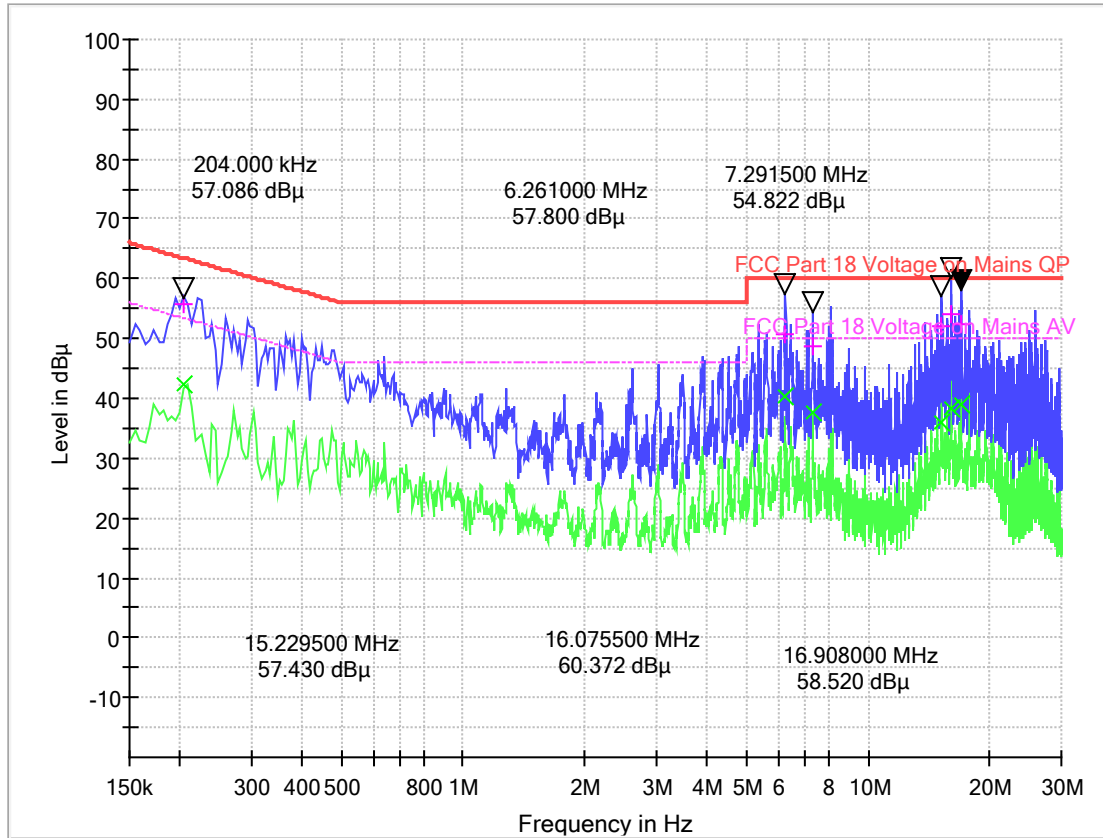

(Plot A: L1 Phase)

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)	Margin - AV (dB)	Limit - AV (dB μ V)
0.204000	55.63	42.35	10.5	7.81	63.45	11.09	53.45
6.261000	50.62	40.42	10.2	9.38	60.00	9.58	50.00
7.291500	48.68	37.67	10.2	11.32	60.00	12.33	50.00
15.229500	52.16	35.81	10.8	7.84	60.00	14.19	50.00
16.075500	53.97	38.48	10.8	6.03	60.00	11.52	50.00
16.908000	52.53	39.05	10.9	7.47	60.00	10.95	50.00


Mains terminal disturbance voltage, Setup 1, L2 phase, 240V

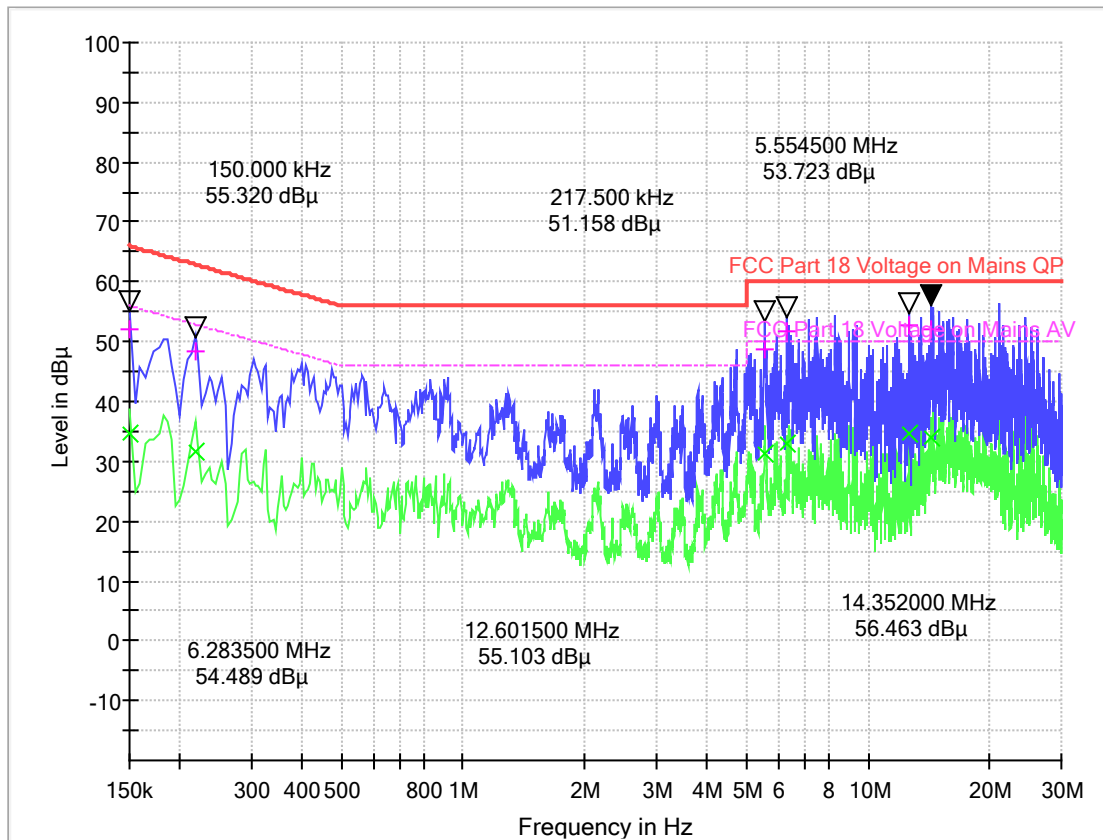

(Plot B: L2 Phase)

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)	Margin - AV (dB)	Limit - AV (dB μ V)
0.150000	52.21	34.69	10.6	13.79	66.00	21.31	56.00
0.217500	48.25	31.54	10.7	14.67	62.91	21.37	52.91
5.554500	48.82	31.36	10.3	11.18	60.00	18.64	50.00
6.283500	51.84	32.82	10.2	8.16	60.00	17.18	50.00
12.601500	52.73	34.72	10.7	7.27	60.00	15.28	50.00
14.352000	52.14	33.94	10.7	7.86	60.00	16.06	50.00


Mains terminal disturbance voltage, Setup 2, L1 phase, 208V

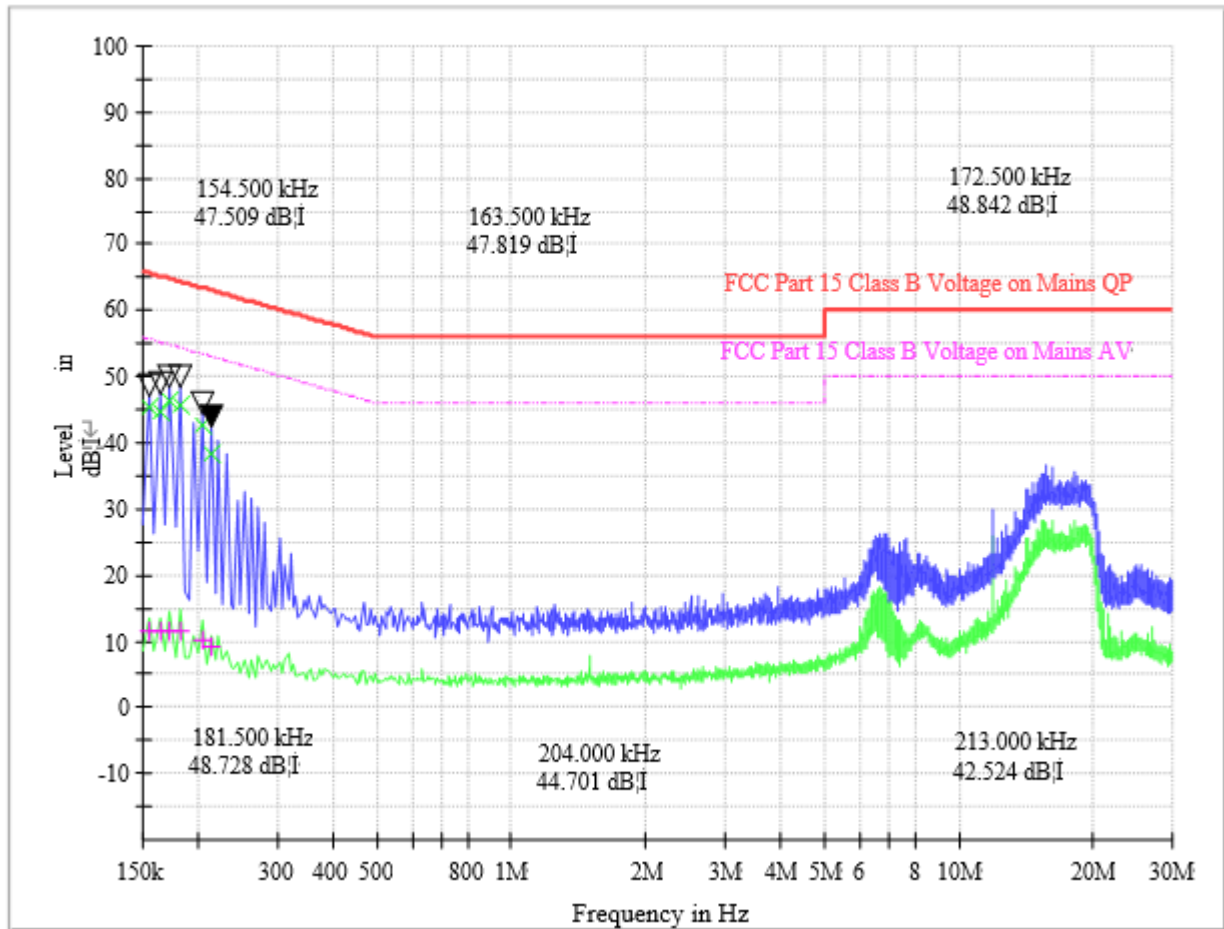

(Plot E: L1 Phase)

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)	Margin - AV (dB)	Limit - AV (dB μ V)
0.154500	45.38	11.66	10.5	20.38	65.75	44.09	55.75
0.163500	44.78	11.47	10.5	20.50	65.28	43.81	55.28
0.172500	46.49	11.38	10.5	18.35	64.84	43.46	54.84
0.181500	45.84	11.55	10.5	18.58	64.42	42.86	54.42
0.204000	42.65	10.18	10.5	20.80	63.45	43.27	53.45
0.213000	38.47	9.18	10.5	24.62	63.09	43.91	53.09

Mains terminal disturbance voltage, Setup 2, L2 phase, 208V

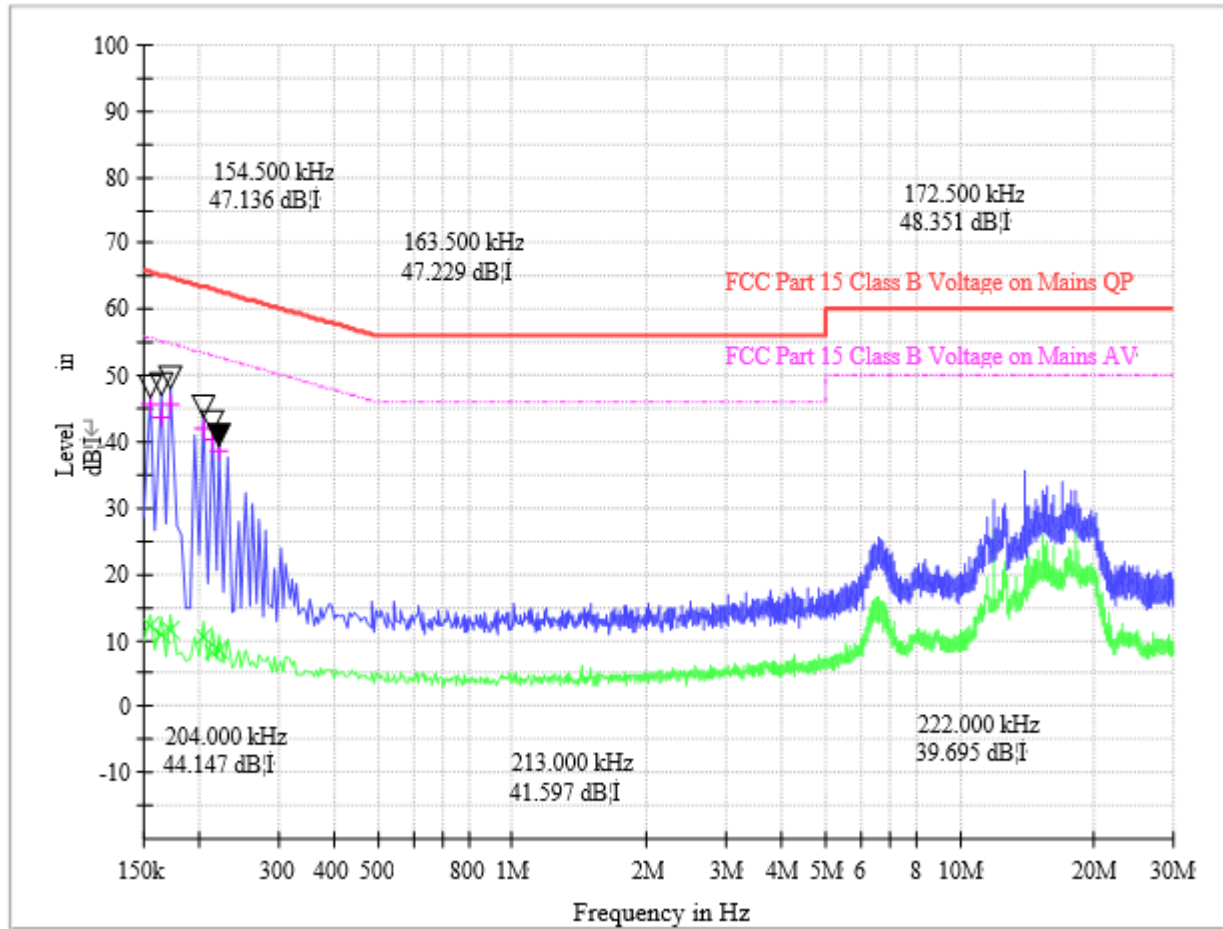

(Plot F: L2 Phase)

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dB μ V)	Margin - AV (dB)	Limit - AV (dB μ V)
0.154500	45.83	12.15	10.6	19.92	65.75	43.61	55.75
0.163500	43.62	10.94	10.6	21.67	65.28	44.34	55.28
0.172500	45.66	11.54	10.6	19.18	64.84	43.30	54.84
0.204000	42.00	10.35	10.7	21.45	63.45	43.10	53.45
0.213000	40.27	8.12	10.7	22.82	63.09	44.97	53.09
0.222000	38.55	8.60	10.8	24.20	62.74	44.15	52.74

Test Result: PASS

5. RADIATED EMISSION

5.1.1 Radiated Emission Limits

- (a) ISM equipment operation on a frequency specified in §18.301 is permitted unlimited radiated energy in the band specified for that frequency.
- (b) The field strength levels of emissions which lie outside the bands specified in §18.301, unless otherwise indicated, shall not exceed the following:


RF Power generated by equipment(watts)	Field strength limit(uV/m) @300m
Below 500	25
500 or more	$25 \cdot \sqrt{\text{power}/500}$

Power = 1728.42W


Limit = $20 \lg(25 \cdot \sqrt{\text{power}/500}) + 20 \lg(300/3)$ @ 3m distance.

5.1.2 Test Setup

For radiated emissions from 30MHz to 1GHz

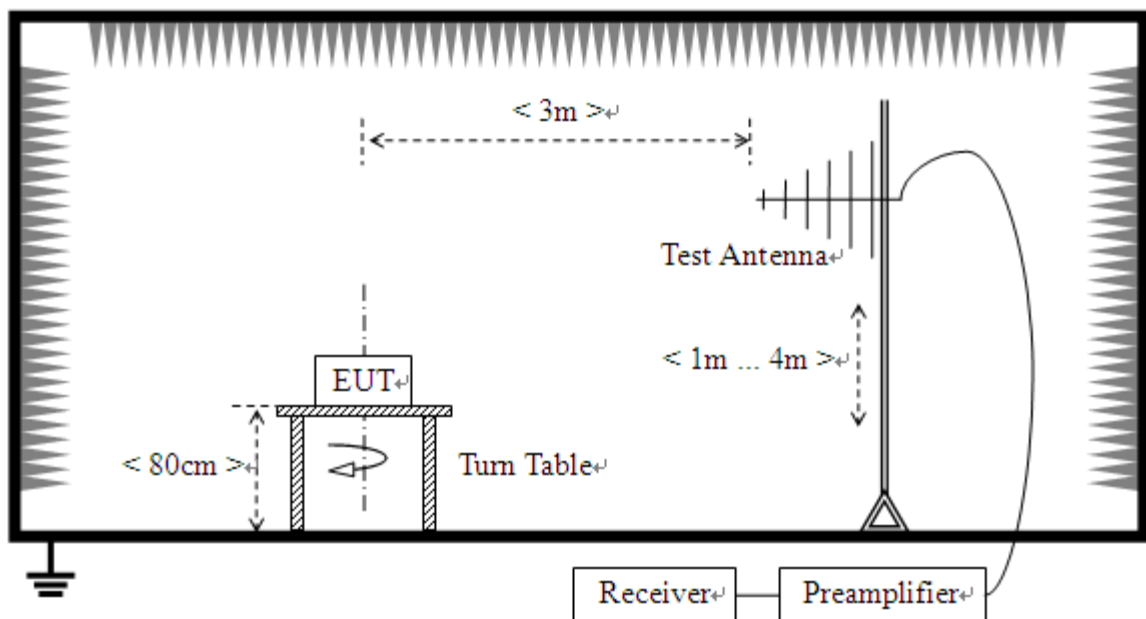

For radiated emissions above 1GHz

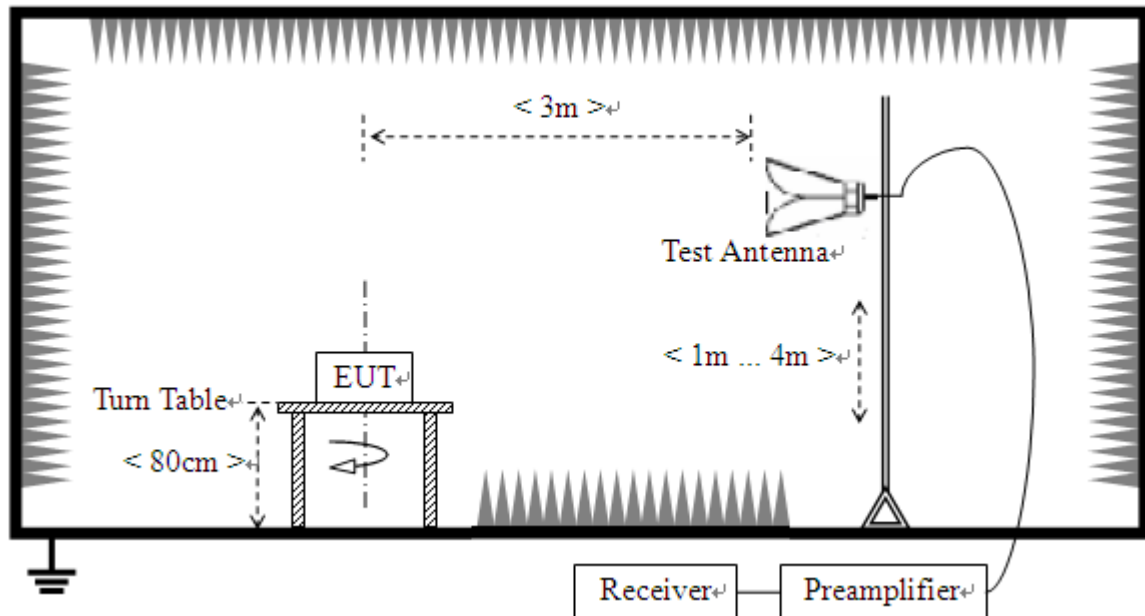


5.1.3 Test Procedure

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note: Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

Test Result:


Radiation disturbances, antenna polarization: Setup 1, Horizontal, 208V

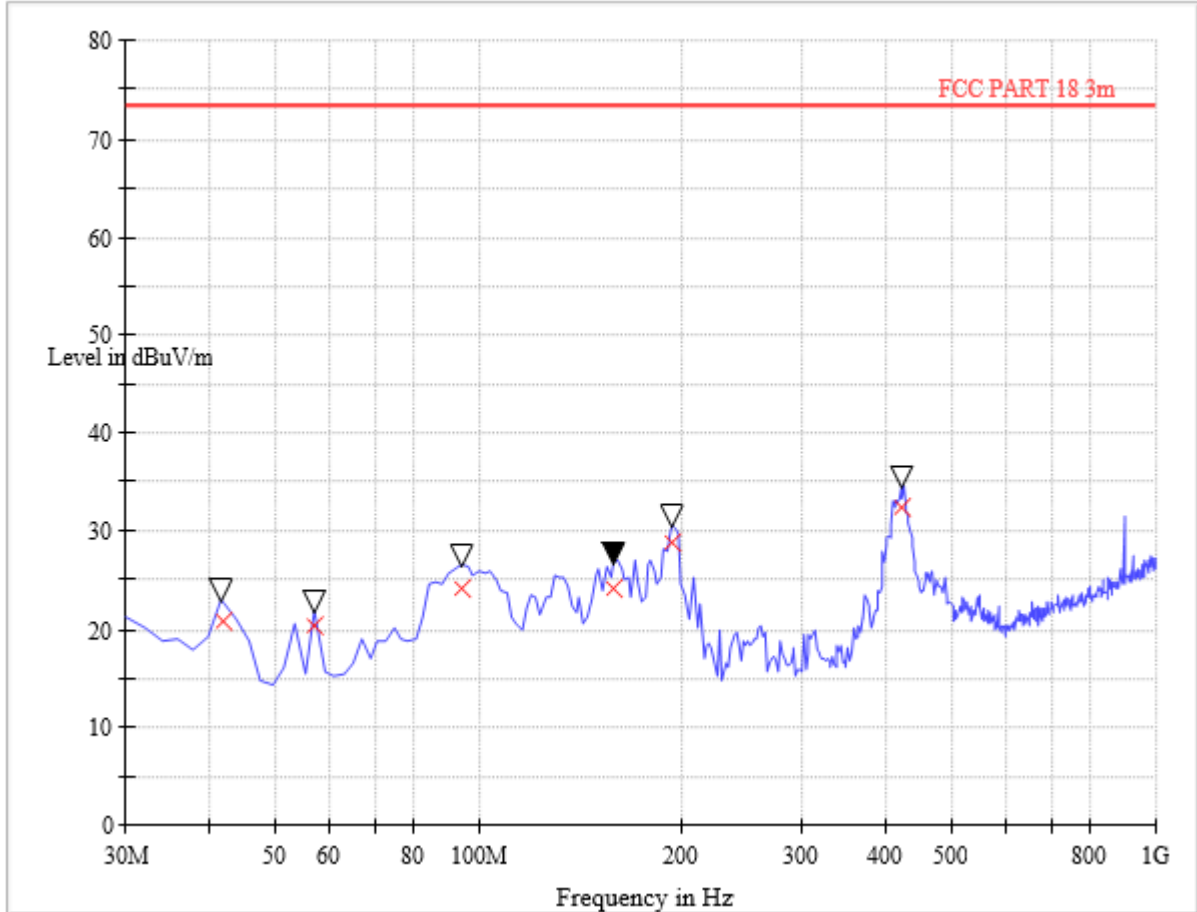

(Plot A: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	Quasi Peak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
41.68	20.88	120.000	100.0	73.35	52.47	Horizontal	Pass
57.20	20.23	120.000	100.0	73.35	53.12	Horizontal	Pass
94.16	24.09	120.000	100.0	73.35	49.26	Horizontal	Pass
158.28	24.22	120.000	100.0	73.35	49.13	Horizontal	Pass
193.28	28.76	120.000	100.0	73.35	44.59	Horizontal	Pass
420.72	32.34	120.000	100.0	73.35	41.01	Horizontal	Pass


Radiation disturbances, antenna polarization: Setup 1, Vertical, 208V

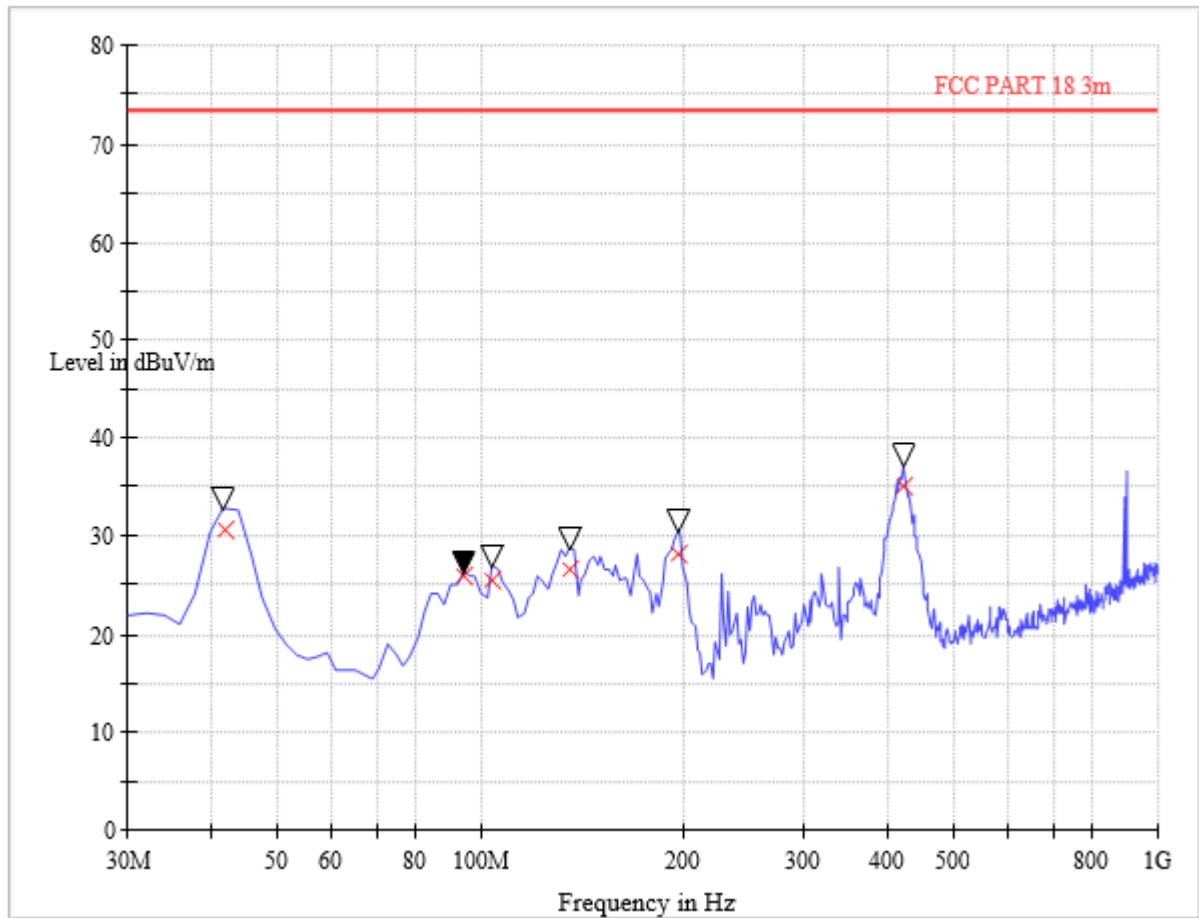

(Plot B: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	Quasi Peak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Horizontal
41.68	30.71	120.000	100.0	73.35	42.64	Vertical	Pass
94.16	25.92	120.000	100.0	73.35	47.43	Vertical	Pass
103.88	25.38	120.000	100.0	73.35	47.97	Vertical	Pass
134.96	26.50	120.000	100.0	73.35	46.85	Vertical	Pass
195.24	28.26	120.000	100.0	73.35	45.09	Vertical	Pass
420.72	35.08	120.000	100.0	73.35	38.27	Vertical	Pass


Radiation disturbances, antenna polarization: Setup 2, Horizontal, 208V

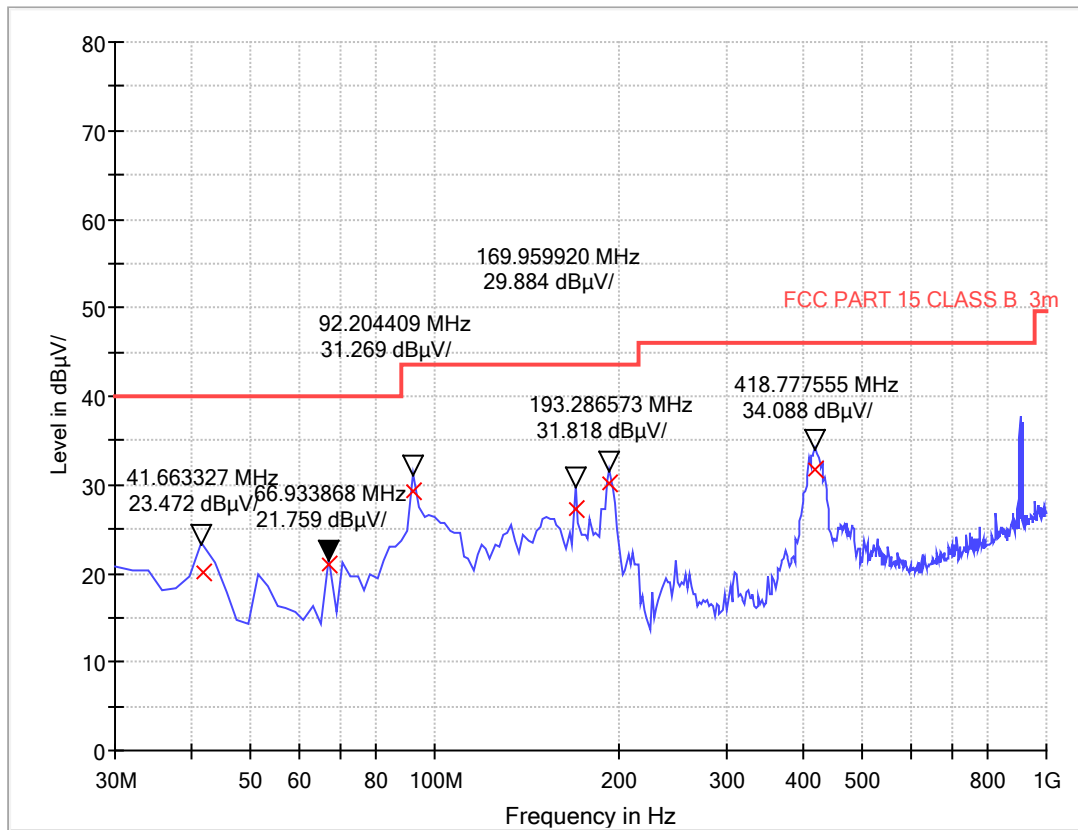

(Plot E: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	Quasi Peak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Verdict
41.68	20.02	120.000	100.0	40.0	19.98	Horizontal	Pass
66.92	20.91	120.000	100.0	40.0	19.09	Horizontal	Pass
92.20	29.32	120.000	100.0	43.5	14.18	Horizontal	Pass
169.96	27.21	120.000	100.0	43.5	16.29	Horizontal	Pass
193.28	30.16	120.000	100.0	43.5	13.34	Horizontal	Pass
418.76	31.73	120.000	100.0	46.0	14.27	Horizontal	Pass

Radiation disturbances, antenna polarization: Setup 2, Vertical, 208V

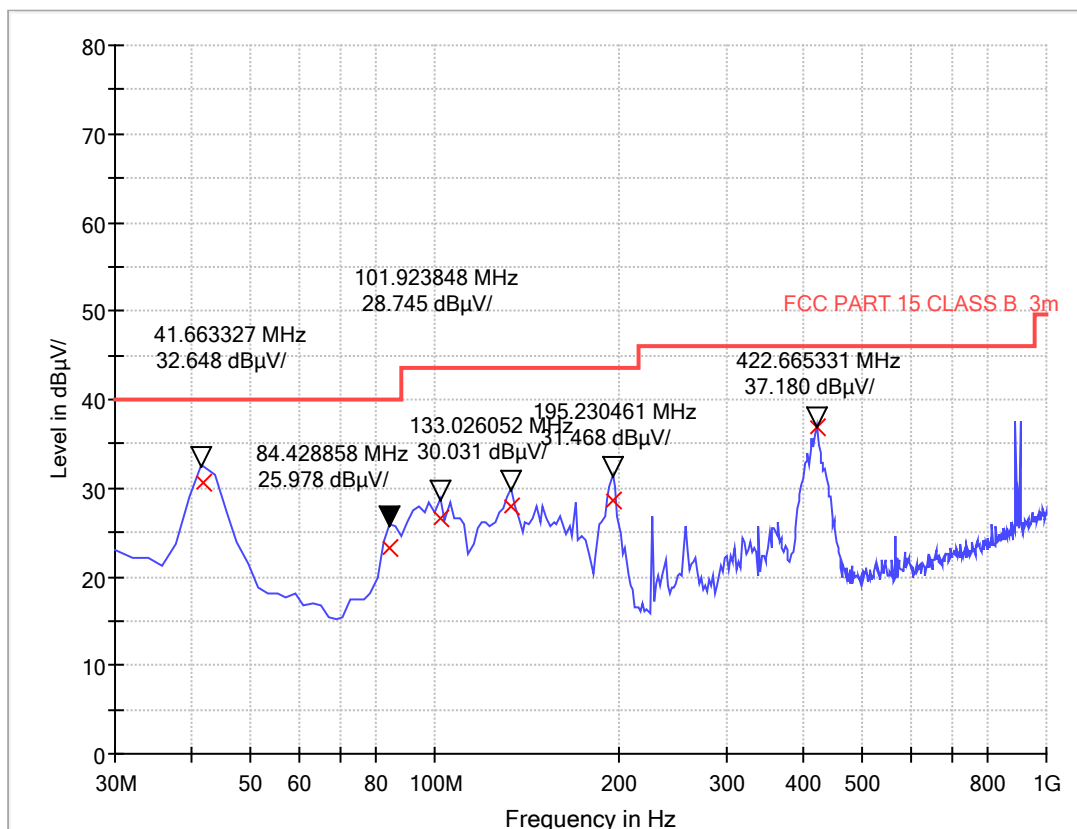

(Plot F: Test Antenna Vertical30M - 1G)

Frequency (MHz)	Quasi Peak (dB μ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Antenna	Horizontal
41.68	30.59	120.000	100.0	40.0	9.41	Vertical	Pass
84.44	23.25	120.000	100.0	40.0	16.75	Vertical	Pass
101.92	26.68	120.000	100.0	43.5	16.82	Vertical	Pass
133.04	27.97	120.000	100.0	43.5	15.53	Vertical	Pass
195.24	28.70	120.000	100.0	43.5	14.80	Vertical	Pass
422.68	36.85	120.000	100.0	46.0	9.15	Vertical	Pass

Above 1GHz, Setup 1

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2432.61	58.21	-13.67	73.35	15.14	100	73	Horizontal
2	4855.71	50.33	-7.51	73.35	23.02	100	328	Horizontal
3	7508.38	54.85	-1.17	73.35	18.50	100	301	Horizontal
4	10951.74	52.91	2.79	73.35	20.44	100	204	Horizontal
5	12979.49	48.68	4.81	73.35	24.67	100	273	Horizontal
6	17358.09	51.47	11.72	73.35	21.88	100	296	Horizontal

NO.	Freq. [MHz]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	2402.85	55.59	-13.03	73.35	17.76	100	308	Vertical
2	4953.49	48.48	-5.62	73.35	24.87	100	33	Vertical
3	7346.84	52.59	0.08	73.35	20.76	100	324	Vertical
4	9782.70	50.31	2.57	73.35	23.04	100	151	Vertical
5	11980.50	52.14	3.41	73.35	21.21	100	159	Vertical
6	17468.62	52.50	12.01	73.35	20.85	100	315	Vertical

Above 1GHz, Setup2, 3 (See Remark 3)

NO.	Freq. [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	--	--	--	--	--	--	Vertical
2	--	--	--	--	--	--	Vertical
3	--	--	--	--	--	--	Vertical
4	--	--	--	--	--	--	Vertical
5	--	--	--	--	--	--	Vertical
6	--	--	--	--	--	--	Vertical

NO.	Freq. [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	--	--	--	--	--	--	Horizontal
2	--	--	--	--	--	--	Horizontal
3	--	--	--	--	--	--	Horizontal
4	--	--	--	--	--	--	Horizontal
5	--	--	--	--	--	--	Horizontal
6	--	--	--	--	--	--	Horizontal



REMARKS:

1. $\text{Emission Level(dBuV/m)} = \text{Raw Value(dBuV)} + \text{Correction Factor(dB/m)}$
2. $\text{Correction Factor(dB/m)} = \text{Antenna Factor(dB/m)} + \text{Cable Factor(dB)}$
- Pre-Amplifier Factor(dB)
3. For Set up 2, 3 mode, The EUT's internal highest frequency is less than 108MHz, so test frequency range is up to 1000MHz. Other frequency reading was too low against the official limit that not recorded.

APPENDIX I: PHOTOGRAPHS OF EMC TEST CONFIGURATION


1. Radiated Emission Measurement below 1GHz



2. Conducted emission at AC mains input/output port Measurement



3. Radiated Emission Measurement above 1GHz

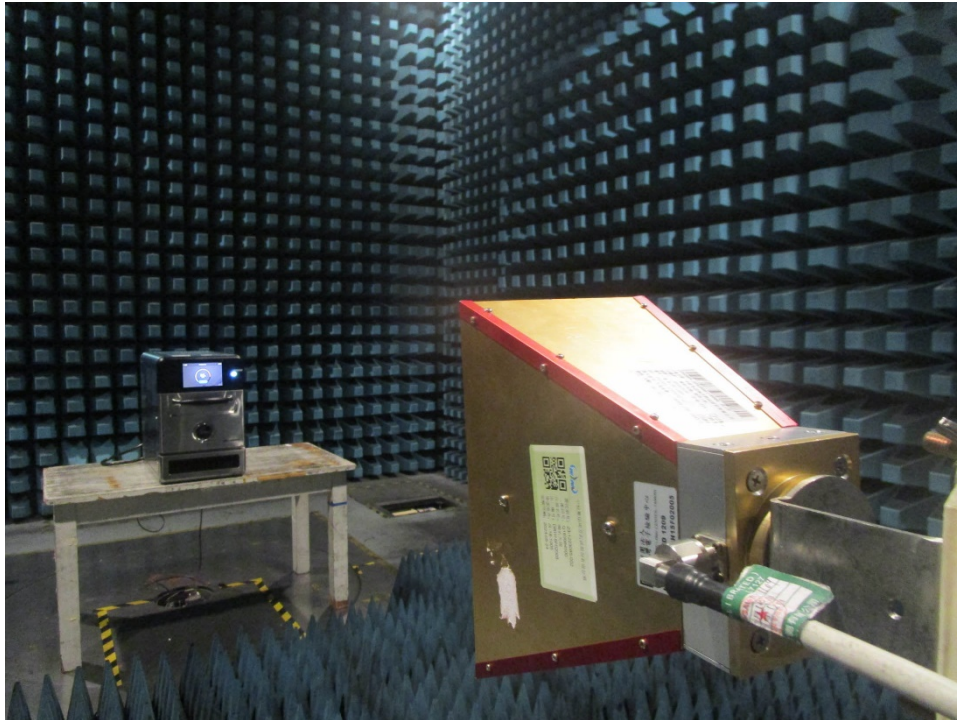

4. Radiation Hazard Test



*** End of Report ***