



www.ecmg-global.net

## FCC CLASS II PERMISSION CHANGE TEST REPORT

On Model Name: Microwave Oven

Model Numbers: XM031MYY

Brand Name:

FCC ID Number: VG8XM031MYY

Prepared for Guangdong Midea Microwave and Electrical  
Appliances Manufacturing Co.,Ltd

According to

FCC Part 18(2010)

Industrial, Scientific and Medical Equipment

FCC/OST MP-5(1986)

FCC methods of measurements of radio noise emission from  
industrial, scientific and medical equipment

Test Report#: GUA-1111-10738-FCC

Prepared by: Sewen Guo

Reviewed by: Jawen Yin

QC Manager: Swall Zhang

Test Report Released by:

Swall Zhang

December 8, 2011

Date

## List Attached Files

<b>Exhibit Type</b>	<b>File Description</b>	<b>File Name</b>
<i>Test Report</i>	<i>Test Report</i>	<i>VG8XM031MYY_Test report.PDF</i>
<i>Operation Description</i>	<i>Technical Description</i>	<i>VG8XM031MYY_operation description. PDF</i>
<i>External Photos</i>	<i>External Photos</i>	<i>VG8XM031MYY_External Photos.PDF</i>
<i>Internal Photos</i>	<i>Internal Photos</i>	<i>VG8XM031MYY_Internal Photos.PDF</i>
<i>Block Diagram</i>	<i>Block Diagram</i>	<i>VG8XM031MYY_Block diagram. PDF</i>
<i>Schematics</i>	<i>Circuit Diagram</i>	<i>VG8XM031MYY_Schematics. PDF</i>
<i>ID Label/Location</i>	<i>Label and Location</i>	<i>VG8XM031MYY_Label &amp; Location. PDF</i>
<i>User Manual</i>	<i>User Manual</i>	<i>VG8XM031MYY_User Manual. PDF</i>
<i>Test setup photos</i>	<i>Test setup photos</i>	<i>VG8XM031MYY_Test Setup.PDF</i>

### ***Test Location***

*Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.*

*Test Site Location:*

***GD WITOL VACUUM ELECTRONIC  
EMC TEST LABORATORY***

*BeiJiao, ShunDe, Foshan, Guang  
Dong, 528311, China*

*Tel:*

*(86)- 757-26326917*

*Fax:*

*(86)-757-26656995*

### ***Test Facility***

- FCC - Registration No.: 910385*

*GD WITOL VACUUM ELECTRONIC EMC TEST LABORATORY has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.*

# *Table of Contents*

---

<b>GOVERNMENT DISCLAIMER NOTICE</b>	1
<b>REPRODUCTION CLAUSE</b>	1
<b>OPINIONS AND INTERPRETATIONS</b>	1
<b>STATEMENT OF MEASUREMENT UNCERTAINTY</b>	1
<b>ADMINISTRATIVE DATA</b>	2
<b>EUT DESCRIPTION</b>	3
<b>EUT MODEL DERIVED</b>	4
<b>TEST SUMMARY</b>	5
<b>LOAD FOR MICROWAVE OVEN</b>	6
<b>EQUIPMENT MODIFICATION</b>	7
<b>EUT SAMPLE PHOTOS FOR MODEL EM031MHU</b>	8
<b>TEST SYSTEM DETAILS</b>	13
<b>CONFIGURATION OF TESTED SYSTEM</b>	14
<b>ATTACHMENT 1 - RADIATION HAZARD TEST</b>	15
<b>ATTACHMENT 2 - INPUT POWER MEASUREMENT</b>	17
<b>ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT</b>	20
<b>ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT</b>	23
<b>ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS</b>	26
<b>ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS</b>	30

### **Government Disclaimer Notice**

*When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.*

### **Reproduction Clause**

*Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).*

### **Opinions and Interpretations**

*This test report relates to the above mentioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.*

### **Statement of Measurement Uncertainty**

*The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.*

## **Administrative Data**

*Test Sample* : Microwave Oven

*Model Numbers* : XM031MYY

*Model Tested* : EM031MHU

*Brand Name* :  Midea

*Date of Receipt* : November 20, 2011

*Date Tested* : November 23, 2011

*Applicant* : Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.

*Address* : No.6, Yong An Road, Beijiao, Shunde, Foshan. Guangdong, 528311, China.

*Manufacturer* : Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.

*Address* : No.6, Yong An Road, Beijiao, Shunde, Foshan. Guangdong, 528311, China.

*Factory* : Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.

*Address* : No.6, Yong An Road, Beijiao, Shunde, Foshan. Guangdong, 528311, China.

### **EUT Description**

*Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd., model tested EM031MHU (referred to the EUT in this report) is a Microwave Oven.*

<b>Power Supply</b>	120V~ 60Hz
<b>Rated Input Power (Microwave)</b>	1500W
<b>Rated Output Power (Microwave)</b>	1000 W
<b>Frequency</b>	2450 MHz (Class B/Group 2)
<b>Magnetron Model</b>	2M319J
<b>Magnetron Manufacturer</b>	WITOL

*For more informations please refer to user's manual of EUT.*

## **EUT Model Derived**

*XM031MYY model designations as follow:*

*X= E or A;*

*M: indicate microwave function;*

*031: "0" indicates the microwave output power is 1000W, "31" indicate cavity capacity is 31 liters;*

*M: indicate the design No.;*

*YY= 0-9 or A-Z, indicate different appearance;*

## Test Summary

The electromagnetic compatibility requirements on model EM031MHU for this test is stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

<b>Emission Tests</b>				
<b>Specifications</b>	<b>Description</b>	<b>Test Results</b>	<b>Test Point</b>	<b>Remark</b>
<i>FCC Part 18:2010 FCC/OST MP-5:1986 ANSI C63.4-2009</i>	<i>Radiation Hazard Measurement</i>	<i>Passed</i>	<i>Enclosure</i>	<i>Attachment 1</i>
<i>FCC Part 18:2010 FCC/OST MP-5:1986 ANSI C63.4-2009</i>	<i>Input Power Measurement</i>	<i>Passed</i>	<i>AC Input Port</i>	<i>Attachment 2</i>
<i>FCC Part 18:2010 FCC/OST MP-5:1986 ANSI C63.4-2009</i>	<i>RF Output power Measurement</i>	<i>Passed</i>	<i>EUT</i>	<i>Attachment 3</i>
<i>FCC Part 18:2010 FCC/OST MP-5:1986 ANSI C63.4-2009</i>	<i>Operating Frequency Measurement</i>	<i>Passed</i>	<i>EUT</i>	<i>Attachment 4</i>
<i>FCC Part 18:2010 FCC/OST MP-5:1986 ANSI C63.4-2009</i>	<i>Conducted Emission</i>	<i>Passed</i>	<i>AC Input Port</i>	<i>Attachment 5</i>
<i>FCC Part 18:2010 FCC/OST MP-5:1986 ANSI C63.4-2009</i>	<i>Radiated Emission</i>	<i>Passed</i>	<i>Enclosure</i>	<i>Attachment 6</i>

## **Load for Microwave Oven**

*For all measurements the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tag water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.*

- Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven.*
- Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.*
- Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.*
- Load for all other measurements: 700 milliliters of water, with the beaker located in the center of the oven.*

### ***Equipment Modification***

*Any modification installed previous to testing by Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd. will be incorporated in each production model sold or leased in United States.*

*There were no modifications installed by ECMG Electronic Technical Testing Corp(Shenzhen) test personnel.*

**EUT Sample Photos for Model EM031MHU**



**EUT Front View**



**EUT Rear View**

Report #: GUA-1111-10738-FCC

Prepared for Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen).

Page 8 of 33



***Door Opened View***



***EUT Uncovered View***

Report #: GUA-1111-10738-FCC


Prepared for Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen).


Page 9 of 33




**Magnetron View**

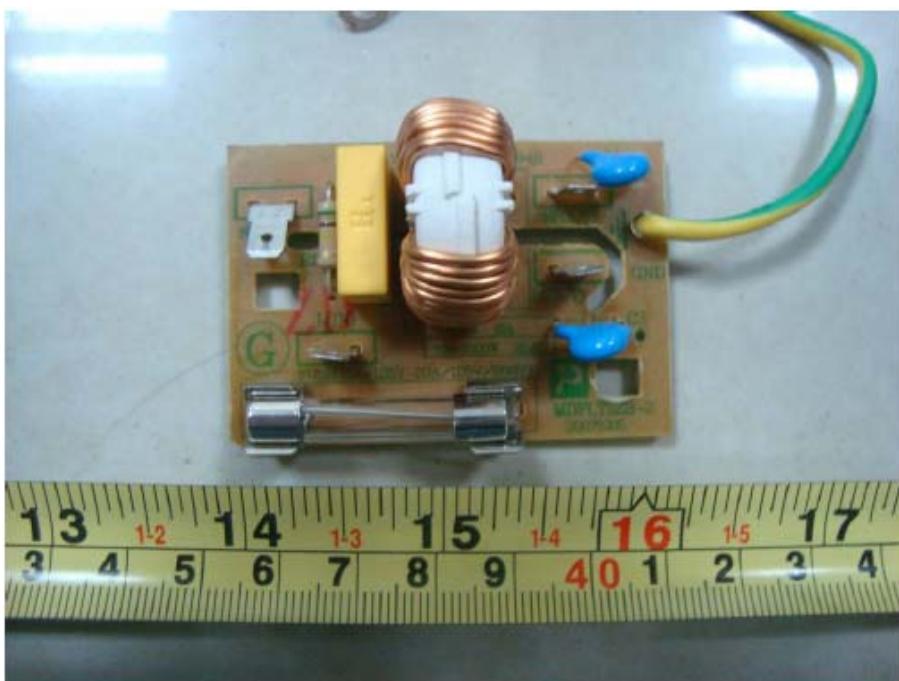


**Power Filter Board Front View**

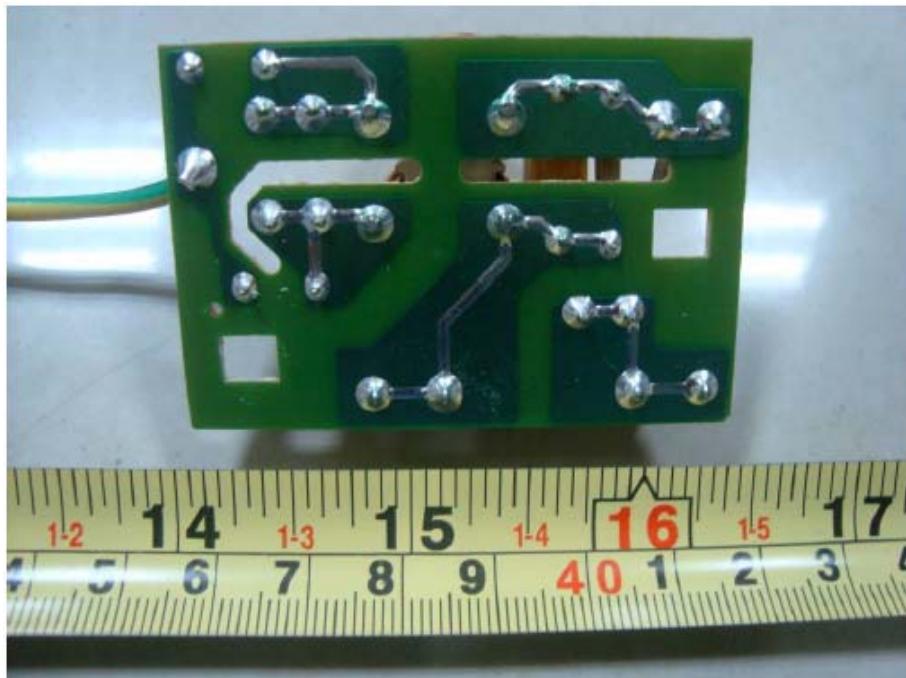

**Power Filter Board Rear View**

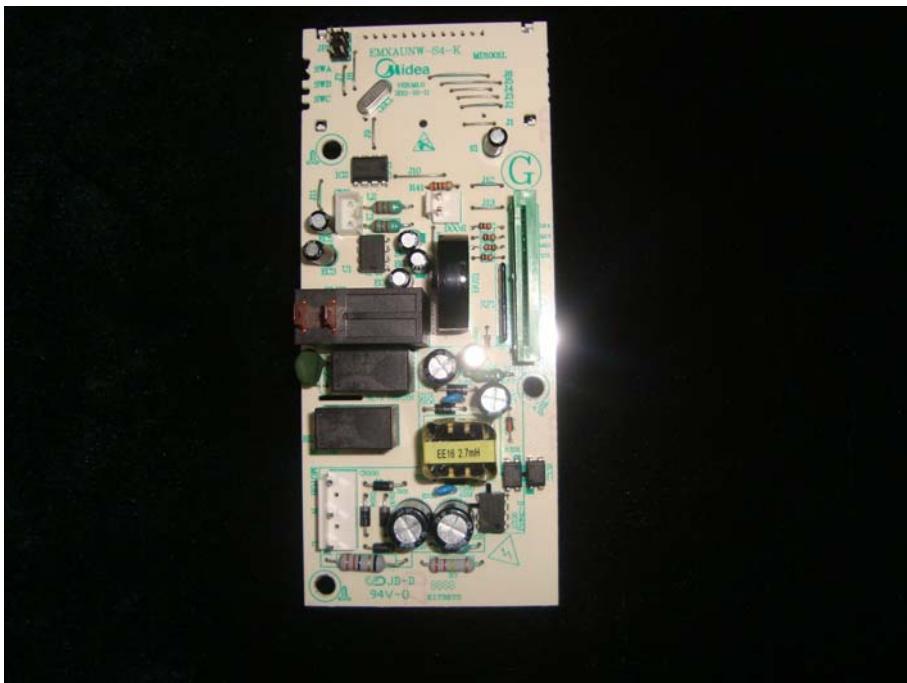

**Control Board Front View**

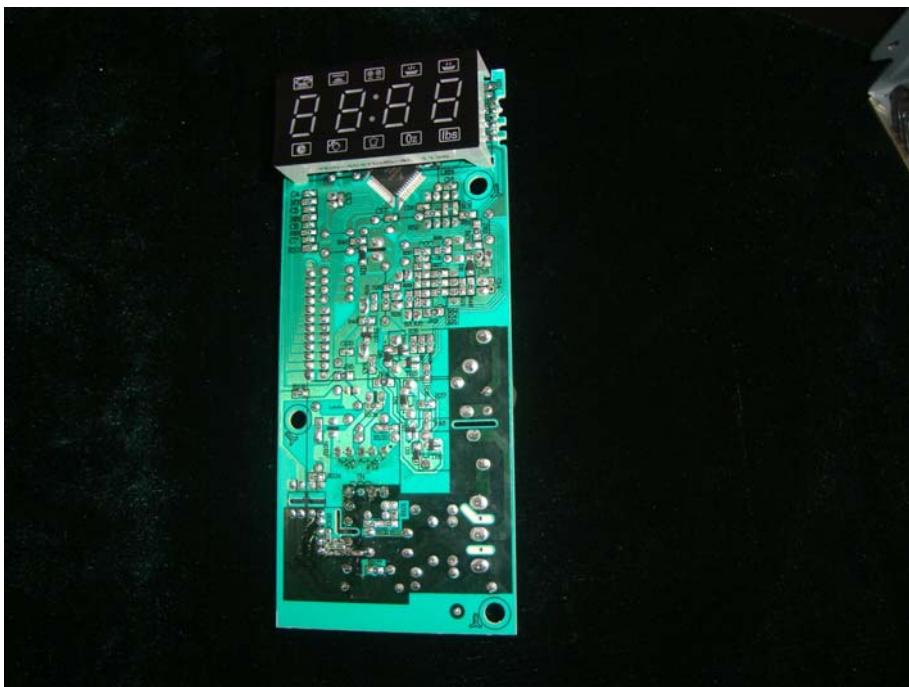

**Control Board Rear View**




**High-voltage Transformer View**

## Test System Details

<b>EUT</b>										
<b>Model Numbers:</b>	XM031MYY									
<b>Model Tested:</b>	EM031MHU									
<b>Description:</b>	Microwave Oven									
<b>Manufacturer:</b>	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.									
<b>Support Equipment</b>										
N/A										
<b>Cable Description</b>										
<b>Description</b>	<b>From</b>	<b>To</b>	<b>Length (Meters)</b>	<b>Shielded (Y/N)</b>	<b>Ferrite (Y/N)</b>					
Power Cable	EUT	Plug	1.20	N	N					

## ***Configuration of Tested System***

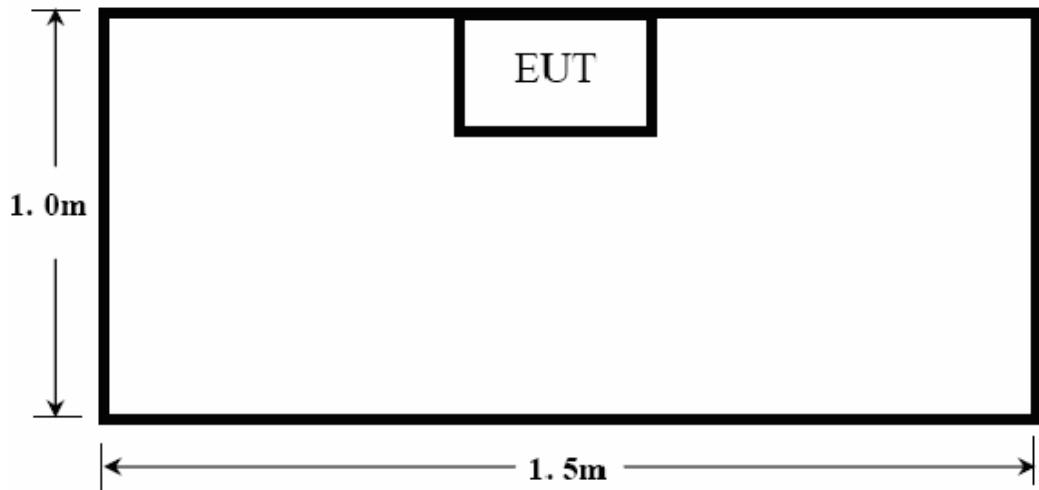

**ATTACHMENT 1 - RADIATION HAZARD TEST**

<b>CLIENT:</b>	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.	<b>TEST STANDERD:</b>	FCC Part 18
<b>MODEL NUMBERS:</b>	XM031MYY	<b>PRODUCT:</b>	Microwave Oven
<b>MODEL TESTED:</b>	EM031MHU	<b>EUT DESIGNATION:</b>	Home or Office
<b>TEMPERATURE:</b>	22°C	<b>HUMIDITY:</b>	60%RH
<b>ATM PRESSURE:</b>	101.1kPa	<b>GROUNDING:</b>	Through AC Power Cord
<b>TESTED BY:</b>	Sewen Guo	<b>DATE OF TEST:</b>	November 23, 2011
<b>TEST REFERENCE:</b>	ANSI C63.4-2009, FCC/OST MP-5:1986		
<b>TEST PROCEDURE:</b>	The EUT was set up according to the FCC MP-5 and FCC Part 18 for Radiation Hazard Measurement. The measurement was using a microwave leakage meter to measure the Radiation leakage in the as-received condition with the oven door closed. A 700ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven operating, the microwave meter will check the leakage and then record the maximum leakage.		
<b>TESTED RANGE:</b>	N/A		
<b>TEST VOLTAGE:</b>	120VAC / 60Hz		
<b>RESULTS:</b>	There was no microwave leakage exceeding a power level of 0.079 mW/cm <sup>2</sup> observed at any point 5cm or more from the external surface of the oven.  A maximum of 1.0 mW/cm <sup>2</sup> is allowed in accordance with the applicable FCC standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen)(China) test personnel.		
<b>M. UNCERTAINTY:</b>	0.0001 mW/cm <sup>2</sup>		

### **Test Equipments List:**


<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Serial No.</b>	<b>Last Cal.</b>	<b>Cal. Due</b>
<i>Microwave Measurement</i>	HOLADAY	HI-1710A	00052558	11/10/2011	11/09/2012

*Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).*

**SIGNED BY:** *Senver Guo*  
\_\_\_\_\_  
**ENGINEER**

**REVIEWED BY:** *Jamery Yau*  
\_\_\_\_\_  
**SENIOR ENGINEER**

### **Radiation Hazard Test Set-up:**

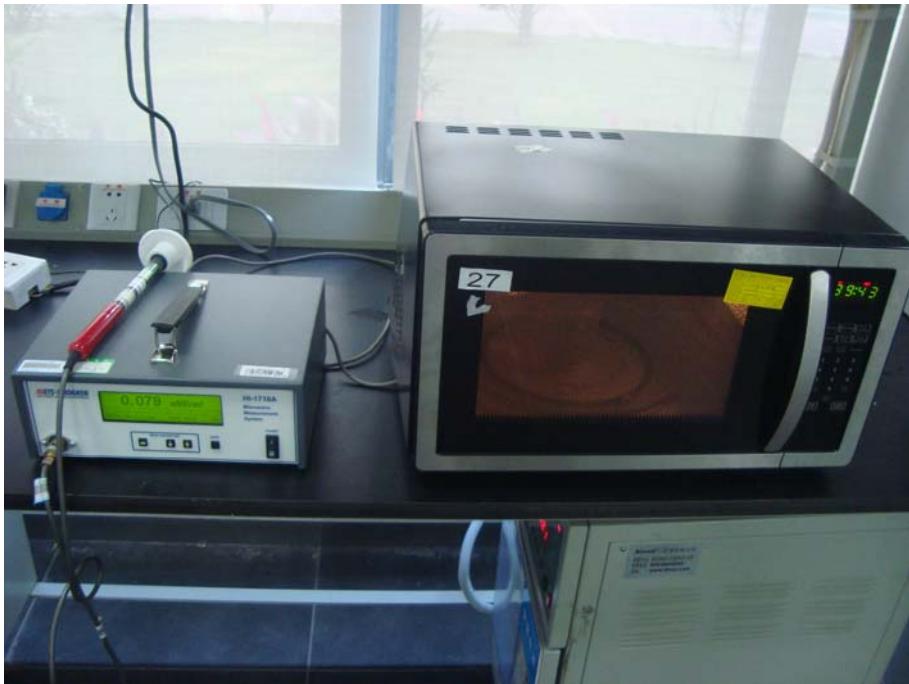

## **ATTACHMENT 2 - INPUT POWER MEASUREMENT**

<b>CLIENT:</b>	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.	<b>TEST STANDERD:</b>	FCC Part 18
<b>MODEL NUMBERS:</b>	XM031MYY	<b>PRODUCT:</b>	Microwave Oven
<b>MODEL TESTED:</b>	EM031MHU	<b>EUT DESIGNATION:</b>	Home or Office
<b>TEMPERATURE:</b>	22°C	<b>HUMIDITY:</b>	60%RH
<b>ATM PRESSURE:</b>	101.1kPa	<b>GROUNDING:</b>	Through AC Power Cord
<b>TESTED BY:</b>	Sewen Guo	<b>DATE OF TEST:</b>	November 23, 2011
<b>TEST REFERENCE:</b>	ANSI C63.4-2009, FCC/OST MP-5:1986		
<b>TEST PROCEDURE:</b>	The EUT was set up according to the FCC MP-5 and FCC Part 18 for Input power Measurement. The input power and current was measured using a power analyzer. A 700ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven is operating, use a voltmeter and an ampmeter to test the AC input voltage and current.		
<b>TESTED RANGE:</b>	N/A		
<b>TEST VOLTAGE:</b>	120VAC / 60Hz		
<b>RESULTS :</b>	Based on the measured input power, the EUT was found to be operating within the intended specifications. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp(Shenzhen) (China) test personnel.		
<b>M. UNCERTAINTY :</b>	± 5W		

**Test Data:**


<i>Input Voltage (Vac/Hz)</i>	<i>Input Current (amps)</i>	<i>Measured Input Power (watts)</i>	<i>Rated Input Power (watts)</i>
119.9	13.14	1483	1500

**Test Equipments list :**

<i>Test Equipment</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Serial No.</i>	<i>Last Cal.</i>	<i>Cal. Due</i>
Power Meter	Ainuo	AN8726C	058704200	08/13/2011	08/12/2012
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).</i>					

**SIGNED BY:**  
\_\_\_\_\_  
**ENGINEER****REVIEWED BY:**  
\_\_\_\_\_  
**SENIOR ENGINEER**

***Input Power Test Set-Up :***

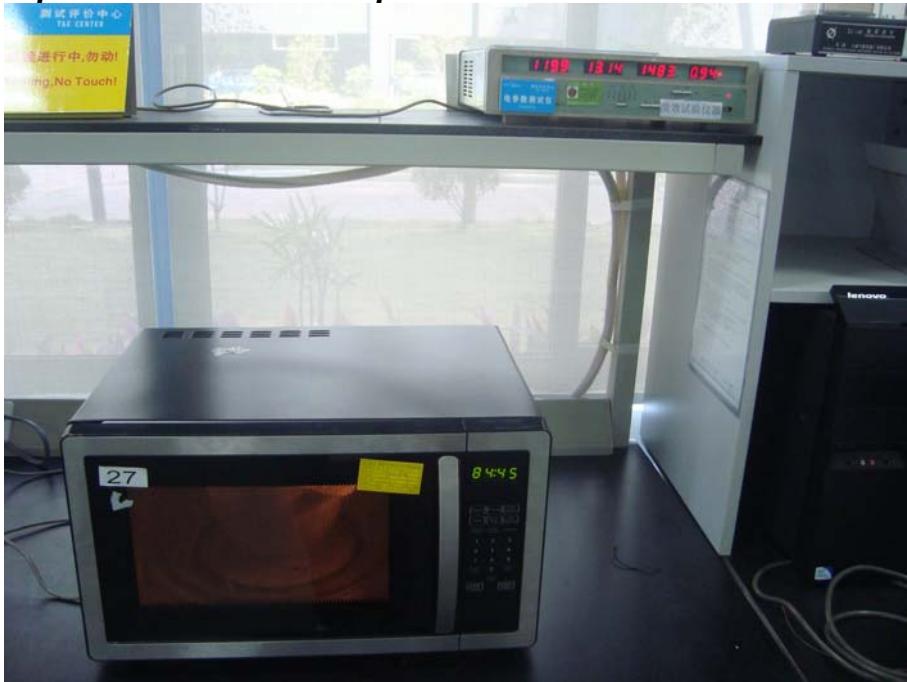

Report #: GUA-1111-10738-FCC

Prepared for Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen).

Page 19 of 33

### ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT

<b>CLIENT:</b>	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.	<b>TEST STANDERD:</b>	FCC Part 18
<b>MODEL NUMBERS:</b>	XM031MYY	<b>PRODUCT:</b>	Microwave Oven
<b>MODEL TESTED:</b>	EM031MHU	<b>EUT DESIGNATION:</b>	Home or Office
<b>TEMPERATURE:</b>	22°C	<b>HUMIDITY:</b>	60%RH
<b>ATM PRESSURE:</b>	101.1kPa	<b>GROUNDING:</b>	Through AC Power Cord
<b>TESTED BY:</b>	Sewen Guo	<b>DATE OF TEST:</b>	November 23, 2011
<b>TEST REFERENCE:</b>	ANSI C63.4-2009, FCC/OST MP-5:1986		
<b>TEST PROCEDURE:</b>	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for RF output power Measurement. The Caloric Method was used to determine maximum RF output power. The initial temperature of the water load was measured. A 1000ml water load in a beaker was located in the center of the oven. The oven was operated at maximum output power for 120 seconds, the temperature of the water was re-measured.</p> <p>RF Output Power</p> $= (4.2\text{ joules/calorie})(\text{volume in milliliters})(\text{temperature rise}) / (\text{time in seconds})$ $= 4.2 \text{ joules/calorie} \times 1000 \times (\text{Final Temp} - \text{Initial Temp}) / 120$		
<b>TESTED RANGE:</b>	N/A		
<b>TEST VOLTAGE:</b>	120VAC / 60Hz		
<b>RESULTS:</b>	RF Output Power =889.0 watts. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen)(China) test personnel.		
<b>M. UNCERTAINTY:</b>	$\pm 0.3^\circ\text{C}$		

**Test Data:**


Quality of Water (ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time (Seconds)	RF Output Power (watts)
1000	23.3	48.7	120S	889.0

**Test Equipments List :**

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Digit Thermometer	Fluke Corporation	Fluke 51 II	87500204	10/26/2011	10/25/2012
Stopwatch	CASIO	HS-3	511Q038	10/22/2011	10/21/2012
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).</i>					

**SIGNED BY:**  
\_\_\_\_\_  
ENGINEER**REVIEWED BY:**  
\_\_\_\_\_  
SENIOR ENGINEER

**RF Output Power Test Set-Up :**

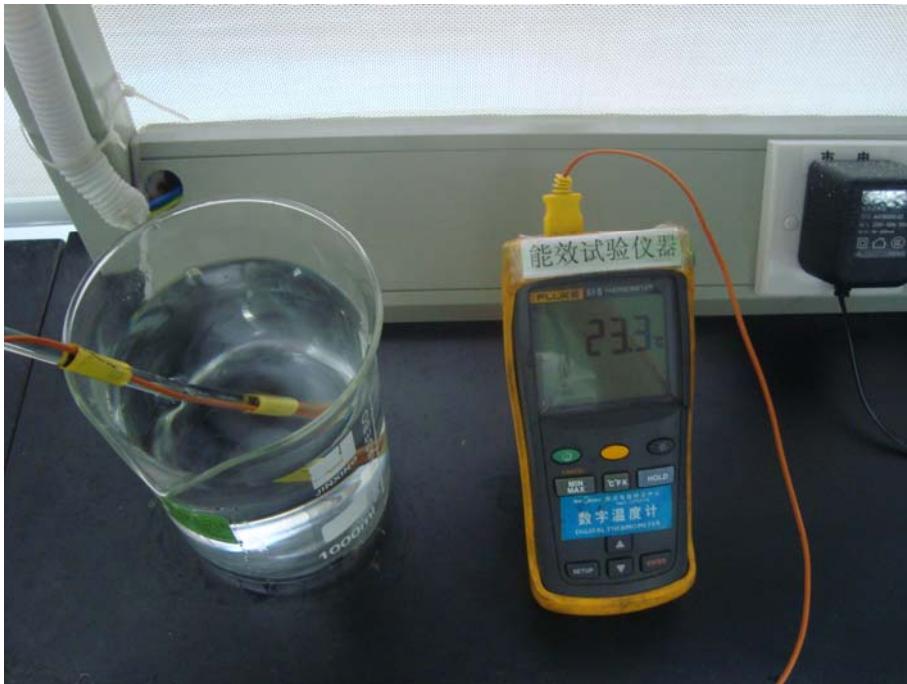

Report #: GUA-1111-10738-FCC

Prepared for Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen).

Page 22 of 33

#### ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT

<b>CLIENT:</b>	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.	<b>TEST STANDERD:</b>	FCC Part 18
<b>MODEL NUMBERS:</b>	XM031MYY	<b>PRODUCT:</b>	Microwave Oven
<b>MODEL TESTED:</b>	EM031MHU	<b>EUT DESIGNATION:</b>	Home or Office
<b>TEMPERATURE:</b>	22°C	<b>HUMIDITY:</b>	60%RH
<b>ATM PRESSURE:</b>	101.1kPa	<b>GROUNDING:</b>	Through AC Power Cord
<b>TESTED BY:</b>	Sewen Guo	<b>DATE OF TEST:</b>	November 23, 2011
<b>TEST REFERENCE:</b>	ANSI C63.4-2009, FCC/OST MP-5:1986		
<b>TEST PROCEDURE:</b>	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for Operating Frequency Measurement.</p> <ol style="list-style-type: none"> <li>1) The variation of frequency with time. The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000ml water load in a beaker was located in the center of the oven. Set a spectrum analyzer with antenna at 3 meters distance form the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.</li> <li>2) The variation of frequency with Line Voltage. The operating frequency was measured using a spectrum analyzer. The EUT was operated/warmed by at least 10 minutes of use with a 1000ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.</li> </ol>		
<b>TESTED RANGE:</b>	2450 ± 50MHz		
<b>TEST VOLTAGE:</b>	120VAC / 60Hz		
<b>RESULTS:</b>	Please refer to following pages for details of the variation in operating frequency with time & line voltage measurement. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) (China) test personnel.		
<b>M. UNCERTAINTY:</b>	Freq. ±10kHz		

***Variation in Operating Frequency with Time:***

<b><i>Minimum Frequency (MHz)</i></b>	<b><i>Maximum Frequency (MHz)</i></b>
2448.2	2481.46

***Variation in Operating Frequency with Line Voltage:***

<b><i>Minimum Frequency (MHz)</i></b>	<b><i>Maximum Frequency (MHz)</i></b>
2451.4	2470.24
<i>Note: Line voltage varied from 96Vac to 150Vac.</i>	

***Test Equipments List :***

<b><i>Test Equipment</i></b>	<b><i>Manufacturer</i></b>	<b><i>Model</i></b>	<b><i>Serial No.</i></b>	<b><i>Last Cal.</i></b>	<b><i>Cal. Due</i></b>
<i>EMI test receiver</i>	R&S	ESIB-26	100174	11/18/2011	11/17/2012
<i>Horn Antenna</i>	R&S	HF906	100311	11/20/2011	11/17/2012

*Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).*

**SIGNED BY:**

  
\_\_\_\_\_  
SENIOR ENGINEER

**REVIEWED BY:**

  
\_\_\_\_\_  
SENIOR ENGINEER

***Operating Frequency Test Set-up:***



Report #: GUA-1111-10738-FCC


Prepared for Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen).


Page 25 of 33

## ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS

<b>CLIENT:</b>	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.	<b>TEST STANDERD:</b>	FCC Part 18
<b>MODEL NUMBERS:</b>	XM031MYY	<b>PRODUCT:</b>	Microwave Oven
<b>MODEL TESTED:</b>	EM031MHU	<b>EUT DESIGNATION:</b>	Home or Office
<b>TEMPERATURE:</b>	22°C	<b>HUMIDITY:</b>	60%RH
<b>ATM PRESSURE:</b>	101.1kPa	<b>GROUNDING:</b>	Through AC Power Cord
<b>TESTED BY:</b>	Sewen Guo	<b>DATE OF TEST:</b>	November 23, 2011
<b>TEST REFERENCE:</b>	ANSI C63.4-2009, FCC/OST MP-5:1986		
<b>TEST PROCEDURE:</b>	The EUT was set up according to the guideline of ANSI C63.4-2009 & FCC MP-5 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged. The frequency range investigated was from 150kHz to 30MHz.		
<b>TESTED RANGE:</b>	150kHz to 30MHz		
<b>TEST VOLTAGE:</b>	120VAC / 60Hz		
<b>RESULTS:</b>	The EUT meets the requirements of test reference for conducted emissions. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) (China) test personnel.		
<b>M. UNCERTAINTY:</b>	±2.5 dB		

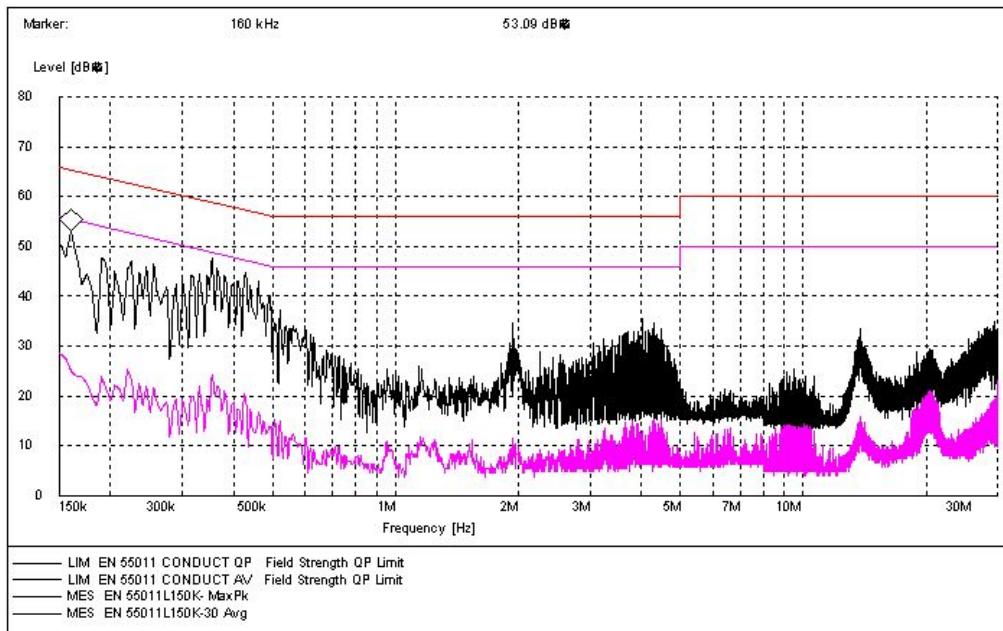

**Line L Conducted Emission Graph**

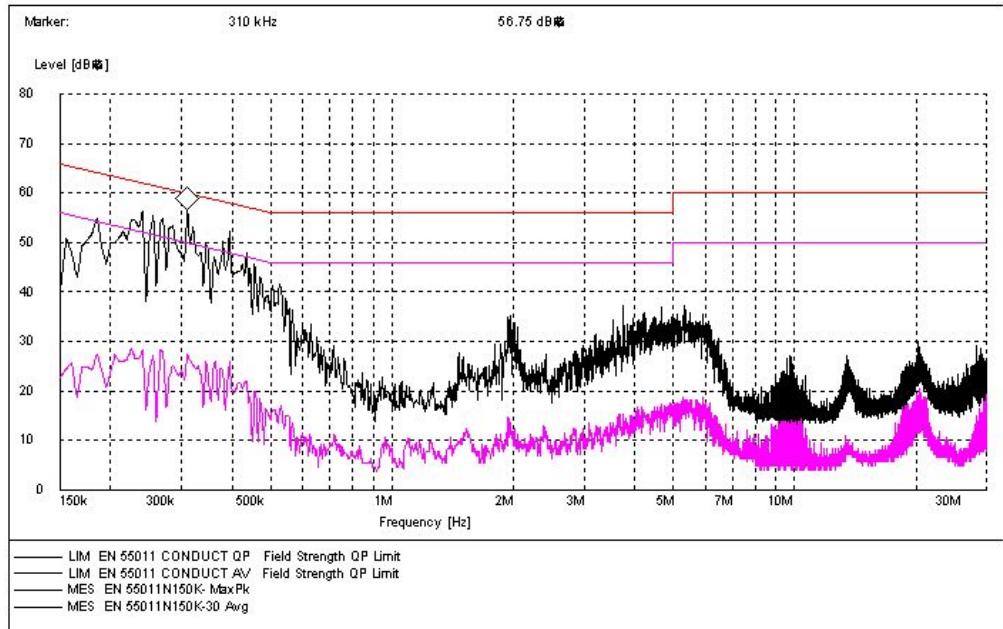

**Line N Conducted Emission Graph**

### ***Test Data:***

Line L/N	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Corrected AVE Level (dBuV)	Limits AVE (dBuV)	Margin AV (dB)
L	0.255	41.9	61.4	-19.5	18.8	51.4	-32.6
L	0.355	41.7	59.2	-17.5	20.3	49.2	-28.9
L	0.430	39.2	57.5	-18.3	13.8	47.5	-33.7
N	0.255	43.1	61.4	-18.3	18.4	51.4	-33.0
N	0.310	43.6	59.6	-16.0	17.0	49.6	-32.6
N	0.435	42.9	57.5	-14.6	16.2	47.5	-31.3

*Note: All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. All other emission levels are too low against the official limits that are not reported.*

## ***Test Equipments List:***

<b>Test Equipment</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Last Cal.</b>	<b>Cal. Due</b>
EMI test receiver	R&S	ESIB-26	100174	11/19/2011	11/18/2012
LISN	R&S	ESH2-Z5	100091	11/19/2011	11/18/2012
Transient Limiter	Agilent	11947A	3107A03648	11/19/2011	11/18/2012
Shielding Room	TDK	8m x 4m x 3m	N/A	04/17/2011	04/16/2012

*Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).*

**SIGNED BY:**

Seneca

---

## ENGINEER

**REVIEWED BY:**

Jameyne

## **SENIOR ENGINEER**

Report #: GUA-1111-10738-FCC

Report No.: GEA 11111110301CE  
Prepared for Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd  
Prepared by ECMG Electronic Technical Testing Corp (Shenzhen). Page 28

Page 28 of 33

***Conducted Emission Test Set-up:***



## **ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS**

<b>CLIENT:</b>	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.	<b>TEST STANDERD:</b>	FCC Part 18
<b>MODEL NUMBERS:</b>	XM031MYY	<b>PRODUCT:</b>	Microwave Oven
<b>MODEL TESTED:</b>	EM031MHU	<b>EUT DESIGNATION:</b>	Home or Office
<b>TEMPERATURE:</b>	22°C	<b>HUMIDITY:</b>	60%RH
<b>ATM PRESSURE:</b>	101.1kPa	<b>GROUNDING:</b>	Through AC Power Cord
<b>TESTED BY:</b>	Sewen Guo	<b>DATE OF TEST:</b>	November 23, 2011
<b>TEST REFERENCE:</b>	ANSI C63.4-2009, FCC/OST MP-5:1986		
<b>TEST PROCEDURE:</b>	<p>The EUT was set up according to the guidelines of ANSI C63.4-2009&amp;FCC MP-5 for radiated emissions. Microwave Oven was placed on a 1m *1.5m nonconductive table. The top of the table is 1.0 m above the ground. The table is placed on a flush mounted metal turntable. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination was then performed and the significant peaks marked. All data was recorded in Quasi-peak detection mode from 30 MHz to 1GHz and average detector mode above 1GHz.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
<b>TESTED RANGE:</b>	30MHz to 24.5GHz		
<b>TEST VOLTAGE:</b>	120VAC / 60Hz		
<b>RESULTS:</b>	The EUT meets the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.		
<b>CHANGES OR MODIFICATIONS:</b>	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) (China) test personnel.		
<b>M. UNCERTAINTY:</b>	± 3.2 dB		

**Field strength limits for out-of-band emissions :**

For RF output power <500W, Limit at 300m = 27.96dB<sub>u</sub>V/m

For RF output power >500W, Limit at 300m = 20log[25\*SQRT(Power/500)]dB<sub>u</sub>V/m

**Test Data :**

<b>30MHz - 1GHz</b>						
Frequency [MHz]	Antenna Polarization [V/H]	Reading Level [dB <sub>u</sub> V/m]	Factor (dB)	Field Strength [dB <sub>u</sub> V/m]	Delta, QP [dB]	3 Meters Limits [dB <sub>u</sub> V/m]
728.800	H	21.5	17.1	38.6	-31.9	70.5
531.523	H	17.2	8.2	25.4	-45.1	70.5
263.267	H	11.5	22.8	34.3	-36.2	70.5
243.928	V	13.4	7.5	20.9	-49.6	70.5
512.140	V	16.3	8.6	24.9	-45.6	70.5
735.631	V	21.6	11.0	32.6	-37.9	70.5

Note: 1) All readings are quasi-peak unless stated otherwise, using a bandwidth of 120kHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Reading Level + Factor, Factor = Antenna Factor + Cable Loss

<b>1GHz - 25GHz</b>						
Frequency [GHz]	Antenna Polarization [V/H]	Reading Level [dB <sub>u</sub> V/m]	Factor (dB)	Field Strength [dB <sub>u</sub> V/m]	Delta, AV [dB]	3 Meters Limits [dB <sub>u</sub> V/m]
4.892	H	34.7	4.1	38.8	-31.7	70.5
8.340	H	35.5	3.6	39.1	-31.4	70.5
11.508	H	41.2	8.6	49.8	-20.7	70.5
17.658	V	47.3	10.3	57.6	-12.9	70.5
10.359	V	38.6	5.6	44.2	-26.3	70.5
8.433	V	35.3	2.5	37.8	-32.7	70.5

Note: 1) All readings are average unless stated otherwise, using a bandwidth of 1MHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Reading Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.

## Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
EMI test receiver	R&S	ESIB-26	100174	11/19/2011	11/18/2012
Horn Antenna	R&S	HF906	100311	11/21/2011	11/20/2012
Amplifiler	Agilent	83017A	N/A	11/21/2011	11/20/2012
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130144	11/21/2011	11/20/2012
Anechoic Chamber	TDK	9m×6 m×5.7m	N/A	04/17/2011	04/16/2012

*Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).*

SIGNED BY:

ENGINEER

REVIEWED BY:

SENIOR ENGINEER



***Radiated Emission Test Set-up (30~1000MHz):***



***Radiated Emission Test Set-up (1~25GHz) :***

Report #: GUA-1111-10738-FCC

Prepared for Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Electronic Technical Testing Corp (Shenzhen).

Page 33 of 33