

## EMI TEST REPORT

On Model Name: Microwave Oven							
Model Number: XM044KYY-GE,XM044KYY							
Brand Name: Midea							
Prepared for Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd							
FCC ID Number: VG8XM044KYY-GE							
According to FCC Part 18(2012) Industrial, Scientific and Medical Equipment FCC/OST MP-5(1986) FCC methods of measurements of radio noise emission from industrial, scientific and medical equipment							
Test Report #: GUA-1302-10946-FCC							
Tested by: <u>Severano</u> <u>ECMG</u>							
Sewen Guo/Engineer Company Name							
Reviewed by: ECMG  Jawen Yin/Senior Engineer Company Name							
QC Manager: ECMG Swall Zhang/QC Manager Company Name							
Test Report Released by:  Swall Zhang  March 05 <sup>th</sup> , 2013  Date							

#### **Test Location**

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

Test Site Location : GD WILOT VACUUM ELECTRONIC EMC

TEST LABORATORY

BeiJiao, ShunDe, FoShan, Guang Dong,

528311, China

Tel : (86)-757-26326917

Fax : (86)-757- 22607341

#### **Test Facility**

The test facility was recognized, certified, or accredited by the following organizations:

FCC - Registration No.: 910385

GD WILOT VACUUM ELECTRONIC EMC TEST LABORATORY has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC was maintained in our files.

# Table of Contents

LIST ATTACHED FILES	1
GOVERNMENT DISCLAIMER NOTICE	2
REPRODUCTION CLAUSE	2
OPINIONS AND INTERPRETATIONS	2
STATEMENT OF MEASUREMENT UNCERTAINTY	2
ADMINISTRATIVE DATA	3
EUT DESCRIPTION	4
EUT MODEL DERIVED	5
TEST SUMMARY	6
LOAD FOR MICROWAVE OVEN	7
EUT EXERCISE SOFTWARE	8
EQUIPMENT MODIFICATION	8
EUT SAMPLE PHOTOS FOR MODEL EM044KXA-GE	9
TEST SYSTEM DETAILS	14
CONFIGURATION OF TESTED SYSTEM	15
ATTACHMENT 1 -RADIATION HAZARD TEST	16
ATTACHMENT 2 - INPUT POWER MEASUREMENT	18
ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT	21
ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT	24
ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS	27
ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS	31

## **List Attached Files**

Exhibit Type	File Description	File Name
Test Report	Test Report	VG8XM044KYY-GE _Test Report.pdf
Operation Description	Technical Description	VG8XM044KYY-GE _Operation Description.pdf
External Photos	External Photos	VG8XM044KYY-GE _External Photos
Internal Photos	Internal Photos	VG8XM044KYY-GE _Internal Photos
Block Diagram	Block Diagram	VG8XM044KYY-GE _Block Diagram.pdf
Schematics	Circuit Diagram	VG8XM044KYY-GE _Schematics.pdf
ID Label/Location	Label and Location	VG8XM044KYY-GE _Label & Location.pdf
User Manual	User Manual	VG8XM044KYY-GE _User's Manual.pdf
Test set-up photos	Test set-up photos	VG8XM044KYY-GE _Test Set-up Photos

#### **Government Disclaimer Notice**

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

#### **Reproduction Clause**

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Electronic Technical Testing Corp (Shenzhen).

#### **Opinions and Interpretations**

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Electronic Technical Testing Corp (Shenzhen) Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

#### Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

#### Administrative Data

Test Sample : Microwave Oven

Model Numbers : XM044KYY-GE,XM044KYY

Model Tested : EM044KXA-GE

Brand Name : Midea

*Receipt Date* : *Feb.* 20<sup>th</sup>, 2013

Date Tested : Feb. 20<sup>th</sup> to March 05<sup>th</sup>, 2013

Applicant : Guangdong Midea Microwave and Electrical

Appliances Manufacturing Co.,Ltd

Address No.6, Yong An Road, Beijiao, Shunde, Foshan.

Telephone : (86)-757-23306480

Fax : (86)-757-22607341

Manufacturer : Guangdong Midea Microwave and Electrical

Appliances Manufacturing Co.,Ltd

Address No.6, Yong An Road, Beijiao, Shunde, Foshan.

Telephone : (86)-757-23306480

Fax : (86)-757-22607341

Factory : Guangdong Midea Microwave and Electrical

Appliances Manufacturing Co.,Ltd

Address No.6, Yong An Road, Beijiao, Shunde, Foshan.

Telephone : (86)-757-23306480

Fax : (86)-757-22607341

## **EUT Description**

Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd., model tested EM044KXA-GE (referred to as the EUT in this report) is a Microwave Oven.

The technical specifications of EUT are as below:

1 1	
Power Supply	120V AC/60Hz
Rated Input Power (Microwave)	1550W
Rated Output Power (Microwave)	1000W
Frequency	2450 MHz(Class B/Group 2)
Magnetron Model	2M319J
Magnetron Manufacturer	WITOL

NOTE: For more detailed information or features please refer to user's manual of EUT.

#### **EUT Model Derived**

XM044KYY-GE/XM044KYY model designations as follow:

X=E or A;

M: indicate microwave function and grill function;

044: "0" indicate the microwave output power is 1000W, "44" indicate cavity capacity is 44 liters;

K: indicate Design No.;

YY= 0-9 or A-Z, indicate different appearance;

GE: Indicate "Client mark".

NOTE: Pre-Scan has been conducted to determine the worst-case from all possible combinations. Model EM044KXA-GE was selected for the final testing.

#### **Test Summary**

The electromagnetic compatibility requirements on model EM044KXA-GE for this test are stated below. All results listed in this report relate exclusively to this above-mentioned model as the equipment under test. this report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests						
Specifications	Description	Test Results	Test Point	Remark		
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Radiation Hazard Measurement	Passed	Enclosure	Attachment 1		
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Input Power Measurement	Passed	AC Input Port	Attachment 2		
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	RF Output power Measurement	Passed	EUT	Attachment 3		
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Operating Frequency Measurement	Passed	EUT	Attachment 4		
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Conducted Emission	Passed	AC Input Port	Attachment 5		
FCC Part 18:2012 FCC/OST MP-5:1986 ANSI C63.4-2009	Radiated Emission	Passed	Enclosure	Attachment 6		

#### Load for Microwave Oven

For all measurements the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tag water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.

- -Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- -Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.
- -Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.
- -Load for all other measurements: 700 milliliters of water, with the beaker located in the center of the oven.

#### **EUT Exercise Software**

No test sofware support this test.

#### **Equipment Modification**

Any modifications installed previous to testing by Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd., will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.

## **EUT Sample Photos for Model EM044KXA-GE**



**EUT Front View** 




**EUT Back View** 




**Door Opend View** 




**Magnetron Front View** 

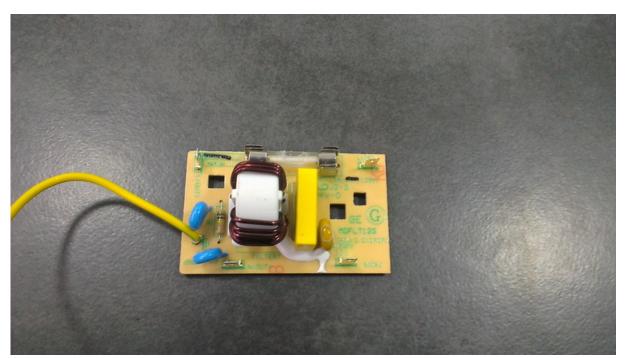


Power Filter Board Top View

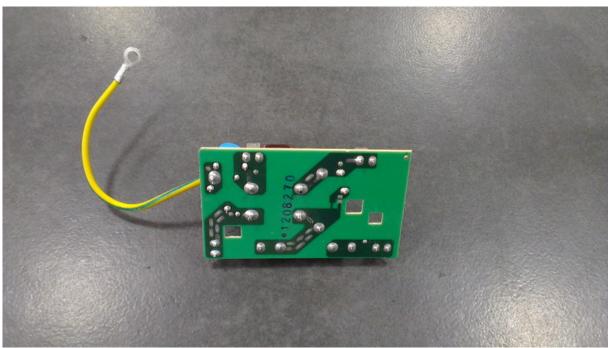


Power Filter Board Bottom View

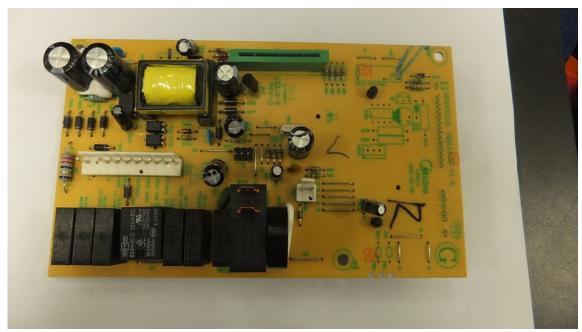


Motherboard - Top View(Use in XM044KYY-GE)

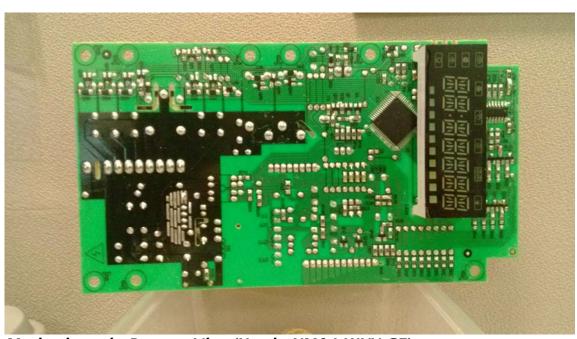

Motherboard -Bottom View(Use in XM044KYY-GE)

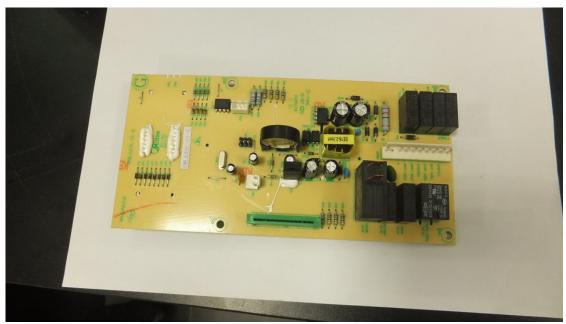

Motherboard - Top View(Use in XM044KYY)

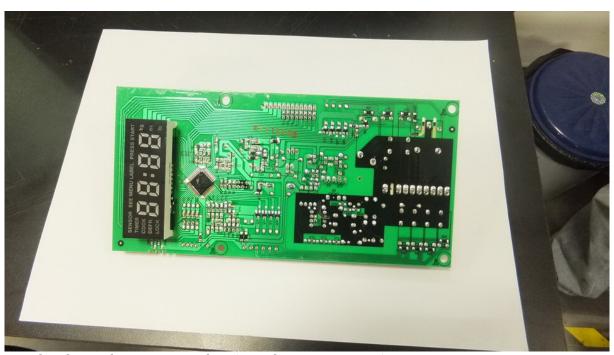

Motherboard - Bottom View(Use in XM044KYY)


## **Test System Details**

			EUT			
Model Number:	XM044	KYY-GE,XM04	14KYY			
Model Tested:	EM044	KXA-GE				
Description:	Microw	ave Oven				
Input:	AC 120	0V/60Hz				
Manufacturer:		dong Midea Nacturing Co.,	licrowave and Ltd	Electrica	l Applia	nces
	<u>'</u>	Suppor	t Equipment			
Description	Моа	lel Number	Serial Num	ber	Ма	nufacturer
			N/A			
		Cable I	Description			
Description	From	То	Length (Meters)	Shie (Y,	lded (N)	Ferrite (Y/N)
Power Cable	EUT	Plug	1.2	ı	V	N

#### Note:

The EUT has been tested as an independent unit together with other necessary accessories or support units. The above support units or accessories were used to form a representative test configuration during the test tests.

## **Configuration of Tested System**

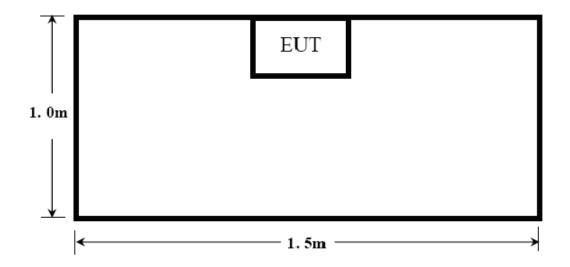

## ATTACHMENT 1 -RADIATION HAZARD TEST

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd	TEST STANDERD:	FCC Part 18		
MODEL NUMBERS:	XM044KYY-GE,XM044KYY	PRODUCT:	Microwave Oven		
MODEL TESTED:	EM044KXA-GE	EUT DESIGNATION:	Home or Office		
TEMPERATURE:	22°C	HUMIDITY:	51%		
ATM PRESSURE:	103kPa	GROUNDING:	Through AC Power Cord		
TESTED BY:	Sewen Guo	DATE OF TEST:	Feb. 25 <sup>th</sup> ,2013		
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-	5:1986			
TEST PROCEDURE:	The EUT was set-up according to the FCC MP-5 and FCC Part 18 for Radiation Hazard Measurement. The measurement was using a microwave leakage meter to measure the Radiation leakage in the as-received condition with the oven door closed. A 700ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven operating, the microwavemeter will check the leakage and then record the maximum leakage.				
TESTED RANGE:	N/A				
TEST VOLTAGE:	AC 120V/60Hz				
RESULTS:	There was no microwave leakage exceeding a power level of 0.04 mW/cm² observed at any point 5cm or more from the external surface of the oven. A maximum of 1.0 mW/cm² is allowed in accordance with the applicable FCC standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed. The test results relate only to the equipment under test provided by client.				
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.				
M. UNCERTAINTY:	0.0001mW/cm <sup>2</sup>				

## Test Equipment List:

Test Equipment	Model No.	Manufacturer	Serial No.	Last Cal.	Cal. Interval
Microwave Measurement	HOLADAY	HI-1710A	00122261	2012.10.24	2013.10.23

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED	BY:	Somerano	ECMG
		ENGINEER	COMPANY NAME

REVIEWED BY: ECMG
SENIOR ENGINEER COMPANY NAME



Radiation Hazard Test Set-up

## ATTACHMENT 2 - INPUT POWER MEASUREMENT

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd.	TEST STANDERD:	FCC Part 18		
MODEL NUMBERS:	XM044KYY-GE,XM044KYY	PRODUCT:	Microwave Oven		
MODEL TESTED:	EM044KXA-GE	EUT DESIGNATION:	Home or Office		
TEMPERATURE:	21℃	HUMIDITY:	69%		
ATM PRESSURE:	103.1kPa	GROUNDING:	Through AC Power Cord		
TESTED BY:	Sewen Guo	DATE OF TEST:	Feb. 24 <sup>th</sup> ,2013		
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986				
TEST PROCEDURE:	The EUT was set up according to the FCC MP-5 and FCC Part 18 for input power measurement. The input power and current was measured using a power analyzer. A 770ml water load in a beaker was located in the center of the oven and the Microwave Oven was set to maximum power. While the oven is operating, use a voltmeter and an ampmeter to test the AC input voltage and current.				
TESTED RANGE:	N/A				
TEST VOLTAGE:	120VAC / 60Hz				
RESULTS:	Based on the measured input power, the EUT was found to be operating within the intended specifications. The test results relate only to the equipment under test provided by client.				
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.				
M. UNCERTAINTY:	± 5W				

#### Test Data:

Input Voltage (Vac/Hz)			Rated Input Power(watts)	
120.7	13.56	1559	1550	

## Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Power Meter	Ainuo	AN8726C	058704200	04/09/2012	04/08/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY	Severano	ЕСМО		
	ENGINEER	COMPANY NAME		
	Y: SENIOD ENGINEED			
REVIEWED B	Y:	<b>ECMG</b>		
	SENIOR ENGINEER	COMPANY NAME		



Input Power Test Set-Up

## ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd.	TEST STANDERD:	FCC Part 18		
MODEL NUMBERS:	XM044KYY-GE,XM044KYY	PRODUCT:	Microwave Oven		
MODEL TESTED:	EM044KXA-GE	EUT DESIGNATION:	Home or Office		
TEMPERATURE:	22℃	HUMIDITY:	60%RH		
ATM PRESSURE:	103kPa	GROUNDING:	Through AC Power Cord		
TESTED BY:	Sewen Guo	DATE OF TEST:	Feb. 24 <sup>th</sup> ,2013		
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986				
TEST PROCEDURE:	The EUT was set up according to the FCC MP-5 and FCC Part 18 for RF output power Measurement. The Caloric Method was used to determine maximum RF output power. The initial temperature of the water load was measured. A 1000ml water load in a beaker was located in the center of the oven. The oven was operated at maximum output power for 120 seconds, the temperature of the water was re-measured.  RF Output Power  = (4.2joules/calorie)(volume in milliliters)(temperature rise) / (time in seconds)  = 4.2 joules/calorie × 1000 × (Final Temp – Initial Temp) / 120				
TESTED RANGE:	N/A				
TEST VOLTAGE:	120VAC / 60Hz				
RESULTS:	RF Output Power =945 watts. The test results relate only to the equipment under test provided by client.				
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.				
M. UNCERTAINTY:	± 0.3℃				

#### Test Result:

Quality of	Starting	Final	Elapsed Time	RF Output	
Water(ml)	Temperature ( ${\mathcal C}$ )	Temperature ( ${\mathcal C}$ )	(Seconds)	Power(watts)	
1000	20.0	47.0	1205	945	

### Test Equipments list:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Digit Thermometer	Fluke Corporation	Fluke 51 II	87500204	5/21/2012	5/22/2013
Stopwatch	CASIO	HS-3	312Q01	5/21/2012	5/22/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:	BY: Severano	ECMG		
	ENGINEER	COMPANY NAME		
	Jamenym			
REVIEWE	DBY:	<b>ECMG</b>		
	SENIOR ENGINEER	COMPANY NAME		



RF Output Power Test Set-Up

## ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT

		I			
CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd.	TEST STANDERD:	FCC Part 18		
MODEL NUMBERS:	XM044KYY-GE,XM044KYY	PRODUCT:	Microwave Oven		
MODEL TESTED:	EM044KXA-GE	EUT DESIGNATION:	Home or Office		
TEMPERATURE:	22℃	HUMIDITY:	60%RH		
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord		
TESTED BY:	Sewen Guo	DATE OF TEST:	Feb. 24 <sup>th</sup> ,2013		
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-	5:1986			
TEST PROCEDURE:	The EUT was set up according to the FCC MP-5 and FCC Part 18 for Operating Frequency Measurement.  1) The variation of frequency with time. The operating frequency was measured us ing a spectrum analyzer. Starting with the EUT at room temperature, a 1000ml wa ter load in a beaker was located in the center of the oven. Set a spectrum analyzer with antenna at 3 meters distance form the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.  2) The variation of frequency with Line Voltage. The operating frequency was measured using a spectrum analyzer. The EUT was operated/warmed by at least 10 minutes of use with a 1000ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.				
TESTED RANGE:	2450 ± 50MHz				
TEST VOLTAGE:	120VAC / 60Hz				
RESULTS:	Please refer to following pages for details of the variation in operating frequency with time & line voltage measurement. The test results relate only to the equipment under test provided by client.				
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.				
M. UNCERTAINTY:	Freq. ±10kHz				

## Variation in Operating Frequency with Time:

Minimum Frequency (MHz)	Maximum Frequency (MHz)	
2448.9	2449.7	

## Variation in Operating Frequency with Line Voltage:

Minimum Frequency (MHz)	Maximum Frequency (MHz)
2447.7	2448.5
Note: Line voltage varied from 96Vac to 150Vac.	

## **Test Equipments List:**

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
EMI test receiver	R&S	ESIB-26	100174	11/18/2012	11/17/2013
Horn Antenna	R&S	HF906	100311	11/20/2012	11/21/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).


TESTED BY:	Soverano	ЕСМО		
	ENGINEER	COMPANY NAME		
	Jamenym			
REVIEWED BY	0	<b>ECMG</b>		
	SENIOR ENGINEER	COMPANY NAME		




**Operating Frequency Test Set-up** 

## ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co., Ltd.	TEST STANDERD:	FCC Part 18			
MODEL NUMBERS:	XM044KYY-GE,XM044KYY	PRODUCT:	Microwave Oven			
MODEL TESTED:	EM044KXA-GE	EUT DESIGNATION:	Home or Office			
TEMPERATURE:	22℃	HUMIDITY:	64%RH			
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord			
TESTED BY:	Sewen Guo	DATE OF TEST:	Feb. 20 <sup>th</sup> ,2013			
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST MP-5:1986					
TEST PROCEDURE:	The EUT was set up according to the guideline of ANSI C63.4-2009 & FCC MP-5 for conducted emissions. The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasipeaked and averaged. The frequency range investigated was from 150kHz to 30MHz.					
TESTED RANGE:	150kHz to 30MHz					
TEST VOLTAGE:	120VAC / 60H					
RESULTS:	The EUT meets the requirements of test reference for Conducted Emissions. The test results relate only to the equipment under test provided by client.					
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.					
M. UNCERTAINTY:	±2.5 dB					

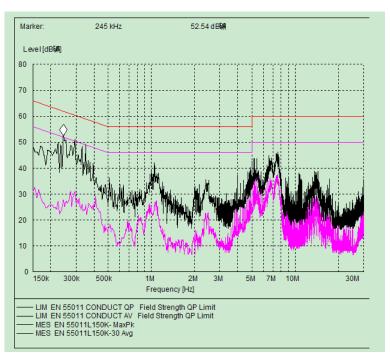

Line L Conducted Emission Graph

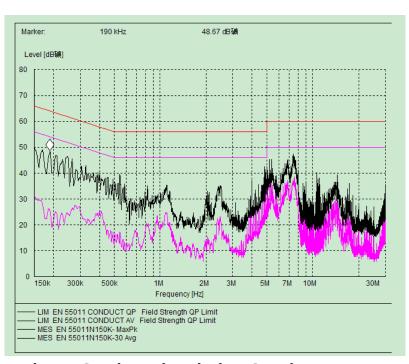

Line N Conducted Emission Graph

#### Test Data:

Lines (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Frequency (MHz)	Corrected AV Level (dBuV)	Limits AV (dBuV)	Margin QP (dB)
L	0.245	43.2	61.4	-18.2	0.245	24.2	51.4	-27.2
L	0.295	41.7	61.1	-19.4	0.295	26.1	51.1	-25.0
L	0.330	39.3	59.6	-20.3	0.330	21.4	49.6	-28.2
N	0.190	39.2	61.6	-22.4	0.190	20.8	51.6	-30.8
N	0.250	37.5	59	-21.5	0.250	26.7	49	-22.3
N	0.325	42.0	57.2	-15.2	0.325	22.3	47.2	-24.9

#### Note:

- All readings are using a bandwidth of 9 kHz, with a 500 ms sweep time. A video filter was not use.
   "QP" means "Quasi-Peak" values, "AV" means "Average" values.
- 3) The other reading are too low against official limits that are not be recorded.

## Test Equipments List:

Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Due
EMI test receiver	R&S	ESIB-26	100174	11/19/2012	11/18/2013
LISN	R&S	ESH2-Z5	100091	11/19/2012	11/18/2013
Transient Limiter	Agilent	11947A	3107A03648	11/19/2012	11/18/2013
Shielding Room	TDK	8m×4m×3m	N/A	04/17/2012	04/16/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:	Jenerano	ECMG		
	ENGINEER	COMPANY NAME		
	BY: Jamenym			
REVIEWED I	3Y:	<b>ECMG</b>		
	SENIOR ENGINEER	COMPANY NAME		



**Conducted Emission Test Set-up** 

## ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS

CLIENT:	Guangdong Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd.	TEST STANDERD:	FCC Part 18	
MODEL NUMBERS:	XM044KYY-GE,XM044KYY <b>PRODUCT</b> :		Microwave Oven	
MODEL TESTED:	EM044KXA-GE EUT DESIGNATION:		Home or Office	
TEMPERATURE:	22°C	HUMIDITY:	63%RH	
ATM PRESSURE:	103.0kPa	GROUNDING:	Through AC Power Cord	
TESTED BY:	Sewen Guo	DATE OF TEST:	Feb. 20 <sup>th</sup> ,2013	
TEST REFERENCE:	ANSI C63.4-2009, FCC/OST N	MP-5:1986		
TEST PROCEDURE:	The EUT was set up according to the guidelines of ANSI C63.4-2009& FCC MP-5 for radiated emissions. Microwave Oven was placed on a 1m *1.5m nonconductive table. The top of the table is 1.0 m above the ground. The table is placed on a flush mounted metal turntable. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination was then performed and the significant peaks marked. All data was recorded in Quasipeak detection mode from 30 MHz to 1GHz and average detector mode above 1GHz.  The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:  FS= RA + AF + CF - AG  Where: FS = Field Strength  RA = Receiver Amplitude  AF = Antenna Factor  CF = Cable Attenuation Factor  AG = Amplifier Gain			
TESTED RANGE:	30MHz to 24.5GHz			
TEST VOLTAGE:	120VAC / 60Hz			
RESULTS:	The EUT meet the requirements of test reference for radiated emissions. The test results relate only to the equipment under test provided by client.			
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Electronic Technical Testing Corp (Shenzhen) test personnel.			
M. UNCERTAINTY:	± 3.2 dB			

#### Field strength limits for out-of-band emissions:

For RF output power <500W, Limit at 300m = 27.96dBuV/mFor RF output power>500W, Limit at 300m=20log [25\*SQRT(Power/500)]dBuV/m

#### Test Data:

30MHz - 1GHz						
Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dBµV/m]	Factor (dB)	Field Strength [dBµV/m]	Delta, QP [dB]	3 Meters Limits [dBµV/m]
278.818	Н	18.8	13.2	32.0	-38.7	70.7
325.471	Н	15.9	13.5	29.4	-41.3	70.7
722.024	Н	8.8	23.0	31.8	-38.9	70.7
405.170	V	14.5	15.9	30.4	-40.3	70.7
531.523	V	10.9	18.8	29.7	-41.0	70.7
449.880	V	14.8	16.2	31.0	-39.7	70.7

Note: 1) All readings are quasi-peak unless stated otherwise, using a bandwidth of 120kHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.

1 <i>GHz</i> - 25 <i>GHz</i>						
Frequency [GHz]	Antenna Polarization [V/H]	Corrected Reading [dBµV/m]	Factor (dB)	Field Strength [dBµV/m]	Delta, AV [dB]	3 Meters Limits [dBµV/m]
14.723	Н	21.34	35.86	57.2	-13.5	70.7
8.321	Н	25.06	22.24	47.3	-23.4	70.7
9.824	Н	22.03	28.07	50.1	-20.6	70.7
14.784	V	16.44	35.86	52.3	-18.4	70.7
8.321	V	32.76	22.24	55.0	-15.7	70.7
8.591	V	30.58	22.42	53.0	-17.7	70.7

Note: 1) All readings are average unless stated otherwise, using a bandwidth of 1MHz, with a 60s sweep time. A video filter was not used. 2) Field Strength = Read Level + Factor, Factor = Antenna Factor + Cable Loss - Preamp Factor.

## Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
EMI test receiver	R&S	ESIB-26	100174	11/19/2012	11/18/2013
Horn Antenna	R&S	HF906	100311	11/19/2012	11/18/2013
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130144	11/19/2012	11/18/2013
Loop Antenna	ETS	ETS-6152	24934	11/19/2012	11/18/2013
Anechoic Chamber	TDK	9m×6 m×5.7m	N/A	04/17/2012	04/16/2013

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

TESTED BY:	Someran	ECMG		
	ENGINEER	COMPANY NAME		
	SENIOR ENGINEER			
REVIEWED BY		<b>ECMG</b>		
	SENIOR ENGINEER	COMPANY NAME		



Radiated Emission Test Set-up (30 -1,000MHz)



Radiated Emission Test Set-up (1-25GHz)