



FCC Test Report

On Model Name: Microwave Oven (Over The Range)

Model Numbers: XM142AYY

Brand Name: Midea

FCC ID: VG8XM142AYY

Prepared for Midea Microwave and Electrical Appliances
Manufacturing Co.,Ltd

According to

FCC Part 18:2007

Industrial, Scientific and Medical Equipment

FCC/OST MP-5(1986)

FCC methods of measurements of radio noise emission from industrial, scientific and medical equipment

Test Report#: FOS-0904-10188-FCCID

Prepared by: May Wang

Reviewed by: Jawen Yin

QC Manager: Paul Chen

Test Report Released by:

A handwritten signature in black ink that appears to read 'Paul J. Chen'.

Paul Chen

May 18, 2009

Date

List Attached Files

Exhibit Type	File Description	File Name
Test Report	Test Report	VG8XM142AYY_Test report.pdf
Operation Description	Technical Description	VG8XM142AYY_operation description.pdf
External Photos	External Photos	VG8XM142AYY_External Photos
Internal Photos	Internal Photos	VG8XM142AYY_Internal Photos
Block Diagram	Block Diagram	VG8XM142AYY_Block Diagram.pdf
Schematics	Circuit Diagram	VG8XM142AYY_Schematics.pdf
ID Label/Location	Label and Location	VG8XM142AYY_Label & Location.pdf
User Manual	User Manual	VG8XM142AYY_User Manual.pdf
Test setup photos	Test setup photos	VG8XM142AYY_Test Setup Photos

Test Location

Tests performed in a Certified ANSI Semi-Anechoic Chamber and Shielded Room.

Test Site Location: Shenzhen Academy of Metrology and Quality inspection

Longzhu Road, Nanshan District, Shenzhen,
Guangdong, China

Tel : 86-755-26941617

Fax : 86-755-26941615

FCC Registration Number: 274801

CNAS Registration Number: L0579

Table of Contents

GOVERNMENT DISCLAIMER NOTICE	1
REPRODUCTION CLAUSE	1
OPINIONS AND INTERPRETATIONS	1
STATEMENT OF MEASUREMENT UNCERTAINTY	1
ADMINISTRATIVE DATA	2
EUT DESCRIPTION	2
TYPE OF DERIVER	3
TEST SUMMARY	4
LOAD FOR MICROWAVE OVENS	5
EQUIPMENT MODIFICATION	5
EUT SAMPLE PHOTOS FOR MODEL	6
TEST SYSTEM DETAILS	11
CONFIGURATION OF TESTED SYSTEM	12
ATTACHMENT 1 - RADIATION HAZARD TEST	13
ATTACHMENT 2 - INPUT POWER MEASUREMENT	15
ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT	18
ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT	21
ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS	24
ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS	28

Government Disclaimer Notice

When government drawing, specification, or other data are used for any purpose other than in connection with a definitely related government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawing, specifications, or other data, is not to be regarded by implication or otherwise in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell patented invention that may in any way be related thereto. This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government. The test results in the report only apply to the tested sample.

Reproduction Clause

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from ECMG Worldwide Certification Solution Inc.,

Opinions and Interpretations

This test report relates to the abovementioned equipment under test (EUT). Without the permission of ECMG Worldwide Certification Solution Inc., Test Lab this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark on this or similar products. The manufacturer has sole responsibility of continued compliance of the device.

Statement of Measurement Uncertainty

The data and results referenced in the document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities that can account for a nominal measurement error. Furthermore, component and process variability of devices similar to that tested may result in additional deviation.

Administrative Data

Test Sample : Microwave Oven (Over The Range)

Model Numbers : XM142AYY(X= E or A; Y=0-9 or A-Z)

Model Tested : EM142ANW

Brand Name : 

Date Tested : May 12, 2009

Applicant : Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd
Beijiao., Shunde, Foshan, Guangdong, China.

Telephone : +86-757-23606480

Fax : +86-757-23656995

Manufacturer : Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd
Beijiao., Shunde, Foshan, Guangdong, China.

EUT Description

Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd , model tested EM142ANW (referred to the EUT in this report) is a Microwave Oven.

Power Voltage	120V~ 60 Hz
Rated Input Power(Microwave)	1550W
Rated Output Power(Microwave)	1100W
Operation Frequency	2450MHz
Magnetron Manufacturer	TOSHIBA
Magnetron Model Number	2M248J
Outside Dimensions	553X470X326 mm
Turntable Diameter	14.2 inch
Net Weight	17 kg

Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Type of Deriver

EM142ANW model designations:

X= E or A

M: only the microwave functions;

42: indicate cavity capacity is 42 liters;

F: indicate the design No.;

Y= A-Z or 0-9, indicate different appearance.

X= E or A;

"E" is electrical control with touch pad; "A" is electrical control with keyboard.

Note :

The above EUT information was declared by manufacturer and for more detailed features description, please refer to manufacturer's specification or user's manual.

Test Summary

The Electromagnetic Compatibility requirements on model tested EM142ANW for this test is stated below. All results listed in this report relate exclusively to this above-mentioned model as the Equipment Under Test. This report confers no approval or endorsement upon any other component, host or subsystem used in the test set-up.

Emission Tests				
Specifications	Description	Test Results	Test Point	Remark
FCC Part 18:2007 FCC/OST MP-5:1986 ANSI C63.4: 2003	Radiation Hazard Measurement	Passed	Enclosure	Attachment 1
FCC Part 18:2007 FCC/OST MP-5:1986 ANSI C63.4: 2003	Input Power Measurement	Passed	AC Input Port	Attachment 2
FCC Part 18:2007 FCC/OST MP-5:1986 ANSI C63.4: 2003	RF Output power Measurement	Passed	EUT	Attachment 3
FCC Part 18:2007 FCC/OST MP-5:1986 ANSI C63.4: 2003	Operating Frequency Measurement	Passed	EUT	Attachment 4
FCC Part 18:2007 FCC/OST MP-5:1986 ANSI C63.4: 2003	Conducted Emission	Passed	AC Input Port	Attachment 5
FCC Part 18:2007 FCC/OST MP-5:1986 ANSI C63.4: 2003	Radiated Emission	Passed	Enclosure	Attachment 6

Load for Microwave Ovens

For all measurements the energy developed by the oven was absorbed by a dummy load consisting of a quantity of tag water in a beaker. If the oven was provided with a shelf or other utensil support, this support was in its initial normal position. For ovens rated at 1000watts or less power output, the beaker contained quantities of water as listed in the following subparagraphs. For ovens rated at more than 1000watts output, each quantity was increased by 50% for each 500watts or fraction thereof in excess of 1000 watts. Additional beakers were used if necessary.

- Load for power output measurement: 1000 milliliters of water in the beaker located in the center of the oven.*
- Load for frequency measurement: 1000 milliliters of water in the beaker located in the center of the oven.*
- Load for measurement of radiation on second and third harmonic: Two loads, one of 700 and the other of 300 milliliters, of water are used. Each load is tested both with the beaker located in the center of the oven and with it in the right front corner.*
- Load for all other measurements: 700 milliliters of water, with the beaker located in the center of the oven.*

Equipment Modification

Any modifications installed previous to testing by Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd will be incorporated in each production model sold or leased in United States.

There were no modifications installed by ECMG Worldwide Certification Solution Inc., test personnel.

EUT Sample Photos



Front View



Door Opened View


Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.



Rear View

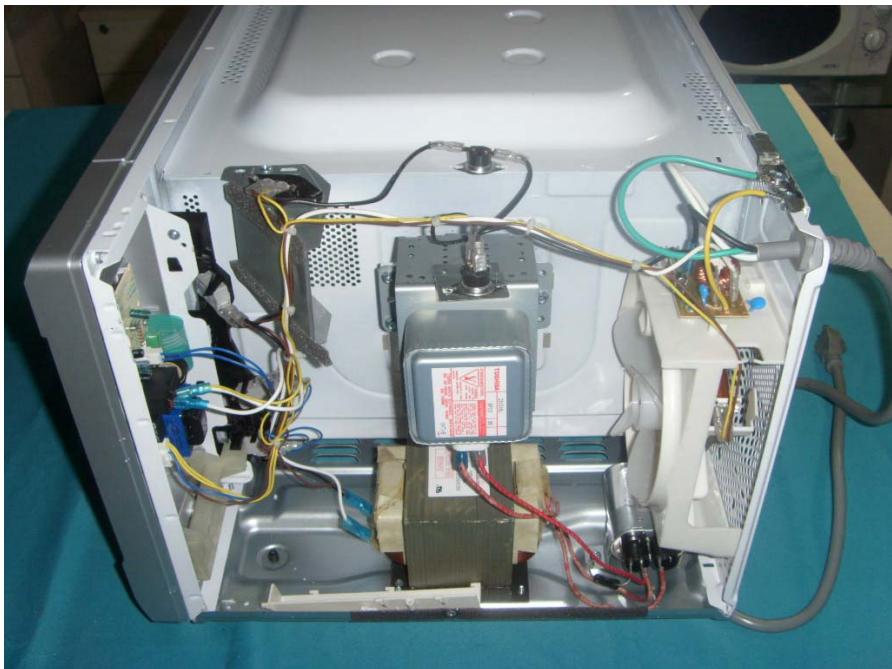

Inside View


Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.



Magnetron View

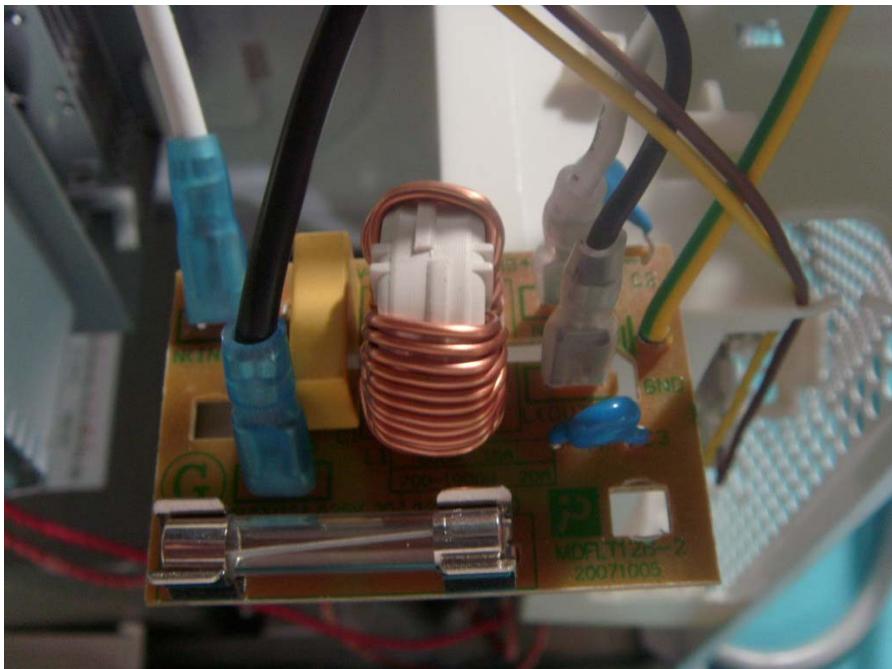


AC Power Filter Board -Front View


Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd


Prepared by ECMG Worldwide Certification Solution Inc.

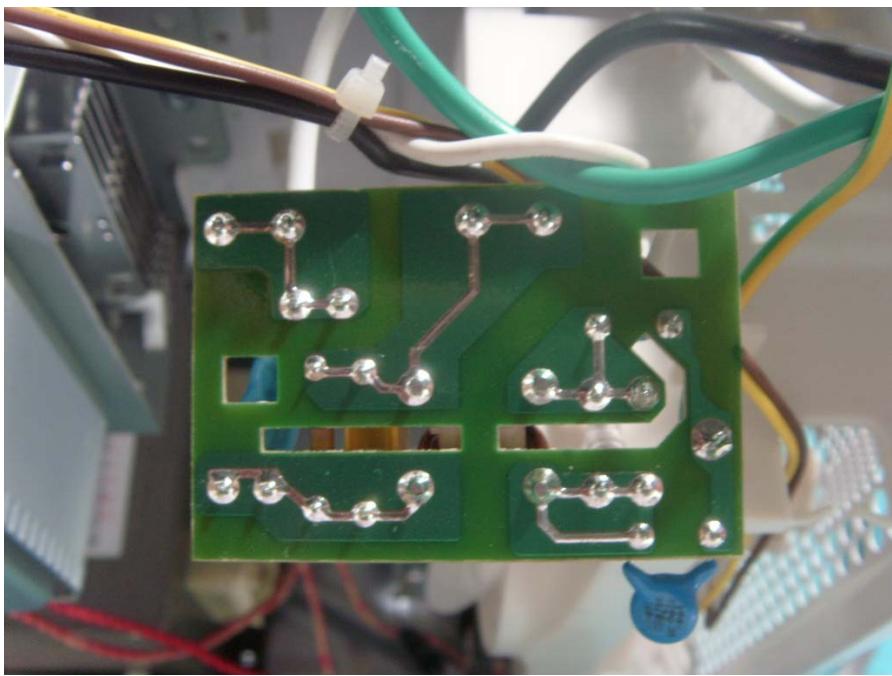

AC Power Filter Board -Rear View

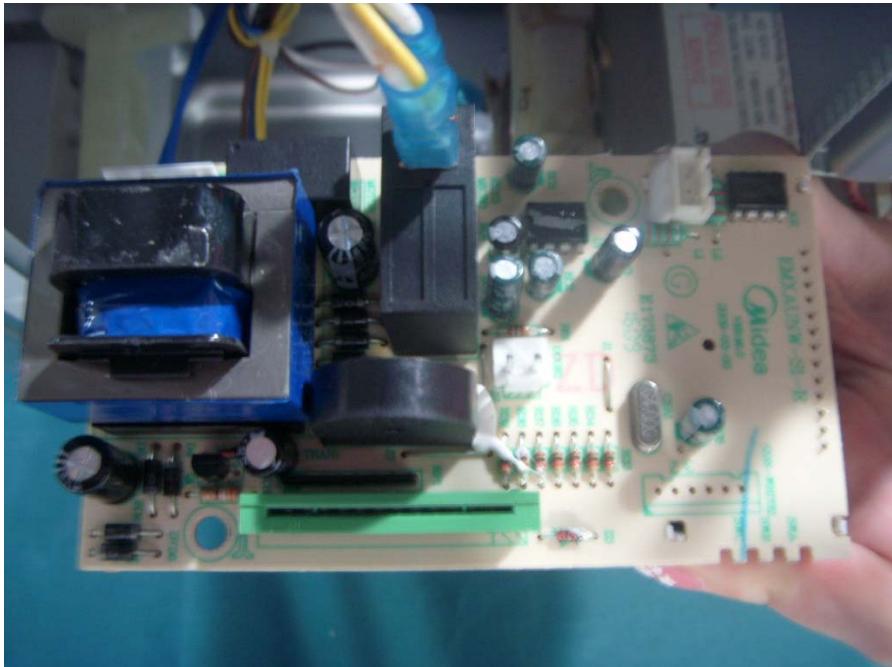

Main Board -Front View

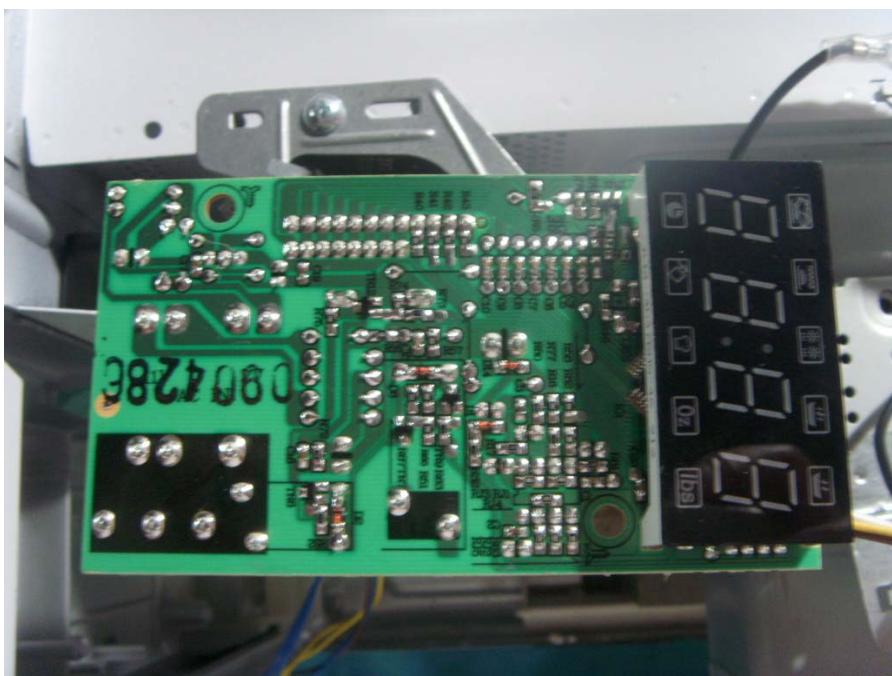

Main Board- Rear View

Test Report #: FOS-0904-10188-FCCID


Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Test System Details

EUT										
Model Numbers:	XM142AYY									
Model Tested:	EM142ANW									
Description:	Microwave Oven (Over The Range)									
Manufacturer:	Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd									
Support Equipment										
N/A										
Cable Description										
<i>Description</i>	<i>From</i>	<i>To</i>	<i>Length (Meters)</i>	<i>Shielded (Y/N)</i>	<i>Ferrite (Y/N)</i>					
Power Cable	EUT	Plug	1.20	N	N					

Configuration of Tested System

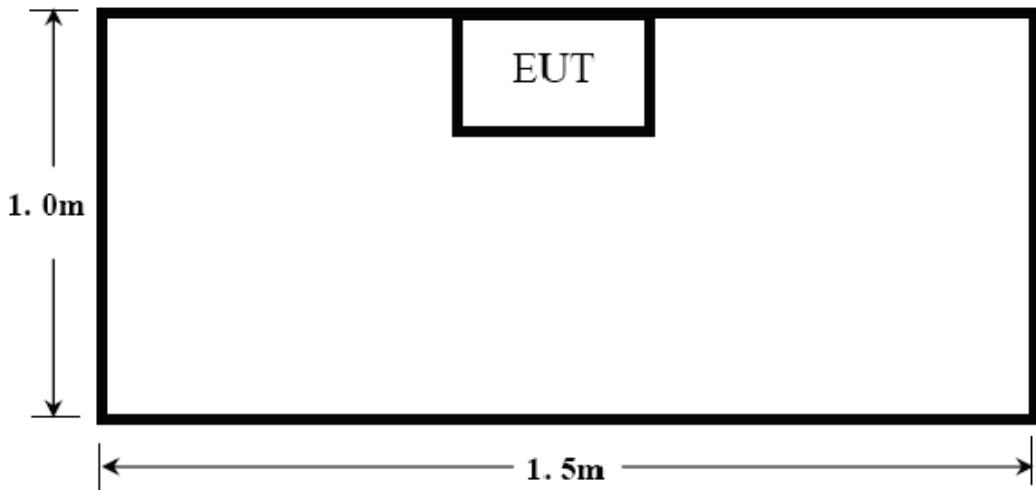

ATTACHMENT 1 - RADIATION HAZARD TEST

CLIENT:	Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd	TEST STANDERD:	FCC Part 18:2007
MODEL NUMBERS:	XM142AYY	PRODUCT:	Microwave Oven (Over The Range)
MODEL TESTED:	EM142ANW	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	May Wang	DATE OF TEST:	May 12, 2009
TEST REFERENCE:	ANSI C63.4: 2003, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for Radiation Hazard Measurement.</p> <p>The measurement was using a microwave leakage meter to measure the Radiation leakage in the as-received condition with the oven door closed. A 1000ml water load in a beaker was located in the center of the oven and the Microwave oven was set to maximum power. While the oven operating, the microwave meter will check the leakage and then record the maximum leakage.</p>		
TESTED RANGE:	N/A		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	<p>There was no microwave leakage exceeding a power level of 0.03 mW/cm² observed at any point 5cm or more from the external surface of the oven.</p> <p>A maximum of 1.0mW/cm² is allowed in accordance with the applicable FCC standards. Hence, microwave leakage in the as-received condition with the oven door closed was below the maximum allowed.</p> <p>The test results relate only to the equipment under test provided by client.</p>		
Changes or Modifications:	There were no modifications installed by ECMG Worldwide Certification Solution Inc., (China) test personnel.		
M. UNCERTAINTY:	0.0001 mW/cm ²		

Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Page 13 of 31

Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Field Monitor	HOLADAY	H1-1710	98370	2009-04-02	2010-04-01
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).</i>					

SIGNED BY:

May Wang

ENGINEER

REVIEWED BY:

Jameryn

SENIOR ENGINEER

Radiation Hazard Test Set-up :



Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Page 14 of 31

ATTACHMENT 2 - INPUT POWER MEASUREMENT

CLIENT:	Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd	TEST STANDERD:	FCC Part 18
MODEL NUMBERS:	XM142AYY	PRODUCT:	Microwave Oven (Over The Range)
MODEL TESTED:	EM142ANW	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	May Wang	DATE OF TEST:	May 12, 2009
TEST REFERENCE:	ANSI C63.4: 2003, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for Input power Measurement.</p> <p>The input power and current was measured using a power analyzer. A 1000ml water load in a beaker was located in the center of the oven and the Microwave oven was set to maximum power. While the oven is operating, use a voltmeter and an ampmeter to test the AC input voltage and current.</p>		
TESTED RANGE:	N/A		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS :	<p>Based on the measured input power, the EUT was found to be operating within the intended specifications.</p> <p>The test results relate only to the equipment under test provided by client.</p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Worldwide Certification Solution Inc., (China) test personnel.		
M. UNCERTAINTY :	± 5W		

Test Data:

Input Voltage (Vac/Hz)	Input Current (amps)	Measured Input Power (watts)	Rated Input Power (watts)
120/60Hz	13.10	1572	1550

Test Equipments List :

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Power Frequency Test System	AINO	8707A	02040213	2009-11-14	2009-11-13
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).</i>					

SIGNED BY:

May Wang**ENGINEER****REVIEWED BY:**

Jameson**SENIOR ENGINEER**

Input Power Test Set-up :



Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Page 17 of 31

ATTACHMENT 3 - RF OUTPUT POWER MEASUREMENT

CLIENT:	Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd	TEST STANDERD:	FCC Part 18:2007
MODEL NUMBERS:	XM142AYY	PRODUCT:	Microwave Oven (Over The Range)
MODEL TESTED:	EM142ANW	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	May Wang	DATE OF TEST:	May 12, 2009
TEST REFERENCE:	ANSI C63.4: 2003, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18C for RF output power Measurement. The Caloric Method was used to determine maximum RF output power. The initial temperature of the water load was measured. A 1000ml water load in a beaker was located in the center of the oven. The oven was operated at maximum output power for 120 seconds, the temperature of the water was re-measured.</p> <p>RF Output Power</p> $= (4.2\text{ joules/calorie})(\text{volume in milliliters})(\text{temperature rise}) / (\text{time in seconds})$ $= 4.2 \text{ joules/calorie} \times 1000 \times (\text{Final Temp} - \text{Initial Temp}) / 120$		
TESTED RANGE:	N/A		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	<p>RF Output Power = 910 watts</p> <p>The test results relate only to the equipment under test provided by client.</p>		
Changes or Modifications:	There were no modifications installed by ECMG Worldwide Certification Solution Inc., (China) test personnel.		
M. UNCERTAINTY:	$\pm 0.3^\circ\text{C}$		

Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Page 18 of 31

Test Data:

Quality of Water (ml)	Starting Temperature (°C)	Final Temperature (°C)	Elapsed Time (Seconds)	RF Output Power (watts)
1000	18.7	44.7	120	910

Test Equipments List :

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Stopwatch	Guangdong	SW323	SW01	2009-02-14	2010-02-13
Thermometer	Taiwan	TES-1310	020907011	2009-03-05	2010-03-04
Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).					

SIGNED BY:



May Wong

ENGINEER

REVIEWED BY:



Jamesym

SENIOR ENGINEER

RF Output Power Test Set-up :



Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

ATTACHMENT 4 - OPERATING FREQUENCY MEASUREMENT

CLIENT:	Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd	TEST STANDERD:	FCC Part 18:2007
MODEL NUMBERS:	XM142AYY	PRODUCT:	Microwave Oven (Over The Range)
MODEL TESTED:	EM142ANW	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	May Wang	DATE OF TEST:	May 12, 2009
TEST REFERENCE:	ANSI C63.4: 2003, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the FCC MP-5 and FCC Part 18 for Operating Frequency Measurement.</p> <p>1) The variation of frequency with time.</p> <p>The operating frequency was measured using a spectrum analyzer. Starting with the EUT at room temperature, a 1000ml water load in a beaker was located in the center of the oven. Set a spectrum analyzer with antenna at 3 meters distance form the oven and the oven was operated at maximum output power. The fundamental operating frequency was monitored until the water load was reduced to 20 percent of the original load.</p> <p>2) The variation of frequency with Line Voltage.</p> <p>The operating frequency was measured using a spectrum analyzer. The EUT was operated/warmed by at least 10 minutes of use with a 1000ml water load at room temperature at the beginning of the test. Then the operating frequency was monitored as the input voltage was varied between 80 and 125 percent of the nominal rating.</p>		
TESTED RANGE:	2450 ± 50MHz		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	<p>Please refer to following pages for details of the variation in operating frequency with time & line voltage measurement.</p> <p>The test results relate only to the equipment under test provided by client.</p>		
Changes or Modifications:	There were no modifications installed by ECMG Worldwide Certification Solution Inc., (China) test personnel.		
M. UNCERTAINTY:	Freq. ±10kHz		

Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Page 21 of 31

Variation in Operating Frequency with Time:

<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2459.2	2460.8

Variation in Operating Frequency with Line Voltage:

<i>Minimum Frequency (MHz)</i>	<i>Maximum Frequency (MHz)</i>
2454.4	2466.0
<i>Note: Line voltage varied from 96Vac to 150Vac.</i>	

Test Equipments List :

<i>Test Equipment</i>	<i>Manufacturer</i>	<i>Model</i>	<i>Serial No.</i>	<i>Last Cal.</i>	<i>Cal. Due</i>
<i>Bilog Antenna</i>	<i>Chase</i>	<i>CBL6112B</i>	<i>SB3440</i>	<i>2009-01-25</i>	<i>2010-01-24</i>
<i>Horn Antenna</i>	<i>R&S</i>	<i>HF906</i>	<i>SB3434</i>	<i>2009-01-25</i>	<i>2010-01-24</i>
<i>EMI Receiver</i>	<i>R&S</i>	<i>ES126</i>	<i>SB3436</i>	<i>2009-01-25</i>	<i>2010-01-24</i>
<i>Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).</i>					

SIGNED BY:

May Wong

ENGINEER

REVIEWED BY:

Jamerym

SENIOR ENGINEER

Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Page 22 of 31

Operating Frequency Test Set-up :




Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd


Prepared by ECMG Worldwide Certification Solution Inc.

ATTACHMENT 5 - CONDUCTED EMISSION TEST RESULTS

CLIENT:	Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd	TEST STANDERD:	FCC Part 18:2007
MODEL NUMBERS:	XM142AYY	PRODUCT:	Microwave Oven (Over The Range)
MODEL TESTED:	EM142ANW	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	May Wang	DATE OF TEST:	May 12, 2009
TEST REFERENCE:	ANSI C63.4: 2003, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the guideline of ANSI C63.4: 2003 & FCC MP-5 for conducted emissions.</p> <p>The measurement was using a AMN on each line and an EMI receiver peak scan was made at the frequency measurement range. The six highest significant peaks were then marked, and these signals were then quasi-peaked and averaged.</p> <p>The frequency range investigated was from 150kHz to 30MHz.</p>		
TESTED RANGE:	150kHz to 30MHz		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	<p>The EUT meets the requirements of test reference for Conducted Emissions on line N by 17.8 dB of Quasi-Peak detector.</p> <p>The test results relate only to the equipment under test provided by client.</p>		
CHANGES OR MODIFICATIONS:	There were no modifications installed by ECMG Worldwide Certification Solution Inc., (China) test personnel.		
M. UNCERTAINTY:	±2.5 dB		

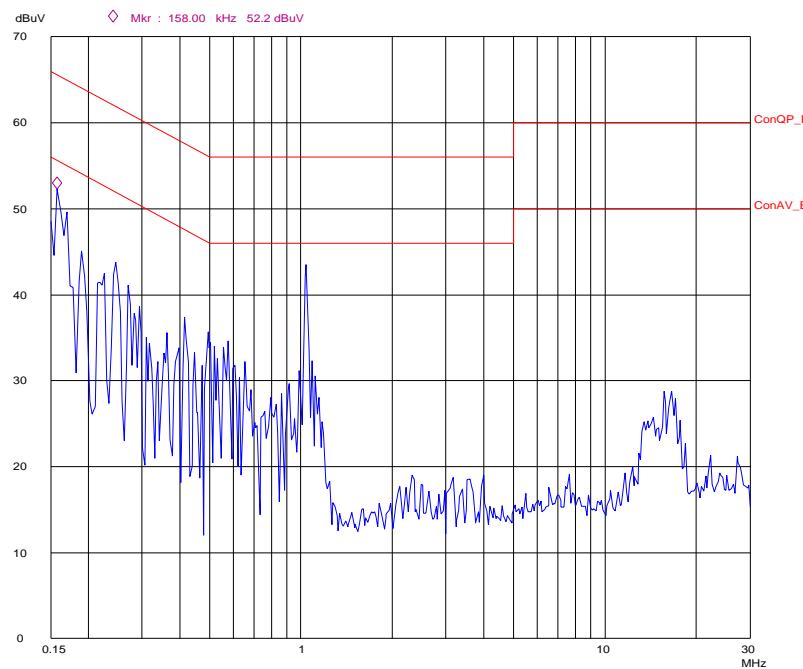

Line L Conducted Emission Graph

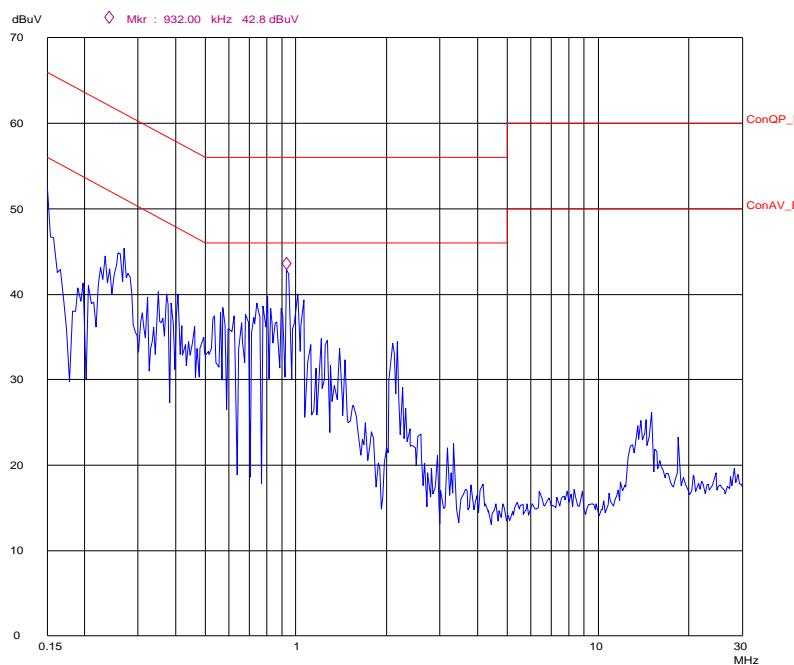

Line N Conducted Emission Graph

Test Data:

Line (L/N)	Frequency (MHz)	Corrected QP Level (dBuV)	Limits QP (dBuV)	Margin QP (dB)	Corrected AVE Level (dBuV)	Limits AVE (dBuV)	Margin AV (dB)
L	0.158	43.3	65.5	-22.2	16.5	55.5	-39.0
L	0.246	32.7	61.8	-29.1	7.9	51.8	-43.9
L	1.040	23.6	56.0	-32.4	6.0	46.0	-40.0
N	0.150	48.2	66.0	-17.8	19.1	56.0	-36.9
N	0.270	35.3	61.1	-25.8	11.6	51.1	-39.5
N	0.932	31.4	56.0	-24.6	10.9	46.0	-35.1


Note: All readings are using a bandwidth of 9 kHz, with a 30 ms sweep time.

Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
EMI Receiver	R&S	ESCS30	SB2603	2009-01-25	2010-01-24
AMN	R&S	ESH2-Z5	SB3321	2009-01-25	2010-01-24

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

SIGNED BY:



May Wang
ENGINEER

REVIEWED BY:



Jamesym
SENIOR ENGINEER

Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Page 26 of 31

Conducted Emission Test Set-up :



Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

ATTACHMENT 6 - RADIATED EMISSION TEST RESULTS

CLIENT:	Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd	TEST STANDERD:	FCC Part 18:2007
MODEL NUMBERS:	XM142AYY	PRODUCT:	Microwave Oven (Over The Range)
MODEL TESTED:	EM142ANW	EUT DESIGNATION:	Home or Office
TEMPERATURE:	22°C	HUMIDITY:	60%RH
ATM PRESSURE:	101.1kPa	GROUNDING:	Through AC Power Cord
TESTED BY:	May Wang	DATE OF TEST:	May 12, 2009
TEST REFERENCE:	ANSI C63.4: 2003, FCC/OST MP-5:1986		
TEST PROCEDURE:	<p>The EUT was set up according to the guidelines of ANSI C63.4: 2003 & FCC MP-5 for radiated emissions. Microwave oven was placed on a 1m *1.5m nonconductive table. The top of the table is 1.0 m above the ground. The table is placed on a flush mounted metal turntable. An EMI receiver peak scan was made at the frequency measurement range (pre-scan) in an Anechoic chamber. Signal discrimination was then performed and the significant peaks marked. All data was recorded in Quasi-peak detection mode from 30 MHz to 1GHz and average detector mode above 1GHz.</p> <p>The following data lists the significant emission frequencies, measured levels, correction factors (including cable and antenna correction factors), and the corrected readings against the limits. Explanation of the Correction Factor are given as follows:</p> <p>FS= RA + AF + CF - AG</p> <p>Where: FS = Field Strength</p> <p>RA = Receiver Amplitude</p> <p>AF = Antenna Factor</p> <p>CF = Cable Attenuation Factor</p> <p>AG = Amplifier Gain</p>		
TESTED RANGE:	30MHz to 24.5GHz		
TEST VOLTAGE:	120VAC / 60Hz		
RESULTS:	The EUT meets the requirements of test reference for Radiated Emissions on Vertical polarization by 18.8 dB of average detector at 4909.268MHz. The test results relate only to the equipment under test provided by client.		
Changes or Modifications:	There were no modifications installed by ECMG Worldwide Certification Solution Inc., (China) test personnel.		
M. UNCERTAINTY:	± 3.2 dB		

Test Report #: FOS-0904-10188-FCCID

Prepared for Midea Microwave and Electrical Appliances Manufacturing Co.,Ltd

Prepared by ECMG Worldwide Certification Solution Inc.

Page 28 of 31

Field Strength Limits For Out-Of-Band Emissions :

For RF output power <500W, Limit at 300m = 27.96dB_uV/m

For RF output power>500W, Limit at 300m=20log[25*SQRT(Power/500)]dB_uV/m

Test Data :

30MHz - 1GHz				
Frequency [MHz]	Antenna Polarization [V/H]	Corrected Reading [dB _u V/m]	Delta, QP [dB]	3 Meters Limits [dB _u V/m]
30.010	H	25.7	-44.9	70.6
265.210	H	26.9	-43.7	70.6
647.268	H	32.7	-37.9	70.6
101.923	V	25.7	-44.9	70.6
113.587	V	28.2	-42.4	70.6
647.609	V	35.1	-35.5	70.6

Note: All readings are quasi-peak unless stated otherwise, using a bandwidth of 120kHz, with a 60s sweep time. A video filter was not used.

1GHz - 25GHz				
Frequency [GHz]	Antenna Polarization [V/H]	Corrected Reading [dB _u V/m]	Delta, AV [dB]	3 Meters Limits [dB _u V/m]
4926.215	H	46.8	-23.6	70.6
8616.451	H	44.5	-26.1	70.6
16002.545	H	45.5	-25.1	70.6
4909.268	V	51.8	-18.8	70.6
7367.008	V	44.8	-26.4	70.6
15985.929	V	48.4	-22.4	70.6

Note: All readings are average unless stated otherwise, using a bandwidth of 1MHz, A video filter was not used.

Test Equipments List:

Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
Bilog Antenna	Chase	CBL6112B	SB3440	2009-01-25	2010-01-24
Horn Antenna	R&S	HF906	SB3434	2009-01-25	2010-01-24
EMI Receiver	R&S	ES126	SB3436	2009-01-25	2010-01-24
Band-pass Filter	Micro-Tronics	BRM50702	SIN-030	2009-01-25	2010-01-24
3M Anechoic chamber	Albatross	9x6x6	SB3450	2009-03-27	2010-03-26

Note: All testing were performed using internationally recognized standards. All test instruments were calibrated and traceable to the National Institute of Standards and Technology (NIST).

SIGNED BY:

May Wang

ENGINEER

REVIEWED BY:

Jane Mym

SENIOR ENGINEER

Radiated Emission Test Set-up (30~1000MHz) :



Radiated Emission Test Set-up (1~25GHz) :

