

Testing Tomorrow's Technology

#### **Application for Certification**

Per

Title 47 USC Part 2, Subpart J, Equipment Authorization Procedures, Paragraph 2.907, Certification and Part 15, Subpart C, Intentional Radiators, Paragraph 15.231, Periodic Operation in the band 40.66 MHz to 40.70 MHz and above 70 MHz

And

Innovation, Science, and Economic Development Canada
Certification Per
RSS-Gen General Requirements for Radio Apparatus
And
RSS-210 License-Exempt Radio Apparatus: Category I Equipment

For the

**Matrix Product Development, Inc.** 

Wyze Temp Apollo Model: TP1215

UST Project: 17-0023 Issue Date: March 21, 2017

Number of Pages in this report: 20

3505 Francis Circle Alpharetta, GA 30004 PH: 770-740-0717 Fax: 770-740-1508 www.ustech-lab.com



Testing Tomorrow's Technology

I certify that I am authorized to sign for the test facility and that all of the statements in this report and in the Exhibits attached hereto are true and correct to the best of my knowledge and belief:

US Tech (Agent Responsible For Test):

By: Man Masia

Name: Alan Ghasiani

Title: <u>President – Consulting Engineer</u>

Date: <u>March 21, 2017</u>



NVLAP LAB CODE 200162-0

This report shall not be reproduced except in full. This report may be copied in part only with the prior written approval of US Tech. The results contained in this report are subject to the adequacy and representative character of the sample provided. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST or any agency of the Federal Government.

3505 Francis Circle Alpharetta, GA 30004 PH: 770-740-0717 Fax: 770-740-1508 www.ustech-lab.com

## MEASUREMENT/TECHNICAL REPORT

COMPANY NAME: Matrix Product Development, Inc PRODUCT: Wyze Temp Apollo, Model: TP1215 VGC-WYZEAPOLLO

IC: 12661A-WYZEAPOLLO April 3, 2017

This report concerns (check one): Original grant_X Class II change  Equipment type: 433 MHz Transmitter Module
Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? yes No_X  If yes, defer until: date
N.A. agrees to notify the Commission by N.A. date of the intended date of announcement of the product so that the grant can be issued on that date.
Report prepared by:
US Tech 3505 Francis Circle Alpharetta, GA 30004
Phone Number: (770) 740-0717 Fax Number: (770) 740-1508

US Tech Test Report: FCC ID: IC: Test Report Number:

Issue Date:
Customer:
Model:

FCC Part 15/IC RSS Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

# **Table of Contents**

<u>raragraph</u> <u>thue</u>	<u>raye</u>
1. General Information	6
1.1 Product Description	
1.2 Characterization of Test Sample	
1.3 Related Submittal(s)/Grant(s)	
2. Tests and Measurements	
2.1 Configuration of Tested System	7
2.2 Test Facility	
2.3 Test Equipment	7
2.4 EUT Antenna Description (FCC Sec. 15.203)	
2.5 Modifications to Equipment	
2.6 Test Procedure	
2.7 Pulse Averaging/Duty Cycle (47 CFR 15.35 (c))	
2.8 Compliance to CFR 15.231(e)	
<ul><li>2.8.1 Field Strength of Fundamental (47 CFR 15.231(b), 15.2</li><li>2.8.2 Limits for Operation in the Band above 70 MHz (CFR15)</li></ul>	` ''
13	.231(b) 13.231( <del>e</del> ))
2.8.3 Bandwidth of Fundamental (CFR15.231(c))	16
2.9 Radiated Spurious Emissions and Power Line Conducted Er	
15.209, 15.207)	17
2.10 Measurement Uncertainty	20
2.10.1 Conducted Emissions Measurement Uncertainty	
2.10.2 Radiated Emissions Measurement Uncertainty	
3. Test Results	20

US Tech Test Report: FCC ID: IC: Test Report Number: Issue Date: Customer:

Model:

FCC Part 15/IC RSS Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

**List of Figures** 

<u>Figure</u> <u>Title</u>	<u>Page</u>
Figure 1. Block Diagram of Test Configuration	
Figure 2. Duty Cycle	11
Figure 3. Occupied Bandwidth (20 dB BW)	
<u>List of Tables</u>	
<u>Tables</u> <u>Title</u>	<u>Page</u>
Table 1. EUT and Peripherals	7
Table 2. Test Instruments	8
Table 3. Antenna Description	9
Table 4. Intentional Radiated Emissions, CFR 15.231 below 1	GHz14
Table 5. Intentional Radiated Emissions CFR 15.231 above 1	
Table 6. Intentional Radiated Emissions, 150 kHz - 30 MHz	17
Table 7. Intentional Radiated Emissions, 30-1000 MHz	

Table 8. Intentional Radiated Emissions, above 1 GHz ......19

US Tech Test Report: FCC ID: IC:

Test Report Number:

Issue Date: Customer:

Model:

FCC Part 15/IC RSS Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

#### 1. General Information

This report is prepared as a means of presenting test data to be used by a Telecom Certification Body in determination of whether this product is permitted for unlicensed dissemination to the general public according to the Innovation, Science, and Economic Development Canada and FCC Rules and Regulations for RF Devices Intentional Radiators.

# 1.1 Product Description

The Equipment under Test (EUT) is the Matrix Product Development Wyze Temp Apollo, Model TP1215 which is part of the Wyze Temp Apollo system. The system consists of the probe and a line-powered base station. The base station is not evaluated in this test report. The EUT communicates with the Wyze Temp PLUS Base Station, TP1113 using 433 MHz frequency shift keying wireless communication. The EUT has a surface mount chip antenna with low gain. The EUT is capable of making wireless real-time temperature measurements intended to streamline the large scale cooking process to help minimize loss and perfect cooking cycles.

The EUT is low power 433 MHz transmitter and operates at a periodic rate that exceeds the limits of paragraph (a) of 15.231 therefore paragraph (e) is invoked.

#### 1.2 Characterization of Test Sample

The sample used for testing was received by US Tech on February 8, 2017 in good operating condition.

#### 1.3 Related Submittal(s)/Grant(s)

The EUT is subject to the following FCC Equipment Authorizations:

- a) Certification of the transmitter.
- b) Verification as a class A digital device.

**US Tech Test Report:** FCC ID:

IC:

Test Report Number:

Issue Date: Customer: Model:

FCC Part 15/IC RSS Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

#### 2. **Tests and Measurements**

#### **Configuration of Tested System** 2.1

The Test sample was tested per ANSI C63.4, Methods of Measurement from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014). Radiated emissions data were taken according to paragraph 8.0 with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter associated with the spectrum analyzer was off throughout the evaluation process. There were no interconnecting cables to manipulate in an attempt to maximize emissions; however, the physical position of the EUT was varied through the three mutually exclusive orthogonal planes in an attempt to maximize the emissions. The worse case position is the position used for final measurements and is gathered in this test report. A block diagram of the tested system is shown in Figure 1.

#### 2.2 **Test Facility**

Testing was performed at US Tech's measurement facility at 3505 Francis Circle, Alpharetta, GA. This site has been fully described and registered with the FCC, under site registration number 186022. Additionally this site has also been fully described and submitted to Industry Canada (IC), and has been approved under file number 9900A-1 and is also a NVLAP accredited test lab; lab code 200162-0.

#### 2.3 **Test Equipment**

**Table 1. EUT and Peripherals** 

PERIPHERAL	MODEL	SERIAL	FCC/IC ID:	CABLES
MANUFACTURER	NUMBER	NUMBER		P/D
Probe Matrix Product Development, Inc (EUT)	TP1215	Engineering Sample	Pending: FCC ID: VGC- WYZEAPOLLO IC:12661A- WYZEAPOLLO	None

S= Shielded, U=Unshielded, P= Power line, D= Data line

FCC ID: IC:

Model:

Test Report Number:

Issue Date: Customer:

FCC Part 15/IC RSS Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

**Table 2. Test Instruments** 

TEST INSTRUMENT	MODEL NUMBER	MANUFACTURER	SERIAL NUMBER	CALIBRATION DUE DATE
SPECTRUM ANALYZER	E4407B	AGILENT	US41442935	5/11/2017 Extended 90 Days
SPECTRUM ANALYZER	8593E	HEWLETT PACKARD	3205A60124	8/23/2017
LOOP ANTENNA	SAS- 200/562	A.H. Systems	142	9/28/2017 2 yr
BICONNICAL ANTENNA	3110B	EMCO	9307-1431	8/25/2017 2 yr
LOG PERIODIC ANTENNA	3146	EMCO	9305-3600	9/21/2018 2 yr.
HORN ANTENNA	3115	EMCO	9107-3723	9/22/2018 2 yr.
RF PREAMP 100 kHz to 1.3 GHz	8447D	HEWLETT- PACKARD	1937A02980	3/2/2017 Extended 90 Days
PREAMP 1.0 GHz to 26.0 GHz	8449B	HEWLETT- PACKARD	3008A00480	3/1/2017 Extended 90 Days
CALCULATION PROGRAM	N/A	N/A	Ver. 6.0	N/A

Note: The calibration interval of the above test instruments are 12 months unless stated otherwise and all calibrations are traceable to NIST/USA.

US Tech Test Report: FCC ID: IC:

Test Report Number:

Issue Date: Customer:

Model:

FCC Part 15/IC RSS Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

# 2.4 EUT Antenna Description (FCC Sec. 15.203)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

The Matrix Product Development, Inc, Model TP1215 incorporates the antenna(s) detailed in Table 3.

**Table 3. Antenna Description** 

REPORT REFERENCE	MANUFACTURER	TYPE OF ANTENNA	MODEL	GAIN dB <sub>i</sub>	TYPE OF CONNECTOR
None	Rain Sun	Chip antenna	AN1603- 433	0.5 dBi	SMT solder

# 2.5 Modifications to Equipment

No modifications were needed to bring the EUT into compliance with the FCC Part or IC RSS requirements.

#### 2.6 Test Procedure

The EUT was configured as shown in the following block diagram(s) and photograph(s). The sample was tested per ANSI C63.4, Methods of Measurement for Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2014) following US Tech's procedures paragraph 7 for conducted and paragraph 8 for radiated. Conducted and radiated emissions data were taken with the test receiver or spectrum analyzer's resolution bandwidth adjusted to 9 kHz and 120 kHz, respectively. All measurements are peak unless stated otherwise. The video filter on the spectrum analyzer was OFF throughout the evaluation process. Interconnecting cables were manipulated as necessary to maximize emissions. The EUT was rotated 360 degrees with the turntable to maximize emissions. The physical position of the EUT was varied through the three mutually exclusive orthogonal planes in an attempt to maximize the emissions. The final setup description is found in the test section of this report.

US Tech Test Report: FCC ID: IC: Test Report Number: Issue Date: Customer: Model: FCC Part 15/IC RSS Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

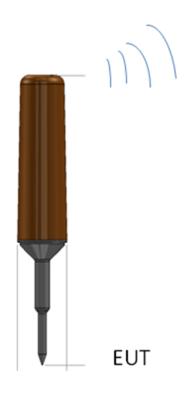


Figure 1. Block Diagram of Test Configuration

## 2.7 Pulse Averaging/Duty Cycle (47 CFR 15.35 (c))

The duty cycle de-rating factor used in the calculation of average radiated limits (per CFR 15.209 and 15.35(c)) is described below. This factor was calculated by first determining the worst case scenario for system operation. With the worst case operating scenario the transmission duty cycle is calculated as:

Total Time On from Figure 3. = 12.0mS

(12.0mS Total Time On)/(100mS FCC Standard) = 0.12 Numeric Duty Cycle

Duty Cycle = 20 Log (.12) = -18.42 dB

US Tech Test Report: FCC ID: IC: Test Report Number: Issue Date: Customer:

Model:

FCC Part 15/IC RSS Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

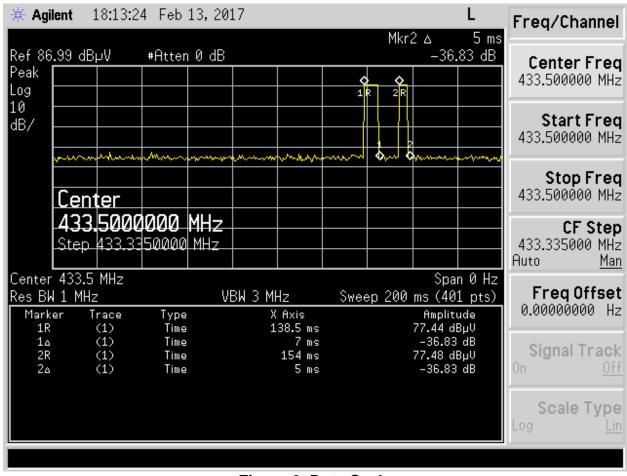


Figure 2. Duty Cycle

#### 2.8 Compliance to CFR 15.231(e)

According to CFR 15.231(e), transmitters which are not able to meet the requirements for CFR 15.231(a) can evoke the requirements laid out in CFR 15.231(e). In this case the EUT is not able to meet all the requirements of CFR 15.231(a) therefore CFR 15.231(e) was applied.

US Tech Test Report: FCC ID: IC ID: Test Report Number: Issue Date: Customer: Model: FCC Part 15 Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

# 2.8.1 Field Strength of Fundamental (47 CFR 15.231(b), 15.231(e))

The results of the measurements for peak fundamental emissions are given in Table 4. The EUT emissions measurement was started by setting up the Antenna in the vertical orientation at a distance of 3 meters from the EUT and at a height of 1.0 meters above the ground. The EUT's major axis was set normal to the direction of the measuring antenna.

The Spectrum Analyzer (SA) displays were set to: Channel A free-running, Channel B to Max-Hold. Choose a frequency or frequency range and scan it at a coupled rate. When a signal is detected, raise and lower the antenna to maximize the signal.

When the signal has been maximized, the antenna height is fixed the turn-table is rotated through 360 degrees to further maximize the signal.

When all signals have been maximized for antenna height and direction, the EUT case is carefully maneuvered in each of the three mutually exclusive orthogonal planes while observing the same Max-hold/free-running SA display indication. When the EUT position is found that further maximizes the signal, record the antenna height, rotation orientation, EUT orthogonal position and signal strength on the data sheet for that particular frequency.

Next, the measurement antenna is re-oriented to a Horizontal polarization at 1 meter height and the process described above is repeated. All signals within 6 dB of the limit are recorded.

Finally, the collected data is input into the calculation spread sheet. The spread sheet is designed to calculate for the true value that is collected. The spread sheet takes into account the SA reading, the antenna correction factor, cable losses and duty cycle factors. See the data tables herein.

US Tech Test Report: FCC ID: IC ID: Test Report Number: Issue Date:

Customer:

Model:

FCC Part 15 Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

# 2.8.2 Limits for Operation in the Band above 70 MHz (CFR15.231(b) 15.231(e))

This limit versus frequency table is as follows (test distance = 3.0 meters):

Fundamental Frequency (MHz)	Limit Fundamental (Average) uV/m	Limit Harmonics and other spurious (Average) uV/m
260 to 470	1500 to 5000 <sup>*, 1</sup>	150 to 500 <sup>*,2</sup>
	* Linear Interpolat	ion

Note: formula 1:  $limit_1 = E = 10^{(m*log(F))+b}$ 

2:  $\lim_{t \to 0} t_2 = E = 10^{m*} \log(F) + b$ 

m= 2.034<sup>1</sup>, 2.034<sup>2</sup> b= -1.735<sup>1</sup>, -2.735<sup>2</sup>

E= Electric field strength

F= fundamental frequency in MHz

The frequency spectrum above the fundamental to its 10<sup>th</sup> harmonic was examined and measured for signals falling into the restricted bands of 15.205. If average emissions measurements are employed, the provisions in 15.35 for averaging pulsed emissions and for limiting peak emissions were applied. All other spurious emissions meets the limits of 15.209.

FCC ID: IC ID:

Test Report Number:

Issue Date:

Customer: Model: FCC Part 15 Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017

Matrix Product Development, Inc.

TP1215

Table 4. Intentional Radiated Emissions, CFR 15.231 below 1 GHz

Tested By: RKM		Test:	Part 15C	, Para 15.231	Client: Ma Developm	trix Product ent, Inc.		
		Proje	ct: 17-00	23	Model: TF	P1215		
Frequency (MHz)	Test Data (dBuV)	Additional Factor (dB)	AF+CL- PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	_	Detection Method
433.49	73.46	-	17.95	91.41	93.0	3.0m./VERT	1.6	PK
433.49	72.92	-18.42	17.95	72.45	73.0	3.0m./VERT	0.5	AVG
867.02	45.69	-	1.04	46.73	54.0*	3.0m./VERT	7.3	PK
	No	other emis	sions fo	und less than 20 dB	from the a	pplicable lim	it.	

1. (\*) Peak measurement meets AVG limit

## Sample Calculation at 433.49 MHz

Magnitude of Measured Frequency	73.46	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	17.95	dB/m
+Additional Factor	0.00	dB
Corrected Result	91.41	dBuV/m

Test Date: February 13, 2017

Tested By

<sup>2.</sup> No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic

<sup>3.</sup> Duty cycle correction factor of -18.42 dB was applied to correct for pulse operation.

FCC ID: IC ID:

Test Report Number:

Issue Date:

Customer: Model: FCC Part 15 Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017

Matrix Product Development, Inc. TP1215

Table 5. Intentional Radiated Emissions CFR 15.231 above 1 GHz

Tested By:					Client: Matrix Product				
RKM			Projec	ct: 17-0023		Model: TP1215			
Frequency (MHz)	Test Data (dBuV)	Fac		AF+CL- PA (dB/m)	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	Margin (dB)	Detection Method
1300.37	48.76	-	-	-8.72	40.04	54.0*	3.0m./HORZ	14.0	PK
1300.45	54.94	-	-	-8.65	46.29	54.0*	3.0m./VERT	7.7	PK
1734.08	52.57	-	-	-6.84	45.73	54.0*	3.0m./VERT	8.3	PK
2167.59	51.19	-	-	-3.56	47.63	54.0*	3.0m./VERT	6.4	PK
2600.80	54.53	-	-	-2.71	51.82	54.0*	3.0m./VERT	2.2	PK
3033.76	49.31	-	-	-1.35	47.96	54.0*	3.0m./VERT	6.0	PK
3468.20	53.87	-	-	1.10	54.97	74.0	3.0m./VERT	19.0	PK
3468.20	50.48	-	-	1.10	51.58	54.0	3.0m./VERT	2.4	AVG
3901.37	46.64	-	-	2.19	48.83	54.0*	3.0m./VERT	5.2	PK
4335.05	49.20	-	-	3.03	52.23	74.0	3.0m./VERT	21.8	PK
4335.05	43.08	-	-	3.03	46.11	54.0	3.0m./VERT	7.9	AVG
	No	other	emis	sions fou	nd less than 20	dB from the	e applicable lir	nit.	

<sup>1. (\*)</sup> Peak measurement meets AVG limit

Sample Calculation at 1300.37 MHz

Magnitude of Measured Frequency	48.76	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-8.72	dB/m
+Duty Cycle	0	dB
Corrected Result	40.04	dBuV/m

Test Date: February 13, 2017

Tested By

<sup>2.</sup> No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 10<sup>th</sup> harmonic

US Tech Test Report: FCC ID: IC ID: Test Report Number: Issue Date: Customer:

Model:

FCC Part 15 Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

# 2.8.3 Bandwidth of Fundamental (CFR15.231(c))

The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined by those frequencies that are at least 20 dB down on either side of the center frequency of the pulse.

 $0.0025 \times 433,500,000.00 = 1.0838 \text{ MHz}$ 

The measured bandwidth is 325.801 kHz, well within the limit. See the figure below.

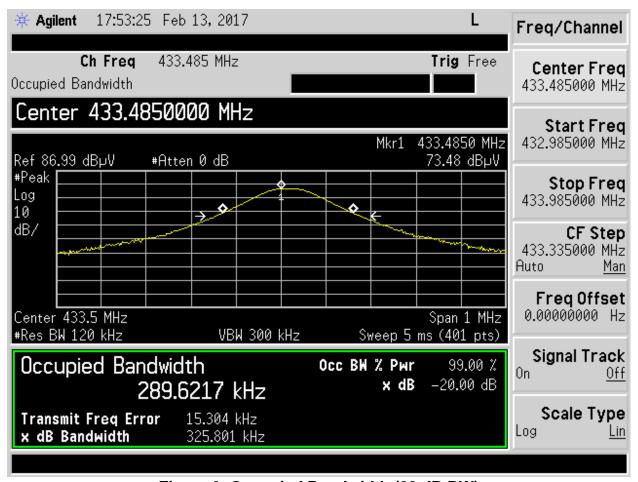


Figure 3. Occupied Bandwidth (20 dB BW)

US Tech Test Report: FCC ID: IC ID:

Test Report Number:

Issue Date: Customer: Model: FCC Part 15 Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

# 2.9 Radiated Spurious Emissions and Power Line Conducted Emissions (CFR 15.209, 15.207)

The EUT was placed in a state representative of how the device will function under normal operation. The radiated spurious emissions were measured over the frequency range of 150kHz to 30MHz and 30 MHz to the 5<sup>th</sup> harmonic of the fundamental frequency of the intentional transmitter. The test results are shown below.

The EUT is battery operated and does not connect to the AC mains; therefore testing for compliance with 15.207 was not applicable.

Table 6. Intentional Radiated Emissions, 150 kHz - 30 MHz

						- 30 1411 1	_		
Tested By:			Test:	Part 15B	, Para 15.209	Client: Matrix Product			
RKM						Development, Inc.			
			Project: 17-0023			Model: TP	Model: TP1215		
Frequency	Test	Addit	ional	AF+CL-	Corrected Results	Limits	Distance /	Margin	Detection
(MHz)	Data	Fac	tor	PA	(dBuV/m)	(dBuV/m)	Polarization	(dB)	Method
(MHz)	Data (dBuV)		tor B)	PA (dB/m)	(dBuV/m)	(dBuV/m)	Polarization	(dB)	Method

Sample Calculation: N/A

Test Date: February 13, 2017

Tested By

FCC ID: IC ID:

Test Report Number:

Issue Date:

Customer: Model:

FCC Part 15 Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017

Matrix Product Development, Inc.

TP1215

Table 7. Intentional Radiated Emissions, 30-1000 MHz

Tested By: RKM					Client: Matrix Product Development, Inc.				
	 		Project: 17-0023		Model: TP1215				
Frequency (MHz)	Data	Fac	tor	AF+CL- PA	Corrected Results (dBuV/m)	Limits (dBuV/m)	Distance / Polarization	_	Detection Method
	(dBuV)	(dl	B)	(dB/m)					
845.00	30.27		•	-0.74	29.53	46.0	3.0m./HORZ	16.5	PK
717.00	29.06		-	-1.65	27.41	46.0	3.0m./HORZ	18.6	PK
832.00	28.85		-	-1.79	27.06	46.0	3.0m./VERT	18.9	PK
909.00	30.40		-	-0.09	30.31	46.0	3.0m./VERT	15.7	PK
No other emissions found less than 20 dB from the applicable limit.									

1. No additional factor applied.

# Sample Calculation at 845.00 MHz

Magnitude of Measured Frequency	30.27	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-0.74	dB/m
+Additional Factor	0.00	dB
Corrected Result	29.53	dBuV/m

Test Date: February 10, 2017

Tested By

<sup>2.</sup> No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 5<sup>th</sup> harmonic of highest clock frequency

FCC ID: IC ID:

Test Report Number:

Issue Date:

Customer: Model: FCC Part 15 Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023

March 21, 2017 Matrix Product Development, Inc.

TP1215

Table 8. Intentional Radiated Emissions, above 1 GHz

Table of Intelligible Naciated Elinesiene, above 1 one									
Tested By: RKM	Test:			,		Client: Matrix Product Development, Inc			
I CI CIVI									
			Proje	ct: 17-0023		Model: Wyze Temp Apollo			
			•						
Frequency	Test	Addit	ional	AF+CL-	Corrected Results	Limits	Distance /	Margin	Detection
(MHz)	Data	Fac	ctor	PA	(dBuV/m)	(dBuV/m)	Polarization	(dB)	Method
(	(dBuV)		В)	(dB/m)	(======,	(,		()	
1173.00	48.50	-	-	-8.24	40.26	54.0	3.0m./HORZ	13.7	PK
1304.00	54.06	-	-	-7.50	46.56	54.0	3.0m./VERT	7.4	PK
No other emissions found less than 20 dB from the applicable limit.									

<sup>1.</sup> No additional factor applied.

## Sample Calculation at 1173.00 MHz

Magnitude of Measured Frequency	48.50	dBuV
+Antenna Factor + Cable Loss+ Amplifier Gain	-8.24	dB/m
+Duty Cycle	0	dB
Corrected Result	40.26	dBuV/m

Test Date: February 10, 2017

Tested By

<sup>2.</sup> No other signals detected within 20 dB of specification limit. Harmonics investigated up to the 5<sup>th</sup> harmonic of highest clock frequency

US Tech Test Report: FCC ID: IC ID: Test Report Number: Issue Date: Customer:

Model:

FCC Part 15 Certification VGC-WYZEAPOLLO 12661A-WYZEAPOLLO 17-0023 March 21, 2017 Matrix Product Development, Inc. TP1215

# 2.10 Measurement Uncertainty

#### 2.10.1 Conducted Emissions Measurement Uncertainty

Measurement uncertainty (within a 95% confidence level) for this test is ± 2.85 dB.

Not applicable. The EUT is battery powered.

#### 2.10.2 Radiated Emissions Measurement Uncertainty

For a measurement distance of 3 m the measurement uncertainty (with a 95% confidence level) for this test using a Biconical Antenna (30 MHz to 200 MHz) is  $\pm$  5.40 dB. This value includes all elements of measurement.

The measurement uncertainty (with a 95% confidence level) for this test using a Log Periodic Antenna (200 MHz to 1000 MHz) is  $\pm 5.19$  dB

The measurement uncertainty (with a 95% confidence level) for this test using a Horn Antenna is  $\pm$  5.08 dB (3 m distance).

The data listed in this test report does not have sufficient margin to negate the effects of uncertainty. The EUT conditionally passes this requirement.

#### 3. Test Results

The EUT is deemed to have met all the requirements of this subpart.