



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA
PH: 888.472.2424 OR 352.472.5500
FAX: 352.472.2030
EMAIL: INFO@TIMCOENGR.COM
[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 15.231(e)
INDUSTRY CANADA RSS 210 (i8) ANNEX 1 A1.1.5
MOMENTARILY OPERATED DEVICES TEST REPORT

Applicant	MATRIX PRODUCT DEVELOPMENT, INC.
Address	13 N. BIRD STREET SUN PRAIRIE WI 53590 USA
FCC ID	VGC-WYZEPLUS
IC Certification Number	12661A-WYZEPLUS
FCC Standard Applied	47 CFR §15.231 (a)(c)(e), 15.209
Industry Canada Standard Applied	RSS-210 Issue 8 Annex (A1.1.1)(A1.1.3)(A1.1.5)
Product Description	WYZE TEMPERATURE PROBE
Date Sample Received	1/8/2015
Date Tested	1/13/2015
Tested By	Cory Leverett
Approved By	Sid Sanders
Timco Report No.	61AUT15TestReport.docx
Test Results	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL
WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.



TABLE OF CONTENTS

GENERAL REMARKS	3
REPORT SUMMARY	4
TEST ENVIRONMENT	4
TEST SETUP	4
EUT SPECIFICATION	5
DECLARATION OF COMPLIANCE PART 15.231(a) & RSS210 ANNEX 1 A1.1.1	6
TEST PROCEDURES	7
RADIATION INTERFERENCE	8
CALCULATION OF DUTY CYCLE	10
OCCUPIED BANDWIDTH 20dB	12
OCCUPIED BANDWIDTH 99%	13
TEST EQUIPMENT LIST	14

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\MATRIX_VGC\61AUT15\61AUT15TestReport.docx

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

fulfill the general approval requirements as identified in this test report
 not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669

Authorized Signatory Name:

Cory Leverett
Project Manager

Date: **1/15/2015**



Table of Contents

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\MATRIX_VGC\61AUT15\61AUT15TestReport.docx



REPORT SUMMARY

Disclaimer	The test results only relate to the item tested.
Applicable FCC Rule(s)	FCC Pt 15.231(a)(c)(e), Pt 15.209
Applicable IC Rule (s)	RSS 210 Annex 1(A1.1.1)(A1.1.3)(A1.1.5), RSS GEN (i8)
Measurement Standard	ANSI C63.4:2003
Related Report(s) or Approval(s)	NA

Receiver

The receiver portion of this system has been tested and meets all of the FCC requirements per FCC rules Part 15.109. A report was issued and a copy of this report is available upon request.

TEST ENVIRONMENT

Test Facility	The test sites are located at 849 NW State Road 45 Newberry, FL 32669 USA.
Test Condition:	Temperature: 24-26°C Relative humidity: 50-65%

TEST SETUP

Test Exercise (e.g. software description, test signal, etc.):	The EUT was operated in a normal mode to determine the duty cycle and then placed in continuous transmit mode of operation for the radiated emissions.
Deviation from the standard(s)	No deviation from the standard(s)
Modification to the EUT:	No modification was made to the EUT.
Supporting Peripheral Equipment	Not applicable. The device is a stand-alone remote control radio.

[Table of Contents](#)

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\ MATRIX_VGC\61AUT15\61AUT15TestReport.docx



EUT SPECIFICATION

Applicant	MATRIX PRODUCT DEVELOPMENT, INC.		
Description	WYZE TEMPERATURE PROBE		
FCC ID	VGC-WYZEPLUS		
Model Number	TP850		
Power Setting Tested	6.8		
Frequency Range	433.47 – 433.47 MHz		
EUT Power Source	<input type="checkbox"/> 110–120Vac/50– 60Hz		
	<input type="checkbox"/> DC Power		
	<input checked="" type="checkbox"/> Battery Operated Exclusively		
Test Item	<input type="checkbox"/> Prototype	<input checked="" type="checkbox"/> Pre-Production	<input type="checkbox"/> Production
Type of Equipment	<input type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	<input checked="" type="checkbox"/> Portable

[Table of Contents](#)

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\MATRIX_VGC\61AUT15\61AUT15TestReport.docx



DECLARATION OF COMPLIANCE PART 15.231(a) & RSS210 ANNEX 1

A1.1.1

The following information is declared by the radio equipment manufacturer.

Item	Description	Yes	No
1	Does this device transmit a signal that is only used to control another device?		x
2	Does this device send data with this control signal?	x	
3	Does this device send data? Data is, things like: temperature, wind direction, fluid amount, rate of flow, etc.	x	
4	Does this device transmit continuously or automatically?	x	
5	If manually operated does this device stop transmitting within 5 seconds of releasing the button?	n/a	
6	If automatically operated does it deactivate 5 seconds after activation?	x	
7	Does it transmit at regular predetermined intervals?	x	
8	Does it poll or send supervisory information?	x	
	If yes does it do a system integrity check? How often?		x
9	Is this a fire, security or safety of life device?		x
	If YES does the device stop transmitting after the alarm condition is satisfied?	n/a	
10	Duty cycle: Maximum on-time?	7mS	
	On-time in 100 ms? If Other, please specify here	7mS	
11	Modulation technique: Please specify the modulation of the test sample, FM, or AFSK, or FSK, or on-off keying, or others?	FSK	

[Table of Contents](#)

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\MATRIX_VGC\61AUT15\61AUT15TestReport.docx



TEST PROCEDURES

Power line conducted Emissions: The test procedure used was ANSI C63.4-2009.

Spurious Emissions: The test procedure used was ANSI C63.4-2009 using a spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was always greater than the RBW.

Occupied Bandwidth: A small sample of the transmitter output was fed into the spectrum analyzer and a was generated. The vertical scale is set to 10 dB per division.

Formula Of Conversion Factors: The field strength at 3m was established by adding the meter reading of the spectrum analyzer to the antenna correction factor supplied by the antenna manufacturer plus the coax loss. The antenna correction factors are stated in terms of dB/m. The gain of the preselector was accounted for in the spectrum analyzer reading.

Example:

Freq MHz	Meter Reading dB μ V	ACF dB/m	Cable Loss dB	Field Strength dB μ V/m @ 3 m
33	20	+10.36	+1.2	= 31.56

ANSI C63.4-2003 Measurement: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes when necessary and the highest readings were converted to average readings based on the duty cycle.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

Table of Contents

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\ MATRIX_VGC\61AUT15\61AUT15TestReport.docx

RADIATION INTERFERENCE

Rules Part No.: 15.231(e), 15.209, RSS 210 Annex 1 A1.1.5, RSS Gen (i8)

Requirements:

Fundamental Frequency (MHz), excluding restricted band frequencies of FCC PT 15.205 /RSS-Gen	Field Strength of Fundamental (dB μ V/m @ 3m)	Field Strength of Harmonics and Spurious Emissions (dB μ V/m @ 3m)
40.66 to 40.70	60.0(1000uV)	40(100uV)
70 to 130	54(500uV)	34(50uV)
*130 to 174	54.0 to 63.5(500-1500uV)	34 to 43.5(50-150uV)
174 to 260	63.5(1500uV)	43.5(150uV)
*260 to 470	63.5 to 81.94(1500-5000uV)	43.5 to 54(150-500uV)
470 and above	74.0(5000uV)	54.0(500uV)

*Linear interpolations with frequency F in MHz

For 130–174 MHz: FS (microvolts/m) = $(22.73 \times F) - 2454.55$

For 260–470 MHz: FS (microvolts/m) = $(16.67 \times F) - 2833.33$

No fundamental frequency is allowed in the restricted bands.

Spurious emissions in the restricted bands must be less than 54 dB μ V/m or to the limits of FCC pt 15.209, & RSS Gen (i8).

Linear Interpolation Limit for Fundamental of used in this EUT

calculation of limit @ 433.47 MHz:

$$16.666(433.47) - 2833.3333 = 4390.87772 \text{ uV/m}$$

$$20\log(4390.87772) = \mathbf{72.8 \text{ dBuV/m}} \text{ limit @ 433.47 MHz}$$

The limit for average field strength in dBuV/m @ 3 m for the fundamental frequency is **72.8 dB μ V/m**.

The limit for average field strength in dBuV/m for the harmonics and other spurious frequencies is **52.8 dB μ V/m**, unless it is in a restricted band.

[Table of Contents](#)

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\ MATRIX_VGC\61AUT15\61AUT15TestReport.docx

RADIATION INTERFERENCE

Test Data: Field Strength table of emissions

Tuned Frequency MHz	Emission Frequency MHz	Meter Reading dBuV	Ant. Polarity	Coax Loss dB	Correction Factor dB/m	Duty Cycle Factor dB	Field Strength dBuV/m	Margin dB
433.5	433.47	59.7	V	1.44	15.83	20	56.96	15.84
433.5	433.47	74.1	H	1.44	15.83	20	71.39	1.41
433.5	2,167.35	18.2	H	3.02	31.68	20	32.88	19.92
433.5	2,600.82	17.7	V	3.32	32.41	20	33.38	19.42
433.5	2,600.82	19	H	3.32	32.41	20	34.77	18.03
433.5	3,034.29	18.4	V	3.63	32.72	20	34.75	18.05
433.5	3,034.29	19.5	H	3.63	32.72	20	35.81	16.99
433.5	3,467.76	21.9	H	4.02	32.86	20	38.78	14.02
433.5	3,467.76	22.5	V	4.02	32.86	20	39.42	13.38
433.5	3,901.23	22.4	V	4.41	33.25	20	40.05	12.75
433.5	3,901.23	26.2	H	4.41	33.25	20	43.85	8.95
433.5	4,334.70	16.6	V	4.67	33.82	20	35.06	17.74

Note: Emissions that are 20 dB below the limit are not required to be reported, therefore are not presented in this report.

[Table of Contents](#)

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\MATRIX_VGC\61AUT15\61AUT15TestReport.docx



CALCULATION OF DUTY CYCLE

The period of the pulse train is determined by observing it on an oscilloscope or a spectrum analyzer with zero (0) frequency span. A plot is then made of the pulse train with a sweep time of 100 milliseconds. This sweep determines the duration of the pulse train. This sweep allows the determination of the number of and type of pulses, i.e. long & short. Plots are then made showing the duration of each type of pulse and its duration. From the 100-millisecond plot, the number of a given type of pulse is then multiplied by the duration of that type pulse. This allows the calculation of the amount of time the EUT is on within 100 ms.

TEST DATA:

Number of Pulse	1
Pulse Length	2.6 ms
Worst Case On Time	7 ms
Measured On Time	2.6 ms
Period	100
Duty Cycle	2.6 %
Correction	20 dB

$$dB = 20 * \log(ON\ TIME) / PERIOD$$

$$dB = 20 * \log(2.6/100)$$

$$dB = 20 * \log(0.026)$$

$$dB = -31.7$$

See the following plots.

[Table of Contents](#)

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.


FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\ MATRIX_VGC\61AUT15\61AUT15TestReport.docx

CALCULATION OF DUTY CYCLE

TEST DATA: Plot of pulse

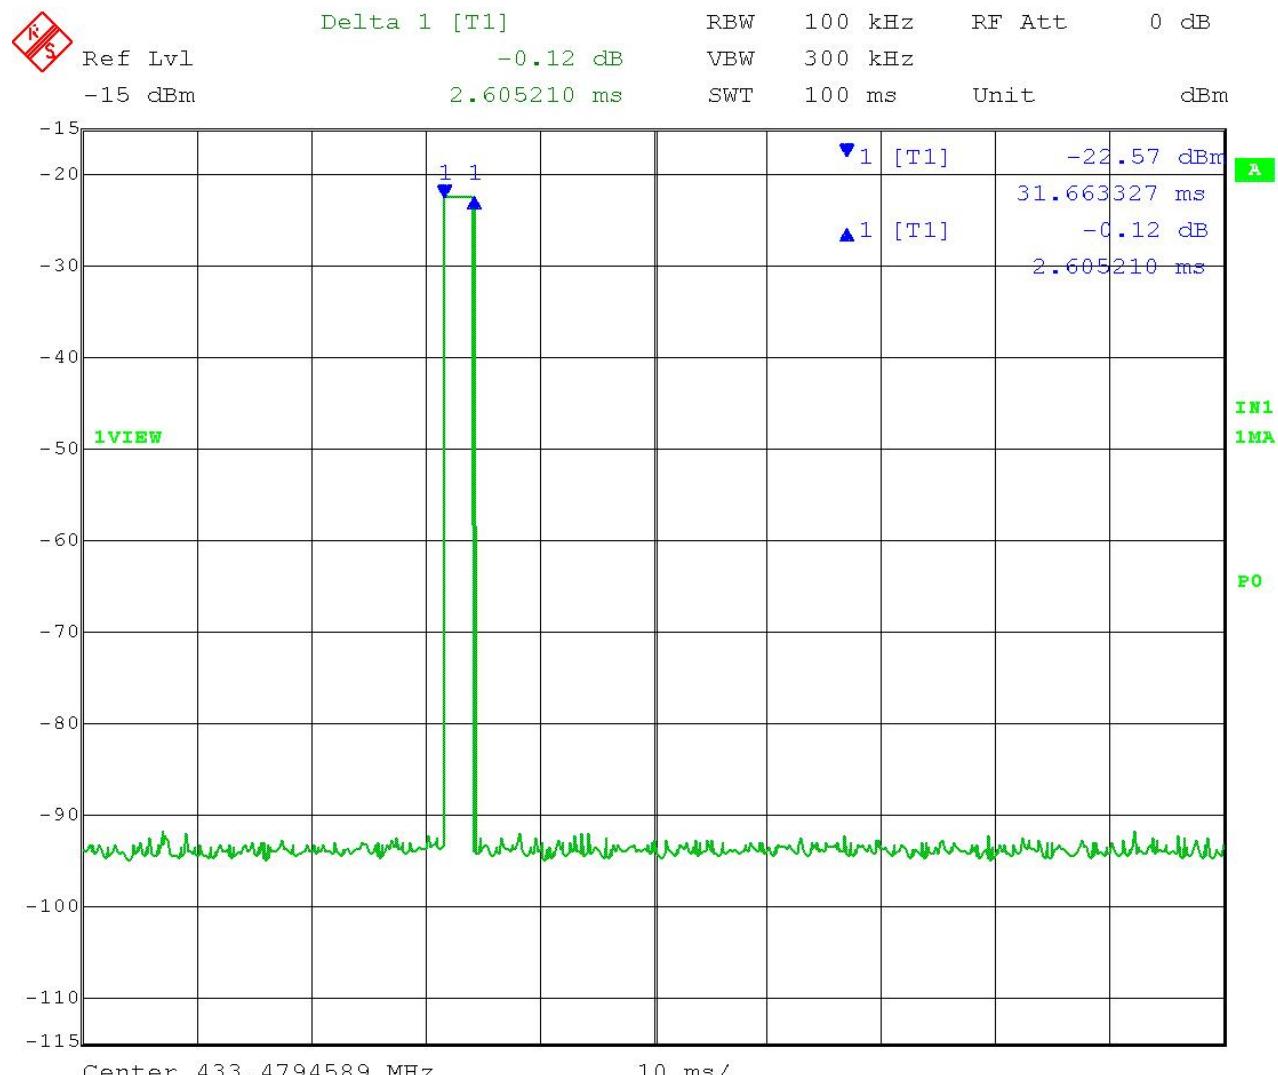

Date: 13.JAN.2015 14:11:49

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\MATRIX_VGC\61AUT15\61AUT15TestReport.docx

OCCUPIED BANDWIDTH 20dB

Rules Part No.: 15.231(C)

Requirements: The bandwidth of the emission shall be no wider than .25% of the center frequency for devices operating between 70 and 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

Test Data:

20 dB Measured Bandwidth	Authorized 20 dB BW Limit	Margin
61.39 KHz	1083 KHz	1021.61 KHz



Date: 14.JAN.2015 10:18:23

[Table of Contents](#)

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\ MATRIX_VGC\61AUT15\61AUT15TestReport.docx

OCCUPIED BANDWIDTH 99%

Rules Part No.: RSS 210 Annex 1 A1.1.3

Requirements: The 99% bandwidth shall be no wider than 0.25% of the centre frequency for devices operating between 70 MHz and 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the centre frequency

Test Data:

99% Measured Bandwidth	Authorized 99% BW Limit	Margin
65.6 KHz	1083 KHz	1017.4 KHz



Date: 14.JAN.2015 10:16:38

Table of Contents

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\ MATRIX_VGC\61AUT15\61AUT15TestReport.docx



TEST EQUIPMENT LIST

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Antenna: Biconical Chamber	Eaton Chamber	94455-1	1057	06/14/13	06/14/15
Antenna: Log-Periodic Chamber	Eaton	96005	1243	05/31/13	05/31/15
LISN (Primary)	Electro-Metrics	EM-7820	2682	02/26/13	02/26/15
3-Meter Semi-Anechoic Chamber	Panashield	N/A	N/A	12/31/13	12/31/15
Ant: Double-Ridged Horn/ETS Horn 1 Ch	ETS-Lindgren Chamber	3117	00035923	06/13/14	06/13/16
Software: EMI Test Receiver	Rohde & Schwarz	EMC 32	Version 4.30.0	N/A	N/A
EMI Test Receiver R & S ESU 40 Chamber	Rohde & Schwarz	ESU 40	100320	03/11/14	03/11/16

*EMI RECEIVER SOFTWARE VERSION

The receiver firmware used was version 4.43 Service Pack 3

[Table of Contents](#)

APPLICANT: MATRIX PRODUCT DEVELOPMENT, INC.

FCC ID: VGC-WYZEPLUS

IC Cert: 12661A-WYZEPLUS

REPORT: M\MATRIX_VGC\61AUT15\61AUT15TestReport.docx

Page 14 of 14