

TEST REPORT

Report Number: 3184783MPK-001A Project Number: 3184783 Report Date: December 03, 2009

Testing performed on the
Advanced Control Pedal & Remote Control Master
for the WHITESTAR SignatureTM system NGP680702
Model: Advanced Control Pedal & Remote Control Master 2.0
FCC ID: VGESIGREMM2
IC: 7228A-SIGREMM2

to

FCC Part 15.247 and RSS-210 Annex 8 For

Advanced Medical Optics

Test Authorized by:

Test Performed by:

Intertek 1365 Adams Court	Advanced Medical Optics 1700 E. Saint Andrew Place
Menlo Park, CA 94025	Santa Ana, CA 92705 USA
Prepared by: (**) Shove	Date: December 03, 2009
Krishna K Vemuri	
Reviewed by:	Date: December 03, 2009
Ollie Moyrong	

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to copy or distribute this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.

EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control

Master 2.0

File: 3184783MPK-001A Page 1 of 83



Report No. 3184783MPK-001A

Equipment Under Test: Advanced Control Pedal & Ren Master for the WHITESTAR Signat NGP680702		
Trade Name:	Advanced Medical Optics	
Model No.:	Advanced Control Pedal & Remote Control Master 2.0	
FCC ID:	VGESIGREMM2	
IC:	7228A-SIGREMM2	
Applicant:	Advanced Medical Optics	
Contact:	Mr. Dung Ma	
Address:	1700 E. Saint Andrew Place	
	Santa Ana, CA 92705	
Country	USA	
Tel. Number:	714-247-8579	
Fax number:	714-247-8678	
Applicable Regulation:	FCC Part 15, Subpart C	
	RSS-210 Annex 8	
Test Site Location:	ITS – Site 1	
	1365 Adams Drive	
	Menlo Park, CA 94025	
Date of Test:	June 26 to August 22, 2009	
We attest to the accuracy of this report:		
(R) shove	oll & X	
Krishna K Vemuri	Ollie Moyrong	
Test Engineer	Engineering Manager	

File: 3184783MPK-001A



TABLE OF CONTENTS

1.0	Intro	oduction	
	1.1	Summary of Tests	4
2.0	Gene	eral Description	5
	2.1	Product Description	
	2.2	Related Submittal(s) Grants	6
	2.3	Test Methodology	7
	2.4	Test Facility	7
3.0	Syste	em Test Configuration	8
	3.1	Support Equipment	
	3.2	Block Diagram of Test Setup	8
	3.4	Software Exercise Program	9
	3.5	Mode of Operation During Test	9
	3.6	Modifications Required for Compliance	
4.0	Meas	surement Results	10
	4.1	Conducted Output Power at Antenna Terminals	10
	4.2	Hopping Channel 20-dB Bandwidth	17
	4.3	Carrier Frequency Separation	24
	4.4	Number of Hopping Channels	26
	4.5	Average Channel Occupancy Time	28
	4.6	Out-of Band-Conducted Emissions	31
	4.7	Transmitter Radiated Emissions	65
	4.8	Radiated Emissions from Digital Parts and Receiver	74
	4.9	AC Line Conducted Emission	77
5.0	RF E	Exposure evaluation	78
6.0	List	of test equipment	79
7.0	Docu	ıment History	80
8.0	Appe	endix A –Graphs for Duty cycle measurement	81

File: 3184783MPK-001A Page 3 of 83



1.0 Introduction

The Equipment under Test (EUT) is a device with two Bluetooth transceivers operating in the 2.4GHz frequency band.

This report is designed to show compliance of the 2.4 GHz transceiver with FCC Part 15.247 and RSS-210 requirements.

1.1 Summary of Tests

TEST	REFERENCE FCC 17.247	REFERENCE RSS-210	RESULTS
Output power	15.247(b)	A8.4(2)	Complies
20-dB Bandwidth	15.247(a)(1)	A8.1(a)	Complies
Channel Separation	15.247(a)(1)	A8.1(b)	Complies
Number of Hopping Channels	15.247(a)(1)	A8.1(d)	Complies
Average Channel Occupancy Time	15.47(a)(1)	A8.1(d)	Complies
Out-of-band Antenna Conducted Emission	15.247(c)	A8.5	Complies
Out-of-Band Radiated Emission (except emissions in Restricted Bands)	15.247(c)	A8.5	Complies
Radiated Emission in Restricted Bands	15.247(c), 15.205	2.2	Complies
RF exposure	15.247(i)	RSS-102	Complies
AC Conducted Emission	15.207	RSS-GEN	Not Applicable. The EUT does not have any direct connection to public power network. In normal use, EUT is installed inside the host unit and it is DC powered internally.
Radiated Emission from Digital Parts and receiver	15.109	ICES-003	Complies

EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 4 of 83



2.0 General Description

2.1 Product Description

The WHITESTAR Signature Advanced Control Pedal & Remote Control system consists of the Advanced Control Pedal (¹RF module for a Foot Pedal control mounted in main system) and Remote Control Master 2.0 (²RF module for remote control of Monitor mounted in main system), Advanced Control Pedal Slave (³RF module for a Foot Pedal control mounted outside of main system) and Remote Control Slave 2.0 (⁴RF module for remote control of Monitor mounted outside of main system).

The ¹RF module for a Foot Pedal control mounted in main system and ³RF module for a Foot Pedal control mounted outside of main system consists two National Semiconductor's LMX98XX series Bluetooth radios ICs (transceivers), operating in the 2.4 GHz frequency band. Only one transmitter can report the data to the host at any given time. This radio subsystem is used to communicate the footpedal control signal to the WHITESTAR SignatureTM system for use in cataract surgery.

The ²RF module for remote control of Monitor mounted in main system and ⁴RF module for remote control of Monitor mounted outside of main system consists one National Semiconductor's LMX98XX series Bluetooth radios ICs (transceivers), operating in the 2.4 GHz frequency band. This radio subsystem is used to communicate the monitor control signal to the WHITESTAR SignatureTM system for use in cataract surgery.

This report covers the ¹RF module for a Foot Pedal control mounted in main system and the ²RF module for remote control of Monitor mounted in main system is covered in separate report #3191467MPK-001.

³RF module for a Foot Pedal control mounted outside of main system and ⁴RF module for remote control of Monitor mounted outside of main system are already FCC and Industry Canada certified.

File: 3184783MPK-001A Page 5 of 83



Overview of the EUT (Master)

Applicant	Advanced Medical Optics	
	1700 E. Saint Andrew Place	
	Santa Ana, CA 92705 USA	
Manufacturer name &	Advanced Medical Optics	
address	1700 E. Saint Andrew Place	
	Santa Ana, CA 92705 USA	
Trade Name & Part No.	Advanced Control Pedal & Remote Control Master 2.0	
FCC Identifier	VGESIGREMM2	
IC	7228A-SIGREMM2	
Use of Product	WhiteStar Signature Advanced Control Pedal	
Type of Transmission	Spread Spectrum, Frequency Hopping	
Rated RF Output	0.55 mW	
Frequency Range	2402-2480 MHz	
Number of Channel(s)	79	
Modulation Type	GFSK	
Data Rate	1 Mbps	
Antenna(s) type & Gain	Omnidirectional Dipole, 4.1 dBi,	

A pre-production version of the sample was received on June 25, 2009 in good condition. As declared by the Applicant, it is identical to production units.

Test start date June 26, 2009 Test end date: August 22, 2009

2.2 Related Submittal(s) Grants

None.

EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 6 of 83



2.3 Test Methodology

Radiated and AC Line conducted emissions measurements were performed according to the procedures in ANSI C63.4 (2003). Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Data Sheet"** of this Application. All other measurements were made in accordance with the procedures described in DA 00-705.

2.4 Test Facility

Then radiated emission test site and conducted measurement facility used to collect the data is 10m semi-anechoic chamber located in Menlo Park, California. This test facility and site measurement data have been fully placed on file with the FCC.

File: 3184783MPK-001A Page 7 of 83




3.0 System Test Configuration

3.1 Support Equipment

Item #	Description	Model No.	Serial No.
1	LAMBDA power supply	Vega 650	2050820220
2	Laptop	Compaq Evo N610c	INTERTEK LAB PC#1

3.2 Block Diagram of Test Setup

The diagram shown below details the interconnection of the EUT and support equipment. For specific layout, refer to the test configuration photograph in the relevant section of this report.

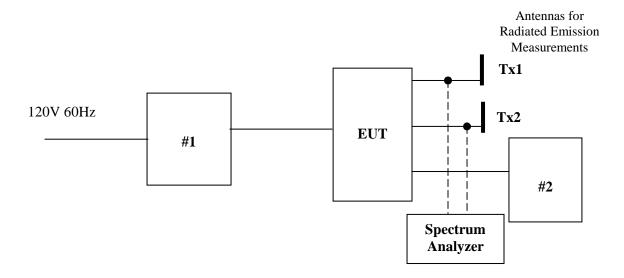

S = Shielded	F = With Ferrite
U = Unshielded	m = Length in Meters

EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 8 of 83



3.3 Justification

For radiated emission measurements the EUT is placed on a non-conductive table. The EUT is attached to peripherals and they are connected and operational (as typical as possible). The EUT is wired to transmit full power. During testing, all cables are manipulated to produce worst-case emissions.

In normal operation, EUT is installed inside the host unit and it is DC powered internally. For testing the EUT was attached to a test board, connected to a laptop, which provides the power to the EUT and control the radio by the test software.

Since two transmitters are identical by design, all RF conducted tests were performed on one transmitter and limited tests (output power and spurious emissions) were performed on the second transmitter. Radiated emission tests were performed on each of the transmitters independently operating.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was provided by the Applicant.

3.5 Mode of Operation During Test

The EUT was tested in two modes: hopping mode as in normal use and hopping disabled mode in which the EUT was transmitting at the lowest, middle, and highest channels (frequencies).

3.6 Modifications Required for Compliance

No modifications were installed by Intertek Testing Services during compliance testing in order to bring the product into compliance (Please note that this list does not include changes made specifically by Advanced Medical Optics prior to compliance testing).

File: 3184783MPK-001A Page 9 of 83



4.0 Measurement Results

4.1 Conducted Output Power at Antenna Terminals FCC 15.247(b)(1)

Requirements

For systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, the maximum peak output power is 1 watt (30 dBm), for all other systems 0.125 W (21 dBm).

Procedure

The antenna port of the EUT was connected to the input of a spectrum analyzer. Power was read directly and cable loss correction was added to the reading to obtain the power at the EUT antenna terminal.

Test Results

Transmitter 1 (Tx1)

Frequency (MHz)	Output in dBm	Output in mW	Plot number
2402	-2.6	0.550	1.1
2440	-3.0	0.501	1.2
2480	-3.4	0.457	1.3

Transmitter 2 (Tx2)

Frequency (MHz)	Output in dBm	Output in mW	Plot number
2402	-7.1	0.195	1.4
2440	-7.2	0.191	1.5
2480	-7.3	0.186	1.6


Notes: 1. Hopping function was disabled during the test.

2. The EUT's antenna has less than 6 dBi gain.


EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 10 of 83





Plot 1.1

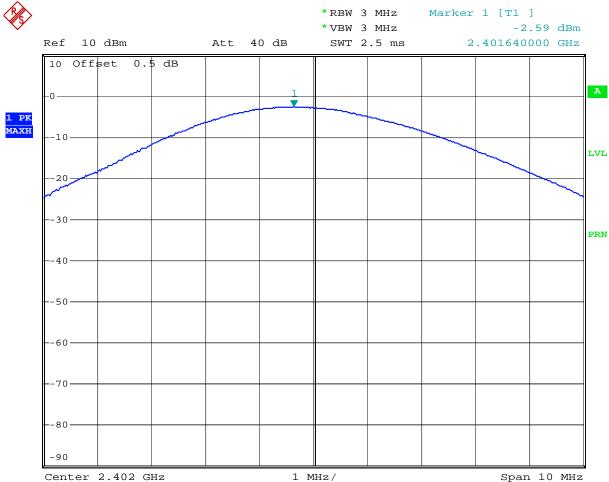


Comment: Output power, Tx1 Date: 7.JUL.2009 15:15:34





Plot 1.2

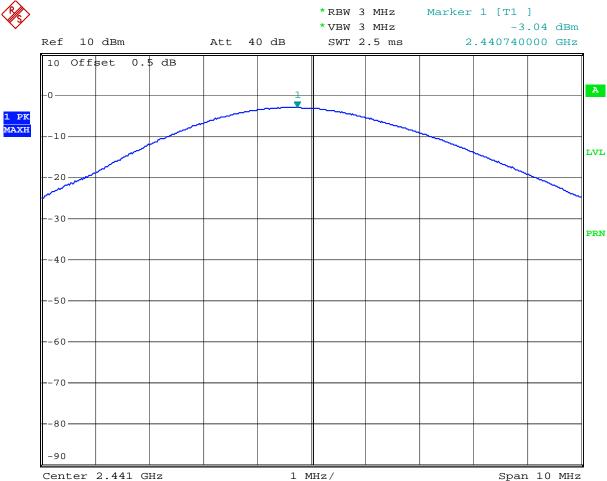


Comment: Output power, Tx1 Date: 7.JUL.2009 15:18:08

File: 3184783MPK-001A Page 12 of 83





Plot 1.3

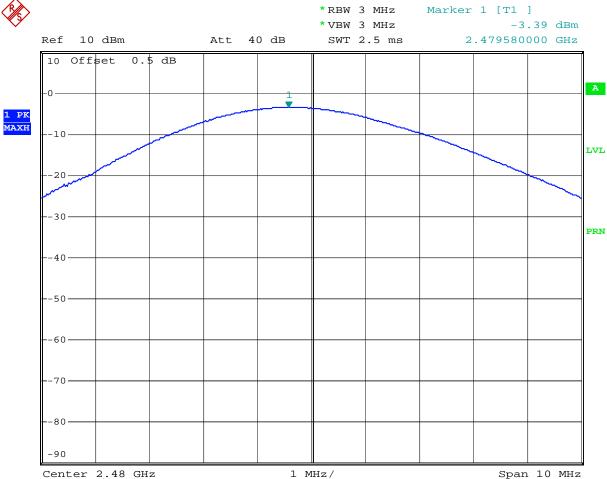


Comment: Output power, Tx1 Date: 7.JUL.2009 15:22:42

File: 3184783MPK-001A Page 13 of 83





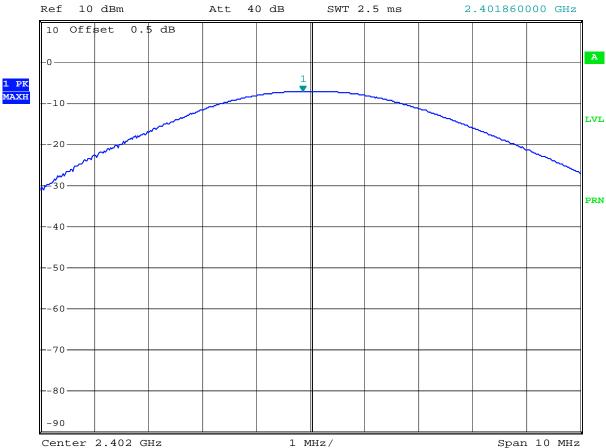

Plot 1.4


Comment: Output power, Tx2
Date: 7.JUL.2009 15:28:10

File: 3184783MPK-001A Page 14 of 83





Plot 1.5

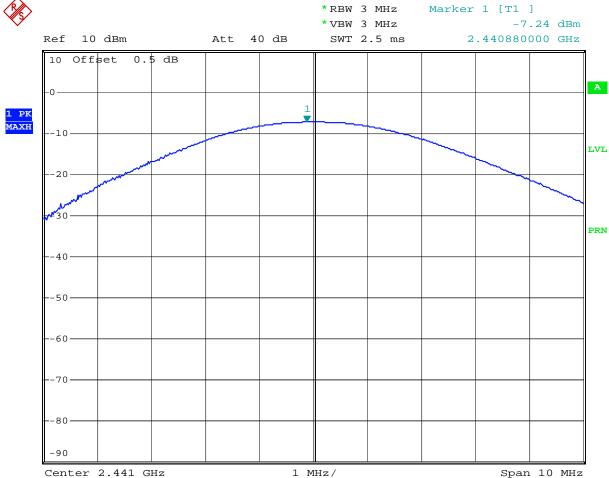


Comment: Output power, Tx2 Date: 7.JUL.2009 15:30:09





Plot 1.6

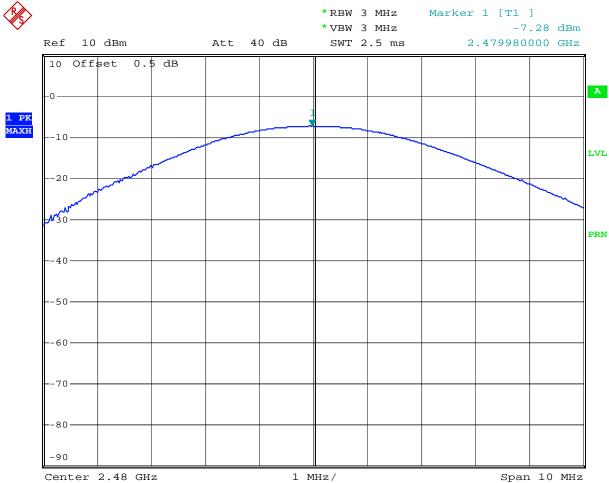

Comment: Output power, Tx2 Date: 7.JUL.2009 15:32:53

File: 3184783MPK-001A

Page 16 of 83



4.2 Hopping Channel 20-dB Bandwidth FCC 15.247(a)

Procedure

The antenna port of the EUT was connected to the input of a spectrum analyzer.

The spectrum analyzer resolution bandwidth was set to approximately 1% of the 20-dB Bandwidth. The 20-dB Bandwidth was measured by using the DELTA MARKER function of the analyzer.

In addition, the occupied bandwidth (99%) was measured.

Test Results

Frequency (MHz)	20-dB channel bandwidth (MHz)	Plot
	` '	
2402	1.020	2.1
2440	1.020	2.2
2480	1.020	2.3

Frequency (MHz)	Occupied bandwidth	Plot
	(MHz)	
2402	0.932	2.4
2440	0.932	2.5
2480	0.932	2.6


EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 17 of 83







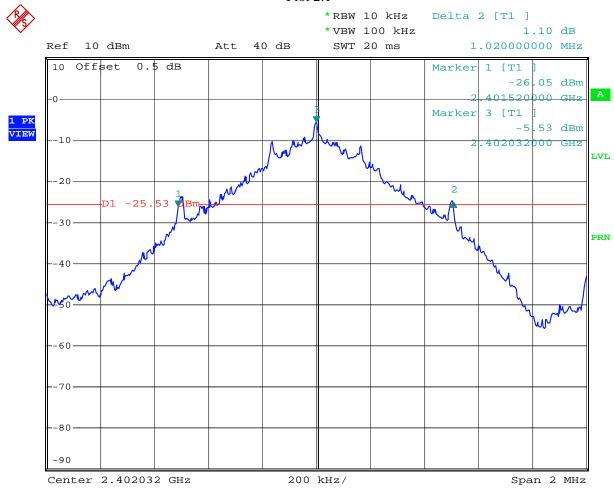


Comment: 20-dB Bandwidth, Tx1 Date: 7.JUL.2009 15:44:45

File: 3184783MPK-001A Page 18 of 83





Plot 2.2

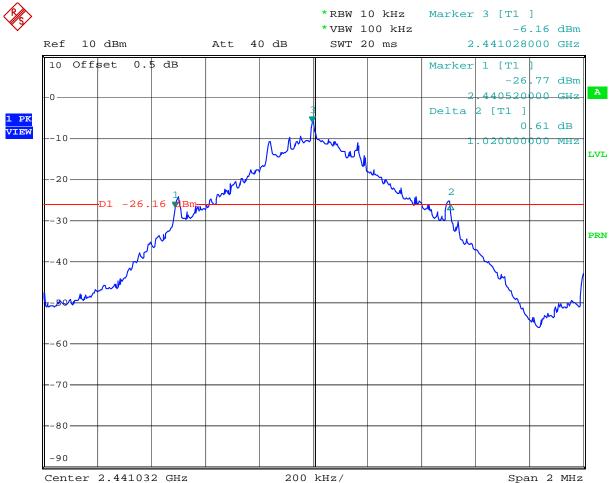


Comment: 20-dB Bandwidth, Tx1
Date: 7.JUL.2009 15:47:43

File: 3184783MPK-001A Page 19 of 83





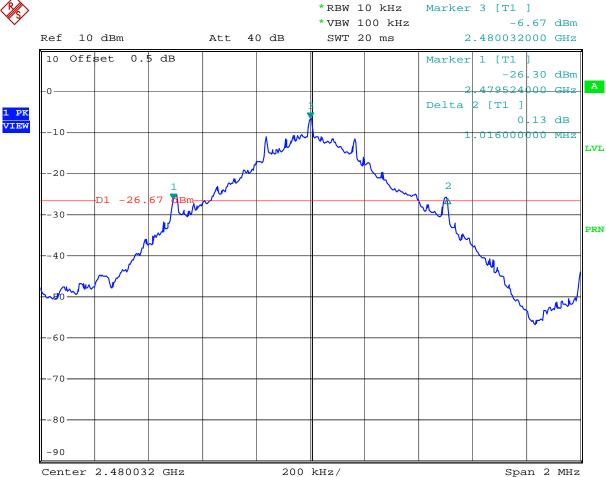


Comment: 20-dB Bandwidth, Tx1
Date: 7.JUL.2009 15:52:21

File: 3184783MPK-001A Page 20 of 83





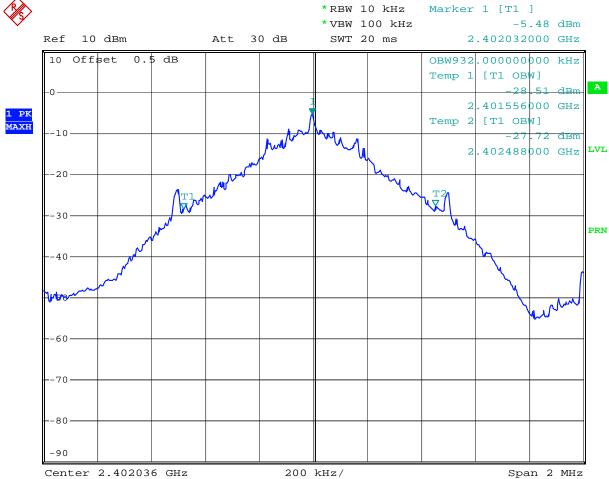


Comment: Occupied Bandwidth, Tx1
Date: 7.JUL.2009 15:55:06

File: 3184783MPK-001A Page 21 of 83





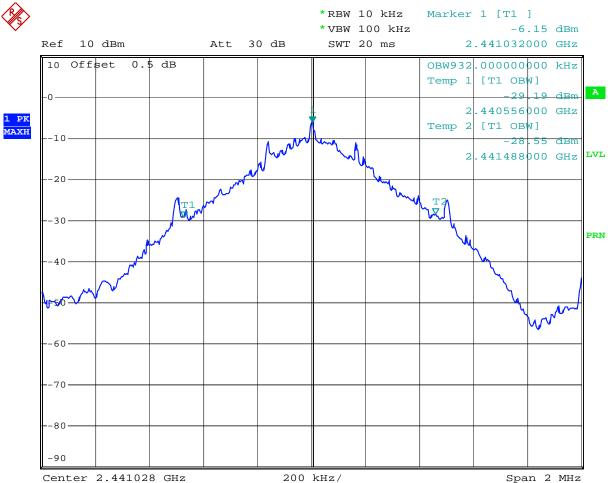

Plot 2.5


Comment: Occupied Bandwidth, Tx1
Date: 7.JUL.2009 15:56:31

File: 3184783MPK-001A Page 22 of 83







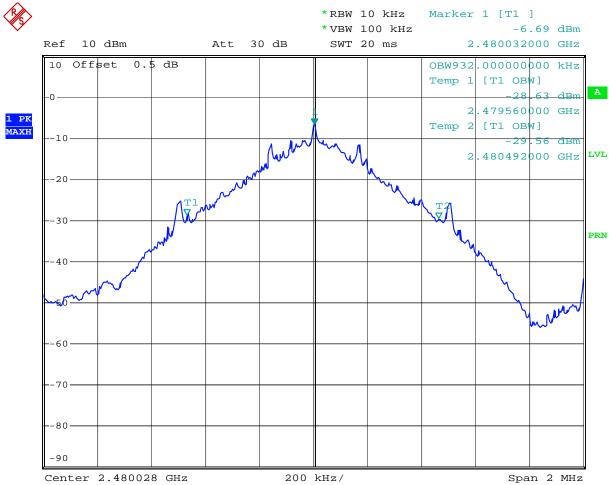

Comment: Occupied Bandwidth, Tx1 Date: 7.JUL.2009 15:57:49

File: 3184783MPK-001A Page 23 of 83



4.3 Carrier Frequency Separation FCC Ref: 15.247(a)(1)

Requirement

Systems shall have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20-dB bandwidth of the hopping channel, whichever is greater.

Procedure

Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and compared against the limit.


Test Results

Please refer to the attached spectrum analyzer plot # 3.1 for the test result. The channel separation is 1.008 MHz.

File: 3184783MPK-001A Page 24 of 83





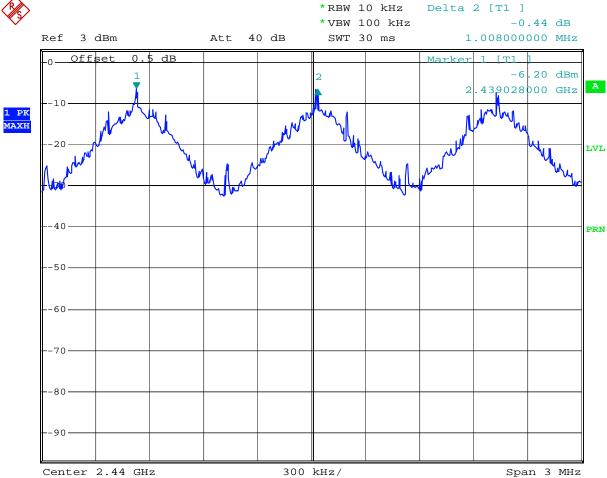

Comment: Carrier frequency separation, Tx1

Date: 7.JUL.2009 17:25:17

File: 3184783MPK-001A Page 25 of 83



4.4 Number of Hopping Channels FCC Ref: 15.247(a)(1)(iii)

Requirement

Systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping channels.

Procedure

With the analyzer set to MAX HOLD, readings were taken for 2 - 3 minutes The channel peaks so recorded and compared to the minimum number of channels required in the regulation.

Test Results

Number of hopping channels	79

Refer to attached spectrum analyzer charts: Plots 4.1


EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0


File: 3184783MPK-001A Page 26 of 83





Plot 4.1



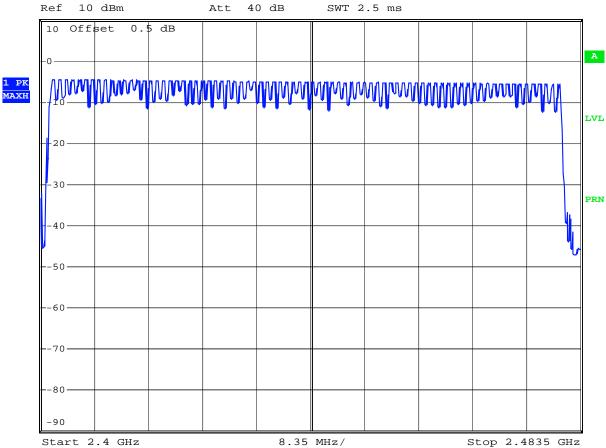

Comment: Number of hopping channels, Tx1

Date: 7.JUL.2009 17:33:17

File: 3184783MPK-001A Page 27 of 83



4.5 Average Channel Occupancy Time FCC 15.247(a)(1)(ii)(iii)

Requirement

For systems operating in the 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 second within a period of 0.4 second multiplied by the number of hopping channels employed.

Procedure

The spectrum analyzer center frequency was set to one of the known hopping channels, the SPAN was set to ZERO SPANS, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

Since the radio is employed 79 hopping channels, the Occupancy Time was calculated for the period of 0.4 * 79 = 31.6 sec.

Test Results

Occupancy Time (see plots 5.1 and 5.2)


0.002895 * 13 * 10 = 0.37635 sec.

Refer to attached spectrum analyzer plots 5.1-5.2 for details.

File: 3184783MPK-001A Page 28 of 83



Plot 5.1

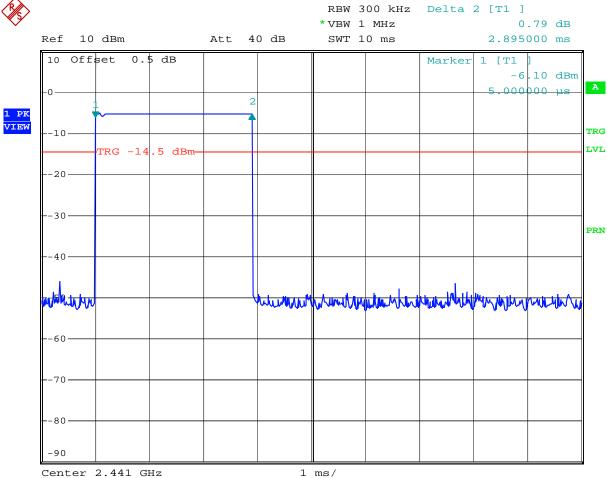


Comment: Dwell time, Tx1

Date: 7.JUL.2009 17:50:41





Plot 5.2

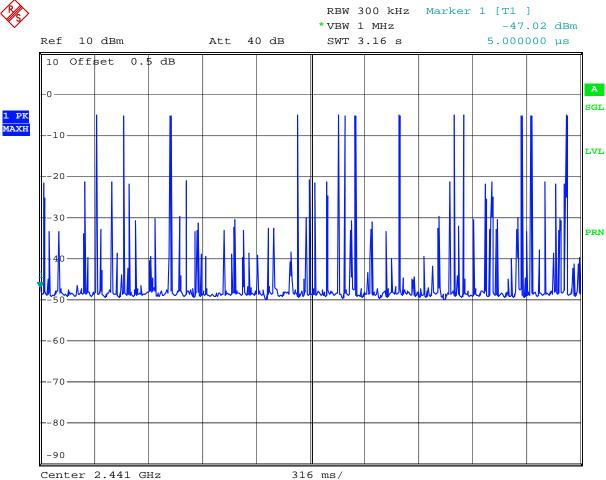

Comment: Dwell time, Tx1

Date: 7.JUL.2009 18:00:13

File: 3184783MPK-001A Page 30 of 83



4.6 Out-of Band-Conducted Emissions FCC 15.247(c)

Requirement

In any 100 kHz bandwidth outside the EUT pass-band, the RF power shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

Procedure

A spectrum analyzer was connected to the antenna port of the transmitter. Analyzer Resolution Bandwidth was set to 100 kHz. For each channel investigated, the in-band and out-of-band emission measurements were performed. The out-of-band emissions were measured from 30 MHz to 25 GHz.

Test Result

Refer to the following plots for the test result:

Transmitter 1 (Tx1)

Description	Comments	Plot number
In-band Emissions, F=2402 MHz		6.1
In-band Emissions, F=2441 MHz		6.5
In-band Emissions, F=2480 MHz		6.9
Emissions on the low band-edge frequency	Fixed channel, 2402 MHz	6.13
Emissions on the low band-edge frequency	Hopping mode	6.14
Emissions on the high band-edge frequency	Fixed channel, 2480 MHz	6.15
Emissions on the high band-edge frequency	Hopping mode	6.16
Out-of-band low Channel Emissions	Fixed channel, 2402 MHz	6.2 - 6.4
Out-of-band middle Channel Emissions	Fixed channel, 2441 MHz	6.6 - 6.8
Out-of-band high Channel Emissions	Fixed channel, 2480 MHz	6.10 - 6.12

The attenuation is more than 20 dB.

File: 3184783MPK-001A Page 31 of 83




Transmitter 1 (Tx2)

Description	Comments	Plot number
In-band Emissions, F=2402 MHz		6.17
In-band Emissions, F=2441 MHz		6.21
In-band Emissions, F=2480 MHz		6.25
Emissions on the low band-edge frequency	Fixed channel, 2402 MHz	6.29
Emissions on the low band-edge frequency	Hopping mode	6.30
Emissions on the high band-edge frequency	Fixed channel, 2480 MHz	6.31
Emissions on the high band-edge frequency	Hopping mode	6.32
Out-of-band low Channel Emissions	Fixed channel, 2402 MHz	6.18 - 6.20
Out-of-band middle Channel Emissions	Fixed channel, 2441 MHz	6.22 - 6.24
Out-of-band high Channel Emissions	Fixed channel, 2480 MHz	6.26 - 6.28

The attenuation is more than 20 dB.

File: 3184783MPK-001A Page 32 of 83



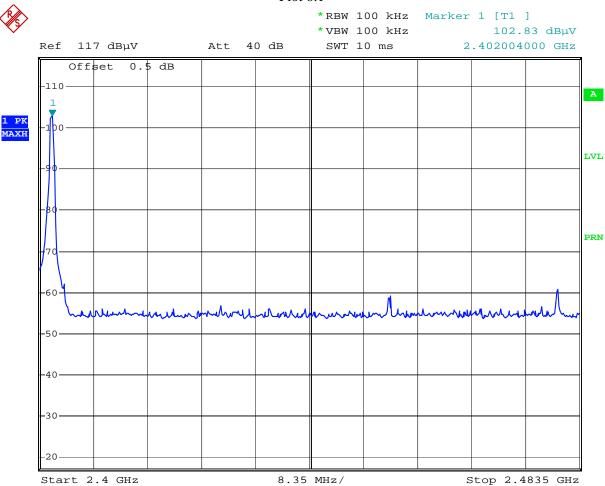


Comment: In-band emissions, Freq 2402MHz, Tx1

Date: 7.JUL.2009 16:15:26

Start 2.4 GHz

File: 3184783MPK-001A Page 33 of 83



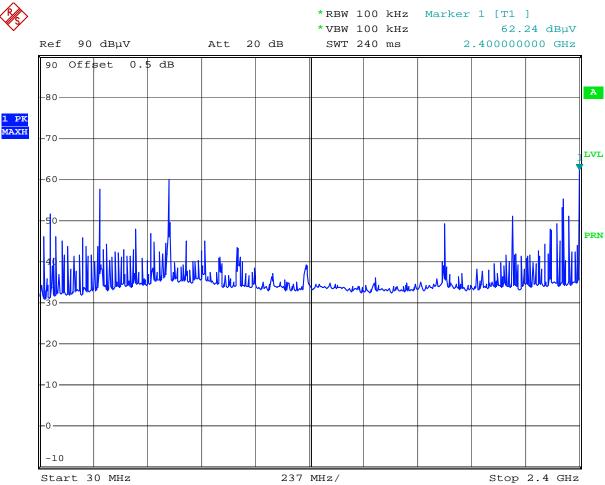


Comment: Spurious emissions, Freq 2402MHz, Tx1

Date: 7.JUL.2009 16:17:57

File: 3184783MPK-001A Page 34 of 83



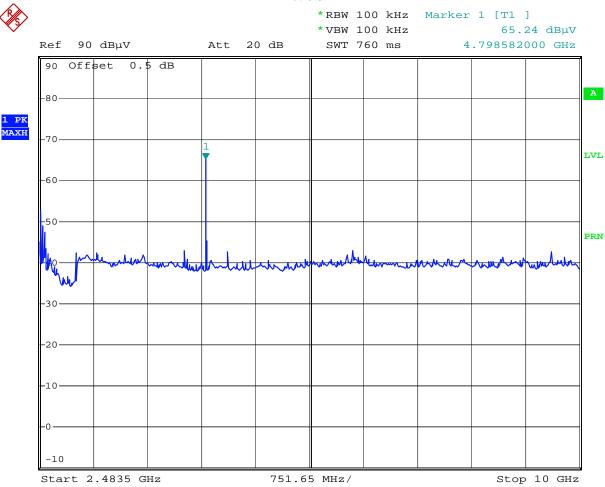


Comment: Spurious emissions, Freq 2402MHz, Tx1

Date: 7.JUL.2009 16:21:38

File: 3184783MPK-001A Page 35 of 83



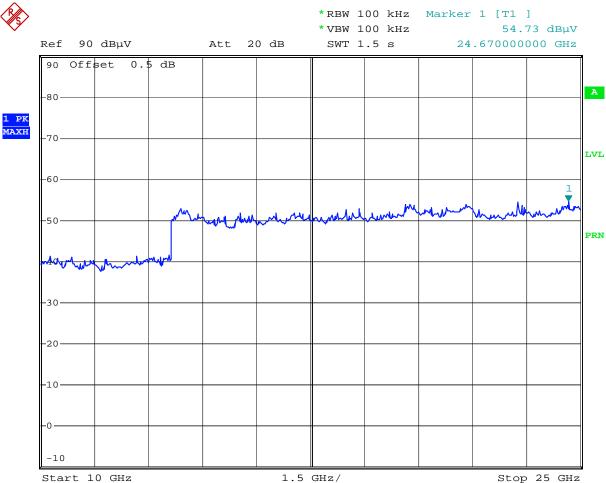


Comment: Spurious emissions, Freq 2402MHz, Tx1

Date: 7.JUL.2009 16:22:34

File: 3184783MPK-001A Page 36 of 83





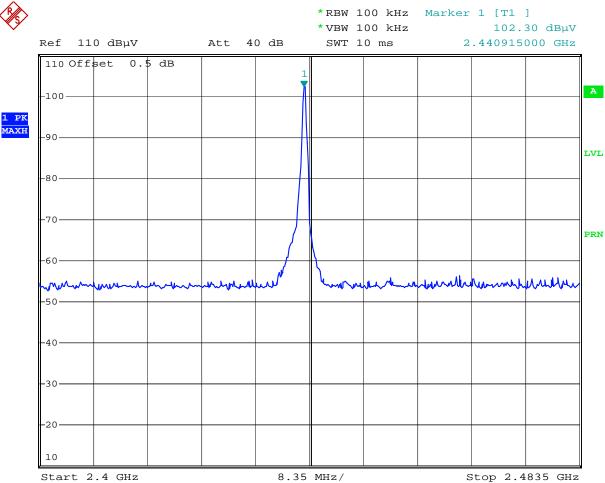


Comment: In-band emissions, Freq 2441MHz, Tx1

Date: 7.JUL.2009 16:30:11

File: 3184783MPK-001A Page 37 of 83



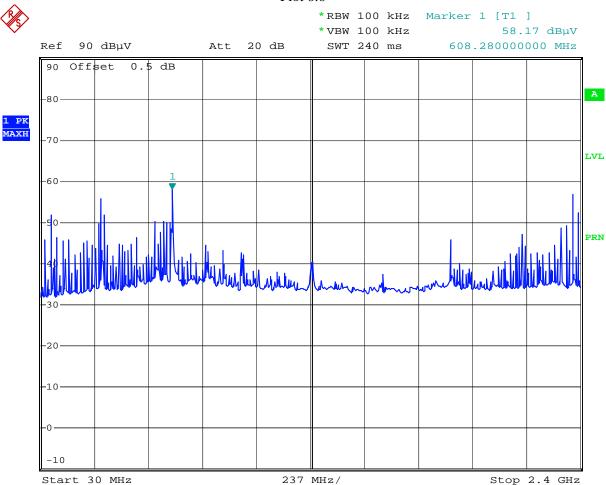


Comment: Spurious emissions, Freq 2441MHz, Tx1

Date: 7.JUL.2009 16:32:46

File: 3184783MPK-001A Page 38 of 83



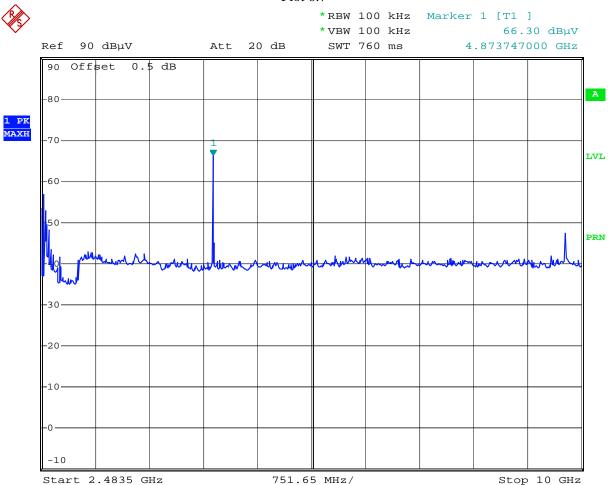


Comment: Spurious emissions, Freq 2441MHz, Tx1

Date: 7.JUL.2009 16:34:57

File: 3184783MPK-001A Page 39 of 83



Plot 6.8

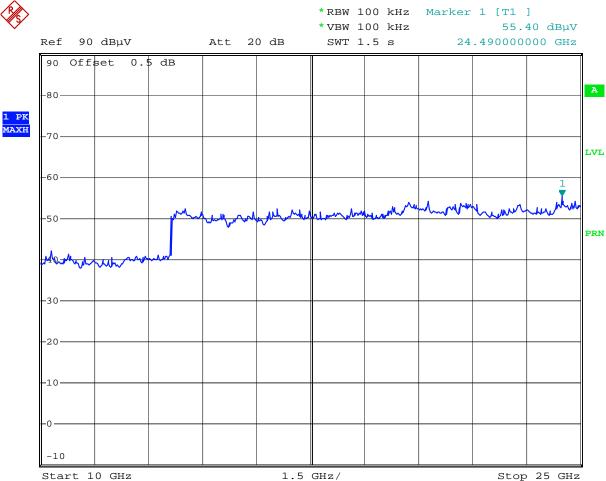


Comment: Spurious emissions, Freq 2441MHz, Tx1

Date: 7.JUL.2009 16:36:00

File: 3184783MPK-001A Page 40 of 83





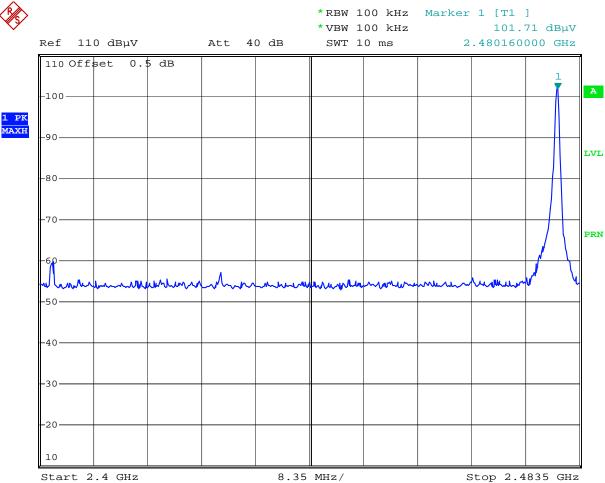


Comment: In-band emissions, Freq 2480MHz, Tx1

Date: 7.JUL.2009 16:42:32

File: 3184783MPK-001A Page 41 of 83





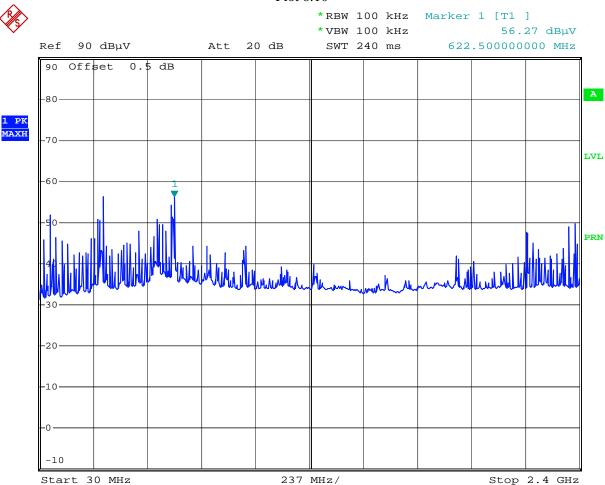


Comment: Spurious emissions, Freq 2480MHz, Tx1

Date: 7.JUL.2009 16:58:37

File: 3184783MPK-001A Page 42 of 83





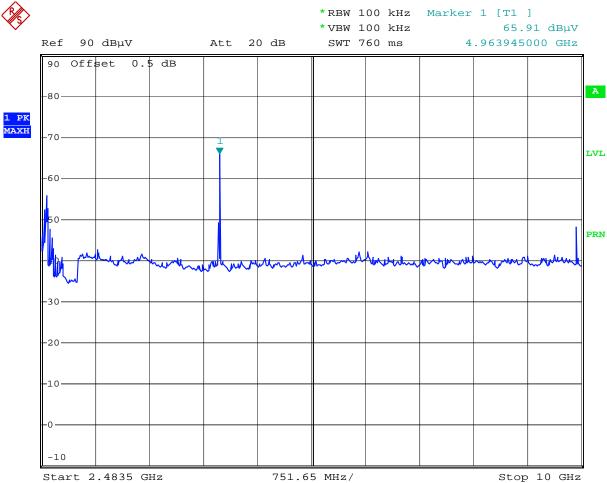


Comment: Spurious emissions, Freq 2480MHz, Tx1

Date: 7.JUL.2009 16:59:37

File: 3184783MPK-001A Page 43 of 83



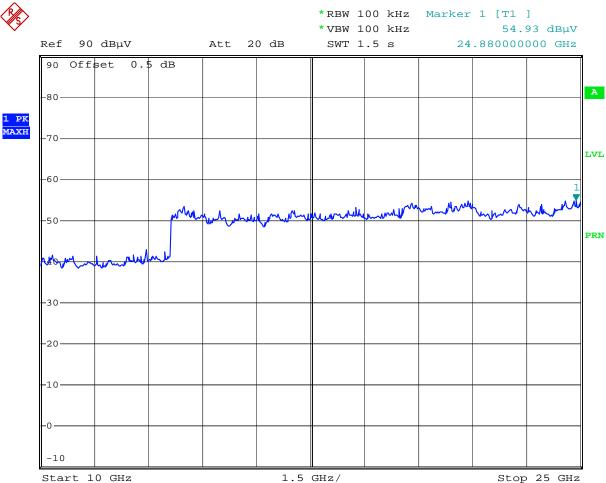


Comment: Spurious emissions, Freq 2480MHz, Tx1

Date: 7.JUL.2009 17:01:47

File: 3184783MPK-001A Page 44 of 83





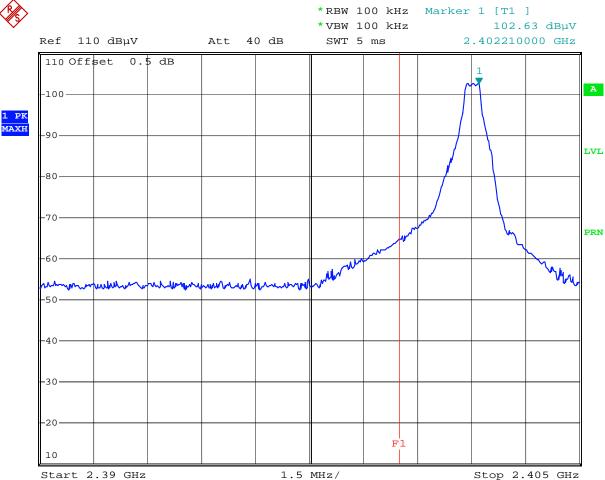


Comment: Spurious emissions, Freq 2402MHz, Tx1

Date: 7.JUL.2009 17:07:56

File: 3184783MPK-001A Page 45 of 83





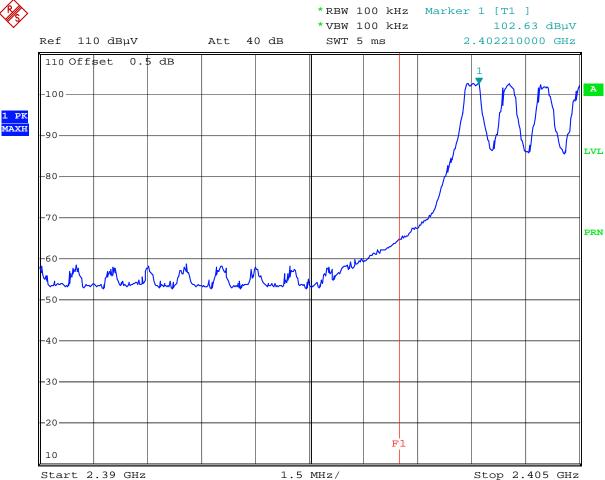


Comment: Spurious emissions, Freq 2402MHz, Tx1

Date: 7.JUL.2009 17:09:11

File: 3184783MPK-001A Page 46 of 83





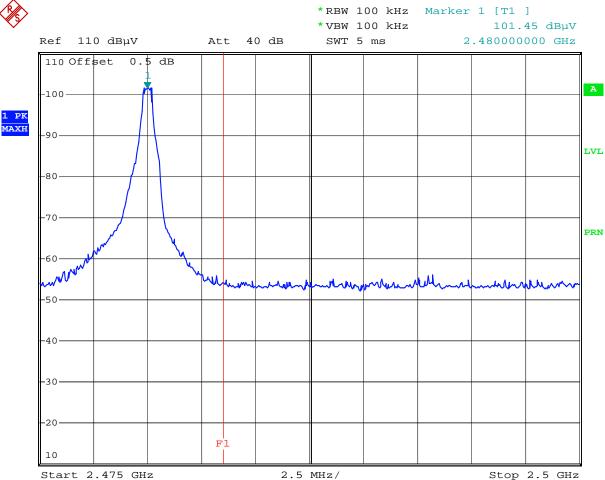


Comment: Spurious emissions, Freq 2480MHz, Tx1

7.JUL.2009 17:13:13

File: 3184783MPK-001A Page 47 of 83





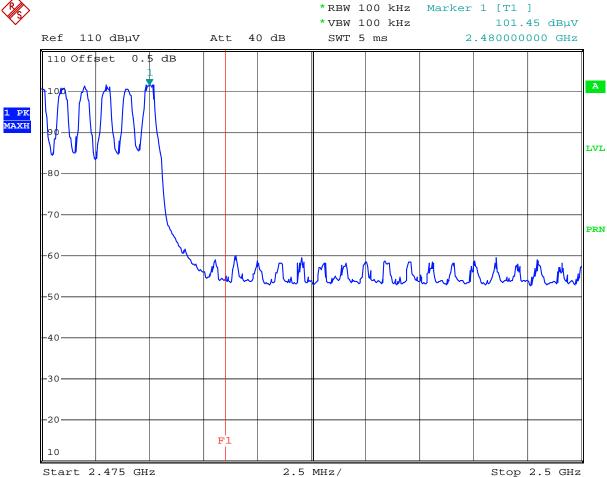


Comment: Spurious emissions, Freq 2480MHz, Tx1

Date: 7.JUL.2009 17:14:30

File: 3184783MPK-001A Page 48 of 83



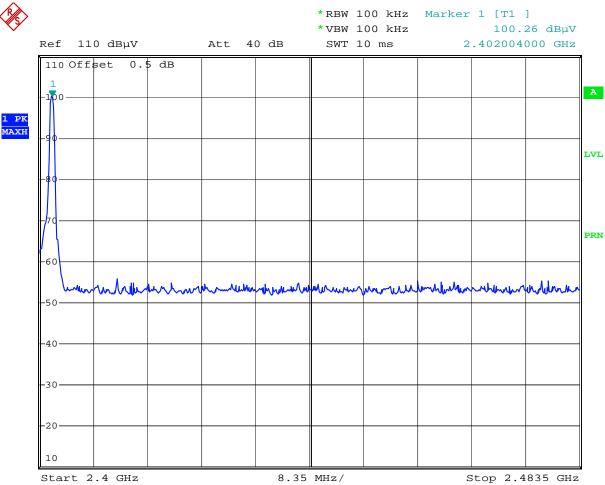


Comment: In-band emissions, Freq 2402MHz, Tx2

Date: 8.JUL.2009 10:23:03

File: 3184783MPK-001A Page 49 of 83





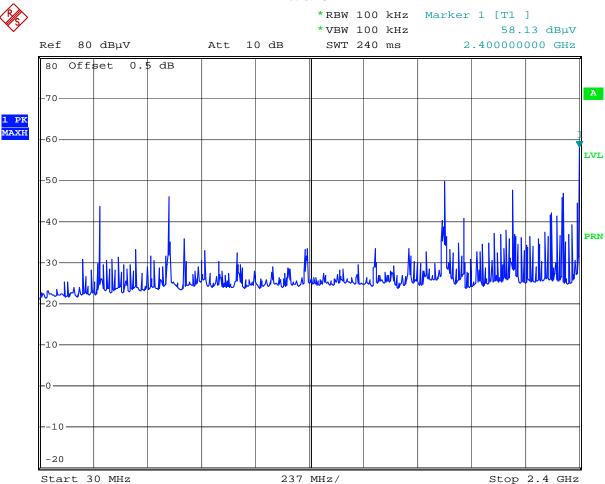


Comment: Spurious emissions, Freq 2402MHz, Tx2

Date: 8.JUL.2009 10:26:46

File: 3184783MPK-001A Page 50 of 83





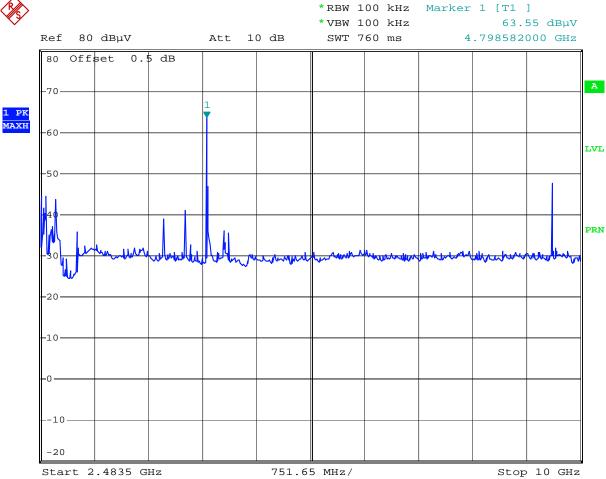


Comment: Spurious emissions, Freq 2402MHz, Tx2 $\,$

Date: 8.JUL.2009 10:27:45

File: 3184783MPK-001A Page 51 of 83



Plot 6.20

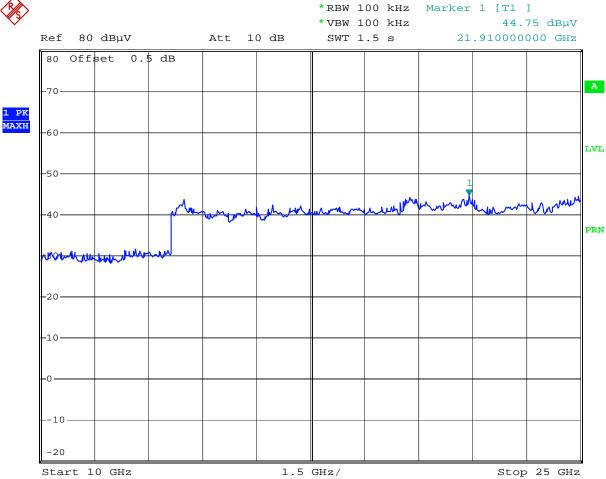


 ${\tt Comment: Spurious emissions, Freq 2402MHz, Tx2}$

Date: 8.JUL.2009 10:28:51

File: 3184783MPK-001A Page 52 of 83



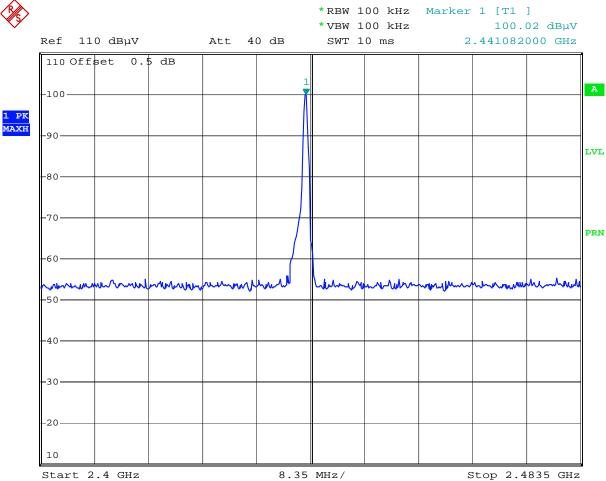


Comment: In-band emissions, Freq 2441MHz, Tx2

Date: 8.JUL.2009 10:31:00

File: 3184783MPK-001A Page 53 of 83



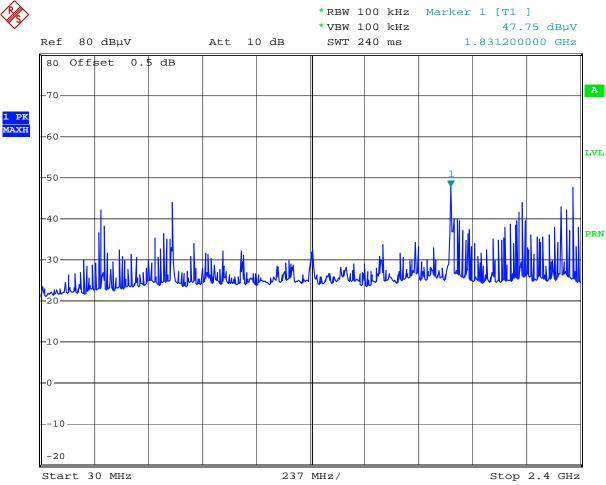


Comment: Spurious emissions, Freq 2441MHz, Tx2

Date: 8.JUL.2009 10:33:02

File: 3184783MPK-001A Page 54 of 83





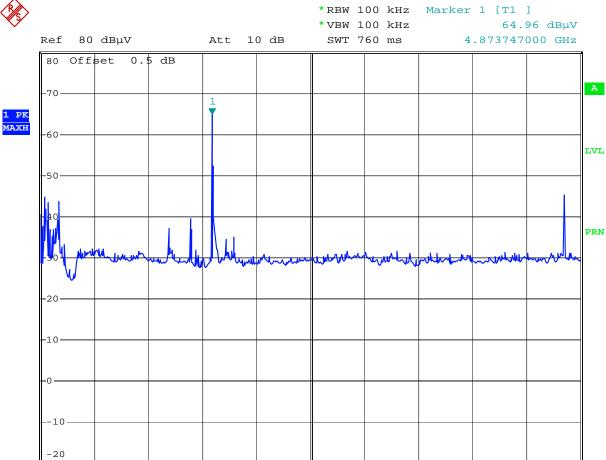

751.65 MHz/

Stop 10 GHz

Plot 6.23

Comment: Spurious emissions, Freq 2441MHz, Tx2


Date: 8.JUL.2009 10:35:06

Start 2.4835 GHz

File: 3184783MPK-001A Page 55 of 83



Plot 6.24

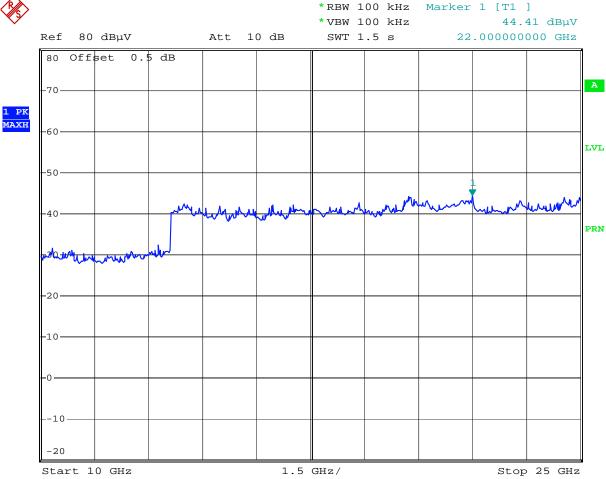


Comment: Spurious emissions, Freq 2441MHz, Tx2

Date: 8.JUL.2009 10:35:46

File: 3184783MPK-001A Page 56 of 83



Plot 6.25

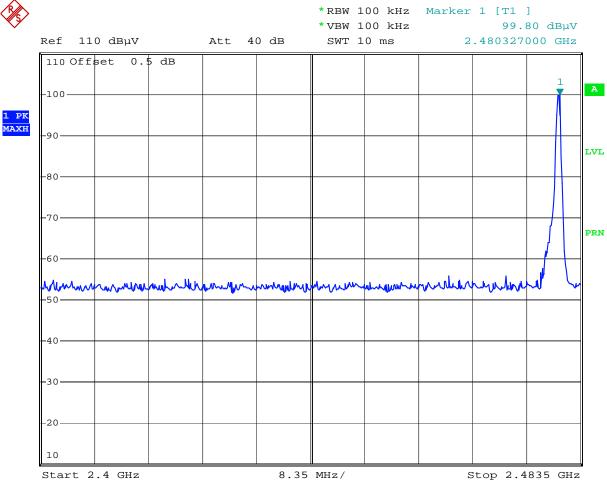


Comment: In-band emissions, Freq 2480MHz, Tx2

Date: 8.JUL.2009 10:36:57

File: 3184783MPK-001A Page 57 of 83



.

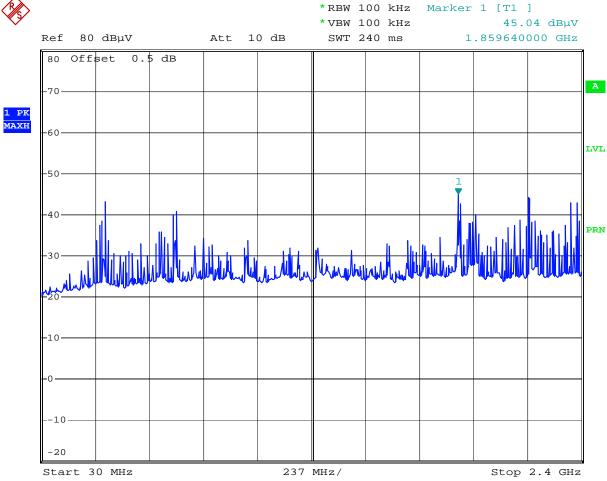


Comment: Spurious emissions, Freq 2480MHz, Tx2 Date: 8.JUL.2009 10:38:07

File: 3184783MPK-001A Page 58 of 83





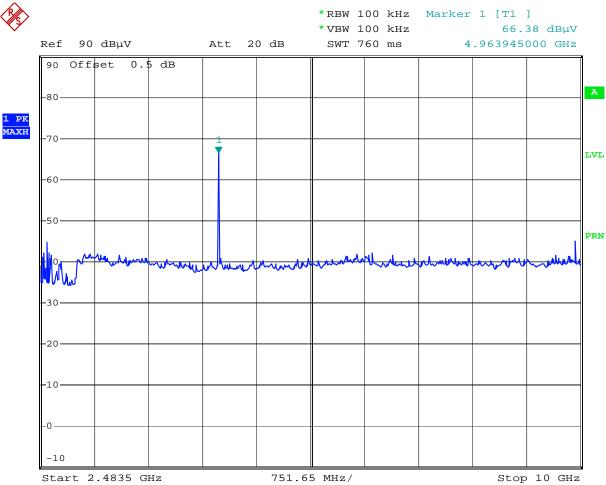


Comment: Spurious emissions, Freq 2480MHz, Tx2

Date: 8.JUL.2009 10:39:18

File: 3184783MPK-001A Page 59 of 83



Plot 6.28

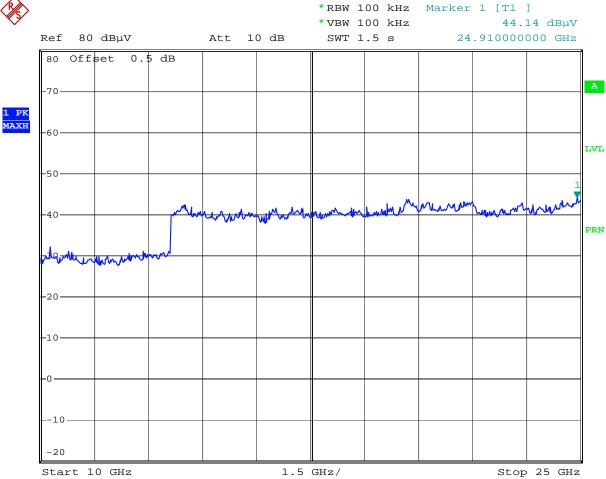


Comment: Spurious emissions, Freq $2480 \, \text{MHz}$, Tx 2

Date: 8.JUL.2009 10:39:56

File: 3184783MPK-001A Page 60 of 83





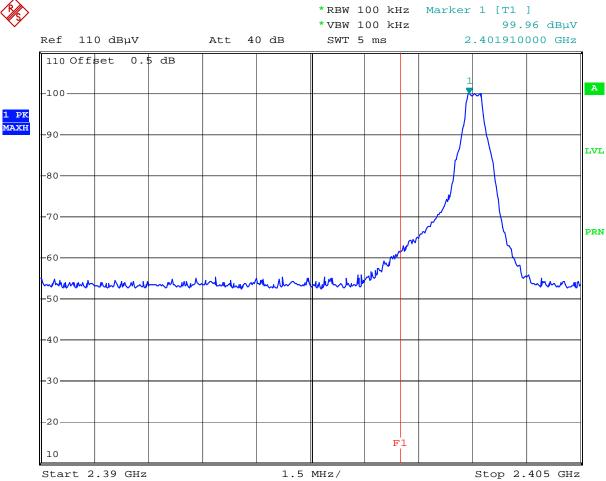


Comment: Spurious emissions, Freq 2402MHz, Tx2

Date: 8.JUL.2009 10:51:29

File: 3184783MPK-001A Page 61 of 83





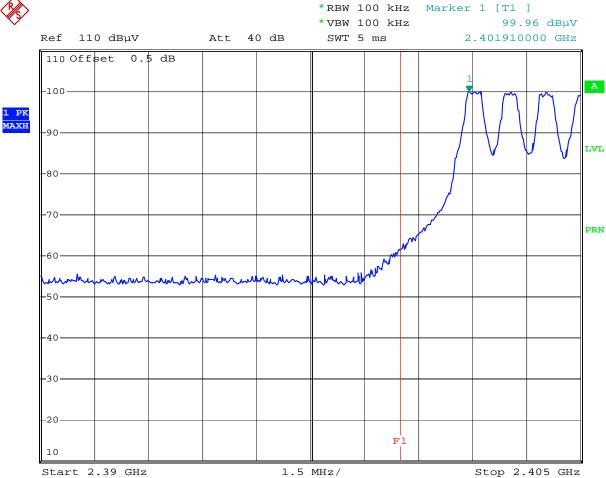


Comment: Spurious emissions, Freq 2402MHz, Tx2

Date: 8.JUL.2009 10:54:58

File: 3184783MPK-001A Page 62 of 83





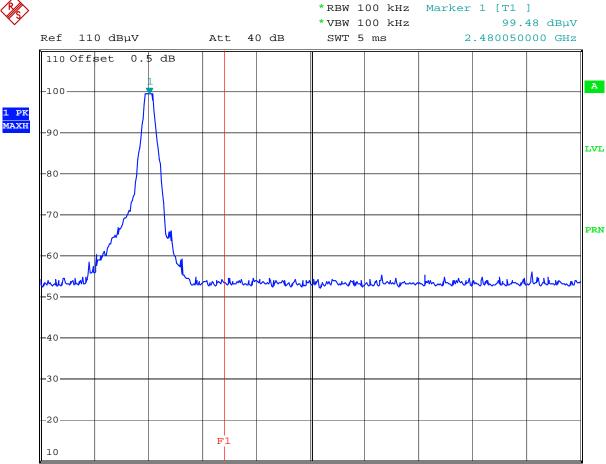

2.5 MHz/

Stop 2.5 GHz


Comment: Spurious emissions, Freq 2480MHz, Tx2 Date: 8.JUL.2009 10:57:51

Start 2.475 GHz

File: 3184783MPK-001A Page 63 of 83





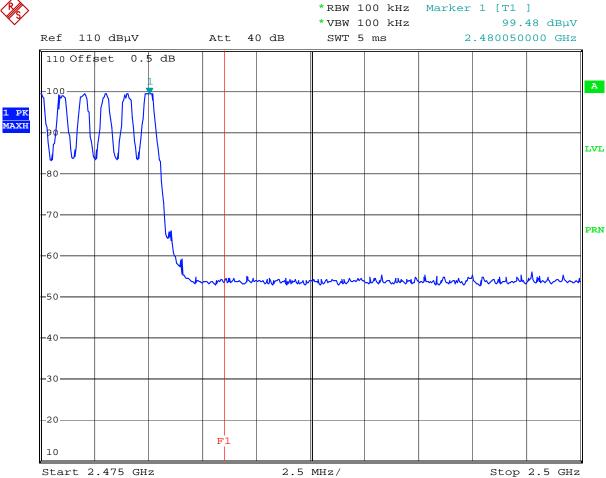

Comment: Spurious emissions, Freq $2480 \, \text{MHz}$, Tx 2

Date: 8.JUL.2009 11:00:42

File: 3184783MPK-001A Page 64 of 83



4.7 Transmitter Radiated Emissions FCC 15.247 (c), 15.205

Procedure

Radiated emission measurements were performed from 30 MHz to 25,000 MHz. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

The EUT is placed on a non-conductive table. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance.

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

```
\begin{split} FS &= RA + AF + CF - AG \\ Where \quad FS &= Field \; Strength \; in \; dB(\mu V/m) \\ RA &= Receiver \; Amplitude \; (including \; preamplifier) \; in \; dB(\mu V) \\ CF &= Cable \; Attenuation \; Factor \; in \; dB \\ AF &= Antenna \; Factor \; in \; dB \\ AG &= Amplifier \; Gain \; in \; dB \end{split}
```

Assume a receiver reading of $52.0\,dB(\mu V)$ is obtained. The antennas factor of $7.4\,dB(1/m)$ and cable factor of $1.6\,dB$ is added. The amplifier gain of 29 dB is subtracted, giving field strength of $32\,dB(\mu V/m)$. This value in $dB(\mu V/m)$ was converted to its corresponding level in $\mu V/m$.

```
RA = 52.0 \; dB(\mu V) AF = 7.4 \; dB(1/m) CF = 1.6 \; dB AG = 29.0 \; dB FS = 52.0 + 7.4 + 1.6 - 29.0 = 32 \; dB(\mu V/m) Level in \mu V/m = Common \; Antilogarithm \; [(32 \; dB\mu V/m)/20] = 39.8 \; \mu V/m
```

EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 65 of 83



Result

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

The radiated emissions in the restricted bands near the operating band are presented on the following Plots 7.1 - 7.6. On these plots antenna factor and cable loss are included in the OFFSET of the spectrum analyzer reading, therefore the readings are field strength.

The EUT passed the test by 0.2 dB.

File: 3184783MPK-001A Page 66 of 83



Test Result					
FCC Part 15.247 Radiated Emission in Restricted Bands					
Temperature: 22C Advanced Medical Optics					
Humidity:	51%	Model: Advanced Control Pedal & Remote Control Master 2.0			
Test data of ¹ RF module for a Foot Pedal control mounted in main system					
Test distance = 3 m					
Test date: August 14, 2009					

Frequency	Detector	SA reading		Duty*		Field Strength	Limit	Margin
MHz		dB(uV)	Factor dB	cycle dB	dB(1/m)	dB(uV/m)	dB(uV/m)	dB
Tx at 2402 M	Tx at 2402 MHz							
4804	Peak	56.3	-25.8		33.0	63.5	74.0	-10.5
12010	Peak	35.2	-20.8		39.2	53.6	74.0	-20.4
4804	Aver	48.8	-25.8	2.3	33.0	53.7	54.0	-0.3
12010	Aver	21.2	-20.8	2.3	39.2	37.3	54.0	-16.7
Tx at 2441 N	Tx at 2441 MHz							
4882	Peak	55.7	-25.2		33.2	63.7	74.0	-10.3
7323	Peak	36.4	-22.6		36.1	49.9	74.0	-24.1
12205	Peak	35.6	-21.0		39.0	53.6	74.0	-20.4
4882	Aver	48.1	-25.2	2.3	33.2	53.8	54.0	-0.2
7323	Aver	22.5	-22.6	2.3	36.1	33.7	54.0	-20.3
12205	Aver	21.8	-21.0	2.3	39.0	37.5	54.0	-16.5
Tx at 2480 M	Tx at 2480 MHz							
4960	Peak	55.3	-24.9		33.4	63.8	74.0	-10.2
7440	Peak	37.1	-22.6		36.4	50.9	74.0	-23.1
12400	Peak	35.4	-21.3		38.7	52.8	74.0	-21.2
4960	Aver	48.1	-25.4	2.3	33.4	53.8	54.0	-0.2
7440	Aver	23.5	-22.6	2.3	36.6	35.2	54.0	-18.8
12400	Aver	21.9	-21.3	2.3	38.7	37.0	54.0	-17.0

^{*} See Appendix A for Duty cycle measurement.

- a) RBW = 1 MHz, VBW = 1 MHz for peak measurements RBW = 1MHz, VBW = 100 Hz for average measurements
- b) Correction Factor: Pre-amplifier gain + Cable loss + HP-Filter loss
- c) All other emissions are 20 dB below the limit.


EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 67 of 83





Start 2.38 GHz

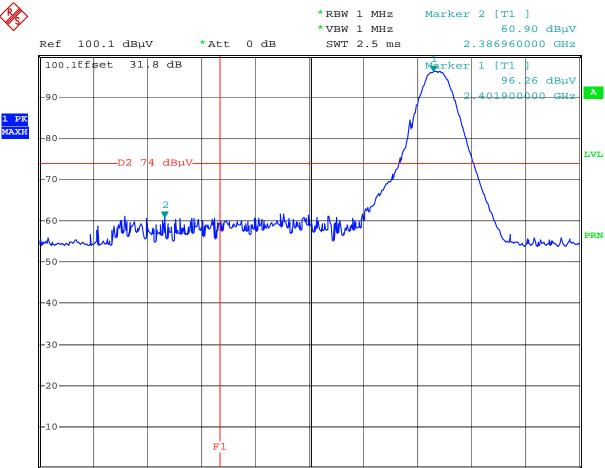

3 MHz/


Stop 2.41 GHz


Plot 7.1

Comment: Emissions on band-edge frequency, peak, freq 2402 MHz Date: 13.JUL.2009 13:47:23

File: 3184783MPK-001A Page 68 of 83





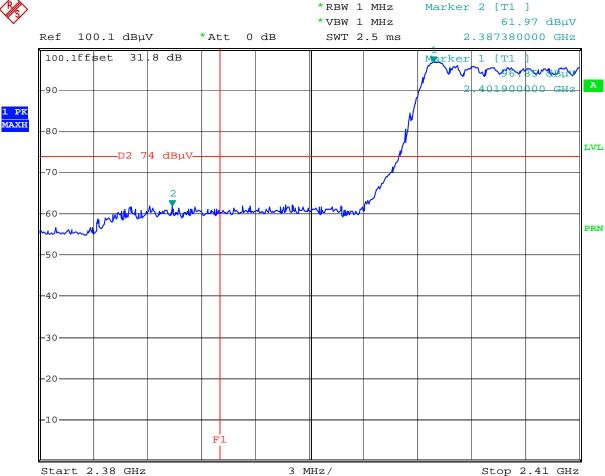


Comment: Emissions on band-edge frequency, peak, freq 2402MHz Date: 13.JUL.2009 14:01:52

File: 3184783MPK-001A Page 69 of 83





Plot 7.3

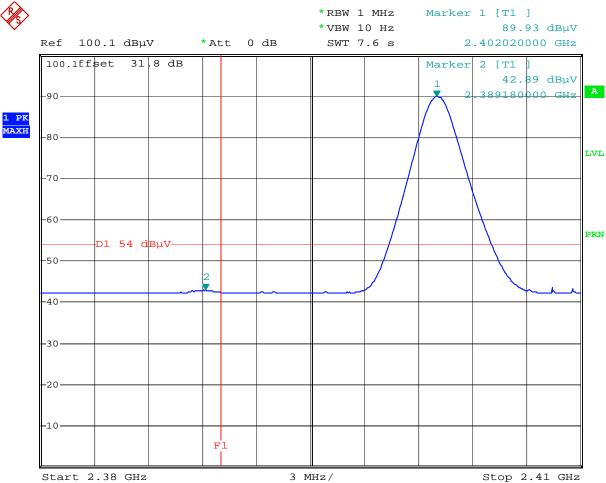


Comment: Emissions on band-edge frequency, average, freq 2402MHz

Date: 13.JUL.2009 14:06:57

File: 3184783MPK-001A Page 70 of 83





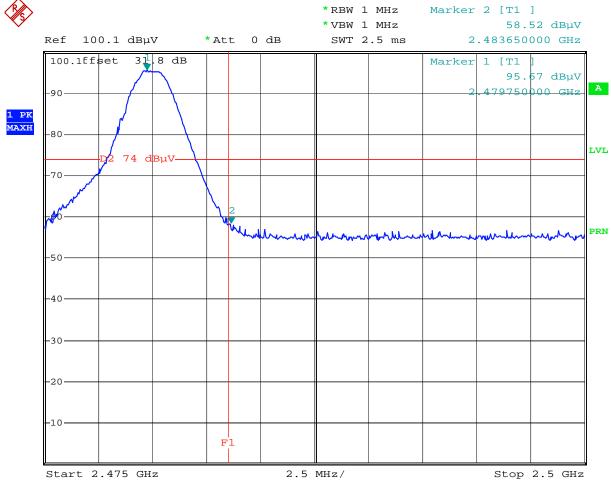


Comment: Emissions on band-edge frequency, peak, freq 2480MHz

Date: 13.JUL.2009 14:20:05

File: 3184783MPK-001A Page 71 of 83





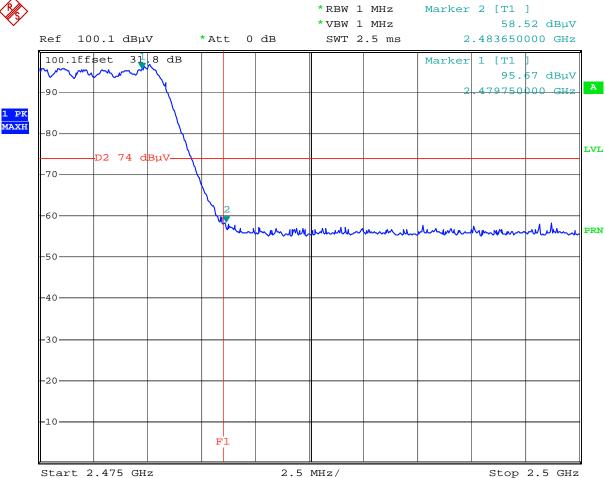


Comment: Emissions on band-edge frequency, peak, freq 2480MHz

Date: 13.JUL.2009 14:33:03

File: 3184783MPK-001A Page 72 of 83





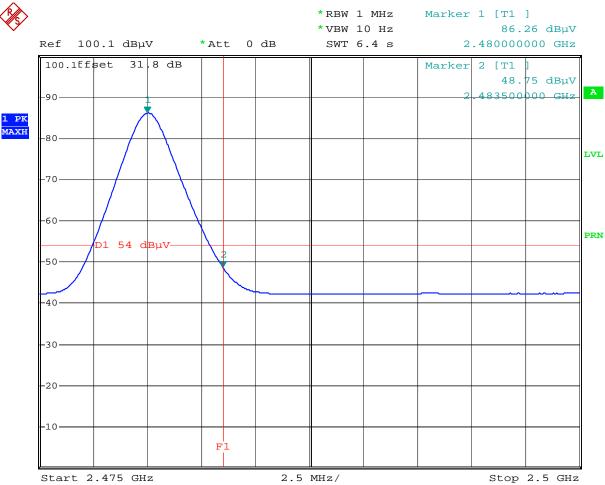

Plot 7.6

Comment: Emissions on band-edge frequency, average, freq 2480 MHz Date: $13. \text{JUL.} 2009 \ 14:13:54$

File: 3184783MPK-001A Page 73 of 83



4.8 Radiated Emissions from Digital Parts and Receiver FCC Ref: 15.109

Test Limit

Limits for Electromagnetic Radiated Emissions, FCC Section 15.109(b) and ICES 003 *

Frequency (MHz)	Class A at 10m dB(μV/m)	Class B at 3m dB(μV/m)
30-88	39	40.0
88-216	43.5	43.5
216-960	46.4	46.0
Above 960	49.5	54.0

^{*} According to FCC Part 15.109(g) an alternative to the radiated emission limits shown above, digital devices may be shown to comply with the limit of CISPR Pub. 22

Test Procedure

Measurements are conducted with a quasi-peak detector instrument in the frequency range of 30 MHz to 1000 MHz and with the average detector instrument in the frequency range above 1000 MHz. The measuring receiver meets the requirements of Section One of CISPR 16 and the measuring antenna correlates to a balanced dipole.

Measurements of the radiated field are made with the antenna located at a distance of 10 meters from the EUT. If the field-strength measurements at 10m cannot be made because of high ambient noise level or for other reasons, measurements of Class B equipment may be made at a closer distance, for example 3m. An inverse proportionality factor of 20 dB per decade should be used to normalize the measured data to the specified distance for determining compliance.

The antenna is adjusted between 1m and 4m in height above the ground plane for maximum meter reading at each test frequency.

The antenna-to-EUT azimuth is varied during the measurement to find the maximum field-strength readings.

The antenna-to-EUT polarization (horizontal and vertical) is varied during the measurements to find the maximum field-strength readings.

EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 74 of 83



The EUT, where intended for tabletop use, is placed on a table whose top is 0.8m above the ground plane. The table is constructed of non-conductive materials. Its dimensions are 1m by 1.5m, but may be extended for a larger EUT.

Floor standing EUTs are placed on a horizontal metal ground plane and isolated from the ground plane by 3 to 12 mm of insulating material.

Equipment setup for radiated disturbance tests followed the guidelines of ANSI C63.4 (2003).

Example Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor to from the measured reading, followed by subtracting the Amplifier Gain (if any) and Distance Correction Factor (if any). The basic equation with a sample calculation is as follows:

FS = RA + AF + CF - PA - DCF

Where $FS = Field Strength in dB (\mu V/m)$

 $RA = Receiver Amplitude (including preamplifier) in dB (<math>\mu V$)

CF = Cable Attenuation Factor in dB AF = Antenna Factor in dB (1/m) AG = Amplifier Gain in dB

DCF=Distance Correction Factor in dB

(Formula: $DCF = 20log_{10}$ (measurement distance/specification distance)

Assume a receiver reading of 52.0 dB (μV) is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB and DCF of 10.5 dB (DCF in this example: $20\log_{10}{(10/3)}$) is subtracted, giving field strength of 21.5 dB ($\mu V/m$).

RA = $52.0 \text{ dB } (\mu \text{V})$ AF = 7.4 dB (1/m)CF = 1.6 dBAG = 29.0 dBDCF=10.5 dBFS = RF + AF + CF - AG - DCF FS = 52.0 + 7.4 + 1.6 - 29.0 - 10.5FS = $21.5 \text{ dB } (\mu \text{V/m})$

Test Results

Radiated emission measurements were performed from $30\,\mathrm{MHz}$ to $1000\,\mathrm{MHz}$. Spectrum Analyzer Resolution Bandwidth is $100\,\mathrm{kHz}$ or greater below $1000\,\mathrm{MHz}$ and $1\,\mathrm{MHz}$ - above $1000\,\mathrm{MHz}$.

The EUT passed by 2.9 dB for Class B.

EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 75 of 83



Test data of ¹RF module for a Foot Pedal control mounted in main system

Intertek Testing Services

Radiated Emissions 30 MHz - 1000 MHz

FCC Part 15 Class B (QP-Vertical)

Model Number: Advanced Control Pedal & Remote Control

Master 2.0

Operator: KK August 14, 2009 Company: Advanced Medical Optics

Frequency	Peak FS	Limit@3m	Margin	RA	CF	AG	DCF	AF
(MHz)	dB(uV/m)	dB(uV/m)	dB	dB(uV)	dB	dB	dB	dB(1/m)
64.0	27.8	40.0	-12.2	44.6	0.8	32.0	10.5	3.9
72.01	31.4	40.0	-8.6	46.5	0.9	32.0	10.5	5.5
80.0	37.1	40.0	-2.9	50.4	0.9	32.0	10.5	7.3
96.0	31.7	43.5	-11.8	45.3	1.0	32.0	10.5	6.9
125.0	39.3	43.5	-4.2	51.9	1.1	32.0	10.5	7.7
299.983	40.2	46.0	-5.8	45.4	1.8	31.9	10.5	14.4
912.7	40.6	46.0	-5.4	34.7	3.2	31.4	10.5	23.5

Test Mode: Rx mode Temperature: 20 C Humidity: 50 %

EMC Report for Advanced Medical Optics on the model: Advanced Control Pedal & Remote Control Master 2.0

File: 3184783MPK-001A Page 76 of 83



4.9 AC Line Conducted Emission FCC 15.207:

Not Applicable. The EUT does not have any direct connection to public power network. In normal use, EUT is installed inside the host unit and it is DC powered internally.

File: 3184783MPK-001A Page 77 of 83



5.0 RF Exposure evaluation

The EUT is a Bluetooth device used in mobile application, at least 20 cm from any body part of the user or near by persons.

The maximum conducted power is 0.550 mW; antenna is fix-mounted, 4.1 dBi gain. Therefore, to comply with RF Exposure Requirement, the MPE is calculated.

The maximum Peak EIRP calculated is 1.5 dBm or 1.4 mW.

The Power Density can be calculated using the formula

 $S = EIRP/4\pi D^2$

Where: S is Power Density in W/m^2

D is the distance from the antenna.

It is considered that 20cm is the minimum distance that user can go closer to the EUT (Advanced Control Pedal & Remote Control Master 2.0) which is installed inside the Console of WhiteStar Signature Advanced Control Pedal system.

At 0.2 m, $S = 0.00278 \text{ W/m}^2$, which is below the MPE Limit of 10 W/m²

File: 3184783MPK-001A Page 78 of 83



6.0 List of test equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

1 1		1 2	1 1		0
Equipment Manufacturer		Model/Type	Serial #	Cal Int	Cal Due
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	07/01/10
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	07/01/10
Spectrum Analyzer	Rohde&Schwarz	FSP40	036612004	12	10/13/09
BI-Log Antenna	EMCO	3143	9509	12	11/07/09
Pre-Amplifier	Sonoma	310N	185634	12	11/10/09
Pre-Amplifier	Miteq	AMF-4D-001180-24-10P	799159	12	07/28/10
Spectrum Analyzer	Rohde&Schwarz	FSU26	200482	12	11/20/09
Vector Signal Generator Rohde&Schwarz		SMU200A	102499	12	4/01/10

File: 3184783MPK-001A Page 79 of 83




7.0 Document History

Revision/ Job Number	Writer Initials	Date	Change
1.0 / 3184783	KK	September 03, 2009	Original document
1.0 / 3184783	KK	December 03, 2009	Original report was re-issued with new FCC ID and IC ID

File: 3184783MPK-001A Page 80 of 83



8.0 Appendix A – Graphs for Duty cycle measurement

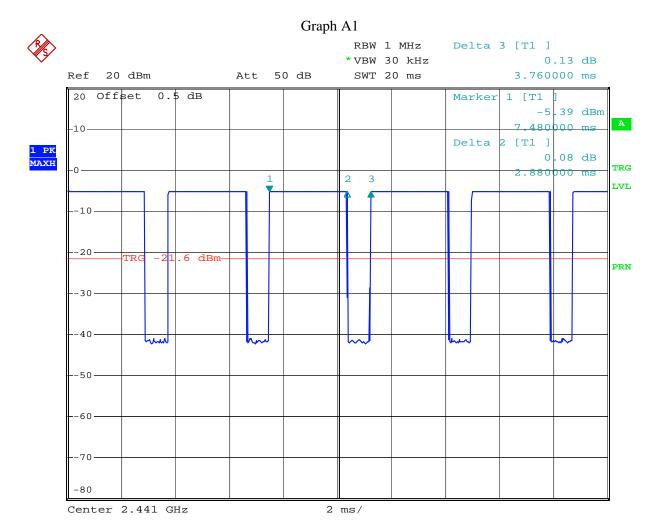


Comment: Duty cycle, freq 2441MHz, Tx1 Date: 7.JUL.2009 18:27:48

Duty Cycle Calculation = $20 \log (2.88/3.76) = -2.3 dB$

File: 3184783MPK-001A Page 81 of 83



Graph A2

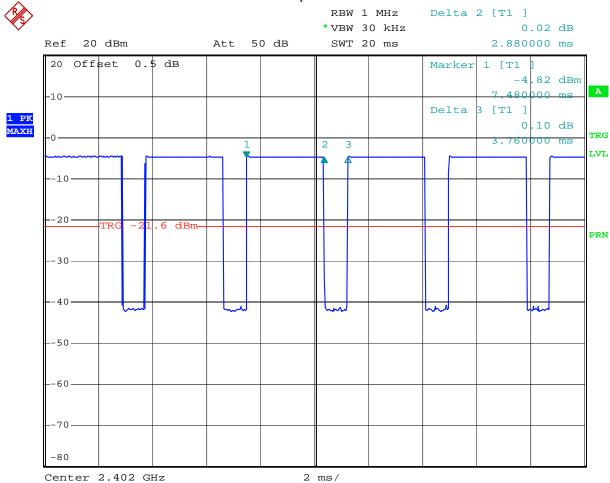


Comment: Duty cycle, freq 2402MHz, Tx1 Date: 7.JUL.2009 18:32:43

Duty Cycle Calculation = $20 \log (2.88/3.76) = -2.3 dB$

File: 3184783MPK-001A Page 82 of 83



Graph A3

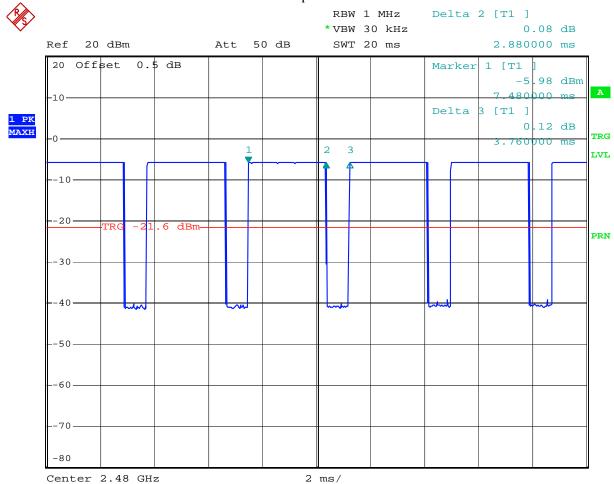

Comment: Duty cycle, freq 2480MHz, Tx1 Date: 7.JUL.2009 18:40:55

Duty Cycle Calculation = $20 \log (2.88/3.76) = -2.3 dB$

File: 3184783MPK-001A Page 83 of 83