



**CONFORMANCE TEST REPORT
FOR
FCC 47 CFR, Part 15 Subpart C**

Report No.: 21-05-MAW-007-03

Client: KAIWOOD Technology Co., Ltd.
 Product: Rapid Test Reader
 Model: CHR-631W, CHR-63xy (x can be 0~9 for different shell colors, y can be W for enabling WiFi and bluetooth functions, or not shown for disabling wireless functions.) For example, CHR-631.
 FCC ID: VGG-KWCHR006
 Manufacturer/supplier: KAIWOOD Technology Co., Ltd.
 Date test item received: 2021/05/07
 Date test campaign completed: 2022/01/11
 Date of issue: 2024/06/14


The test result only corresponds to the tested sample. It is not permitted to copy this report, in part or in full, without the permission of the test laboratory.

Total number of pages of this test report: 108 pages

Total number of pages of photos: External photos 5 pages

Internal photos 10 pages

Setup photos 4 pages

Test Engineer	Checked By	Approved By
 Phillip Luo	 Falcon Shi	 Jerry Huang

TAIWAN TESTING AND CERTIFICATION
 CENTER
 EMC Testing Laboratory
 No.8, Lane 29, Wenming Rd.,
 Guishan Dist., Taoyuan City 33383,
 Taiwan, R.O.C.

TEL: (03) 3276170~4
 INT: +886-3-3276170~4
 FAX: (03) 3276188
 INT: +886-3-3276188



Client : KAIWOOD Technology Co., Ltd.

Address : 5F, No. 12 & 16, Lane 31, Sec. 1, Huandong Rd., Xinshi District, Tainan City 74146, Taiwan

Manufacturer : KAIWOOD Technology Co., Ltd.

Address : 5F, No. 12 & 16, Lane 31, Sec. 1, Huandong Rd., Xinshi District, Tainan City 74146, Taiwan

EUT : Rapid Test Reader

Trade name : KAIWOOD

Model No. : CHR-631W, CHR-63xy (x can be 0~9 for different shell colors, y can be W for enabling WiFi and bluetooth functions, or not shown for disabling wireless functions.) For example, CHR-631.

Power Source : Adapter: Good Opportunity Electronic Co.,Ltd/GS2U-015-050-M
Input: AC 100-240V~0.5A
Output: DC 5.0V ----- 3000mA, 15W Max

Regulations applied : FCC 47 CFR, Part 15 Subpart C

The testing described in this report has been carried out to the best of our knowledge and ability, and our responsibility is limited to the exercise of reasonable care. This certification is not intended to relieve the sellers from their legal and/or contractual obligations.

The compliance test is only certified for the test equipment and the results of the testing report relate only to the item tested. The compliance test of this report was conducted in accordance with the appropriate standards. The test result(s) does not consider the uncertainty of measurement when the test standard(s) and/or test method which refer by the labs has the limit or judgments for the test result(s).

This report shall not be reproduced except in full, without the approval of ETC.

This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

Laboratory Introduction: TAIWAN TESTING AND CERTIFICATION CENTER is recognized, filed and mutual recognition arrangement as following:

- ❶ ISO/IEC 17025 : TAF(0371), NVLAP(Lab code: 200133-0), CBTL(TÜV SÜD)
- ❷ Recognized : BSMI, NCC, FCC(TW0371, TW1112), ISED(Industry Canada Site # 2949A-2)
- ❸ Filing : VCCI (C-13518, R-13177, G-10098, T-11682)
- ❹ MRA : Australia, New Zealand, Singapore



NVLAP Lab Code 200133-0

Table of Contents

	Page
1 GENERAL INFORMATION.....	5
1.1 Product Description.....	5
1.2 Characteristics of Device	5
1.3 Test Methodology	5
1.4 Test Facility.....	6
1.5 Test Summary	6
2 PROVISIONS APPLICABLE.....	7
2.1 Definition	7
2.2 Requirement for Compliance	8
2.3 Restricted Bands of Operation	10
2.4 Labeling Requirement.....	10
2.5 User Information	11
3. SYSTEM TEST CONFIGURATION.....	12
3.1 Devices for Tested System	12
3.2 Description of Test modes	13
3.3 Test site	14
4 CONDUCTED EMISSION MEASUREMENT.....	21
4.1 Standard Applicable	21
4.2 Measurement Procedure	21
4.3 Conducted Emission Data	22
4.4 Result Data Calculation.....	24
4.5 Conducted Measurement Equipment	24
5 ANTENNA REQUIREMENT.....	25
5.1 Standard Applicable	25
5.2 Antenna Construction and Directional Gain	25
6 EMISSION BANDWIDTH MEASUREMENT.....	26
6.1 Standard Applicable	26
6.2 Measurement Procedure	26
6.3 Measurement Equipment	26
6.4 Measurement Data.....	27
7 OUTPUT POWER MEASUREMENT.....	39
7.1 Standard Applicable	39
7.2 Measurement Procedure	39
7.3 Measurement Equipment	39

7.4 Measurement Data.....	40
8 POWER DENSITY MEASUREMENT.....	43
8.1 Standard Applicable	43
8.2 Measurement Procedure	43
8.3 Measurement Equipment	43
8.4 Measurement Data.....	44
9 SPURIOUS EMISSION - RF CONDUCTED MEASUREMENT.....	56
9.1 Standard Applicable	56
9.2 Measurement Procedure	56
9.3 Measurement Equipment	56
9.4 Measurement Data.....	57
10 RADIATED EMISSION MEASUREMENT	73
10.1 Standard Applicable	73
10.2 Measurement Procedure	73
10.3 Measuring Instrument	75
10.4 Radiated Emission Data	76
10.5 Field Strength Calculation.....	107
11. EQUIPMENTS LIST FOR TESTING	108

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Rapid Test Reader
- b) Trade Name : KAIWOOD
- c) Model No. : CHR-631W, CHR-63xy (x can be 0~9 for different shell colors, y can be W for enabling WiFi and bluetooth functions, or not shown for disabling wireless functions.) For example, CHR-631.
- d) FCC ID : VGG-KWCHR006

1.2 Characteristics of Device

The EUT is a Rapid Test Reader based on the WLAN technology. WLAN operates in the unlicensed ISM Band at 2.4GHz.

RF chain	1T1R
Frequency Range	IEEE 802.11b/g, 802.11n HT20: 2412MHz~2462MHz
Channel Spacing	IEEE 802.11b/g, 802.11n HT20: 5MHz
Channel Number	IEEE 802.11b/g, 802.11n HT20:11 Channels
Type of Modulation	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK, BPSK)

1.3 Test Methodology

All testing were performed according to the procedures in ANSI C63.10 (2013) and FCC CFR 47 Part 2 and Part 15 and KDB 558074 D01 v04.

1.4 Test Facility

The Semi-Anechoic Chamber and conducted measurement facility used to collect the radiated and conducted data are located inside the Building at No.8, Lane 29, Wenming Rd., Guishan Dist., Taoyuan City 33383, Taiwan, R.O.C.

This site has been accreditation as a FCC filing site.

1.5 Test Summary

Requirement	FCC Paragraph #	Test Pass
Antenna Requirement	15.203	Pass
Conducted Emission	15.207	Pass
Emission Bandwidth	15.247 (a)(2)	Pass
Output Power Requirement	15.247 (b)(3)	Pass
Power Density Requirement	15.247 (e)	Pass
Spurious Emissions	15.247 (d)	Pass
Radiated Emission	15.247 (d)	Pass

Note: The test setup and measurement method for conductive output power measurements shown in this test report is different to the “Peak Output Power” test. Certain measurement uncertainty of peak power may be expected with the use of different power detection method or measuring equipment. Therefore, the conductive output power measurement results provided in this test report may be different to the specification of the device under test.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device that is marketed for use in a commercial, industrial or business environment, exclusive of a device which is marketed for use by the general public or is intended to be used in the home.

Class B Digital Device :

A digital device that is marketed for use in a residential environment notwithstanding use in commercial, business and industrial environments. Examples of such devices include, but are not limited to, personal computers, calculators, and similar electronic devices that are marketed for use by the general public.

Note: The responsible party may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B digital device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B digital device, regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

For unintentional device, according to §15.107(a) Line Conducted Emission Limits is as following:

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

*Decreases with the logarithm of the frequency.

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
above 960	3	54.0	500

For intentional radiator device, according to §15.209(a), the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72MHz, 76-88MHz, 174-216MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For systems using digital modulation , according to 15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) Bandwidth Requirement

According to 15.247 (a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

According to 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) Spurious Emissions Measurement

According to 15.247 (d) , in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(7) Power Density Requirement

According to 15.247 (e) , for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.25
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Devices for Tested System

Device	Trade Name	Model No.	Cable Description
*Rapid Test Reader	KAIWOOD	CHR-631W	Adapter: Good Opportunity Electronic Co.,Ltd/GS2U-015-050-M Input: AC 100-240V~0.5A Output: DC 5.0V 3000mA, 15W Max
Notebook	HP	Probook 650G1	0.8m*1 Unshielded USB Cable

Remark

1. “*” means equipment under test.



After completing the test mode setting, Notebook is removed from the above test configuration for final test to reduce noise interference.

2.

Test Software:	adb.exe		
Power setting:	Mode	Channel	Setting
b	b	Low	Default
		Mid	Default
		High	Default
	g	Low	Default
		Mid	Default
		High	Default
n HT20	n HT20	Low	Default
		Mid	Default
		High	Default

3.2 Description of Test modes

3.2.1 IEEE 802.11b, 802.11g, 802.11n HT20 mode:

There are three channels have been tested as following:

Channel	Frequency (MHz)
Low = 1	2412
Middle = 6	2437
High = 11	2462

IEEE 802.11b mode: 2 Mbps data rate is the worse case for full testing.

IEEE 802.11g mode: 24 Mbps data rate is the worse case for full testing.

IEEE 802.11n HT20 mode: MCS3 data rate is the worse case for full testing.

3.2.3 Test Mode Description

3.2.3.1 Modulation Type

Test Mode	Modulation
A	IEEE 802.11b
B	IEEE 802.11g
C	IEEE 802.11 n HT20

Test modes A,B,C	
Test Channel	Frequency (MHz)
Channel Low(L)	2412
Channel Mid(M)	2437
Channel High(H)	2462

3.2.3.2 Test Mode and Worse Case Determination

Item	Test Item	Test mode	Frequency(MHz)
1	Conducted emission measurement	B	M
2	Emission bandwidth measurement	A , B , C	L , M , H
3	Output power measurement	A , B , C	L , M , H
4	Power density measurement	A , B , C	L , M , H
5	Spurious emission	A , B , C	L , M , H
6	Radiated emission measurement(Harmonic)	A , B , C	L , M , H
6.1	Radiated emission measurement (Below 1GHz)	B	M
6.2	Radiated emission measurement (Above 1GHz)	A , B , C	L , M , H

Note: 1. Pretest result is no difference in four test modes, Choose one for final testing.

2. Pretest result is no difference by channel low, middle and high. Choose one for final testing and record the result

3.3 Test site

Item	Test site
1	<input checked="" type="checkbox"/> RE02 — EMC B1 — N2
2	<input checked="" type="checkbox"/> CE04 — 10M 2F
3	<input checked="" type="checkbox"/> RF — Cond01
4	<input type="checkbox"/> RF — Cond02

Duty cycle

IEEE 802.11b

File: 21-05-MAW-007_B #12 Date: 2021/8/5 Temperature: 25 °C
Site: RF-Cond01 Humidity: 54 %

**Condition:**

EUT: Rapid Test Reader
Model: CHR-631W
Test Mode: DTS
Note: FCC_802.11b Duty Cycle-1

RF Conducted

Sweep Time: 100ms Att.: 20dB
RBW: 1000 KHz VBW: 1000 KHz
Operator: Phillip

File: 21-05-MAW-007_B


#14

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

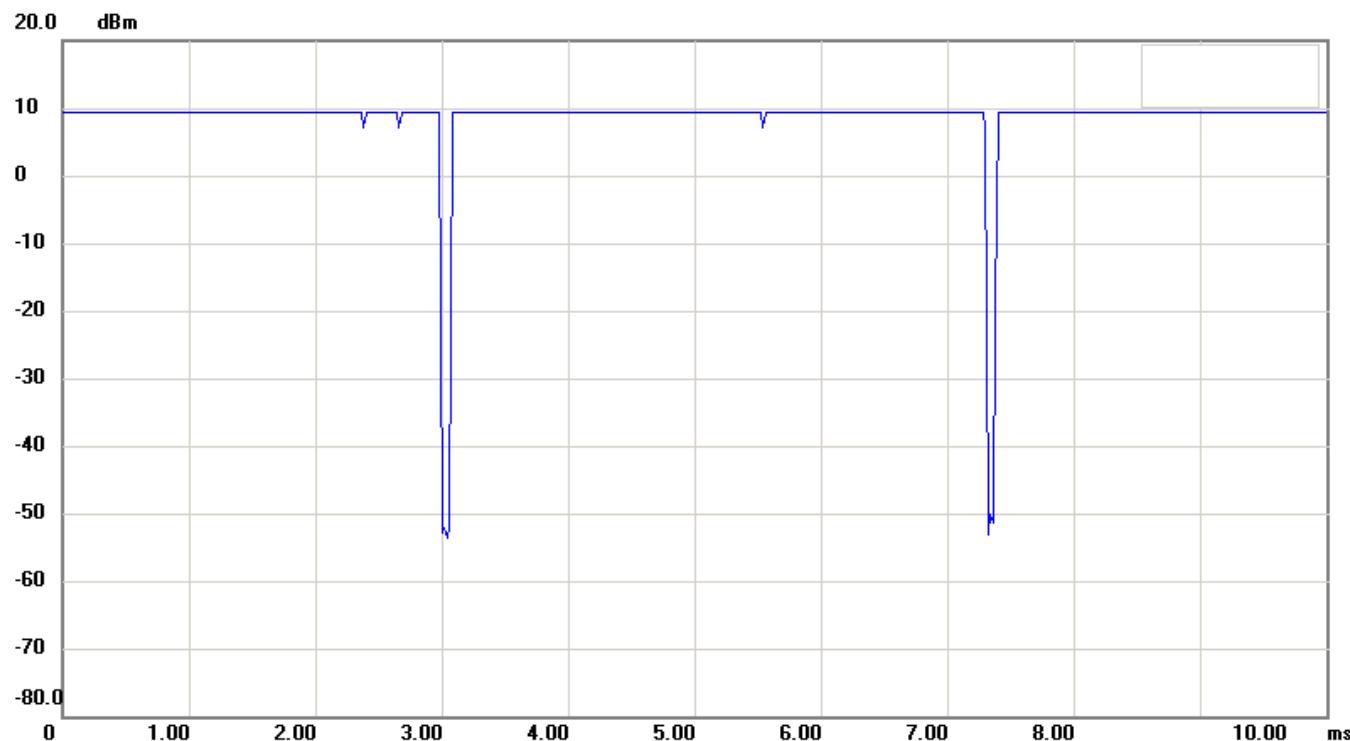**Condition:**

EUT: Rapid Test Reader

RF Conducted

Sweep Time: 10ms Att.: 20dB

Model: CHR-631W

RBW: 1000 KHz VBW: 1000 KHz


Test Mode: DTS

Operator: Phillip

Note: FCC_802.11b Duty Cycle-2 (Duty = 97.2%)

IEEE 802.11g

File: 21-05-MAW-007_G #12 Date: 2021/8/5 Temperature: 25 °C
Site: RF-Cond01 Humidity: 54 %

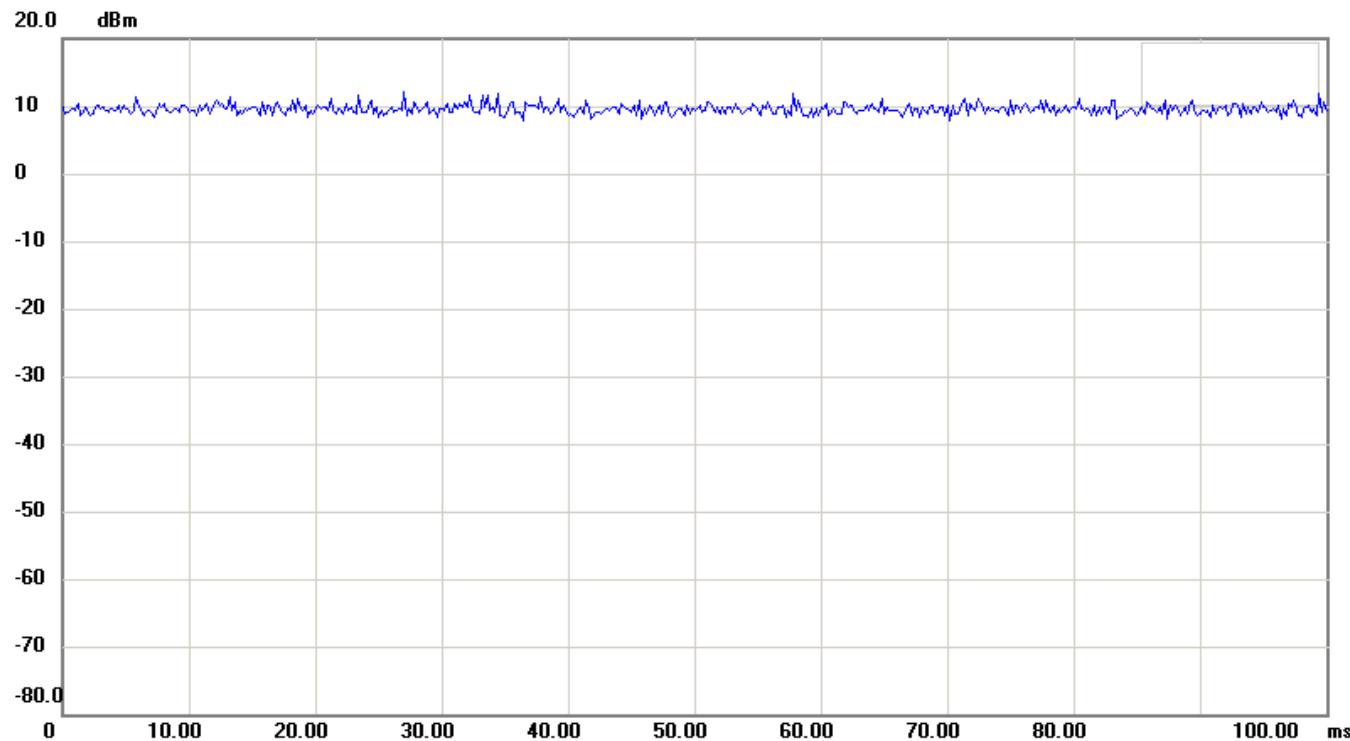**Condition:****EUT:** Rapid Test Reader**Model:** CHR-631W**Test Mode:** DTS**Note:** NCC_LP0002_802.11g Duty Cycle-1**RF Conducted**

Sweep Time: 100ms Att.: 20dB

RBW: 1000 KHz VBW: 1000 KHz

Operator: Phillip

File: 21-05-MAW-007_G


#13

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

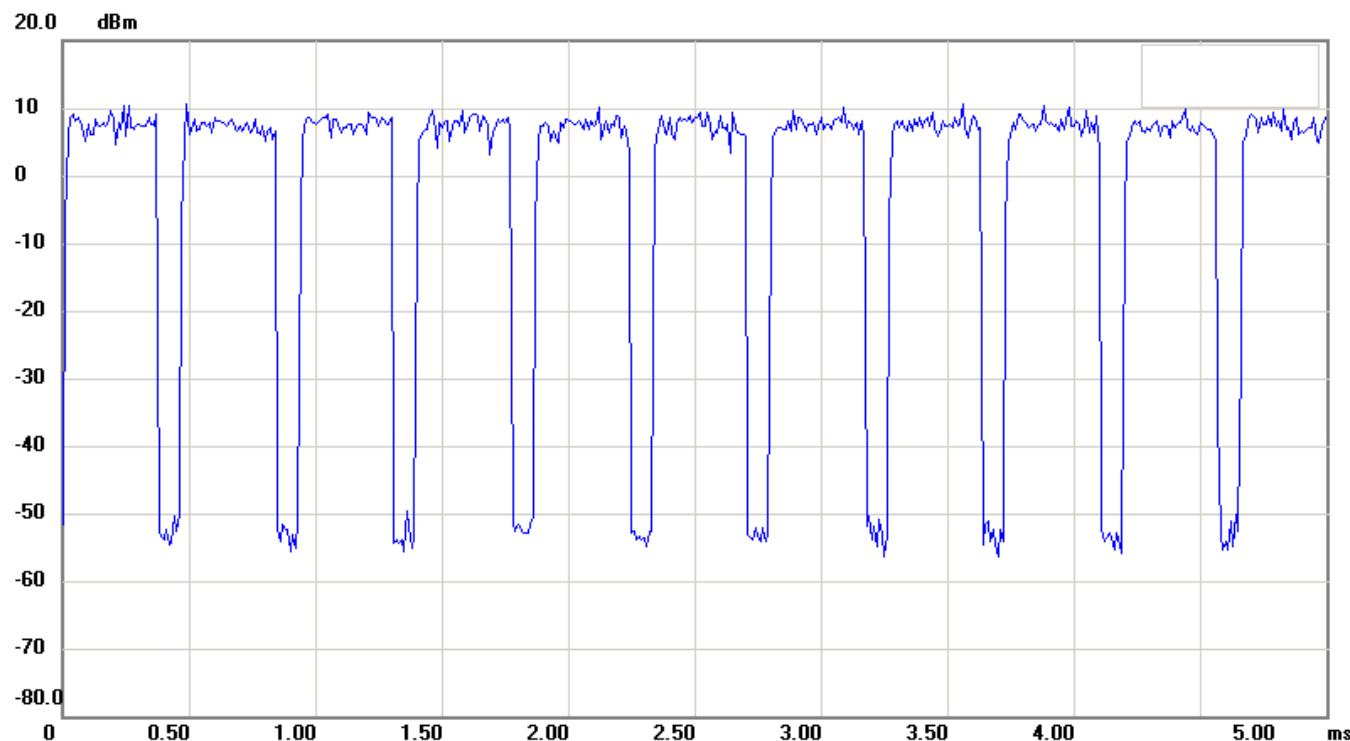**Condition:**

EUT: Rapid Test Reader

RF Conducted

Sweep Time: 5ms Att.: 20dB

Model: CHR-631W

RBW: 1000 KHz VBW: 1000 KHz


Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11g Duty Cycle-2 (Duty = 78.3%)

IEEE 802.11 n HT20

File: 21-05-MAW-007_n20 #12 Date: 2021/8/5 Temperature: 25 °C
Site: RF-Cond01 Humidity: 54 %

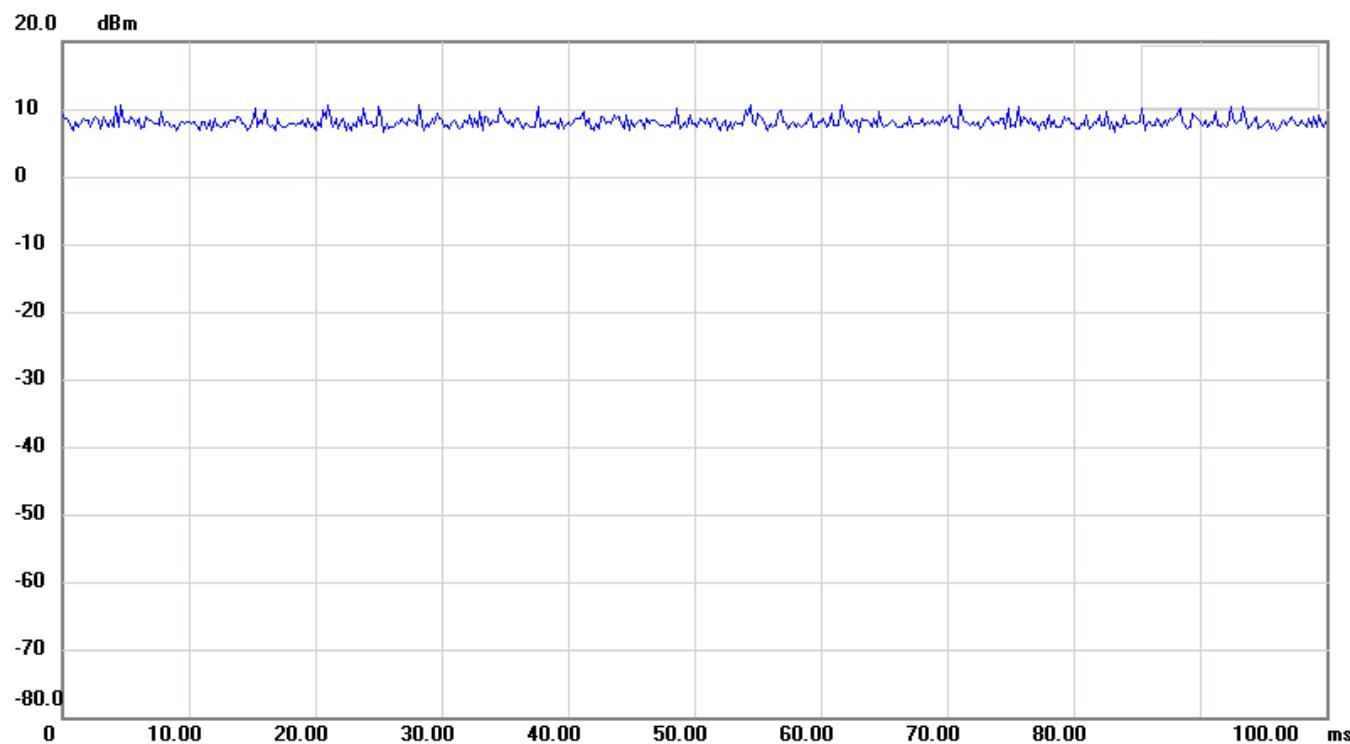**Condition:**

EUT: Rapid Test Reader RF Conducted
Model: CHR-631W Sweep Time: 100ms Att.: 20dB
Test Mode: DTS RBW: 1000 KHz VBW: 1000 KHz
Note: NCC_LP0002_802.11n20 Duty Cycle-1 Operator: Phillip

File: 21-05-MAW-007_n20


#13

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

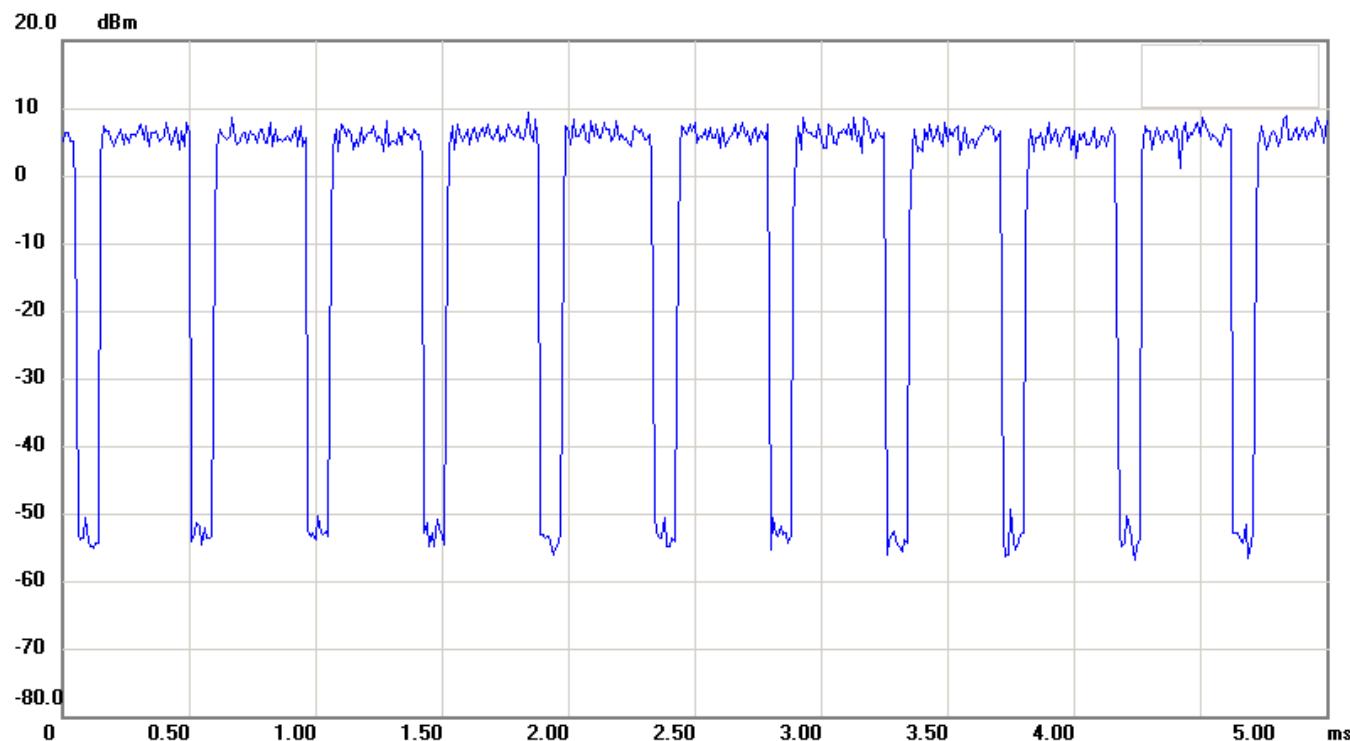**Condition:**

EUT: Rapid Test Reader

RF Conducted

Sweep Time: 5ms Att.: 20dB

Model: CHR-631W

RBW: 1000 KHz VBW: 1000 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11n20 Duty Cycle-2 (Duty = 75.6%)

4 CONDUCTED EMISSION MEASUREMENT


4.1 Standard Applicable

Line Conducted Emission Limits are in accordance to §§15.207(a).

4.2 Measurement Procedure

1. The testing follows ANSI C63.10 (2013).
2. Setup the configuration per figure 1.
3. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
4. Record the 6 highest emissions relative to the limit.
5. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
6. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
7. Repeat all above procedures on measuring each operation mode of EUT.

Figure 1: Conducted emissions measurement configuration

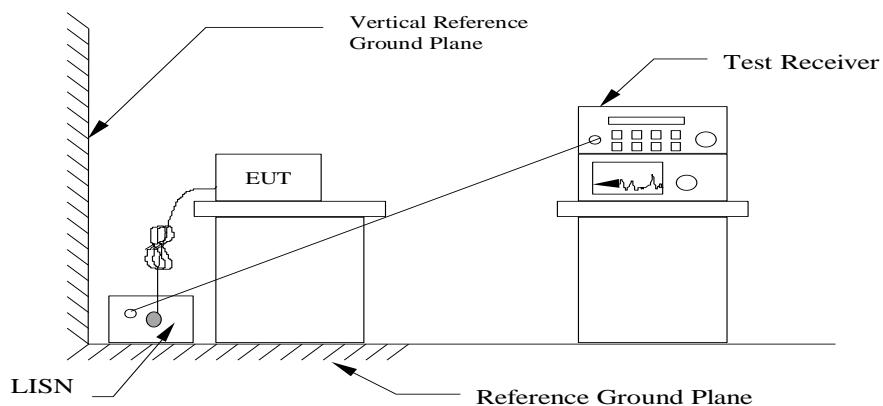

4.3 Conducted Emission Data

File: 21-05-MAW-007

#1

Date: 2021/12/23

Temperature: 24 °C

Time: PM 06:05:55

Humidity: 58 %



Site: CE04-10M 2F

Condition: FCC PART15B Class B Conduction(QP)

Phase: L1

EUT: Rapid Test Reader

Power: AC 110V/60Hz

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note:

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.166	33.94	QP	9.65	43.59	65.16	-21.57
2	0.178	38.76	QP	9.64	48.40	64.58	-16.18
3	0.234	32.46	QP	9.64	42.10	62.31	-20.21
4	0.250	30.35	QP	9.64	39.99	61.76	-21.77
*5	0.494	31.11	QP	9.65	40.76	56.10	-15.34
6	9.610	27.12	QP	9.83	36.95	60.00	-23.05

Note: 1. Place of measurement: EMC LAB. of the ETC.

2. "****" means the value was too low to be measured.

3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.

4. "#" means the noise was too low, so record the peak value.

5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

6. The estimated measurement uncertainty of the result measurement is:

 ± 3.04 dB(150 kHz \leq f \leq 30 MHz)

File: 21-05-MAW-#2

Date: 2021/12/23

Temperature: 24 °C

007

Time: PM 06:07:03

Humidity: 58 %



Site: CE04-10M 2F

Condition: FCC PART15B Class B Conduction(QP)

Phase: N

EUT: Rapid Test Reader

Power: AC 110V/60Hz

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note:

No.	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	0.178	38.20	QP	9.58	47.78	64.58	-16.80
2	0.190	37.14	QP	9.58	46.72	64.04	-17.32
*3	0.510	31.35	QP	9.59	40.94	56.00	-15.06
4	9.286	27.38	QP	9.79	37.17	60.00	-22.83
5	0.454	29.89	QP	9.59	39.48	56.80	-17.32
6	0.814	27.66	QP	9.61	37.27	56.00	-18.73

Note: 1. Place of measurement: EMC LAB. of the ETC.

2. "****" means the value was too low to be measured.

3. If the data table appeared symbol of "----" means the Q.P. value is under the limit of AVG. so, the AVG. value doesn't need to be measured.

4. "#" means the noise was too low, so record the peak value.

5. The estimated measurement uncertainty of the result measurement is ± 2.5 dB.

6. The estimated measurement uncertainty of the result measurement is:

 ± 3.04 dB(150 kHz $\leq f \leq 30$ MHz)

4.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR} \text{ (Included Cable Loss)}$$

4.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test.

Equipment	Trade Name	Model No.
EMI Test Receiver	R&S	ESCI
V-LISN	R&S	ENV216

Software: EZ-EMC (Ver. ETC-03A1)

5 ANTENNA REQUIREMENT

5.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to §15.247 (b)(4), The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

5.2 Antenna Construction and Directional Gain

The antennas is a Dipole Antenna.

Antenna Type	Dipole Antenna
Operation Frequency Range	2.4 - 2.5 GHz
Antenna Gain	3.2 dBi

Remark: The antenna specification is provided by manufacturer/applicant to ETC as reference. We, ETC, trust manufacturer/applicant's antenna specification is true. If there is any loss or damage occurred, the responsibility goes to manufacturer/applicant.

The directional gain of antenna doesn't greater than 6 dBi, the power won't be reduced.

6 EMISSION BANDWIDTH MEASUREMENT


6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

6.2 Measurement Procedure

1. The testing follows FCC KDB 558074 D01 v04.
2. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Position the EUT as shown in figure 2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
4. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

Figure 2: Measurement onfiguration.



6.3 Measurement Equipment

Equipment	Trade Name	Model No.
Spectrum Analyzer	R&S	FSV40
Attenuator	WEINSCHEL	56-10

Software: LZ-RF (Ver. ETC-3A2)

6.4 Measurement Data

6.4.1 IEEE 802.11b

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%

Channel	6dB Bandwidth (MHz)	FCC Limit (kHz)	Chart
L	9.6	500	Page 28
M	8.2	500	Page 29
H	9.0	500	Page 30

Note:*Please refer to page 28 to page 30 for chart*

File: 21-05-MAW-007_B

#1

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %



Condition: 0.35dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 500ms Att.: 20dB

Model: CHR-631W

RBW: 100 KHz VBW: 300 KHz

Test Mode: DTS

Operator: Phillip

Note: FCC_802.11b Channel 01-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2407.20000	-0.63
2	2411.30000	6.35
3	2416.80000	0.23

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	9.6	0.86

File: 21-05-MAW-007_B


#5

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

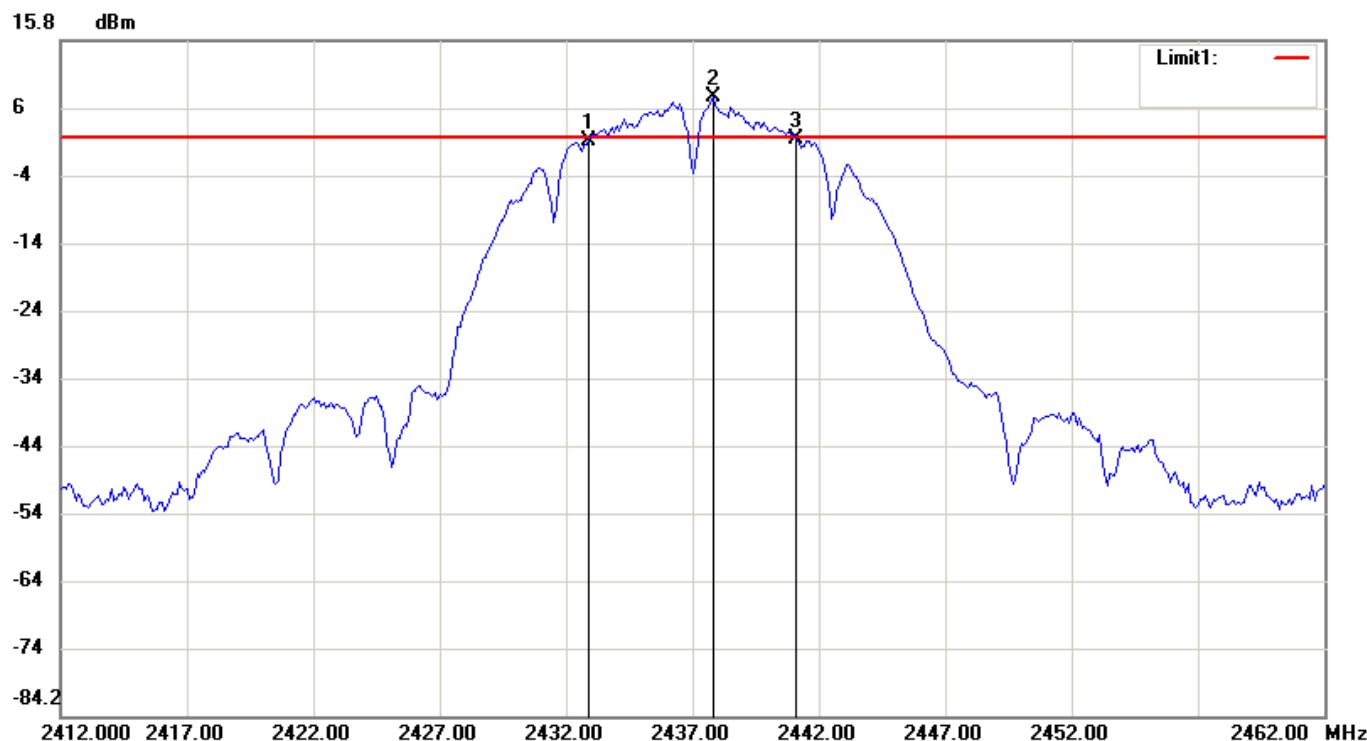

Condition: 1.37dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 500ms Att.: 20dB

Model: CHR-631W

RBW: 100 KHz VBW: 300 KHz

Test Mode: DTS

Operator: Phillip

Note: FCC_802.11b Channel 06-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2432.90000	0.85
2	2437.80000	7.37
3	2441.10000	1.27

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	8.2	0.42

File: 21-05-MAW-007_B


#8

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

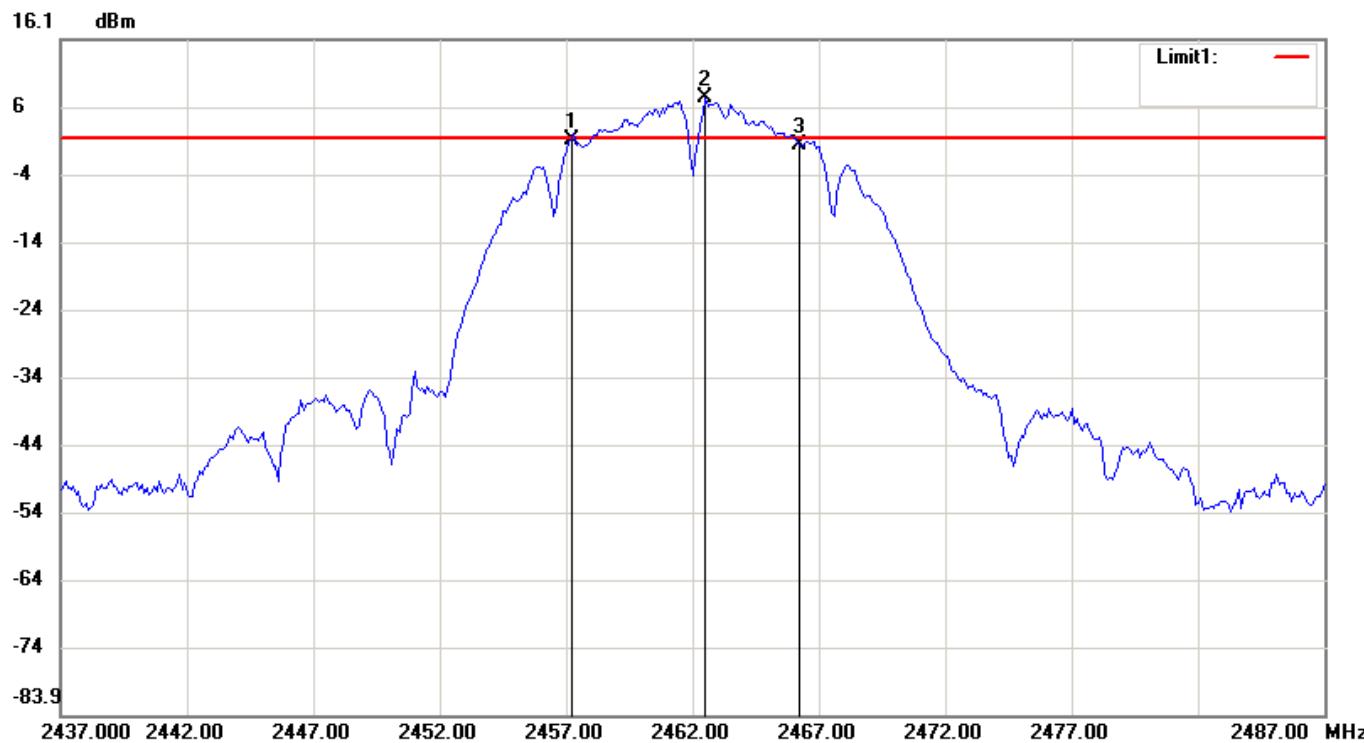

Condition: 1.36dBm RF Conducted

EUT: Rapid Test Reader Sweep Time: 500ms Att.: 20dB

Model: CHR-631W RBW: 100 KHz VBW: 300 KHz

Test Mode: DTS Operator: Phillip

Note: FCC_802.11b Channel 11-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2457.20000	1.22
2	2462.50000	7.36
3	2466.20000	0.52

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	9	-0.7

6.4.2 IEEE 802.11g

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%%

Channel	6dB Bandwidth (MHz)	FCC Limit (kHz)	Chart
L	16.6	500	Page 32
M	16.6	500	Page 33
H	16.6	500	Page 34

Note:*Please refer to page 32 to page 34 for chart*

File: 21-05-MAW-007_G


#1

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

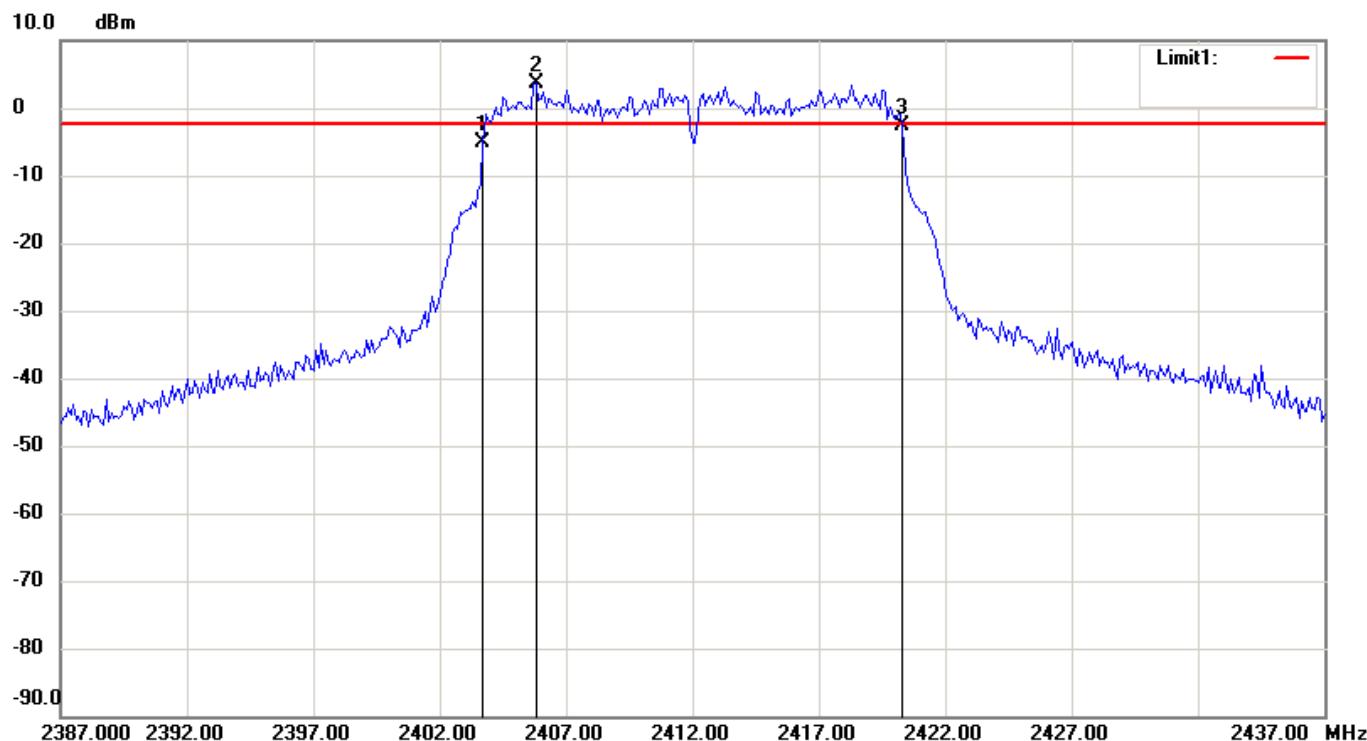

Condition: -2.37dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 500ms Att.: 20dB

Model: CHR-631W

RBW: 100 KHz VBW: 300 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11g Channel 01-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2403.70000	-5.11
2	2405.80000	3.63
3	2420.30000	-2.56

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.6
		2.55

File: 21-05-MAW-007_G


#5

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

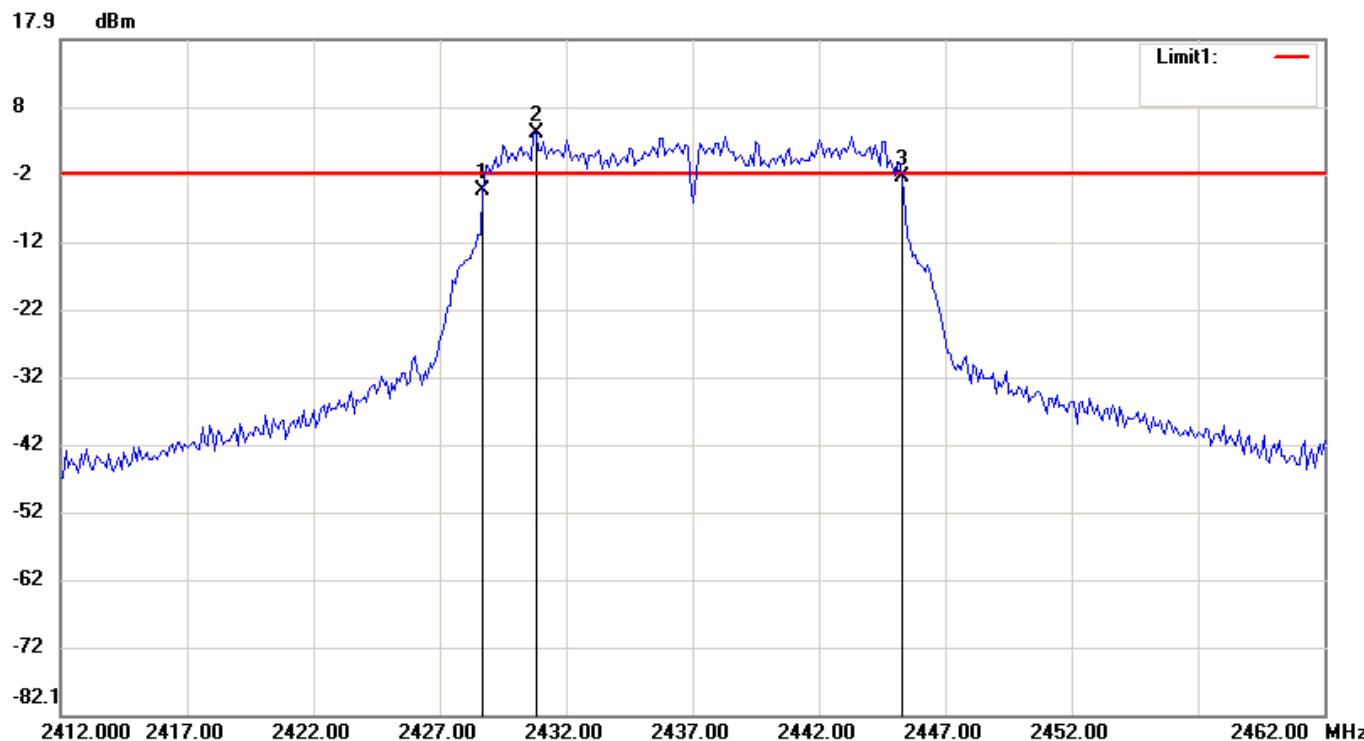

Condition: -1.95dBm **RF Conducted**
EUT: Rapid Test Reader **Sweep Time: 500ms Att.: 20dB**
Model: CHR-631W **RBW: 100 KHz VBW: 300 KHz**
Test Mode: DTS **Operator: Phillip**
Note: NCC_LP0002_802.11g Channel 06-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2428.70000	-4.42
2	2430.80000	4.05
3	2445.30000	-2.45

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.6	1.97

File: 21-05-MAW-007_G


#8

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

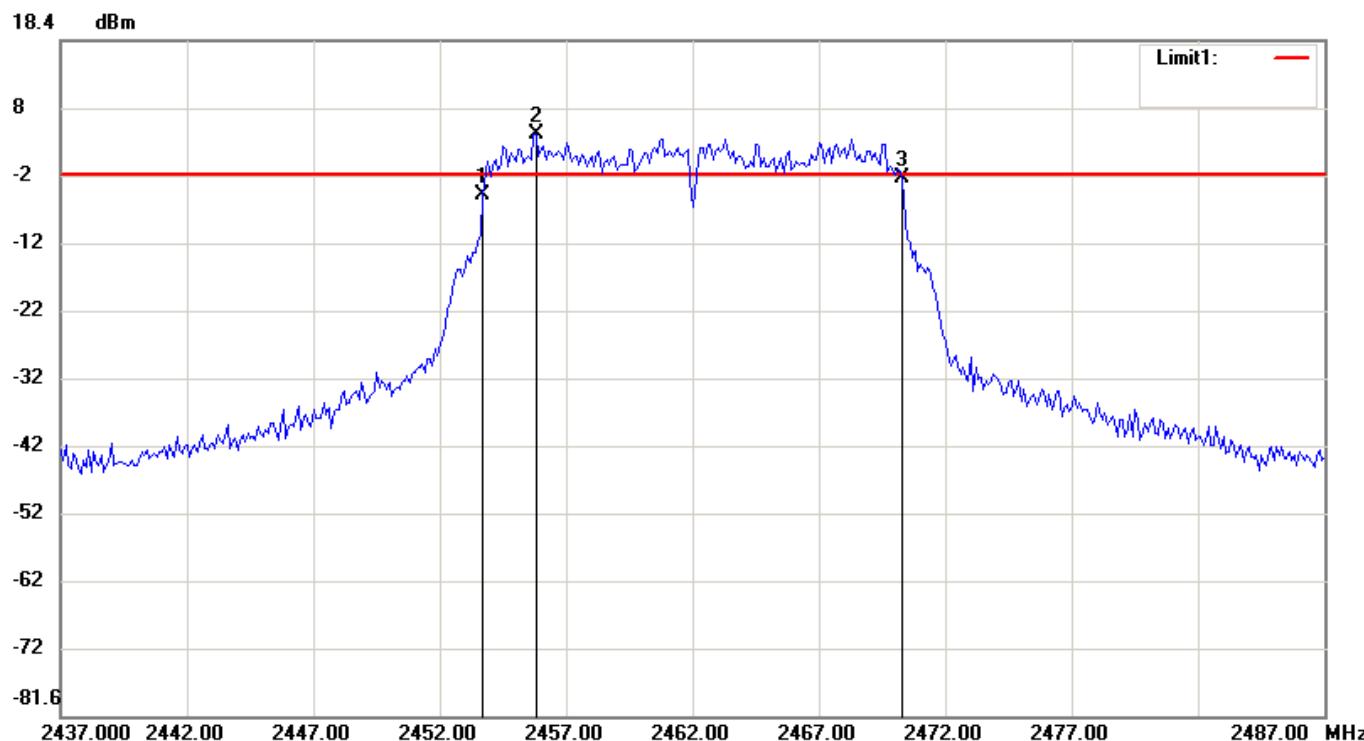

Condition: -1.46dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 500ms Att.: 20dB

Model: CHR-631W

RBW: 100 KHz VBW: 300 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11g Channel 11-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2453.70000	-4.60
2	2455.80000	4.54
3	2470.30000	-2.09

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	16.6 2.51

6.4.3 IEEE 802.11n, HT20

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%

Channel	6dB Bandwidth (MHz)	FCC Limit (kHz)	Chart
L	17.9	500	Page 36
M	17.9	500	Page 37
H	17.9	500	Page 38

Note:*Please refer to page 36 to page 38 for chart*

File: 21-05-MAW-007_n20


#1

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

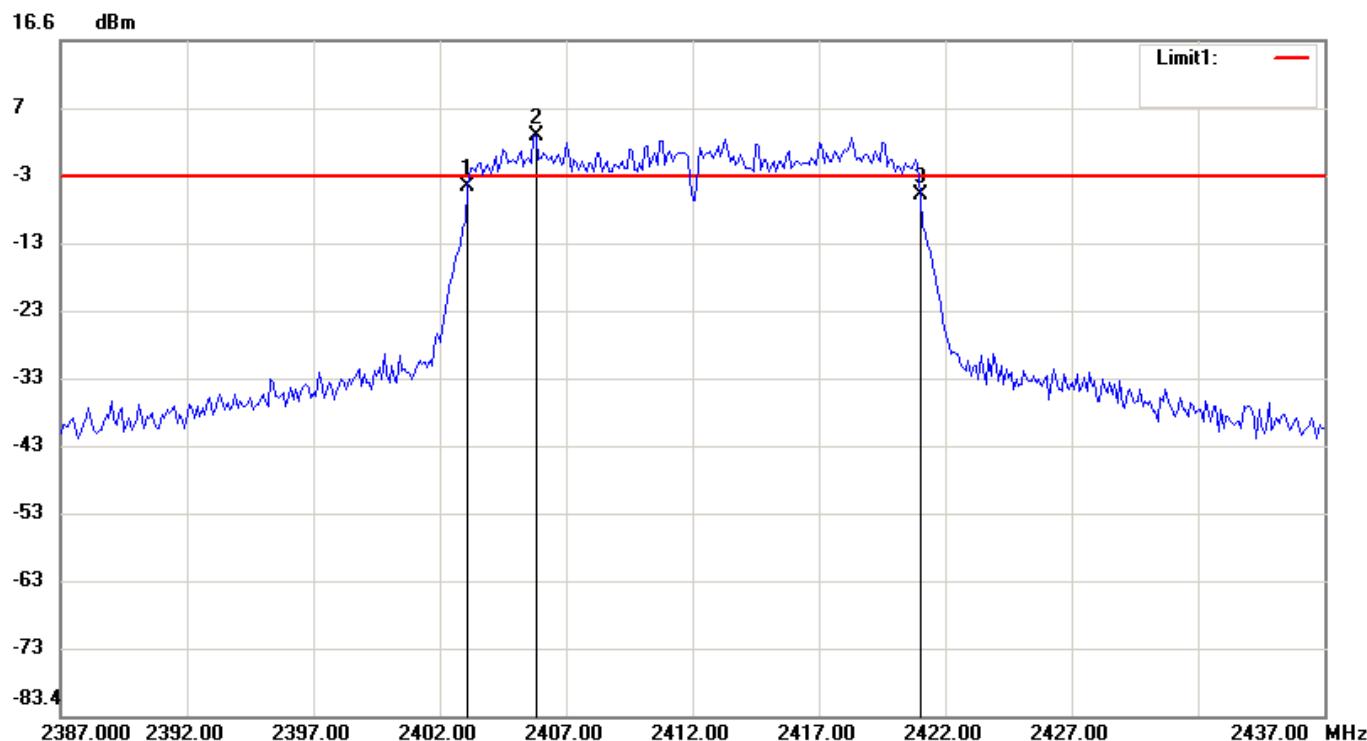

Condition: -3.51dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 500ms Att.: 20dB

Model: CHR-631W

RBW: 100 KHz

VBW: 300 KHz

Test Mode: DTS

Operator:

Phillip

Note: NCC_LP0002_802.11n-HT20 Channel 01-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2403.10000	-4.96
2	2405.80000	2.49
3	2421.00000	-6.20

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	17.9

File: 21-05-MAW-007_n20


#5

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

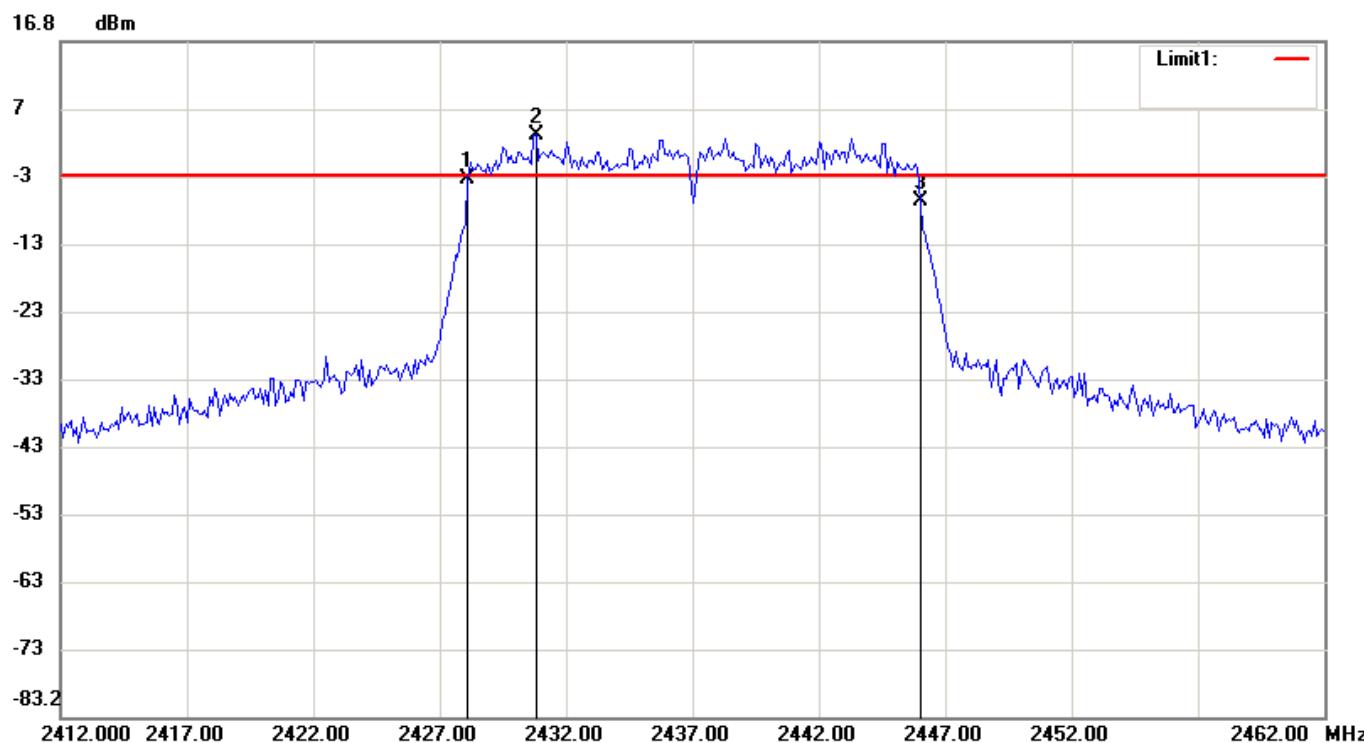

Condition: -3dBm **RF Conducted**
EUT: Rapid Test Reader **Sweep Time: 500ms Att.: 20dB**
Model: CHR-631W **RBW: 100 KHz VBW: 300 KHz**
Test Mode: DTS **Operator: Phillip**
Note: NCC_LP0002_802.11n-HT20 Channel 06-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2428.10000	-3.67
2	2430.80000	3.00
3	2446.00000	-6.76

No.		△Frequency(MHz)	△Level(dB)
1	mk3-mk1	17.9	-3.09

File: 21-05-MAW-007_n20


#8

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

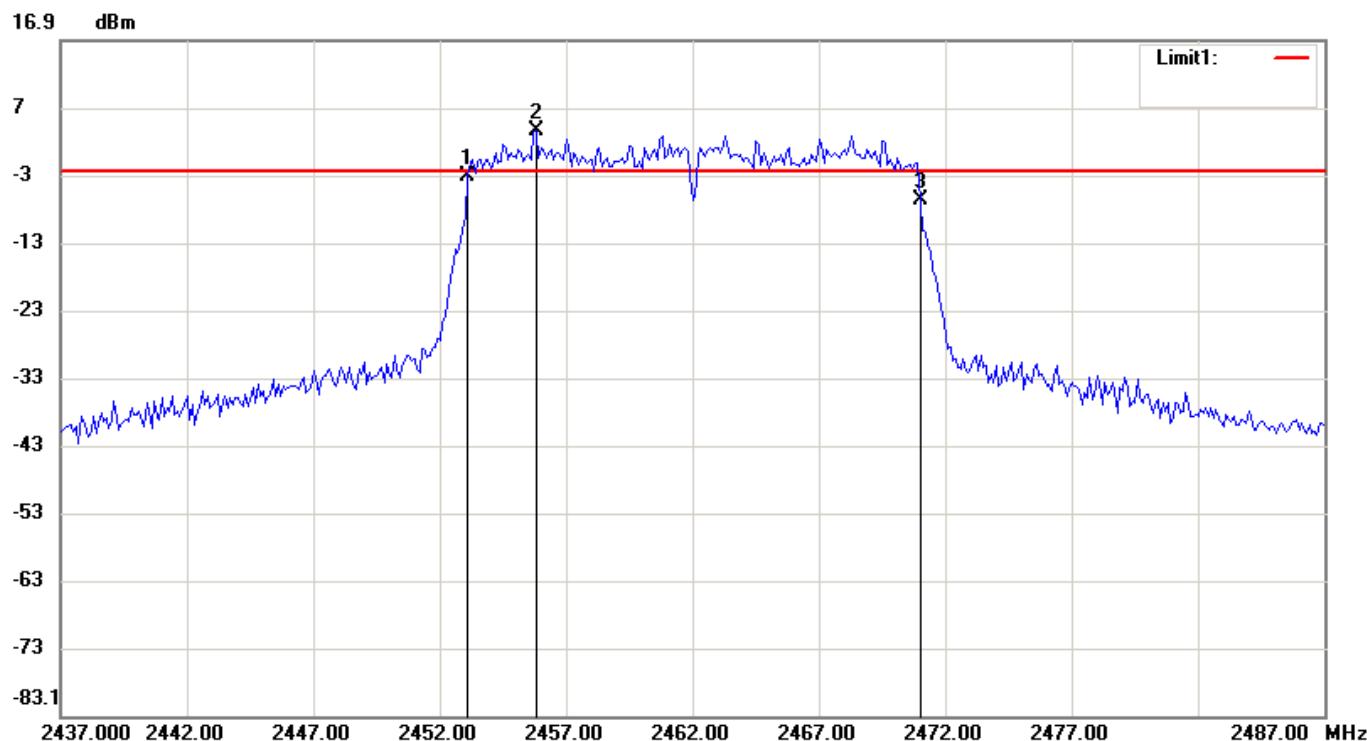

Condition: -2.52dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 500ms Att.: 20dB

Model: CHR-631W

RBW: 100 KHz

VBW: 300 KHz

Test Mode: DTS

Operator:

Phillip

Note: NCC_LP0002_802.11n-HT20 Channel 11-6dB EBW

No.	Frequency(MHz)	Level(dBm)
1	2453.10000	-3.28
2	2455.80000	3.48
3	2471.00000	-6.66

No.	△Frequency(MHz)	△Level(dB)
1	mk3-mk1	17.9

7 OUTPUT POWER MEASUREMENT

7.1 Standard Applicable


According to 15.247(b)(3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

And according to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi..

7.2 Measurement Procedure

1. The testing follows FCC KDB 558074 D01 v04.
2. The test is performed in accordance with FCC KDB Publication No. 558074: Guidance on Measurements for Digital Transmission Systems (47 CFR 15.247)
3. Position the EUT as shown in figure 3.

Figure 3: Output power measurement configuration.



7.3 Measurement Equipment

Equipment	Trade Name	Model No.
Power Meter	Agilent	N1912A
Power Sensor	Agilent	N1922A
Attenuator	WEINSCHEL	56-10

Software: LZ-RF (Ver. ETC-3A2)

7.4 Measurement Data

7.4.1 IEEE 802.11b

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%

Channel	Maximum Peak Output Power (dBm)	FCC Limit (dBm)	Chart
L	17.72	30.0	-
M	17.79	30.0	-
H	18.03	30.0	-

Note:

The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

7.4.2 IEEE 802.11g

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%

Channel	Maximum Peak Output Power (dBm)	FCC Limit (dBm)	Chart
L	24.31	30.0	-
M	24.69	30.0	-
H	24.82	30.0	-

Note:*The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)*

7.4.3 IEEE 802.11n, HT20

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%

Channel	Maximum Peak	FCC Limit	Chart
	Output Power (dBm)	(dBm)	
L	23.73	30.0	-
M	24.19	30.0	-
H	24.39	30.0	-

Note:*The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)*

8 POWER DENSITY MEASUREMENT

8.1 Standard Applicable

According to 15.247(e), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

8.2 Measurement Procedure

1. The testing follows FCC KDB 558074 D01 v04.
2. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Position the EUT as shown in figure 2. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
4. Adjust the center frequency of spectrum analyzer on highest level appearing on spectral display within a 300 kHz frequency span.
5. Set the spectrum analyzer on a 3 kHz resolution bandwidth and 10 kHz video bandwidth as well as max. hold function, then record the measurement result.
6. Repeat above procedures until all measured frequencies were complete.

8.3 Measurement Equipment

Equipment	Trade Name	Model No.
Spectrum Analyzer	R&S	FSV40
Attenuator	WEINSCHEL	56-10

Software: LZ-RF (Ver. ETC-3A2)

8.4 Measurement Data

8.4.1 IEEE 802.11b

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%

Channel	Peak Power Spectral Density (dBm)	FCC Limit (dBm)	Chart
L	-6.81	8	Page 45
M	-5.63	8	Page 46
H	-5.56	8	Page 47

Note:

1. Please refer to page 45 to page 47 for chart
2. The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

File: 21-05-MAW-007_B

#3

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

**Condition:**

EUT: Rapid Test Reader

Model: CHR-631W

Test Mode: DTS

Note: FCC_802.11b Channel 01-Power Density (PK)

RF Conducted

Sweep Time: 334ms Att.: 20dB

RBW: 3 KHz VBW: 10 KHz

Operator: Phillip

No.	Frequency(MHz)	Level(dBm)
1	2412.78000	-6.81

File: 21-05-MAW-007_B

#7

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

**Condition:**

EUT: Rapid Test Reader

RF Conducted

Sweep Time: 334ms Att.: 20dB

Model: CHR-631W

RBW: 3 KHz VBW: 10 KHz

Test Mode: DTS

Operator: Phillip

Note: FCC_802.11b Channel 06-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2436.28000	-5.63

File: 21-05-MAW-007_B


#10

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

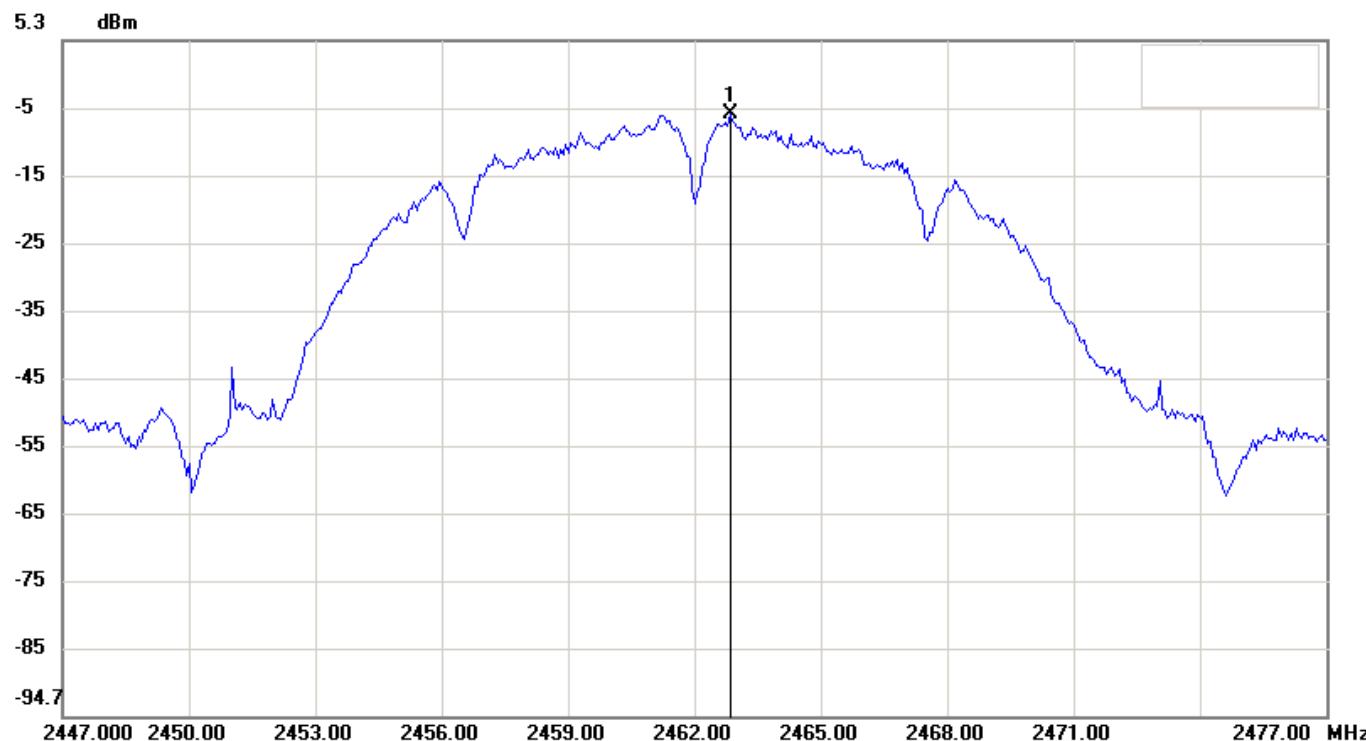**Condition:**

EUT: Rapid Test Reader

RF Conducted

Sweep Time: 334ms Att.: 20dB

Model: CHR-631W

RBW: 3 KHz VBW: 10 KHz

Test Mode: DTS

Operator: Phillip

Note: FCC_802.11b Channel 11-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2462.84000	-5.56

8.4.2 IEEE 802.11g

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%

Channel	Peak Power Spectral Density (dBm)	FCC Limit (dBm)	Chart
L	-9.02	8	Page 49
M	-9.01	8	Page 50
H	-8.42	8	Page 51

Note:

1. Please refer to page 49 to page 51 for chart
2. The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

File: 21-05-MAW-007_G


#3

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

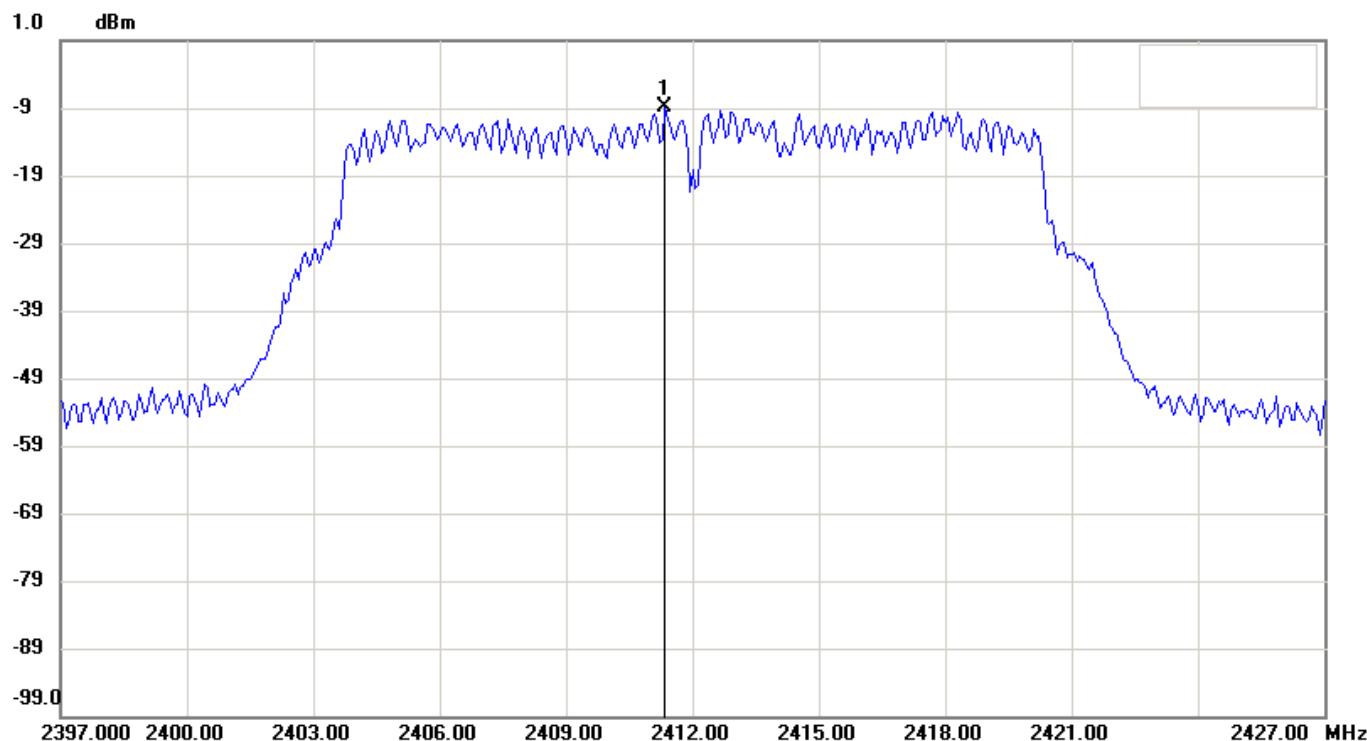**Condition:**

EUT: Rapid Test Reader

RF Conducted

Sweep Time: 334ms Att.: 20dB

Model: CHR-631W

RBW: 3 KHz VBW: 10 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11g Channel 01-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2411.34000	-9.02

File: 21-05-MAW-007_G


#7

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

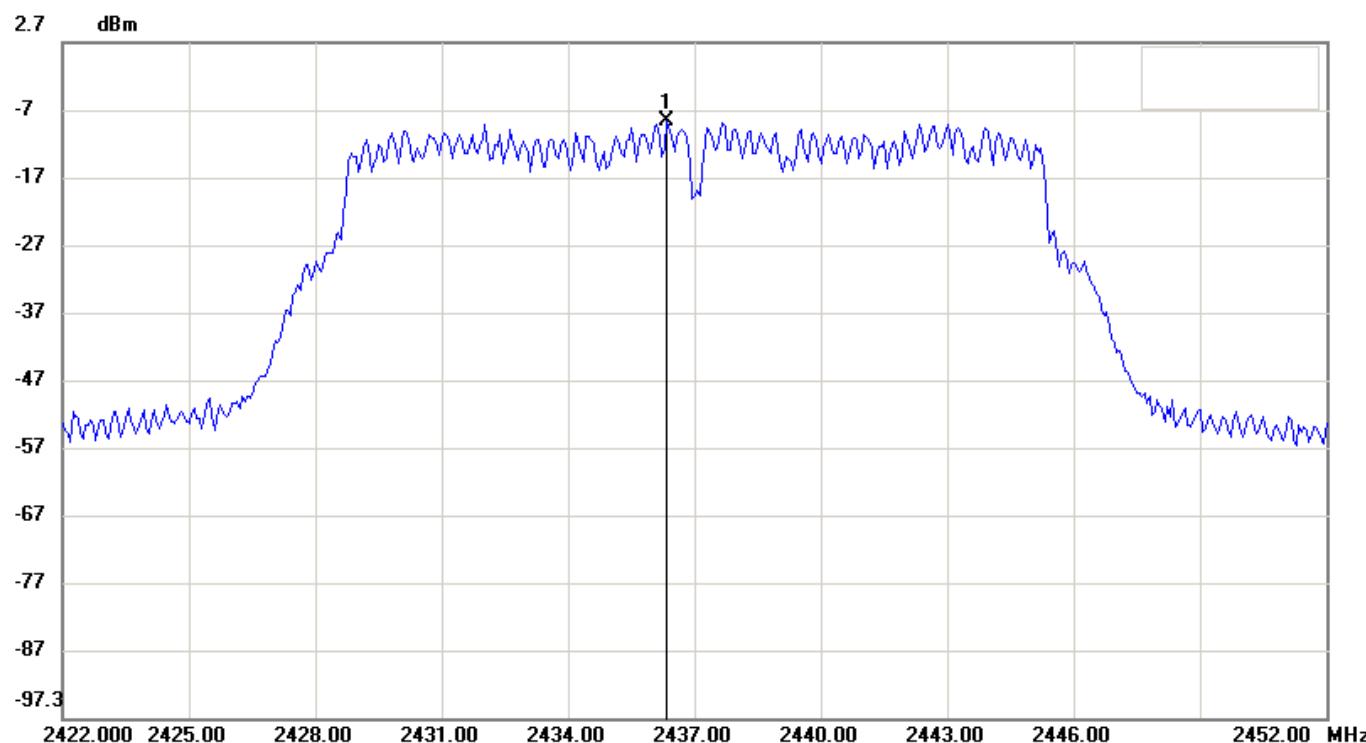**Condition:**

EUT: Rapid Test Reader

RF Conducted

Sweep Time: 334ms Att.: 20dB

Model: CHR-631W

RBW: 3 KHz VBW: 10 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11g Channel 06-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2436.34000	-9.01

File: 21-05-MAW-007_G


#10

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

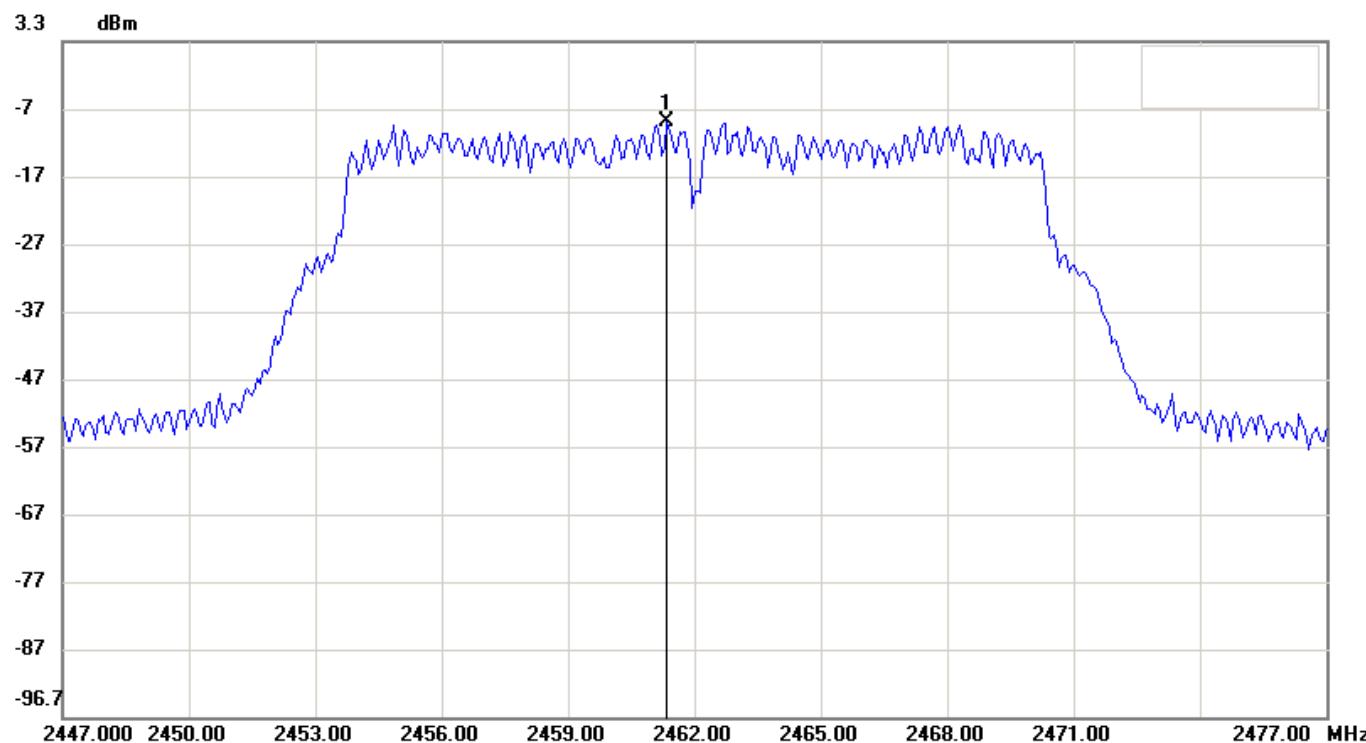**Condition:****RF Conducted****EUT:** Rapid Test Reader**Sweep Time:** 334ms **Att.:** 20dB**Model:** CHR-631W**RBW:** 3 KHz **VBW:** 10 KHz**Test Mode:** DTS**Operator:** Phillip**Note:** NCC_LP0002_802.11g Channel 11-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2461.34000	-8.42

8.4.3 IEEE 802.11n, HT20

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%

Channel	Peak Power Spectral Density (dBm)	FCC Limit (dBm)	Chart
L	-11.76	8	Page 53
M	-10.83	8	Page 54
H	-10.86	8	Page 55

Note:

1. Please refer to page 53 to page 55 for chart
2. The estimated measurement uncertainty of the result measurement is $\pm 1.5\text{dB}$ ($1\text{GHz} \leq f \leq 18\text{GHz}$)

File: 21-05-MAW-007_n20


#3

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

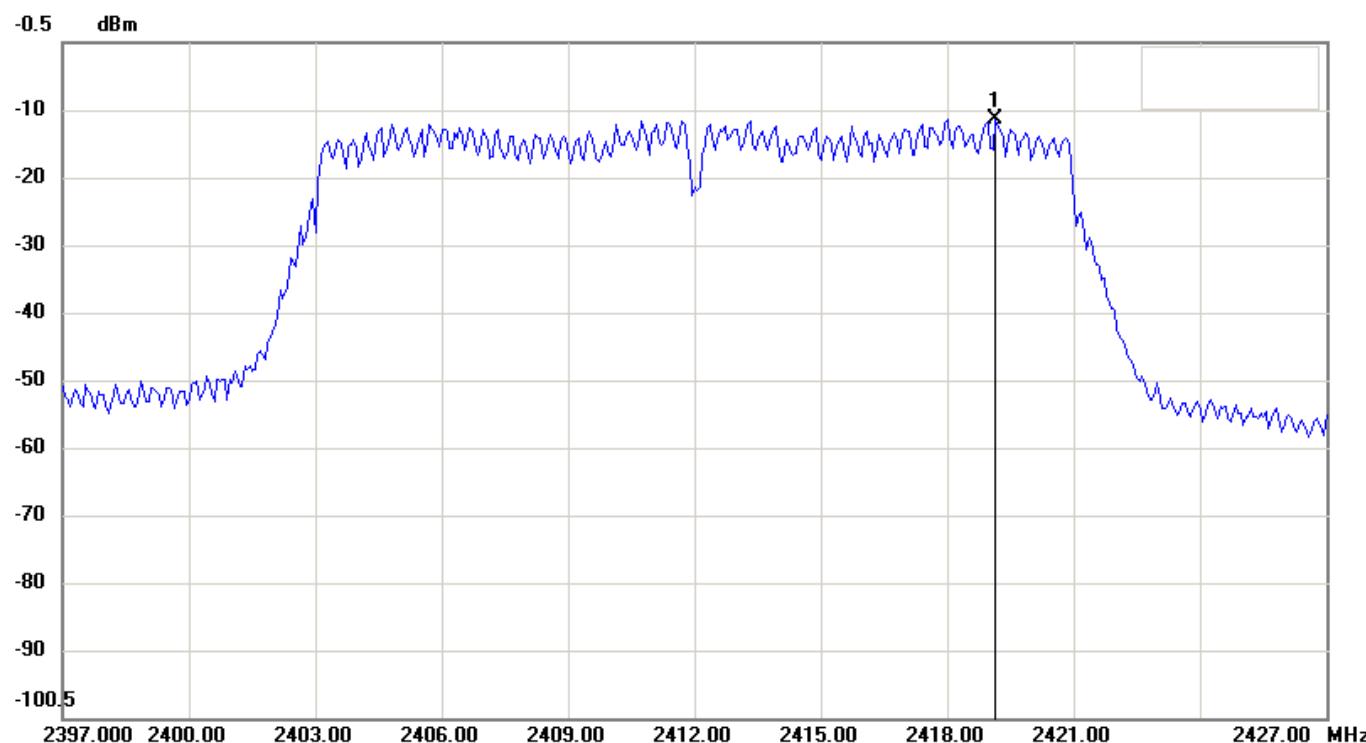**Condition:****RF Conducted**

EUT: Rapid Test Reader

Sweep Time: 334ms Att.: 20dB

Model: CHR-631W

RBW: 3 KHz VBW: 10 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11n-HT20 Channel 01-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2419.14000	-11.76

File: 21-05-MAW-007_n20


#7

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

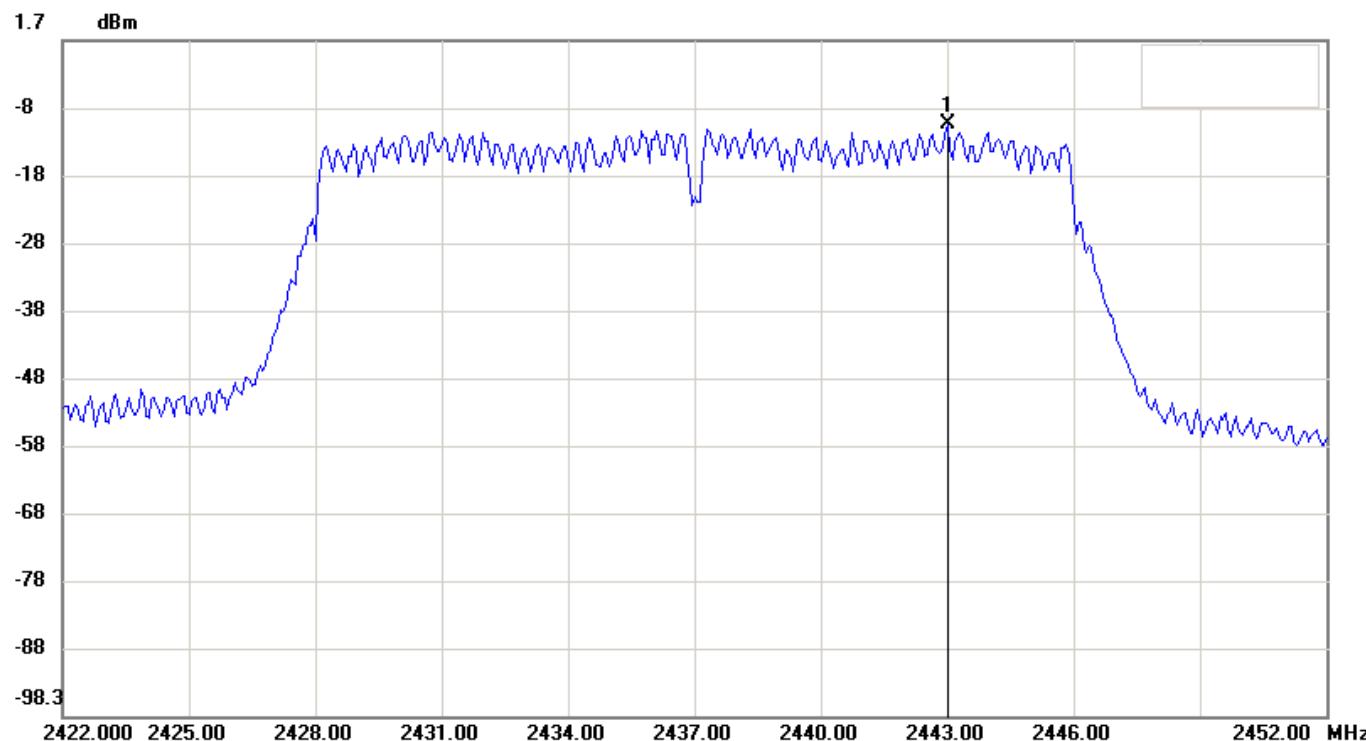**Condition:**

EUT: Rapid Test Reader

RF Conducted

Sweep Time: 334ms Att.: 20dB

Model: CHR-631W

RBW: 3 KHz VBW: 10 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11n-HT20 Channel 06-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2443.00000	-10.83

File: 21-05-MAW-007_n20


#10

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

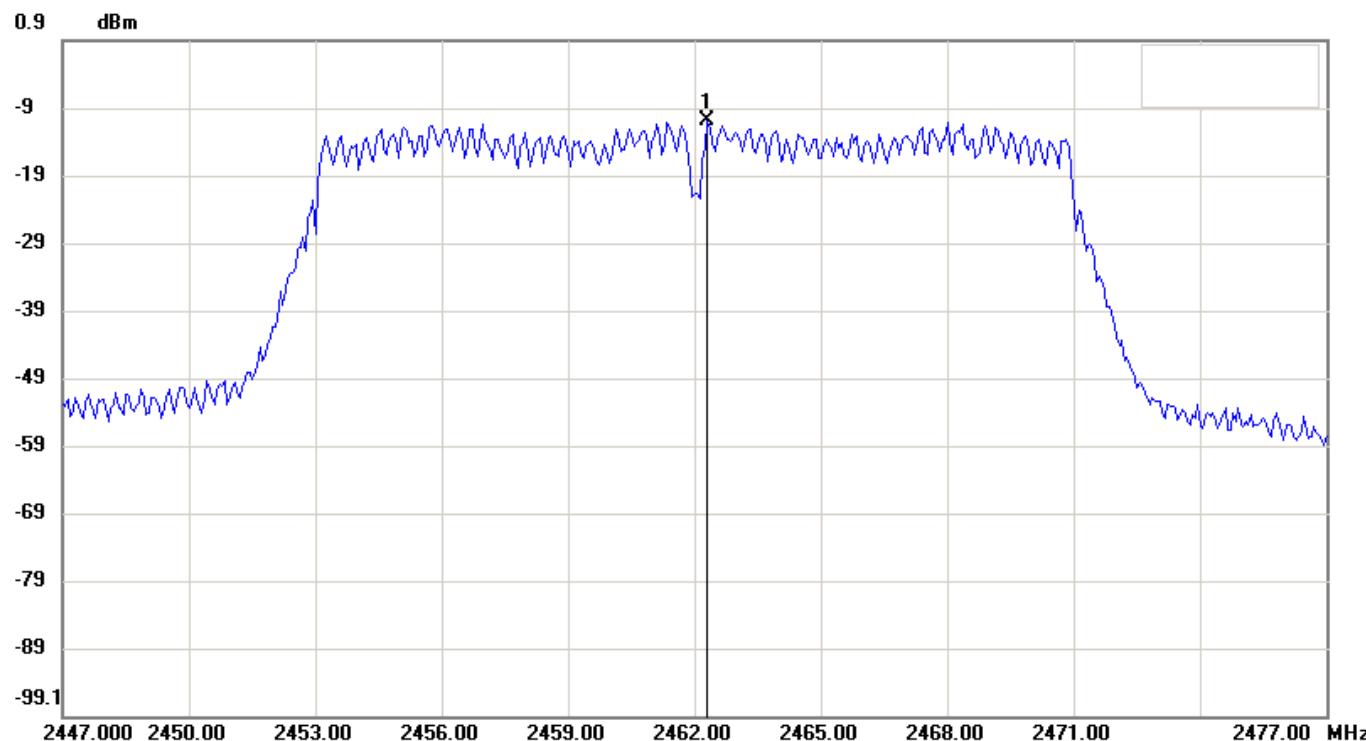**Condition:****RF Conducted**

EUT: Rapid Test Reader

Sweep Time: 334ms Att.: 20dB

Model: CHR-631W

RBW: 3 KHz VBW: 10 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11n-HT20 Channel 11-Power Density (PK)

No.	Frequency(MHz)	Level(dBm)
1	2462.3000	-10.86

9 SPURIOUS EMISSION - RF CONDUCTED MEASUREMENT

9.1 Standard Applicable

According to 12.247 (d) , in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

9.2 Measurement Procedure

1. The testing follows FCC KDB 558074 D01 v04.
2. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
3. Position the EUT as shown in figure 2. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
4. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge.
5. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
6. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Trade Name	Model No.
Spectrum Analyzer	R&S	FSV40
Attenuator	WEINSCHEL	56-10

Software: LZ-RF (Ver. ETC-3A2)

9.4 Measurement Data

9.4.1 IEEE 802.11b

Test Date: Aug. 05, 2021

Temperature: 25°C

Humidity: 54%

Channel	Frequency(MHz)	Chart
1	2412	Page 58, Page 60
6	2437	Page 61
11	2462	Page 59, Page 62

Frequency Band: 2400 MHz ~ 2483.5 MHz

All out-of –band conducted emissions were more than 20dB below the carrier.

Note: 1. Please refer to page 58 to page 62 for chart

2. An external attenuator is used as part of the test system for these measurements, the attenuation introduced by the external attenuator has not been explicitly compensated in the measured power level as it is irrelevant to these specific measurement results.

9.4.2 IEEE 802.11g

Channel	Frequency(MHz)	Chart
1	2412	Page 63, Page 65
6	2437	Page 66
11	2462	Page 64, Page 67

Frequency Band: 2400 MHz ~ 2483.5 MHz

All out-of –band conducted emissions were more than 20dB below the carrier.

Note: 1. Please refer to page 63 to page 67 for chart

2. An external attenuator is used as part of the test system for these measurements, the attenuation introduced by the external attenuator has not been explicitly compensated in the measured power level as it is irrelevant to these specific measurement results.

9.4.3 IEEE 802.11n, HT20

Channel	Frequency(MHz)	Chart
1	2412	Page 68, Page 70
6	2437	Page 71
11	2462	Page 69, Page 72

Frequency Band: 2400 MHz ~ 2483.5 MHz

All out-of –band conducted emissions were more than 20dB below the carrier.


Note: 1. Please refer to page 68 to page 72 for chart

2. An external attenuator is used as part of the test system for these measurements, the attenuation introduced by the external attenuator has not been explicitly compensated in the measured power level as it is irrelevant to these specific measurement results.

802.11b

Low bandedge

File: 21-05-MAW-007_B #4 Date: 2021/8/5 Temperature: 25 °C
 Site: RF-Cond01 Humidity: 54 %

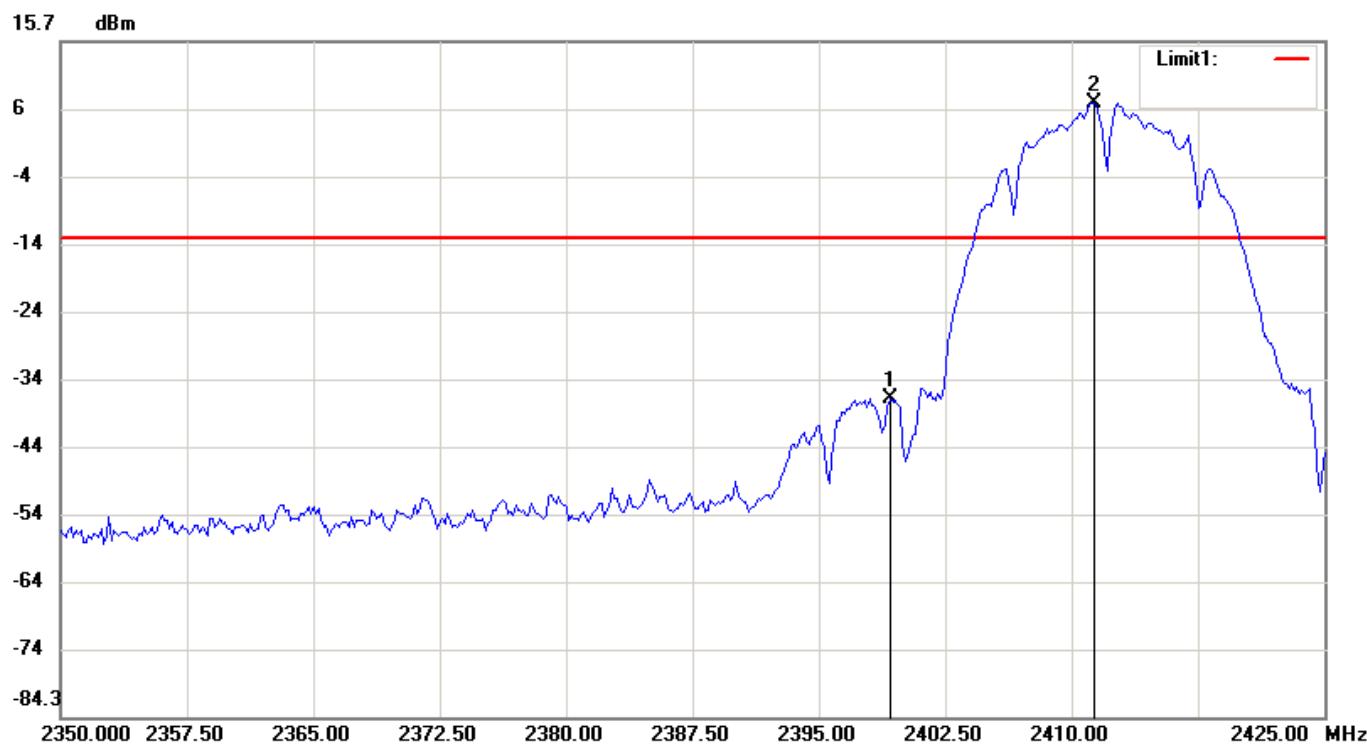

Condition:	-13.35dBm	RF Conducted
EUT:	Rapid Test Reader	Sweep Time: 500ms Att.: 20dB
Model:	CHR-631W	RBW: 100 KHz VBW: 300 KHz
Test Mode:	DTS	Operator: Phillip
Note:	FCC_802.11b Channel 01-Bandedge	

No.	Frequency(MHz)	Level(dBm)
1	2399.20000	-37.21
2	2411.35000	6.65

High bandedge

File: 21-05-MAW-007_B

#11

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %




Condition:	-12.92dBm	RF Conducted
EUT:	Rapid Test Reader	Sweep Time: 500ms Att.: 20dB
Model:	CHR-631W	RBW: 100 KHz VBW: 300 KHz
Test Mode:	DTS	Operator: Phillip
Note:	FCC_802.11b Channel 11-Bandedge	

No.	Frequency(MHz)	Level(dBm)
1	2461.10000	7.08
2	2485.22400	-48.57

CH Low

File: 21-05-MAW-007_B #2 Date: 2021/8/5 Temperature: 25 °C
 Site: RF-Cond01 Humidity: 54 %

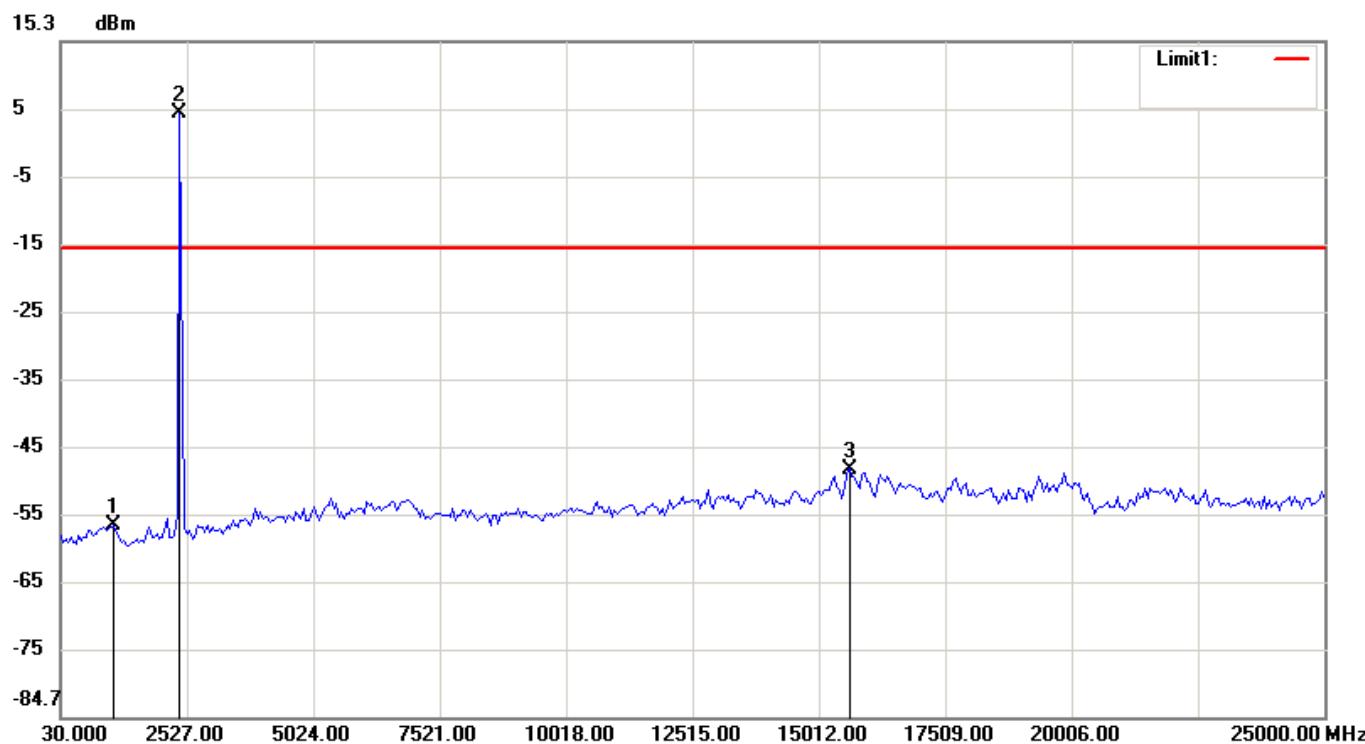


Condition:	-15.25dBm	RF Conducted
EUT:	Rapid Test Reader	Sweep Time: 250ms Att.: 20dB
Model:	CHR-631W	RBW: 100 KHz VBW: 300 KHz
Test Mode:	DTS	Operator: Phillip
Note:	FCC_802.11b Channel 01-Conducted Spurious	

No.	Frequency(MHz)	Level(dBm)
1	1078.74000	-56.41
2	2377.18000	4.75
3	15611.28000	-47.93

CH Mid

File: 21-05-MAW-007_B #6 Date: 2021/8/5 Temperature: 25 °C
 Site: RF-Cond01 Humidity: 54 %

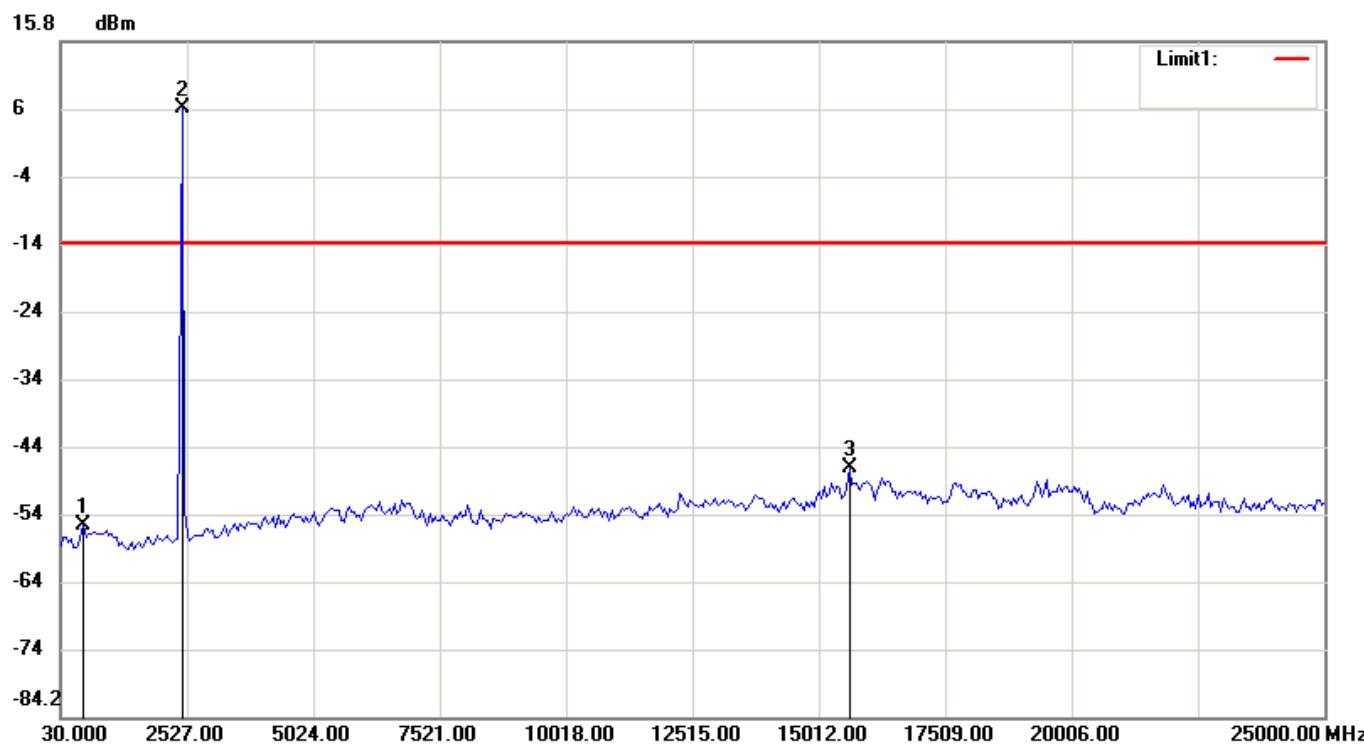

Condition: -14.06dBm RF Conducted
 EUT: Rapid Test Reader Sweep Time: 250ms Att.: 20dB
 Model: CHR-631W RBW: 100 KHz VBW: 300 KHz
 Test Mode: DTS Operator: Phillip
 Note: FCC_802.11b Channel 06-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	479.4600	-55.86
2	2427.1200	5.94
3	15611.2800	-47.40

CH High

File: 21-05-MAW-007_B


#9

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

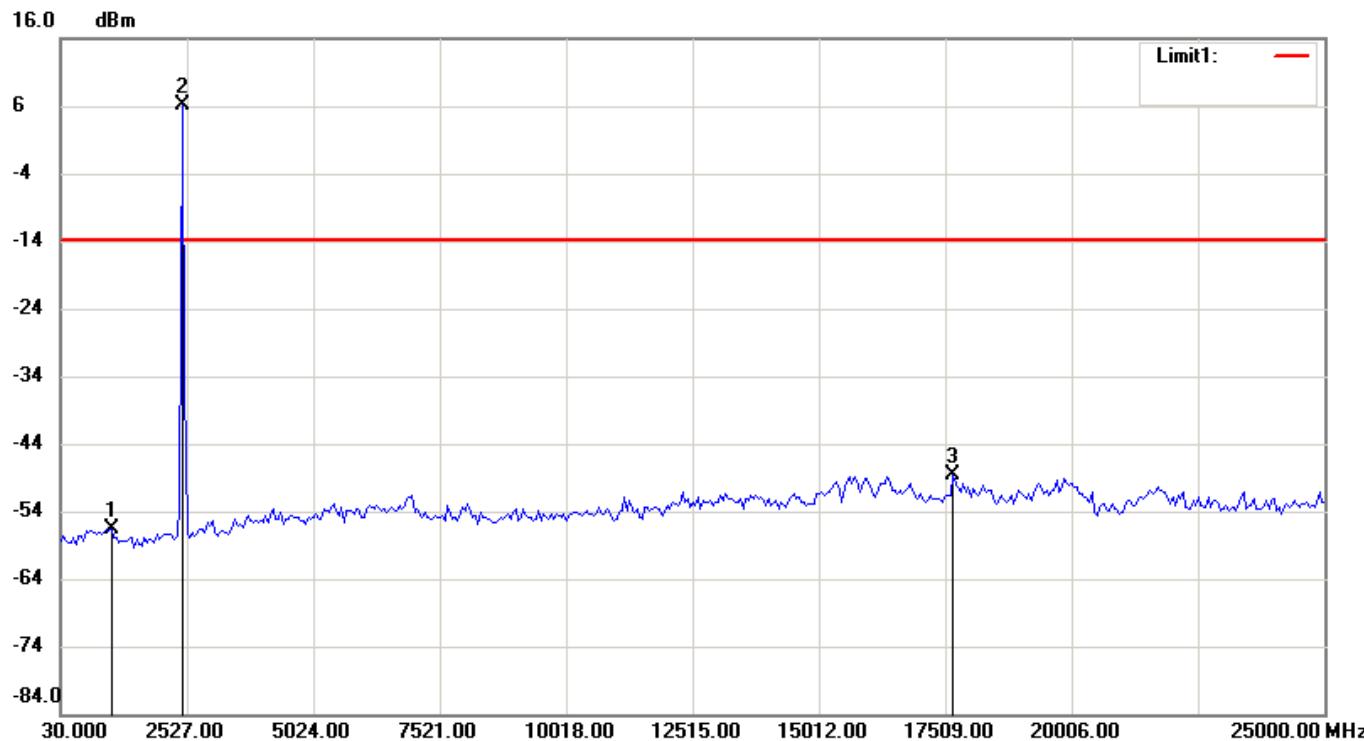

Condition: -13.92dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 250ms Att.: 20dB

Model: CHR-631W

RBW: 100 KHz VBW: 300 KHz

Test Mode: DTS

Operator: Phillip


Note: FCC_802.11b Channel 11-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	1028.8000	-56.57
2	2427.1200	6.08
3	17658.8200	-48.71

802.11g

Low bandedge

File: 21-05-MAW-007_G #4 Date: 2021/8/5 Temperature: 25 °C
 Site: RF-Cond01 Humidity: 54 %

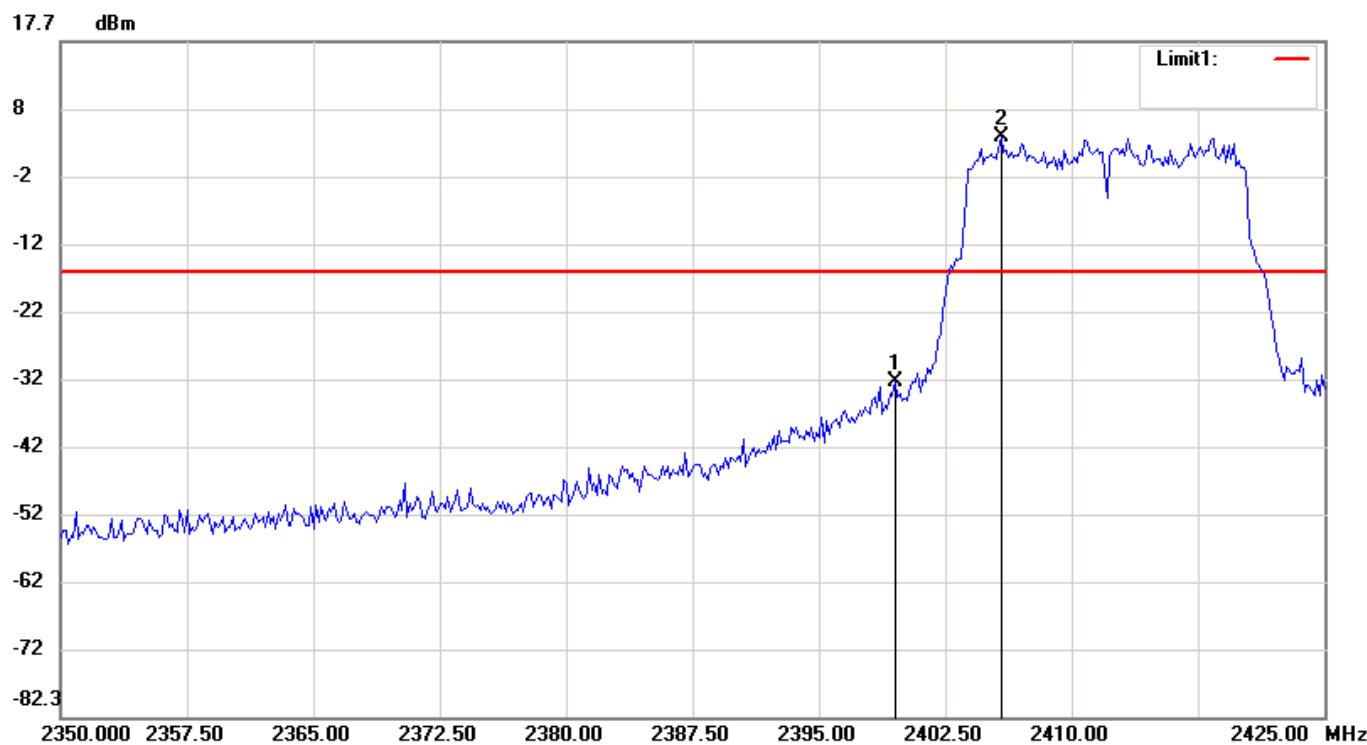

Condition: -16.36dBm RF Conducted
 EUT: Rapid Test Reader Sweep Time: 500ms Att.: 20dB
 Model: CHR-631W RBW: 100 KHz VBW: 300 KHz
 Test Mode: DTS Operator: Phillip
 Note: NCC_LP0002_802.11g Channel 01-Bandedge

No.	Frequency(MHz)	Level(dBm)
1	2399.50000	-32.73
2	2405.80000	3.64

High Bandedge

File: 21-05-MAW-007_G


#11

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

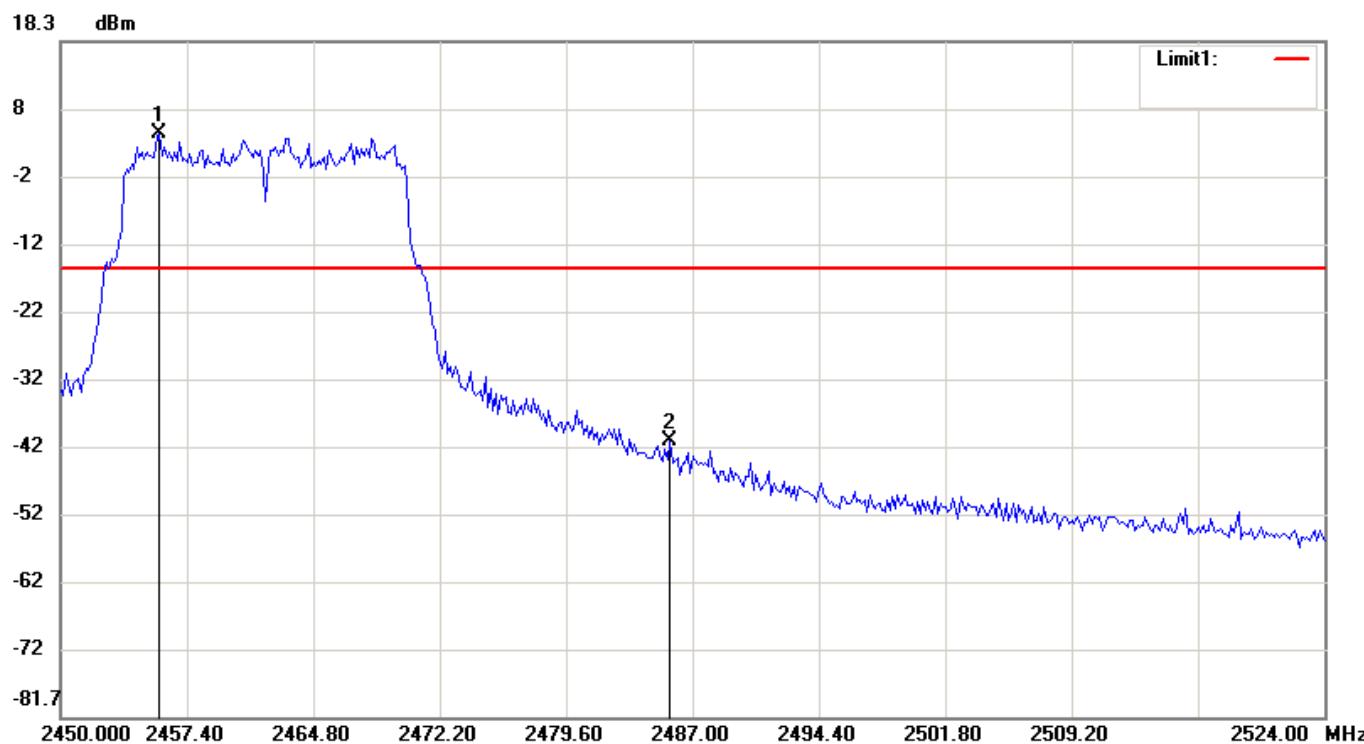

Condition: -15.44dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 500ms Att.: 20dB

Model: CHR-631W

RBW: 100 KHz VBW: 300 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11g Channel 11-Bandedge

No.	Frequency(MHz)	Level(dBm)
1	2455.77200	4.56
2	2485.66800	-40.82

CH Low

File: 21-05-MAW-007_G


#2

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

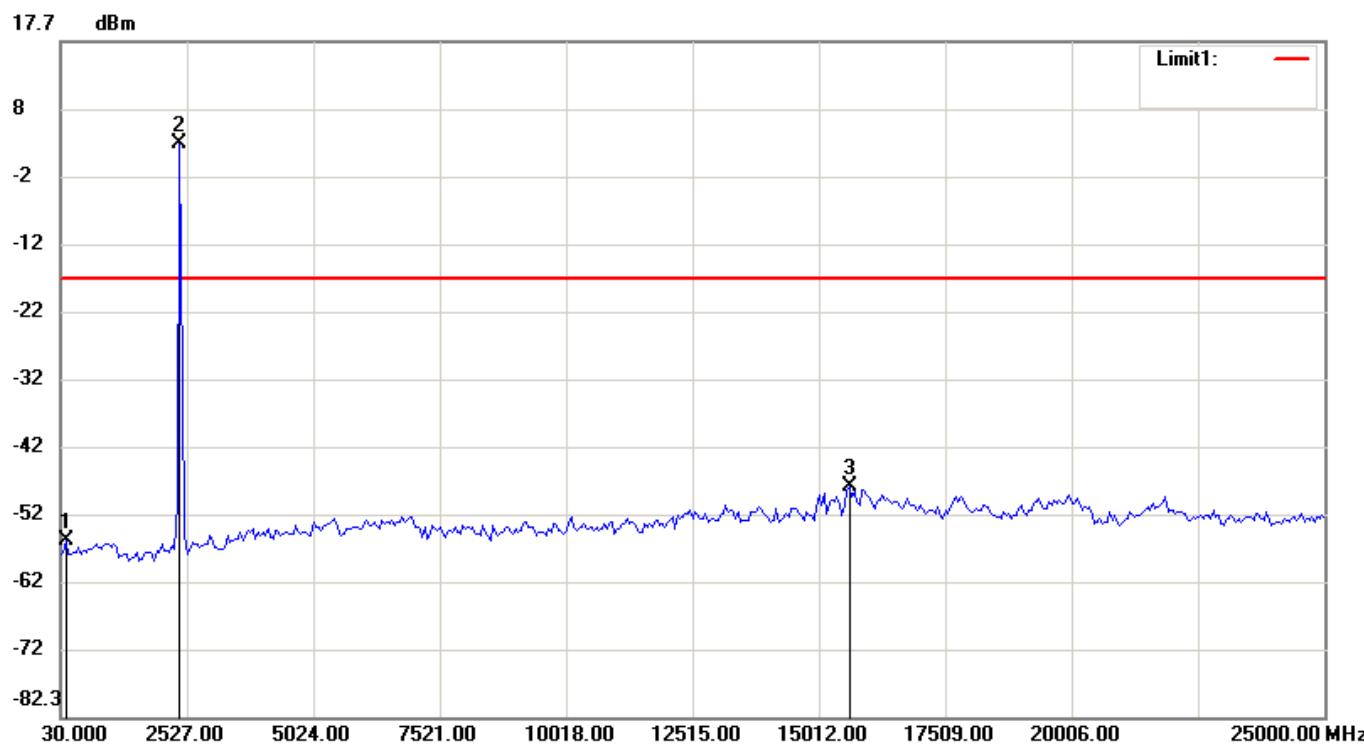

Condition: -17.28dBm **RF Conducted**
EUT: Rapid Test Reader **Sweep Time:** 250ms **Att.:** 20dB
Model: CHR-631W **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode: DTS **Operator:** Phillip
Note: NCC_LP0002_802.11g Channel 01-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	129.8800	-56.15
2	2377.18000	2.72
3	15611.28000	-48.08

CH Mid

File: 21-05-MAW-007_G


#6

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

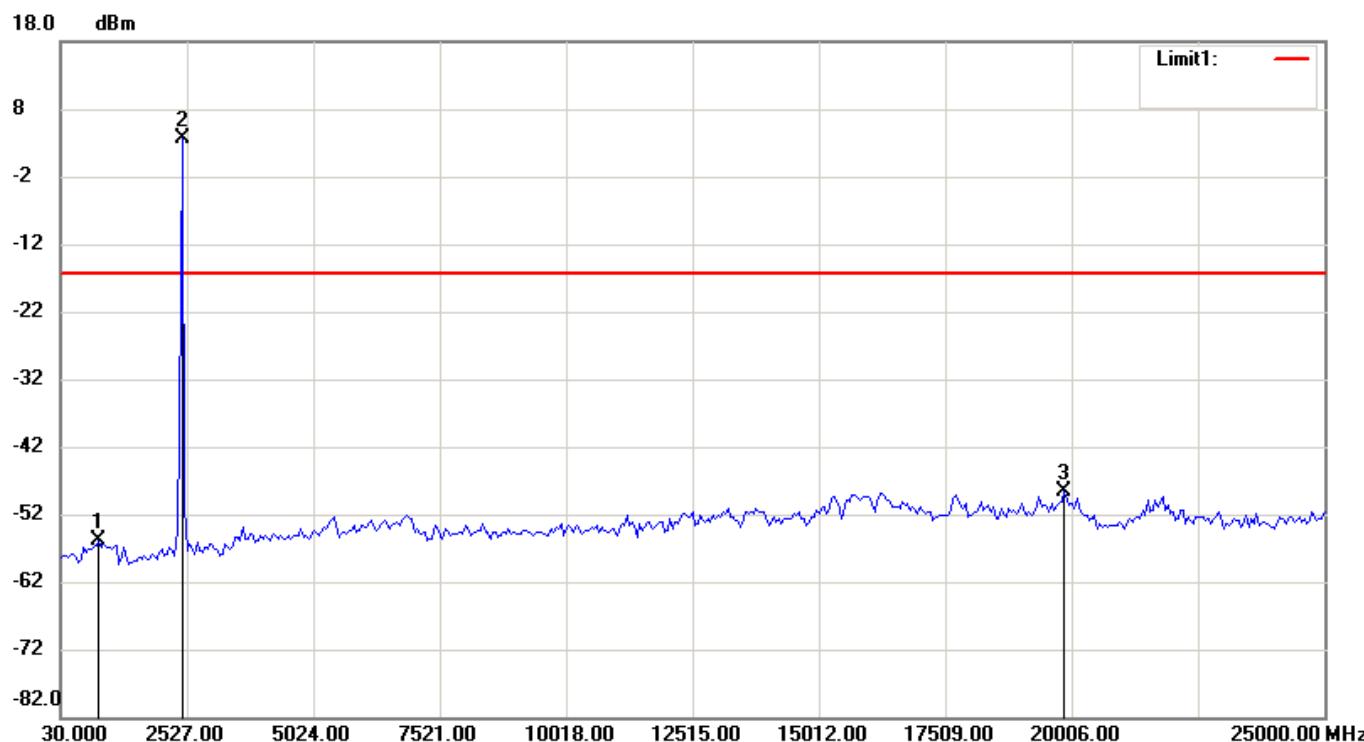

Condition: -16.26dBm **RF Conducted**
EUT: Rapid Test Reader **Sweep Time:** 250ms **Att.:** 20dB
Model: CHR-631W **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode: DTS **Operator:** Phillip
Note: NCC_LP0002_802.11g Channel 06-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	779.1000	-55.73
2	2427.1200	3.74
3	19856.1800	-48.59

CH High

File: 21-05-MAW-007_G


#9

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

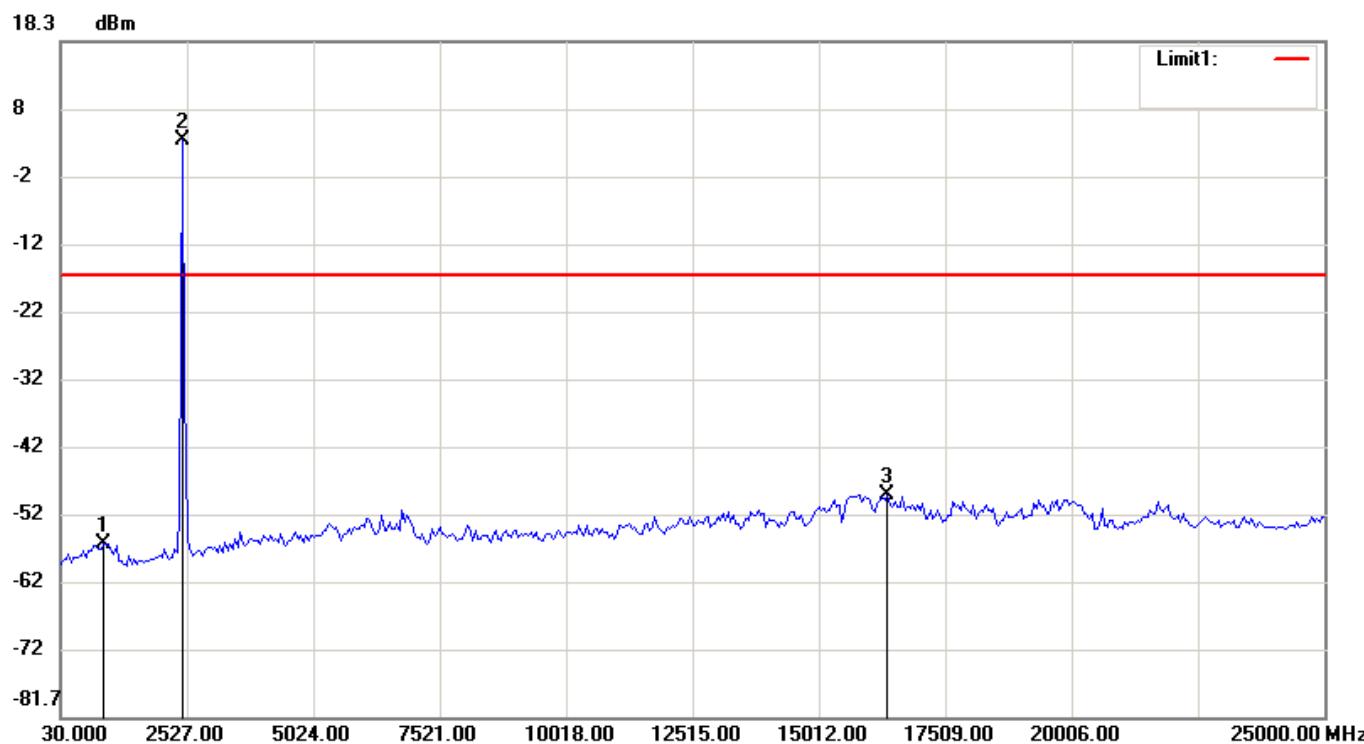

Condition:	-16.29dBm	RF Conducted
EUT:	Rapid Test Reader	Sweep Time: 250ms Att.: 20dB
Model:	CHR-631W	RBW: 100 KHz VBW: 300 KHz
Test Mode:	DTS	Operator: Phillip
Note:	NCC_LP0002_802.11g Channel 11-Conducted Spurious	

No.	Frequency(MHz)	Level(dBm)
1	878.9800	-55.98
2	2427.12000	3.71
3	16360.38000	-48.78

802.11n20

Low bandedge

File: 21-05-MAW-007_n20

#4

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %



Condition: -17.54dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 500ms Att.: 20dB

Model: **CHR-631W**

RBW: 100 KHz **VBW: 300 KHz**

Test Mode: DTS


Operator: Phillip

Note: NCC LP0002 802.11n-HT20 Channel 01-Bandedge

No.	Frequency(MHz)	Level(dBm)
1	2398.15000	-31.18
2	2405.80000	2.46

High bandedge

File: 21-05-MAW-007_n20 #11 Date: 2021/8/5 Temperature: 25 °C
 Site: RF-Cond01 Humidity: 54 %

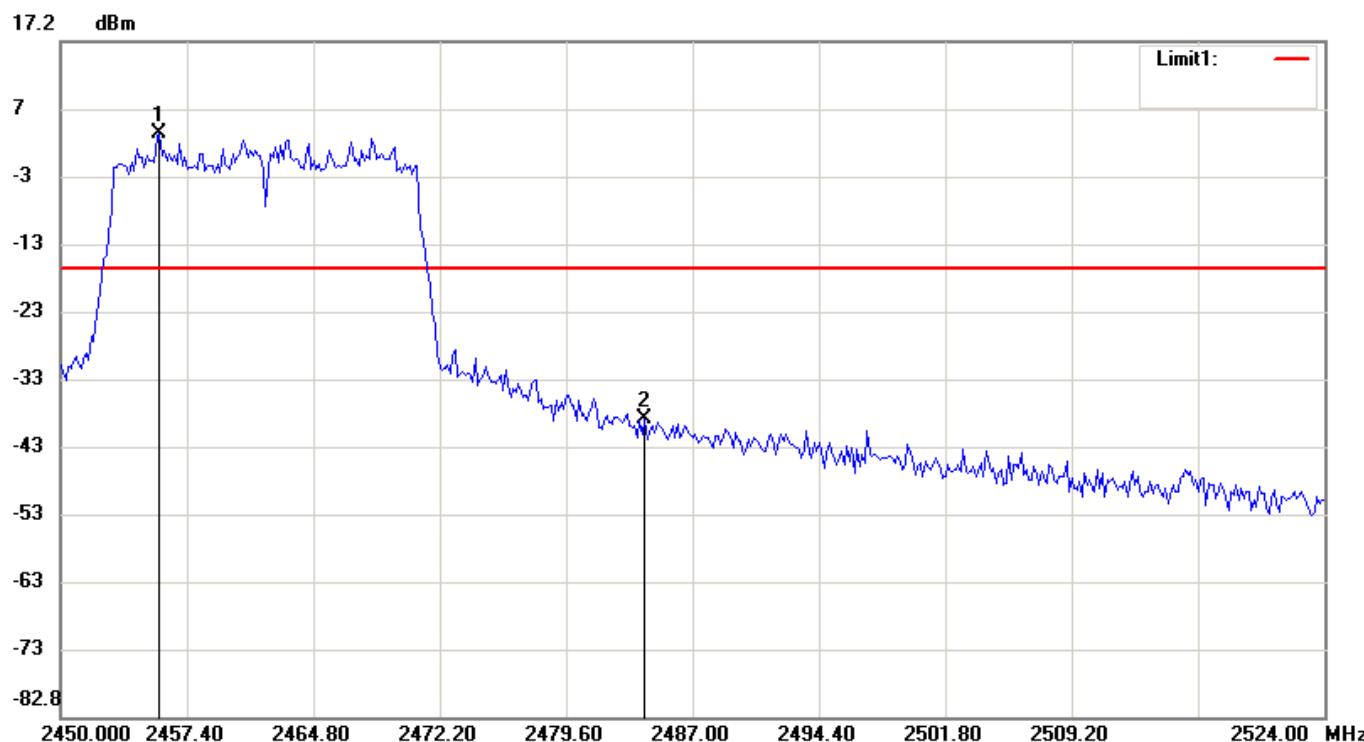


Condition: -16.49dBm RF Conducted
 EUT: Rapid Test Reader Sweep Time: 500ms Att.: 20dB
 Model: CHR-631W RBW: 100 KHz VBW: 300 KHz
 Test Mode: DTS Operator: Phillip
 Note: NCC_LP0002_802.11n-HT20 Channel 11-Bandedge

No.	Frequency(MHz)	Level(dBm)
1	2455.77200	3.51
2	2484.18800	-38.74

CH Low

File: 21-05-MAW-007_n20 #2 Date: 2021/8/5 Temperature: 25 °C
 Site: RF-Cond01 Humidity: 54 %

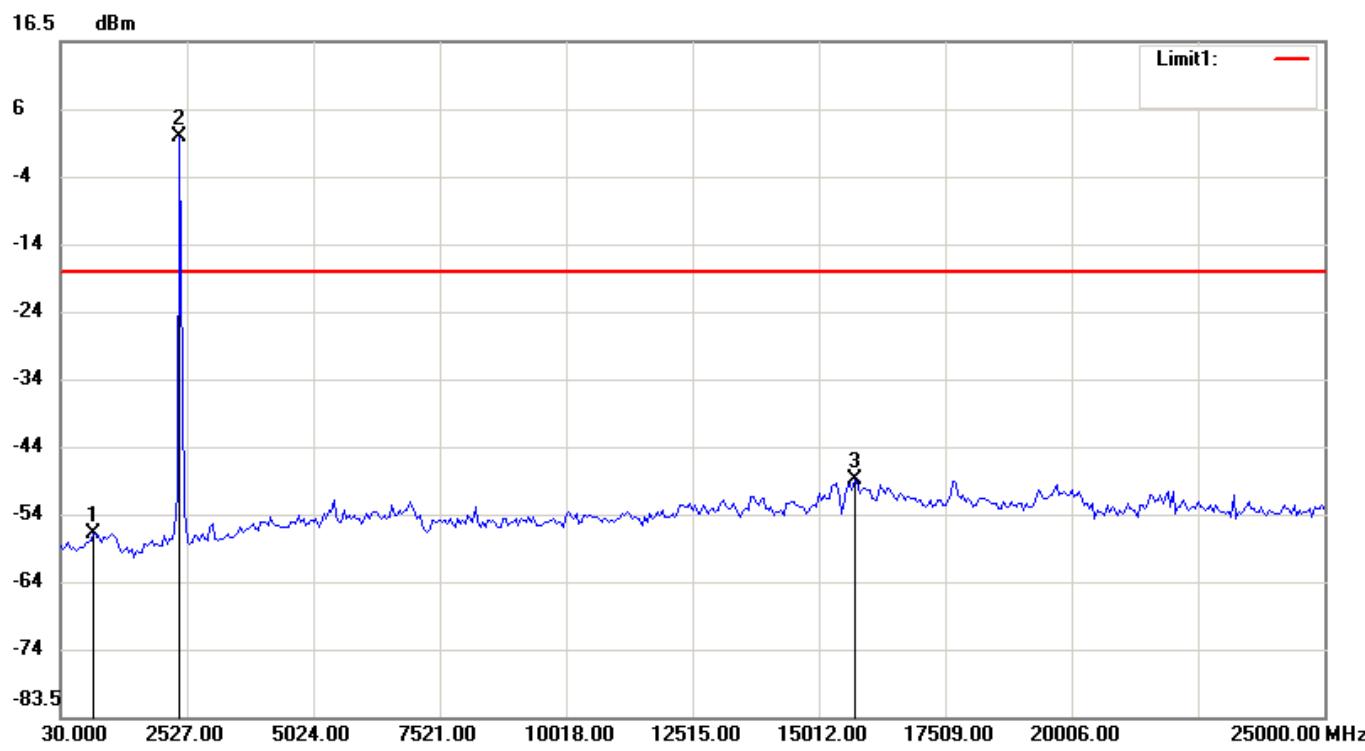

Condition: -17.56dBm RF Conducted
 EUT: Rapid Test Reader Sweep Time: 250ms Att.: 20dB
 Model: CHR-631W RBW: 100 KHz VBW: 300 KHz
 Test Mode: DTS Operator: Phillip
 Note: NCC_LP0002_802.11n-HT20 Channel 01-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	679.2200	-56.35
2	2377.1800	2.44
3	15711.1600	-48.50

CH Mid

File: 21-05-MAW-007_n20


#6

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

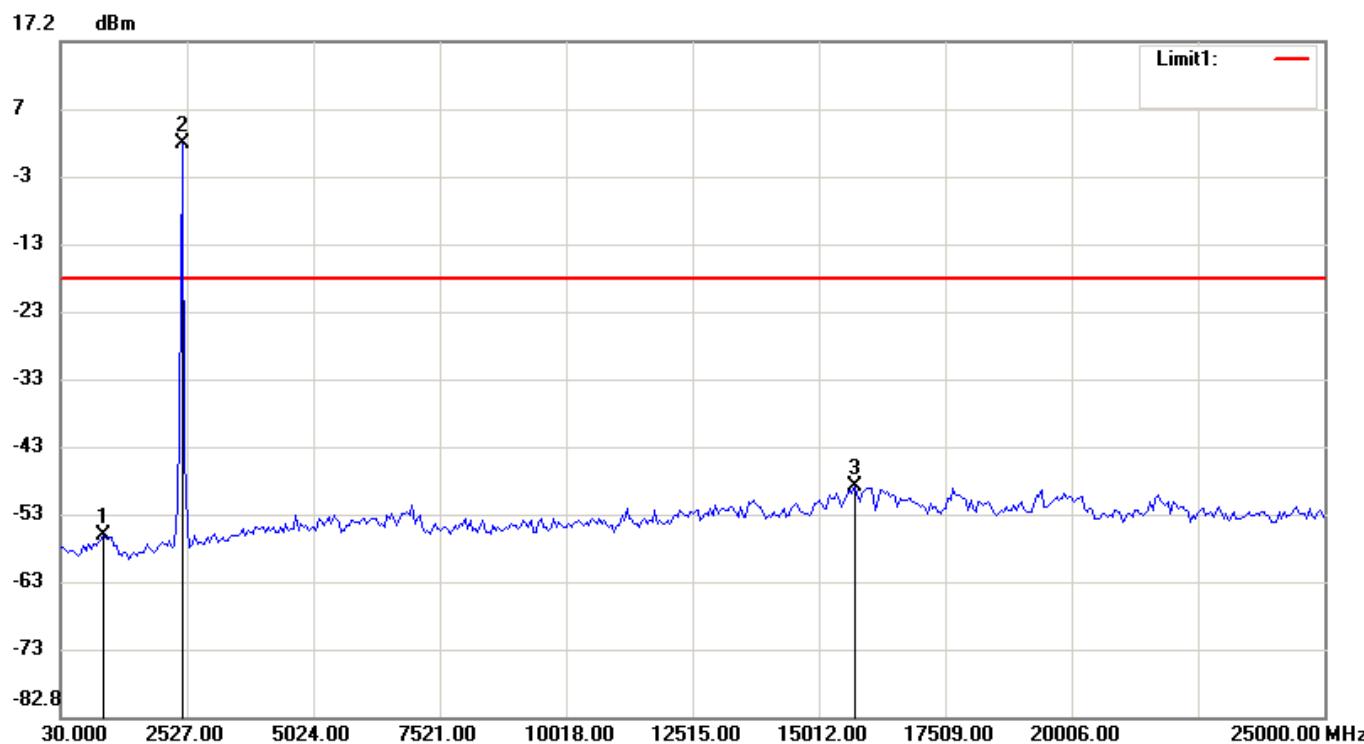

Condition: -17.94dBm

RF Conducted

EUT: Rapid Test Reader

Sweep Time: 250ms Att.: 20dB

Model: CHR-631W

RBW: 100 KHz VBW: 300 KHz

Test Mode: DTS

Operator: Phillip

Note: NCC_LP0002_802.11n-HT20 Channel 06-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	878.9800	-55.99
2	2427.1200	2.06
3	15711.1600	-48.70

CH High

File: 21-05-MAW-007_n20


#9

Date: 2021/8/5

Temperature: 25 °C

Site: RF-Cond01

Humidity: 54 %

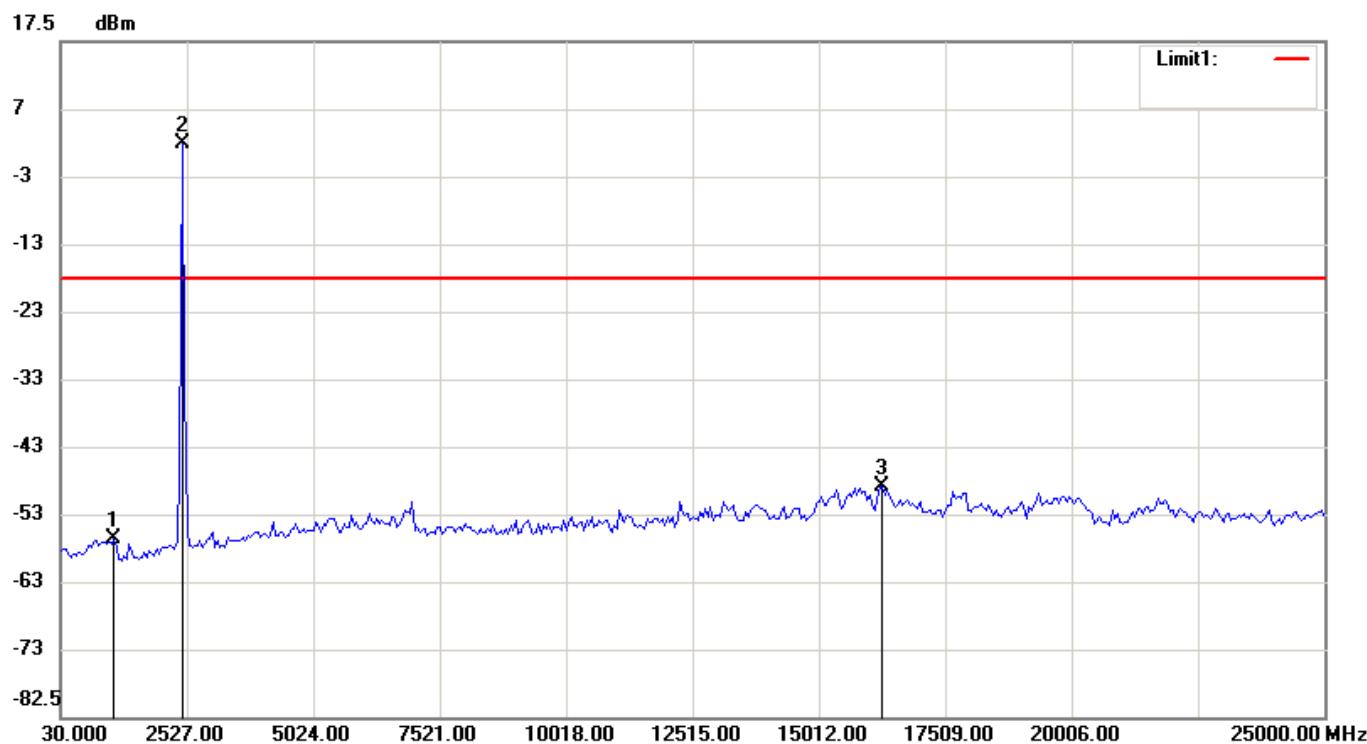

Condition: -17.6dBm **RF Conducted**
EUT: Rapid Test Reader **Sweep Time:** 250ms **Att.:** 20dB
Model: CHR-631W **RBW:** 100 KHz **VBW:** 300 KHz
Test Mode: DTS **Operator:** Phillip
Note: NCC_LP0002_802.11n-HT20 Channel 11-Conducted Spurious

No.	Frequency(MHz)	Level(dBm)
1	1078.74000	-56.06
2	2427.12000	2.40
3	16260.50000	-48.50

10 RADIATED EMISSION MEASUREMENT

10.1 Standard Applicable

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and digitally modulated, and the out band emission shall be comply with § 15.247 (d)

10.2 Measurement Procedure

The testing follows FCC KDB 558074 D01 v04.

A.Preliminary Measurement For Portable Devices.

For movable devices, the following procedure was performed to determine the maximum emission axis of EUT (X, Y and Z axis):

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. The axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.
4. The position in which the maximum noise occurred was “Y axis”. (Please see the test setup photos)

B. Final Measurement

1. Setup the configuration per figure 4 to 6 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in continuous operating function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a semi-anechoic chamber to determine the accurate frequencies of higher emissions and then each selected frequency is precisely measured. As the same purpose, for emission measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission measured below and above 1 GHz, set the spectrum analyzer on a 120 kHz and 1 MHz and 9 KHz resolution bandwidth respectively for each frequency measured in step 2.
4. For emission frequencies measured below 30 MHz, The measurement antenna shall be positioned with its plane perpendicular to the ground at the specified distance. When perpendicular to the ground plane, the lowest height of the magnetic antenna shall be 1 m above the ground and shall be positioned at the specified distance from the EUT. When the EUT contains a loop antenna that can only be placed in a vertical axis, normal measurements shall be made aligning the measurement antenna along the site axis, and then orthogonal to the axis. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable. When the EUT contains a loop antenna that can be placed in a horizontal or vertical axis, normal measurements shall be made aligning the measurement antenna along the site axis, orthogonal to the axis, and

then with the measurement antenna horizontal. For each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable.

Figure 4 : Frequencies measured below 1 GHz configuration

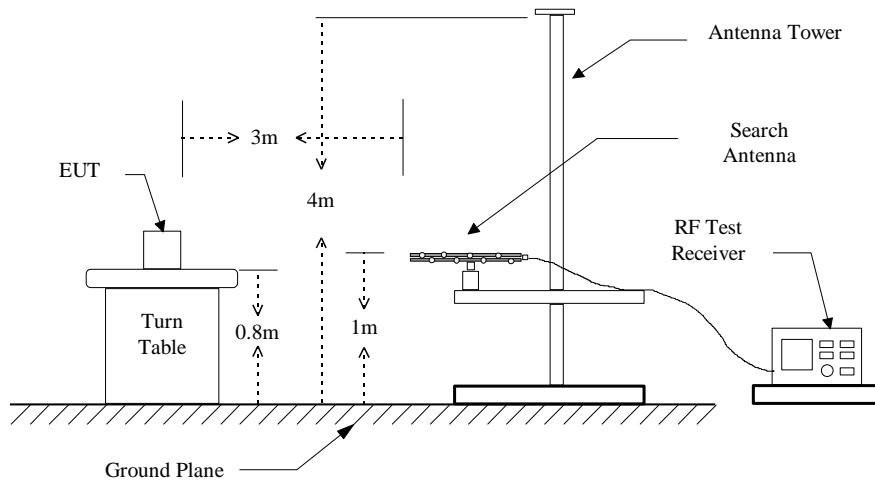


Figure 5 : Frequencies measured above 1 GHz configuration


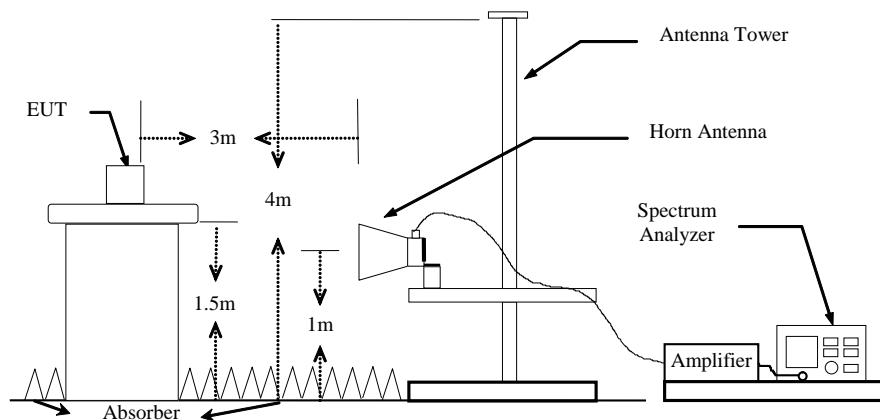


Figure 6: Frequencies measured 9 KHz to 30 MHz configuration

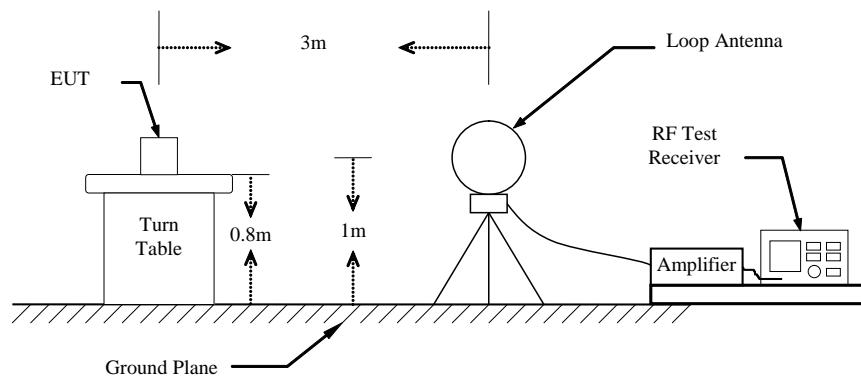

10.3 Measuring Instrument

The following instrument are used for radiated emissions measurement :

Equipment	Trade Name	Model No.
EMI Receiver	R&S	ESCI
Spectrum Analyzer	R&S	FSU46
Spectrum Analyzer	R&S	FSV40
Horn Antenna	EMCO	3117
Horn Antenna	EMCO	3116
Loop Antenna	ETS-LINDREN	6512
PRE-Amplifier	Agilent	8449B
PRE-Amplifier	Agilent	8447D
BiLog Antenna	ETC	MCTD 2786
Trilog Broadband Antenna with 5dB Pad	SCHWARZBECK&EMCI	VULB 9168 & EMCI-N-6-05
Spectrum Analyzer	KEYSIGHT	N9030B

Software: LZ-RF (Ver. ETC-3A2)

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution Bandwidth	Video Bandwidth
0.009 to 30	RF Test Receiver	Quasi-Peak	9 kHz	30 kHz
	RF Test Receiver	Average	9 kHz	30 kHz
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	300 kHz
	Spectrum Analyzer	Peak	120 kHz	300 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	VBW_avg (Note)

Note:For average measurement

Condition	VBW_avg
Duty cycle is no less than 98 percent	10 Hz
Duty cycle is less than 98 percent, T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation	$\geq \frac{1}{T}$
Current use	10Hz

10.4 Radiated Emission Data

10.4.1 Harmonic

10.4.1.1 IEEE 802.11b

Test Date: Dec. 07, 2021

Temperature: 23°C

Humidity: 60%

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Ant Pol	Reading (dBuV/m)@3m		Correct Factor	Result (dBuV/m)@3m		Limit (dBuV/m)@3m		Margin (worse) (dB)
		Peak	AVG		Peak	AVG	Peak	AVG	
4824.0000	H	---	---	1.15	---	---	74.0	54.0	---
4824.0000	V	---	---	1.15	---	---	74.0	54.0	---
7236.0000	H	---	---	3.32	---	---	74.0	54.0	---
7236.0000	V	---	---	3.32	---	---	74.0	54.0	---
9648.0000	H	---	---	4.33	---	---	74.0	54.0	---
9648.0000	V	---	---	4.33	---	---	74.0	54.0	---
12060.0000	H	---	---	7.32	---	---	74.0	54.0	---
12060.0000	V	---	---	7.32	---	---	74.0	54.0	---

Note : 1. Remark “---” means that the emissions level is too low to be measured.

2. If the peak result is under the average limit, that is deemed to meet the average limit.
3. The estimated measurement uncertainty of the result measurement is

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$ VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$;HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$ VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$;HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Ant Pol	Reading (dBuV/m)@3m		Correct Factor	Result (dBuV/m)@3m		Limit (dBuV/m)@3m		Margin (worse) (dB)
		Peak	AVG		(dB)	Peak	AVG	Peak	
4874.0000	H	---	---	1.32	---	---	74.0	54.0	---
4874.0000	V	---	---	1.32	---	---	74.0	54.0	---
7311.0000	H	---	---	3.39	---	---	74.0	54.0	---
7311.0000	V	---	---	3.39	---	---	74.0	54.0	---
9748.0000	H	---	---	4.45	---	---	74.0	54.0	---
9748.0000	V	---	---	4.45	---	---	74.0	54.0	---
12185.0000	H	---	---	7.54	---	---	74.0	54.0	---
12185.0000	V	---	---	7.54	---	---	74.0	54.0	---
14622.0000	H	---	---	10.03	---	---	74.0	54.0	---
14622.0000	V	---	---	10.03	---	---	74.0	54.0	---

Note : 1. Remark “---” means that the emissions level is too low to be measured.
 2. If the peak result is under the average limit, that is deemed to meet the average limit.
 3. The estimated measurement uncertainty of the result measurement is

VER: ± 5.32 dB (1GHz \leq f < 6GHz) ; HOR: ± 5.05 dB (1GHz \leq f < 6GHz)VER: ± 4.71 dB (6GHz \leq f < 18GHz) ; HOR: ± 4.96 dB (6GHz \leq f < 18GHz)VER: ± 5.37 dB (18GHz \leq f \leq 40GHz) ; HOR: ± 5.61 dB (18GHz \leq f \leq 40GHz)

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Ant Pol	Reading (dBuV/m)@3m		Correct Factor	Result (dBuV/m)@3m		Limit (dBuV/m)@3m		Margin (worse) (dB)
		Peak	AVG		Peak	AVG	Peak	AVG	
4924.0000	H	---	---	1.50	---	---	74.0	54.0	---
4924.0000	V	---	---	1.50	---	---	74.0	54.0	---
7386.0000	H	---	---	3.44	---	---	74.0	54.0	---
7386.0000	V	---	---	3.44	---	---	74.0	54.0	---
9848.0000	H	---	---	4.57	---	---	74.0	54.0	---
9848.0000	V	---	---	4.57	---	---	74.0	54.0	---
12310.0000	H	---	---	7.78	---	---	74.0	54.0	---
12310.0000	V	---	---	7.78	---	---	74.0	54.0	---
14772.0000	H	---	---	10.10	---	---	74.0	54.0	---
14772.0000	V	---	---	10.10	---	---	74.0	54.0	---

Note : 1. Remark “---” means that the emissions level is too low to be measured.

2. If the peak result is under the average limit, that is deemed to meet the average limit.
3. The estimated measurement uncertainty of the result measurement is

VER: $\pm 5.32 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$) ; HOR: $\pm 5.05 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$)VER: $\pm 4.71 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$) ; HOR: $\pm 4.96 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$)VER: $\pm 5.37 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$) ; HOR: $\pm 5.61 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$)

10.4.1.2 IEEE 802.11g

Test Date: Dec. 07, 2021

Temperature: 23°C

Humidity: 60%

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Ant Pol	Reading (dBuV/m)@3m		Correct Factor	Result (dBuV/m)@3m		Limit (dBuV/m)@3m		Margin (worse) (dB)
		Peak	AVG		Peak	AVG	Peak	AVG	
4824.0000	H	---	---	1.15	---	---	74.0	54.0	---
4824.0000	V	---	---	1.15	---	---	74.0	54.0	---
7236.0000	H	---	---	3.32	---	---	74.0	54.0	---
7236.0000	V	---	---	3.32	---	---	74.0	54.0	---
9648.0000	H	---	---	4.33	---	---	74.0	54.0	---
9648.0000	V	---	---	4.33	---	---	74.0	54.0	---
12060.0000	H	---	---	7.32	---	---	74.0	54.0	---
12060.0000	V	---	---	7.32	---	---	74.0	54.0	---
14472.0000	H	---	---	9.98	---	---	74.0	54.0	---
14472.0000	V	---	---	9.98	---	---	74.0	54.0	---

Note : 1. Remark “---” means that the emissions level is too low to be measured.

2. If the peak result is under the average limit, that is deemed to meet the average limit.
3. The estimated measurement uncertainty of the result measurement is

VER: $\pm 5.32 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$) ; HOR: $\pm 5.05 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$)VER: $\pm 4.71 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$) ; HOR: $\pm 4.96 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$)VER: $\pm 5.37 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$) ; HOR: $\pm 5.61 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$)

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Ant Pol	Reading (dBuV/m)@3m		Correct Factor	Result (dBuV/m)@3m		Limit (dBuV/m)@3m		Margin (worse) (dB)
		Peak	AVG		(dB)	Peak	AVG	Peak	
4874.0000	H	---	---	1.32	---	---	74.0	54.0	---
4874.0000	V	---	---	1.32	---	---	74.0	54.0	---
7311.0000	H	---	---	3.39	---	---	74.0	54.0	---
7311.0000	V	---	---	3.39	---	---	74.0	54.0	---
9748.0000	H	---	---	4.45	---	---	74.0	54.0	---
9748.0000	V	---	---	4.45	---	---	74.0	54.0	---
12185.0000	H	---	---	7.54	---	---	74.0	54.0	---
12185.0000	V	---	---	7.54	---	---	74.0	54.0	---
14622.0000	H	---	---	10.03	---	---	74.0	54.0	---
14622.0000	V	---	---	10.03	---	---	74.0	54.0	---

Note : 1. Remark “---” means that the emissions level is too low to be measured.
 2. If the peak result is under the average limit, that is deemed to meet the average limit.
 3. The estimated measurement uncertainty of the result measurement is

VER: ± 5.32 dB (1GHz \leq f < 6GHz) ; HOR: ± 5.05 dB (1GHz \leq f < 6GHz)VER: ± 4.71 dB (6GHz \leq f < 18GHz) ; HOR: ± 4.96 dB (6GHz \leq f < 18GHz)VER: ± 5.37 dB (18GHz \leq f \leq 40GHz) ; HOR: ± 5.61 dB (18GHz \leq f \leq 40GHz)

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Ant Pol	Reading (dBuV/m)@3m		Correct Factor	Result (dBuV/m)@3m		Limit (dBuV/m)@3m		Margin (worse) (dB)
		Peak	AVG		Peak	AVG	Peak	AVG	
4924.0000	H	---	---	1.50	---	---	74.0	54.0	---
4924.0000	V	---	---	1.50	---	---	74.0	54.0	---
7386.0000	H	---	---	3.44	---	---	74.0	54.0	---
7386.0000	V	---	---	3.44	---	---	74.0	54.0	---
9848.0000	H	---	---	4.57	---	---	74.0	54.0	---
9848.0000	V	---	---	4.57	---	---	74.0	54.0	---
12310.0000	H	---	---	7.78	---	---	74.0	54.0	---
12310.0000	V	---	---	7.78	---	---	74.0	54.0	---
14772.0000	H	---	---	10.10	---	---	74.0	54.0	---
14772.0000	V	---	---	10.10	---	---	74.0	54.0	---

Note : 1. Remark “---” means that the emissions level is too low to be measured.
 2. If the peak result is under the average limit, that is deemed to meet the average limit.
 3. The estimated measurement uncertainty of the result measurement is

VER: ± 5.32 dB($1\text{GHz} \leq f < 6\text{GHz}$) ;HOR: ± 5.05 dB($1\text{GHz} \leq f < 6\text{GHz}$)VER: ± 4.71 dB($6\text{GHz} \leq f < 18\text{GHz}$) ;HOR: ± 4.96 dB($6\text{GHz} \leq f < 18\text{GHz}$)VER: ± 5.37 dB($18\text{GHz} \leq f \leq 40\text{GHz}$) ;HOR: ± 5.61 dB($18\text{GHz} \leq f \leq 40\text{GHz}$)

10.4.1.3 IEEE 802.11n, HT20

Test Date: Dec. 07, 2021

Temperature: 23°C

Humidity: 60%

a) Channel 1

Fundamental Frequency: 2412 MHz

Frequency (MHz)	Ant Pol	Reading (dBuV/m)@3m		Correct Factor	Result (dBuV/m)@3m		Limit (dBuV/m)@3m		Margin (worse) (dB)
		Peak	AVG		Peak	AVG	Peak	AVG	
4824.0000	H	---	---	1.15	---	---	74.0	54.0	---
4824.0000	V	---	---	1.15	---	---	74.0	54.0	---
7236.0000	H	---	---	3.32	---	---	74.0	54.0	---
7236.0000	V	---	---	3.32	---	---	74.0	54.0	---
9648.0000	H	---	---	4.33	---	---	74.0	54.0	---
9648.0000	V	---	---	4.33	---	---	74.0	54.0	---
12060.0000	H	---	---	7.32	---	---	74.0	54.0	---
12060.0000	V	---	---	7.32	---	---	74.0	54.0	---
14472.0000	H	---	---	9.98	---	---	74.0	54.0	---
14472.0000	V	---	---	9.98	---	---	74.0	54.0	---

Note : 1. Remark “---” means that the emissions level is too low to be measured.

2. If the peak result is under the average limit, that is deemed to meet the average limit.
3. The estimated measurement uncertainty of the result measurement is

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$ VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$;HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$ VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$;HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

b) Channel 6

Fundamental Frequency: 2437 MHz

Frequency (MHz)	Ant Pol	Reading (dBuV/m)@3m		Correct Factor	Result (dBuV/m)@3m		Limit (dBuV/m)@3m		Margin (worse) (dB)
		Peak	AVG		(dB)	Peak	AVG	Peak	
4874.0000	H	---	---	1.32	---	---	74.0	54.0	---
4874.0000	V	---	---	1.32	---	---	74.0	54.0	---
7311.0000	H	---	---	3.39	---	---	74.0	54.0	---
7311.0000	V	---	---	3.39	---	---	74.0	54.0	---
9748.0000	H	---	---	4.45	---	---	74.0	54.0	---
9748.0000	V	---	---	4.45	---	---	74.0	54.0	---
12185.0000	H	---	---	7.54	---	---	74.0	54.0	---
12185.0000	V	---	---	7.54	---	---	74.0	54.0	---
14622.0000	H	---	---	10.03	---	---	74.0	54.0	---
14622.0000	V	---	---	10.03	---	---	74.0	54.0	---

Note : 1. Remark “---” means that the emissions level is too low to be measured.
 2. If the peak result is under the average limit, that is deemed to meet the average limit.
 3. The estimated measurement uncertainty of the result measurement is

VER: ± 5.32 dB (1GHz \leq f < 6GHz) ; HOR: ± 5.05 dB (1GHz \leq f < 6GHz)VER: ± 4.71 dB (6GHz \leq f < 18GHz) ; HOR: ± 4.96 dB (6GHz \leq f < 18GHz)VER: ± 5.37 dB (18GHz \leq f \leq 40GHz) ; HOR: ± 5.61 dB (18GHz \leq f \leq 40GHz)

c) Channel 11

Fundamental Frequency: 2462 MHz

Frequency (MHz)	Ant Pol	Reading (dBuV/m)@3m		Correct Factor	Result (dBuV/m)@3m		Limit (dBuV/m)@3m		Margin (worse) (dB)
		Peak	AVG		Peak	AVG	Peak	AVG	
4924.0000	H	---	---	1.50	---	---	74.0	54.0	---
4924.0000	V	---	---	1.50	---	---	74.0	54.0	---
7386.0000	H	---	---	3.44	---	---	74.0	54.0	---
7386.0000	V	---	---	3.44	---	---	74.0	54.0	---
9848.0000	H	---	---	4.57	---	---	74.0	54.0	---
9848.0000	V	---	---	4.57	---	---	74.0	54.0	---
12310.0000	H	---	---	7.78	---	---	74.0	54.0	---
12310.0000	V	---	---	7.78	---	---	74.0	54.0	---
14772.0000	H	---	---	10.10	---	---	74.0	54.0	---
14772.0000	V	---	---	10.10	---	---	74.0	54.0	---

Note : 1. Remark “---” means that the emissions level is too low to be measured.

2. If the peak result is under the average limit, that is deemed to meet the average limit.
3. The estimated measurement uncertainty of the result measurement is

VER: $\pm 5.32 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$) ; HOR: $\pm 5.05 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$)VER: $\pm 4.71 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$) ; HOR: $\pm 4.96 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$)VER: $\pm 5.37 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$) ; HOR: $\pm 5.61 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$)

10.4.2 Above 1GHz test charts for Harmonic and spurious emission

10.4.2.1 IEEE 802.11b

a. Channel Low

Operated mode : TX / RX

Fundamental Frequency : 2412 MHz


File: 21-05-MAW- #41 Date: 2021/12/7 Temperature: 23 °C

007_B

Site: RE02-EMC B1- Humidity: 60 %

N2

87.0 dBuV/m

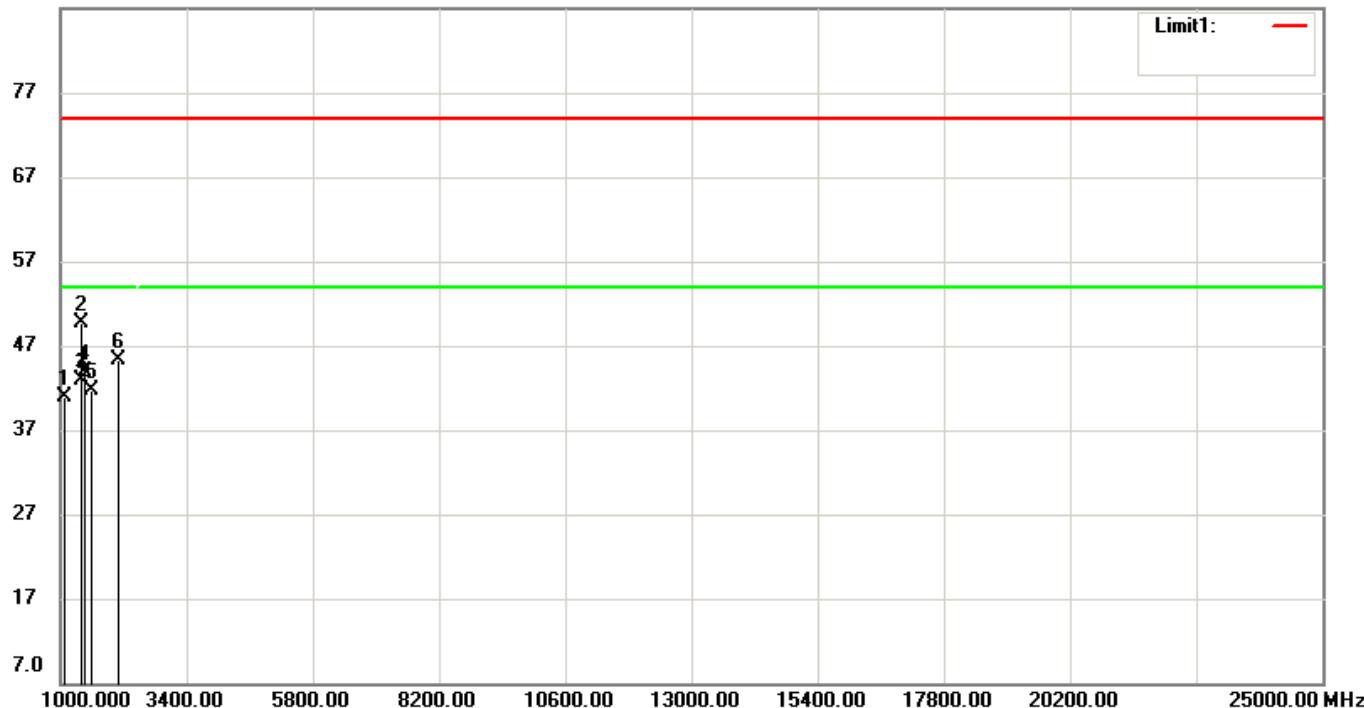

Condition:

FCC Part15 RE-Class B_Above 1GHz_PK

Polarization:

Horizontal

EUT:

手持式 IVD 醫療器材

Distance:

3m

Model:

CHR-631W

Test Mode:

DTS

Operator:

Phillip

Note:

CH LOW-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1069.55120	50.20	peak	-9.25	40.95	74.00	-33.05	150	92
2	1350.00000	58.10	peak	-8.37	49.73	74.00	-24.27	150	188
3	1367.94870	51.31	peak	-8.32	42.99	74.00	-31.01	133	253
4	1441.98710	51.97	peak	-8.08	43.89	74.00	-30.11	139	82
5	1569.87170	49.13	peak	-7.34	41.79	74.00	-32.21	152	152
6	2085.89740	49.07	peak	-3.70	45.37	74.00	-28.63	166	167

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$) ; HOR: $\pm 5.05\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$)


VER: $\pm 4.71\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$) ; HOR: $\pm 4.96\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$)

VER: $\pm 5.37\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$) ; HOR: $\pm 5.61\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

Operated mode : TX / RX
Fundamental Frequency : 2412 MHz

File: 21-05-MAW- #42 Date: 2021/12/7 Temperature: 23 °C
007_B

Site: RE02-EMC B1- Humidity: 60 %
N2

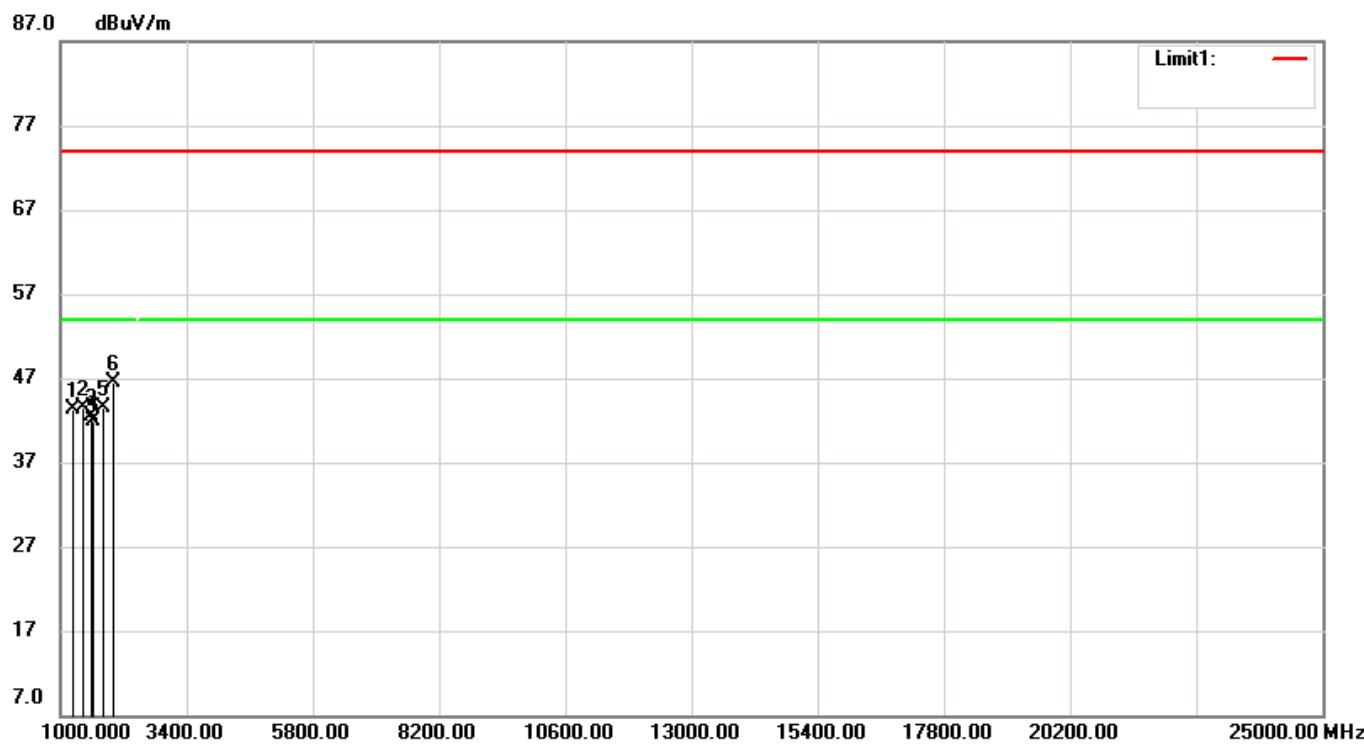

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Vertical
EUT: 手持式 IVD 醫療器材 Distance: 3m
Model: CHR-631W
Test Mode: DTS Operator: Phillip
Note: CH LOW-1

No.	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
	(MHz)	(dBuV/m)		dB/m	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	1197.43580	52.16	peak	-8.85	43.31	74.00	-30.69	147	234
2	1394.87170	51.73	peak	-8.22	43.51	74.00	-30.49	148	255
3	1542.94870	50.10	peak	-7.56	42.54	74.00	-31.46	159	105
4	1612.50000	48.88	peak	-7.00	41.88	74.00	-32.12	153	117
5	1796.47430	49.11	peak	-5.54	43.57	74.00	-30.43	161	23
6	1998.39740	50.45	peak	-3.93	46.52	74.00	-27.48	187	310

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$) ; HOR: $\pm 5.05 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$)

VER: $\pm 4.71 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$) ; HOR: $\pm 4.96 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$)

VER: $\pm 5.37 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$) ; HOR: $\pm 5.61 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$)


b. Channel Mid

Operated mode : TX / RX

Fundamental Frequency : 2437 MHz

File: 21-05-MAW- #43 Date: 2021/12/7 Temperature: 23 °C
007_B

Site: RE02-EMC B1- Humidity: 60 %

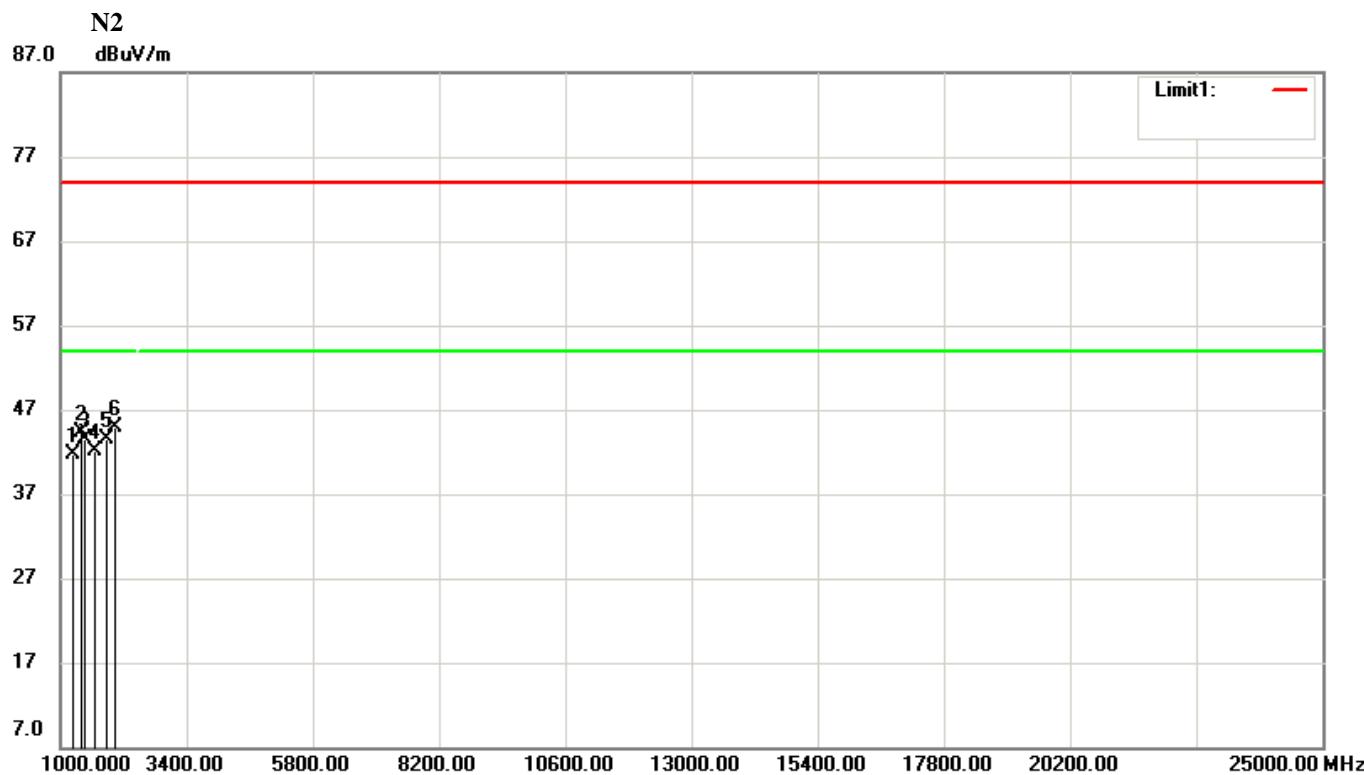

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Horizontal

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH MID-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1199.67940	50.55	peak	-8.84	41.71	74.00	-32.29	151	26
2	1372.43580	52.59	peak	-8.30	44.29	74.00	-29.71	146	123
3	1448.71800	51.60	peak	-8.06	43.54	74.00	-30.46	129	348
4	1652.88460	48.76	peak	-6.69	42.07	74.00	-31.93	150	12
5	1861.53840	48.62	peak	-5.02	43.60	74.00	-30.40	150	0
6	2020.83330	48.87	peak	-3.87	45.00	74.00	-29.00	162	119

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.


2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$ VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$;HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$ VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$;HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

Operated mode : TX / RX
Fundamental Frequency : 2437 MHz

File: 21-05-MAW- #44 Date: 2021/12/7 Temperature: 23 °C
007_B

Site: RE02-EMC B1- Humidity: 60 %

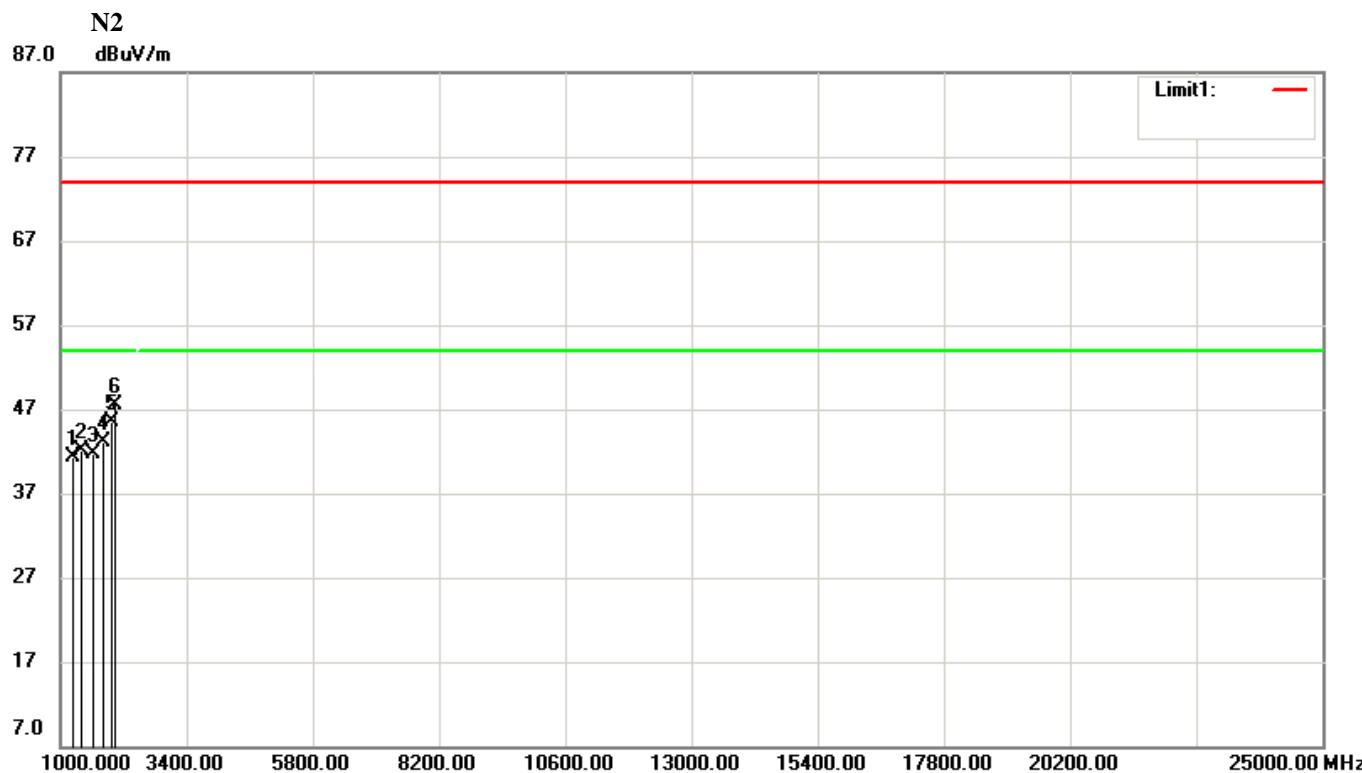

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Vertical

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH MID-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1197.43580	50.09	peak	-8.85	41.24	74.00	-32.76	141	91
2	1376.92300	50.46	peak	-8.28	42.18	74.00	-31.82	150	141
3	1583.33330	48.95	peak	-7.24	41.71	74.00	-32.29	161	224
4	1794.23070	48.74	peak	-5.56	43.18	74.00	-30.82	192	56
5	1955.76920	49.83	peak	-4.27	45.56	74.00	-28.44	131	278
6	2000.64100	51.48	peak	-3.92	47.56	74.00	-26.44	109	182

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$

VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$;HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$

VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$;HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

c. Channel High


Operated mode : TX / RX

Fundamental Frequency : 2462 MHz

File: 21-05-MAW- #45 Date: 2021/12/7 Temperature: 23 °C
007_B

Site: RE02-EMC B1- Humidity: 60 %

N2

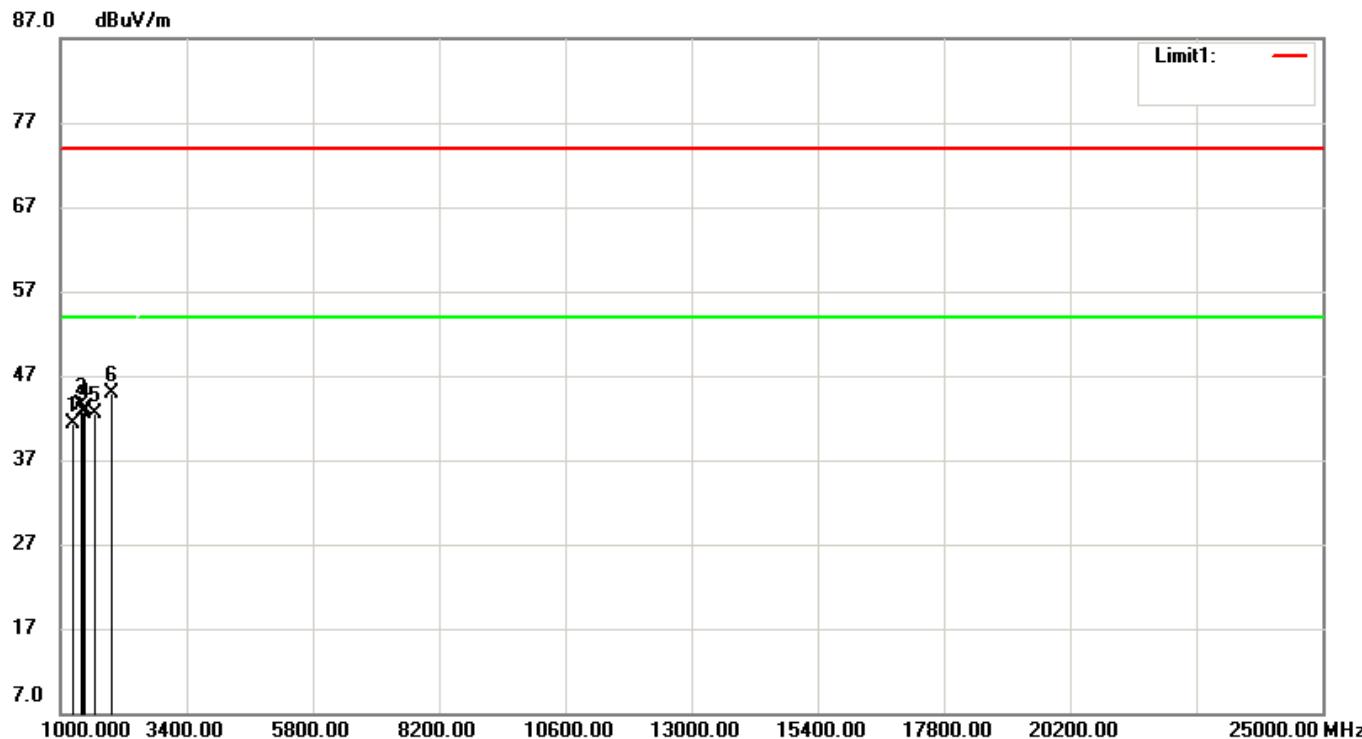

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Horizontal

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH HIGH-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1199.67940	50.07	peak	-8.84	41.23	74.00	-32.77	156	88
2	1363.46150	51.89	peak	-8.33	43.56	74.00	-30.44	152	274
3	1394.87170	50.91	peak	-8.22	42.69	74.00	-31.31	150	110
4	1450.96150	50.97	peak	-8.06	42.91	74.00	-31.09	105	23
5	1630.44870	49.39	peak	-6.87	42.52	74.00	-31.48	176	65
6	1953.52560	49.10	peak	-4.29	44.81	74.00	-29.19	150	243

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$ VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$;HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$ VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$;HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

Operated mode : TX / RX

Fundamental Frequency : 2462 MHz

File: 21-05-MAW-

#46

Date: 2021/12/7


Temperature: 23 °C

007_B

Site: RE02-EMC B1-

Humidity: 60 %

N2

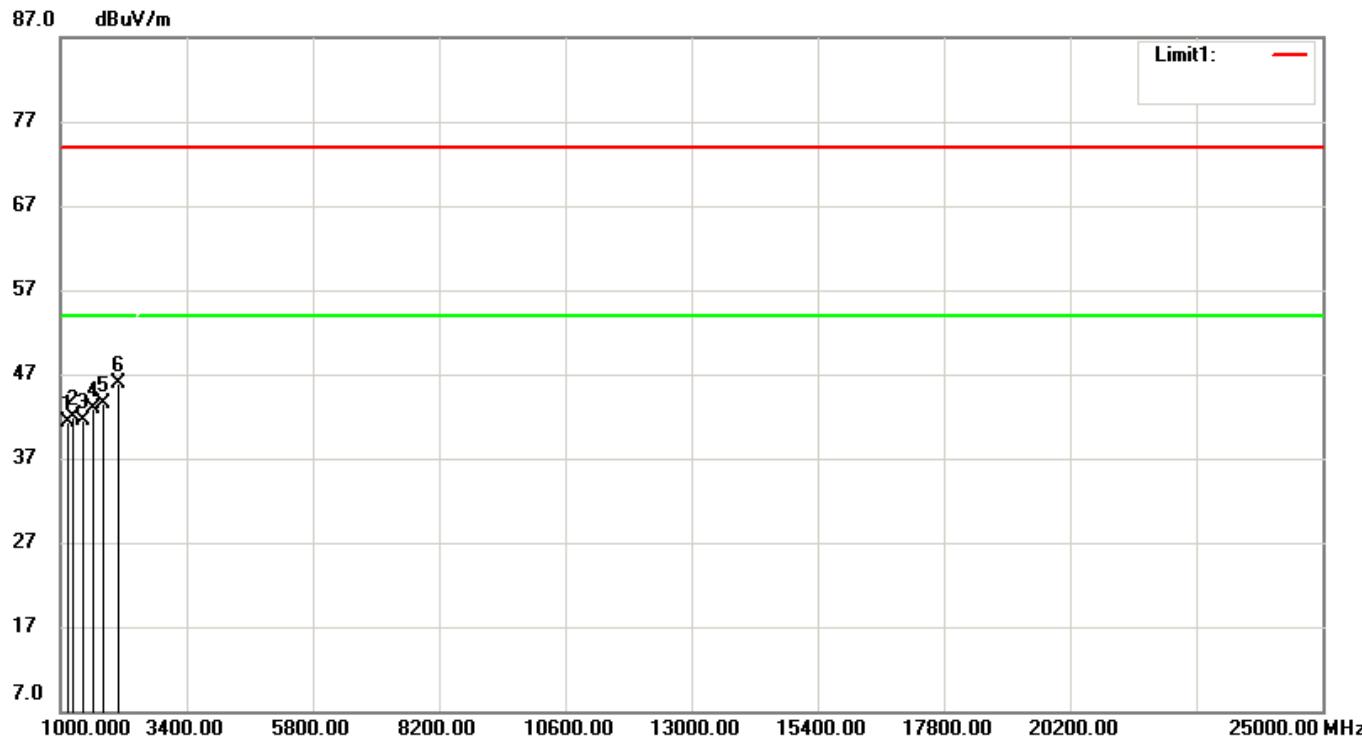

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Vertical

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH HIGH-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1116.66660	50.34	peak	-9.11	41.23	74.00	-32.77	150	45
2	1219.87170	50.68	peak	-8.78	41.90	74.00	-32.10	152	187
3	1394.87170	49.78	peak	-8.22	41.56	74.00	-32.44	148	264
4	1583.33330	50.21	peak	-7.24	42.97	74.00	-31.03	157	112
5	1800.96150	49.05	peak	-5.51	43.54	74.00	-30.46	139	109
6	2081.41010	49.67	peak	-3.71	45.96	74.00	-28.04	122	100

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$) ; HOR: $\pm 5.05\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$)VER: $\pm 4.71\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$) ; HOR: $\pm 4.96\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$)VER: $\pm 5.37\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$) ; HOR: $\pm 5.61\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

10.4.2.2 IEEE 802.11g


a. Channel Low

Operated mode : TX / RX

Fundamental Frequency : 2412 MHz

File: 21-05-MAW-#35 Date: 2021/12/7 Temperature: 23 °C
007_G

Site: RE02-EMC B1- Humidity: 60 %

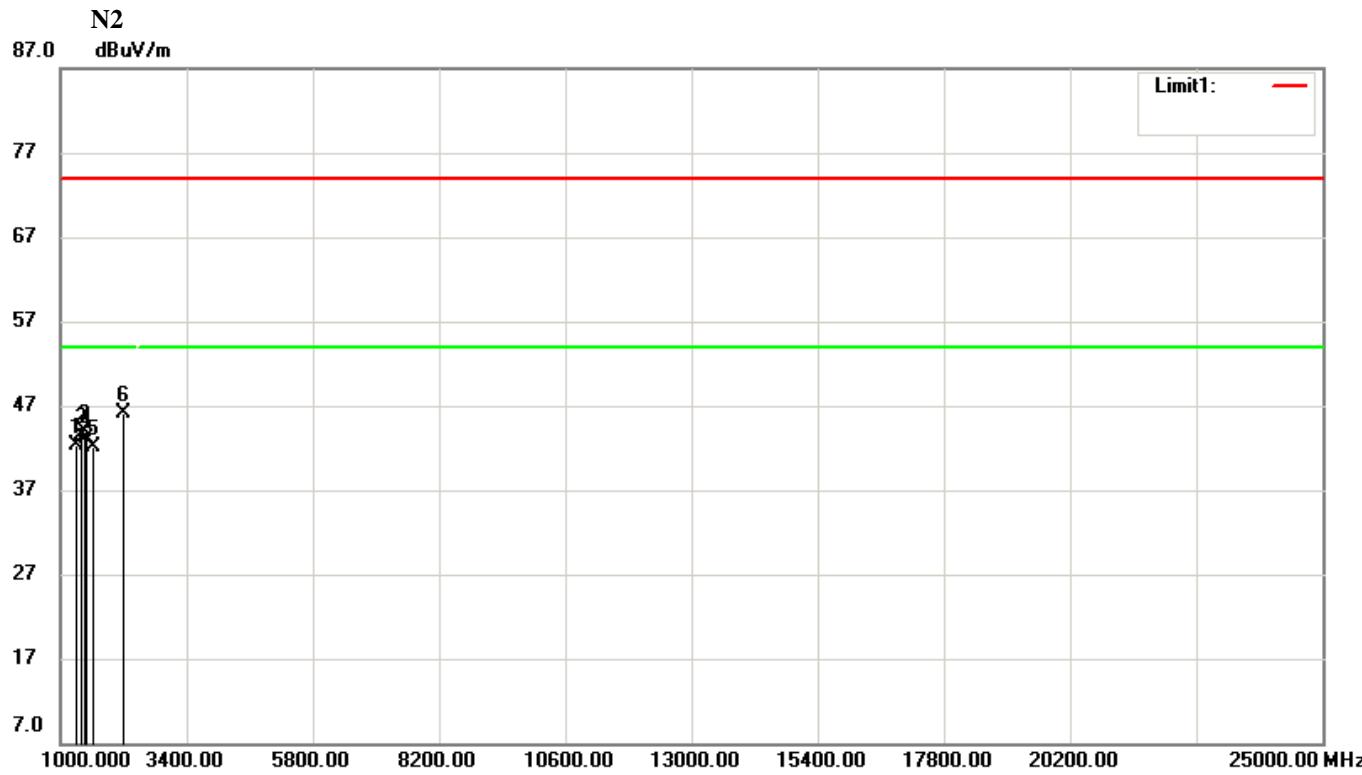

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Horizontal

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH LOW-1

No.	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
	(MHz)	(dBuV/m)		dB/m	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	1296.15380	50.77	peak	-8.53	42.24	74.00	-31.76	151	63
2	1370.19230	51.83	peak	-8.31	43.52	74.00	-30.48	149	263
3	1441.98710	52.06	peak	-8.08	43.98	74.00	-30.02	150	57
4	1475.64100	51.04	peak	-7.97	43.07	74.00	-30.93	146	137
5	1578.84610	49.40	peak	-7.28	42.12	74.00	-31.88	136	0
6	2186.85900	49.59	peak	-3.43	46.16	74.00	-27.84	165	332

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.


2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$ VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$;HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$ VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$;HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$

Operated mode : TX / RX
Fundamental Frequency : 2412 MHz

File: 21-05-MAW- #36 Date: 2021/12/7 Temperature: 23 °C
007_G

Site: RE02-EMC B1- Humidity: 60 %

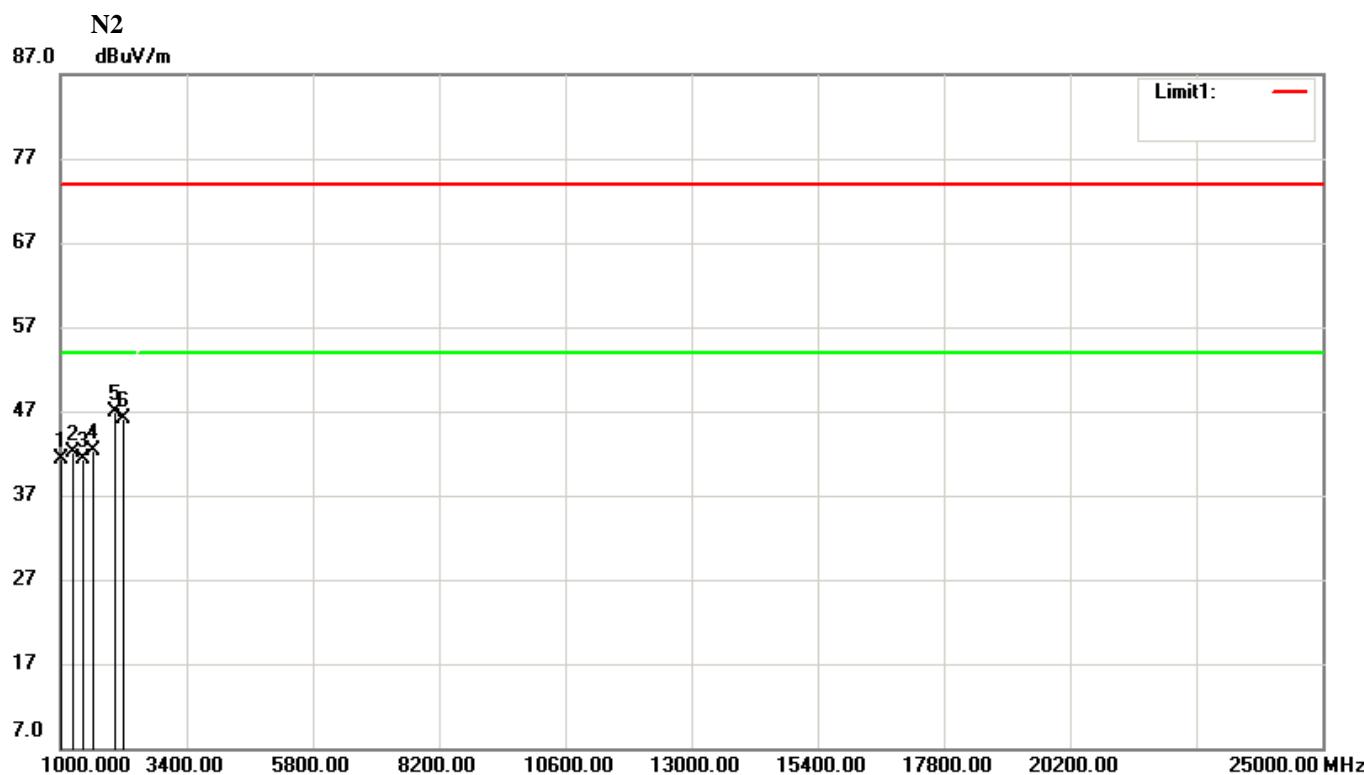

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Vertical

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH LOW-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1013.46150	50.74	peak	-9.43	41.31	74.00	-32.69	150	267
2	1199.67940	51.00	peak	-8.84	42.16	74.00	-31.84	151	311
3	1397.11530	49.52	peak	-8.22	41.30	74.00	-32.70	147	343
4	1603.52560	49.35	peak	-7.08	42.27	74.00	-31.73	132	13
5	2000.64100	50.85	peak	-3.92	46.93	74.00	-27.07	167	282
6	2173.39740	49.49	peak	-3.47	46.02	74.00	-27.98	188	158

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$) ; HOR: $\pm 5.05\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$)

VER: $\pm 4.71\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$) ; HOR: $\pm 4.96\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$)

VER: $\pm 5.37\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$) ; HOR: $\pm 5.61\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)


b. Channel Mid

Operated mode : TX / RX

Fundamental Frequency : 2437 MHz

File: 21-05-MAW- #37 Date: 2021/12/7 Temperature: 23 °C
 007_G

Site: RE02-EMC B1- Humidity: 60 %
 N2

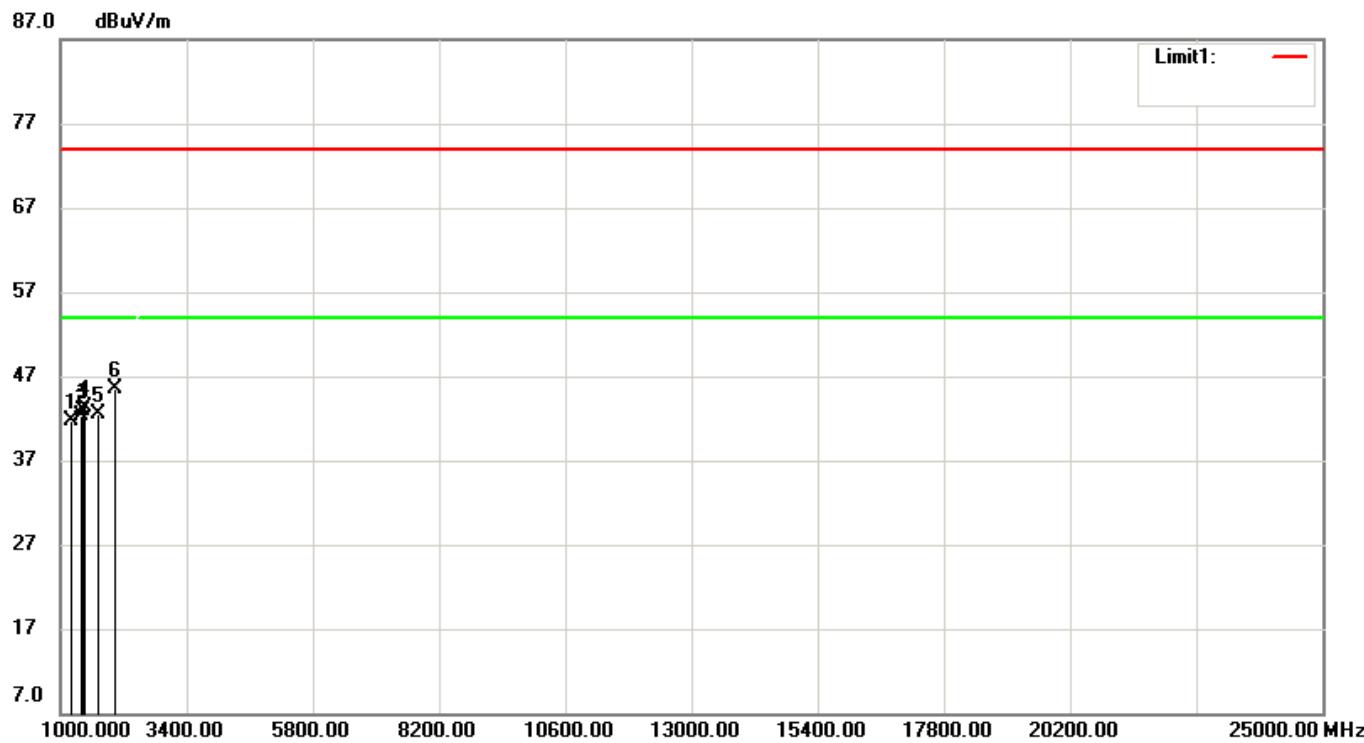

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Horizontal
 EUT: 手持式 IVD 醫療器材 Distance: 3m
 Model: CHR-631W
 Test Mode: DTS Operator: Phillip
 Note: CH MID-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1190.70500	50.66	peak	-8.88	41.78	74.00	-32.22	105	37
2	1367.94870	50.57	peak	-8.32	42.25	74.00	-31.75	126	165
3	1394.87170	51.09	peak	-8.22	42.87	74.00	-31.13	147	44
4	1435.25640	51.31	peak	-8.10	43.21	74.00	-30.79	150	0
5	1700.00000	48.88	peak	-6.30	42.58	74.00	-31.42	155	187
6	2000.64100	49.48	peak	-3.92	45.56	74.00	-28.44	142	267

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$) ; HOR: $\pm 5.05 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$)

VER: $\pm 4.71 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$) ; HOR: $\pm 4.96 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$)

VER: $\pm 5.37 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$) ; HOR: $\pm 5.61 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$)


Operated mode : TX / RX

Fundamental Frequency : 2437 MHz

File: 21-05-MAW- #38 Date: 2021/12/7 Temperature: 23 °C

007_G

Site: RE02-EMC B1- Humidity: 60 %

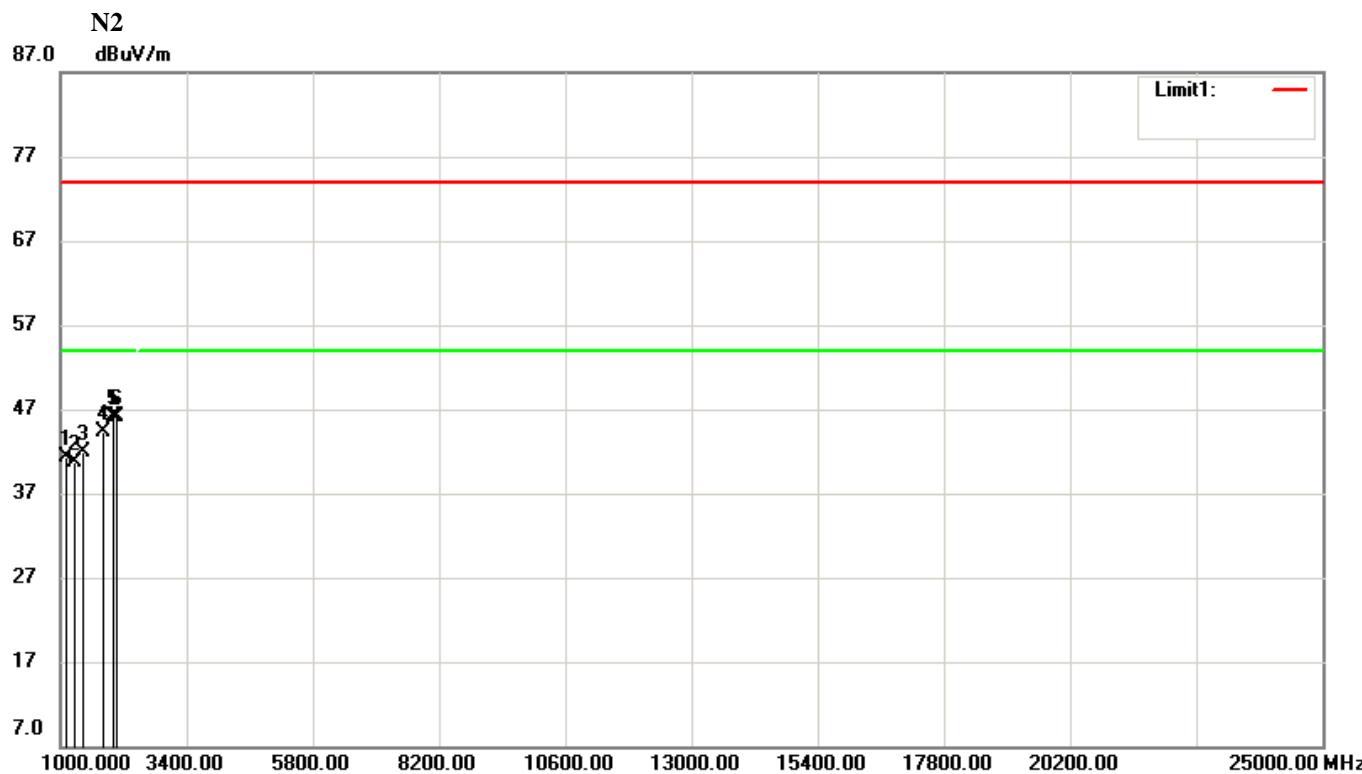

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Vertical

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH MID-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1091.98710	50.40	peak	-9.18	41.22	74.00	-32.78	151	58
2	1244.55120	49.41	peak	-8.69	40.72	74.00	-33.28	149	241
3	1419.55120	49.96	peak	-8.15	41.81	74.00	-32.19	142	37
4	1794.23070	49.84	peak	-5.56	44.28	74.00	-29.72	158	181
5	1998.39740	50.07	peak	-3.93	46.14	74.00	-27.86	169	311
6	2047.75640	49.98	peak	-3.79	46.19	74.00	-27.81	133	227

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$) ; HOR: $\pm 5.05\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$)VER: $\pm 4.71\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$) ; HOR: $\pm 4.96\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$)VER: $\pm 5.37\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$) ; HOR: $\pm 5.61\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)


c. Channel High

Operated mode : TX / RX

Fundamental Frequency : 2462 MHz

File: 21-05-MAW- #39 Date: 2021/12/7 Temperature: 23 °C
007_G

Site: RE02-EMC B1- Humidity: 60 %

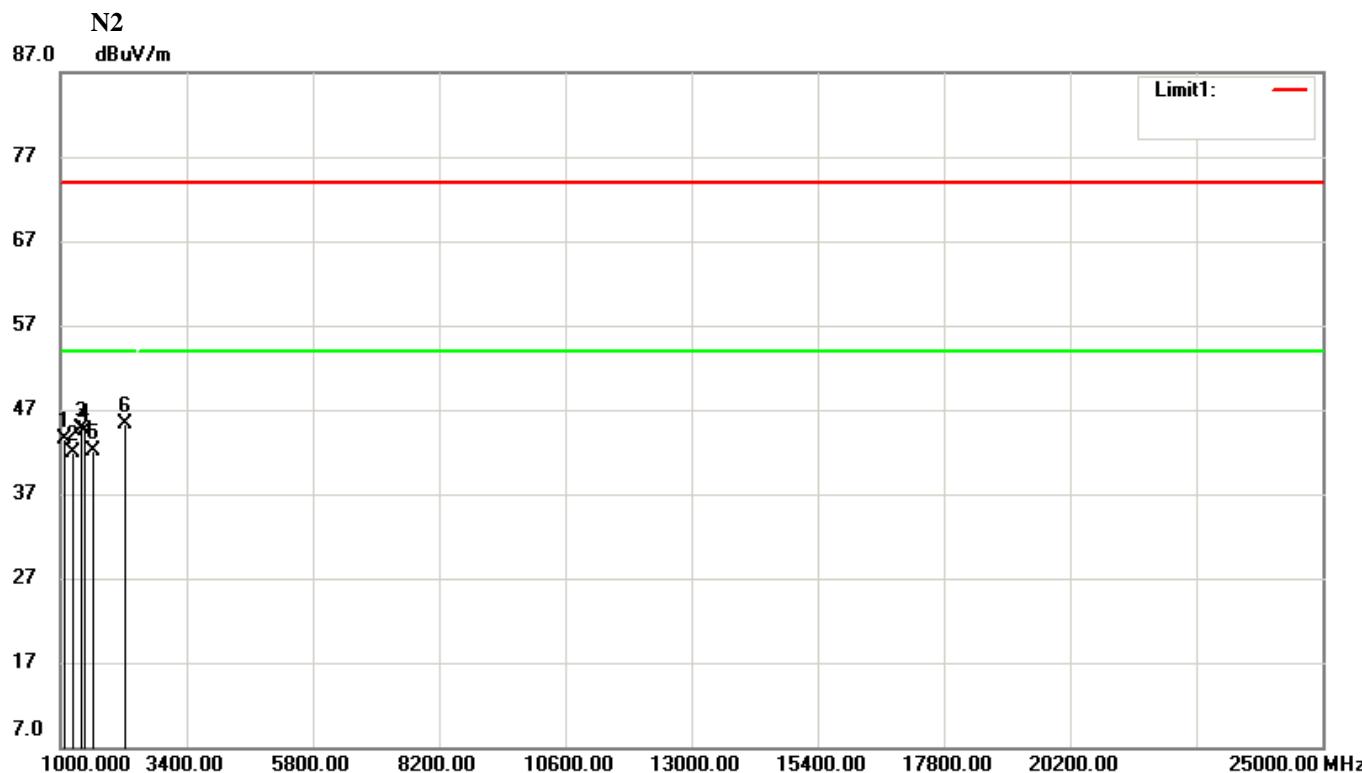

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Horizontal

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH HIGH-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1042.62820	52.84	peak	-9.34	43.50	74.00	-30.50	131	146
2	1199.67940	50.82	peak	-8.84	41.98	74.00	-32.02	154	243
3	1367.94870	53.02	peak	-8.32	44.70	74.00	-29.30	156	78
4	1441.98710	52.52	peak	-8.08	44.44	74.00	-29.56	147	82
5	1601.28200	49.28	peak	-7.09	42.19	74.00	-31.81	125	163
6	2198.07700	48.69	peak	-3.40	45.29	74.00	-28.71	174	277

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$ VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$;HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$ VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$;HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$


Operated mode : TX / RX

Fundamental Frequency : 2462 MHz

File: 21-05-MAW- #40 Date: 2021/12/7 Temperature: 23 °C

007_G

Site: RE02-EMC B1- Humidity: 60 %

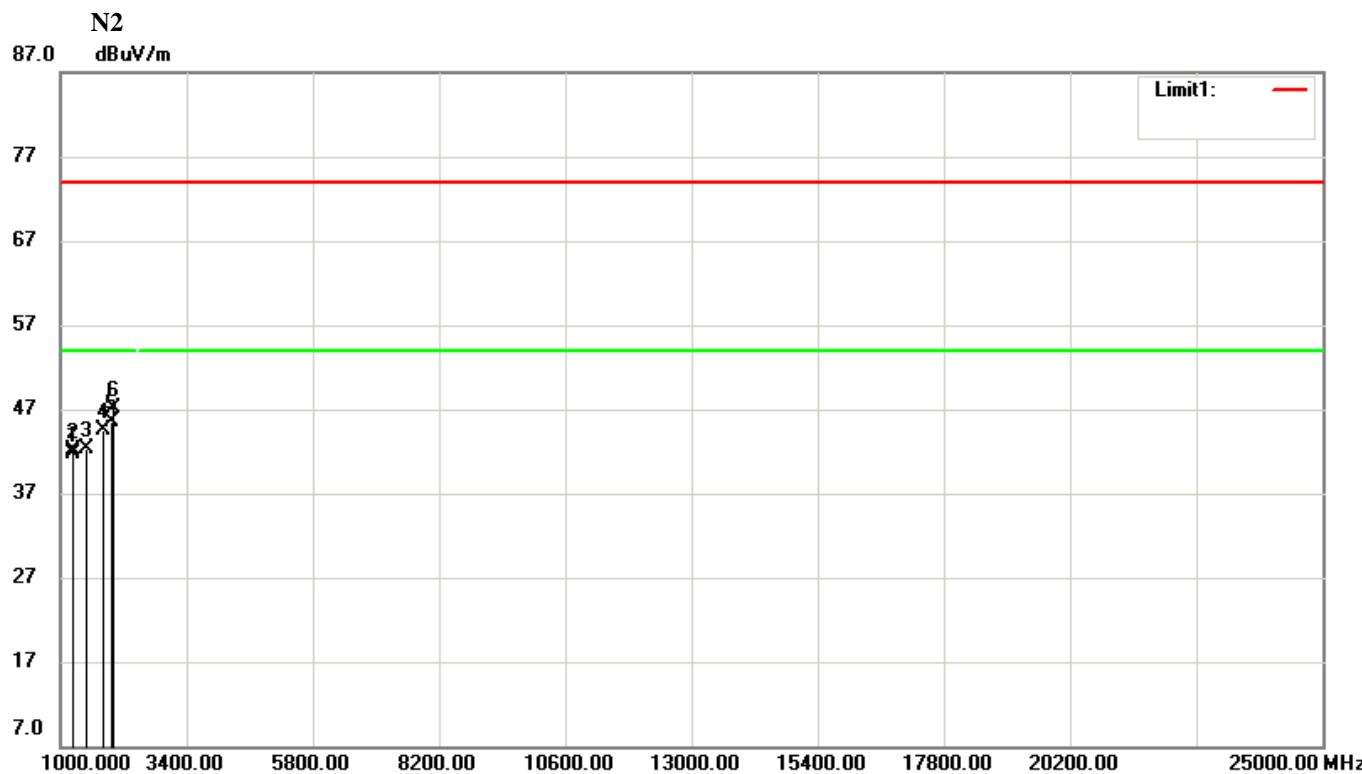

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Vertical

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH HIGH-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1195.19230	50.49	peak	-8.85	41.64	74.00	-32.36	120	79
2	1224.35900	50.91	peak	-8.77	42.14	74.00	-31.86	103	54
3	1491.34610	50.15	peak	-7.94	42.21	74.00	-31.79	150	165
4	1798.71800	50.01	peak	-5.53	44.48	74.00	-29.52	162	170
5	1942.30760	49.97	peak	-4.38	45.59	74.00	-28.41	153	85
6	1996.15380	50.98	peak	-3.94	47.04	74.00	-26.96	144	245

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$) ; HOR: $\pm 5.05\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$)VER: $\pm 4.71\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$) ; HOR: $\pm 4.96\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$)VER: $\pm 5.37\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$) ; HOR: $\pm 5.61\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

10.4.2.3 IEEE 802.11n, HT20


a. Channel Low

Operated mode : TX / RX

Fundamental Frequency : 2412 MHz

File: 21-05-MAW-#35 Date: 2021/12/7 Temperature: 23 °C
007_n20

Site: RE02-EMC B1- Humidity: 60 %

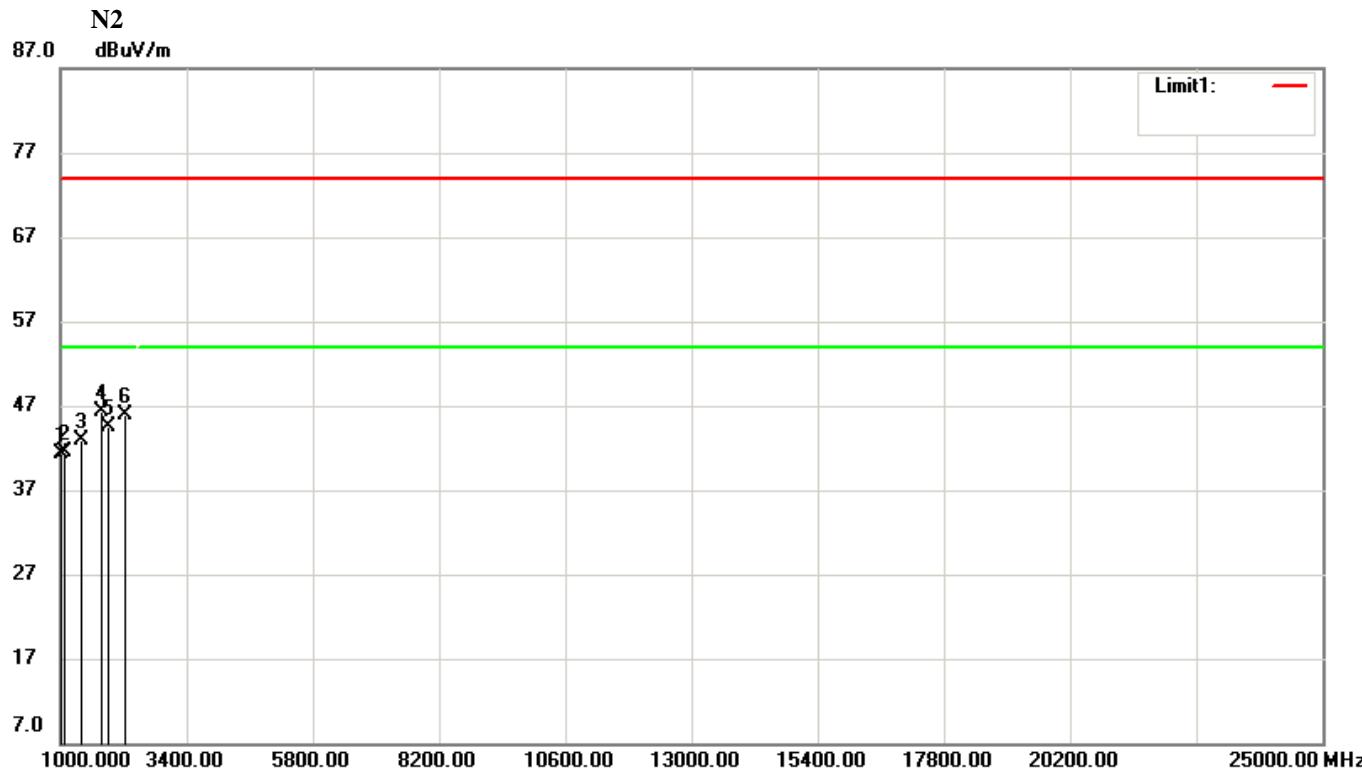

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Horizontal

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH LOW-1

No.	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
	(MHz)	(dBuV/m)		dB/m	(dBuV/m)	(dBuV/m)	(dB)	(cm)	(°)
1	1002.24350	50.76	peak	-9.47	41.29	74.00	-32.71	151	172
2	1071.79470	50.67	peak	-9.25	41.42	74.00	-32.58	147	56
3	1367.94870	51.30	peak	-8.32	42.98	74.00	-31.02	138	158
4	1765.06410	52.02	peak	-5.79	46.23	74.00	-27.77	152	125
5	1888.46150	49.41	peak	-4.81	44.60	74.00	-29.40	162	278
6	2193.58950	49.32	peak	-3.42	45.90	74.00	-28.10	174	317

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$ VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$;HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$ VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$;HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$


Operated mode : TX / RX

Fundamental Frequency : 2412 MHz

File: 21-05-MAW- #36 Date: 2021/12/7 Temperature: 23 °C

007_n20

Site: RE02-EMC B1- Humidity: 60 %

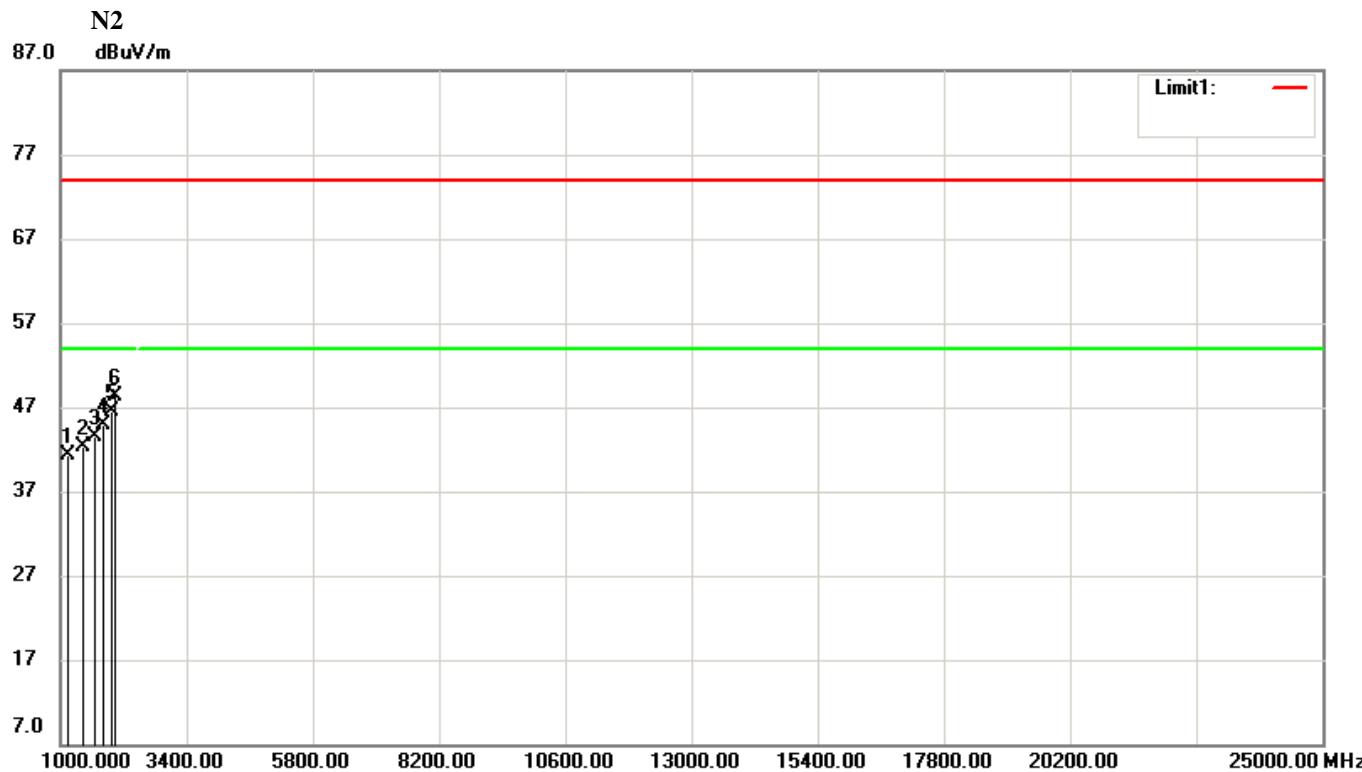

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Vertical

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH LOW-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1143.58970	50.24	peak	-9.02	41.22	74.00	-32.78	142	155
2	1399.35900	50.46	peak	-8.22	42.24	74.00	-31.76	163	167
3	1616.98710	50.46	peak	-6.97	43.49	74.00	-30.51	150	170
4	1794.23070	50.53	peak	-5.56	44.97	74.00	-29.03	151	56
5	1931.08970	50.90	peak	-4.47	46.43	74.00	-27.57	138	267
6	2000.64100	52.32	peak	-3.92	48.40	74.00	-25.60	150	156

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$; HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$ VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$; HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$ VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$; HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$


b. Channel Mid

Operated mode : TX / RX

Fundamental Frequency : 2437 MHz

File: 21-05-MAW- #37 Date: 2021/12/7 Temperature: 23 °C
007_n20

Site: RE02-EMC B1- Humidity: 60 %

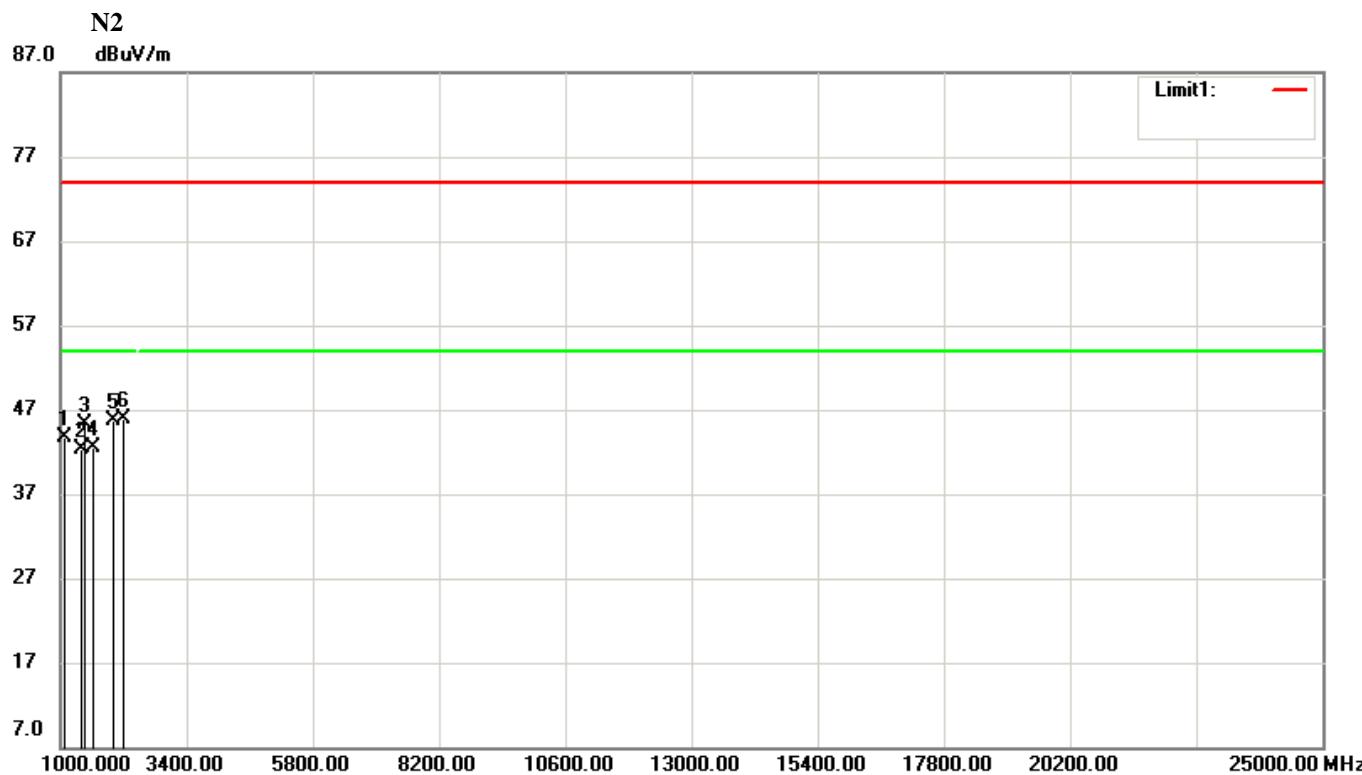

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Horizontal

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH MID-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1049.35900	53.08	peak	-9.31	43.77	74.00	-30.23	146	4
2	1367.94870	50.67	peak	-8.32	42.35	74.00	-31.65	176	23
3	1441.98710	53.45	peak	-8.08	45.37	74.00	-28.63	152	142
4	1601.28200	49.65	peak	-7.09	42.56	74.00	-31.44	152	12
5	1984.93580	49.66	peak	-4.04	45.62	74.00	-28.38	103	346
6	2182.37170	49.31	peak	-3.45	45.86	74.00	-28.14	167	250

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$ VER: $\pm 4.71\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$;HOR: $\pm 4.96\text{dB}(6\text{GHz} \leq f < 18\text{GHz})$ VER: $\pm 5.37\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$;HOR: $\pm 5.61\text{dB}(18\text{GHz} \leq f \leq 40\text{GHz})$


Operated mode : TX / RX

Fundamental Frequency : 2437 MHz

File: 21-05-MAW- #38 Date: 2021/12/7 Temperature: 23 °C

007_n20

Site: RE02-EMC B1- Humidity: 60 %

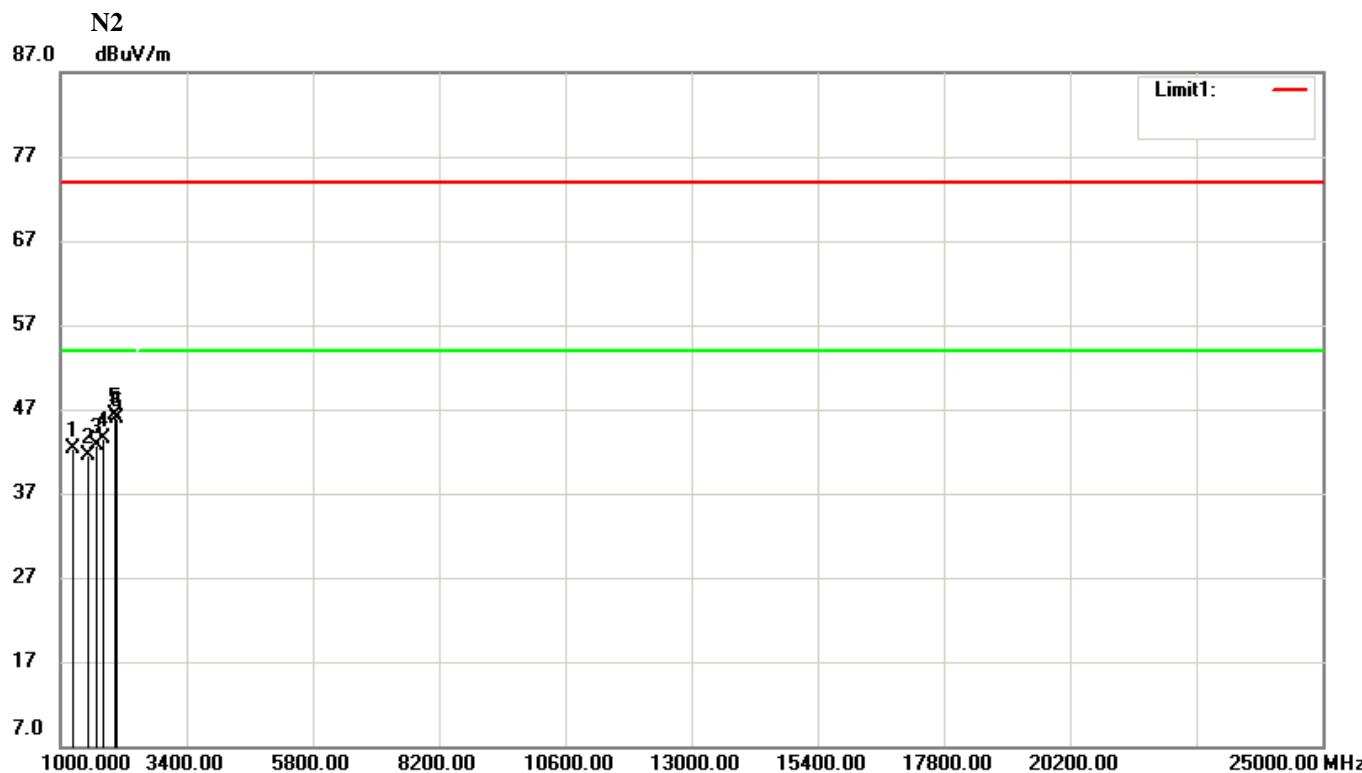

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Vertical

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH MID-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1197.43580	51.06	peak	-8.85	42.21	74.00	-31.79	145	247
2	1527.24350	49.27	peak	-7.69	41.58	74.00	-32.42	178	84
3	1659.61530	49.26	peak	-6.63	42.63	74.00	-31.37	203	112
4	1798.71800	48.94	peak	-5.53	43.41	74.00	-30.59	134	168
5	2007.37170	50.12	peak	-3.91	46.21	74.00	-27.79	150	57
6	2047.75640	49.64	peak	-3.79	45.85	74.00	-28.15	151	85

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$) ; HOR: $\pm 5.05\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$)VER: $\pm 4.71\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$) ; HOR: $\pm 4.96\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$)VER: $\pm 5.37\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$) ; HOR: $\pm 5.61\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

c. Channel High

Operated mode : TX / RX


Fundamental Frequency : 2462 MHz

File: 21-05-MAW- #39 Date: 2021/12/7 Temperature: 23 °C

007_n20

Site: RE02-EMC B1- Humidity: 60 %

N2

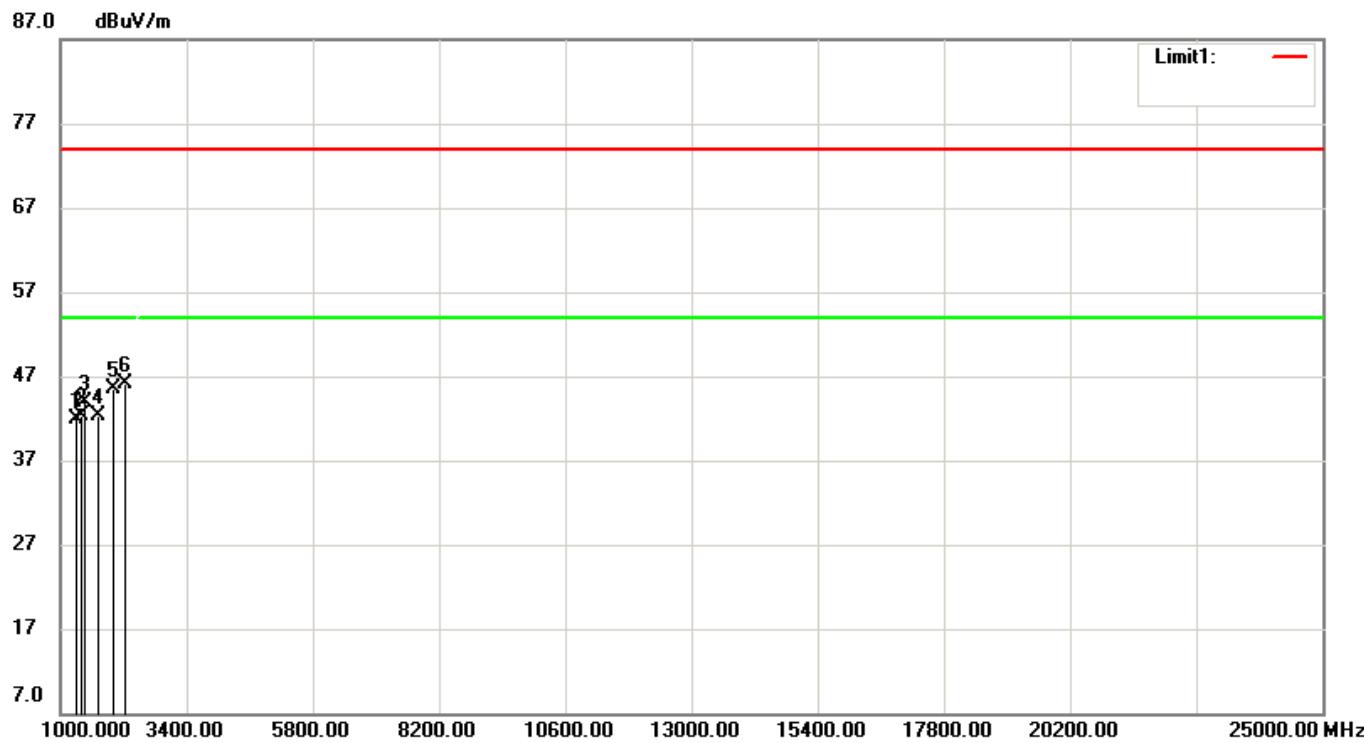

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Horizontal

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH HIGH-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1271.47430	50.48	peak	-8.62	41.86	74.00	-32.14	152	43
2	1367.94870	50.70	peak	-8.32	42.38	74.00	-31.62	156	152
3	1441.98710	51.99	peak	-8.08	43.91	74.00	-30.09	124	137
4	1729.16660	48.34	peak	-6.07	42.27	74.00	-31.73	148	268
5	1998.39740	49.46	peak	-3.93	45.53	74.00	-28.47	117	255
6	2207.05120	49.41	peak	-3.38	46.03	74.00	-27.97	167	274

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.

2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$) ; HOR: $\pm 5.05 \text{ dB}$ ($1 \text{ GHz} \leq f < 6 \text{ GHz}$)VER: $\pm 4.71 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$) ; HOR: $\pm 4.96 \text{ dB}$ ($6 \text{ GHz} \leq f < 18 \text{ GHz}$)VER: $\pm 5.37 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$) ; HOR: $\pm 5.61 \text{ dB}$ ($18 \text{ GHz} \leq f \leq 40 \text{ GHz}$)


Operated mode : TX / RX

Fundamental Frequency : 2462 MHz

File: 21-05-MAW- #40 Date: 2021/12/7 Temperature: 23 °C

007_n20

Site: RE02-EMC B1- Humidity: 60 %

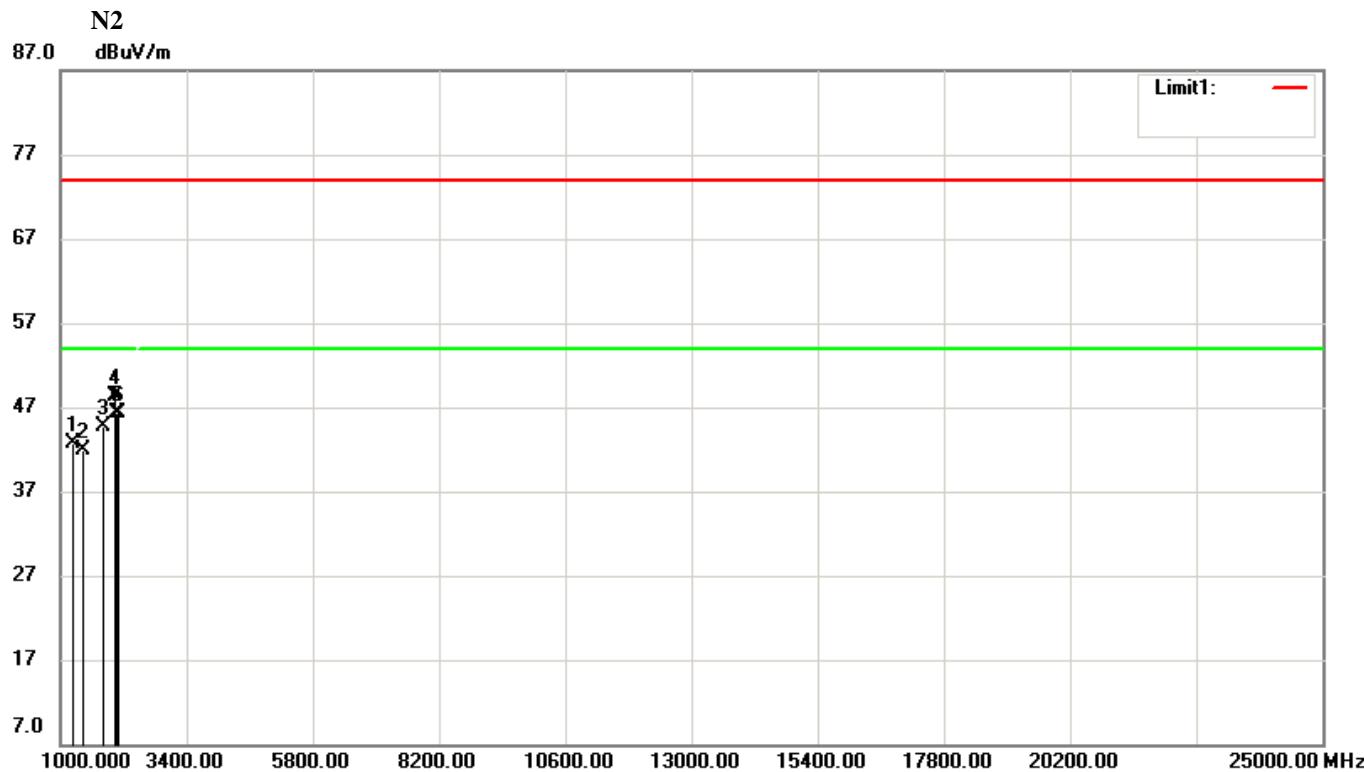

Condition: FCC Part15 RE-Class B_Above 1GHz_PK Polarization: Vertical

EUT: 手持式 IVD 醫療器材 Distance: 3m

Model: CHR-631W

Test Mode: DTS Operator: Phillip

Note: CH HIGH-1

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	1195.19230	51.60	peak	-8.85	42.75	74.00	-31.25	147	155
2	1399.35900	50.07	peak	-8.22	41.85	74.00	-32.15	152	27
3	1794.23070	50.28	peak	-5.56	44.72	74.00	-29.28	155	21
4	2000.64100	52.24	peak	-3.92	48.32	74.00	-25.68	136	183
5	2045.51280	50.02	peak	-3.80	46.22	74.00	-27.78	128	127
6	2079.16660	50.00	peak	-3.72	46.28	74.00	-27.72	162	278

Note: 1. If the peak result is under the average limit, that is deemed to meet the average limit.


2. The estimated measurement uncertainty of the result measurement is:

VER: $\pm 5.32\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$) ; HOR: $\pm 5.05\text{dB}$ ($1\text{GHz} \leq f < 6\text{GHz}$)VER: $\pm 4.71\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$) ; HOR: $\pm 4.96\text{dB}$ ($6\text{GHz} \leq f < 18\text{GHz}$)VER: $\pm 5.37\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$) ; HOR: $\pm 5.61\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$)

10.4.3 Other Emission

10.4.3.1 30MHz to 1GHz

File: 21-05-MAW- #3 Date: 2021/12/6 Temperature: 22 °C
007_Below 1G
Site: RE02-EMC B1- Humidity: 59 %
N2

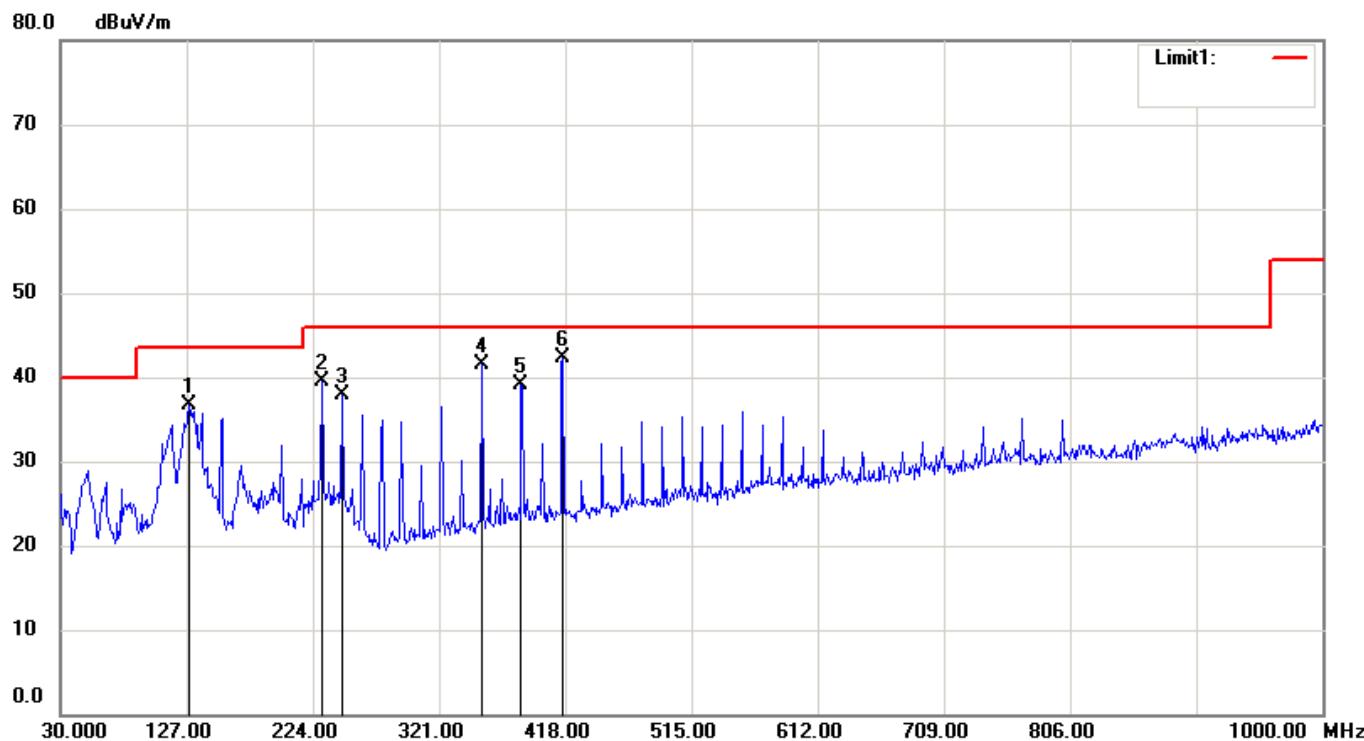

Condition: FCC Part15 RE-Class B_30-1000MHz Polarization: Horizontal

EUT: 手持式 IVD 醫療器材 Distance: 3m


Model: CHR-631W

Test Mode: DTS Operator: 22

Note: Phillip

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	128.9400	45.37	QP	-8.59	36.78	43.50	-6.72	114	31
2	230.7900	47.78	QP	-8.19	39.59	46.00	-6.41	122	151
3	246.3100	45.22	QP	-7.38	37.84	46.00	-8.16	112	144
4	353.9800	45.89	QP	-4.37	41.52	46.00	-4.48	150	238
5	384.0500	42.85	QP	-3.82	39.03	46.00	-6.97	146	88
6	416.0600	45.50	QP	-3.15	42.35	46.00	-3.65	100	122

File: 21-05-MAW- #4 Date: 2021/12/6 Temperature: 22 °C
 007_Below 1G
 Site: RE02-EMC B1- Humidity: 59 %
 N2

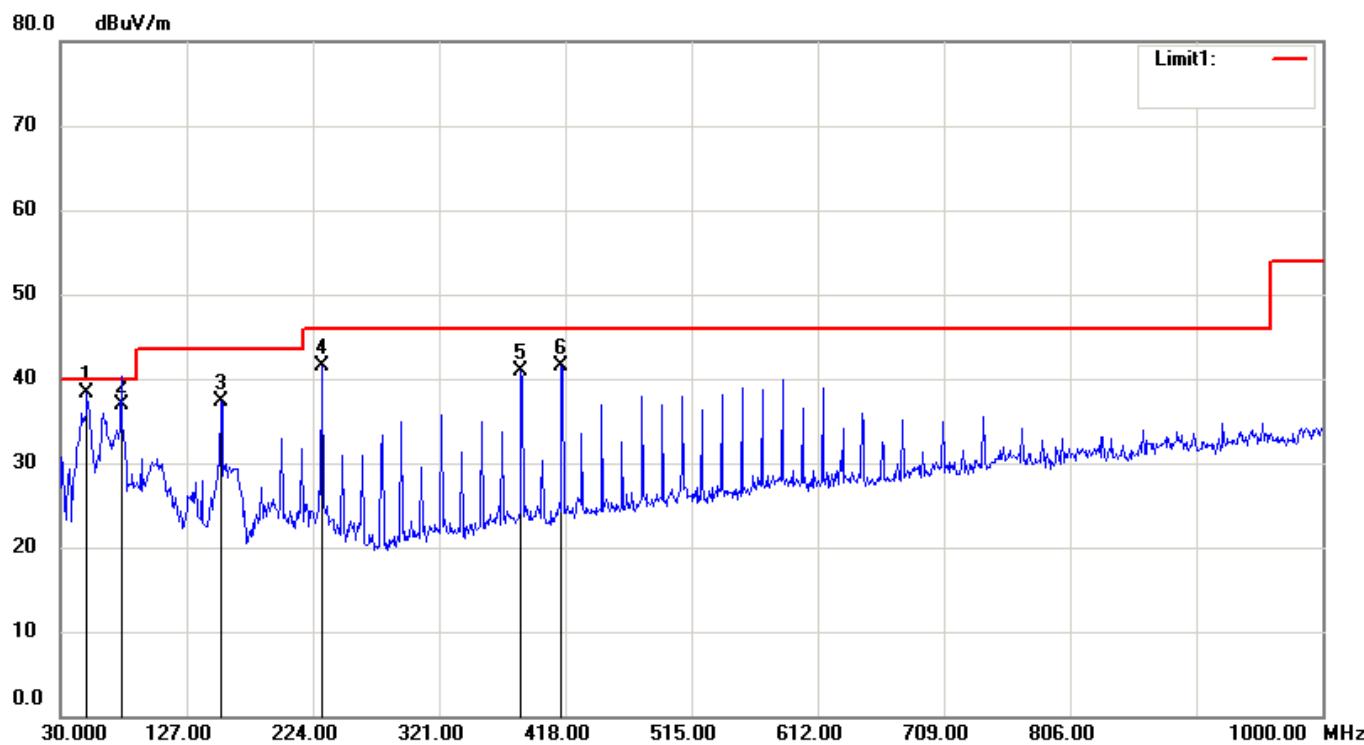

Condition: FCC Part15 RE-Class B_30-1000MHz Polarization: Vertical
 EUT: 手持式 IVD 醫療器材 Distance: 3m
 Model: CHR-631W
 Test Mode: DTS Operator: Phillip

Note:

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree (°)
1	50.3700	45.98	QP	-7.68	38.30	40.00	-1.70	100	204
2	76.9280	48.13	QP	-11.23	36.90	40.00	-3.10	100	15
3	153.1900	44.19	QP	-6.94	37.25	43.50	-6.25	120	130
4	230.7900	49.69	QP	-8.19	41.50	46.00	-4.50	150	67
5	384.0500	44.78	QP	-3.82	40.96	46.00	-5.04	150	40
6	415.0900	44.69	QP	-3.17	41.52	46.00	-4.48	135	287

10.4.3.2 below 30MHz

Frequency (MHz)	. Reading (dBuV/m) Peak	Duty (dB)	Factor (dB)	Result @3m (dBuV/m)			Limit @3m (dBuV/m)	
				Peak	QP	AVG	Peak	AVG
Radiated emission frequencies from 9 kHz to 30 MHz were too low to be measured.								

Note: 1. Place of Measurement: Measuring site of the ETC.
 2. Item of margin shown in above table refer to average limit.
 3. Remark “---” means that the emissions level is too low to be measured.
 4. If the peak result is under the average limit, that is deemed to meet the average limit.
 5. If there is only peak result, item “Margin” referred to “peak result – average limit”.
 6. The radiation emissions have been measured to beyond the tenth harmonic of the fundamental frequency and show the significant frequencies, other means the value is too low to be detected.
 7. The estimated measurement uncertainty of the result measurement is
 $\pm 4.2\text{dB}$ ($9\text{kHz} \leq f \leq 30\text{MHz}$)
 $\pm 4.6\text{dB}$ ($30\text{MHz} \leq f < 300\text{MHz}$).
 $\pm 4.4\text{dB}$ ($300\text{MHz} \leq f < 1000\text{MHz}$).
 $\pm 2.9\text{dB}$ ($1\text{GHz} \leq f < 18\text{GHz}$).
 $\pm 3.5\text{dB}$ ($18\text{GHz} \leq f \leq 40\text{GHz}$).

10.4.4 Radiated Measurement at Bandedge with Fundamental Frequencies and co-location

Test Date: Dec. 07, 2021

Temperature: 23°C

Humidity: 60%

10.4.4.1 IEEE 802.11b

Frequency (MHz)	Reading @3m (dBuV/m)					Factor (dB)	Result (dBuV/m)		Limit @3m		Margin (worse)	
	H		V		(dBuV/m)		(dBuV/m)		(dB)			
	Peak	Ave	Peak	Ave	Peak	Ave	Peak	Ave	Peak	Ave	Peak	Ave
2390.000	27.51	14.07	27.37	14.13	34.44	61.95	48.57	74.00	54.00	-12.05	-5.43	
2483.500	28.19	14.08	27.93	14.08	34.66	62.85	48.74	74.00	54.00	-11.15	-5.26	

Electric field strength (dBuV/m)	CH L				CH M				CH Hi			
	112.92				112.99				113.23			

10.4.4.2 IEEE 802.11g

Frequency (MHz)	Reading @3m (dBuV/m)					Factor (dB)	Result (dBuV/m)		Limit @3m		Margin (worse)	
	H		V		(dBuV/m)		(dBuV/m)		(dB)			
	Peak	Ave	Peak	Ave	Peak	Ave	Peak	Ave	Peak	Ave	Peak	Ave
2390.000	27.52	14.32	27.82	14.58	34.44	62.26	49.02	74.00	54.00	-11.74	-4.98	
2483.500	27.62	14.23	27.86	14.16	34.66	62.52	48.89	74.00	54.00	-11.48	-5.11	

Electric field strength (dBuV/m)	CH L				CH M				CH Hi			
	119.51				119.89				120.02			

10.4.4.3 IEEE 802.11n HT20

Frequency (MHz)	Reading @3m (dBuV/m)					Factor (dB)	Result (dBuV/m)		Limit @3m		Margin (worse)	
	H		V		(dBuV/m)		(dBuV/m)		(dB)			
	Peak	Ave	Peak	Ave	Peak	Ave	Peak	Ave	Peak	Ave	Peak	Ave
2390.000	29.14	14.26	29.46	14.43	34.44	63.90	48.87	74.00	54.00	-10.10	-5.13	
2483.500	29.02	14.12	28.24	14.08	34.66	63.68	48.78	74.00	54.00	-10.32	-5.22	

Electric field strength (dBuV/m)	CH L				CH M				CH Hi			
	118.93				119.39				119.59			

Note:1. The result is the highest value of radiated emission from restrict band of 2310~2390 MHz.
2. The estimated measurement uncertainty of the result measurement is:
VER: $\pm 5.32\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$;HOR: $\pm 5.05\text{dB}(1\text{GHz} \leq f < 6\text{GHz})$

10.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corrected Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

11. EQUIPMENTS LIST FOR TESTING

Equipment	Manufacturer	Model No.	S/N	Calibration Date	Next Cal. Due
EMI Test Receiver	R&S	ESCI	13054418-001	11/05/2021	11/04/2022
V-LISN	R&S	ENV216	13057719-001	05/13/2021	05/12/2022
Spectrum Analyzer	R&S	FSV40	13052017-001	05/27/2021	05/26/2022
Attenuator	WEINSCHEL	56-10	58772	05/03/2021	05/02/2022
Power Meter	Agilent	N1912A	13050625-001	10/13/2021	10/12/2022
Power Sensor	Agilent	N1922A	13053523-001	10/13/2021	10/12/2022
EMI Receiver	R&S	ESCI	13054423-001	11/24/2021	11/23/2022
Spectrum Analyzer	R&S	FSU46	13040904-001	05/13/2021	05/12/2022
Horn Antenna	EMCO	3117	13059211-004	04/09/2021	04/08/2022
Horn Antenna	EMCO	3116	13059202-001	11/04/2021	11/03/2022
Loop Antenna	ETS-LINDREN	6512	13054106-001	06/15/2021	06/14/2022
PRE-Amplifier	Agilent	8449B	13040709-001	12/01/2021	11/30/2022
PRE-Amplifier	Agilent	8447D	13040715-002	05/03/2021	05/02/2022
BiLog Antenna	ETC	MCTD 2786	BL19J04024	03/11/2021	03/10/2022
Trilog Broadband Antenna with 5dB Pad	SCHWARZBEC K&EMCI	VULB 9168 & EMCI-N-6-05	1211&AT-N0569	05/10/2021	05/09/2022