


|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |

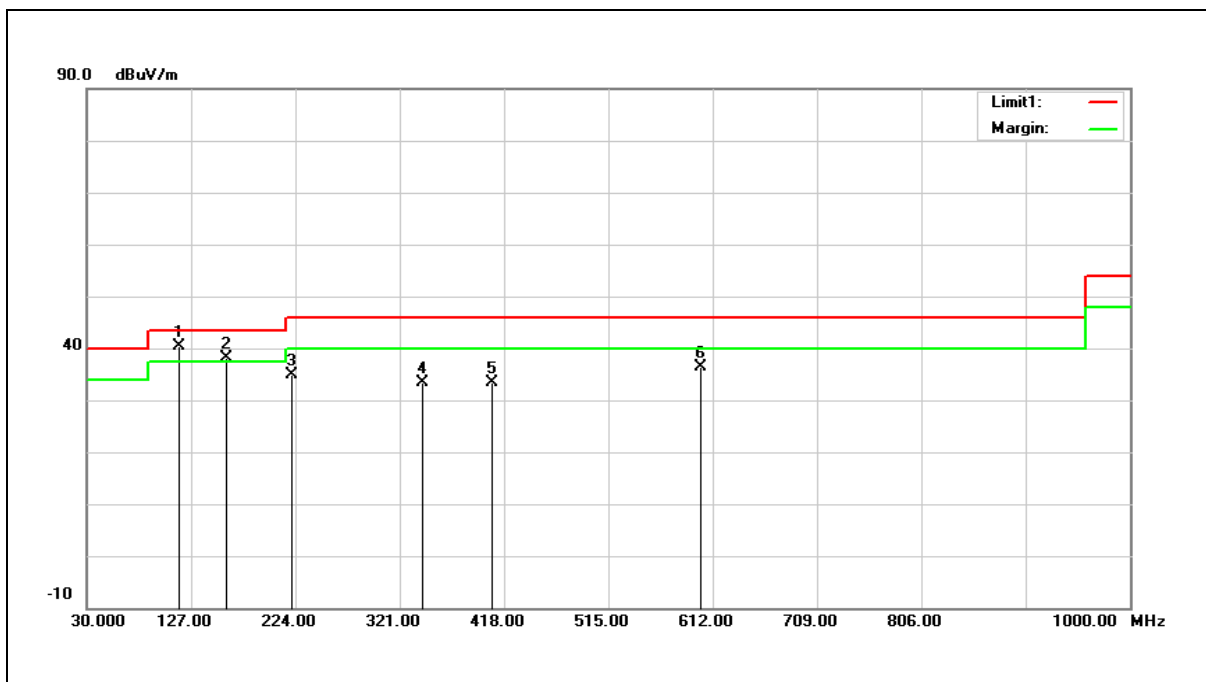

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 116.3300        | 49.00          | -8.74                 | 40.26           | 43.50          | -3.24       | QP     |
| 2   | 159.9800        | 43.66          | -5.41                 | 38.25           | 43.50          | -5.25       | QP     |
| 3   | 221.0900        | 42.08          | -7.12                 | 34.96           | 46.00          | -11.04      | QP     |
| 4   | 342.3400        | 36.83          | -3.53                 | 33.30           | 46.00          | -12.70      | QP     |
| 5   | 406.3600        | 35.31          | -1.91                 | 33.40           | 46.00          | -12.60      | QP     |
| 6   | 600.3600        | 34.00          | 2.49                  | 36.49           | 46.00          | -9.51       | QP     |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 40.26=-8.74+49.00.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

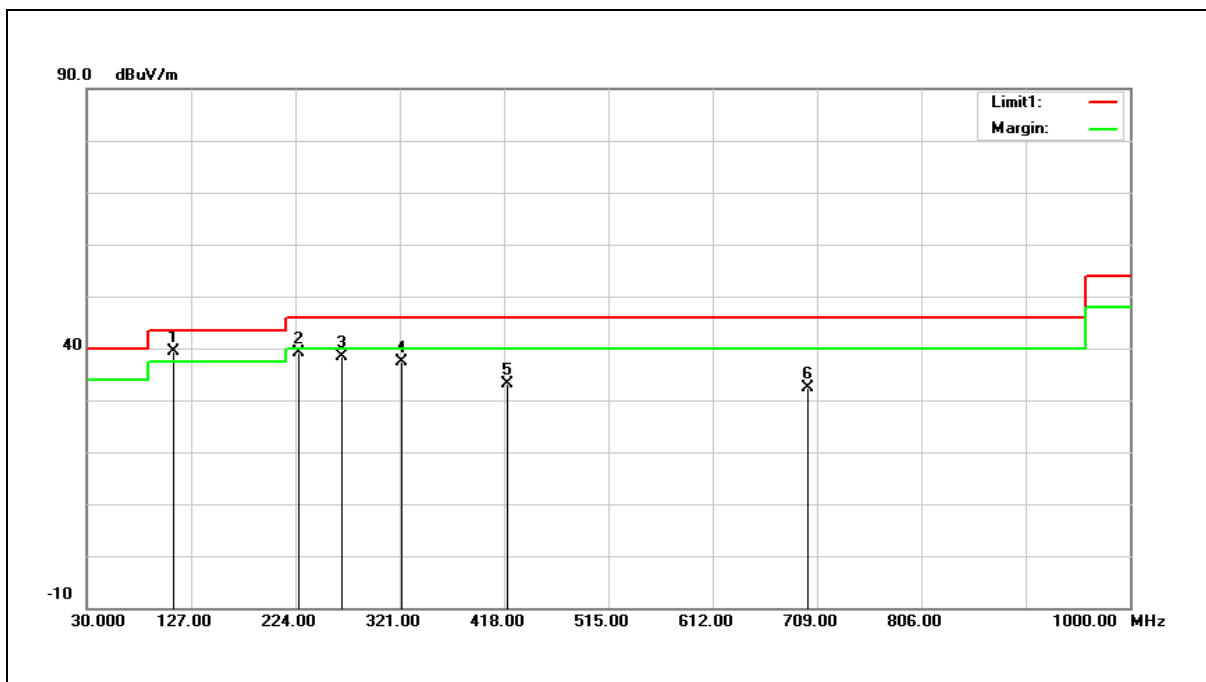

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 110.5100           | 48.65             | -9.18                    | 39.47              | 43.50             | -4.03          | QP     |
| 2   | 226.9100           | 46.09             | -7.03                    | 39.06              | 46.00             | -6.94          | QP     |
| 3   | 266.6800           | 43.69             | -5.27                    | 38.42              | 46.00             | -7.58          | QP     |
| 4   | 322.9400           | 41.10             | -3.84                    | 37.26              | 46.00             | -8.74          | QP     |
| 5   | 420.9100           | 34.75             | -1.51                    | 33.24              | 46.00             | -12.76         | QP     |
| 6   | 700.2700           | 28.34             | 3.93                     | 32.27              | 46.00             | -13.73         | QP     |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 39.47=-9.18+48.65.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

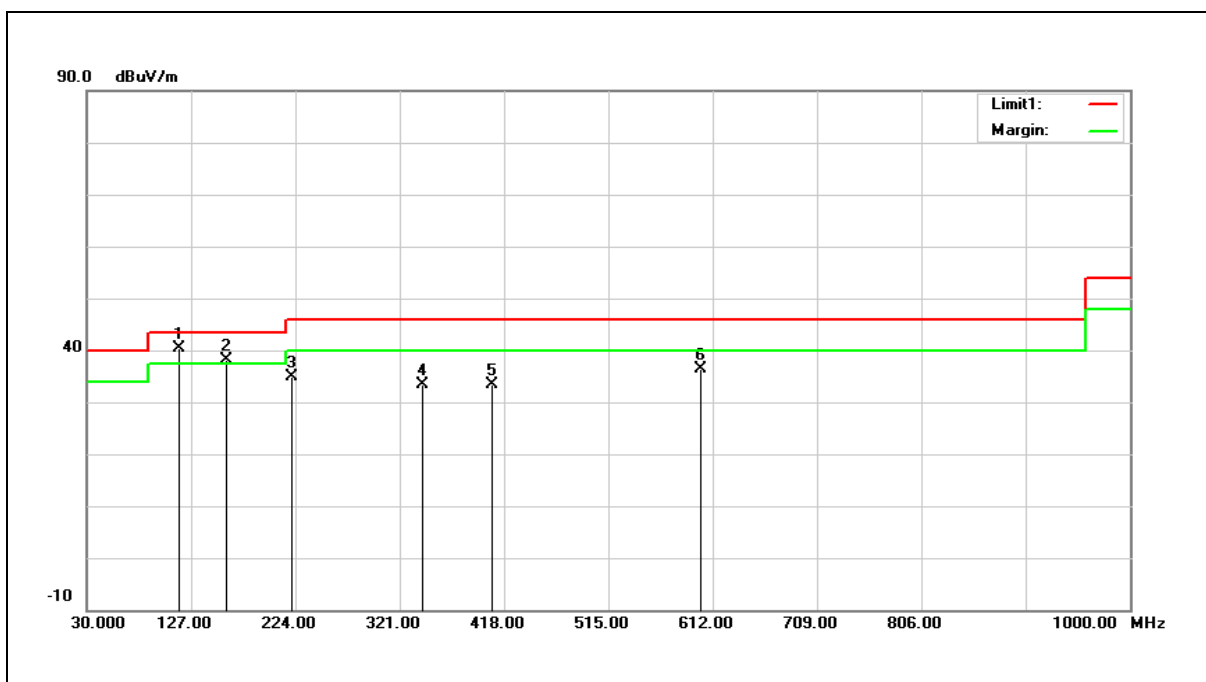

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 117.3000        | 46.67          | -8.66                 | 38.01           | 43.50          | -5.49       | QP     |
| 2   | 168.7100        | 42.05          | -5.75                 | 36.30           | 43.50          | -7.20       | QP     |
| 3   | 217.2100        | 40.38          | -7.28                 | 33.10           | 46.00          | -12.90      | QP     |
| 4   | 409.2700        | 36.01          | -1.83                 | 34.18           | 46.00          | -11.82      | QP     |
| 5   | 517.9100        | 32.20          | 0.28                  | 32.48           | 46.00          | -13.52      | QP     |
| 6   | 695.4200        | 28.09          | 3.84                  | 31.93           | 46.00          | -14.07      | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 38.01=-8.66+46.67.


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

## Harmonic

Above 1 GHz

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

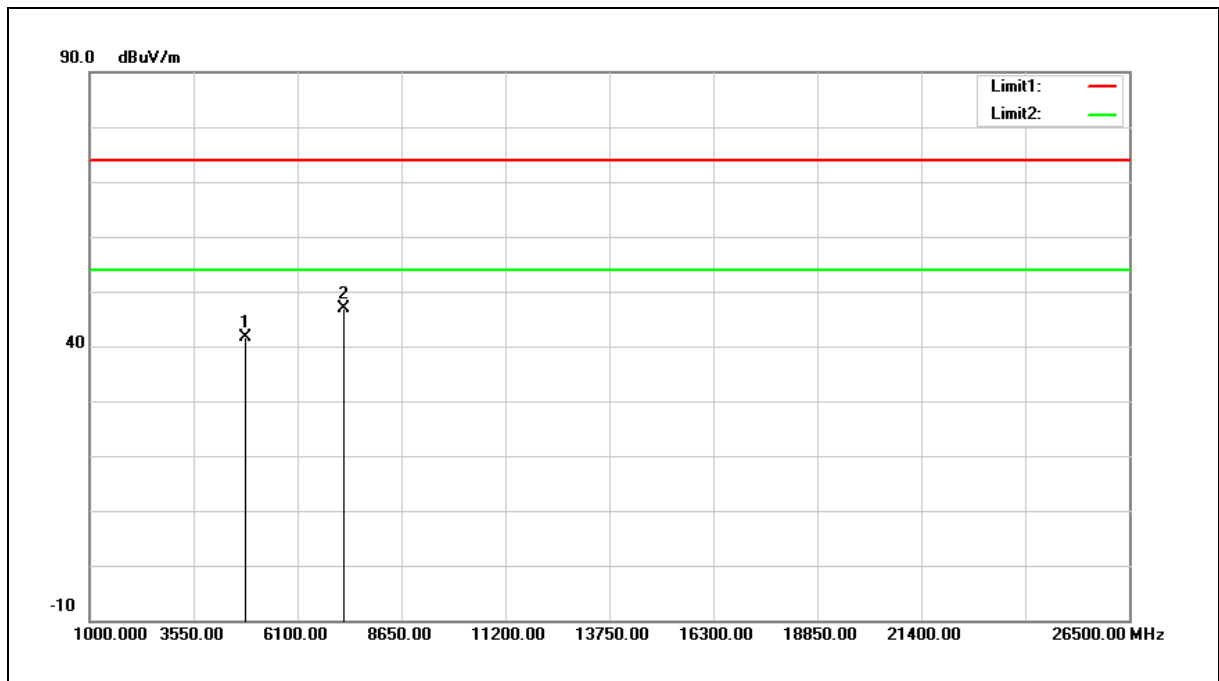

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4824.000        | 35.61          | 5.97                  | 41.58           | 74.00          | -32.42      | peak   |
| 2   | 7236.000        | 34.44          | 12.48                 | 46.92           | 74.00          | -27.08      | peak   |


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example:  $41.58 = 5.97 + 35.61$ .

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Vertical        |                |    |

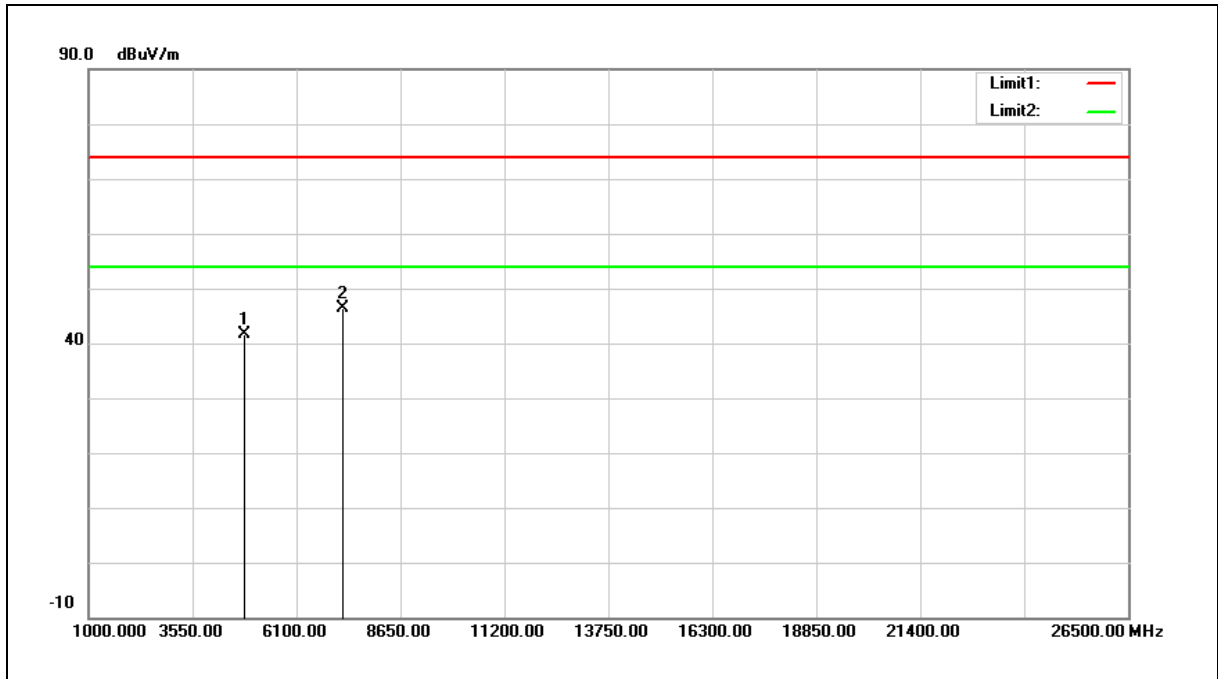

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4824.000           | 35.63             | 5.97                     | 41.60              | 74.00             | -32.40         | peak   |
| 2   | 7236.000           | 33.86             | 12.48                    | 46.34              | 74.00             | -27.66         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 41.60=5.97+35.63.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

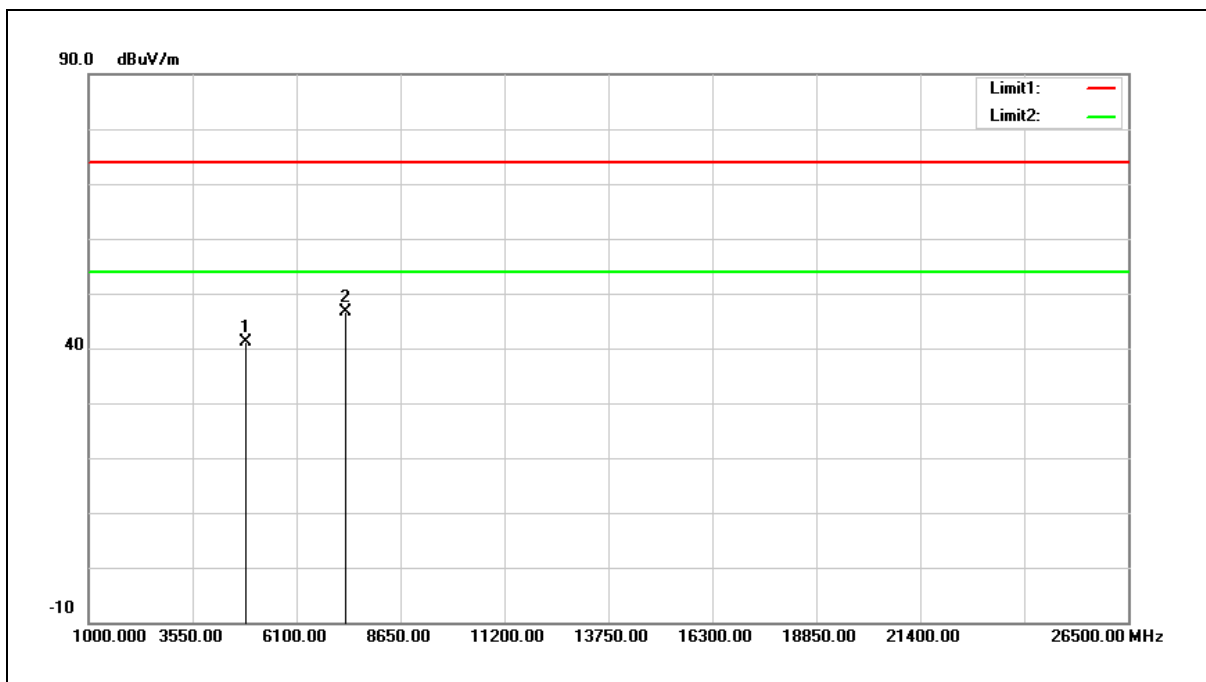

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4874.000        | 35.00          | 6.12                  | 41.12           | 74.00          | -32.88      | peak   |
| 2   | 7311.000        | 33.81          | 12.73                 | 46.54           | 74.00          | -27.46      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Vertical        |                |    |

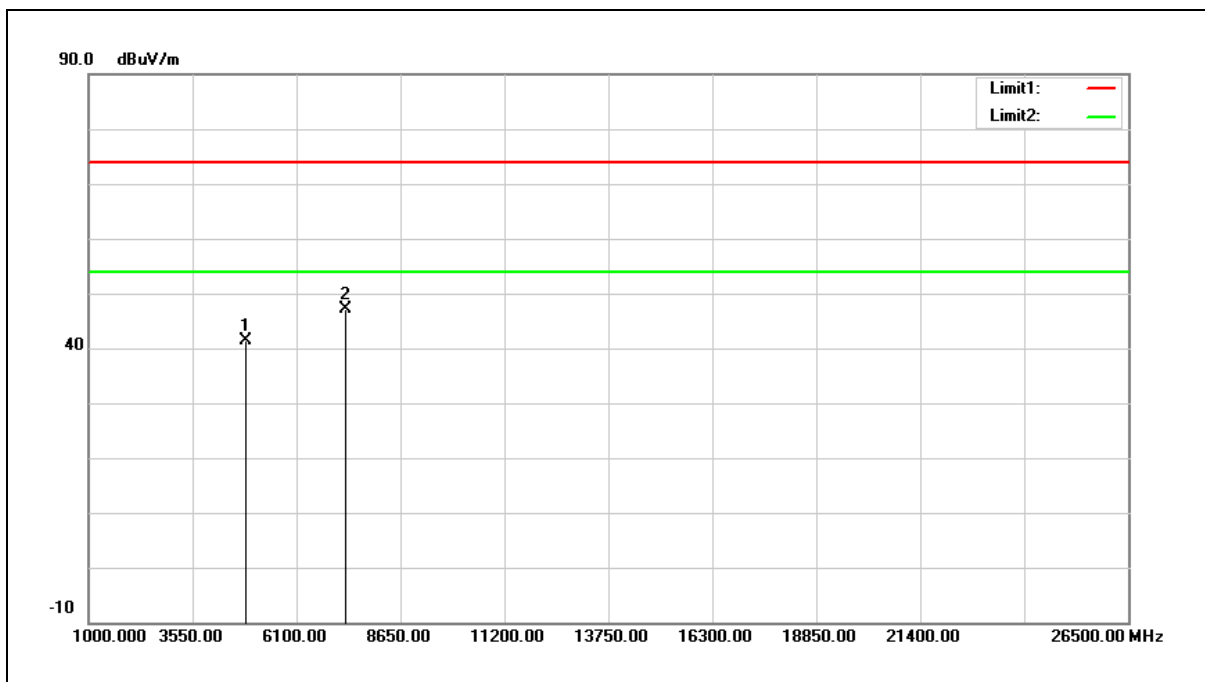

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4874.000        | 35.22          | 6.12                  | 41.34           | 74.00          | -32.66      | peak   |
| 2   | 7311.000        | 34.40          | 12.73                 | 47.13           | 74.00          | -26.87      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

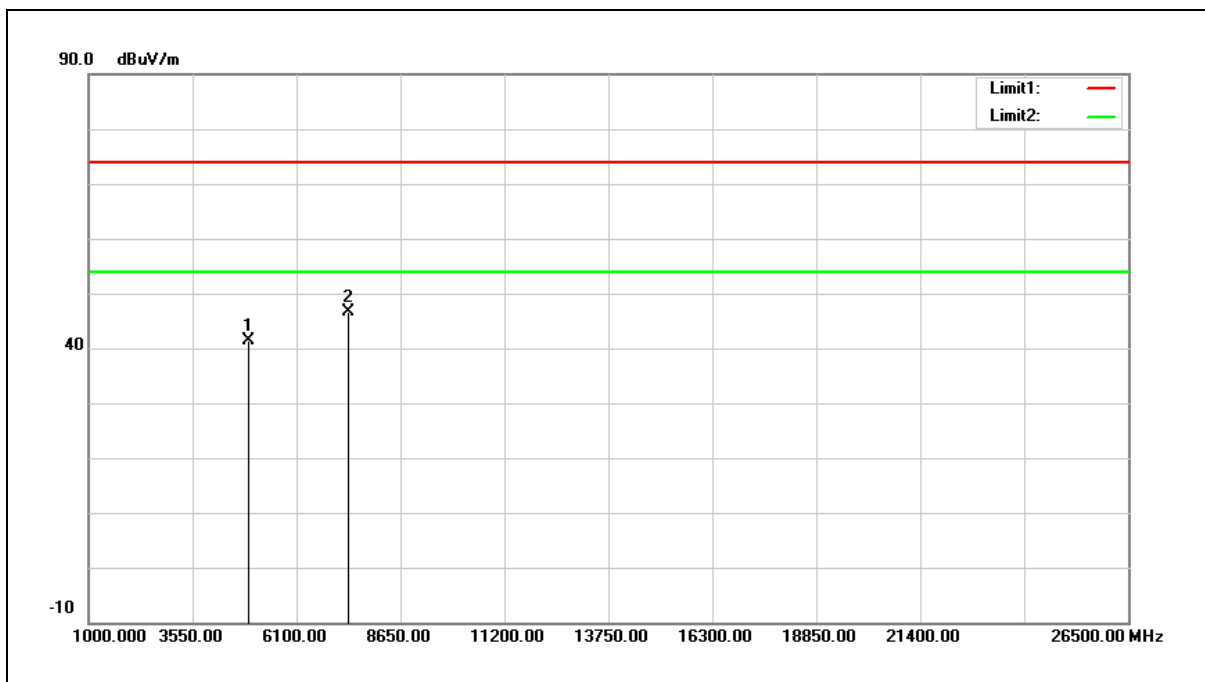

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4924.000           | 35.20             | 6.28                     | 41.48              | 74.00             | -32.52         | peak   |
| 2   | 7386.000           | 33.60             | 12.99                    | 46.59              | 74.00             | -27.41         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Vertical        |                |    |

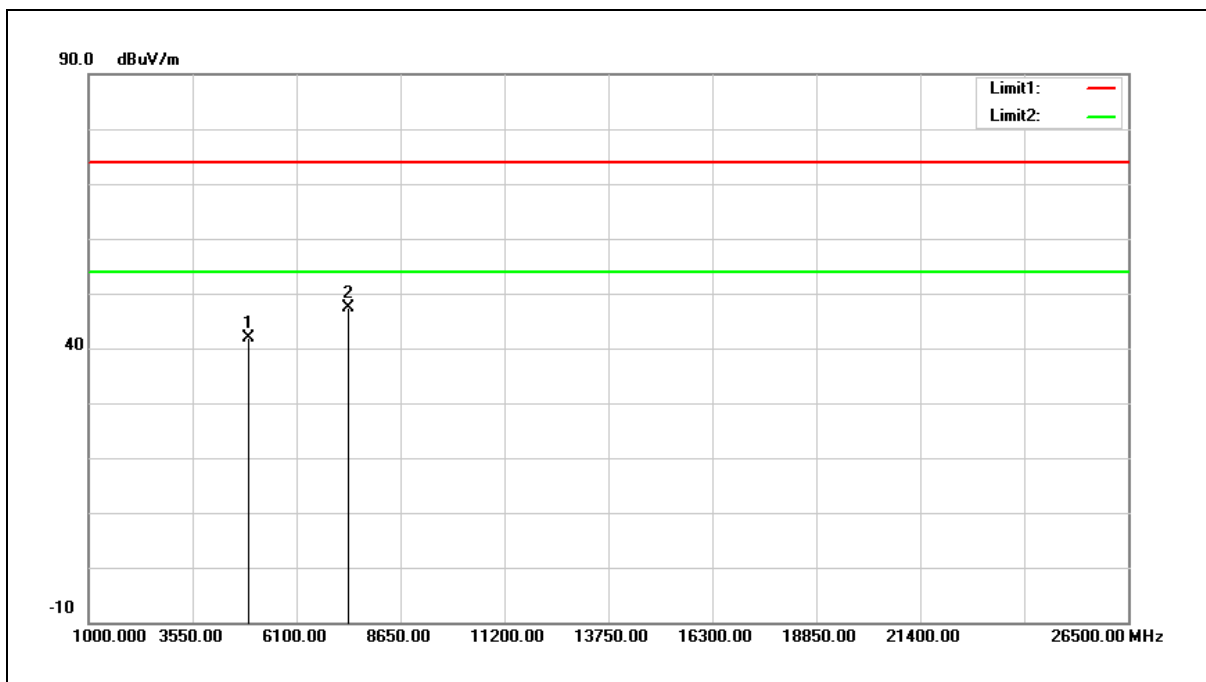


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4924.000           | 35.52             | 6.28                     | 41.80              | 74.00             | -32.20         | peak   |
| 2   | 7386.000           | 34.50             | 12.99                    | 47.49              | 74.00             | -26.51         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

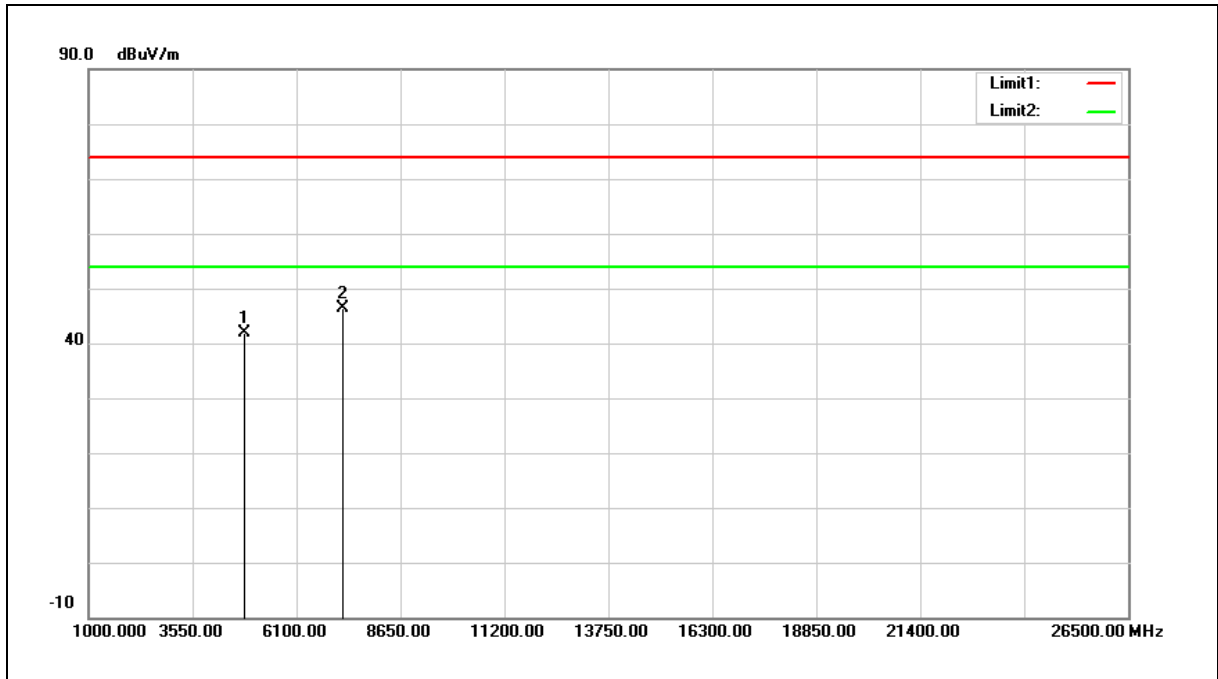


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4824.000           | 35.95             | 5.97                     | 41.92              | 74.00             | -32.08         | peak   |
| 2   | 7236.000           | 33.94             | 12.48                    | 46.42              | 74.00             | -27.58         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |

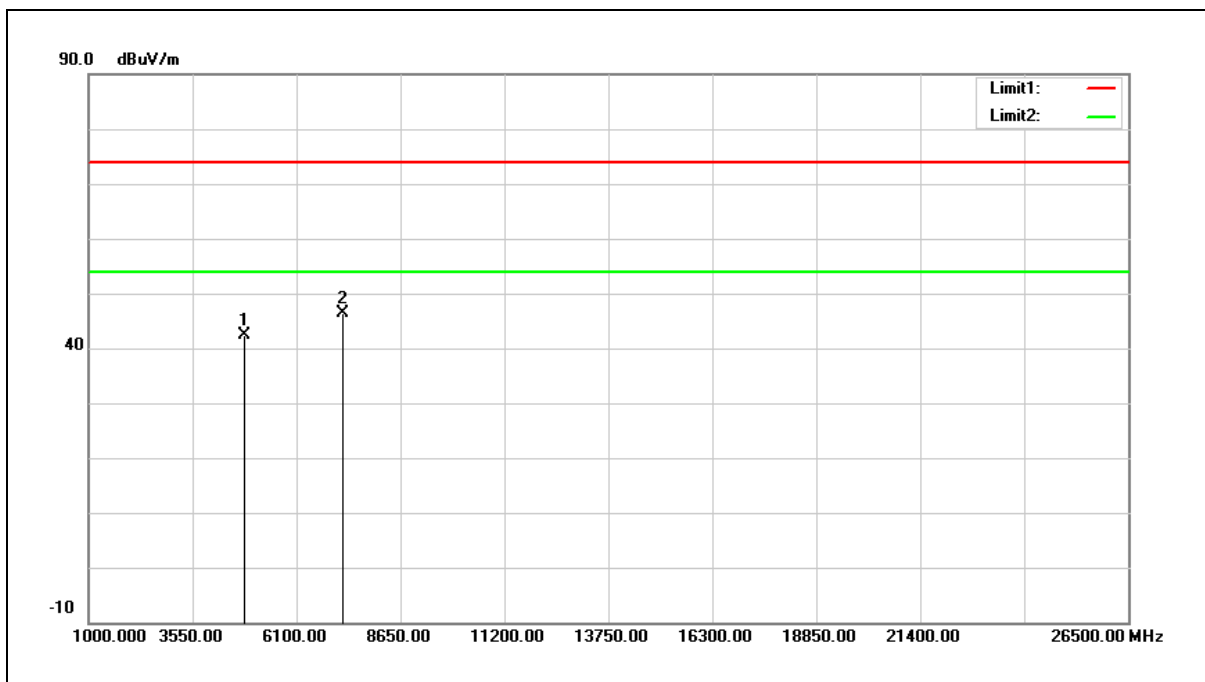


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4824.000        | 36.47          | 5.97                  | 42.44           | 74.00          | -31.56      | peak   |
| 2   | 7236.000        | 33.87          | 12.48                 | 46.35           | 74.00          | -27.65      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

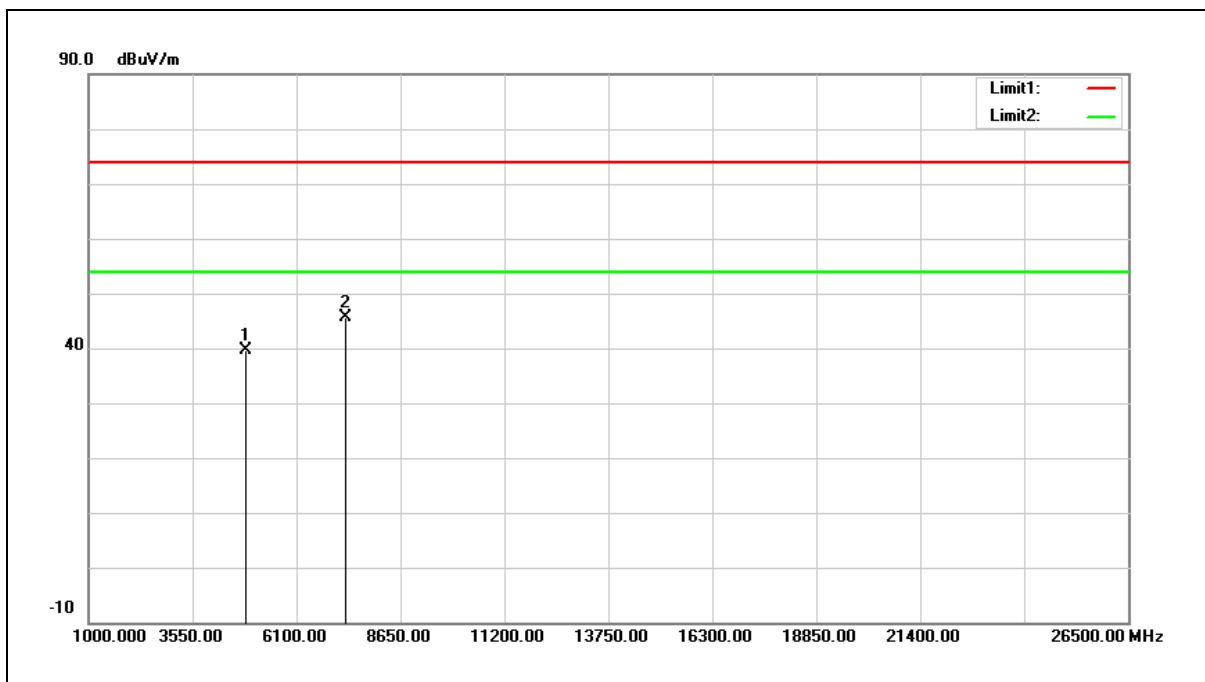

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 33.47             | 6.12                     | 39.59              | 74.00             | -34.41         | peak   |
| 2   | 7311.000           | 32.85             | 12.73                    | 45.58              | 74.00             | -28.42         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |

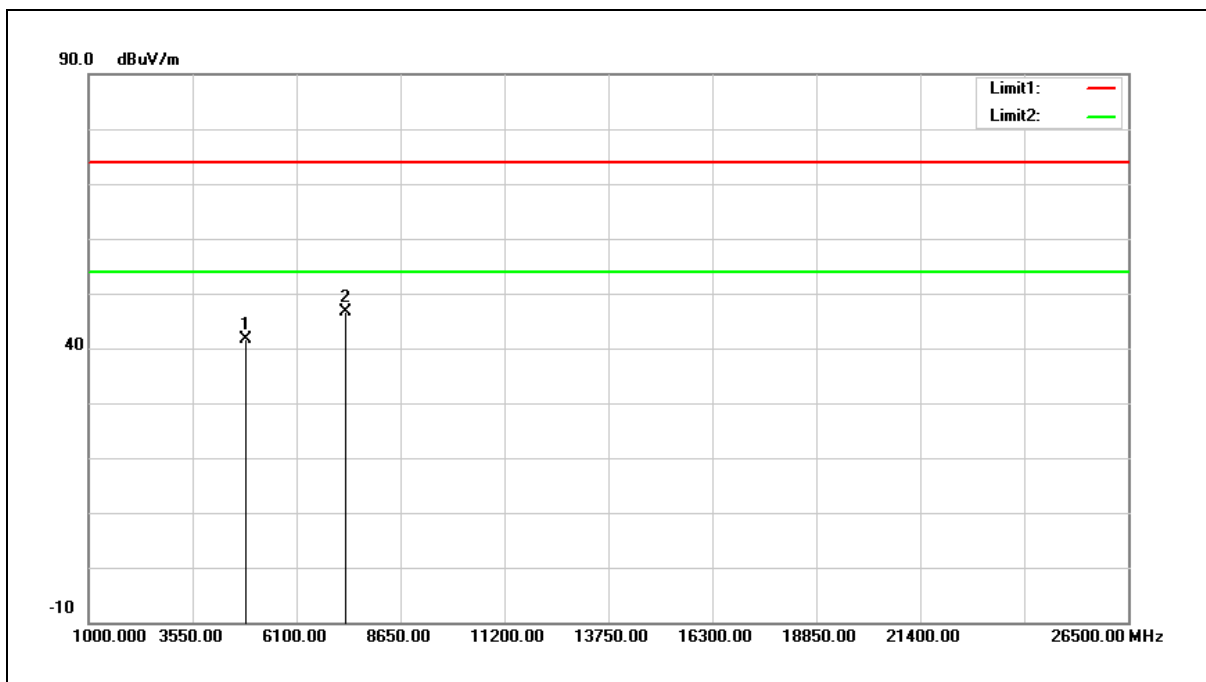


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4874.000        | 35.45          | 6.12                  | 41.57           | 74.00          | -32.43      | peak   |
| 2   | 7311.000        | 33.93          | 12.73                 | 46.66           | 74.00          | -27.34      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

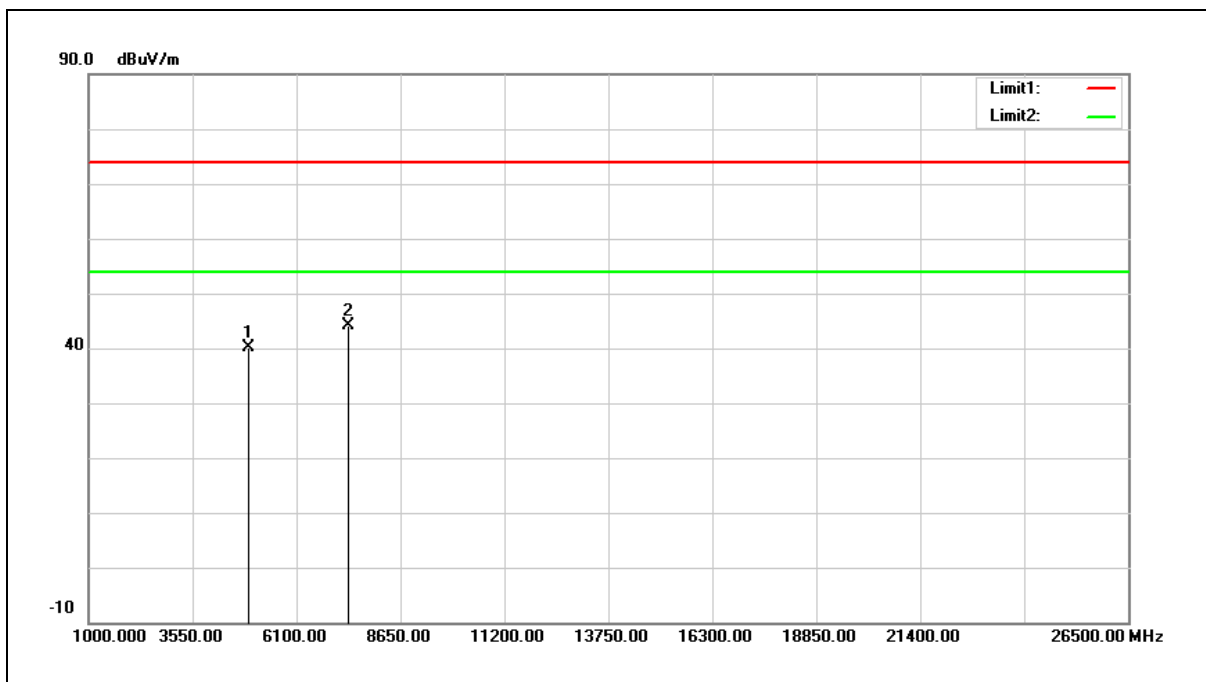


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4924.000           | 33.90             | 6.28                     | 40.18              | 74.00             | -33.82         | peak   |
| 2   | 7386.000           | 31.14             | 12.99                    | 44.13              | 74.00             | -29.87         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |

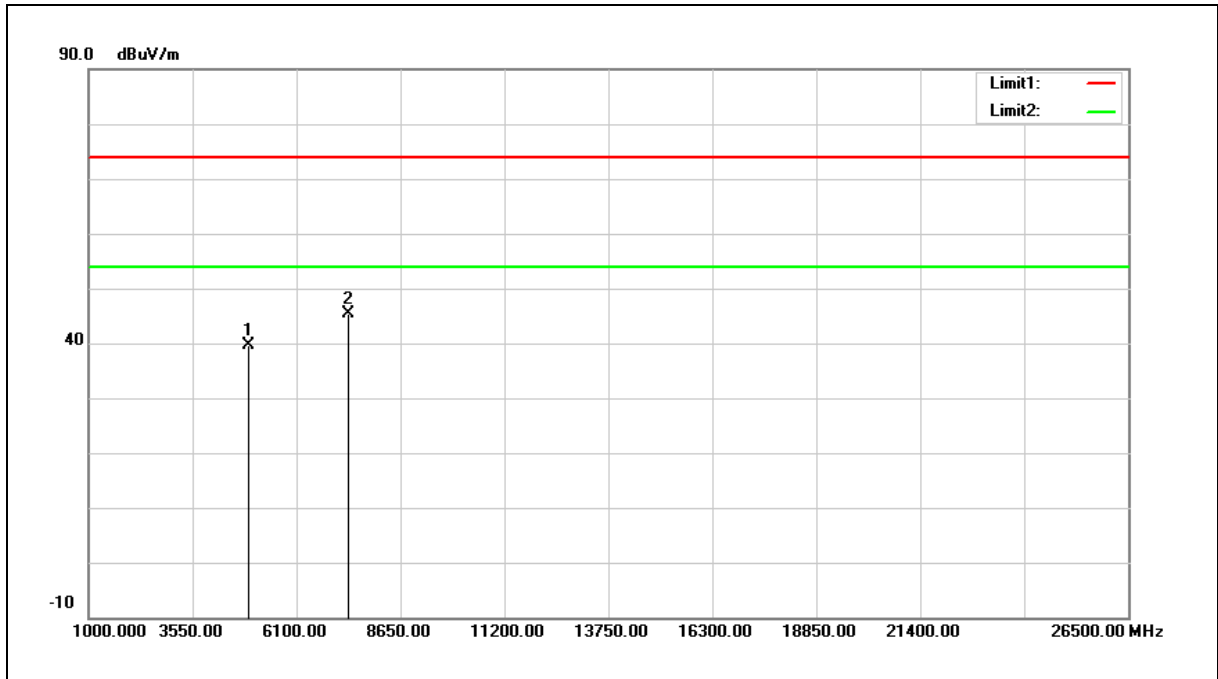


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4924.000        | 33.27          | 6.28                  | 39.55           | 74.00          | -34.45      | peak   |
| 2   | 7386.000        | 32.50          | 12.99                 | 45.49           | 74.00          | -28.51      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

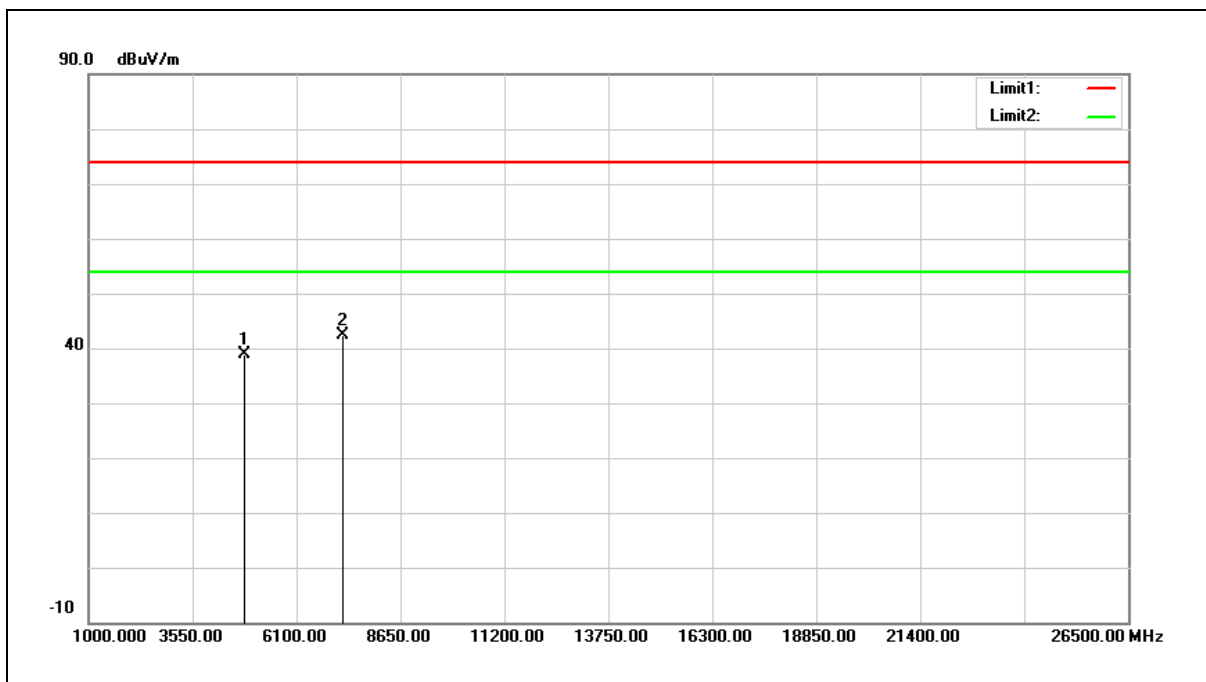


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4824.000           | 32.91             | 5.97                     | 38.88              | 74.00             | -35.12         | peak   |
| 2   | 7236.000           | 29.79             | 12.48                    | 42.27              | 74.00             | -31.73         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        | :              |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

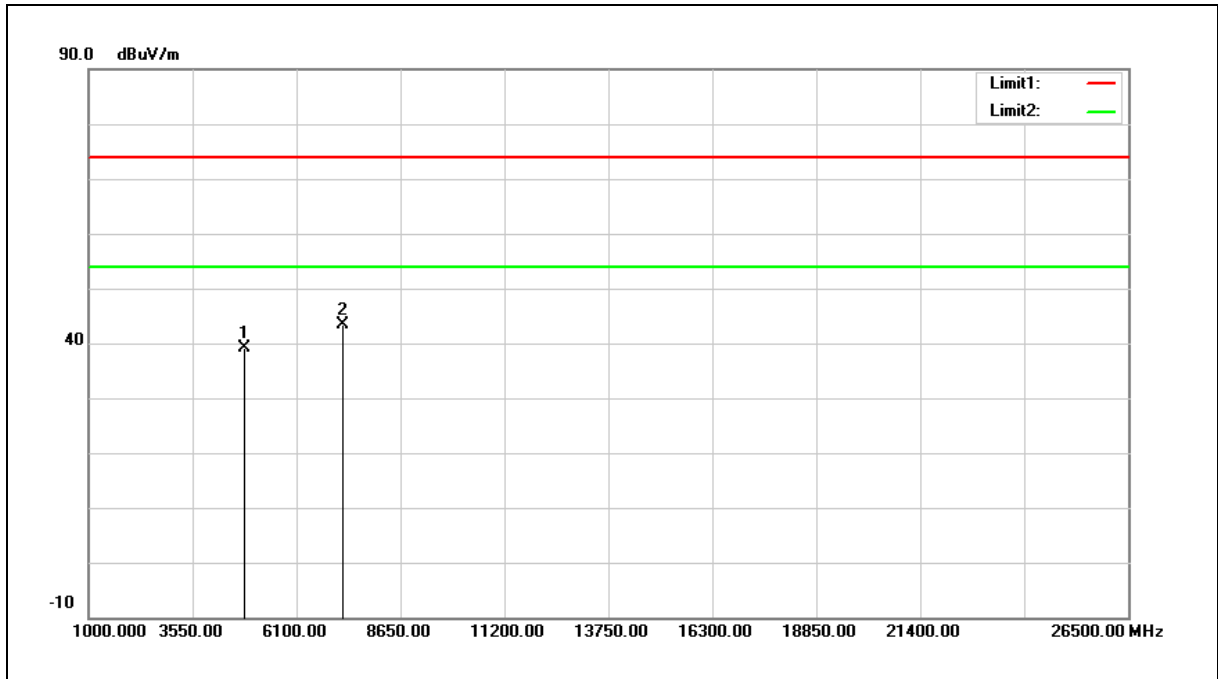


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4824.000        | 33.28          | 5.97                  | 39.25           | 74.00          | -34.75      | peak   |
| 2   | 7236.000        | 30.82          | 12.48                 | 43.30           | 74.00          | -30.70      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

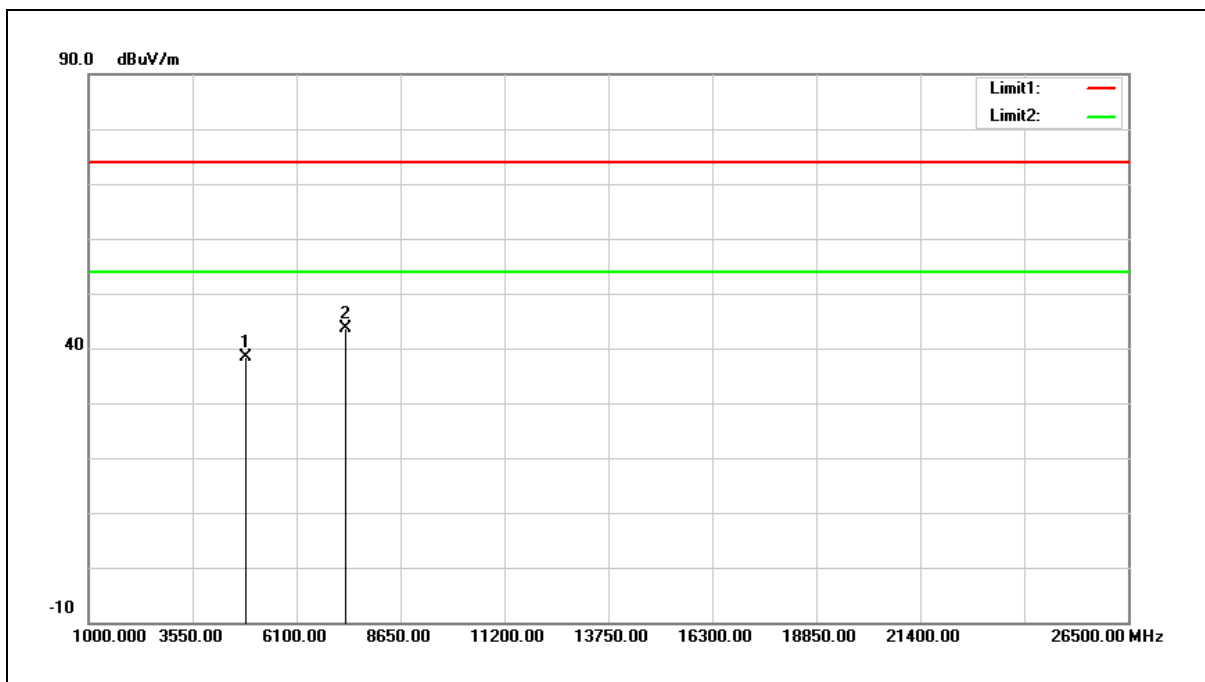


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 32.21             | 6.12                     | 38.33              | 74.00             | -35.67         | peak   |
| 2   | 7311.000           | 30.82             | 12.73                    | 43.55              | 74.00             | -30.45         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

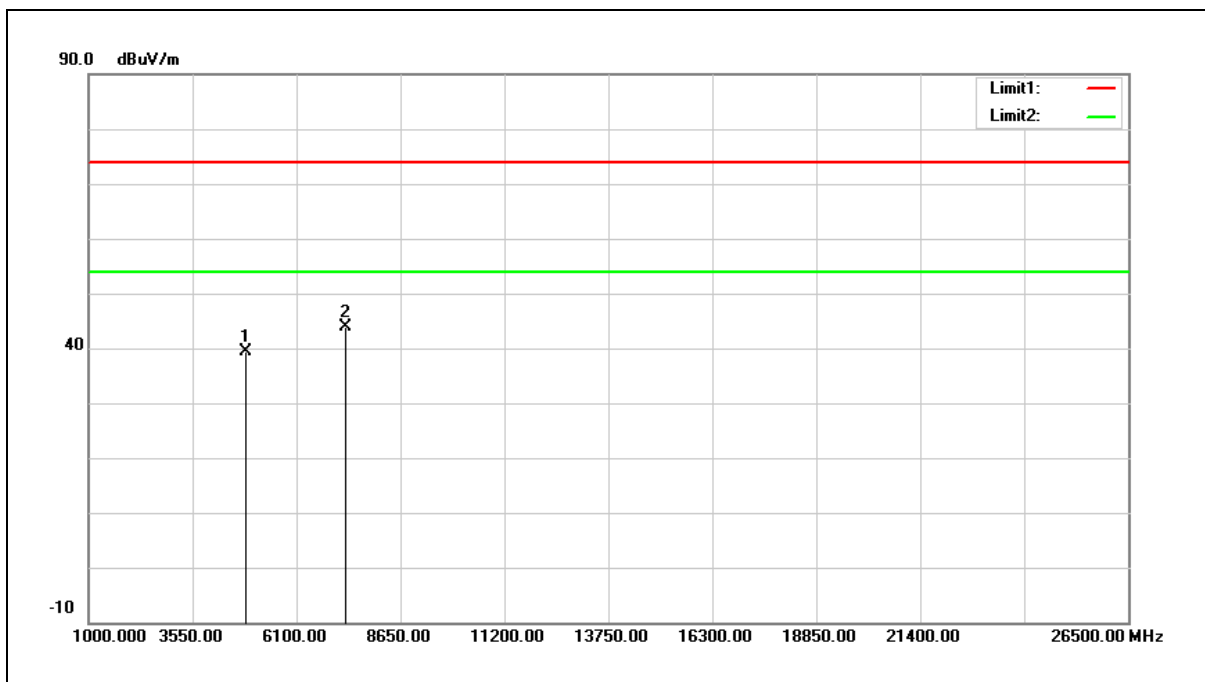


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 33.30             | 6.12                     | 39.42              | 74.00             | -34.58         | peak   |
| 2   | 7311.000           | 31.16             | 12.73                    | 43.89              | 74.00             | -30.11         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

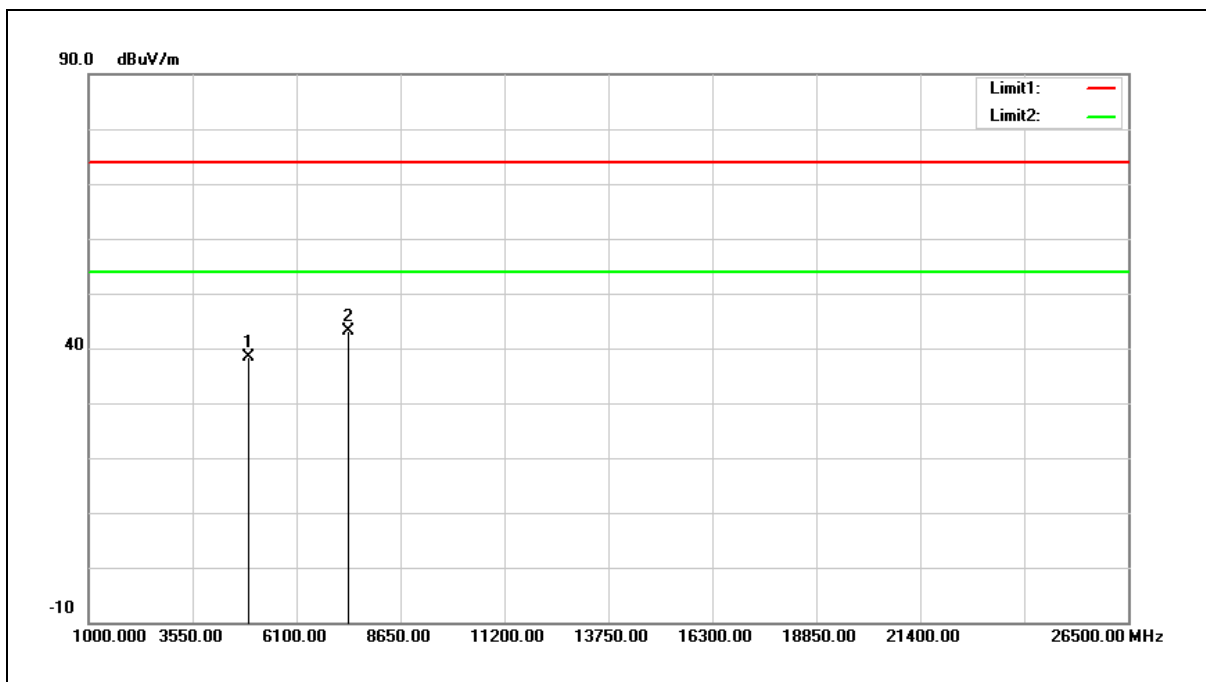

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4924.000        | 32.19          | 6.28                  | 38.47           | 74.00          | -35.53      | peak   |
| 2   | 7386.000        | 30.20          | 12.99                 | 43.19           | 74.00          | -30.81      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

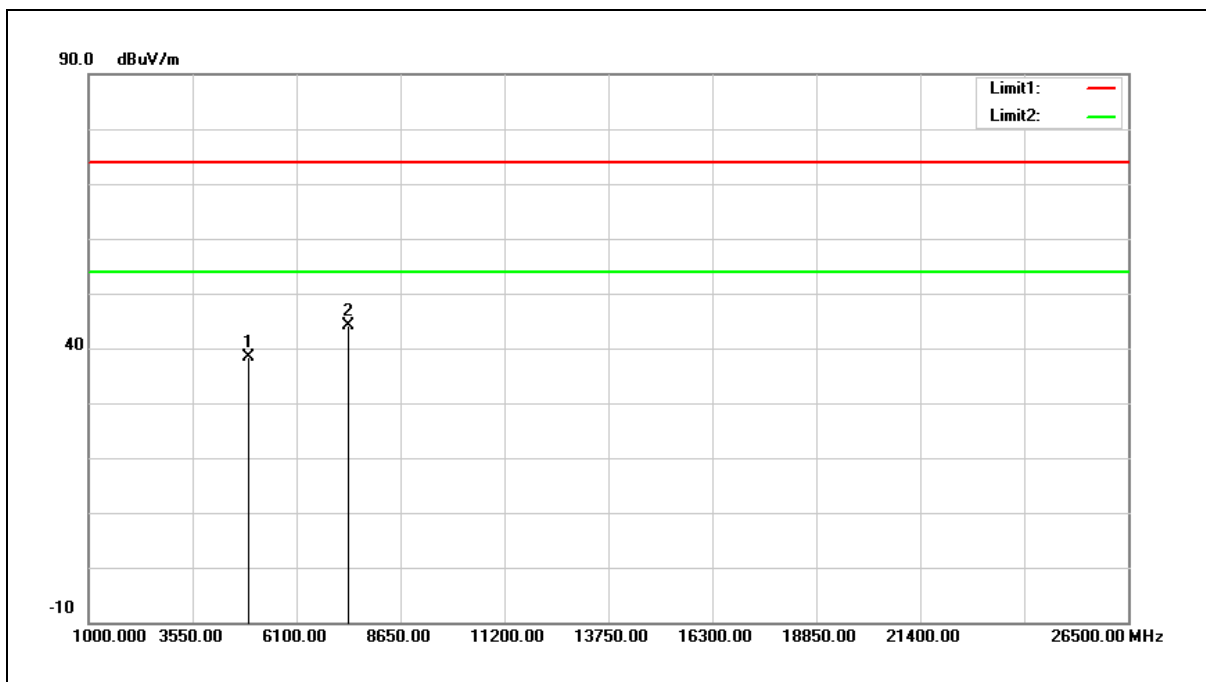


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4924.000        | 32.18          | 6.28                  | 38.46           | 74.00          | -35.54      | peak   |
| 2   | 7386.000        | 31.11          | 12.99                 | 44.10           | 74.00          | -29.90      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

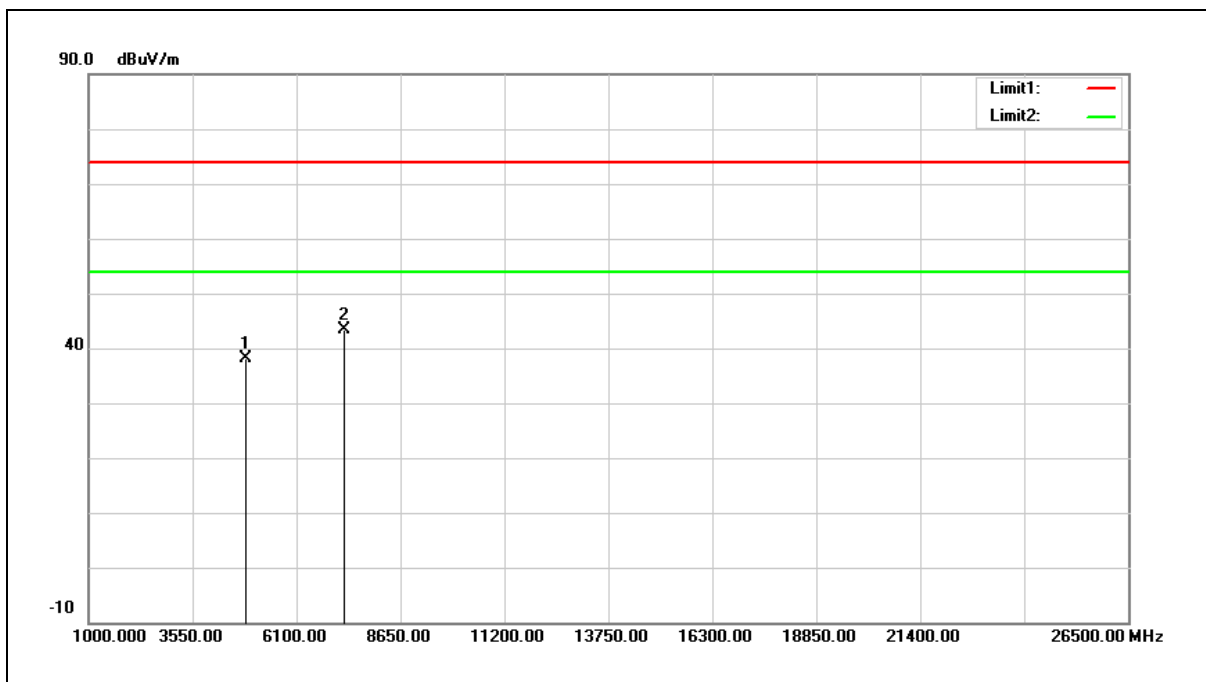


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4844.000           | 31.97             | 6.04                     | 38.01              | 74.00             | -35.99         | peak   |
| 2   | 7266.000           | 30.68             | 12.59                    | 43.27              | 74.00             | -30.73         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

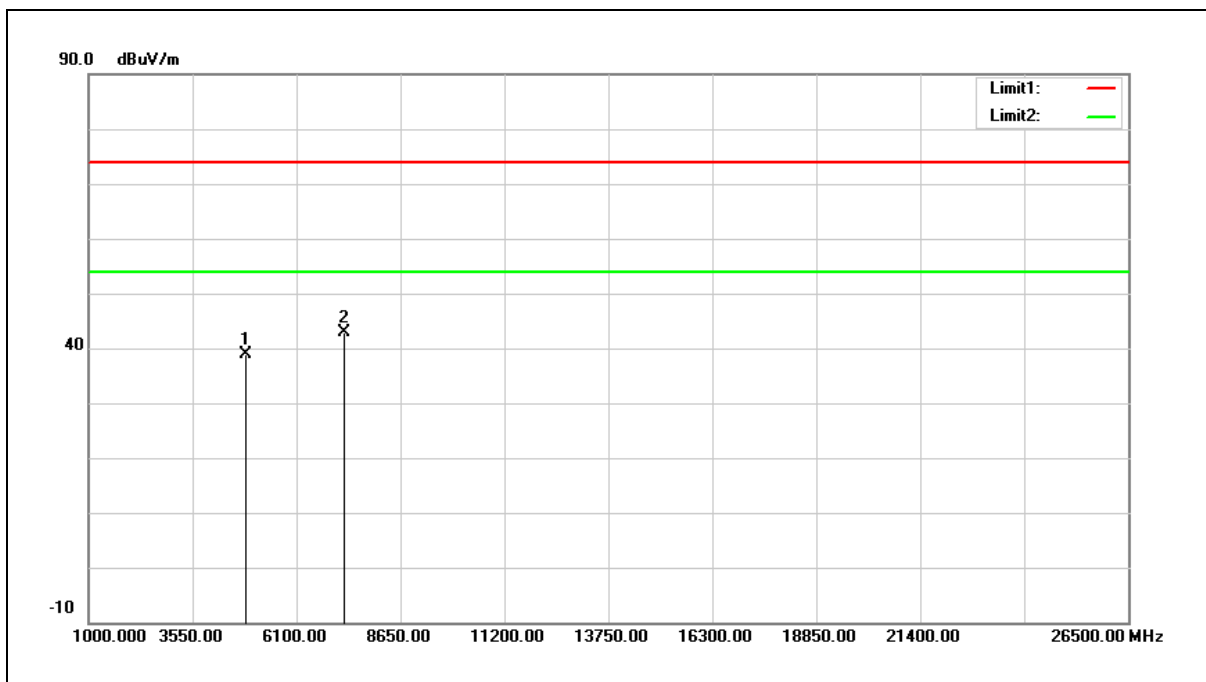

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4844.000           | 32.80             | 6.04                     | 38.84              | 74.00             | -35.16         | peak   |
| 2   | 7266.000           | 30.20             | 12.59                    | 42.79              | 74.00             | -31.21         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

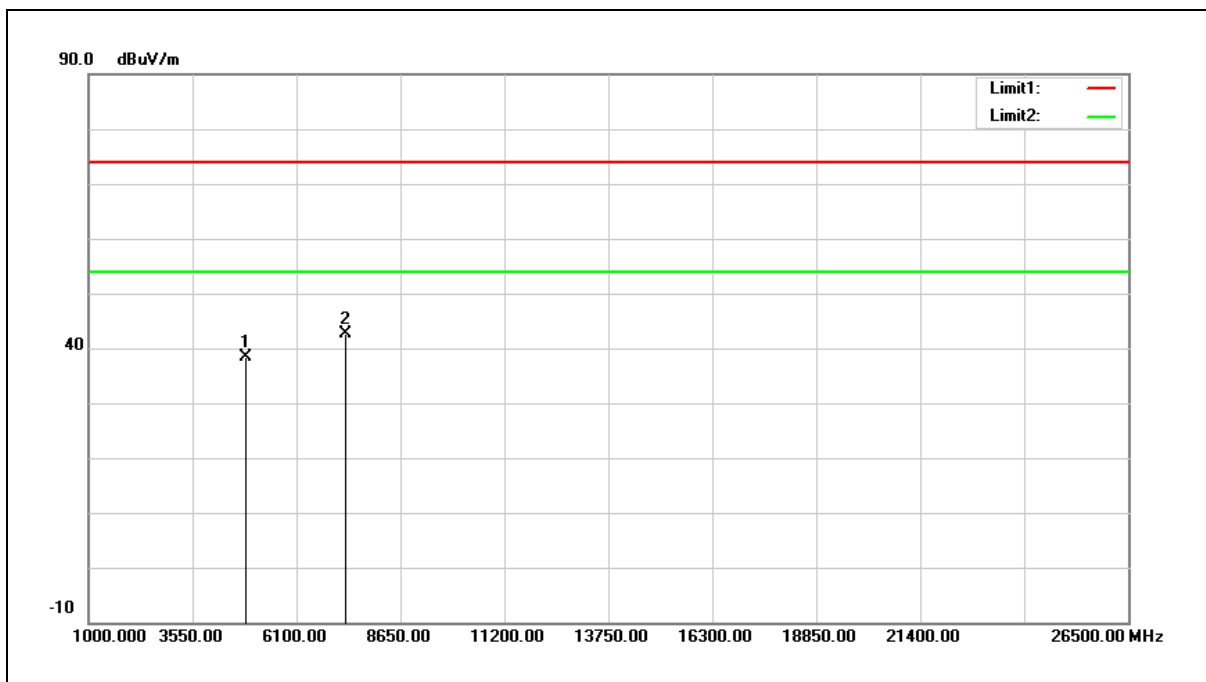

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4874.000        | 32.14          | 6.12                  | 38.26           | 74.00          | -35.74      | peak   |
| 2   | 7311.000        | 29.99          | 12.73                 | 42.72           | 74.00          | -31.28      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

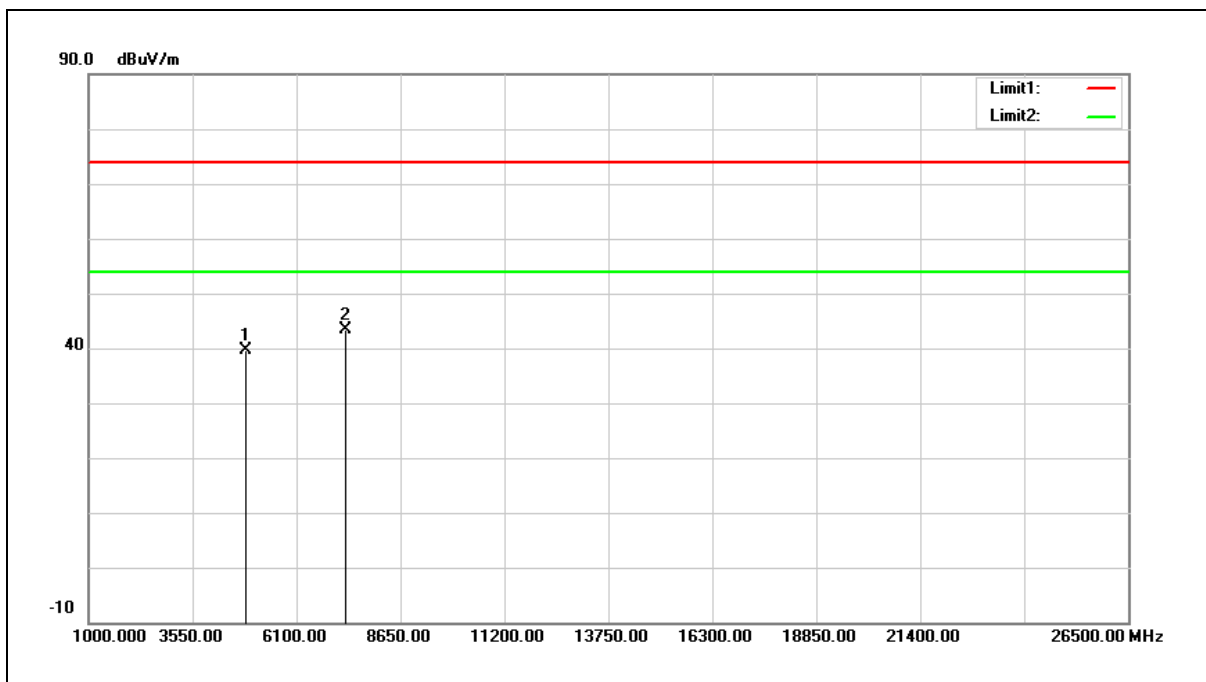

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4874.000        | 33.50          | 6.12                  | 39.62           | 74.00          | -34.38      | peak   |
| 2   | 7311.000        | 30.76          | 12.73                 | 43.49           | 74.00          | -30.51      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

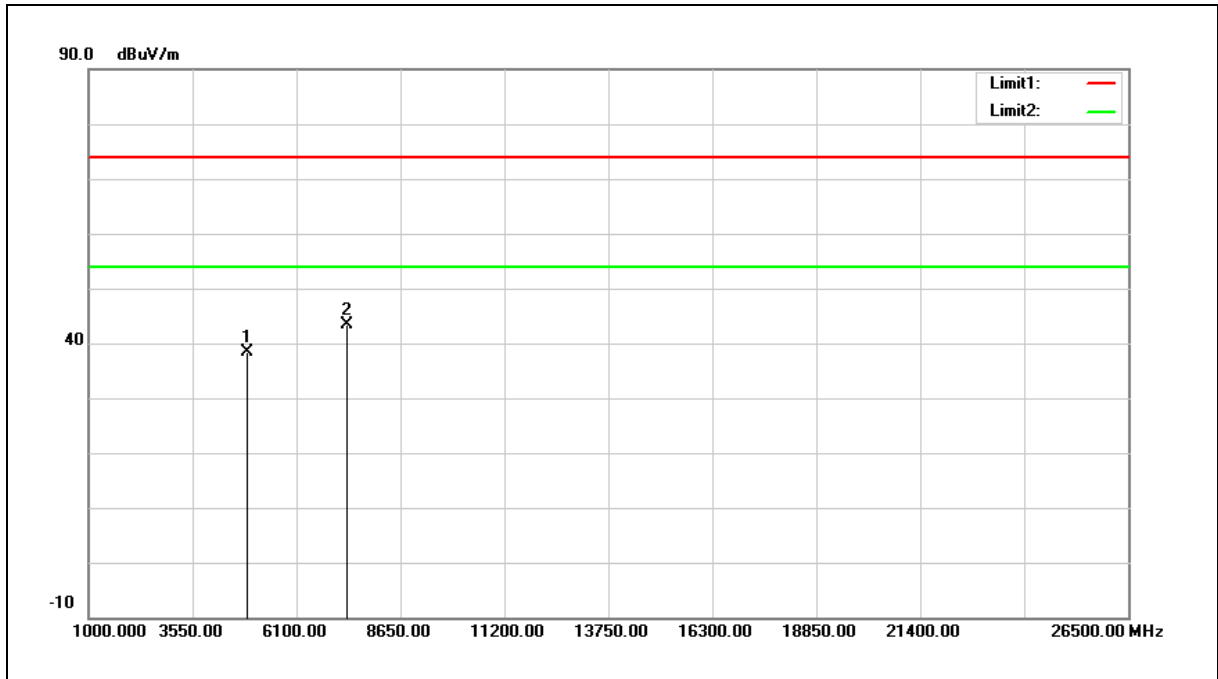

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4904.000           | 32.07             | 6.21                     | 38.28              | 74.00             | -35.72         | peak   |
| 2   | 7356.000           | 30.42             | 12.89                    | 43.31              | 74.00             | -30.69         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

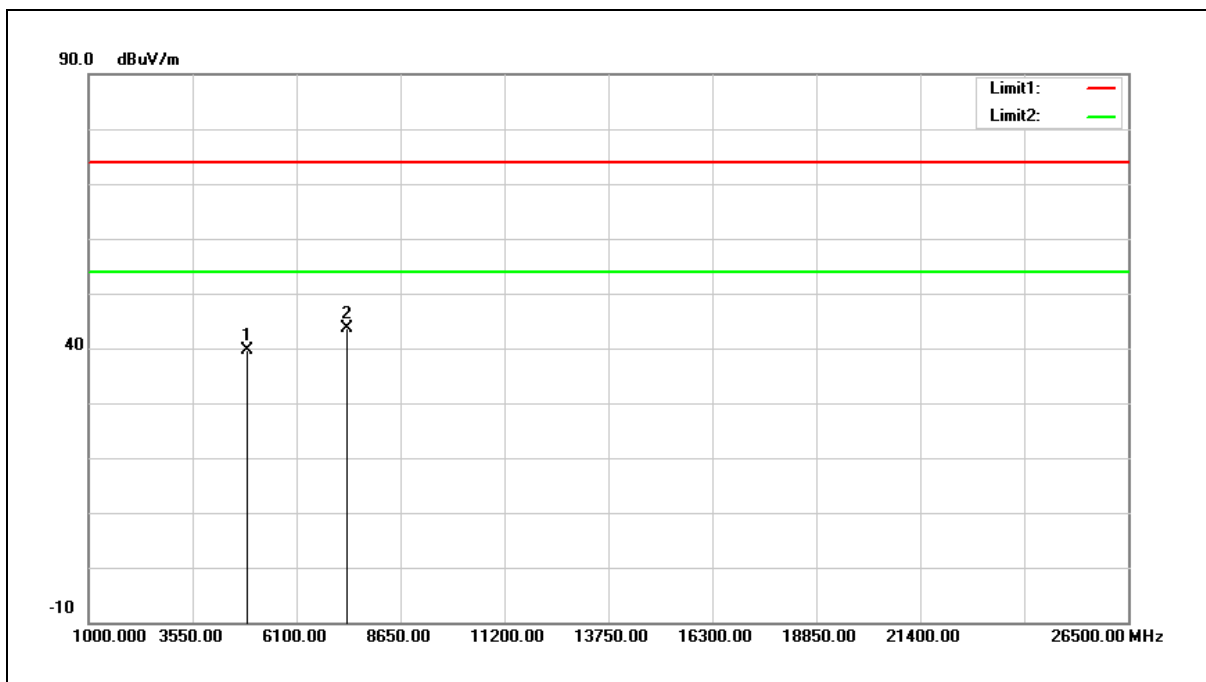

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4904.000        | 33.34          | 6.21                  | 39.55           | 74.00          | -34.45      | peak   |
| 2   | 7356.000        | 30.78          | 12.89                 | 43.67           | 74.00          | -30.33      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

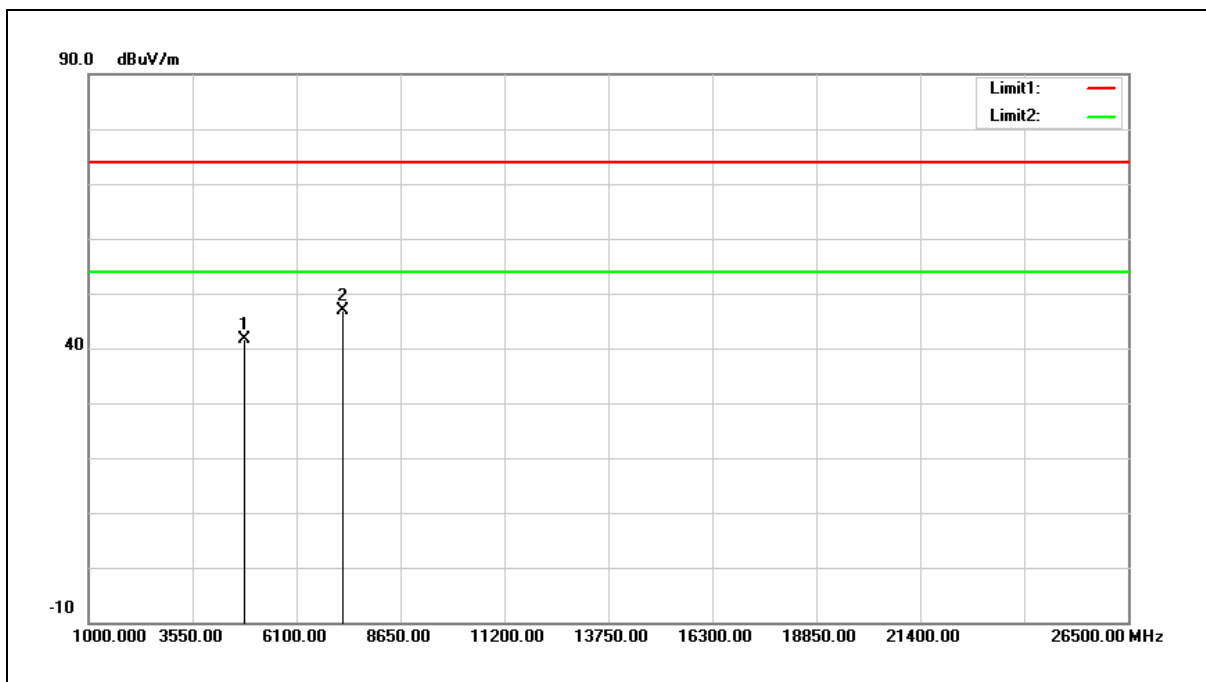

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4824.000        | 35.69          | 5.97                  | 41.66           | 74.00          | -32.34      | peak   |
| 2   | 7236.000        | 34.39          | 12.48                 | 46.87           | 74.00          | -27.13      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

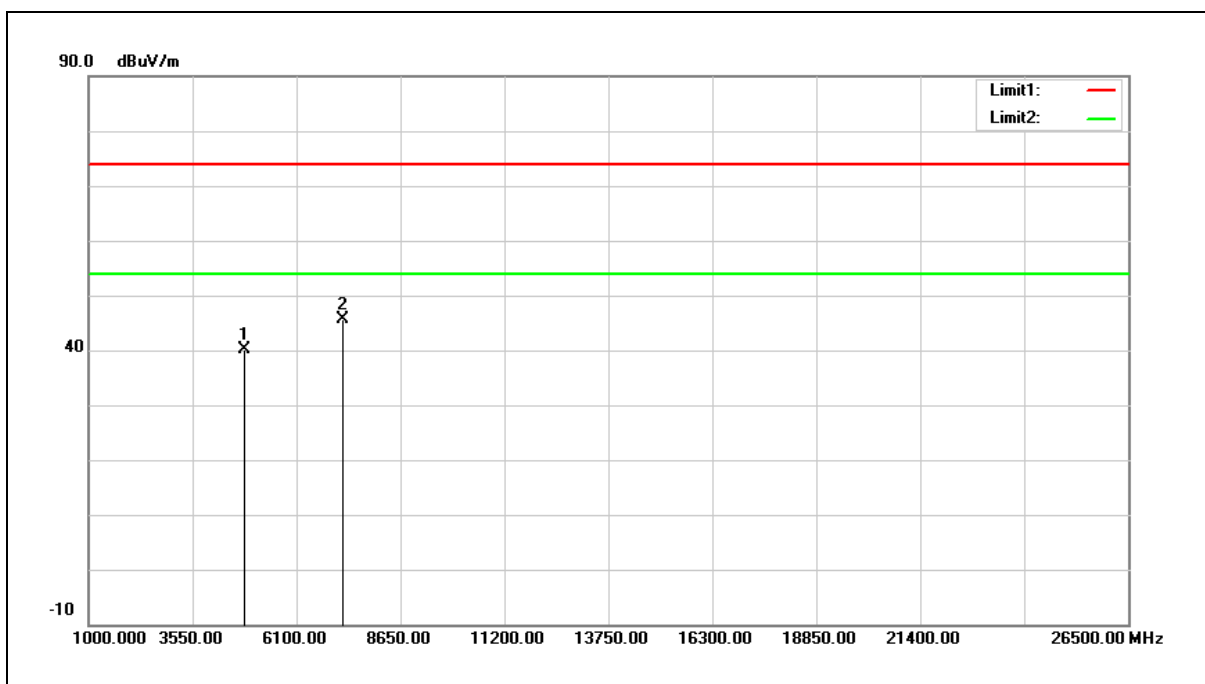

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4824.000        | 34.24          | 5.97                  | 40.21           | 74.00          | -33.79      | peak   |
| 2   | 7236.000        | 33.15          | 12.48                 | 45.63           | 74.00          | -28.37      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

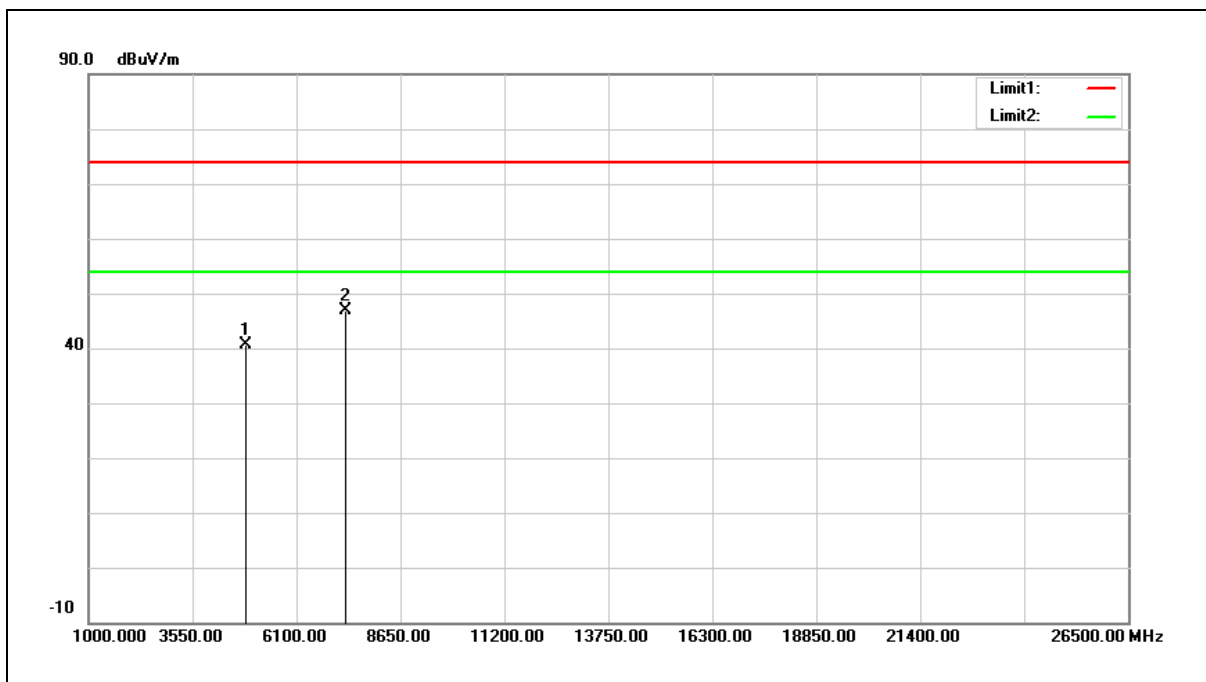


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 34.53             | 6.12                     | 40.65              | 74.00             | -33.35         | peak   |
| 2   | 7311.000           | 34.26             | 12.73                    | 46.99              | 74.00             | -27.01         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

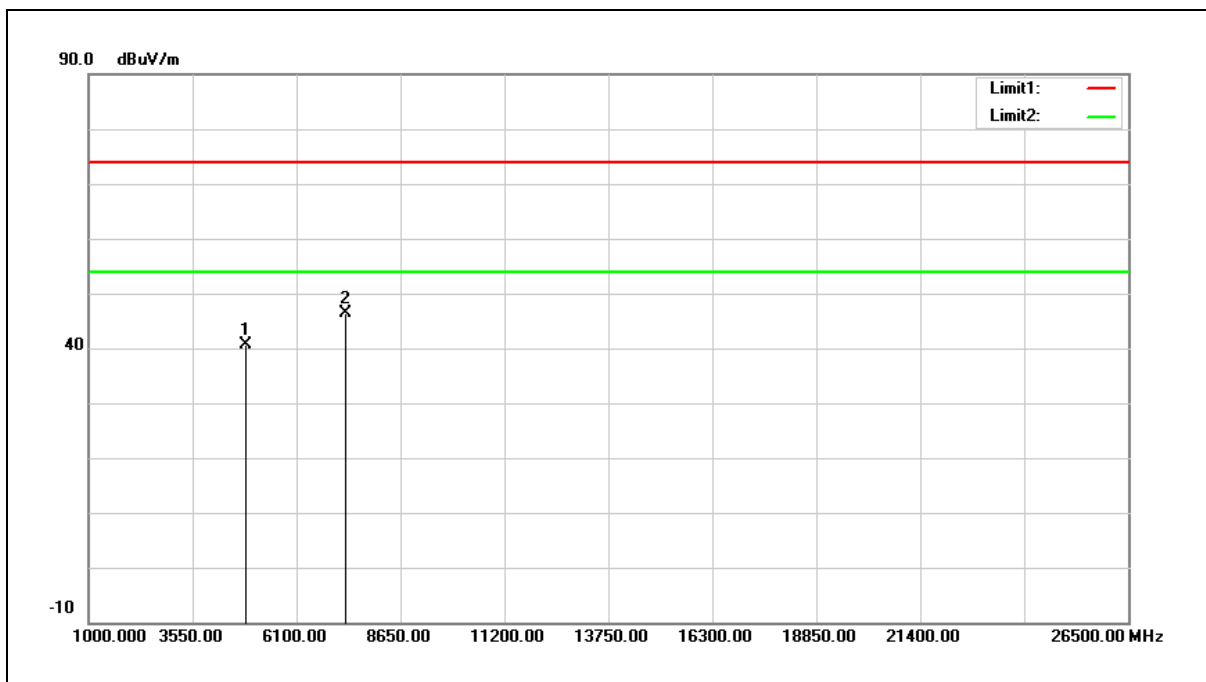

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 34.41             | 6.12                     | 40.53              | 74.00             | -33.47         | peak   |
| 2   | 7311.000           | 33.75             | 12.73                    | 46.48              | 74.00             | -27.52         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

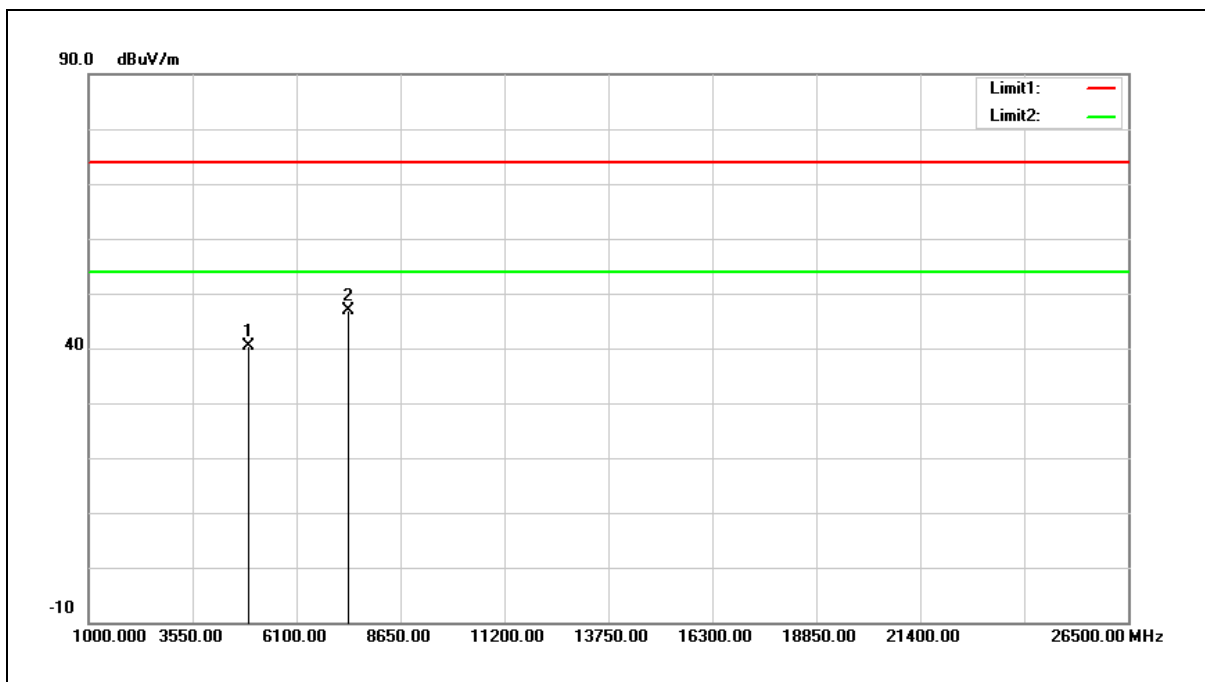


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4924.000           | 34.20             | 6.28                     | 40.48              | 74.00             | -33.52         | peak   |
| 2   | 7386.000           | 33.77             | 12.99                    | 46.76              | 74.00             | -27.24         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

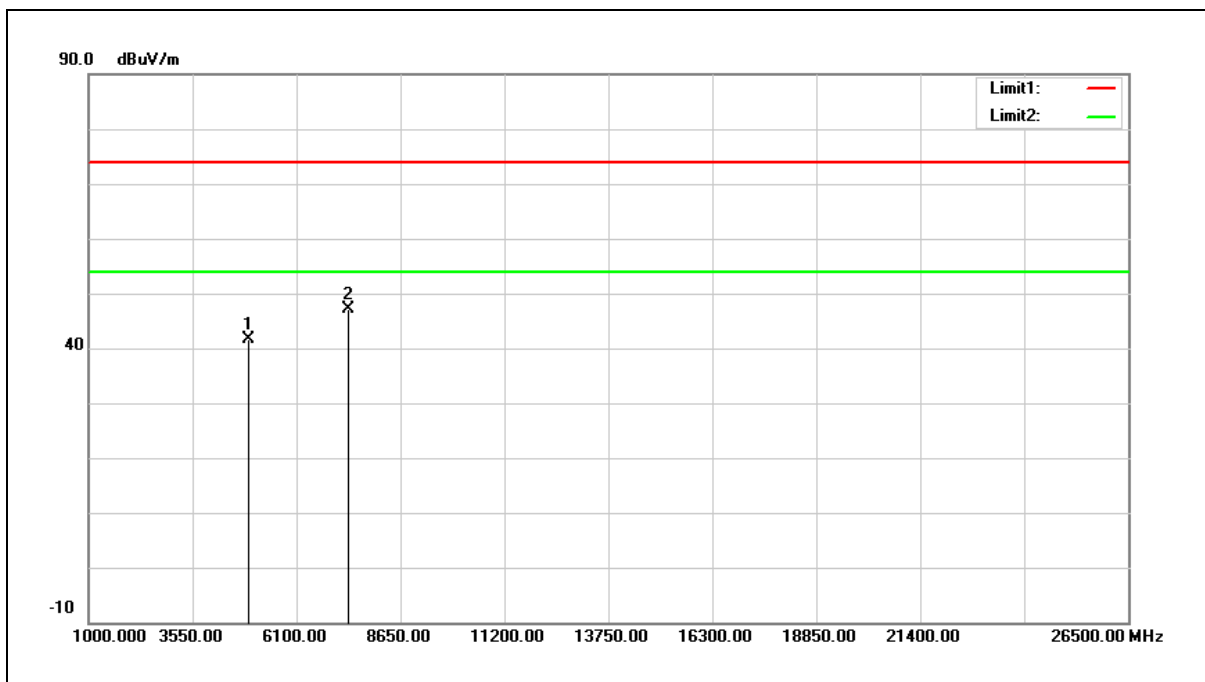

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4924.000        | 35.32          | 6.28                  | 41.60           | 74.00          | -32.40      | peak   |
| 2   | 7386.000        | 34.19          | 12.99                 | 47.18           | 74.00          | -26.82      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

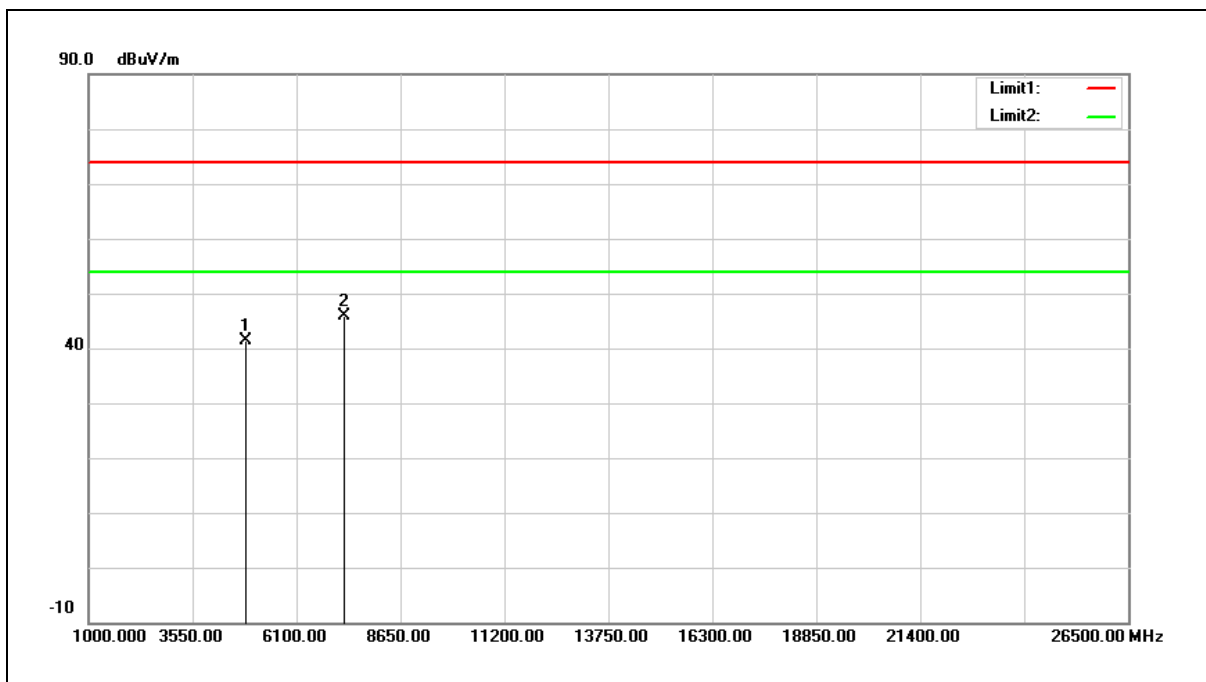

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4844.000        | 35.46          | 6.04                  | 41.50           | 74.00          | -32.50      | peak   |
| 2   | 7266.000        | 33.30          | 12.59                 | 45.89           | 74.00          | -28.11      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

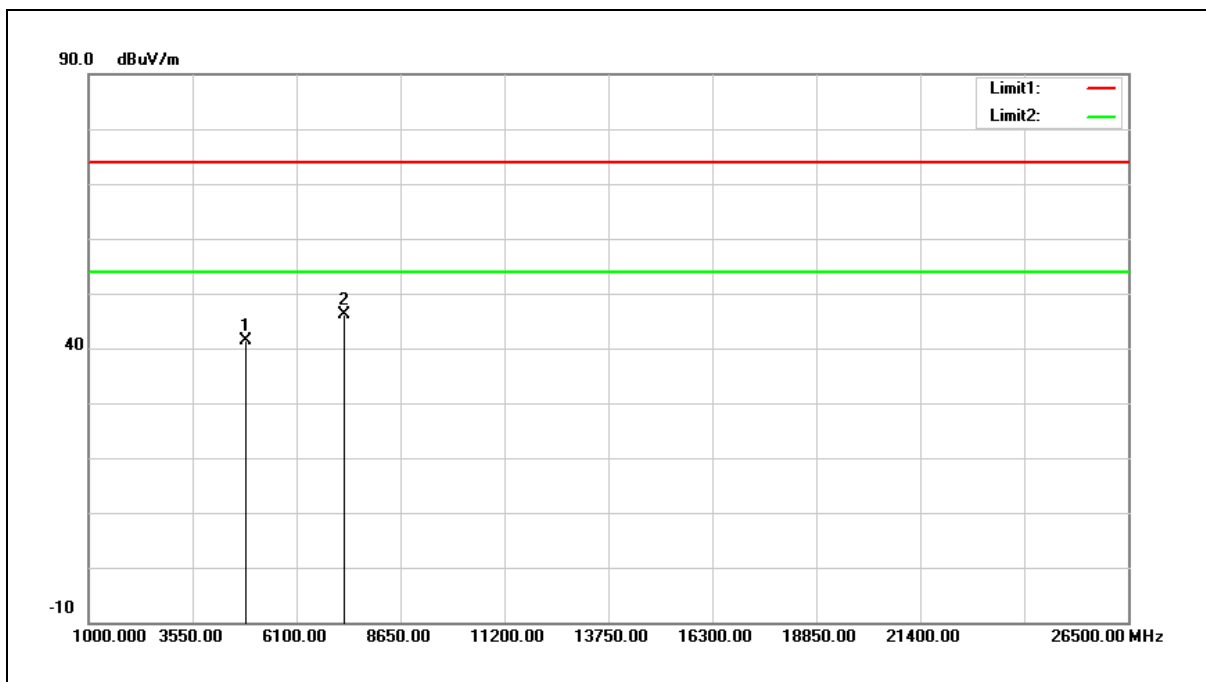

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4844.000           | 35.22             | 6.04                     | 41.26              | 74.00             | -32.74         | peak   |
| 2   | 7266.000           | 33.47             | 12.59                    | 46.06              | 74.00             | -27.94         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

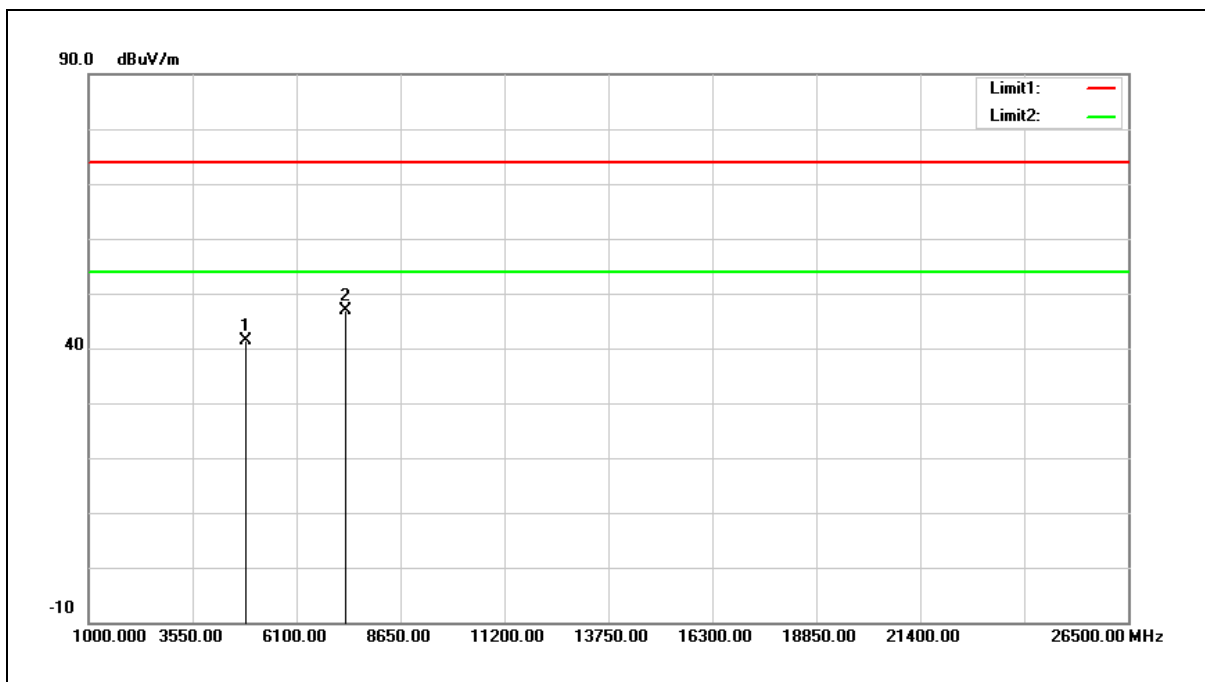

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 35.35             | 6.12                     | 41.47              | 74.00             | -32.53         | peak   |
| 2   | 7311.000           | 34.10             | 12.73                    | 46.83              | 74.00             | -27.17         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

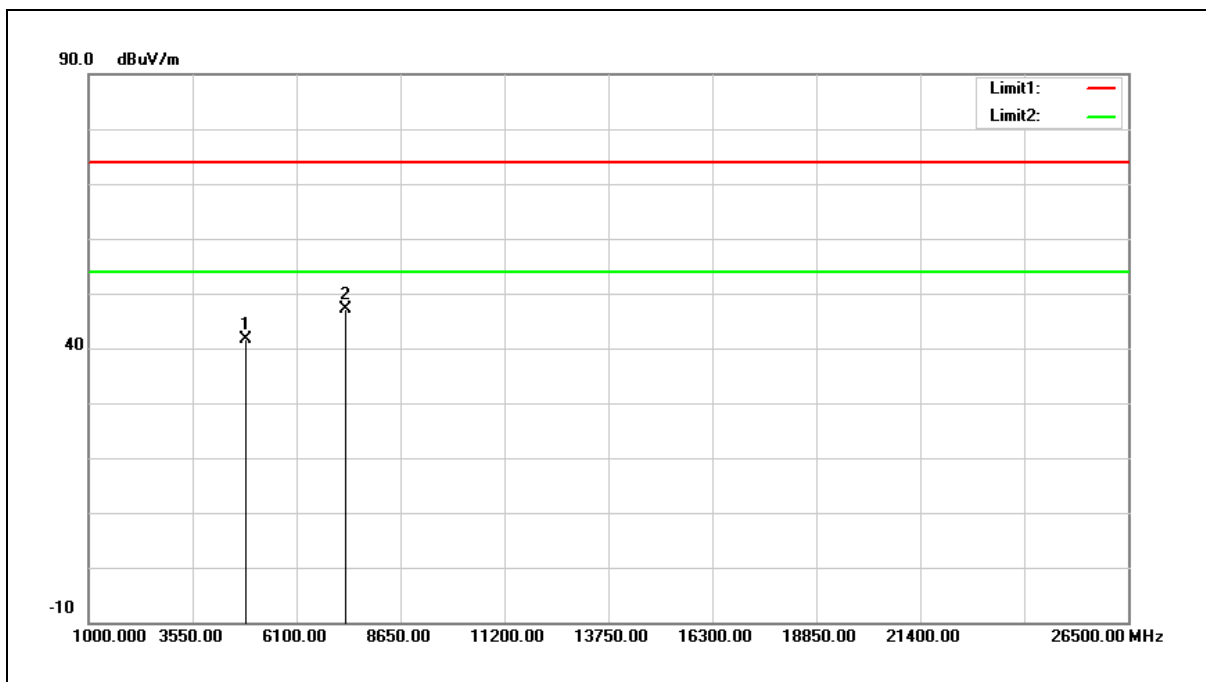

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4874.000        | 35.63          | 6.12                  | 41.75           | 74.00          | -32.25      | peak   |
| 2   | 7311.000        | 34.45          | 12.73                 | 47.18           | 74.00          | -26.82      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

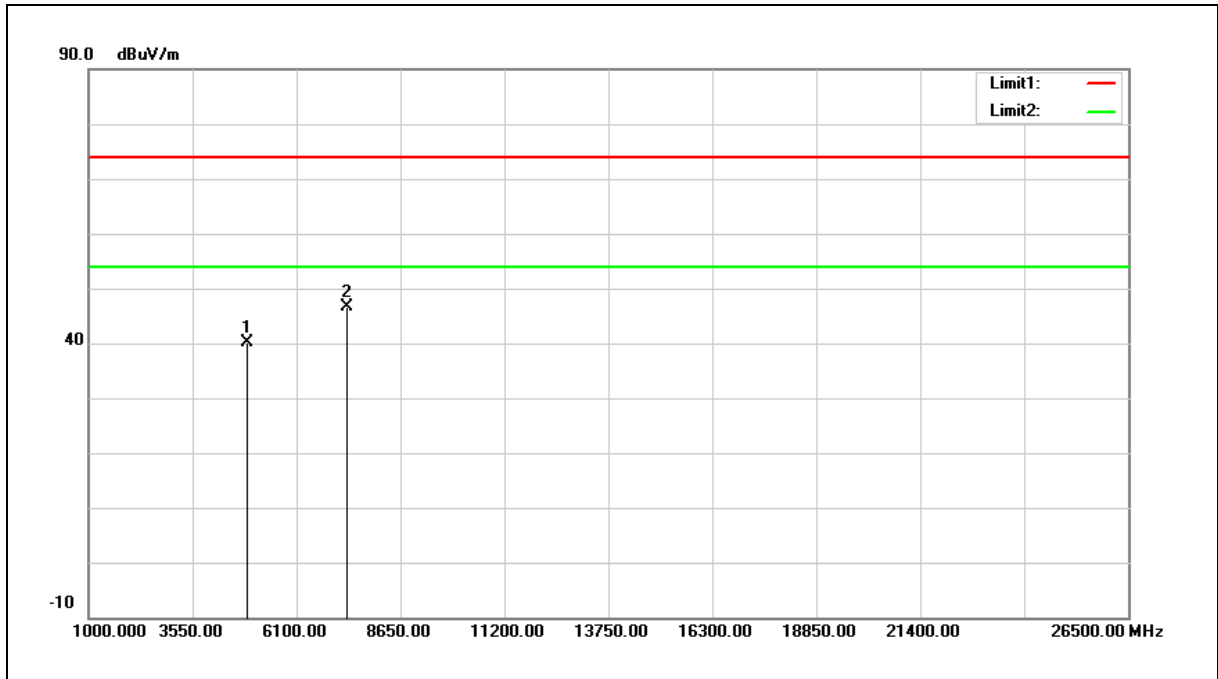

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4904.000        | 33.98          | 6.21                  | 40.19           | 74.00          | -33.81      | peak   |
| 2   | 7356.000        | 33.77          | 12.89                 | 46.66           | 74.00          | -27.34      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

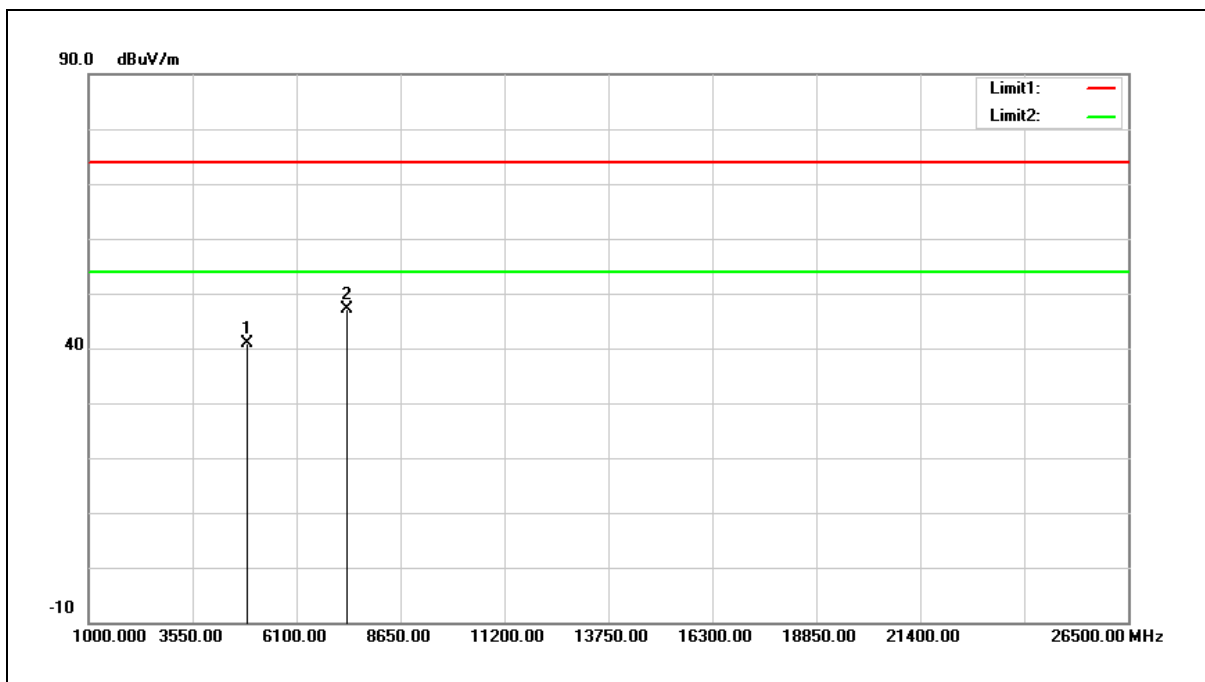


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4904.000        | 34.56          | 6.21                  | 40.77           | 74.00          | -33.23      | peak   |
| 2   | 7356.000        | 34.36          | 12.89                 | 47.25           | 74.00          | -26.75      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                           |                |    |
|-------------|---------------------------|----------------|----|
| Standard:   | FCC Part 15.247           | Test Distance: | 3m |
| Test item:  | Simultaneous Transmitting |                |    |
| Mode:       | 2.4 G + 5 G               |                |    |
| Ant.Polar.: | Horizontal                |                |    |

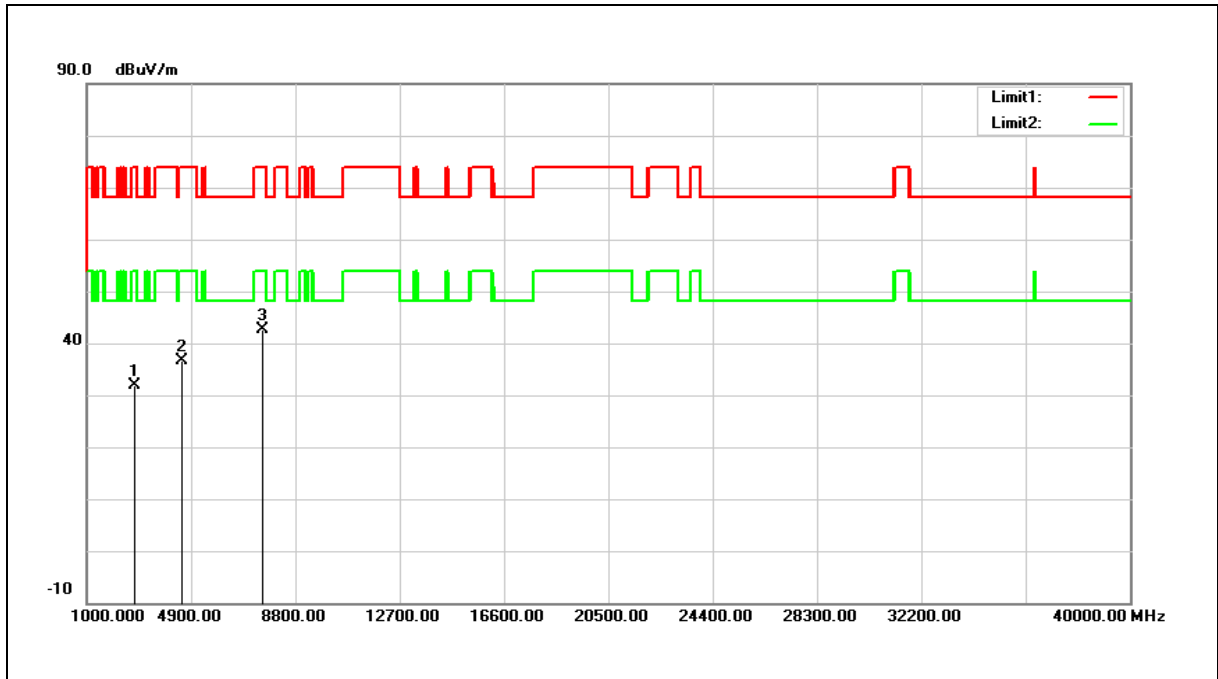


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2802.000           | 31.35             | 0.56                     | 31.91              | 74.00             | -42.09         | peak   |
| 2   | 4570.000           | 31.54             | 5.19                     | 36.73              | 74.00             | -37.27         | peak   |
| 3   | 7579.000           | 29.19             | 13.55                    | 42.74              | 74.00             | -31.26         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                           |                |    |
|-------------|---------------------------|----------------|----|
| Standard:   | FCC Part 15.247           | Test Distance: | 3m |
| Test item:  | Simultaneous Transmitting |                |    |
| Mode:       | 2.4 G + 5 G               |                |    |
| Ant.Polar.: | Vertical                  |                |    |

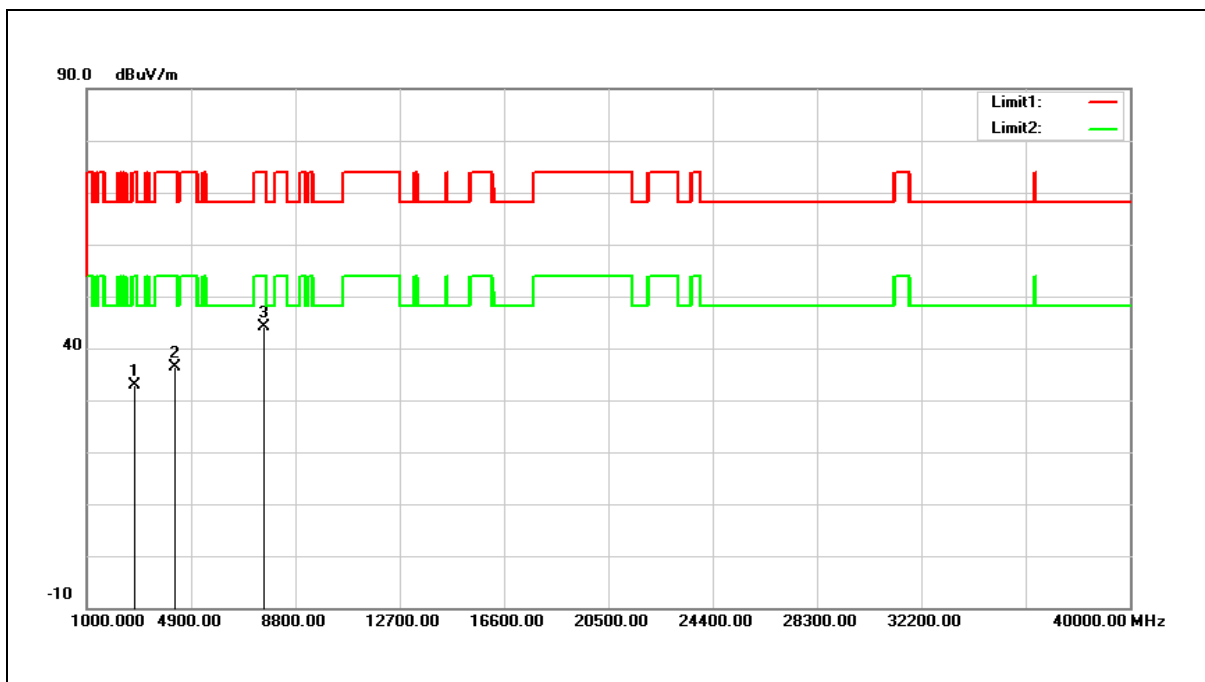

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2785.000           | 32.24             | 0.52                     | 32.76              | 74.00             | -41.24         | peak   |
| 2   | 4298.000           | 31.81             | 4.60                     | 36.41              | 74.00             | -37.59         | peak   |
| 3   | 7647.000           | 30.40             | 13.69                    | 44.09              | 74.00             | -29.91         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

## Band Edge

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

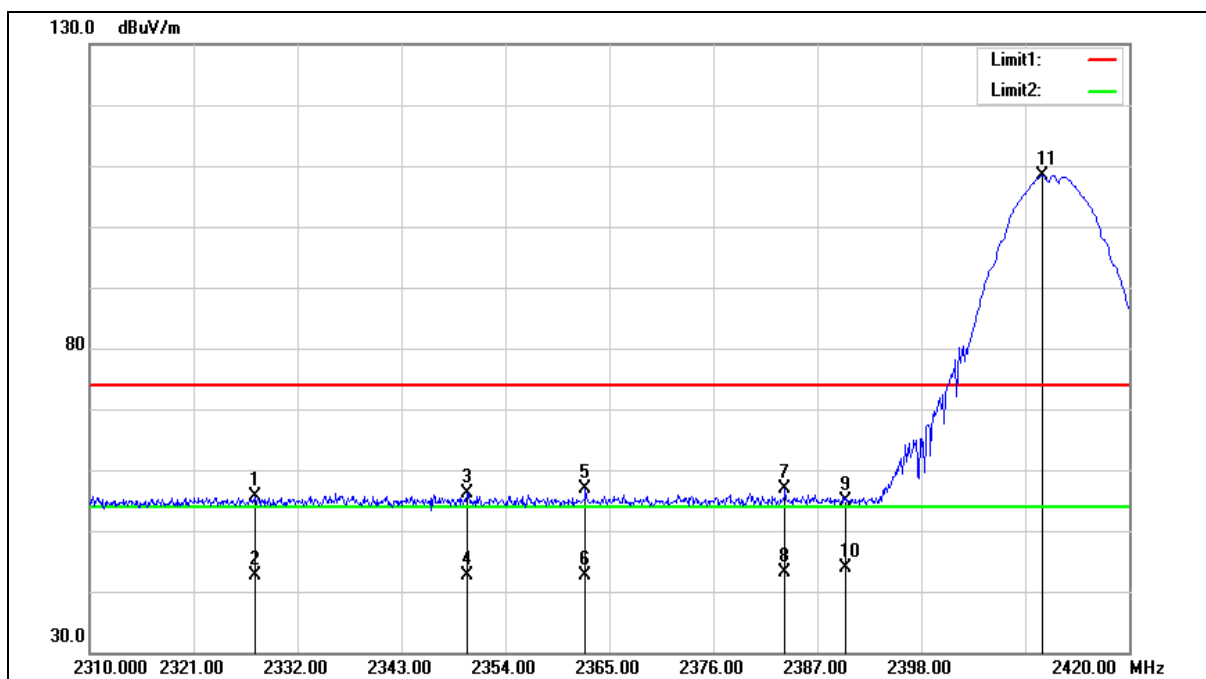


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2327.490        | 56.92          | -1.19                 | 55.73           | 74.00          | -18.27      | peak   |
| 2   | 2327.490        | 43.94          | -1.19                 | 42.75           | 54.00          | -11.25      | AVG    |
| 3   | 2349.930        | 57.29          | -1.07                 | 56.22           | 74.00          | -17.78      | peak   |
| 4   | 2349.930        | 43.78          | -1.07                 | 42.71           | 54.00          | -11.29      | AVG    |
| 5   | 2362.470        | 57.95          | -1.02                 | 56.93           | 74.00          | -17.07      | peak   |
| 6   | 2362.470        | 43.64          | -1.02                 | 42.62           | 54.00          | -11.38      | AVG    |
| 7   | 2383.590        | 57.90          | -0.91                 | 56.99           | 74.00          | -17.01      | peak   |
| 8   | 2383.590        | 43.92          | -0.91                 | 43.01           | 54.00          | -10.99      | AVG    |
| 9   | 2390.000        | 55.67          | -0.87                 | 54.80           | 74.00          | -19.20      | peak   |
| 10  | 2390.000        | 44.76          | -0.87                 | 43.89           | 54.00          | -10.11      | AVG    |
| 11  | 2410.870        | 109.16         | -0.76                 | 108.40          | --             | --          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Vertical        |                |    |

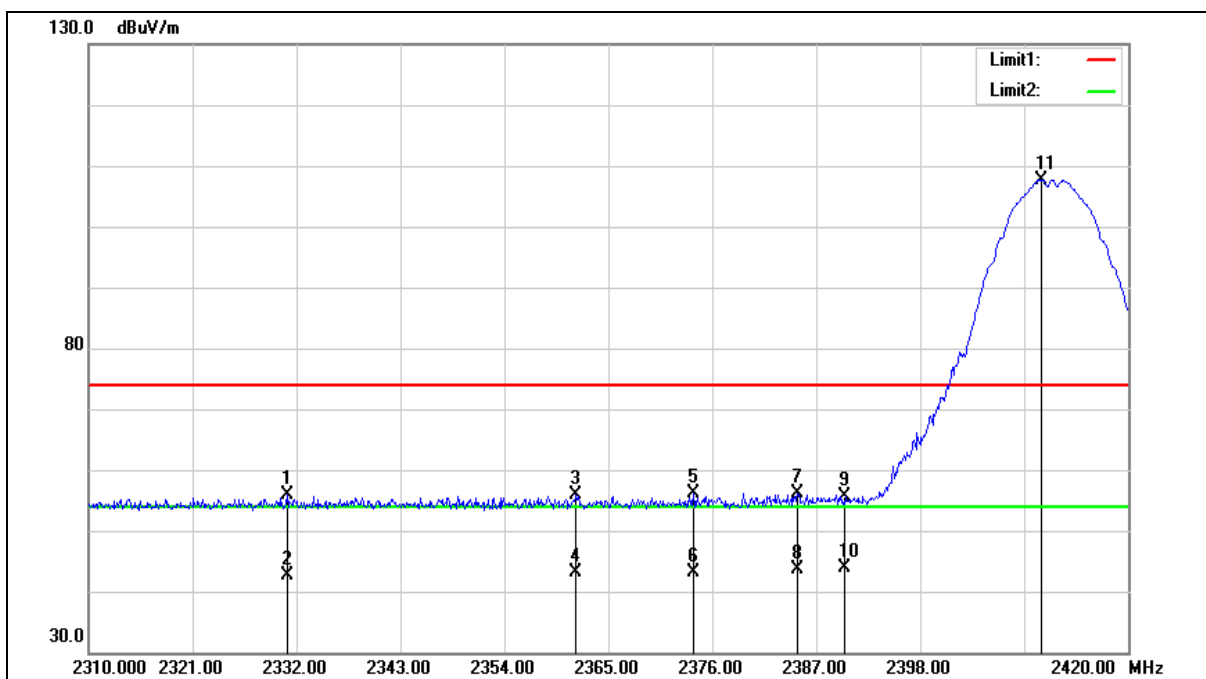


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2331.010        | 56.99          | -1.16                 | 55.83           | 74.00          | -18.17      | peak   |
| 2   | 2331.010        | 43.83          | -1.16                 | 42.67           | 54.00          | -11.33      | AVG    |
| 3   | 2361.590        | 56.78          | -1.02                 | 55.76           | 74.00          | -18.24      | peak   |
| 4   | 2361.590        | 44.04          | -1.02                 | 43.02           | 54.00          | -10.98      | AVG    |
| 5   | 2374.020        | 57.01          | -0.96                 | 56.05           | 74.00          | -17.95      | peak   |
| 6   | 2374.020        | 44.09          | -0.96                 | 43.13           | 54.00          | -10.87      | AVG    |
| 7   | 2385.020        | 56.97          | -0.90                 | 56.07           | 74.00          | -17.93      | peak   |
| 8   | 2385.020        | 44.49          | -0.90                 | 43.59           | 54.00          | -10.41      | AVG    |
| 9   | 2390.000        | 56.38          | -0.87                 | 55.51           | 74.00          | -18.49      | peak   |
| 10  | 2390.000        | 44.79          | -0.87                 | 43.92           | 54.00          | -10.08      | AVG    |
| 11  | 2410.870        | 108.47         | -0.76                 | 107.71          | --             | --          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

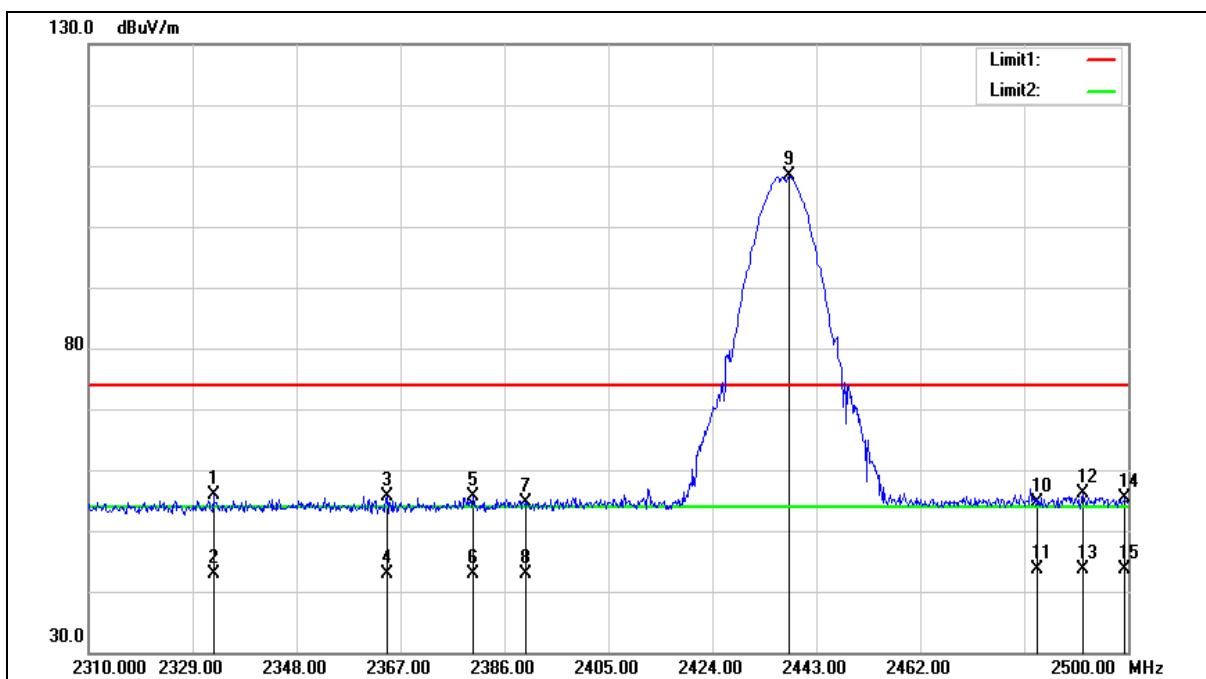

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2332.800        | 56.93          | -1.16                 | 55.77           | 74.00          | -18.23      | peak   |
| 2   | 2332.800        | 43.96          | -1.16                 | 42.80           | 54.00          | -11.20      | AVG    |
| 3   | 2364.530        | 56.65          | -1.00                 | 55.65           | 74.00          | -18.35      | peak   |
| 4   | 2364.530        | 43.86          | -1.00                 | 42.86           | 54.00          | -11.14      | AVG    |
| 5   | 2380.300        | 56.62          | -0.93                 | 55.69           | 74.00          | -18.31      | peak   |
| 6   | 2380.300        | 43.83          | -0.93                 | 42.90           | 54.00          | -11.10      | AVG    |
| 7   | 2390.000        | 55.43          | -0.87                 | 54.56           | 74.00          | -19.44      | peak   |
| 8   | 2390.000        | 43.84          | -0.87                 | 42.97           | 54.00          | -11.03      | AVG    |
| 9   | 2438.060        | 108.92         | -0.63                 | 108.29          | --             | --          | peak   |
| 10  | 2483.500        | 54.94          | -0.40                 | 54.54           | 74.00          | -19.46      | peak   |
| 11  | 2483.500        | 43.91          | -0.40                 | 43.51           | 54.00          | -10.49      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2491.640           | 56.59             | -0.35                    | 56.24              | 74.00             | -17.76         | peak   |
| 13  | 2491.640           | 43.96             | -0.35                    | 43.61              | 54.00             | -10.39         | AVG    |
| 14  | 2499.430           | 55.65             | -0.31                    | 55.34              | 74.00             | -18.66         | peak   |
| 15  | 2499.430           | 44.06             | -0.31                    | 43.75              | 54.00             | -10.25         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Vertical        |                |    |

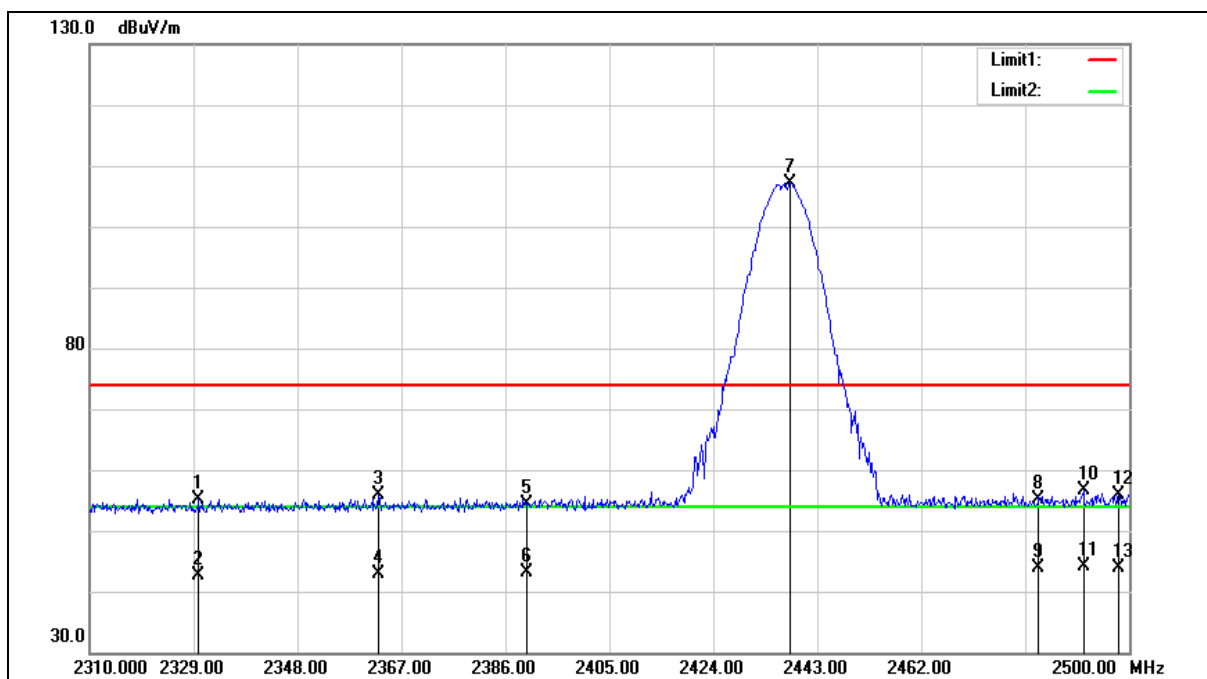

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2329.950        | 56.37          | -1.17                 | 55.20           | 74.00          | -18.80      | peak   |
| 2   | 2329.950        | 43.81          | -1.17                 | 42.64           | 54.00          | -11.36      | AVG    |
| 3   | 2362.820        | 56.89          | -1.02                 | 55.87           | 74.00          | -18.13      | peak   |
| 4   | 2362.820        | 43.93          | -1.02                 | 42.91           | 54.00          | -11.09      | AVG    |
| 5   | 2390.000        | 55.27          | -0.87                 | 54.40           | 74.00          | -19.60      | peak   |
| 6   | 2390.000        | 44.10          | -0.87                 | 43.23           | 54.00          | -10.77      | AVG    |
| 7   | 2438.060        | 107.78         | -0.63                 | 107.15          | --             | --          | peak   |
| 8   | 2483.500        | 55.48          | -0.40                 | 55.08           | 74.00          | -18.92      | peak   |
| 9   | 2483.500        | 44.18          | -0.40                 | 43.78           | 54.00          | -10.22      | AVG    |
| 10  | 2491.640        | 56.99          | -0.35                 | 56.64           | 74.00          | -17.36      | peak   |
| 11  | 2491.640        | 44.38          | -0.35                 | 44.03           | 54.00          | -9.97       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2498.100           | 56.15             | -0.32                    | 55.83              | 74.00             | -18.17         | peak   |
| 13  | 2498.100           | 44.13             | -0.32                    | 43.81              | 54.00             | -10.19         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

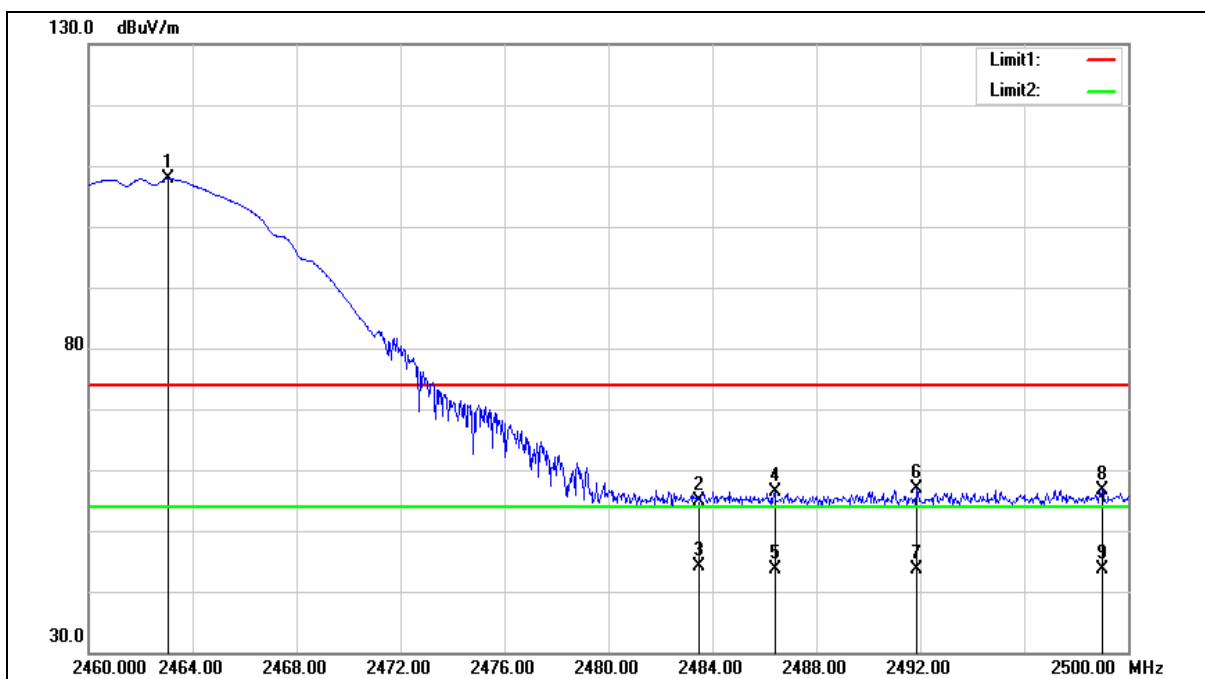


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2463.080        | 108.32         | -0.50                 | 107.82          | --             | --          | peak   |
| 2   | 2483.500        | 55.40          | -0.40                 | 55.00           | 74.00          | -19.00      | peak   |
| 3   | 2483.500        | 44.50          | -0.40                 | 44.10           | 54.00          | -9.90       | AVG    |
| 4   | 2486.400        | 56.71          | -0.38                 | 56.33           | 74.00          | -17.67      | peak   |
| 5   | 2486.400        | 43.93          | -0.38                 | 43.55           | 54.00          | -10.45      | AVG    |
| 6   | 2491.880        | 57.27          | -0.35                 | 56.92           | 74.00          | -17.08      | peak   |
| 7   | 2491.880        | 43.93          | -0.35                 | 43.58           | 54.00          | -10.42      | AVG    |
| 8   | 2499.000        | 57.05          | -0.31                 | 56.74           | 74.00          | -17.26      | peak   |
| 9   | 2499.000        | 44.01          | -0.31                 | 43.70           | 54.00          | -10.30      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 2          |                |    |
| Ant.Polar.: | Vertical        |                |    |

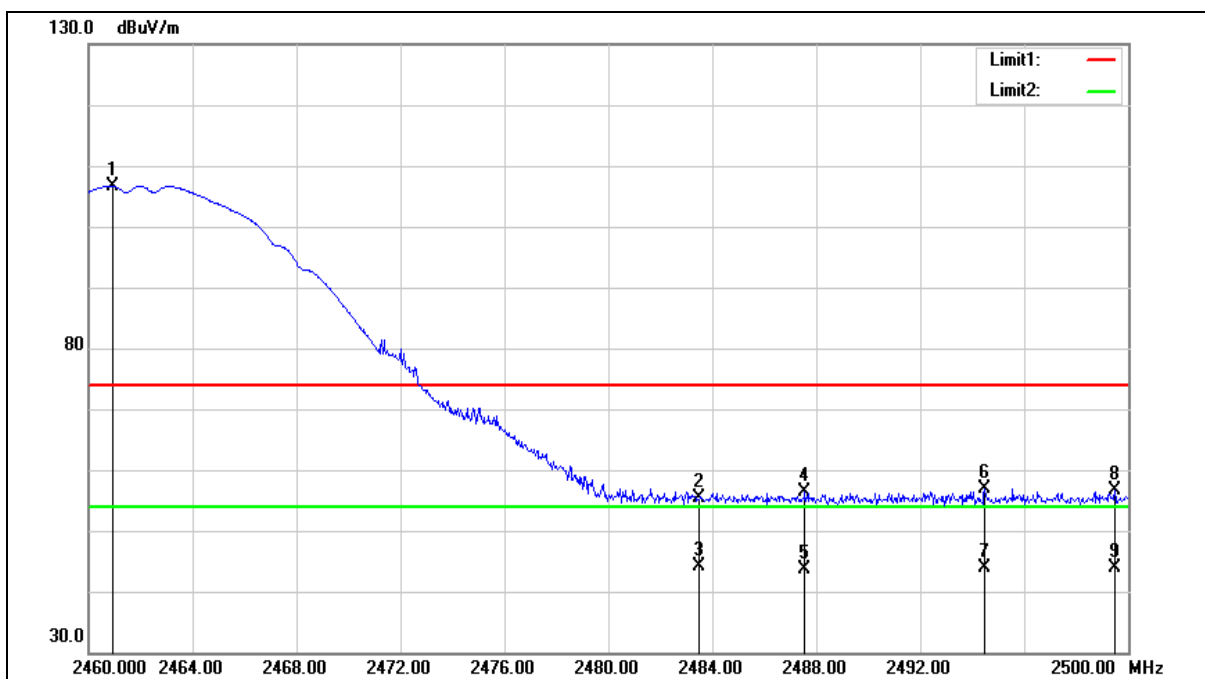


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2460.920        | 107.18         | -0.51                 | 106.67          | --             | --          | peak   |
| 2   | 2483.500        | 55.66          | -0.40                 | 55.26           | 74.00          | -18.74      | peak   |
| 3   | 2483.500        | 44.61          | -0.40                 | 44.21           | 54.00          | -9.79       | AVG    |
| 4   | 2487.560        | 56.82          | -0.37                 | 56.45           | 74.00          | -17.55      | peak   |
| 5   | 2487.560        | 44.01          | -0.37                 | 43.64           | 54.00          | -10.36      | AVG    |
| 6   | 2494.480        | 57.18          | -0.34                 | 56.84           | 74.00          | -17.16      | peak   |
| 7   | 2494.480        | 44.10          | -0.34                 | 43.76           | 54.00          | -10.24      | AVG    |
| 8   | 2499.480        | 56.83          | -0.31                 | 56.52           | 74.00          | -17.48      | peak   |
| 9   | 2499.480        | 44.21          | -0.31                 | 43.90           | 54.00          | -10.10      | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

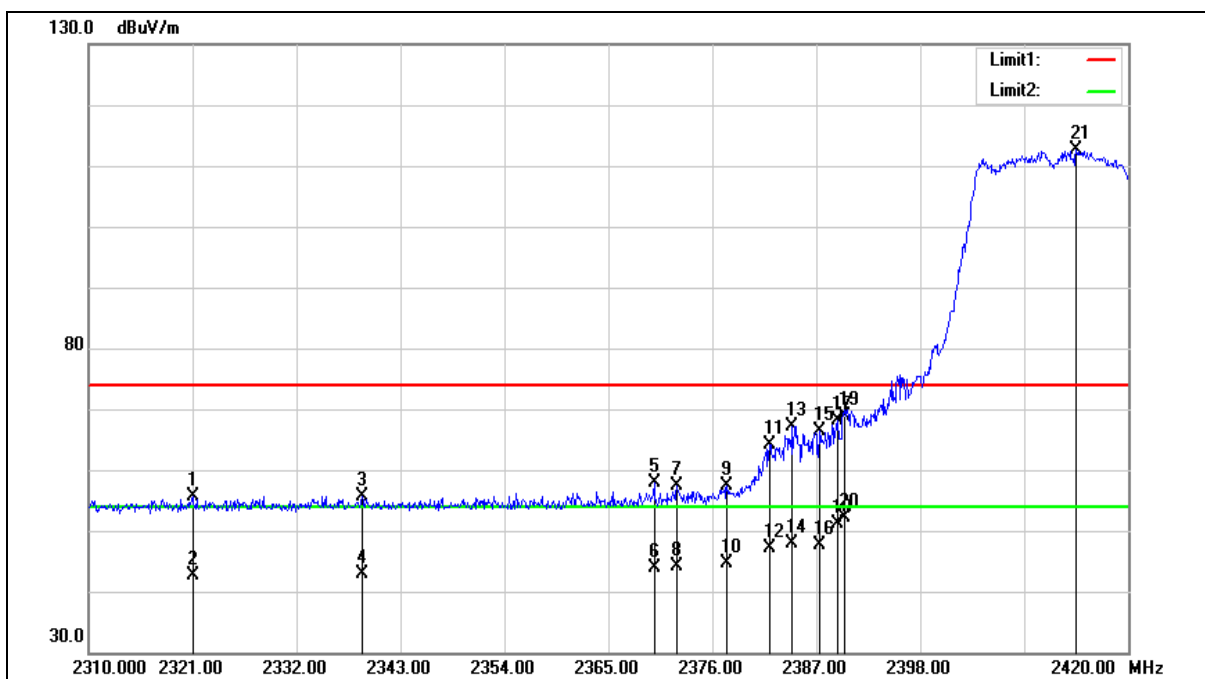

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2321.000        | 56.84          | -1.22                 | 55.62           | 74.00          | -18.38      | peak   |
| 2   | 2321.000        | 43.81          | -1.22                 | 42.59           | 54.00          | -11.41      | AVG    |
| 3   | 2338.930        | 56.73          | -1.13                 | 55.60           | 74.00          | -18.40      | peak   |
| 4   | 2338.930        | 43.93          | -1.13                 | 42.80           | 54.00          | -11.20      | AVG    |
| 5   | 2369.840        | 58.73          | -0.97                 | 57.76           | 74.00          | -16.24      | peak   |
| 6   | 2369.840        | 44.80          | -0.97                 | 43.83           | 54.00          | -10.17      | AVG    |
| 7   | 2372.260        | 58.22          | -0.96                 | 57.26           | 74.00          | -16.74      | peak   |
| 8   | 2372.260        | 44.97          | -0.96                 | 44.01           | 54.00          | -9.99       | AVG    |
| 9   | 2377.540        | 58.35          | -0.94                 | 57.41           | 74.00          | -16.59      | peak   |
| 10  | 2377.540        | 45.63          | -0.94                 | 44.69           | 54.00          | -9.31       | AVG    |
| 11  | 2382.050        | 65.00          | -0.91                 | 64.09           | 74.00          | -9.91       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2382.050           | 47.94             | -0.91                    | 47.03              | 54.00             | -6.97          | AVG    |
| 13  | 2384.470           | 68.09             | -0.90                    | 67.19              | 74.00             | -6.81          | peak   |
| 14  | 2384.470           | 48.71             | -0.90                    | 47.81              | 54.00             | -6.19          | AVG    |
| 15  | 2387.330           | 67.32             | -0.88                    | 66.44              | 74.00             | -7.56          | peak   |
| 16  | 2387.330           | 48.56             | -0.88                    | 47.68              | 54.00             | -6.32          | AVG    |
| 17  | 2389.200           | 68.94             | -0.88                    | 68.06              | 74.00             | -5.94          | peak   |
| 18  | 2389.200           | 52.06             | -0.88                    | 51.18              | 54.00             | -2.82          | AVG    |
| 19  | 2390.000           | 69.73             | -0.87                    | 68.86              | 74.00             | -5.14          | peak   |
| 20  | 2390.000           | 53.09             | -0.87                    | 52.22              | 54.00             | -1.78          | AVG    |
| 21  | 2414.500           | 113.40            | -0.75                    | 112.65             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |

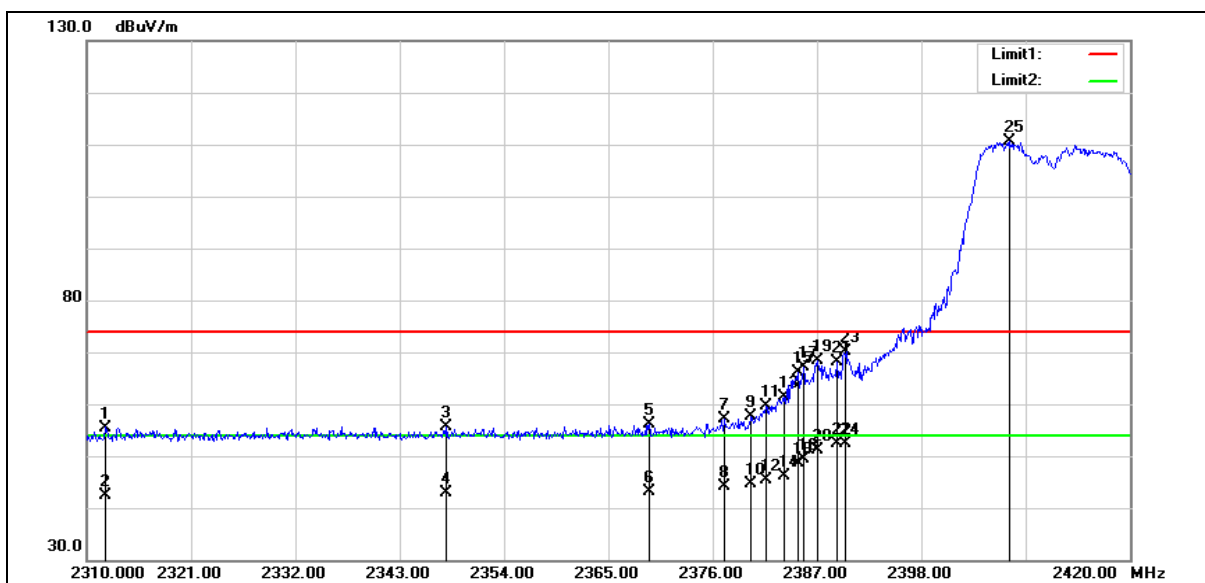

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2311.980        | 56.76          | -1.26                 | 55.50           | 74.00          | -18.50      | peak   |
| 2   | 2311.980        | 43.57          | -1.26                 | 42.31           | 54.00          | -11.69      | AVG    |
| 3   | 2347.950        | 56.74          | -1.08                 | 55.66           | 74.00          | -18.34      | peak   |
| 4   | 2347.950        | 43.86          | -1.08                 | 42.78           | 54.00          | -11.22      | AVG    |
| 5   | 2369.290        | 57.01          | -0.97                 | 56.04           | 74.00          | -17.96      | peak   |
| 6   | 2369.290        | 44.15          | -0.97                 | 43.18           | 54.00          | -10.82      | AVG    |
| 7   | 2377.210        | 58.16          | -0.94                 | 57.22           | 74.00          | -16.78      | peak   |
| 8   | 2377.210        | 44.99          | -0.94                 | 44.05           | 54.00          | -9.95       | AVG    |
| 9   | 2380.070        | 58.64          | -0.93                 | 57.71           | 74.00          | -16.29      | peak   |
| 10  | 2380.070        | 45.48          | -0.93                 | 44.55           | 54.00          | -9.45       | AVG    |
| 11  | 2381.610        | 60.55          | -0.91                 | 59.64           | 74.00          | -14.36      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2381.610           | 46.23             | -0.91                    | 45.32              | 54.00             | -8.68          | AVG    |
| 13  | 2383.480           | 62.36             | -0.91                    | 61.45              | 74.00             | -12.55         | peak   |
| 14  | 2383.480           | 47.14             | -0.91                    | 46.23              | 54.00             | -7.77          | AVG    |
| 15  | 2385.020           | 66.95             | -0.90                    | 66.05              | 74.00             | -7.95          | peak   |
| 16  | 2385.020           | 49.62             | -0.90                    | 48.72              | 54.00             | -5.28          | AVG    |
| 17  | 2385.570           | 67.99             | -0.90                    | 67.09              | 74.00             | -6.91          | peak   |
| 18  | 2385.570           | 50.24             | -0.90                    | 49.34              | 54.00             | -4.66          | AVG    |
| 19  | 2387.110           | 69.26             | -0.88                    | 68.38              | 74.00             | -5.62          | peak   |
| 20  | 2387.110           | 52.07             | -0.88                    | 51.19              | 54.00             | -2.81          | AVG    |
| 21  | 2389.090           | 68.96             | -0.88                    | 68.08              | 74.00             | -5.92          | peak   |
| 22  | 2389.090           | 53.29             | -0.88                    | 52.41              | 54.00             | -1.59          | AVG    |
| 23  | 2390.000           | 70.96             | -0.87                    | 70.09              | 74.00             | -3.91          | peak   |
| 24  | 2390.000           | 53.14             | -0.87                    | 52.27              | 54.00             | -1.73          | AVG    |
| 25  | 2407.350           | 111.40            | -0.79                    | 110.61             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

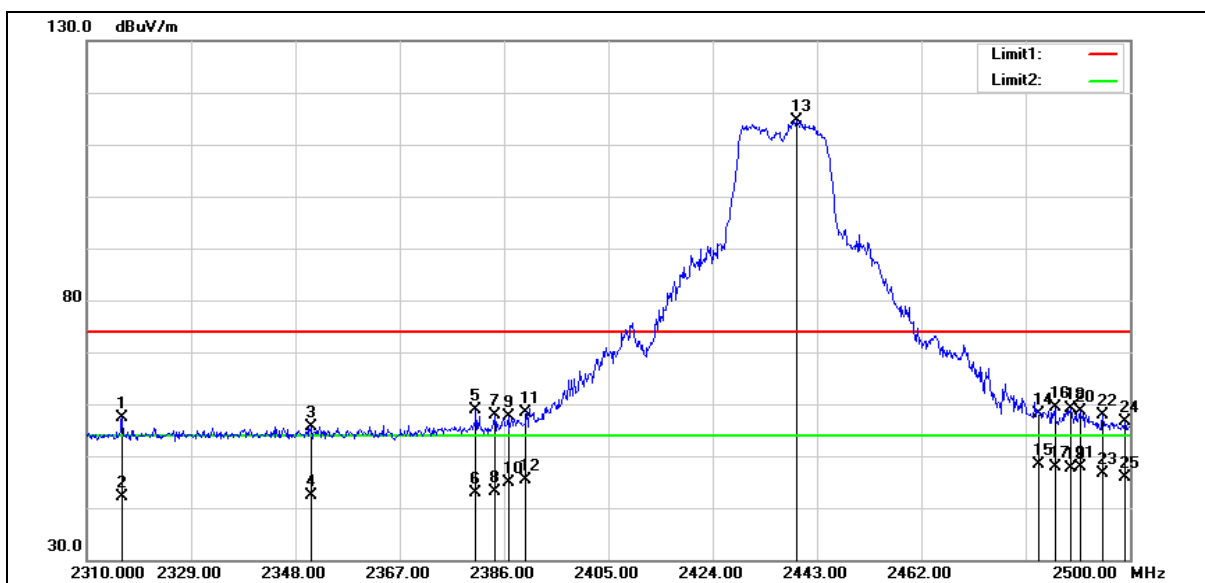

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2316.460        | 58.56          | -1.24                 | 57.32           | 74.00          | -16.68      | peak   |
| 2   | 2316.460        | 43.38          | -1.24                 | 42.14           | 54.00          | -11.86      | AVG    |
| 3   | 2350.850        | 56.80          | -1.07                 | 55.73           | 74.00          | -18.27      | peak   |
| 4   | 2350.850        | 43.53          | -1.07                 | 42.46           | 54.00          | -11.54      | AVG    |
| 5   | 2380.870        | 59.88          | -0.92                 | 58.96           | 74.00          | -15.04      | peak   |
| 6   | 2380.870        | 43.74          | -0.92                 | 42.82           | 54.00          | -11.18      | AVG    |
| 7   | 2384.290        | 58.79          | -0.90                 | 57.89           | 74.00          | -16.11      | peak   |
| 8   | 2384.290        | 43.93          | -0.90                 | 43.03           | 54.00          | -10.97      | AVG    |
| 9   | 2386.760        | 58.61          | -0.89                 | 57.72           | 74.00          | -16.28      | peak   |
| 10  | 2386.760        | 45.66          | -0.89                 | 44.77           | 54.00          | -9.23       | AVG    |
| 11  | 2390.000        | 59.22          | -0.87                 | 58.35           | 74.00          | -15.65      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2390.000           | 46.14             | -0.87                    | 45.27              | 54.00             | -8.73          | AVG    |
| 13  | 2439.390           | 115.24            | -0.62                    | 114.62             | --                | --             | peak   |
| 14  | 2483.500           | 58.48             | -0.40                    | 58.08              | 74.00             | -15.92         | peak   |
| 15  | 2483.500           | 48.68             | -0.40                    | 48.28              | 54.00             | -5.72          | AVG    |
| 16  | 2486.320           | 59.81             | -0.38                    | 59.43              | 74.00             | -14.57         | peak   |
| 17  | 2486.320           | 48.33             | -0.38                    | 47.95              | 54.00             | -6.05          | AVG    |
| 18  | 2489.170           | 59.56             | -0.37                    | 59.19              | 74.00             | -14.81         | peak   |
| 19  | 2489.170           | 48.12             | -0.37                    | 47.75              | 54.00             | -6.25          | AVG    |
| 20  | 2490.880           | 59.02             | -0.36                    | 58.66              | 74.00             | -15.34         | peak   |
| 21  | 2490.880           | 48.17             | -0.36                    | 47.81              | 54.00             | -6.19          | AVG    |
| 22  | 2495.060           | 58.27             | -0.34                    | 57.93              | 74.00             | -16.07         | peak   |
| 23  | 2495.060           | 46.91             | -0.34                    | 46.57              | 54.00             | -7.43          | AVG    |
| 24  | 2499.050           | 57.06             | -0.31                    | 56.75              | 74.00             | -17.25         | peak   |
| 25  | 2499.050           | 46.09             | -0.31                    | 45.78              | 54.00             | -8.22          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |

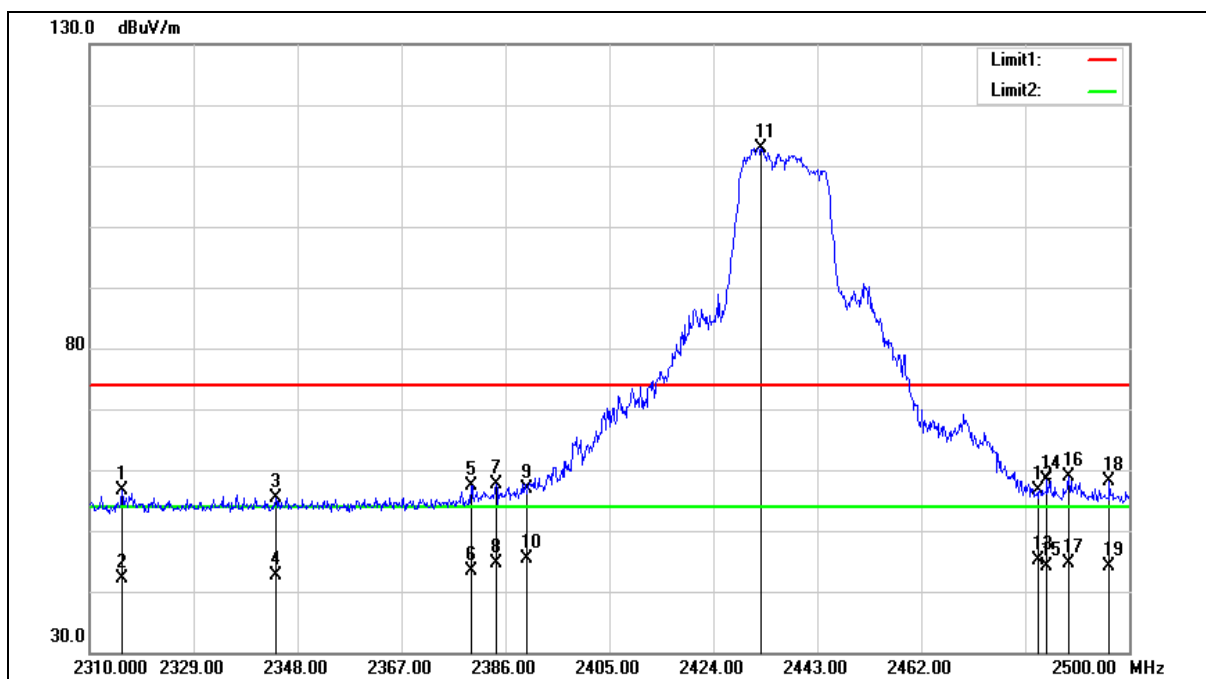

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2315.890        | 57.83          | -1.25                 | 56.58           | 74.00          | -17.42      | peak   |
| 2   | 2315.890        | 43.45          | -1.25                 | 42.20           | 54.00          | -11.80      | AVG    |
| 3   | 2344.010        | 56.43          | -1.10                 | 55.33           | 74.00          | -18.67      | peak   |
| 4   | 2344.010        | 43.74          | -1.10                 | 42.64           | 54.00          | -11.36      | AVG    |
| 5   | 2379.730        | 58.39          | -0.93                 | 57.46           | 74.00          | -16.54      | peak   |
| 6   | 2379.730        | 44.34          | -0.93                 | 43.41           | 54.00          | -10.59      | AVG    |
| 7   | 2384.290        | 58.52          | -0.90                 | 57.62           | 74.00          | -16.38      | peak   |
| 8   | 2384.290        | 45.59          | -0.90                 | 44.69           | 54.00          | -9.31       | AVG    |
| 9   | 2390.000        | 57.75          | -0.87                 | 56.88           | 74.00          | -17.12      | peak   |
| 10  | 2390.000        | 46.32          | -0.87                 | 45.45           | 54.00          | -8.55       | AVG    |
| 11  | 2432.740        | 113.50         | -0.66                 | 112.84          | --             | --          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2483.500           | 56.97             | -0.40                    | 56.57              | 74.00             | -17.43         | peak   |
| 13  | 2483.500           | 45.54             | -0.40                    | 45.14              | 54.00             | -8.86          | AVG    |
| 14  | 2484.990           | 58.78             | -0.39                    | 58.39              | 74.00             | -15.61         | peak   |
| 15  | 2484.990           | 44.56             | -0.39                    | 44.17              | 54.00             | -9.83          | AVG    |
| 16  | 2488.980           | 59.18             | -0.37                    | 58.81              | 74.00             | -15.19         | peak   |
| 17  | 2488.980           | 44.90             | -0.37                    | 44.53              | 54.00             | -9.47          | AVG    |
| 18  | 2496.390           | 58.49             | -0.33                    | 58.16              | 74.00             | -15.84         | peak   |
| 19  | 2496.390           | 44.37             | -0.33                    | 44.04              | 54.00             | -9.96          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

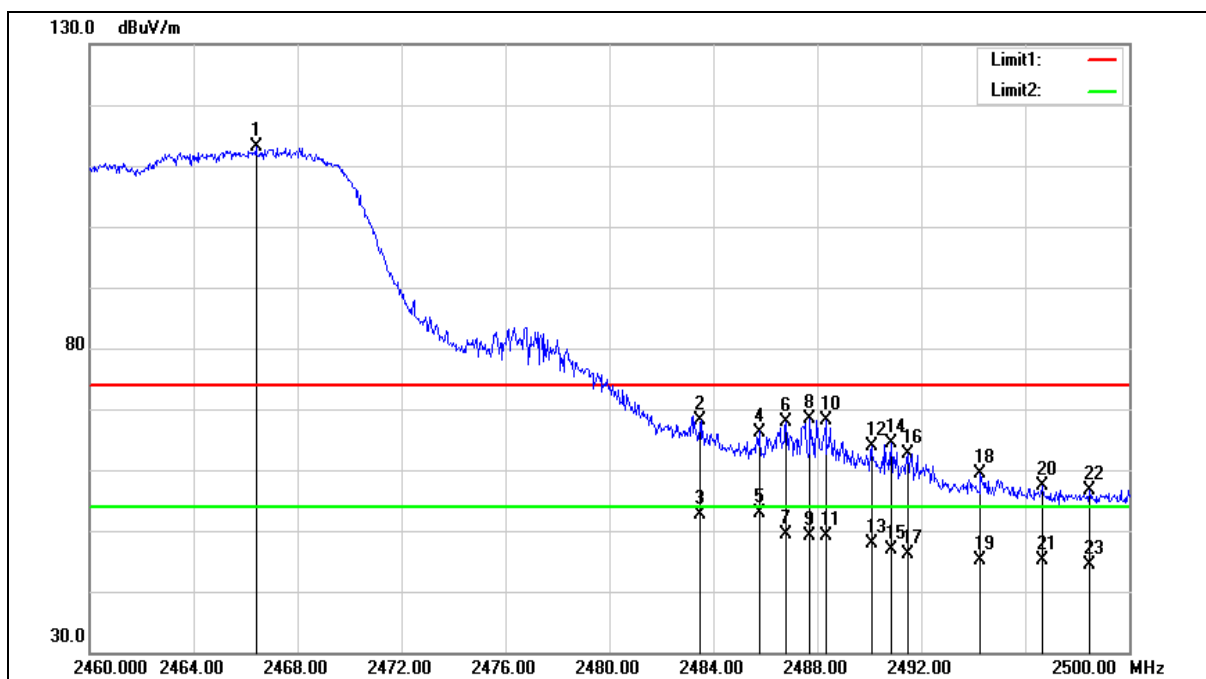

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2466.400        | 113.58         | -0.48                 | 113.10          | --             | --          | peak   |
| 2   | 2483.500        | 68.58          | -0.40                 | 68.18           | 74.00          | -5.82       | peak   |
| 3   | 2483.500        | 53.05          | -0.40                 | 52.65           | 54.00          | -1.35       | AVG    |
| 4   | 2485.760        | 66.63          | -0.38                 | 66.25           | 74.00          | -7.75       | peak   |
| 5   | 2485.760        | 53.14          | -0.38                 | 52.76           | 54.00          | -1.24       | AVG    |
| 6   | 2486.800        | 68.24          | -0.37                 | 67.87           | 74.00          | -6.13       | peak   |
| 7   | 2486.800        | 49.86          | -0.37                 | 49.49           | 54.00          | -4.51       | AVG    |
| 8   | 2487.720        | 68.63          | -0.37                 | 68.26           | 74.00          | -5.74       | peak   |
| 9   | 2487.720        | 49.59          | -0.37                 | 49.22           | 54.00          | -4.78       | AVG    |
| 10  | 2488.320        | 68.40          | -0.37                 | 68.03           | 74.00          | -5.97       | peak   |
| 11  | 2488.320        | 49.62          | -0.37                 | 49.25           | 54.00          | -4.75       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 11  | 2488.320           | 49.62             | -0.37                    | 49.25              | 54.00             | -4.75          | AVG    |
| 12  | 2490.080           | 64.16             | -0.36                    | 63.80              | 74.00             | -10.20         | peak   |
| 13  | 2490.080           | 48.15             | -0.36                    | 47.79              | 54.00             | -6.21          | AVG    |
| 14  | 2490.840           | 64.78             | -0.36                    | 64.42              | 74.00             | -9.58          | peak   |
| 15  | 2490.840           | 47.23             | -0.36                    | 46.87              | 54.00             | -7.13          | AVG    |
| 16  | 2491.480           | 63.08             | -0.35                    | 62.73              | 74.00             | -11.27         | peak   |
| 17  | 2491.480           | 46.55             | -0.35                    | 46.20              | 54.00             | -7.80          | AVG    |
| 18  | 2494.280           | 59.71             | -0.34                    | 59.37              | 74.00             | -14.63         | peak   |
| 19  | 2494.280           | 45.49             | -0.34                    | 45.15              | 54.00             | -8.85          | AVG    |
| 20  | 2496.680           | 57.75             | -0.33                    | 57.42              | 74.00             | -16.58         | peak   |
| 21  | 2496.680           | 45.43             | -0.33                    | 45.10              | 54.00             | -8.90          | AVG    |
| 22  | 2498.480           | 56.95             | -0.32                    | 56.63              | 74.00             | -17.37         | peak   |
| 23  | 2498.480           | 44.72             | -0.32                    | 44.40              | 54.00             | -9.60          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |

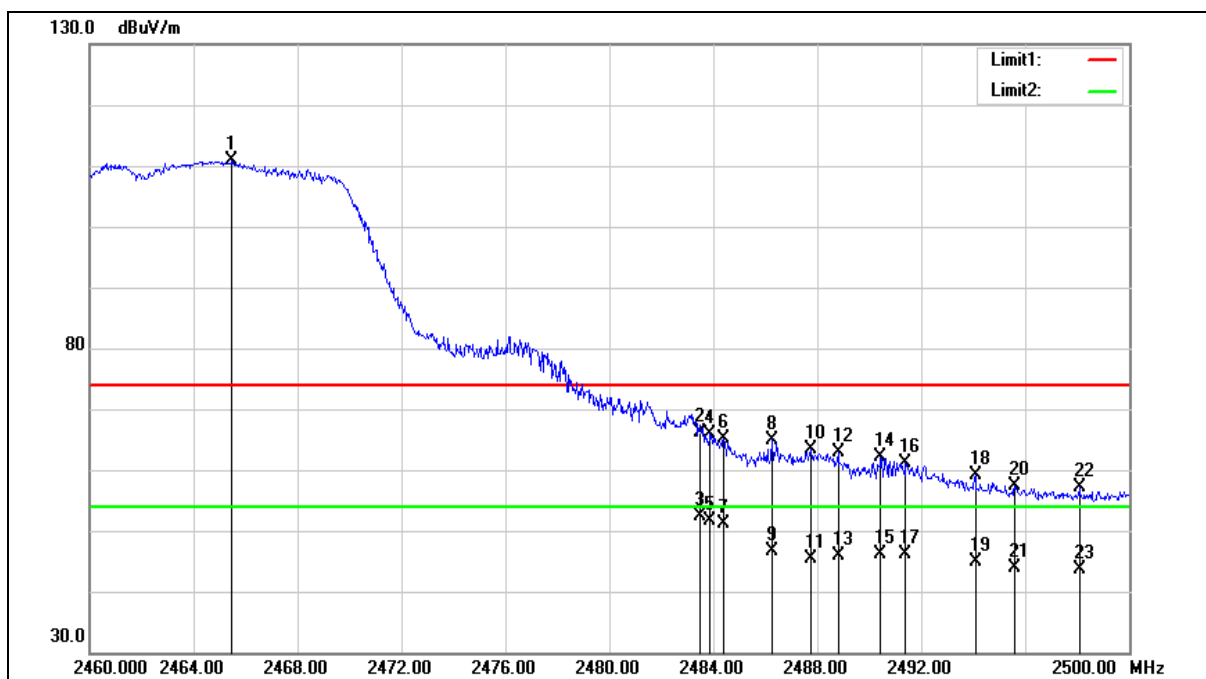

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2465.480        | 111.43         | -0.49                 | 110.94          | --             | --          | peak   |
| 2   | 2483.500        | 66.63          | -0.40                 | 66.23           | 74.00          | -7.77       | peak   |
| 3   | 2483.500        | 52.77          | -0.40                 | 52.37           | 54.00          | -1.63       | AVG    |
| 4   | 2483.880        | 66.39          | -0.39                 | 66.00           | 74.00          | -8.00       | peak   |
| 5   | 2483.880        | 52.00          | -0.39                 | 51.61           | 54.00          | -2.39       | AVG    |
| 6   | 2484.400        | 65.52          | -0.39                 | 65.13           | 74.00          | -8.87       | peak   |
| 7   | 2484.400        | 51.43          | -0.39                 | 51.04           | 54.00          | -2.96       | AVG    |
| 8   | 2486.240        | 65.38          | -0.38                 | 65.00           | 74.00          | -9.00       | peak   |
| 9   | 2486.240        | 47.05          | -0.38                 | 46.67           | 54.00          | -7.33       | AVG    |
| 10  | 2487.760        | 63.78          | -0.37                 | 63.41           | 74.00          | -10.59      | peak   |
| 11  | 2487.760        | 45.65          | -0.37                 | 45.28           | 54.00          | -8.72       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 3          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2488.800           | 63.18             | -0.37                    | 62.81              | 74.00             | -11.19         | peak   |
| 13  | 2488.800           | 46.26             | -0.37                    | 45.89              | 54.00             | -8.11          | AVG    |
| 14  | 2490.440           | 62.39             | -0.36                    | 62.03              | 74.00             | -11.97         | peak   |
| 15  | 2490.440           | 46.51             | -0.36                    | 46.15              | 54.00             | -7.85          | AVG    |
| 16  | 2491.400           | 61.48             | -0.35                    | 61.13              | 74.00             | -12.87         | peak   |
| 17  | 2491.400           | 46.44             | -0.35                    | 46.09              | 54.00             | -7.91          | AVG    |
| 18  | 2494.080           | 59.54             | -0.34                    | 59.20              | 74.00             | -14.80         | peak   |
| 19  | 2494.080           | 45.17             | -0.34                    | 44.83              | 54.00             | -9.17          | AVG    |
| 20  | 2495.600           | 57.61             | -0.33                    | 57.28              | 74.00             | -16.72         | peak   |
| 21  | 2495.600           | 44.22             | -0.33                    | 43.89              | 54.00             | -10.11         | AVG    |
| 22  | 2498.080           | 57.37             | -0.32                    | 57.05              | 74.00             | -16.95         | peak   |
| 23  | 2498.080           | 43.92             | -0.32                    | 43.60              | 54.00             | -10.40         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

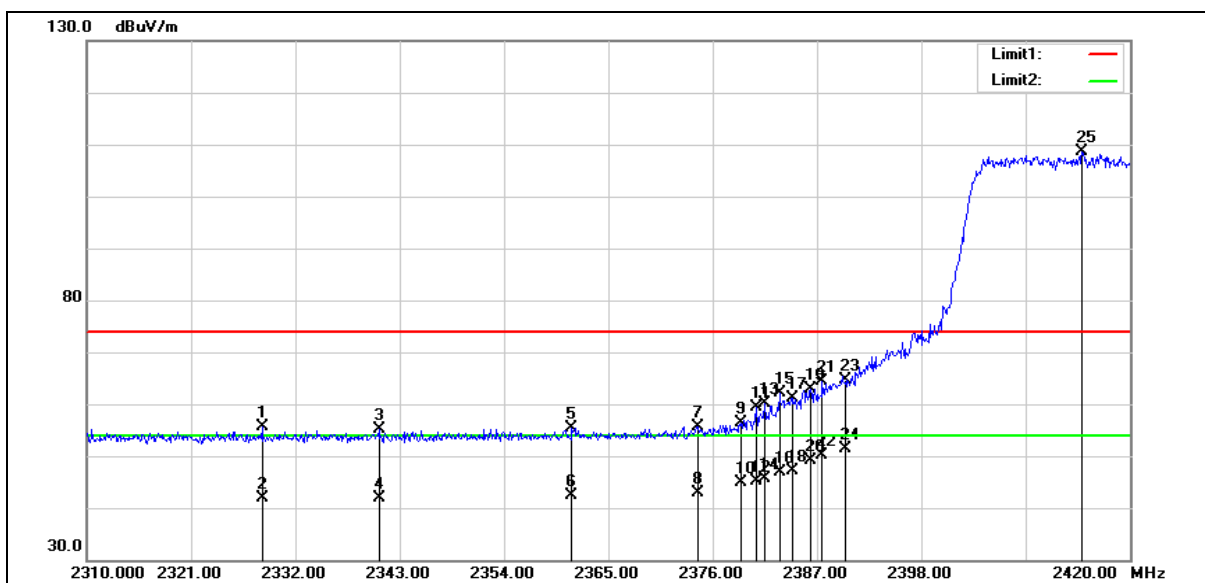

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2328.480        | 56.74          | -1.18                 | 55.56           | 74.00          | -18.44      | peak   |
| 2   | 2328.480        | 43.02          | -1.18                 | 41.84           | 54.00          | -12.16      | AVG    |
| 3   | 2340.800        | 56.25          | -1.11                 | 55.14           | 74.00          | -18.86      | peak   |
| 4   | 2340.800        | 43.02          | -1.11                 | 41.91           | 54.00          | -12.09      | AVG    |
| 5   | 2361.150        | 56.46          | -1.02                 | 55.44           | 74.00          | -18.56      | peak   |
| 6   | 2361.150        | 43.33          | -1.02                 | 42.31           | 54.00          | -11.69      | AVG    |
| 7   | 2374.460        | 56.69          | -0.96                 | 55.73           | 74.00          | -18.27      | peak   |
| 8   | 2374.460        | 43.96          | -0.96                 | 43.00           | 54.00          | -11.00      | AVG    |
| 9   | 2378.970        | 57.20          | -0.93                 | 56.27           | 74.00          | -17.73      | peak   |
| 10  | 2378.970        | 45.72          | -0.93                 | 44.79           | 54.00          | -9.21       | AVG    |
| 11  | 2380.620        | 60.30          | -0.93                 | 59.37           | 74.00          | -14.63      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2380.620           | 46.18             | -0.93                    | 45.25              | 54.00             | -8.75          | AVG    |
| 13  | 2381.500           | 61.10             | -0.91                    | 60.19              | 74.00             | -13.81         | peak   |
| 14  | 2381.500           | 46.63             | -0.91                    | 45.72              | 54.00             | -8.28          | AVG    |
| 15  | 2383.040           | 62.92             | -0.91                    | 62.01              | 74.00             | -11.99         | peak   |
| 16  | 2383.040           | 47.76             | -0.91                    | 46.85              | 54.00             | -7.15          | AVG    |
| 17  | 2384.360           | 62.13             | -0.90                    | 61.23              | 74.00             | -12.77         | peak   |
| 18  | 2384.360           | 48.00             | -0.90                    | 47.10              | 54.00             | -6.90          | AVG    |
| 19  | 2386.340           | 63.82             | -0.90                    | 62.92              | 74.00             | -11.08         | peak   |
| 20  | 2386.340           | 49.94             | -0.90                    | 49.04              | 54.00             | -4.96          | AVG    |
| 21  | 2387.550           | 65.35             | -0.88                    | 64.47              | 74.00             | -9.53          | peak   |
| 22  | 2387.550           | 51.11             | -0.88                    | 50.23              | 54.00             | -3.77          | AVG    |
| 23  | 2390.000           | 65.44             | -0.87                    | 64.57              | 74.00             | -9.43          | peak   |
| 24  | 2390.000           | 52.23             | -0.87                    | 51.36              | 54.00             | -2.64          | AVG    |
| 25  | 2414.940           | 109.37            | -0.75                    | 108.62             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

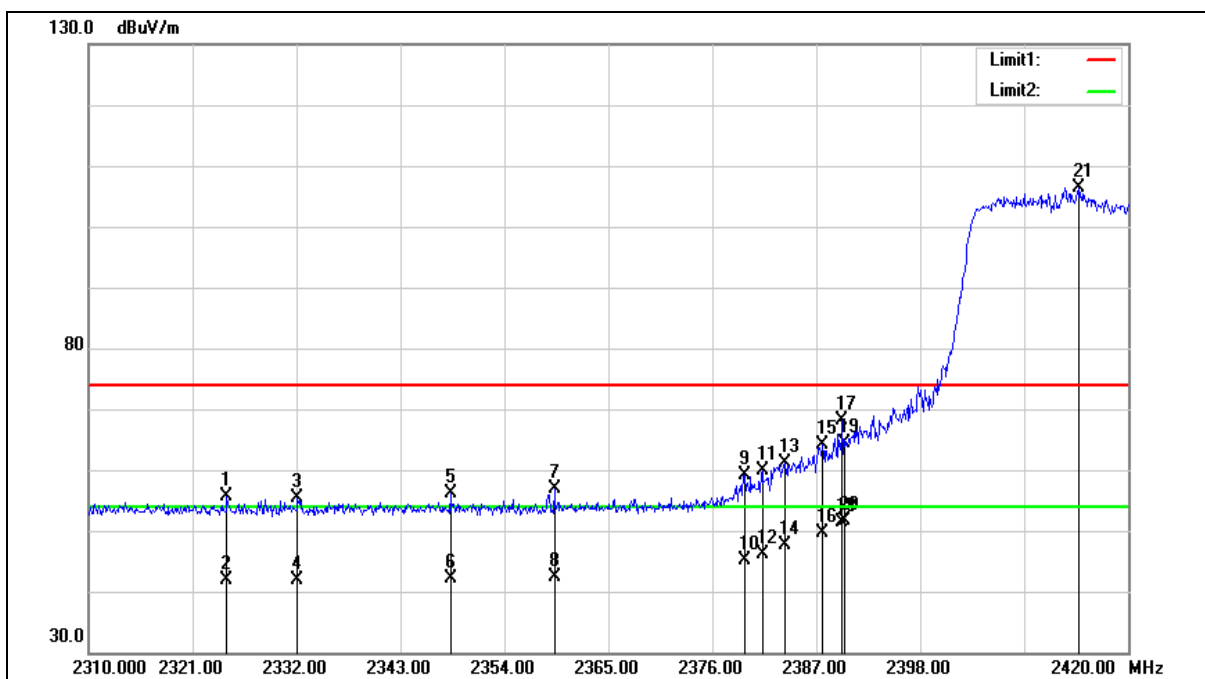

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2324.630        | 56.74          | -1.20                 | 55.54           | 74.00          | -18.46      | peak   |
| 2   | 2324.630        | 42.97          | -1.20                 | 41.77           | 54.00          | -12.23      | AVG    |
| 3   | 2332.110        | 56.44          | -1.16                 | 55.28           | 74.00          | -18.72      | peak   |
| 4   | 2332.110        | 43.04          | -1.16                 | 41.88           | 54.00          | -12.12      | AVG    |
| 5   | 2348.280        | 57.30          | -1.08                 | 56.22           | 74.00          | -17.78      | peak   |
| 6   | 2348.280        | 43.20          | -1.08                 | 42.12           | 54.00          | -11.88      | AVG    |
| 7   | 2359.280        | 58.01          | -1.03                 | 56.98           | 74.00          | -17.02      | peak   |
| 8   | 2359.280        | 43.30          | -1.03                 | 42.27           | 54.00          | -11.73      | AVG    |
| 9   | 2379.410        | 60.06          | -0.93                 | 59.13           | 74.00          | -14.87      | peak   |
| 10  | 2379.410        | 46.08          | -0.93                 | 45.15           | 54.00          | -8.85       | AVG    |
| 11  | 2381.280        | 60.68          | -0.91                 | 59.77           | 74.00          | -14.23      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2381.280           | 47.14             | -0.91                    | 46.23              | 54.00             | -7.77          | AVG    |
| 13  | 2383.700           | 61.94             | -0.91                    | 61.03              | 74.00             | -12.97         | peak   |
| 14  | 2383.700           | 48.63             | -0.91                    | 47.72              | 54.00             | -6.28          | AVG    |
| 15  | 2387.660           | 64.97             | -0.88                    | 64.09              | 74.00             | -9.91          | peak   |
| 16  | 2387.660           | 50.61             | -0.88                    | 49.73              | 54.00             | -4.27          | AVG    |
| 17  | 2389.750           | 68.94             | -0.87                    | 68.07              | 74.00             | -5.93          | peak   |
| 18  | 2389.750           | 52.27             | -0.87                    | 51.40              | 54.00             | -2.60          | AVG    |
| 19  | 2390.000           | 65.26             | -0.87                    | 64.39              | 74.00             | -9.61          | peak   |
| 20  | 2390.000           | 52.57             | -0.87                    | 51.70              | 54.00             | -2.30          | AVG    |
| 21  | 2414.830           | 107.18            | -0.75                    | 106.43             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

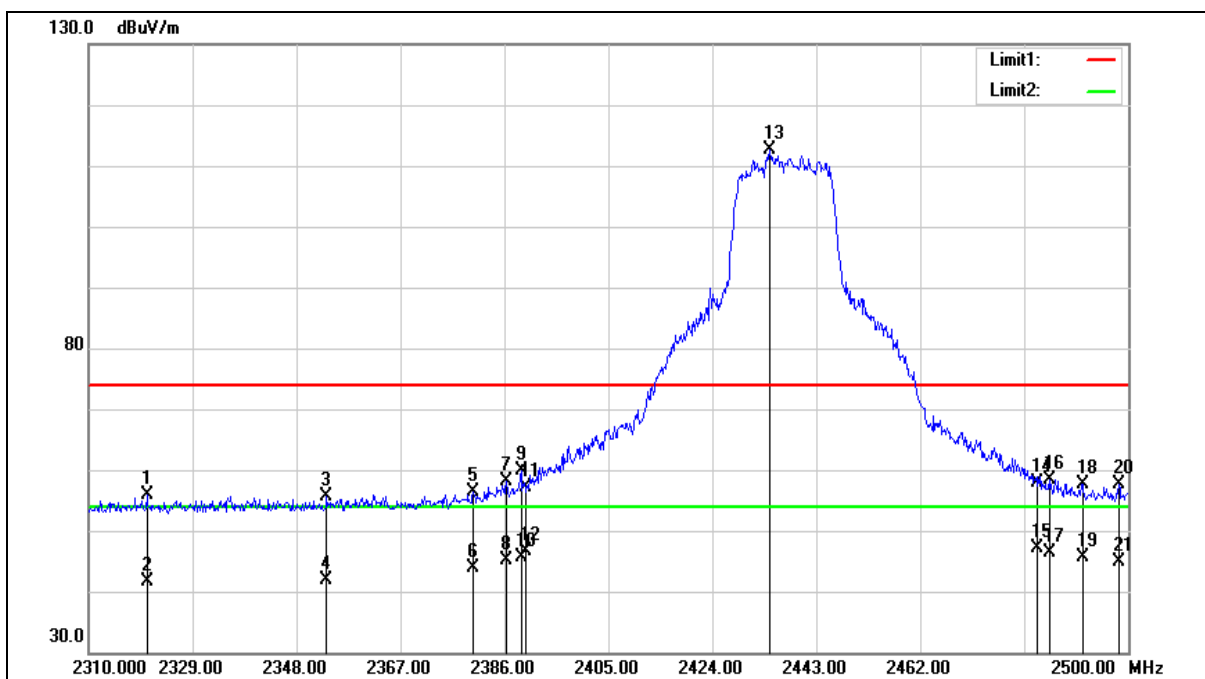

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2320.640        | 57.00          | -1.22                 | 55.78           | 74.00          | -18.22      | peak   |
| 2   | 2320.640        | 42.89          | -1.22                 | 41.67           | 54.00          | -12.33      | AVG    |
| 3   | 2353.510        | 56.79          | -1.05                 | 55.74           | 74.00          | -18.26      | peak   |
| 4   | 2353.510        | 42.85          | -1.05                 | 41.80           | 54.00          | -12.20      | AVG    |
| 5   | 2380.300        | 57.21          | -0.93                 | 56.28           | 74.00          | -17.72      | peak   |
| 6   | 2380.300        | 44.83          | -0.93                 | 43.90           | 54.00          | -10.10      | AVG    |
| 7   | 2386.380        | 58.96          | -0.90                 | 58.06           | 74.00          | -15.94      | peak   |
| 8   | 2386.380        | 45.95          | -0.90                 | 45.05           | 54.00          | -8.95       | AVG    |
| 9   | 2389.040        | 60.67          | -0.88                 | 59.79           | 74.00          | -14.21      | peak   |
| 10  | 2389.040        | 46.40          | -0.88                 | 45.52           | 54.00          | -8.48       | AVG    |
| 11  | 2390.000        | 58.12          | -0.87                 | 57.25           | 74.00          | -16.75      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2390.000           | 47.50             | -0.87                    | 46.63              | 54.00             | -7.37          | AVG    |
| 13  | 2434.450           | 113.35            | -0.64                    | 112.71             | --                | --             | peak   |
| 14  | 2483.500           | 58.27             | -0.40                    | 57.87              | 74.00             | -16.13         | peak   |
| 15  | 2483.500           | 47.56             | -0.40                    | 47.16              | 54.00             | -6.84          | AVG    |
| 16  | 2485.560           | 58.75             | -0.38                    | 58.37              | 74.00             | -15.63         | peak   |
| 17  | 2485.560           | 46.82             | -0.38                    | 46.44              | 54.00             | -7.56          | AVG    |
| 18  | 2491.640           | 58.00             | -0.35                    | 57.65              | 74.00             | -16.35         | peak   |
| 19  | 2491.640           | 46.02             | -0.35                    | 45.67              | 54.00             | -8.33          | AVG    |
| 20  | 2498.290           | 58.02             | -0.32                    | 57.70              | 74.00             | -16.30         | peak   |
| 21  | 2498.290           | 45.13             | -0.32                    | 44.81              | 54.00             | -9.19          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

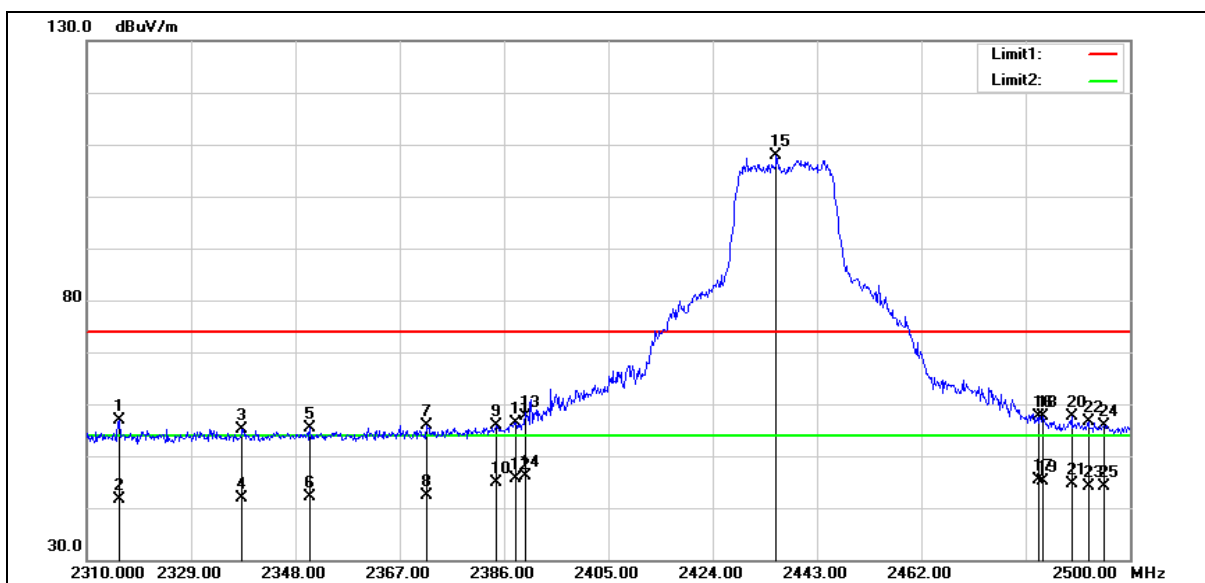

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2315.890        | 58.01          | -1.25                 | 56.76           | 74.00          | -17.24      | peak   |
| 2   | 2315.890        | 42.91          | -1.25                 | 41.66           | 54.00          | -12.34      | AVG    |
| 3   | 2338.310        | 56.36          | -1.13                 | 55.23           | 74.00          | -18.77      | peak   |
| 4   | 2338.310        | 42.99          | -1.13                 | 41.86           | 54.00          | -12.14      | AVG    |
| 5   | 2350.660        | 56.35          | -1.07                 | 55.28           | 74.00          | -18.72      | peak   |
| 6   | 2350.660        | 43.12          | -1.07                 | 42.05           | 54.00          | -11.95      | AVG    |
| 7   | 2371.940        | 56.93          | -0.97                 | 55.96           | 74.00          | -18.04      | peak   |
| 8   | 2371.940        | 43.43          | -0.97                 | 42.46           | 54.00          | -11.54      | AVG    |
| 9   | 2384.480        | 56.80          | -0.90                 | 55.90           | 74.00          | -18.10      | peak   |
| 10  | 2384.480        | 45.69          | -0.90                 | 44.79           | 54.00          | -9.21       | AVG    |
| 11  | 2388.090        | 57.35          | -0.88                 | 56.47           | 74.00          | -17.53      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2388.090           | 46.47             | -0.88                    | 45.59              | 54.00             | -8.41          | AVG    |
| 13  | 2390.000           | 58.60             | -0.87                    | 57.73              | 74.00             | -16.27         | peak   |
| 14  | 2390.000           | 46.88             | -0.87                    | 46.01              | 54.00             | -7.99          | AVG    |
| 15  | 2435.590           | 108.55            | -0.64                    | 107.91             | --                | --             | peak   |
| 16  | 2483.500           | 58.05             | -0.40                    | 57.65              | 74.00             | -16.35         | peak   |
| 17  | 2483.500           | 45.66             | -0.40                    | 45.26              | 54.00             | -8.74          | AVG    |
| 18  | 2484.230           | 58.11             | -0.39                    | 57.72              | 74.00             | -16.28         | peak   |
| 19  | 2484.230           | 45.56             | -0.39                    | 45.17              | 54.00             | -8.83          | AVG    |
| 20  | 2489.360           | 58.06             | -0.37                    | 57.69              | 74.00             | -16.31         | peak   |
| 21  | 2489.360           | 45.03             | -0.37                    | 44.66              | 54.00             | -9.34          | AVG    |
| 22  | 2492.400           | 56.87             | -0.35                    | 56.52              | 74.00             | -17.48         | peak   |
| 23  | 2492.400           | 44.50             | -0.35                    | 44.15              | 54.00             | -9.85          | AVG    |
| 24  | 2495.250           | 56.26             | -0.34                    | 55.92              | 74.00             | -18.08         | peak   |
| 25  | 2495.250           | 44.45             | -0.34                    | 44.11              | 54.00             | -9.89          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

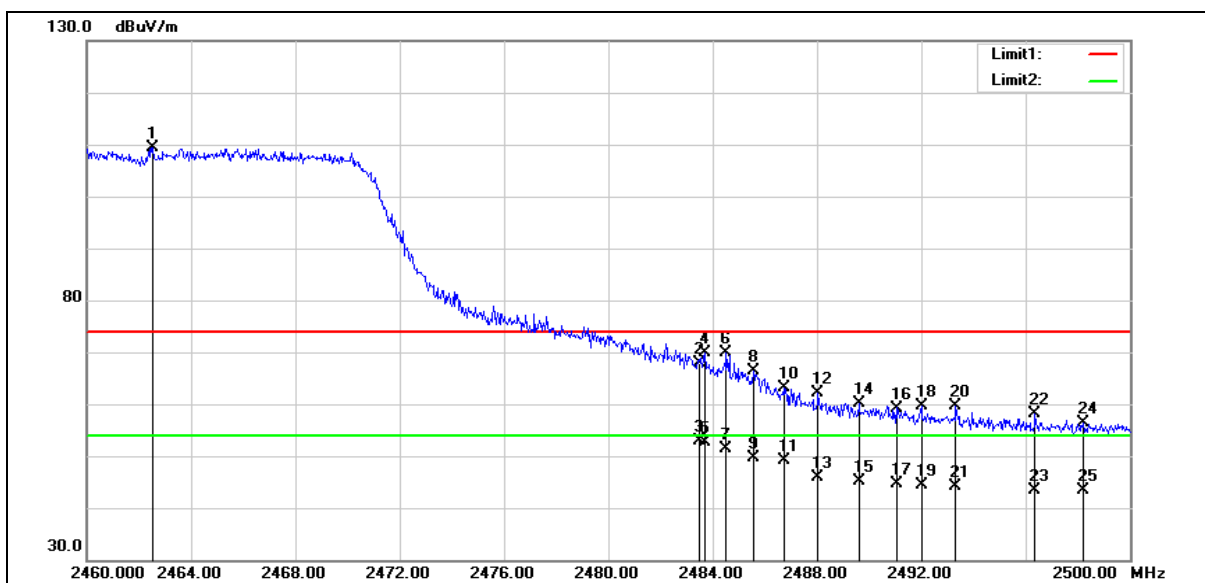

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2462.520        | 109.96         | -0.50                 | 109.46          | --             | --          | peak   |
| 2   | 2483.500        | 68.21          | -0.40                 | 67.81           | 74.00          | -6.19       | peak   |
| 3   | 2483.500        | 53.37          | -0.40                 | 52.97           | 54.00          | -1.03       | AVG    |
| 4   | 2483.720        | 70.19          | -0.40                 | 69.79           | 74.00          | -4.21       | peak   |
| 5   | 2483.720        | 53.02          | -0.40                 | 52.62           | 54.00          | -1.38       | AVG    |
| 6   | 2484.520        | 70.33          | -0.39                 | 69.94           | 74.00          | -4.06       | peak   |
| 7   | 2484.520        | 51.86          | -0.39                 | 51.47           | 54.00          | -2.53       | AVG    |
| 8   | 2485.560        | 66.85          | -0.38                 | 66.47           | 74.00          | -7.53       | peak   |
| 9   | 2485.560        | 49.95          | -0.38                 | 49.57           | 54.00          | -4.43       | AVG    |
| 10  | 2486.720        | 63.53          | -0.38                 | 63.15           | 74.00          | -10.85      | peak   |
| 11  | 2486.720        | 49.56          | -0.38                 | 49.18           | 54.00          | -4.82       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2488.040           | 62.38             | -0.37                    | 62.01              | 74.00             | -11.99         | peak   |
| 13  | 2488.040           | 46.32             | -0.37                    | 45.95              | 54.00             | -8.05          | AVG    |
| 14  | 2489.600           | 60.48             | -0.37                    | 60.11              | 74.00             | -13.89         | peak   |
| 15  | 2489.600           | 45.49             | -0.37                    | 45.12              | 54.00             | -8.88          | AVG    |
| 16  | 2491.040           | 59.61             | -0.36                    | 59.25              | 74.00             | -14.75         | peak   |
| 17  | 2491.040           | 44.99             | -0.36                    | 44.63              | 54.00             | -9.37          | AVG    |
| 18  | 2492.000           | 60.01             | -0.35                    | 59.66              | 74.00             | -14.34         | peak   |
| 19  | 2492.000           | 44.65             | -0.35                    | 44.30              | 54.00             | -9.70          | AVG    |
| 20  | 2493.320           | 59.91             | -0.34                    | 59.57              | 74.00             | -14.43         | peak   |
| 21  | 2493.320           | 44.45             | -0.34                    | 44.11              | 54.00             | -9.89          | AVG    |
| 22  | 2496.360           | 58.53             | -0.33                    | 58.20              | 74.00             | -15.80         | peak   |
| 23  | 2496.360           | 43.71             | -0.33                    | 43.38              | 54.00             | -10.62         | AVG    |
| 24  | 2498.200           | 56.67             | -0.32                    | 56.35              | 74.00             | -17.65         | peak   |
| 25  | 2495.250           | 44.45             | -0.34                    | 44.11              | 54.00             | -9.89          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

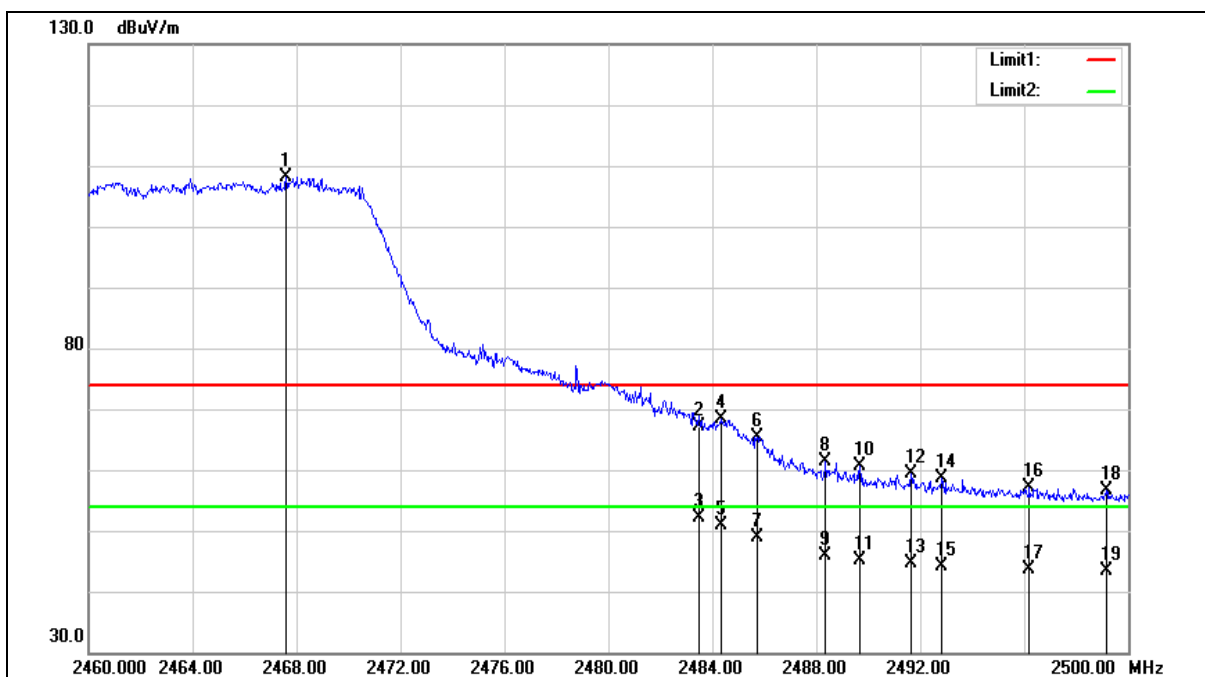

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2467.600        | 108.63         | -0.48                 | 108.15          | --             | --          | peak   |
| 2   | 2483.500        | 67.57          | -0.40                 | 67.17           | 74.00          | -6.83       | peak   |
| 3   | 2483.500        | 52.47          | -0.40                 | 52.07           | 54.00          | -1.93       | AVG    |
| 4   | 2484.320        | 68.78          | -0.39                 | 68.39           | 74.00          | -5.61       | peak   |
| 5   | 2484.320        | 51.28          | -0.39                 | 50.89           | 54.00          | -3.11       | AVG    |
| 6   | 2485.720        | 65.80          | -0.38                 | 65.42           | 74.00          | -8.58       | peak   |
| 7   | 2485.720        | 49.20          | -0.38                 | 48.82           | 54.00          | -5.18       | AVG    |
| 8   | 2488.360        | 61.87          | -0.37                 | 61.50           | 74.00          | -12.50      | peak   |
| 9   | 2488.360        | 46.33          | -0.37                 | 45.96           | 54.00          | -8.04       | AVG    |
| 10  | 2489.680        | 61.06          | -0.37                 | 60.69           | 74.00          | -13.31      | peak   |
| 11  | 2489.680        | 45.54          | -0.37                 | 45.17           | 54.00          | -8.83       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2491.640           | 59.64             | -0.35                    | 59.29              | 74.00             | -14.71         | peak   |
| 13  | 2491.640           | 44.90             | -0.35                    | 44.55              | 54.00             | -9.45          | AVG    |
| 14  | 2492.840           | 58.93             | -0.34                    | 58.59              | 74.00             | -15.41         | peak   |
| 15  | 2492.840           | 44.58             | -0.34                    | 44.24              | 54.00             | -9.76          | AVG    |
| 16  | 2496.200           | 57.44             | -0.33                    | 57.11              | 74.00             | -16.89         | peak   |
| 17  | 2496.200           | 43.98             | -0.33                    | 43.65              | 54.00             | -10.35         | AVG    |
| 18  | 2499.160           | 56.89             | -0.31                    | 56.58              | 74.00             | -17.42         | peak   |
| 19  | 2499.160           | 43.57             | -0.31                    | 43.26              | 54.00             | -10.74         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

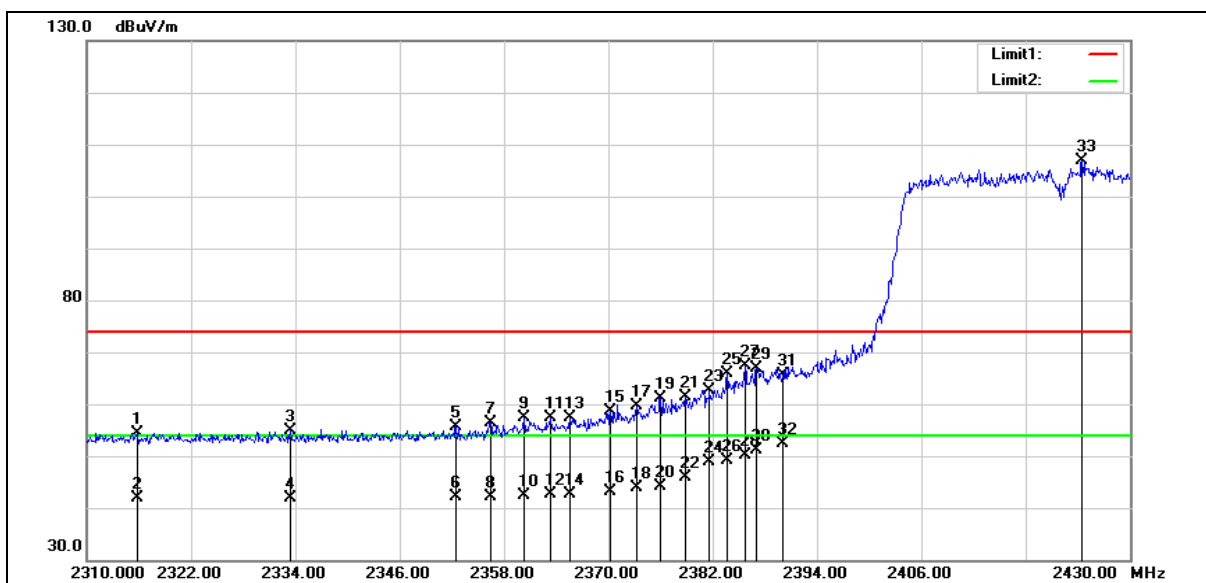

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2315.880        | 55.73          | -1.25                 | 54.48           | 74.00          | -19.52      | peak   |
| 2   | 2315.880        | 43.02          | -1.25                 | 41.77           | 54.00          | -12.23      | AVG    |
| 3   | 2333.400        | 56.00          | -1.16                 | 54.84           | 74.00          | -19.16      | peak   |
| 4   | 2333.400        | 43.08          | -1.16                 | 41.92           | 54.00          | -12.08      | AVG    |
| 5   | 2352.480        | 56.58          | -1.05                 | 55.53           | 74.00          | -18.47      | peak   |
| 6   | 2352.480        | 43.08          | -1.05                 | 42.03           | 54.00          | -11.97      | AVG    |
| 7   | 2356.440        | 57.38          | -1.04                 | 56.34           | 74.00          | -17.66      | peak   |
| 8   | 2356.440        | 43.25          | -1.04                 | 42.21           | 54.00          | -11.79      | AVG    |
| 9   | 2360.280        | 58.44          | -1.03                 | 57.41           | 74.00          | -16.59      | peak   |
| 10  | 2360.280        | 43.42          | -1.03                 | 42.39           | 54.00          | -11.61      | AVG    |
| 11  | 2363.280        | 58.36          | -1.01                 | 57.35           | 74.00          | -16.65      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2363.280           | 43.54             | -1.01                    | 42.53              | 54.00             | -11.47         | AVG    |
| 13  | 2365.560           | 58.37             | -1.00                    | 57.37              | 74.00             | -16.63         | peak   |
| 14  | 2365.560           | 43.59             | -1.00                    | 42.59              | 54.00             | -11.41         | AVG    |
| 15  | 2370.240           | 59.68             | -0.97                    | 58.71              | 74.00             | -15.29         | peak   |
| 16  | 2370.240           | 44.02             | -0.97                    | 43.05              | 54.00             | -10.95         | AVG    |
| 17  | 2373.240           | 60.65             | -0.96                    | 59.69              | 74.00             | -14.31         | peak   |
| 18  | 2373.240           | 44.89             | -0.96                    | 43.93              | 54.00             | -10.07         | AVG    |
| 19  | 2376.000           | 62.08             | -0.94                    | 61.14              | 74.00             | -12.86         | peak   |
| 20  | 2376.000           | 44.96             | -0.94                    | 44.02              | 54.00             | -9.98          | AVG    |
| 21  | 2378.880           | 62.37             | -0.93                    | 61.44              | 74.00             | -12.56         | peak   |
| 22  | 2378.880           | 46.87             | -0.93                    | 45.94              | 54.00             | -8.06          | AVG    |
| 23  | 2381.640           | 63.65             | -0.91                    | 62.74              | 74.00             | -11.26         | peak   |
| 24  | 2381.640           | 49.87             | -0.91                    | 48.96              | 54.00             | -5.04          | AVG    |
| 25  | 2383.680           | 66.85             | -0.91                    | 65.94              | 74.00             | -8.06          | peak   |
| 26  | 2383.680           | 50.09             | -0.91                    | 49.18              | 54.00             | -4.82          | AVG    |
| 27  | 2385.720           | 68.19             | -0.90                    | 67.29              | 74.00             | -6.71          | peak   |
| 28  | 2385.720           | 50.97             | -0.90                    | 50.07              | 54.00             | -3.93          | AVG    |
| 29  | 2387.040           | 67.69             | -0.88                    | 66.81              | 74.00             | -7.19          | peak   |
| 30  | 2387.040           | 51.91             | -0.88                    | 51.03              | 54.00             | -2.97          | AVG    |
| 31  | 2390.000           | 66.62             | -0.87                    | 65.75              | 74.00             | -8.25          | peak   |
| 32  | 2390.000           | 53.27             | -0.87                    | 52.40              | 54.00             | -1.60          | AVG    |
| 33  | 2424.480           | 107.63            | -0.70                    | 106.93             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

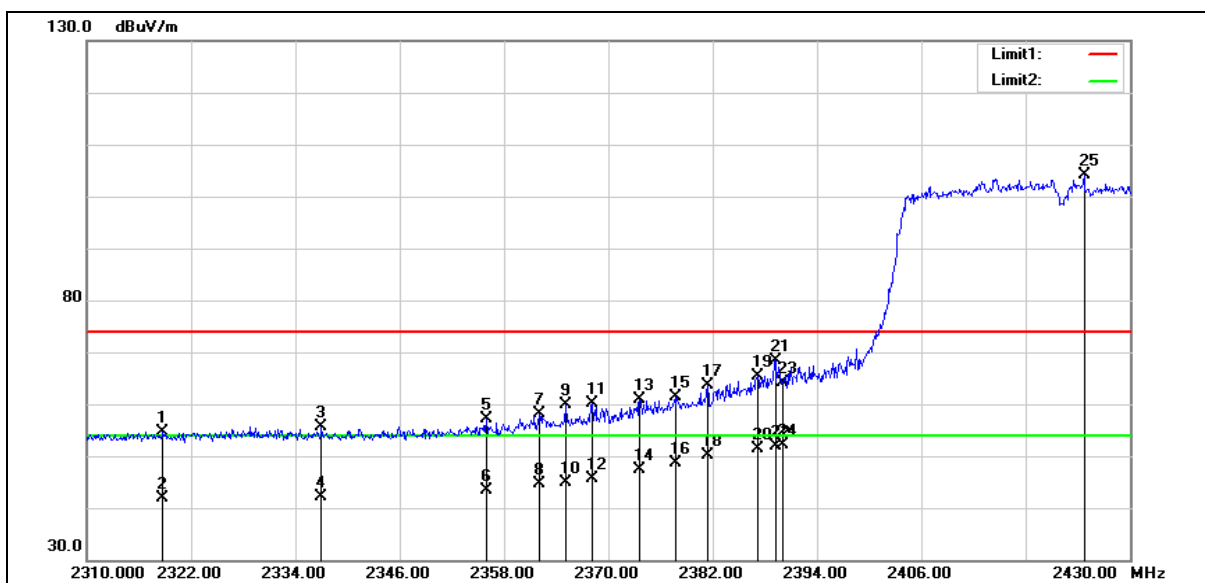

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2318.760        | 55.85          | -1.23                 | 54.62           | 74.00          | -19.38      | peak   |
| 2   | 2318.760        | 43.10          | -1.23                 | 41.87           | 54.00          | -12.13      | AVG    |
| 3   | 2337.000        | 56.79          | -1.13                 | 55.66           | 74.00          | -18.34      | peak   |
| 4   | 2337.000        | 43.19          | -1.13                 | 42.06           | 54.00          | -11.94      | AVG    |
| 5   | 2355.960        | 58.11          | -1.04                 | 57.07           | 74.00          | -16.93      | peak   |
| 6   | 2355.960        | 44.33          | -1.04                 | 43.29           | 54.00          | -10.71      | AVG    |
| 7   | 2362.080        | 59.22          | -1.02                 | 58.20           | 74.00          | -15.80      | peak   |
| 8   | 2362.080        | 45.62          | -1.02                 | 44.60           | 54.00          | -9.40       | AVG    |
| 9   | 2365.080        | 60.85          | -1.00                 | 59.85           | 74.00          | -14.15      | peak   |
| 10  | 2365.080        | 45.79          | -1.00                 | 44.79           | 54.00          | -9.21       | AVG    |
| 11  | 2368.200        | 61.15          | -0.99                 | 60.16           | 74.00          | -13.84      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2368.200           | 46.68             | -0.99                    | 45.69              | 54.00             | -8.31          | AVG    |
| 13  | 2373.600           | 61.74             | -0.96                    | 60.78              | 74.00             | -13.22         | peak   |
| 14  | 2373.600           | 48.27             | -0.96                    | 47.31              | 54.00             | -6.69          | AVG    |
| 15  | 2377.680           | 62.28             | -0.94                    | 61.34              | 74.00             | -12.66         | peak   |
| 16  | 2377.680           | 49.61             | -0.94                    | 48.67              | 54.00             | -5.33          | AVG    |
| 17  | 2381.400           | 64.45             | -0.91                    | 63.54              | 74.00             | -10.46         | peak   |
| 18  | 2381.400           | 51.11             | -0.91                    | 50.20              | 54.00             | -3.80          | AVG    |
| 19  | 2387.160           | 66.28             | -0.88                    | 65.40              | 74.00             | -8.60          | peak   |
| 20  | 2387.160           | 52.25             | -0.88                    | 51.37              | 54.00             | -2.63          | AVG    |
| 21  | 2389.200           | 69.32             | -0.88                    | 68.44              | 74.00             | -5.56          | peak   |
| 22  | 2389.200           | 52.70             | -0.88                    | 51.82              | 54.00             | -2.18          | AVG    |
| 23  | 2390.000           | 65.08             | -0.87                    | 64.21              | 74.00             | -9.79          | peak   |
| 24  | 2390.000           | 53.07             | -0.87                    | 52.20              | 54.00             | -1.80          | AVG    |
| 25  | 2424.720           | 104.76            | -0.70                    | 104.06             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

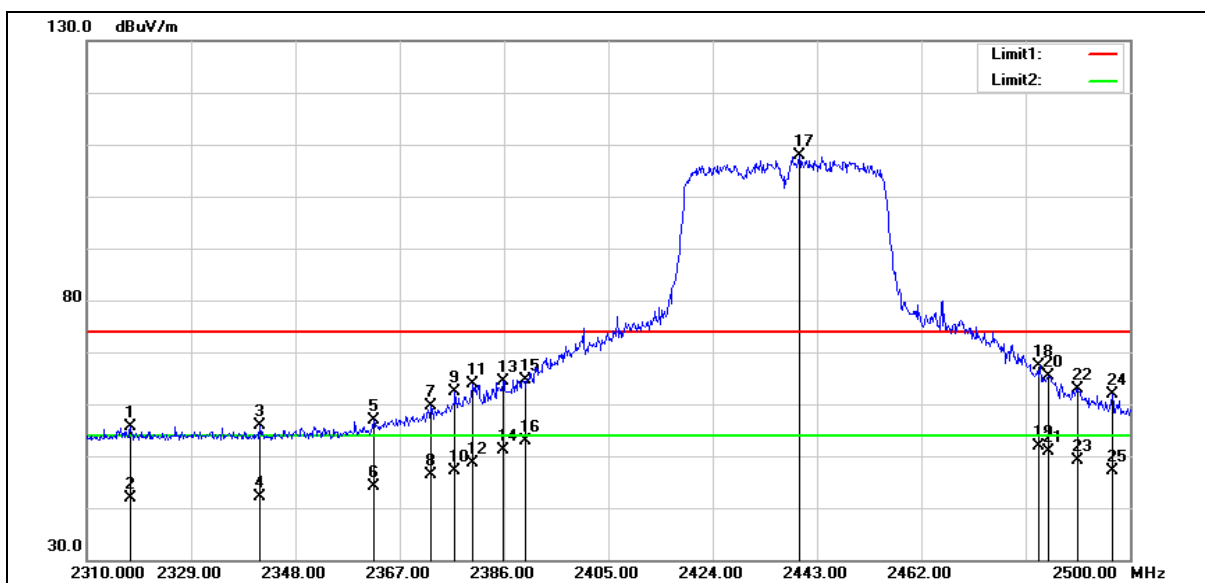

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2317.980        | 56.85          | -1.23                 | 55.62           | 74.00          | -18.38      | peak   |
| 2   | 2317.980        | 43.14          | -1.23                 | 41.91           | 54.00          | -12.09      | AVG    |
| 3   | 2341.540        | 57.05          | -1.11                 | 55.94           | 74.00          | -18.06      | peak   |
| 4   | 2341.540        | 43.30          | -1.11                 | 42.19           | 54.00          | -11.81      | AVG    |
| 5   | 2362.250        | 57.93          | -1.02                 | 56.91           | 74.00          | -17.09      | peak   |
| 6   | 2362.250        | 45.15          | -1.02                 | 44.13           | 54.00          | -9.87       | AVG    |
| 7   | 2372.700        | 60.65          | -0.96                 | 59.69           | 74.00          | -14.31      | peak   |
| 8   | 2372.700        | 47.24          | -0.96                 | 46.28           | 54.00          | -7.72       | AVG    |
| 9   | 2377.070        | 63.36          | -0.94                 | 62.42           | 74.00          | -11.58      | peak   |
| 10  | 2377.070        | 48.13          | -0.94                 | 47.19           | 54.00          | -6.81       | AVG    |
| 11  | 2380.300        | 64.85          | -0.93                 | 63.92           | 74.00          | -10.08      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2380.300           | 49.66             | -0.93                    | 48.73              | 54.00             | -5.27          | AVG    |
| 13  | 2385.810           | 65.36             | -0.90                    | 64.46              | 74.00             | -9.54          | peak   |
| 14  | 2385.810           | 52.06             | -0.90                    | 51.16              | 54.00             | -2.84          | AVG    |
| 15  | 2390.000           | 65.47             | -0.87                    | 64.60              | 74.00             | -9.40          | peak   |
| 16  | 2390.000           | 53.78             | -0.87                    | 52.91              | 54.00             | -1.09          | AVG    |
| 17  | 2439.770           | 108.42            | -0.61                    | 107.81             | --                | --             | peak   |
| 18  | 2483.500           | 67.86             | -0.40                    | 67.46              | 74.00             | -6.54          | peak   |
| 19  | 2483.500           | 52.27             | -0.40                    | 51.87              | 54.00             | -2.13          | AVG    |
| 20  | 2485.180           | 65.77             | -0.39                    | 65.38              | 74.00             | -8.62          | peak   |
| 21  | 2485.180           | 51.26             | -0.39                    | 50.87              | 54.00             | -3.13          | AVG    |
| 22  | 2490.500           | 63.25             | -0.36                    | 62.89              | 74.00             | -11.11         | peak   |
| 23  | 2490.500           | 49.38             | -0.36                    | 49.02              | 54.00             | -4.98          | AVG    |
| 24  | 2496.770           | 62.24             | -0.33                    | 61.91              | 74.00             | -12.09         | peak   |
| 25  | 2496.770           | 47.42             | -0.33                    | 47.09              | 54.00             | -6.91          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

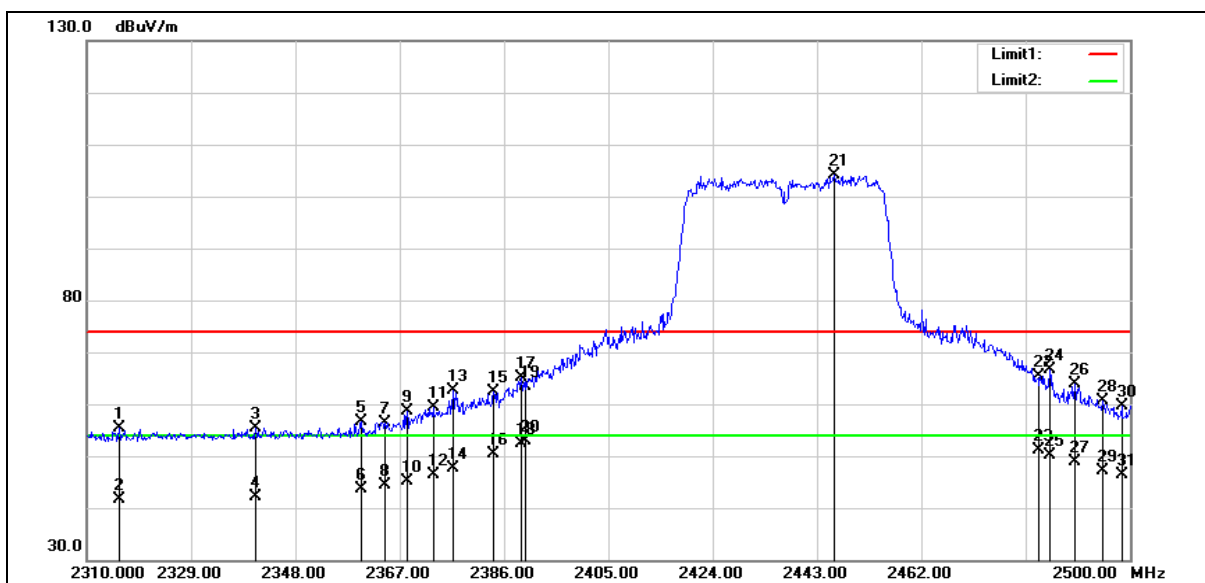

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2315.890        | 56.65          | -1.25                 | 55.40           | 74.00          | -18.60      | peak   |
| 2   | 2315.890        | 42.83          | -1.25                 | 41.58           | 54.00          | -12.42      | AVG    |
| 3   | 2340.780        | 56.48          | -1.11                 | 55.37           | 74.00          | -18.63      | peak   |
| 4   | 2340.780        | 43.31          | -1.11                 | 42.20           | 54.00          | -11.80      | AVG    |
| 5   | 2359.970        | 57.55          | -1.03                 | 56.52           | 74.00          | -17.48      | peak   |
| 6   | 2359.970        | 44.62          | -1.03                 | 43.59           | 54.00          | -10.41      | AVG    |
| 7   | 2364.340        | 57.47          | -1.00                 | 56.47           | 74.00          | -17.53      | peak   |
| 8   | 2364.340        | 45.36          | -1.00                 | 44.36           | 54.00          | -9.64       | AVG    |
| 9   | 2368.330        | 59.66          | -0.99                 | 58.67           | 74.00          | -15.33      | peak   |
| 10  | 2368.330        | 46.08          | -0.99                 | 45.09           | 54.00          | -8.91       | AVG    |
| 11  | 2373.080        | 60.30          | -0.96                 | 59.34           | 74.00          | -14.66      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2373.080           | 47.22             | -0.96                    | 46.26              | 54.00             | -7.74          | AVG    |
| 13  | 2376.690           | 63.66             | -0.94                    | 62.72              | 74.00             | -11.28         | peak   |
| 14  | 2376.690           | 48.51             | -0.94                    | 47.57              | 54.00             | -6.43          | AVG    |
| 15  | 2384.100           | 63.36             | -0.90                    | 62.46              | 74.00             | -11.54         | peak   |
| 16  | 2384.100           | 51.35             | -0.90                    | 50.45              | 54.00             | -3.55          | AVG    |
| 17  | 2389.040           | 66.04             | -0.88                    | 65.16              | 74.00             | -8.84          | peak   |
| 18  | 2389.040           | 53.21             | -0.88                    | 52.33              | 54.00             | -1.67          | AVG    |
| 19  | 2390.000           | 64.28             | -0.87                    | 63.41              | 74.00             | -10.59         | peak   |
| 20  | 2390.000           | 53.83             | -0.87                    | 52.96              | 54.00             | -1.04          | AVG    |
| 21  | 2446.040           | 104.79            | -0.58                    | 104.21             | --                | --             | peak   |
| 22  | 2483.500           | 65.66             | -0.40                    | 65.26              | 74.00             | -8.74          | peak   |
| 23  | 2483.500           | 51.65             | -0.40                    | 51.25              | 54.00             | -2.75          | AVG    |
| 24  | 2485.370           | 67.14             | -0.39                    | 66.75              | 74.00             | -7.25          | peak   |
| 25  | 2485.370           | 50.57             | -0.39                    | 50.18              | 54.00             | -3.82          | AVG    |
| 26  | 2489.930           | 64.18             | -0.36                    | 63.82              | 74.00             | -10.18         | peak   |
| 27  | 2489.930           | 49.18             | -0.36                    | 48.82              | 54.00             | -5.18          | AVG    |
| 28  | 2495.060           | 60.97             | -0.34                    | 60.63              | 74.00             | -13.37         | peak   |
| 29  | 2495.060           | 47.54             | -0.34                    | 47.20              | 54.00             | -6.80          | AVG    |
| 30  | 2498.480           | 59.96             | -0.32                    | 59.64              | 74.00             | -14.36         | peak   |
| 31  | 2498.480           | 46.68             | -0.32                    | 46.36              | 54.00             | -7.64          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

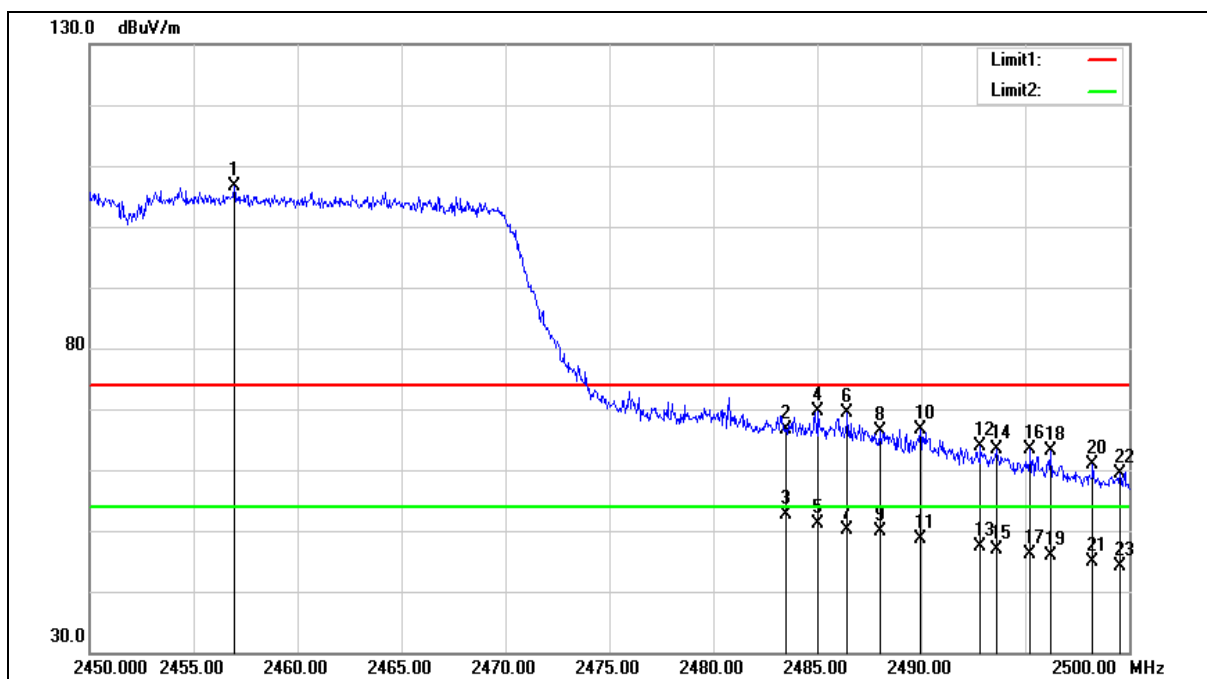

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2456.950        | 107.04         | -0.53                 | 106.51          | --             | --          | peak   |
| 2   | 2483.500        | 67.07          | -0.40                 | 66.67           | 74.00          | -7.33       | peak   |
| 3   | 2483.500        | 52.91          | -0.40                 | 52.51           | 54.00          | -1.49       | AVG    |
| 4   | 2485.050        | 69.99          | -0.39                 | 69.60           | 74.00          | -4.40       | peak   |
| 5   | 2485.050        | 51.44          | -0.39                 | 51.05           | 54.00          | -2.95       | AVG    |
| 6   | 2486.450        | 69.65          | -0.38                 | 69.27           | 74.00          | -4.73       | peak   |
| 7   | 2486.450        | 50.60          | -0.38                 | 50.22           | 54.00          | -3.78       | AVG    |
| 8   | 2488.000        | 66.78          | -0.37                 | 66.41           | 74.00          | -7.59       | peak   |
| 9   | 2488.000        | 50.13          | -0.37                 | 49.76           | 54.00          | -4.24       | AVG    |
| 10  | 2489.950        | 66.88          | -0.36                 | 66.52           | 74.00          | -7.48       | peak   |
| 11  | 2489.950        | 48.96          | -0.36                 | 48.60           | 54.00          | -5.40       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2492.850           | 64.16             | -0.34                    | 63.82              | 74.00             | -10.18         | peak   |
| 13  | 2492.850           | 47.64             | -0.34                    | 47.30              | 54.00             | -6.70          | AVG    |
| 14  | 2493.600           | 63.65             | -0.34                    | 63.31              | 74.00             | -10.69         | peak   |
| 15  | 2493.600           | 47.26             | -0.34                    | 46.92              | 54.00             | -7.08          | AVG    |
| 16  | 2495.250           | 63.74             | -0.34                    | 63.40              | 74.00             | -10.60         | peak   |
| 17  | 2495.250           | 46.47             | -0.34                    | 46.13              | 54.00             | -7.87          | AVG    |
| 18  | 2496.200           | 63.54             | -0.33                    | 63.21              | 74.00             | -10.79         | peak   |
| 19  | 2496.200           | 46.12             | -0.33                    | 45.79              | 54.00             | -8.21          | AVG    |
| 20  | 2498.250           | 61.21             | -0.32                    | 60.89              | 74.00             | -13.11         | peak   |
| 21  | 2498.250           | 45.23             | -0.32                    | 44.91              | 54.00             | -9.09          | AVG    |
| 22  | 2499.550           | 59.60             | -0.31                    | 59.29              | 74.00             | -14.71         | peak   |
| 23  | 2499.550           | 44.33             | -0.31                    | 44.02              | 54.00             | -9.98          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

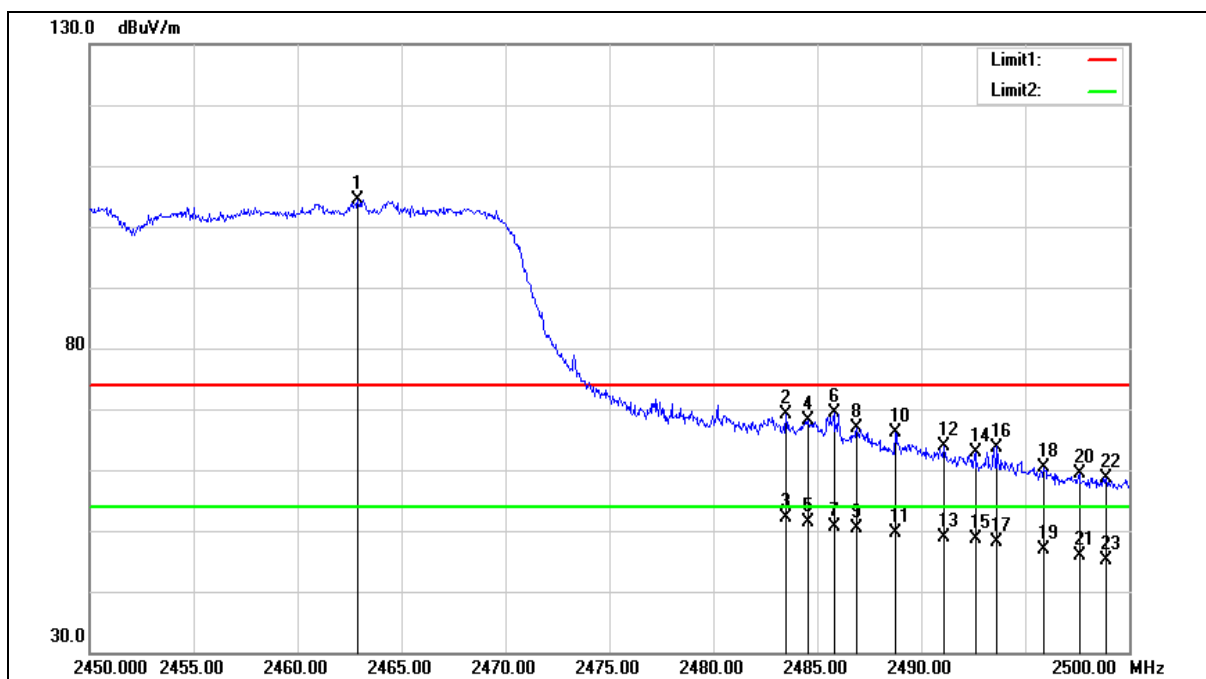

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2462.900        | 104.97         | -0.50                 | 104.47          | --             | --          | peak   |
| 2   | 2483.500        | 69.47          | -0.40                 | 69.07           | 74.00          | -4.93       | peak   |
| 3   | 2483.500        | 52.53          | -0.40                 | 52.13           | 54.00          | -1.87       | AVG    |
| 4   | 2484.550        | 68.48          | -0.39                 | 68.09           | 74.00          | -5.91       | peak   |
| 5   | 2484.550        | 51.67          | -0.39                 | 51.28           | 54.00          | -2.72       | AVG    |
| 6   | 2485.800        | 69.70          | -0.38                 | 69.32           | 74.00          | -4.68       | peak   |
| 7   | 2485.800        | 51.06          | -0.38                 | 50.68           | 54.00          | -3.32       | AVG    |
| 8   | 2486.900        | 67.25          | -0.37                 | 66.88           | 74.00          | -7.12       | peak   |
| 9   | 2486.900        | 50.63          | -0.37                 | 50.26           | 54.00          | -3.74       | AVG    |
| 10  | 2488.750        | 66.41          | -0.37                 | 66.04           | 74.00          | -7.96       | peak   |
| 11  | 2488.750        | 50.08          | -0.37                 | 49.71           | 54.00          | -4.29       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2491.100           | 64.12             | -0.36                    | 63.76              | 74.00             | -10.24         | peak   |
| 13  | 2491.100           | 49.16             | -0.36                    | 48.80              | 54.00             | -5.20          | AVG    |
| 14  | 2492.600           | 63.11             | -0.35                    | 62.76              | 74.00             | -11.24         | peak   |
| 15  | 2492.600           | 48.93             | -0.35                    | 48.58              | 54.00             | -5.42          | AVG    |
| 16  | 2493.650           | 64.09             | -0.34                    | 63.75              | 74.00             | -10.25         | peak   |
| 17  | 2493.650           | 48.57             | -0.34                    | 48.23              | 54.00             | -5.77          | AVG    |
| 18  | 2495.900           | 60.59             | -0.33                    | 60.26              | 74.00             | -13.74         | peak   |
| 19  | 2495.900           | 47.15             | -0.33                    | 46.82              | 54.00             | -7.18          | AVG    |
| 20  | 2497.600           | 59.61             | -0.32                    | 59.29              | 74.00             | -14.71         | peak   |
| 21  | 2497.600           | 46.18             | -0.32                    | 45.86              | 54.00             | -8.14          | AVG    |
| 22  | 2498.900           | 59.04             | -0.31                    | 58.73              | 74.00             | -15.27         | peak   |
| 23  | 2498.900           | 45.42             | -0.31                    | 45.11              | 54.00             | -8.89          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

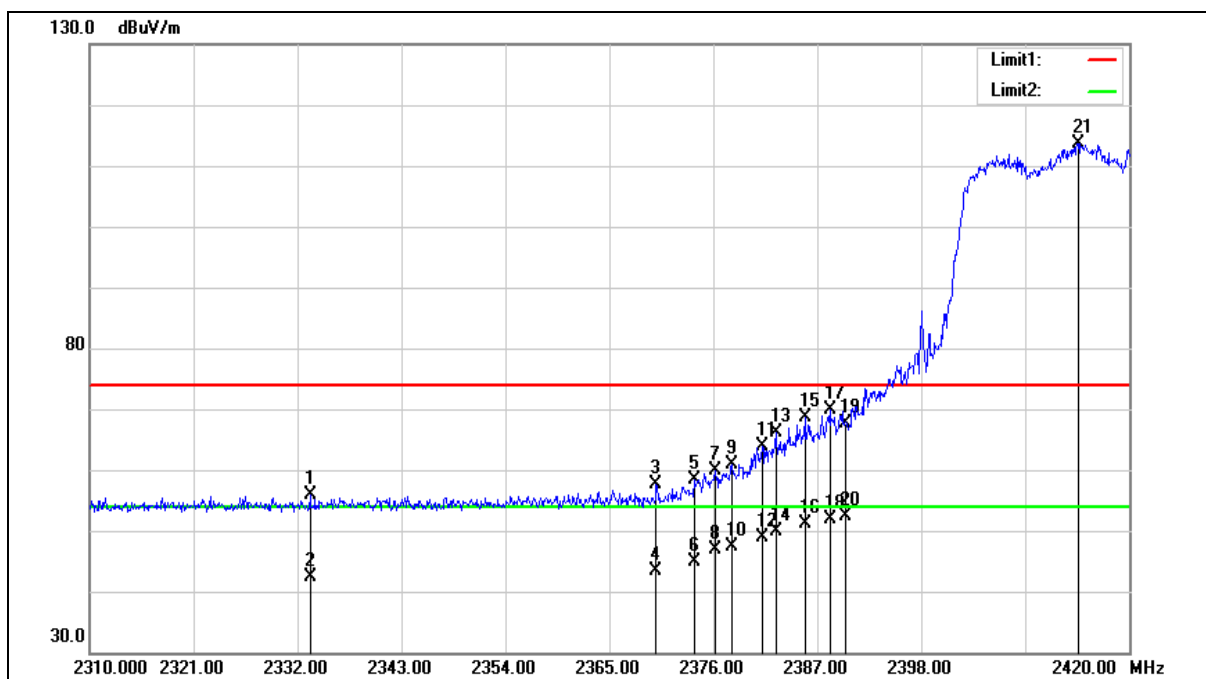

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2333.320        | 57.01          | -1.16                 | 55.85           | 74.00          | -18.15      | peak   |
| 2   | 2333.320        | 43.43          | -1.16                 | 42.27           | 54.00          | -11.73      | AVG    |
| 3   | 2369.950        | 58.60          | -0.97                 | 57.63           | 74.00          | -16.37      | peak   |
| 4   | 2369.950        | 44.32          | -0.97                 | 43.35           | 54.00          | -10.65      | AVG    |
| 5   | 2374.020        | 59.38          | -0.96                 | 58.42           | 74.00          | -15.58      | peak   |
| 6   | 2374.020        | 45.79          | -0.96                 | 44.83           | 54.00          | -9.17       | AVG    |
| 7   | 2376.220        | 60.85          | -0.94                 | 59.91           | 74.00          | -14.09      | peak   |
| 8   | 2376.220        | 47.86          | -0.94                 | 46.92           | 54.00          | -7.08       | AVG    |
| 9   | 2377.980        | 61.93          | -0.93                 | 61.00           | 74.00          | -13.00      | peak   |
| 10  | 2377.980        | 48.32          | -0.93                 | 47.39           | 54.00          | -6.61       | AVG    |
| 11  | 2381.170        | 64.91          | -0.91                 | 64.00           | 74.00          | -10.00      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2381.170           | 49.68             | -0.91                    | 48.77              | 54.00             | -5.23          | AVG    |
| 13  | 2382.600           | 67.15             | -0.91                    | 66.24              | 74.00             | -7.76          | peak   |
| 14  | 2382.600           | 50.69             | -0.91                    | 49.78              | 54.00             | -4.22          | AVG    |
| 15  | 2385.680           | 69.53             | -0.90                    | 68.63              | 74.00             | -5.37          | peak   |
| 16  | 2385.680           | 52.02             | -0.90                    | 51.12              | 54.00             | -2.88          | AVG    |
| 17  | 2388.320           | 70.69             | -0.88                    | 69.81              | 74.00             | -4.19          | peak   |
| 18  | 2388.320           | 52.85             | -0.88                    | 51.97              | 54.00             | -2.03          | AVG    |
| 19  | 2390.000           | 68.55             | -0.87                    | 67.68              | 74.00             | -6.32          | peak   |
| 20  | 2390.000           | 53.32             | -0.87                    | 52.45              | 54.00             | -1.55          | AVG    |
| 21  | 2414.610           | 114.39            | -0.75                    | 113.64             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

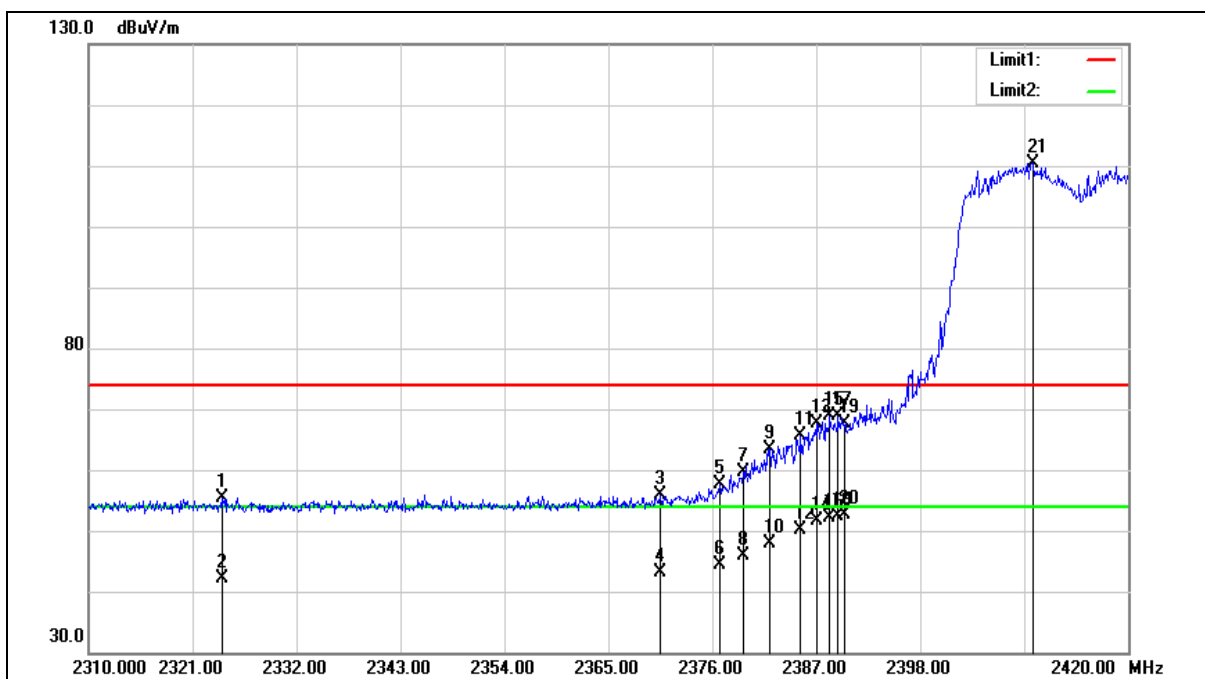

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2324.080        | 56.67          | -1.20                 | 55.47           | 74.00          | -18.53      | peak   |
| 2   | 2324.080        | 43.32          | -1.20                 | 42.12           | 54.00          | -11.88      | AVG    |
| 3   | 2370.500        | 56.87          | -0.97                 | 55.90           | 74.00          | -18.10      | peak   |
| 4   | 2370.500        | 44.07          | -0.97                 | 43.10           | 54.00          | -10.90      | AVG    |
| 5   | 2376.770        | 58.50          | -0.94                 | 57.56           | 74.00          | -16.44      | peak   |
| 6   | 2376.770        | 45.36          | -0.94                 | 44.42           | 54.00          | -9.58       | AVG    |
| 7   | 2379.300        | 60.52          | -0.93                 | 59.59           | 74.00          | -14.41      | peak   |
| 8   | 2379.300        | 46.92          | -0.93                 | 45.99           | 54.00          | -8.01       | AVG    |
| 9   | 2382.050        | 64.28          | -0.91                 | 63.37           | 74.00          | -10.63      | peak   |
| 10  | 2382.050        | 48.84          | -0.91                 | 47.93           | 54.00          | -6.07       | AVG    |
| 11  | 2385.350        | 66.54          | -0.90                 | 65.64           | 74.00          | -8.36       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2385.350           | 50.92             | -0.90                    | 50.02              | 54.00             | -3.98          | AVG    |
| 13  | 2387.000           | 68.46             | -0.88                    | 67.58              | 74.00             | -6.42          | peak   |
| 14  | 2387.000           | 52.51             | -0.88                    | 51.63              | 54.00             | -2.37          | AVG    |
| 15  | 2388.430           | 69.66             | -0.88                    | 68.78              | 74.00             | -5.22          | peak   |
| 16  | 2388.430           | 52.98             | -0.88                    | 52.10              | 54.00             | -1.90          | AVG    |
| 17  | 2389.310           | 69.84             | -0.88                    | 68.96              | 74.00             | -5.04          | peak   |
| 18  | 2389.310           | 53.30             | -0.88                    | 52.42              | 54.00             | -1.58          | AVG    |
| 19  | 2390.000           | 68.43             | -0.87                    | 67.56              | 74.00             | -6.44          | peak   |
| 20  | 2390.000           | 53.60             | -0.87                    | 52.73              | 54.00             | -1.27          | AVG    |
| 21  | 2409.990           | 111.17            | -0.77                    | 110.40             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

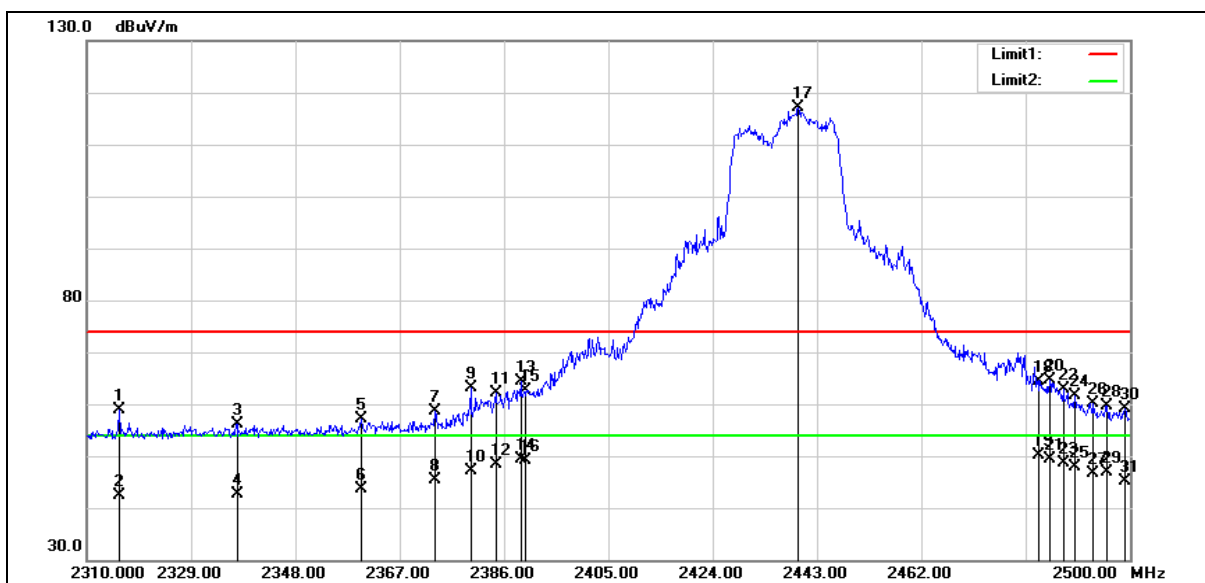

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2315.890        | 60.08          | -1.25                 | 58.83           | 74.00          | -15.17      | peak   |
| 2   | 2315.890        | 43.53          | -1.25                 | 42.28           | 54.00          | -11.72      | AVG    |
| 3   | 2337.360        | 57.26          | -1.13                 | 56.13           | 74.00          | -17.87      | peak   |
| 4   | 2337.360        | 43.72          | -1.13                 | 42.59           | 54.00          | -11.41      | AVG    |
| 5   | 2359.970        | 58.07          | -1.03                 | 57.04           | 74.00          | -16.96      | peak   |
| 6   | 2359.970        | 44.54          | -1.03                 | 43.51           | 54.00          | -10.49      | AVG    |
| 7   | 2373.460        | 59.51          | -0.96                 | 58.55           | 74.00          | -15.45      | peak   |
| 8   | 2373.460        | 46.44          | -0.96                 | 45.48           | 54.00          | -8.52       | AVG    |
| 9   | 2379.920        | 64.11          | -0.93                 | 63.18           | 74.00          | -10.82      | peak   |
| 10  | 2379.920        | 48.16          | -0.93                 | 47.23           | 54.00          | -6.77       | AVG    |
| 11  | 2384.480        | 63.00          | -0.90                 | 62.10           | 74.00          | -11.90      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2384.480           | 49.35             | -0.90                    | 48.45              | 54.00             | -5.55          | AVG    |
| 13  | 2389.040           | 65.28             | -0.88                    | 64.40              | 74.00             | -9.60          | peak   |
| 14  | 2389.040           | 50.18             | -0.88                    | 49.30              | 54.00             | -4.70          | AVG    |
| 15  | 2390.000           | 63.40             | -0.87                    | 62.53              | 74.00             | -11.47         | peak   |
| 16  | 2390.000           | 50.00             | -0.87                    | 49.13              | 54.00             | -4.87          | AVG    |
| 17  | 2439.580           | 117.66            | -0.62                    | 117.04             | --                | --             | peak   |
| 18  | 2483.500           | 64.66             | -0.40                    | 64.26              | 74.00             | -9.74          | peak   |
| 19  | 2483.500           | 50.42             | -0.40                    | 50.02              | 54.00             | -3.98          | AVG    |
| 20  | 2485.370           | 64.90             | -0.39                    | 64.51              | 74.00             | -9.49          | peak   |
| 21  | 2485.370           | 49.65             | -0.39                    | 49.26              | 54.00             | -4.74          | AVG    |
| 22  | 2487.840           | 63.21             | -0.37                    | 62.84              | 74.00             | -11.16         | peak   |
| 23  | 2487.840           | 48.88             | -0.37                    | 48.51              | 54.00             | -5.49          | AVG    |
| 24  | 2489.930           | 62.09             | -0.36                    | 61.73              | 74.00             | -12.27         | peak   |
| 25  | 2489.930           | 48.18             | -0.36                    | 47.82              | 54.00             | -6.18          | AVG    |
| 26  | 2493.350           | 60.57             | -0.34                    | 60.23              | 74.00             | -13.77         | peak   |
| 27  | 2493.350           | 46.97             | -0.34                    | 46.63              | 54.00             | -7.37          | AVG    |
| 28  | 2495.820           | 60.06             | -0.33                    | 59.73              | 74.00             | -14.27         | peak   |
| 29  | 2495.820           | 47.09             | -0.33                    | 46.76              | 54.00             | -7.24          | AVG    |
| 30  | 2499.050           | 59.38             | -0.31                    | 59.07              | 74.00             | -14.93         | peak   |
| 31  | 2499.050           | 45.54             | -0.31                    | 45.23              | 54.00             | -8.77          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

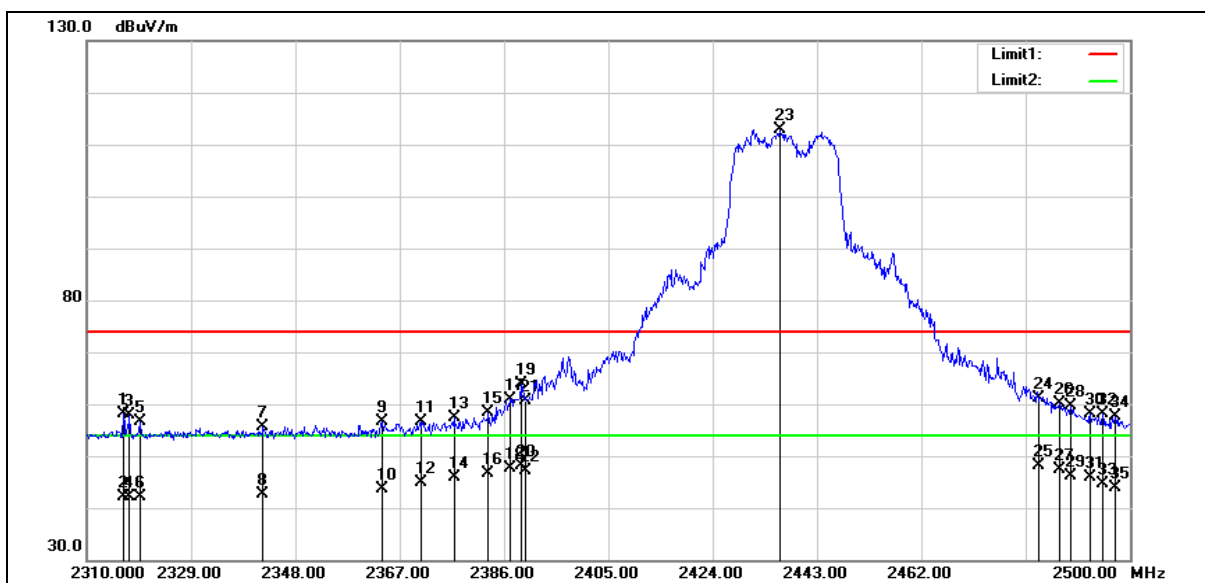

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2316.650        | 59.32          | -1.24                 | 58.08           | 74.00          | -15.92      | peak   |
| 2   | 2316.650        | 43.42          | -1.24                 | 42.18           | 54.00          | -11.82      | AVG    |
| 3   | 2317.790        | 59.14          | -1.23                 | 57.91           | 74.00          | -16.09      | peak   |
| 4   | 2317.790        | 43.36          | -1.23                 | 42.13           | 54.00          | -11.87      | AVG    |
| 5   | 2319.690        | 57.73          | -1.22                 | 56.51           | 74.00          | -17.49      | peak   |
| 6   | 2319.690        | 43.47          | -1.22                 | 42.25           | 54.00          | -11.75      | AVG    |
| 7   | 2342.110        | 56.72          | -1.11                 | 55.61           | 74.00          | -18.39      | peak   |
| 8   | 2342.110        | 43.68          | -1.11                 | 42.57           | 54.00          | -11.43      | AVG    |
| 9   | 2363.770        | 57.51          | -1.00                 | 56.51           | 74.00          | -17.49      | peak   |
| 10  | 2363.770        | 44.58          | -1.00                 | 43.58           | 54.00          | -10.42      | AVG    |
| 11  | 2370.800        | 57.49          | -0.97                 | 56.52           | 74.00          | -17.48      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2370.800           | 45.75             | -0.97                    | 44.78              | 54.00             | -9.22          | AVG    |
| 13  | 2376.880           | 58.29             | -0.94                    | 57.35              | 74.00             | -16.65         | peak   |
| 14  | 2376.880           | 46.92             | -0.94                    | 45.98              | 54.00             | -8.02          | AVG    |
| 15  | 2383.150           | 59.22             | -0.91                    | 58.31              | 74.00             | -15.69         | peak   |
| 16  | 2383.150           | 47.50             | -0.91                    | 46.59              | 54.00             | -7.41          | AVG    |
| 17  | 2387.140           | 61.71             | -0.88                    | 60.83              | 74.00             | -13.17         | peak   |
| 18  | 2387.140           | 48.46             | -0.88                    | 47.58              | 54.00             | -6.42          | AVG    |
| 19  | 2389.040           | 64.72             | -0.88                    | 63.84              | 74.00             | -10.16         | peak   |
| 20  | 2389.040           | 49.06             | -0.88                    | 48.18              | 54.00             | -5.82          | AVG    |
| 21  | 2390.000           | 61.52             | -0.87                    | 60.65              | 74.00             | -13.35         | peak   |
| 22  | 2390.000           | 48.04             | -0.87                    | 47.17              | 54.00             | -6.83          | AVG    |
| 23  | 2436.350           | 113.58            | -0.64                    | 112.94             | --                | --             | peak   |
| 24  | 2483.500           | 61.45             | -0.40                    | 61.05              | 74.00             | -12.95         | peak   |
| 25  | 2483.500           | 48.60             | -0.40                    | 48.20              | 54.00             | -5.80          | AVG    |
| 26  | 2487.270           | 60.60             | -0.37                    | 60.23              | 74.00             | -13.77         | peak   |
| 27  | 2487.270           | 47.87             | -0.37                    | 47.50              | 54.00             | -6.50          | AVG    |
| 28  | 2489.170           | 60.10             | -0.37                    | 59.73              | 74.00             | -14.27         | peak   |
| 29  | 2489.170           | 46.55             | -0.37                    | 46.18              | 54.00             | -7.82          | AVG    |
| 30  | 2492.780           | 58.36             | -0.34                    | 58.02              | 74.00             | -15.98         | peak   |
| 31  | 2492.780           | 46.16             | -0.34                    | 45.82              | 54.00             | -8.18          | AVG    |
| 32  | 2495.060           | 58.50             | -0.34                    | 58.16              | 74.00             | -15.84         | peak   |
| 33  | 2495.060           | 45.01             | -0.34                    | 44.67              | 54.00             | -9.33          | AVG    |
| 34  | 2497.340           | 57.90             | -0.32                    | 57.58              | 74.00             | -16.42         | peak   |
| 35  | 2497.340           | 44.15             | -0.32                    | 43.83              | 54.00             | -10.17         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

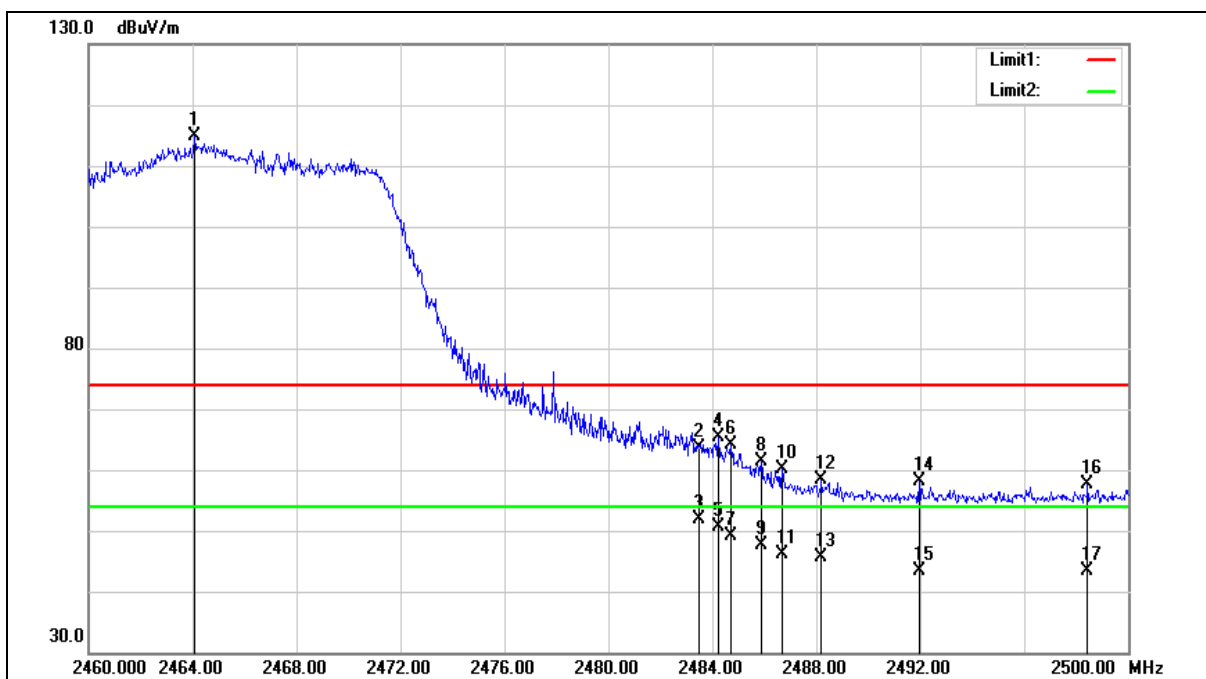

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2464.080        | 115.33         | -0.49                 | 114.84          | --             | --          | peak   |
| 2   | 2483.500        | 64.12          | -0.40                 | 63.72           | 74.00          | -10.28      | peak   |
| 3   | 2483.500        | 52.29          | -0.40                 | 51.89           | 54.00          | -2.11       | AVG    |
| 4   | 2484.240        | 65.68          | -0.39                 | 65.29           | 74.00          | -8.71       | peak   |
| 5   | 2484.240        | 51.06          | -0.39                 | 50.67           | 54.00          | -3.33       | AVG    |
| 6   | 2484.720        | 64.51          | -0.39                 | 64.12           | 74.00          | -9.88       | peak   |
| 7   | 2484.720        | 49.64          | -0.39                 | 49.25           | 54.00          | -4.75       | AVG    |
| 8   | 2485.880        | 61.65          | -0.38                 | 61.27           | 74.00          | -12.73      | peak   |
| 9   | 2485.880        | 48.03          | -0.38                 | 47.65           | 54.00          | -6.35       | AVG    |
| 10  | 2486.680        | 60.53          | -0.38                 | 60.15           | 74.00          | -13.85      | peak   |
| 11  | 2486.680        | 46.54          | -0.38                 | 46.16           | 54.00          | -7.84       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2488.200           | 58.79             | -0.37                    | 58.42              | 74.00             | -15.58         | peak   |
| 13  | 2488.200           | 46.06             | -0.37                    | 45.69              | 54.00             | -8.31          | AVG    |
| 14  | 2491.960           | 58.44             | -0.35                    | 58.09              | 74.00             | -15.91         | peak   |
| 15  | 2491.960           | 43.73             | -0.35                    | 43.38              | 54.00             | -10.62         | AVG    |
| 16  | 2498.440           | 57.86             | -0.32                    | 57.54              | 74.00             | -16.46         | peak   |
| 17  | 2498.440           | 43.63             | -0.32                    | 43.31              | 54.00             | -10.69         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

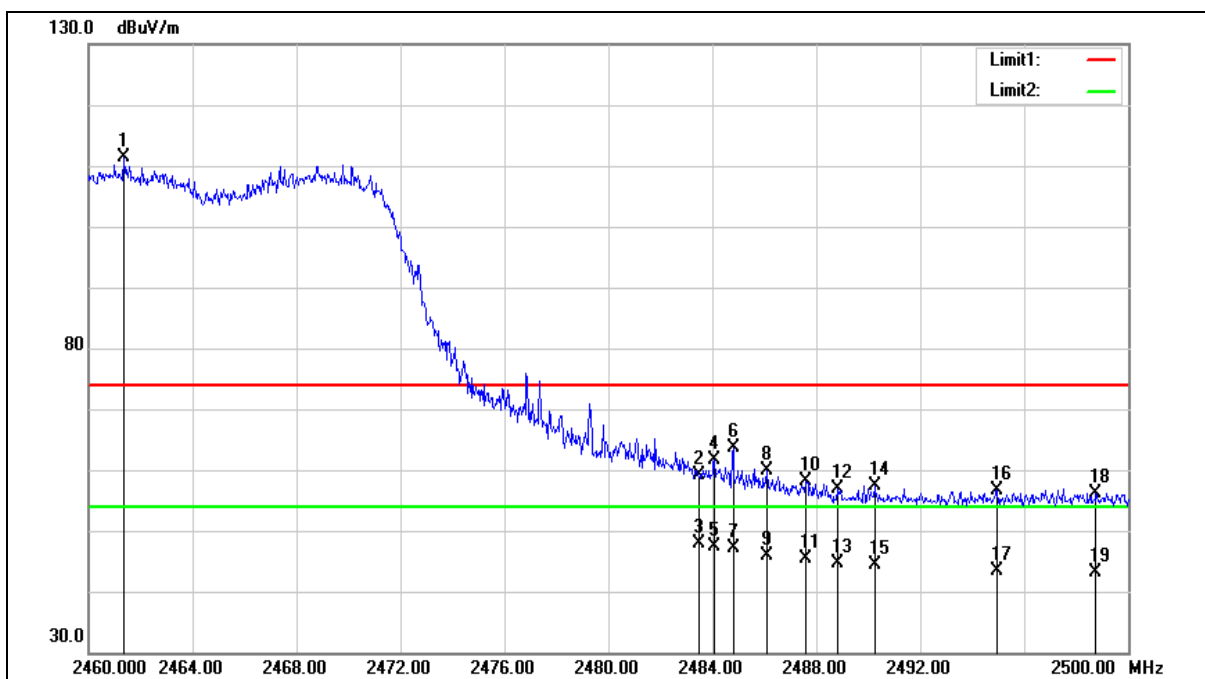

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2461.360        | 111.95         | -0.51                 | 111.44          | --             | --          | peak   |
| 2   | 2483.500        | 59.56          | -0.40                 | 59.16           | 74.00          | -14.84      | peak   |
| 3   | 2483.500        | 48.18          | -0.40                 | 47.78           | 54.00          | -6.22       | AVG    |
| 4   | 2484.080        | 61.99          | -0.39                 | 61.60           | 74.00          | -12.40      | peak   |
| 5   | 2484.080        | 47.78          | -0.39                 | 47.39           | 54.00          | -6.61       | AVG    |
| 6   | 2484.800        | 63.97          | -0.39                 | 63.58           | 74.00          | -10.42      | peak   |
| 7   | 2484.800        | 47.49          | -0.39                 | 47.10           | 54.00          | -6.90       | AVG    |
| 8   | 2486.080        | 60.26          | -0.38                 | 59.88           | 74.00          | -14.12      | peak   |
| 9   | 2486.080        | 46.34          | -0.38                 | 45.96           | 54.00          | -8.04       | AVG    |
| 10  | 2487.600        | 58.40          | -0.37                 | 58.03           | 74.00          | -15.97      | peak   |
| 11  | 2487.600        | 45.72          | -0.37                 | 45.35           | 54.00          | -8.65       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2488.800           | 57.29             | -0.37                    | 56.92              | 74.00             | -17.08         | peak   |
| 13  | 2488.800           | 45.11             | -0.37                    | 44.74              | 54.00             | -9.26          | AVG    |
| 14  | 2490.240           | 57.68             | -0.36                    | 57.32              | 74.00             | -16.68         | peak   |
| 15  | 2490.240           | 44.72             | -0.36                    | 44.36              | 54.00             | -9.64          | AVG    |
| 16  | 2494.960           | 56.98             | -0.34                    | 56.64              | 74.00             | -17.36         | peak   |
| 17  | 2494.960           | 43.61             | -0.34                    | 43.27              | 54.00             | -10.73         | AVG    |
| 18  | 2498.760           | 56.46             | -0.31                    | 56.15              | 74.00             | -17.85         | peak   |
| 19  | 2498.760           | 43.47             | -0.31                    | 43.16              | 54.00             | -10.84         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

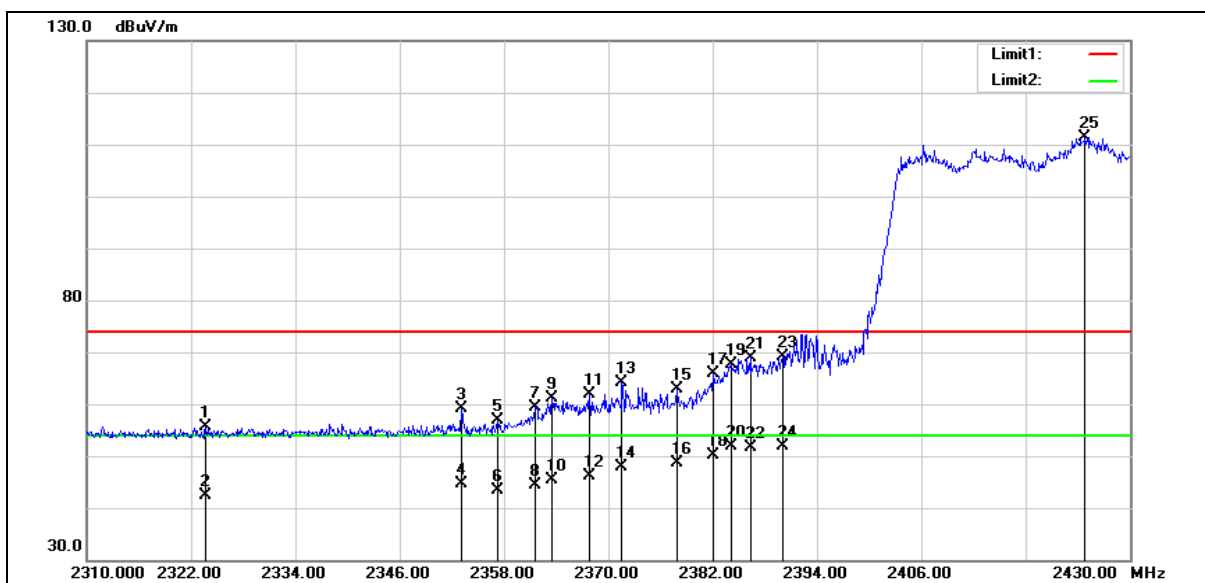

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2323.680        | 56.89          | -1.20                 | 55.69           | 74.00          | -18.31      | peak   |
| 2   | 2323.680        | 43.51          | -1.20                 | 42.31           | 54.00          | -11.69      | AVG    |
| 3   | 2353.080        | 60.08          | -1.05                 | 59.03           | 74.00          | -14.97      | peak   |
| 4   | 2353.080        | 45.73          | -1.05                 | 44.68           | 54.00          | -9.32       | AVG    |
| 5   | 2357.280        | 57.94          | -1.05                 | 56.89           | 74.00          | -17.11      | peak   |
| 6   | 2357.280        | 44.43          | -1.05                 | 43.38           | 54.00          | -10.62      | AVG    |
| 7   | 2361.600        | 60.48          | -1.02                 | 59.46           | 74.00          | -14.54      | peak   |
| 8   | 2361.600        | 45.44          | -1.02                 | 44.42           | 54.00          | -9.58       | AVG    |
| 9   | 2363.520        | 62.18          | -1.00                 | 61.18           | 74.00          | -12.82      | peak   |
| 10  | 2363.520        | 46.49          | -1.00                 | 45.49           | 54.00          | -8.51       | AVG    |
| 11  | 2367.840        | 62.80          | -0.99                 | 61.81           | 74.00          | -12.19      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2367.840           | 47.23             | -0.99                    | 46.24              | 54.00             | -7.76          | AVG    |
| 13  | 2371.560           | 65.18             | -0.97                    | 64.21              | 74.00             | -9.79          | peak   |
| 14  | 2371.560           | 48.84             | -0.97                    | 47.87              | 54.00             | -6.13          | AVG    |
| 15  | 2377.920           | 63.93             | -0.94                    | 62.99              | 74.00             | -11.01         | peak   |
| 16  | 2377.920           | 49.57             | -0.94                    | 48.63              | 54.00             | -5.37          | AVG    |
| 17  | 2382.120           | 66.68             | -0.91                    | 65.77              | 74.00             | -8.23          | peak   |
| 18  | 2382.120           | 51.08             | -0.91                    | 50.17              | 54.00             | -3.83          | AVG    |
| 19  | 2384.160           | 68.45             | -0.90                    | 67.55              | 74.00             | -6.45          | peak   |
| 20  | 2384.160           | 52.79             | -0.90                    | 51.89              | 54.00             | -2.11          | AVG    |
| 21  | 2386.320           | 69.83             | -0.90                    | 68.93              | 74.00             | -5.07          | peak   |
| 22  | 2386.320           | 52.48             | -0.90                    | 51.58              | 54.00             | -2.42          | AVG    |
| 23  | 2390.000           | 70.03             | -0.87                    | 69.16              | 74.00             | -4.84          | peak   |
| 24  | 2390.000           | 52.83             | -0.87                    | 51.96              | 54.00             | -2.04          | AVG    |
| 25  | 2424.840           | 112.06            | -0.70                    | 111.36             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

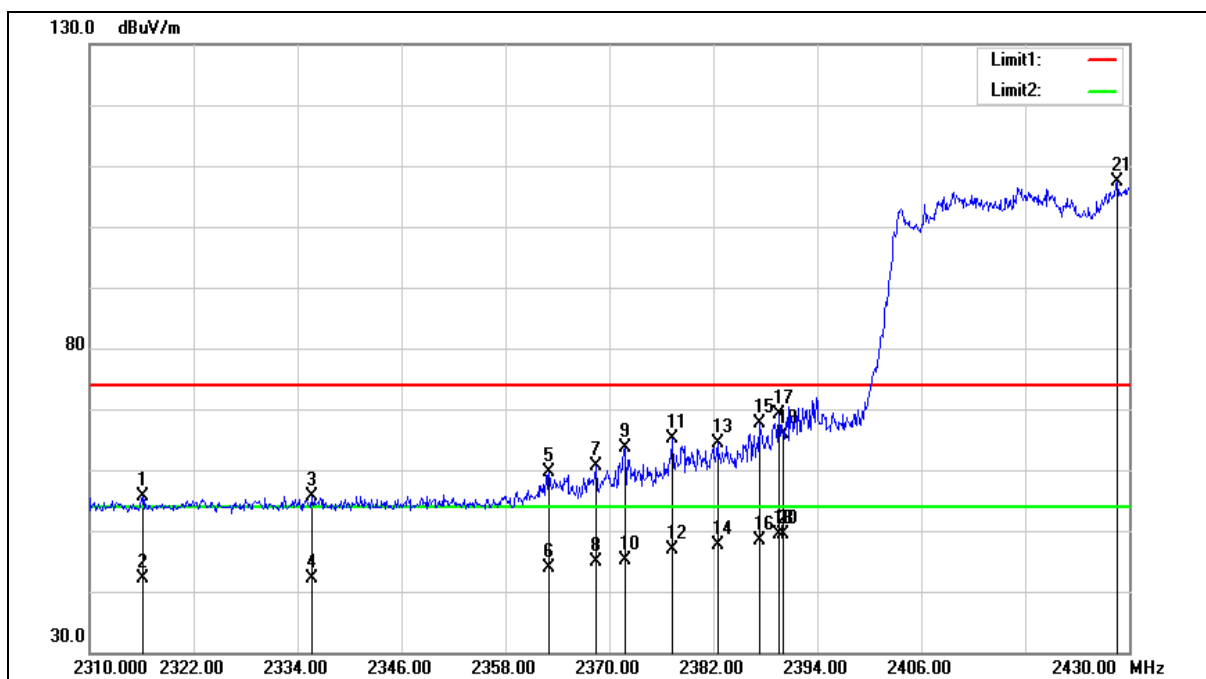

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2316.120        | 56.82          | -1.25                 | 55.57           | 74.00          | -18.43      | peak   |
| 2   | 2316.120        | 43.27          | -1.25                 | 42.02           | 54.00          | -11.98      | AVG    |
| 3   | 2335.680        | 56.84          | -1.14                 | 55.70           | 74.00          | -18.30      | peak   |
| 4   | 2335.680        | 43.33          | -1.14                 | 42.19           | 54.00          | -11.81      | AVG    |
| 5   | 2363.040        | 60.65          | -1.02                 | 59.63           | 74.00          | -14.37      | peak   |
| 6   | 2363.040        | 45.00          | -1.02                 | 43.98           | 54.00          | -10.02      | AVG    |
| 7   | 2368.440        | 61.57          | -0.99                 | 60.58           | 74.00          | -13.42      | peak   |
| 8   | 2368.440        | 45.83          | -0.99                 | 44.84           | 54.00          | -9.16       | AVG    |
| 9   | 2371.800        | 64.66          | -0.97                 | 63.69           | 74.00          | -10.31      | peak   |
| 10  | 2371.800        | 46.03          | -0.97                 | 45.06           | 54.00          | -8.94       | AVG    |
| 11  | 2377.200        | 66.10          | -0.94                 | 65.16           | 74.00          | -8.84       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2377.200           | 47.72             | -0.94                    | 46.78              | 54.00             | -7.22          | AVG    |
| 13  | 2382.480           | 65.20             | -0.91                    | 64.29              | 74.00             | -9.71          | peak   |
| 14  | 2382.480           | 48.49             | -0.91                    | 47.58              | 54.00             | -6.42          | AVG    |
| 15  | 2387.280           | 68.61             | -0.88                    | 67.73              | 74.00             | -6.27          | peak   |
| 16  | 2387.280           | 49.34             | -0.88                    | 48.46              | 54.00             | -5.54          | AVG    |
| 17  | 2389.560           | 70.01             | -0.88                    | 69.13              | 74.00             | -4.87          | peak   |
| 18  | 2389.560           | 50.23             | -0.88                    | 49.35              | 54.00             | -4.65          | AVG    |
| 19  | 2390.000           | 66.80             | -0.87                    | 65.93              | 74.00             | -8.07          | peak   |
| 20  | 2390.000           | 50.28             | -0.87                    | 49.41              | 54.00             | -4.59          | AVG    |
| 21  | 2428.560           | 107.97            | -0.67                    | 107.30             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

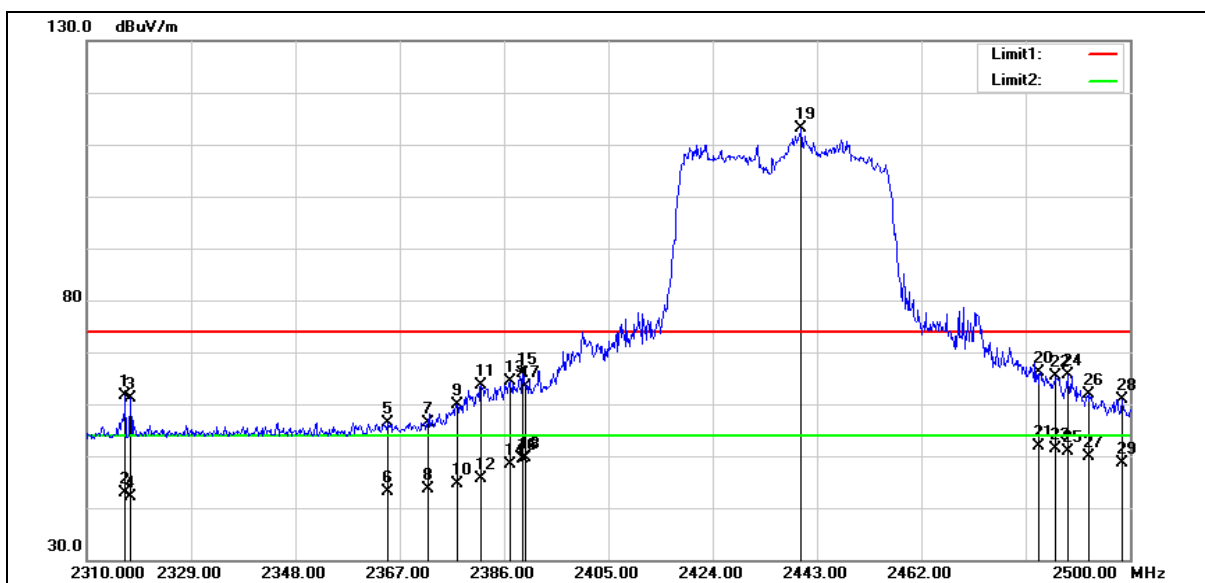

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2317.030        | 62.80          | -1.23                 | 61.57           | 74.00          | -12.43      | peak   |
| 2   | 2317.030        | 44.19          | -1.23                 | 42.96           | 54.00          | -11.04      | AVG    |
| 3   | 2317.980        | 62.48          | -1.23                 | 61.25           | 74.00          | -12.75      | peak   |
| 4   | 2317.980        | 43.46          | -1.23                 | 42.23           | 54.00          | -11.77      | AVG    |
| 5   | 2364.910        | 57.48          | -1.00                 | 56.48           | 74.00          | -17.52      | peak   |
| 6   | 2364.910        | 44.19          | -1.00                 | 43.19           | 54.00          | -10.81      | AVG    |
| 7   | 2372.130        | 57.43          | -0.96                 | 56.47           | 74.00          | -17.53      | peak   |
| 8   | 2372.130        | 44.50          | -0.96                 | 43.54           | 54.00          | -10.46      | AVG    |
| 9   | 2377.450        | 60.90          | -0.94                 | 59.96           | 74.00          | -14.04      | peak   |
| 10  | 2377.450        | 45.61          | -0.94                 | 44.67           | 54.00          | -9.33       | AVG    |
| 11  | 2381.820        | 64.43          | -0.91                 | 63.52           | 74.00          | -10.48      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2381.820           | 46.52             | -0.91                    | 45.61              | 54.00             | -8.39          | AVG    |
| 13  | 2387.140           | 65.22             | -0.88                    | 64.34              | 74.00             | -9.66          | peak   |
| 14  | 2387.140           | 49.37             | -0.88                    | 48.49              | 54.00             | -5.51          | AVG    |
| 15  | 2389.420           | 66.69             | -0.88                    | 65.81              | 74.00             | -8.19          | peak   |
| 16  | 2389.420           | 50.35             | -0.88                    | 49.47              | 54.00             | -4.53          | AVG    |
| 17  | 2390.000           | 64.23             | -0.87                    | 63.36              | 74.00             | -10.64         | peak   |
| 18  | 2390.000           | 50.52             | -0.87                    | 49.65              | 54.00             | -4.35          | AVG    |
| 19  | 2440.150           | 113.67            | -0.61                    | 113.06             | --                | --             | peak   |
| 20  | 2483.500           | 66.60             | -0.40                    | 66.20              | 74.00             | -7.80          | peak   |
| 21  | 2483.500           | 52.36             | -0.40                    | 51.96              | 54.00             | -2.04          | AVG    |
| 22  | 2486.510           | 65.66             | -0.38                    | 65.28              | 74.00             | -8.72          | peak   |
| 23  | 2486.510           | 51.66             | -0.38                    | 51.28              | 54.00             | -2.72          | AVG    |
| 24  | 2488.600           | 66.07             | -0.37                    | 65.70              | 74.00             | -8.30          | peak   |
| 25  | 2488.600           | 51.20             | -0.37                    | 50.83              | 54.00             | -3.17          | AVG    |
| 26  | 2492.400           | 62.29             | -0.35                    | 61.94              | 74.00             | -12.06         | peak   |
| 27  | 2492.400           | 50.11             | -0.35                    | 49.76              | 54.00             | -4.24          | AVG    |
| 28  | 2498.480           | 61.27             | -0.32                    | 60.95              | 74.00             | -13.05         | peak   |
| 29  | 2498.480           | 48.92             | -0.32                    | 48.60              | 54.00             | -5.40          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

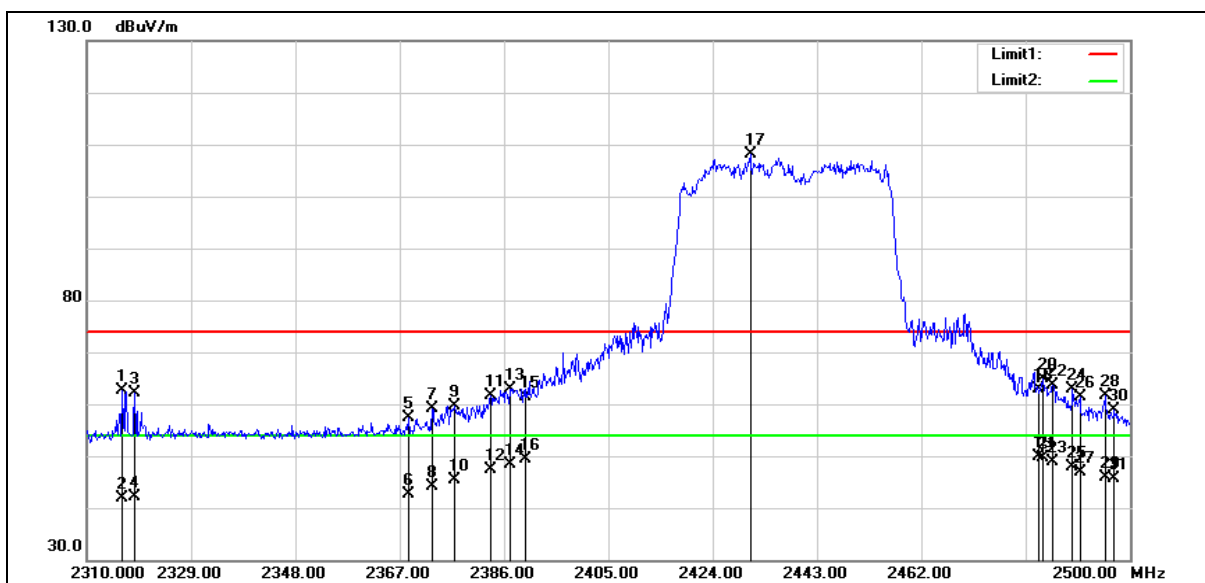

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2316.460        | 63.99          | -1.24                 | 62.75           | 74.00          | -11.25      | peak   |
| 2   | 2316.460        | 43.19          | -1.24                 | 41.95           | 54.00          | -12.05      | AVG    |
| 3   | 2318.740        | 63.28          | -1.23                 | 62.05           | 74.00          | -11.95      | peak   |
| 4   | 2318.740        | 43.30          | -1.23                 | 42.07           | 54.00          | -11.93      | AVG    |
| 5   | 2368.520        | 58.35          | -0.99                 | 57.36           | 74.00          | -16.64      | peak   |
| 6   | 2368.520        | 43.58          | -0.99                 | 42.59           | 54.00          | -11.41      | AVG    |
| 7   | 2372.890        | 60.19          | -0.96                 | 59.23           | 74.00          | -14.77      | peak   |
| 8   | 2372.890        | 45.14          | -0.96                 | 44.18           | 54.00          | -9.82       | AVG    |
| 9   | 2377.070        | 60.59          | -0.94                 | 59.65           | 74.00          | -14.35      | peak   |
| 10  | 2377.070        | 46.20          | -0.94                 | 45.26           | 54.00          | -8.74       | AVG    |
| 11  | 2383.530        | 62.58          | -0.91                 | 61.67           | 74.00          | -12.33      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2383.530           | 48.19             | -0.91                    | 47.28              | 54.00             | -6.72          | AVG    |
| 13  | 2387.140           | 63.82             | -0.88                    | 62.94              | 74.00             | -11.06         | peak   |
| 14  | 2387.140           | 49.31             | -0.88                    | 48.43              | 54.00             | -5.57          | AVG    |
| 15  | 2390.000           | 62.19             | -0.87                    | 61.32              | 74.00             | -12.68         | peak   |
| 16  | 2390.000           | 50.26             | -0.87                    | 49.39              | 54.00             | -4.61          | AVG    |
| 17  | 2430.840           | 108.90            | -0.67                    | 108.23             | --                | --             | peak   |
| 18  | 2483.500           | 63.25             | -0.40                    | 62.85              | 74.00             | -11.15         | peak   |
| 19  | 2483.500           | 50.33             | -0.40                    | 49.93              | 54.00             | -4.07          | AVG    |
| 20  | 2484.040           | 65.22             | -0.39                    | 64.83              | 74.00             | -9.17          | peak   |
| 21  | 2484.040           | 50.00             | -0.39                    | 49.61              | 54.00             | -4.39          | AVG    |
| 22  | 2485.940           | 63.90             | -0.38                    | 63.52              | 74.00             | -10.48         | peak   |
| 23  | 2485.940           | 49.20             | -0.38                    | 48.82              | 54.00             | -5.18          | AVG    |
| 24  | 2489.550           | 63.15             | -0.37                    | 62.78              | 74.00             | -11.22         | peak   |
| 25  | 2489.550           | 48.28             | -0.37                    | 47.91              | 54.00             | -6.09          | AVG    |
| 26  | 2490.880           | 61.85             | -0.36                    | 61.49              | 74.00             | -12.51         | peak   |
| 27  | 2490.880           | 47.23             | -0.36                    | 46.87              | 54.00             | -7.13          | AVG    |
| 28  | 2495.440           | 61.92             | -0.34                    | 61.58              | 74.00             | -12.42         | peak   |
| 29  | 2495.440           | 46.14             | -0.34                    | 45.80              | 54.00             | -8.20          | AVG    |
| 30  | 2497.150           | 59.19             | -0.32                    | 58.87              | 74.00             | -15.13         | peak   |
| 31  | 2497.150           | 46.05             | -0.32                    | 45.73              | 54.00             | -8.27          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

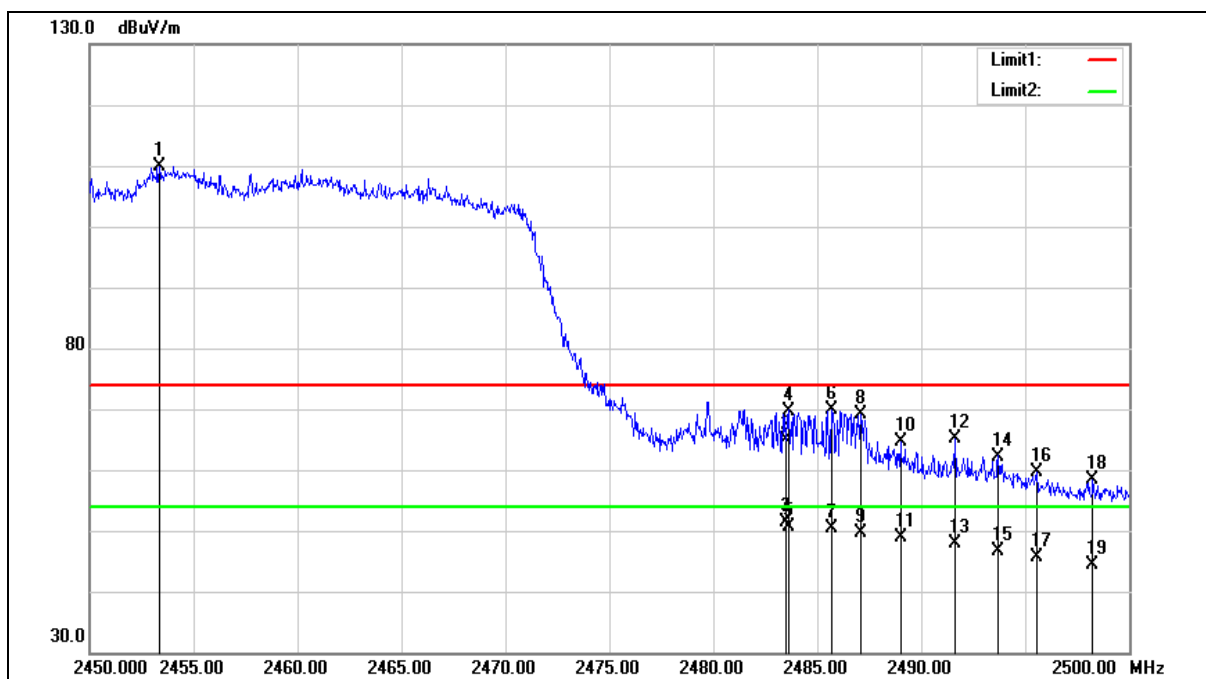

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2453.350        | 110.37         | -0.55                 | 109.82          | --             | --          | peak   |
| 2   | 2483.500        | 65.20          | -0.40                 | 64.80           | 74.00          | -9.20       | peak   |
| 3   | 2483.500        | 51.87          | -0.40                 | 51.47           | 54.00          | -2.53       | AVG    |
| 4   | 2483.600        | 70.15          | -0.40                 | 69.75           | 74.00          | -4.25       | peak   |
| 5   | 2483.600        | 51.05          | -0.40                 | 50.65           | 54.00          | -3.35       | AVG    |
| 6   | 2485.700        | 70.23          | -0.38                 | 69.85           | 74.00          | -4.15       | peak   |
| 7   | 2485.700        | 50.74          | -0.38                 | 50.36           | 54.00          | -3.64       | AVG    |
| 8   | 2487.100        | 69.58          | -0.37                 | 69.21           | 74.00          | -4.79       | peak   |
| 9   | 2487.100        | 49.91          | -0.37                 | 49.54           | 54.00          | -4.46       | AVG    |
| 10  | 2489.000        | 64.89          | -0.37                 | 64.52           | 74.00          | -9.48       | peak   |
| 11  | 2489.000        | 49.14          | -0.37                 | 48.77           | 54.00          | -5.23       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2491.600           | 65.58             | -0.35                    | 65.23              | 74.00             | -8.77          | peak   |
| 13  | 2491.600           | 48.33             | -0.35                    | 47.98              | 54.00             | -6.02          | AVG    |
| 14  | 2493.700           | 62.59             | -0.34                    | 62.25              | 74.00             | -11.75         | peak   |
| 15  | 2493.700           | 46.98             | -0.34                    | 46.64              | 54.00             | -7.36          | AVG    |
| 16  | 2495.550           | 60.05             | -0.34                    | 59.71              | 74.00             | -14.29         | peak   |
| 17  | 2495.550           | 45.98             | -0.34                    | 45.64              | 54.00             | -8.36          | AVG    |
| 18  | 2498.250           | 58.74             | -0.32                    | 58.42              | 74.00             | -15.58         | peak   |
| 19  | 2498.250           | 44.69             | -0.32                    | 44.37              | 54.00             | -9.63          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

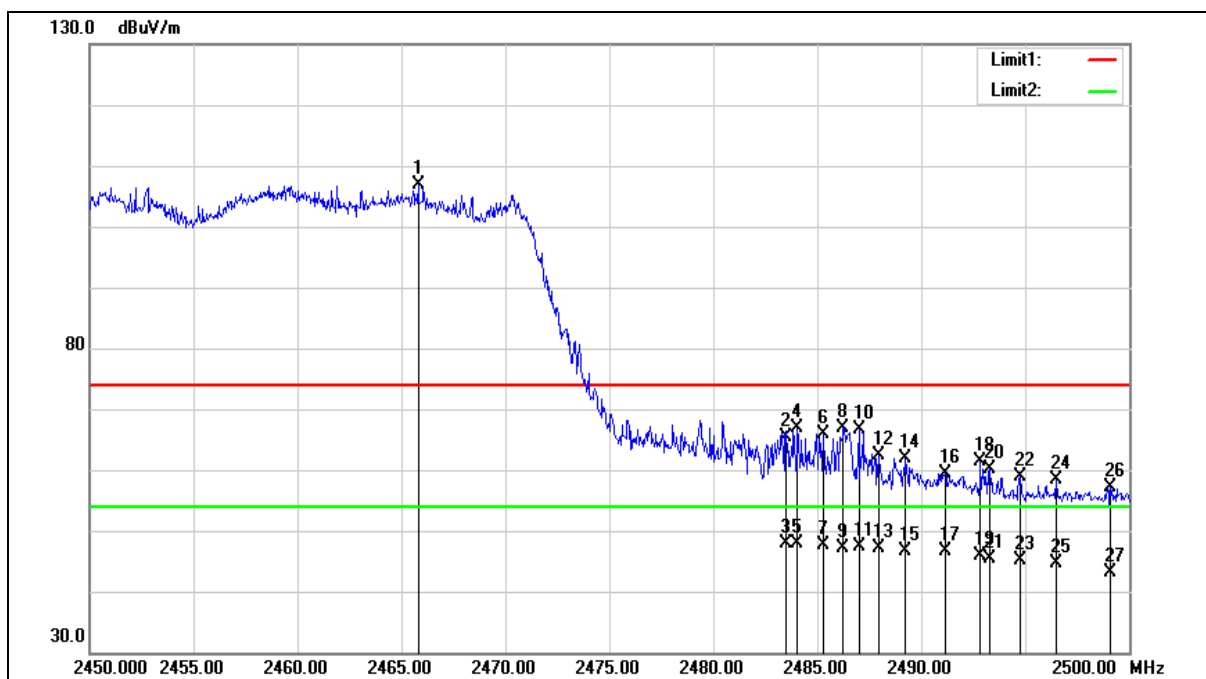

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2465.800        | 107.26         | -0.49                 | 106.77          | --             | --          | peak   |
| 2   | 2483.500        | 65.81          | -0.40                 | 65.41           | 74.00          | -8.59       | peak   |
| 3   | 2483.500        | 48.32          | -0.40                 | 47.92           | 54.00          | -6.08       | AVG    |
| 4   | 2484.050        | 67.17          | -0.39                 | 66.78           | 74.00          | -7.22       | peak   |
| 5   | 2484.050        | 48.29          | -0.39                 | 47.90           | 54.00          | -6.10       | AVG    |
| 6   | 2485.300        | 66.34          | -0.39                 | 65.95           | 74.00          | -8.05       | peak   |
| 7   | 2485.300        | 47.92          | -0.39                 | 47.53           | 54.00          | -6.47       | AVG    |
| 8   | 2486.250        | 67.17          | -0.38                 | 66.79           | 74.00          | -7.21       | peak   |
| 9   | 2486.250        | 47.59          | -0.38                 | 47.21           | 54.00          | -6.79       | AVG    |
| 10  | 2487.000        | 66.96          | -0.37                 | 66.59           | 74.00          | -7.41       | peak   |
| 11  | 2487.000        | 47.79          | -0.37                 | 47.42           | 54.00          | -6.58       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2487.950           | 62.64             | -0.37                    | 62.27              | 74.00             | -11.73         | peak   |
| 13  | 2487.950           | 47.46             | -0.37                    | 47.09              | 54.00             | -6.91          | AVG    |
| 14  | 2489.250           | 62.23             | -0.37                    | 61.86              | 74.00             | -12.14         | peak   |
| 15  | 2489.250           | 47.02             | -0.37                    | 46.65              | 54.00             | -7.35          | AVG    |
| 16  | 2491.150           | 59.81             | -0.36                    | 59.45              | 74.00             | -14.55         | peak   |
| 17  | 2491.150           | 47.01             | -0.36                    | 46.65              | 54.00             | -7.35          | AVG    |
| 18  | 2492.850           | 61.60             | -0.34                    | 61.26              | 74.00             | -12.74         | peak   |
| 19  | 2492.850           | 46.12             | -0.34                    | 45.78              | 54.00             | -8.22          | AVG    |
| 20  | 2493.300           | 60.43             | -0.34                    | 60.09              | 74.00             | -13.91         | peak   |
| 21  | 2493.300           | 45.64             | -0.34                    | 45.30              | 54.00             | -8.70          | AVG    |
| 22  | 2494.750           | 59.10             | -0.34                    | 58.76              | 74.00             | -15.24         | peak   |
| 23  | 2494.750           | 45.38             | -0.34                    | 45.04              | 54.00             | -8.96          | AVG    |
| 24  | 2496.500           | 58.59             | -0.33                    | 58.26              | 74.00             | -15.74         | peak   |
| 25  | 2496.500           | 44.93             | -0.33                    | 44.60              | 54.00             | -9.40          | AVG    |
| 26  | 2499.100           | 57.53             | -0.31                    | 57.22              | 74.00             | -16.78         | peak   |
| 27  | 2499.100           | 43.56             | -0.31                    | 43.25              | 54.00             | -10.75         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

### Beamforming on

Below 1 GHz

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

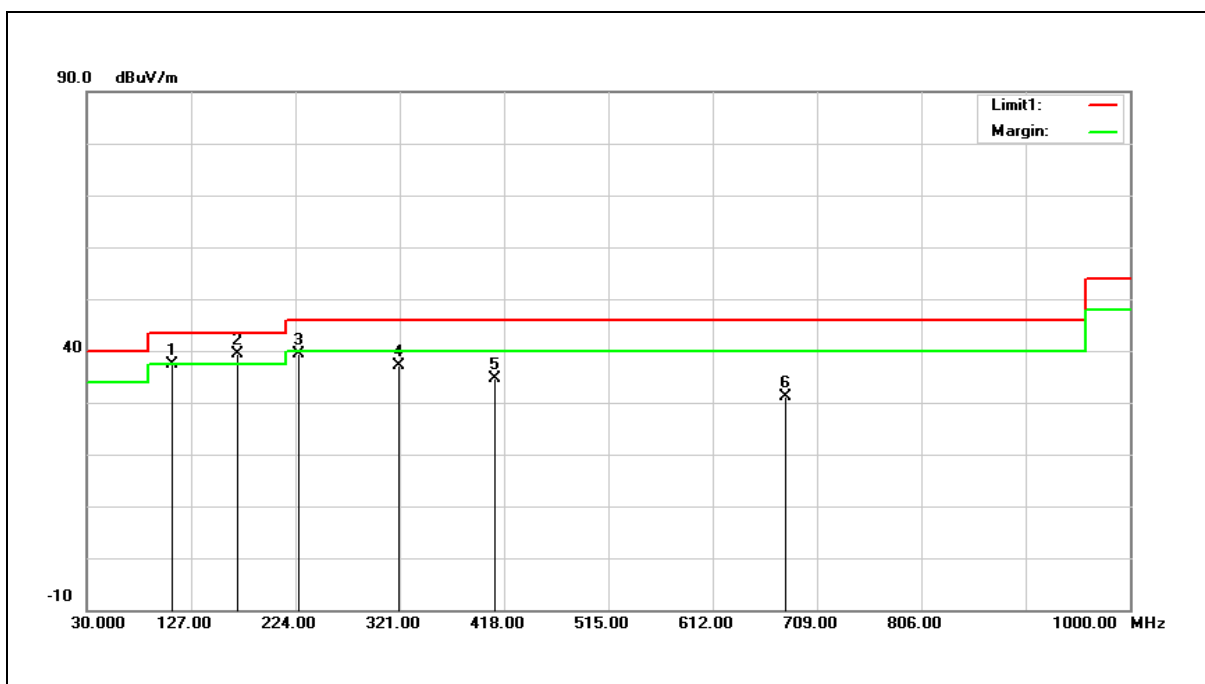

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 109.5400        | 46.76          | -9.29                 | 37.47           | 43.50          | -6.03       | QP     |
| 2   | 170.6500        | 45.28          | -5.85                 | 39.43           | 43.50          | -4.07       | QP     |
| 3   | 226.9100        | 46.32          | -7.03                 | 39.29           | 46.00          | -6.71       | QP     |
| 4   | 320.0300        | 41.07          | -3.88                 | 37.19           | 46.00          | -8.81       | QP     |
| 5   | 409.2700        | 36.34          | -1.83                 | 34.51           | 46.00          | -11.49      | QP     |
| 6   | 679.9000        | 27.62          | 3.52                  | 31.14           | 46.00          | -14.86      | QP     |


Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).

Example:  $37.47 = -9.29 + 46.76$ .

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3. When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

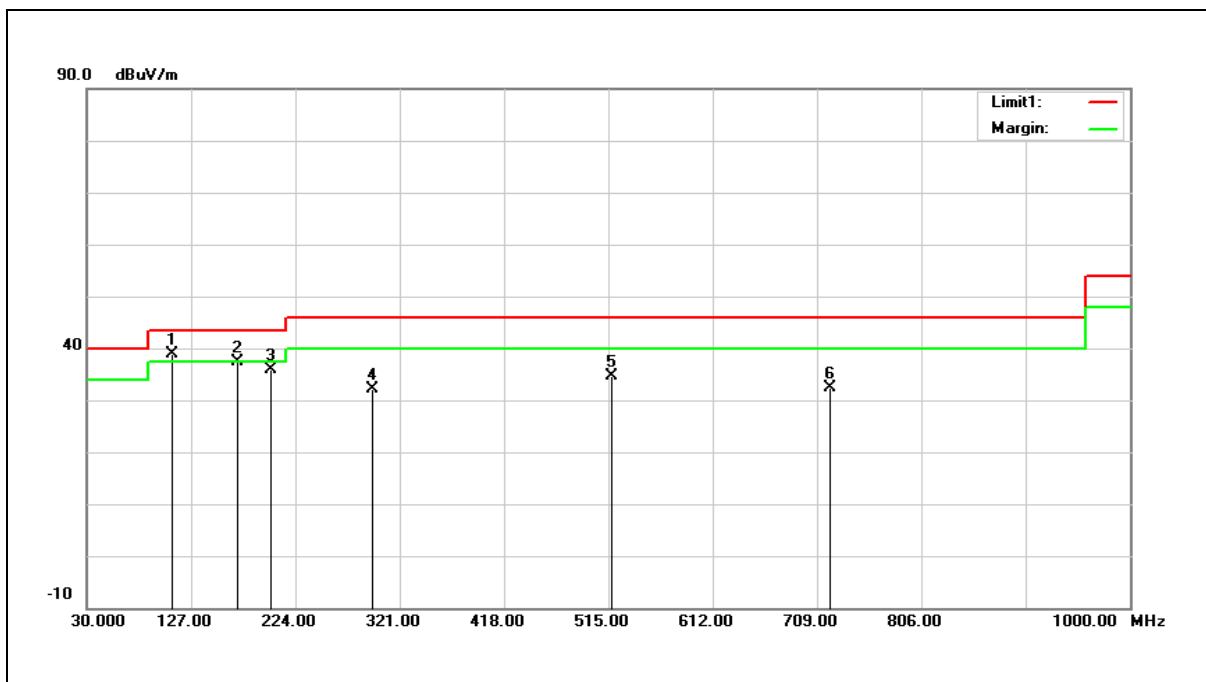

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 109.5400        | 48.09          | -9.29                 | 38.80           | 43.50          | -4.70       | QP     |
| 2   | 170.6500        | 43.19          | -5.85                 | 37.34           | 43.50          | -6.16       | QP     |
| 3   | 201.6900        | 43.63          | -7.79                 | 35.84           | 43.50          | -7.66       | QP     |
| 4   | 295.7800        | 36.47          | -4.30                 | 32.17           | 46.00          | -13.83      | QP     |
| 5   | 517.9100        | 34.27          | 0.28                  | 34.55           | 46.00          | -11.45      | QP     |
| 6   | 721.6100        | 27.91          | 4.49                  | 32.40           | 46.00          | -13.60      | QP     |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 38.80=-9.29+48.09.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

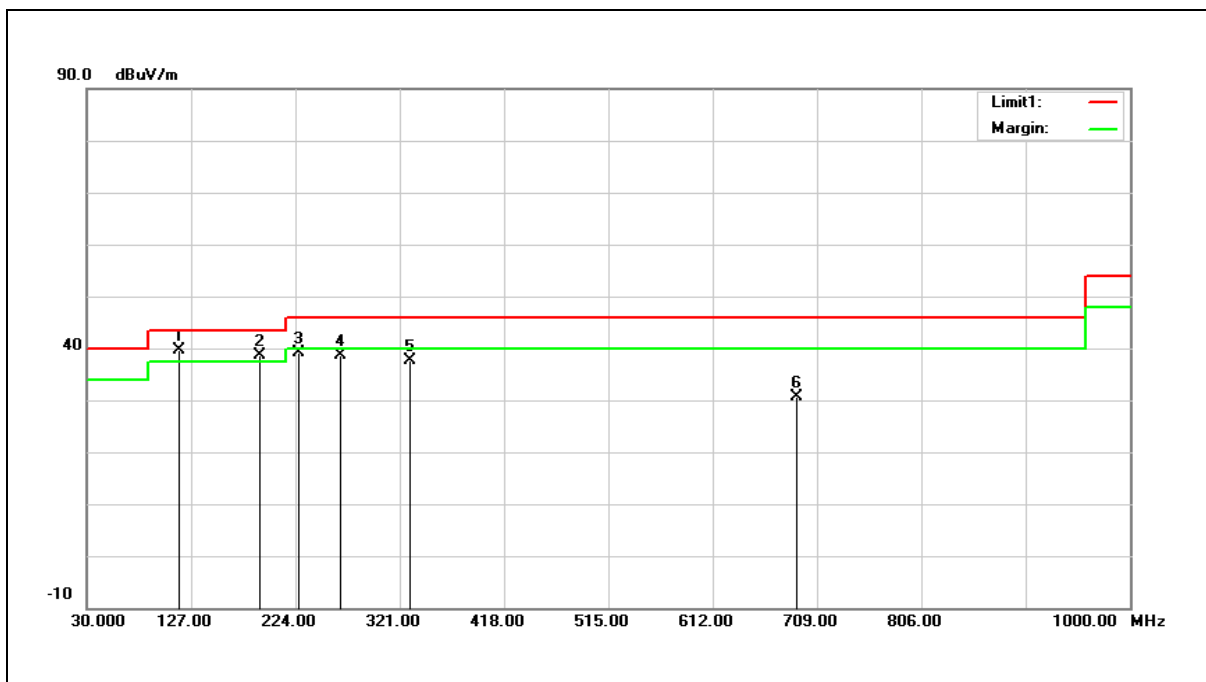

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 116.3300        | 48.48          | -8.74                 | 39.74           | 43.50          | -3.76       | QP     |
| 2   | 191.0200        | 45.96          | -7.39                 | 38.57           | 43.50          | -4.93       | QP     |
| 3   | 226.9100        | 46.18          | -7.03                 | 39.15           | 46.00          | -6.85       | QP     |
| 4   | 265.7100        | 43.84          | -5.32                 | 38.52           | 46.00          | -7.48       | QP     |
| 5   | 330.7000        | 41.36          | -3.71                 | 37.65           | 46.00          | -8.35       | QP     |
| 6   | 690.5700        | 27.01          | 3.74                  | 30.75           | 46.00          | -15.25      | QP     |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 39.74=-8.74+48.48.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

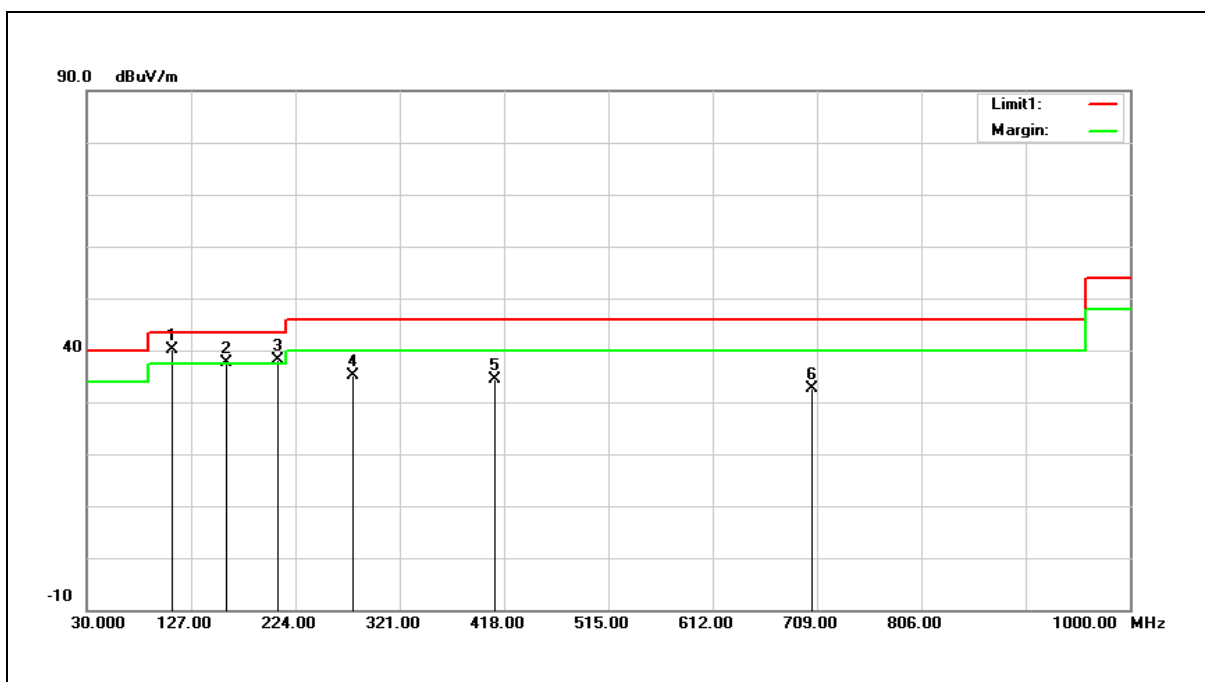

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 109.5400        | 49.52          | -9.29                 | 40.23           | 43.50          | -3.27       | QP     |
| 2   | 159.9800        | 42.96          | -5.41                 | 37.55           | 43.50          | -5.95       | QP     |
| 3   | 207.5100        | 45.75          | -7.70                 | 38.05           | 43.50          | -5.45       | QP     |
| 4   | 277.3500        | 39.88          | -4.81                 | 35.07           | 46.00          | -10.93      | QP     |
| 5   | 409.2700        | 36.30          | -1.83                 | 34.47           | 46.00          | -11.53      | QP     |
| 6   | 704.1500        | 28.57          | 4.04                  | 32.61           | 46.00          | -13.39      | QP     |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


Example: 40.23=-9.29+49.52.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

### Harmonic

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

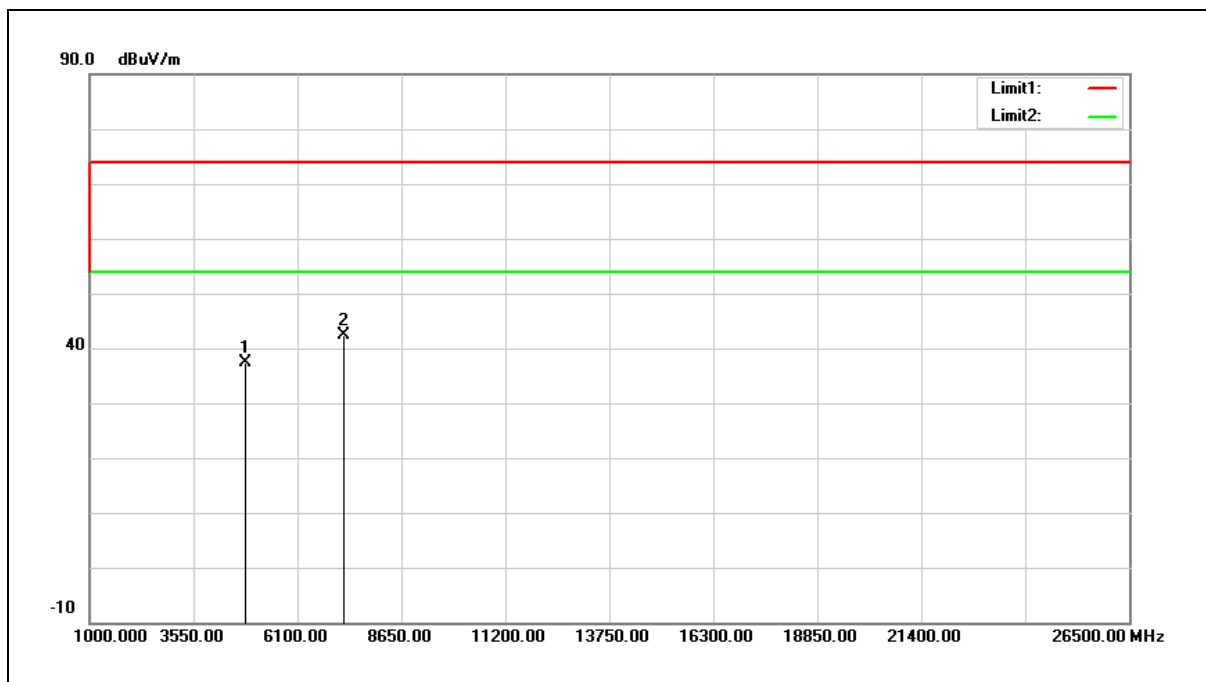


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4824.000        | 31.46          | 5.97                  | 37.43           | 74.00          | -36.57      | peak   |
| 2   | 7236.000        | 29.93          | 12.48                 | 42.41           | 74.00          | -31.59      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

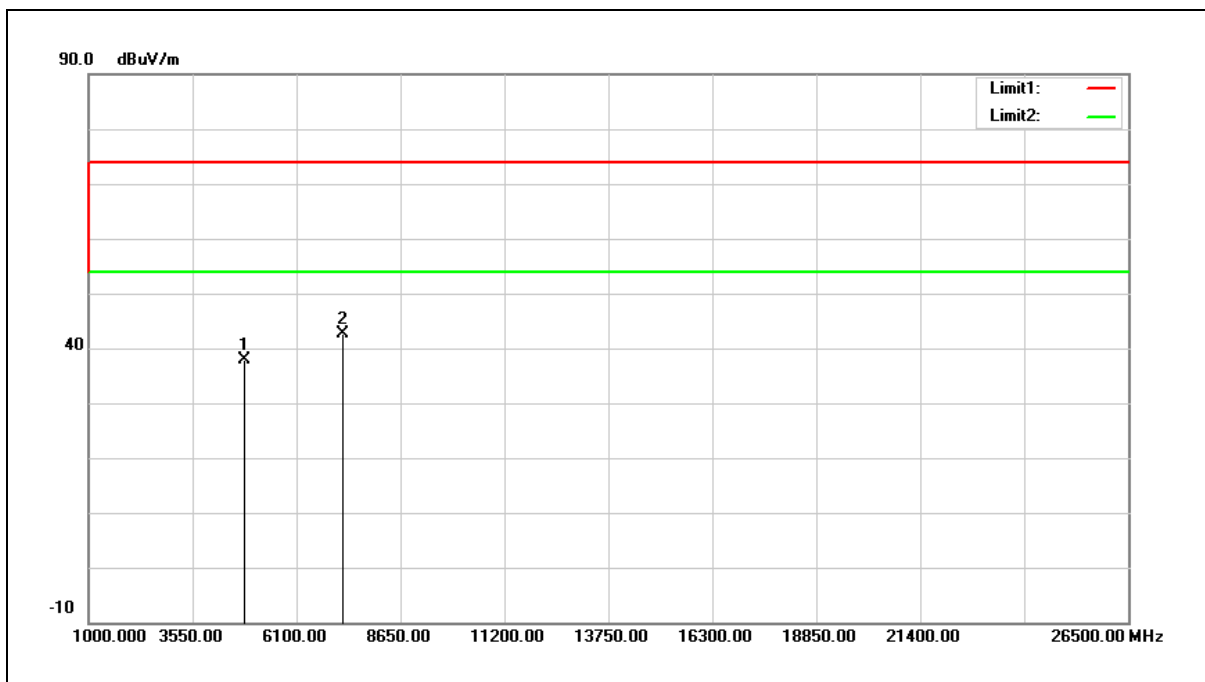


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4824.000           | 32.02             | 5.97                     | 37.99              | 74.00             | -36.01         | peak   |
| 2   | 7236.000           | 30.25             | 12.48                    | 42.73              | 74.00             | -31.27         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

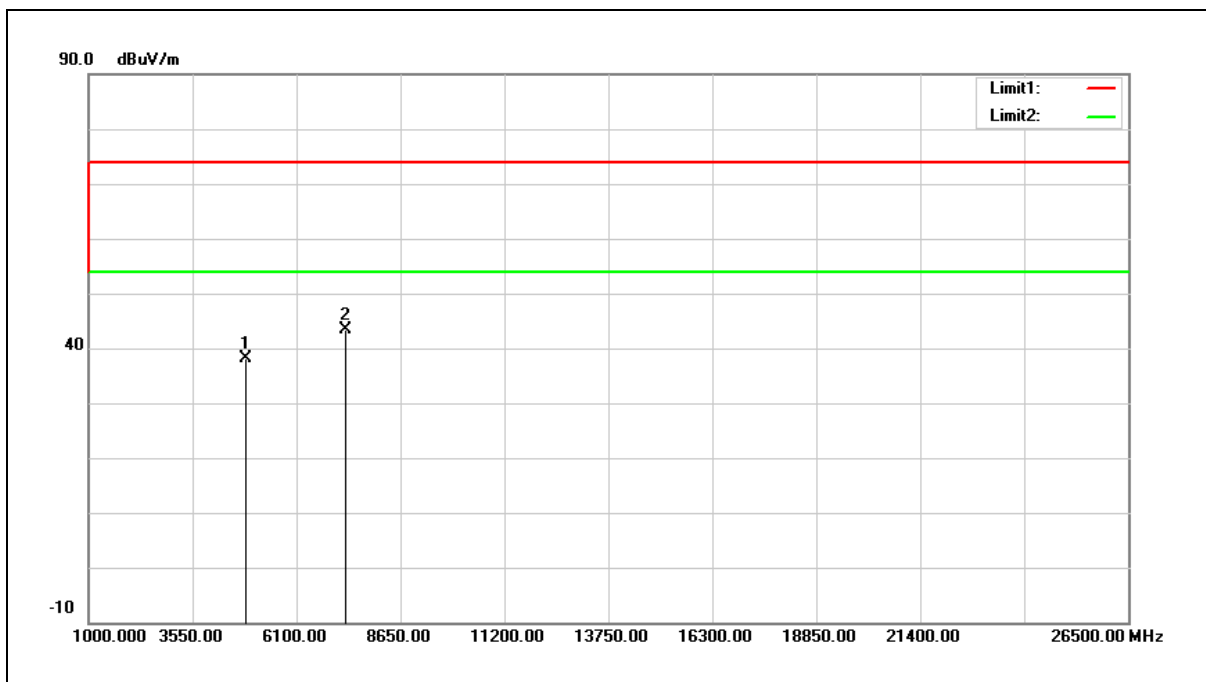


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 31.90             | 6.12                     | 38.02              | 74.00             | -35.98         | peak   |
| 2   | 7311.000           | 30.55             | 12.73                    | 43.28              | 74.00             | -30.72         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

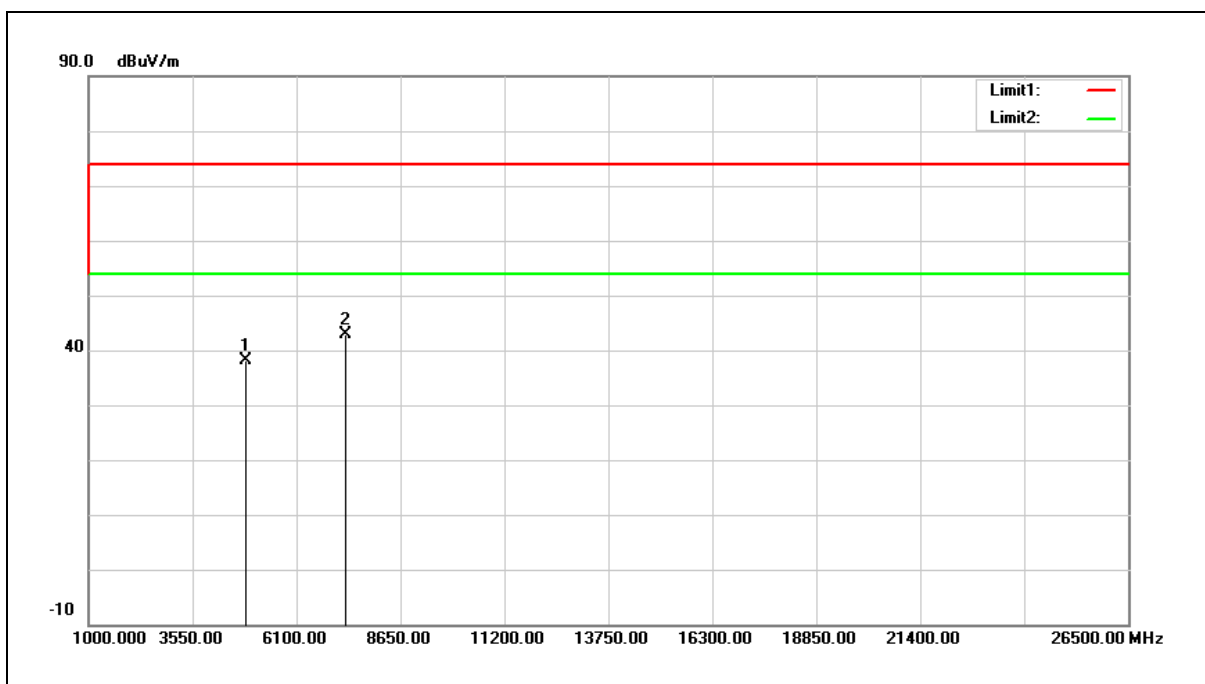


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 32.01             | 6.12                     | 38.13              | 74.00             | -35.87         | peak   |
| 2   | 7311.000           | 30.27             | 12.73                    | 43.00              | 74.00             | -31.00         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

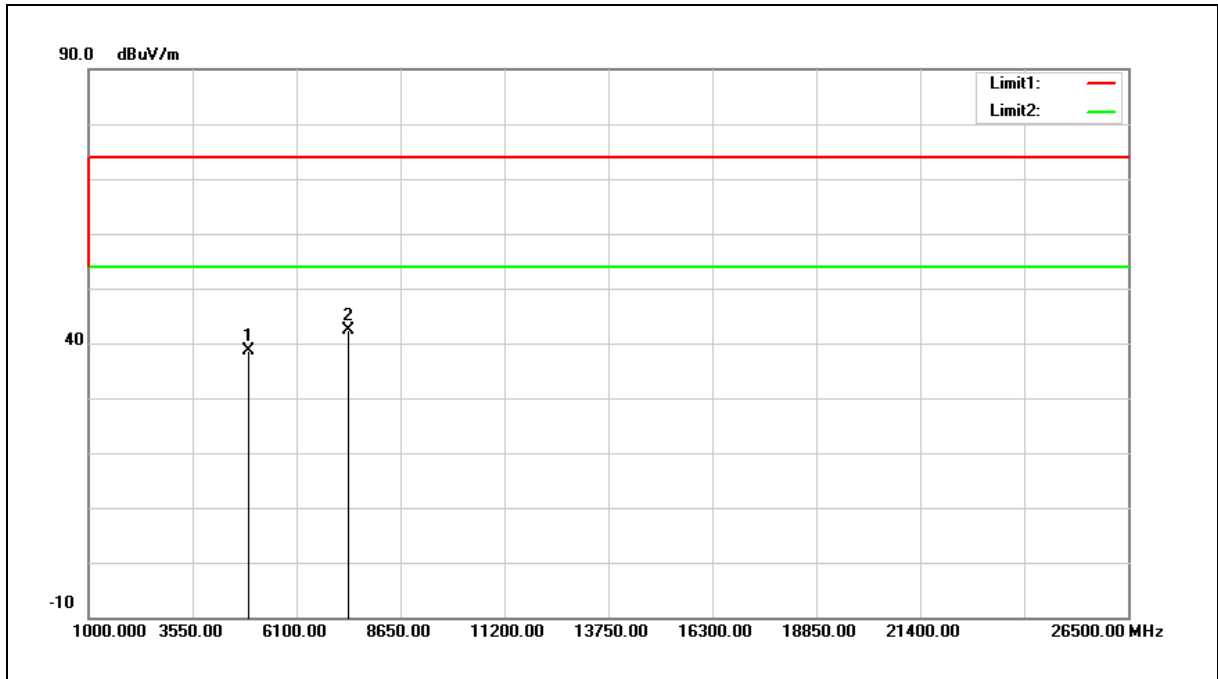


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4924.000           | 32.25             | 6.28                     | 38.53              | 74.00             | -35.47         | peak   |
| 2   | 7386.000           | 29.46             | 12.99                    | 42.45              | 74.00             | -31.55         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

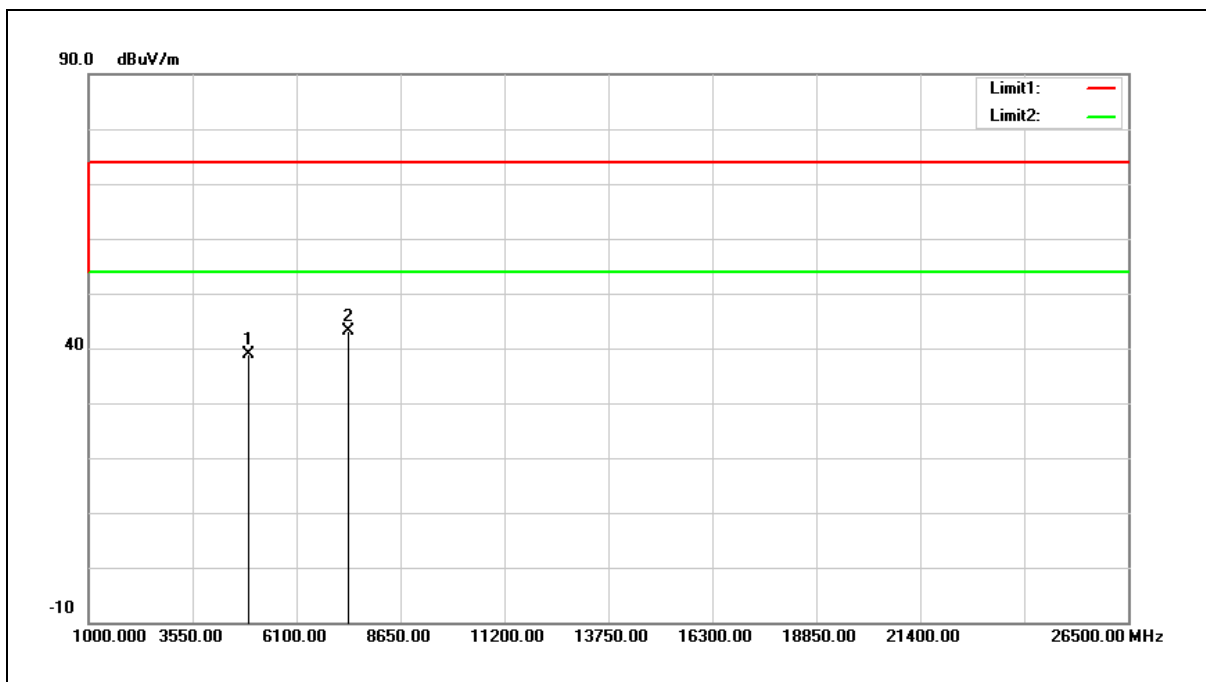


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4924.000           | 32.53             | 6.28                     | 38.81              | 74.00             | -35.19         | peak   |
| 2   | 7386.000           | 30.06             | 12.99                    | 43.05              | 74.00             | -30.95         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

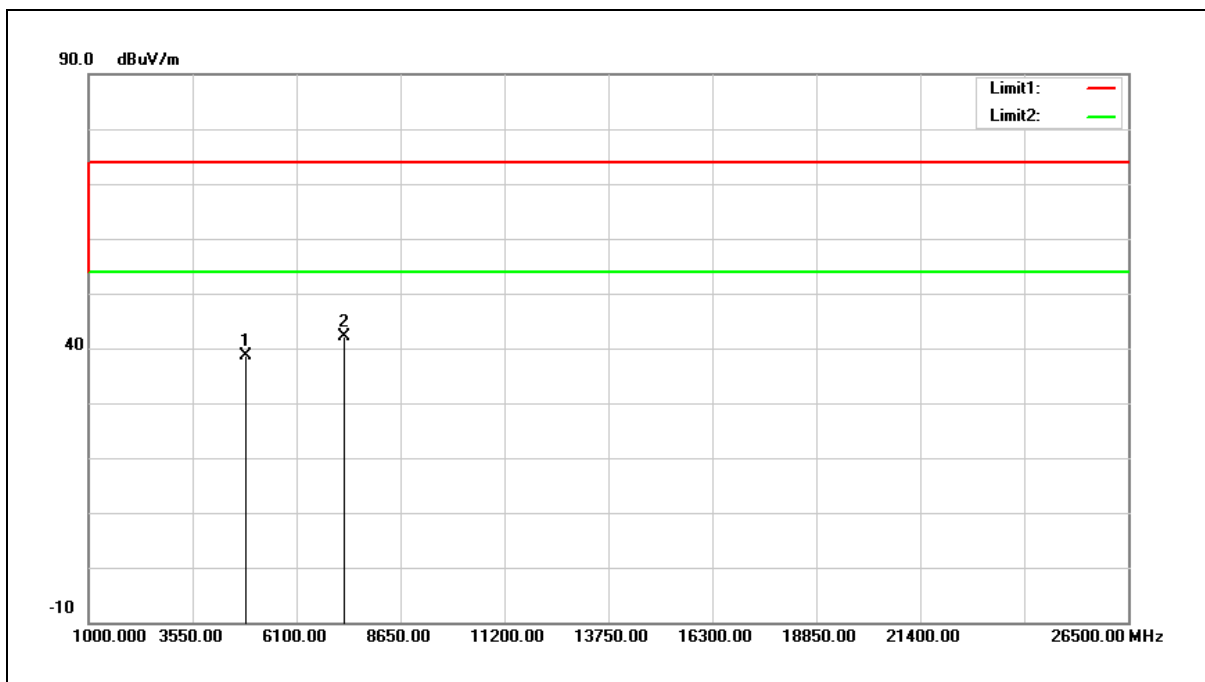


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4844.000           | 32.67             | 6.04                     | 38.71              | 74.00             | -35.29         | peak   |
| 2   | 7266.000           | 29.62             | 12.59                    | 42.21              | 74.00             | -31.79         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

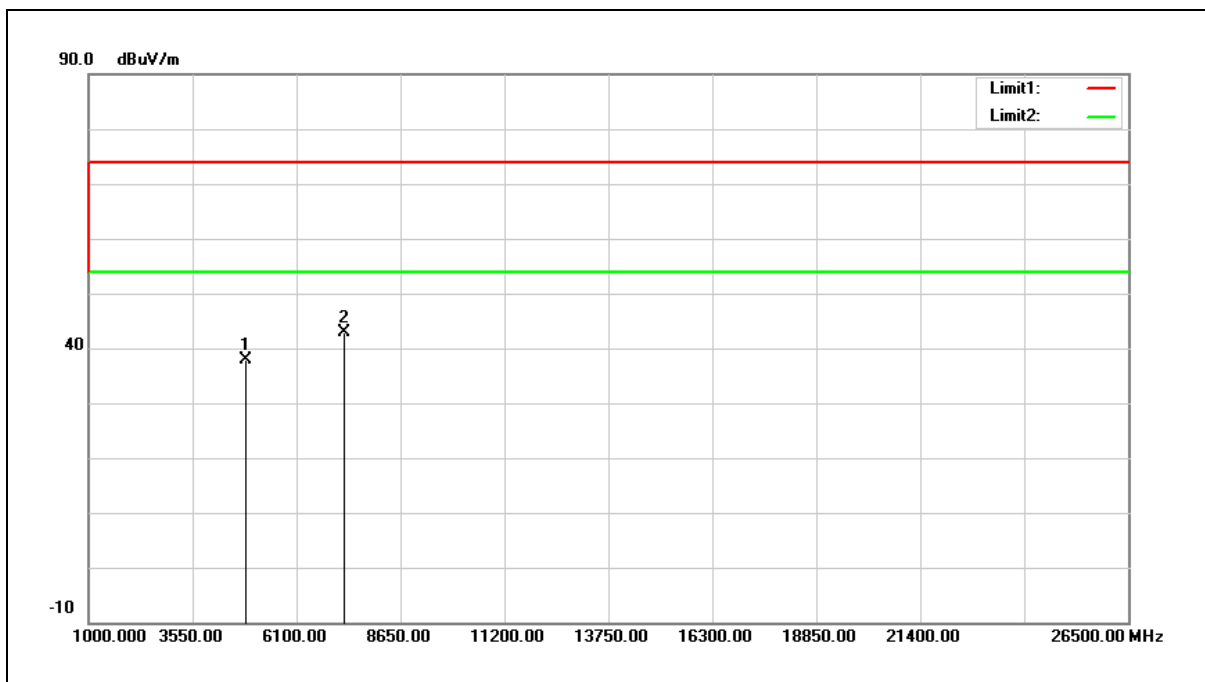


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4844.000           | 31.94             | 6.04                     | 37.98              | 74.00             | -36.02         | peak   |
| 2   | 7266.000           | 30.29             | 12.59                    | 42.88              | 74.00             | -31.12         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

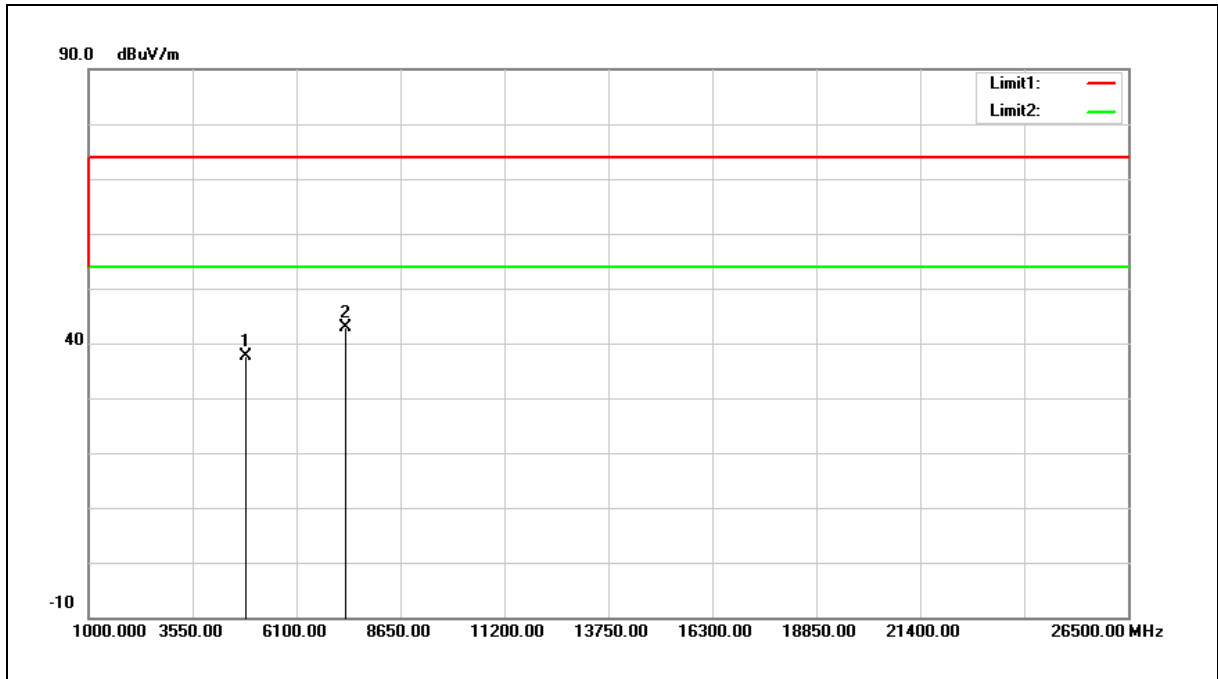


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 31.62             | 6.12                     | 37.74              | 74.00             | -36.26         | peak   |
| 2   | 7311.000           | 30.09             | 12.73                    | 42.82              | 74.00             | -31.18         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

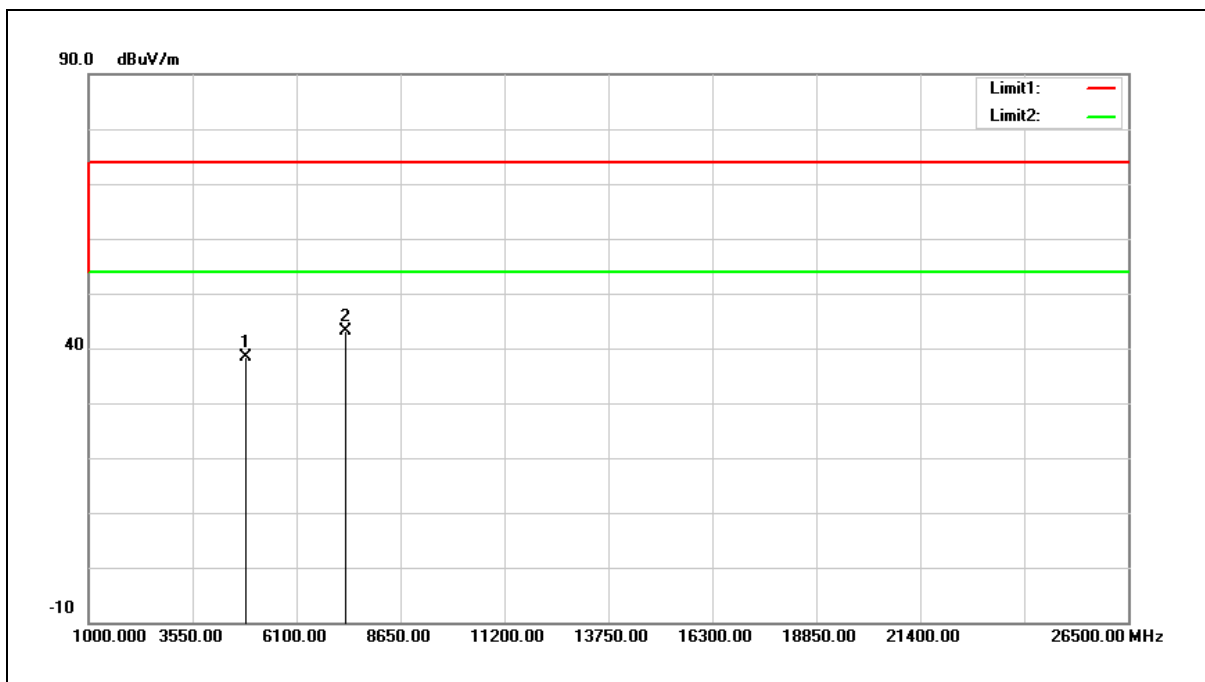


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 32.25             | 6.12                     | 38.37              | 74.00             | -35.63         | peak   |
| 2   | 7311.000           | 30.31             | 12.73                    | 43.04              | 74.00             | -30.96         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

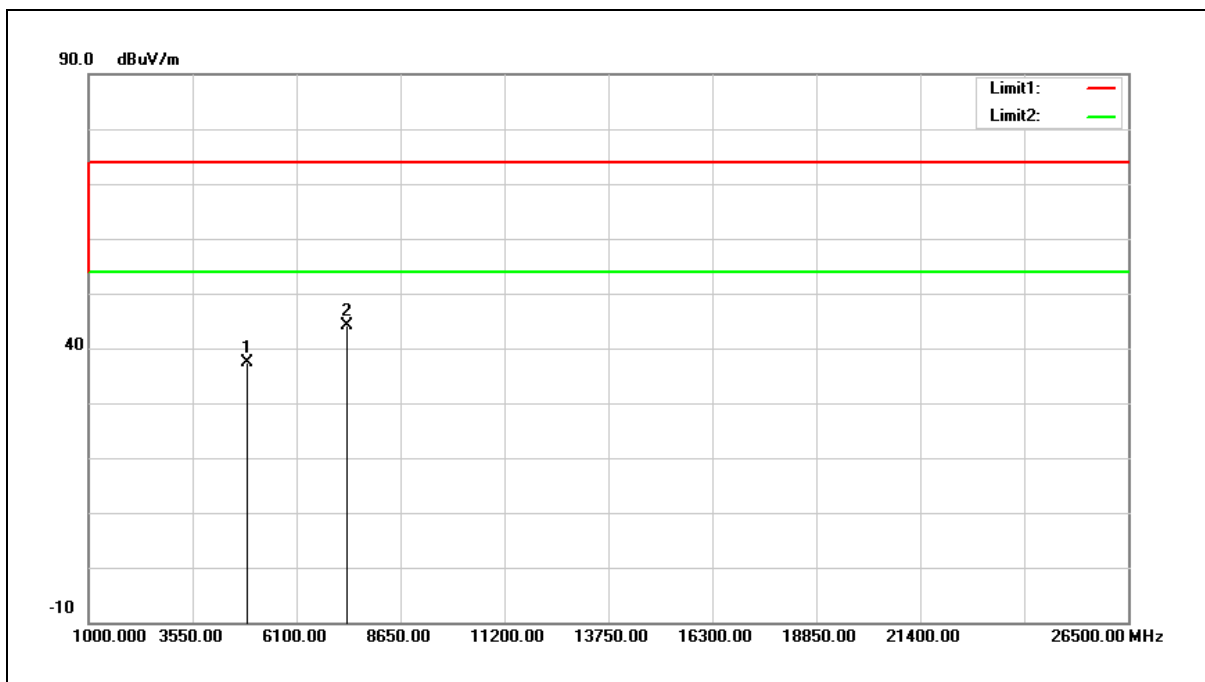


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4904.000           | 31.21             | 6.21                     | 37.42              | 74.00             | -36.58         | peak   |
| 2   | 7356.000           | 31.17             | 12.89                    | 44.06              | 74.00             | -29.94         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

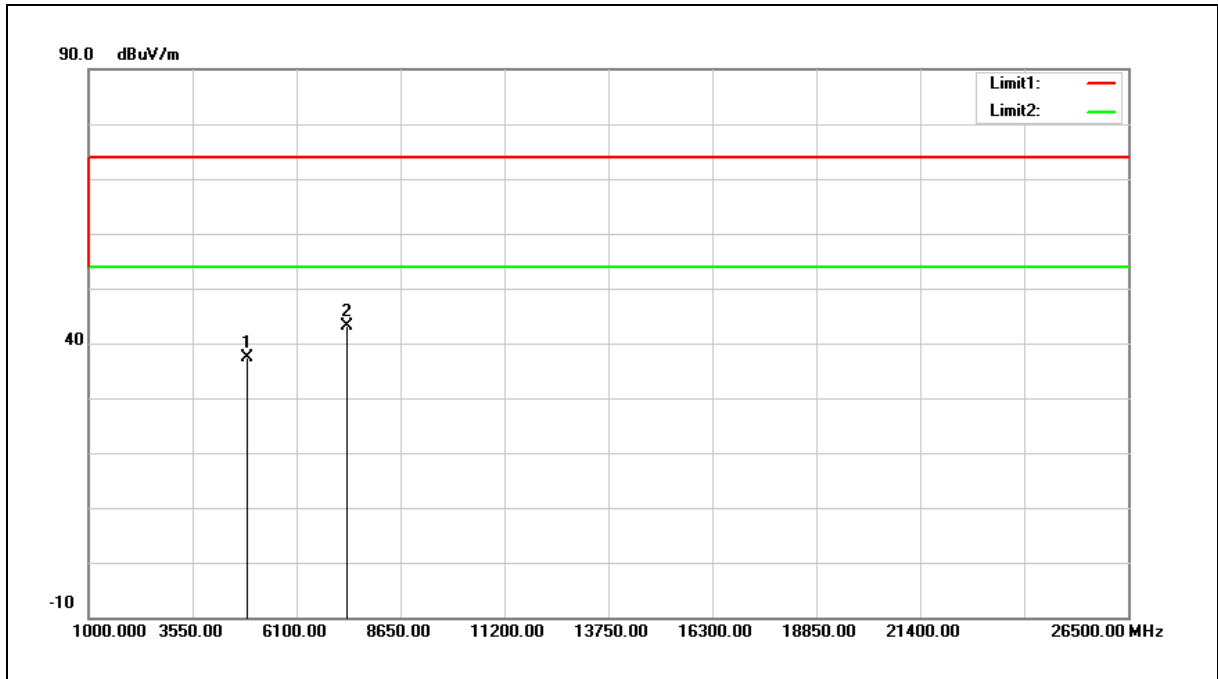


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4904.000        | 31.28          | 6.21                  | 37.49           | 74.00          | -36.51      | peak   |
| 2   | 7356.000        | 30.31          | 12.89                 | 43.20           | 74.00          | -30.80      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

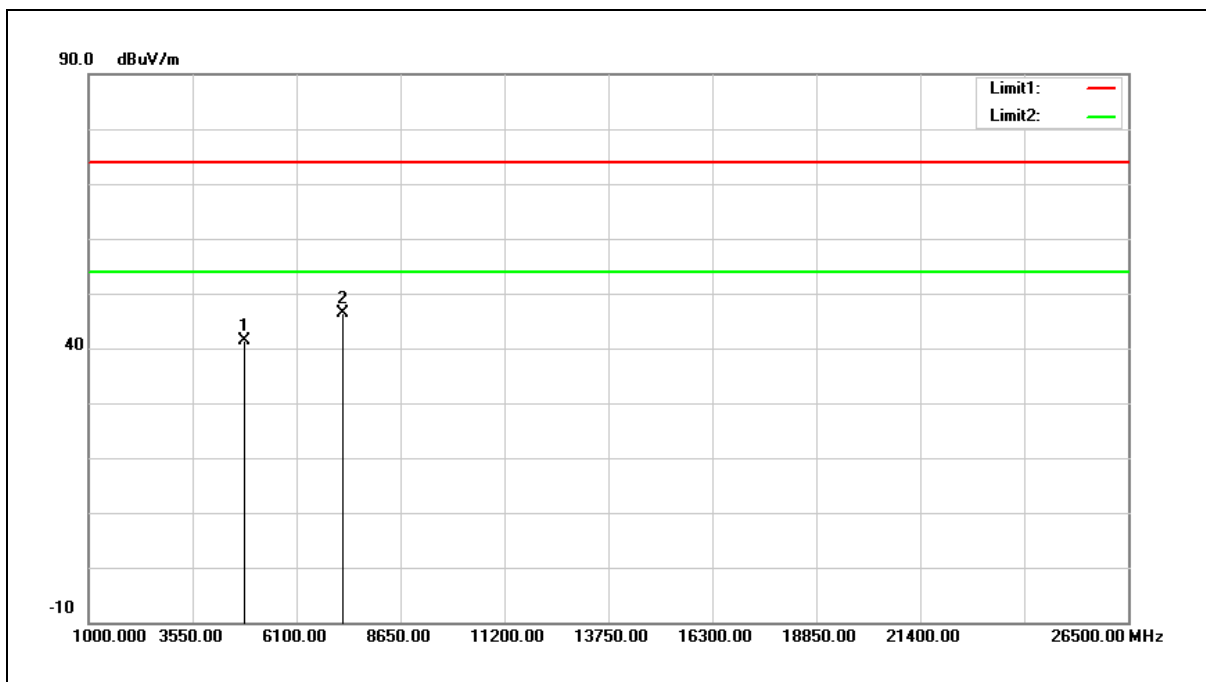

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4824.000        | 35.43          | 5.97                  | 41.40           | 74.00          | -32.60      | peak   |
| 2   | 7236.000        | 33.85          | 12.48                 | 46.33           | 74.00          | -27.67      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

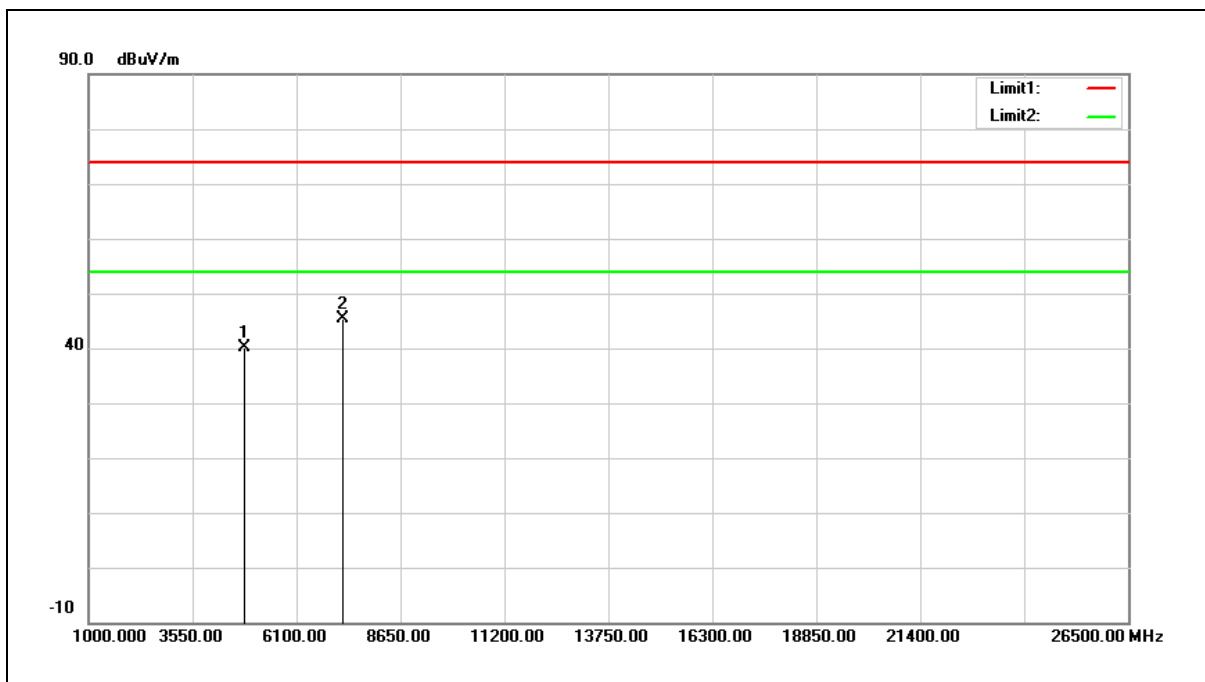


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4824.000           | 34.12             | 5.97                     | 40.09              | 74.00             | -33.91         | peak   |
| 2   | 7236.000           | 32.95             | 12.48                    | 45.43              | 74.00             | -28.57         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

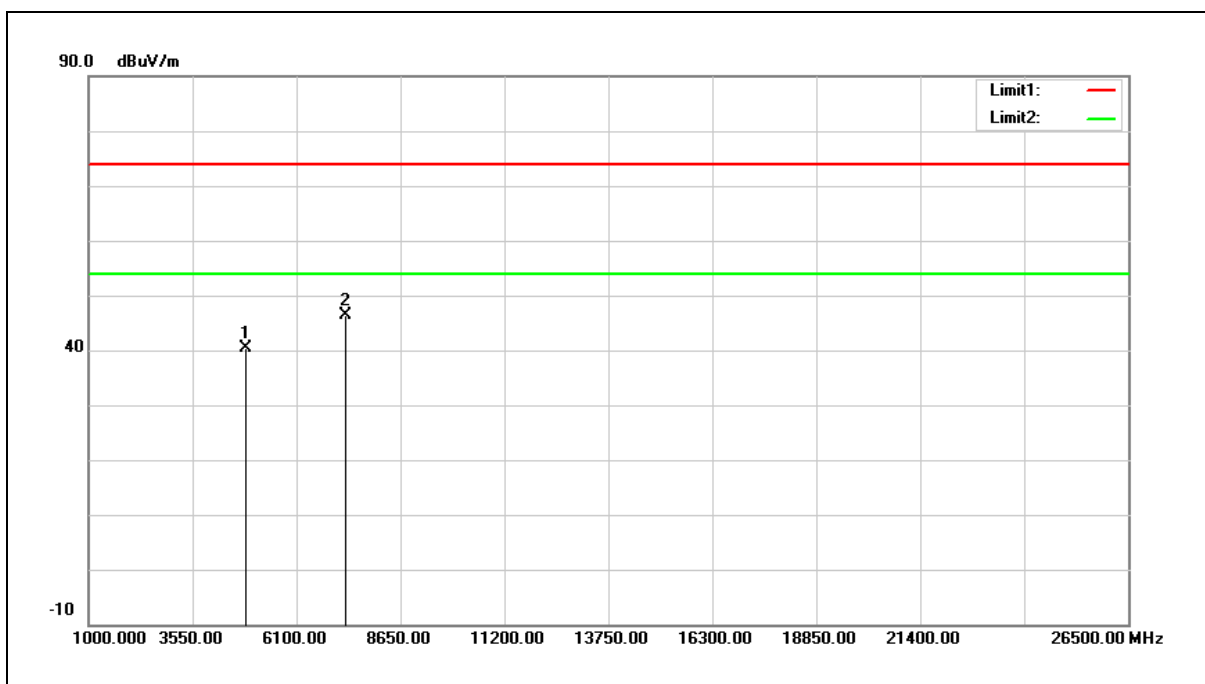


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 34.36             | 6.12                     | 40.48              | 74.00             | -33.52         | peak   |
| 2   | 7311.000           | 33.53             | 12.73                    | 46.26              | 74.00             | -27.74         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

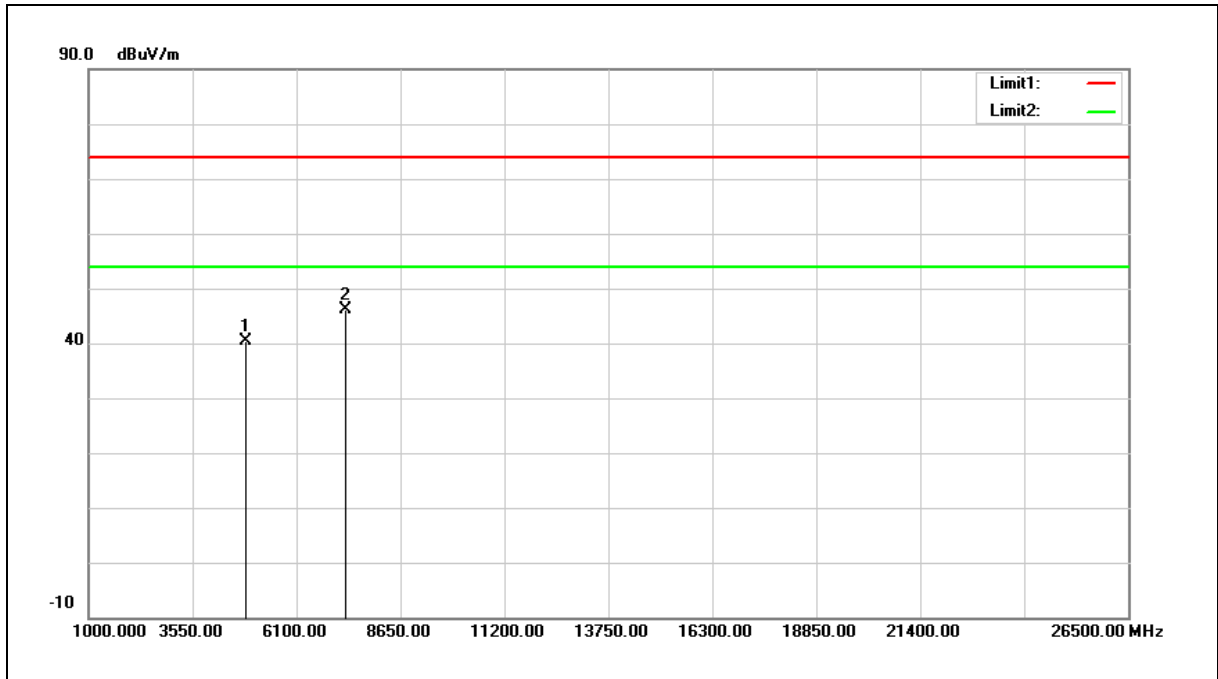


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 34.15             | 6.12                     | 40.27              | 74.00             | -33.73         | peak   |
| 2   | 7311.000           | 33.47             | 12.73                    | 46.20              | 74.00             | -27.80         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

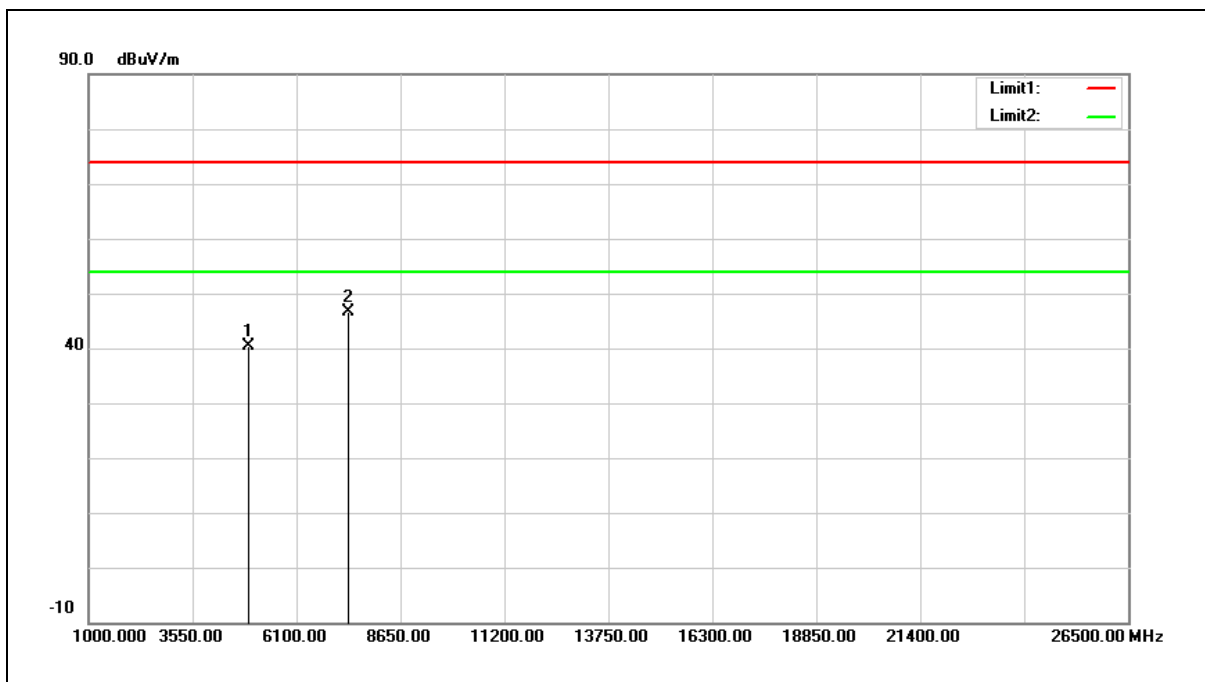


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4924.000        | 34.14          | 6.28                  | 40.42           | 74.00          | -33.58      | peak   |
| 2   | 7386.000        | 33.58          | 12.99                 | 46.57           | 74.00          | -27.43      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

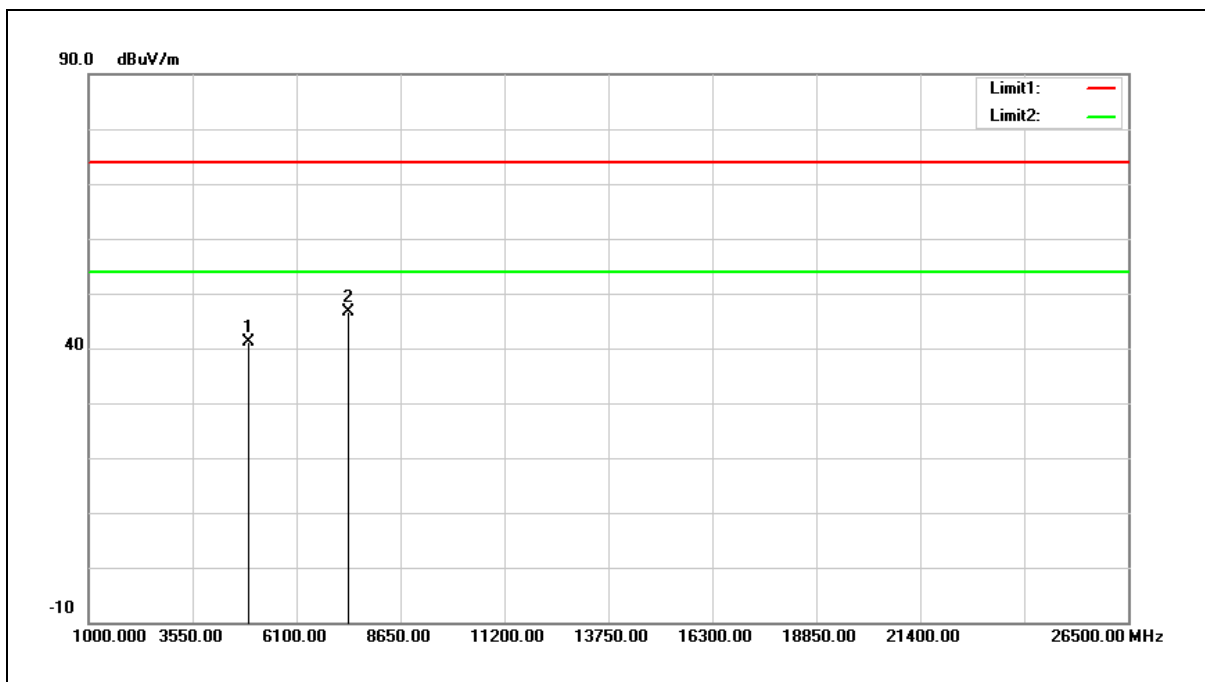

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4924.000        | 34.78          | 6.28                  | 41.06           | 74.00          | -32.94      | peak   |
| 2   | 7386.000        | 33.69          | 12.99                 | 46.68           | 74.00          | -27.32      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

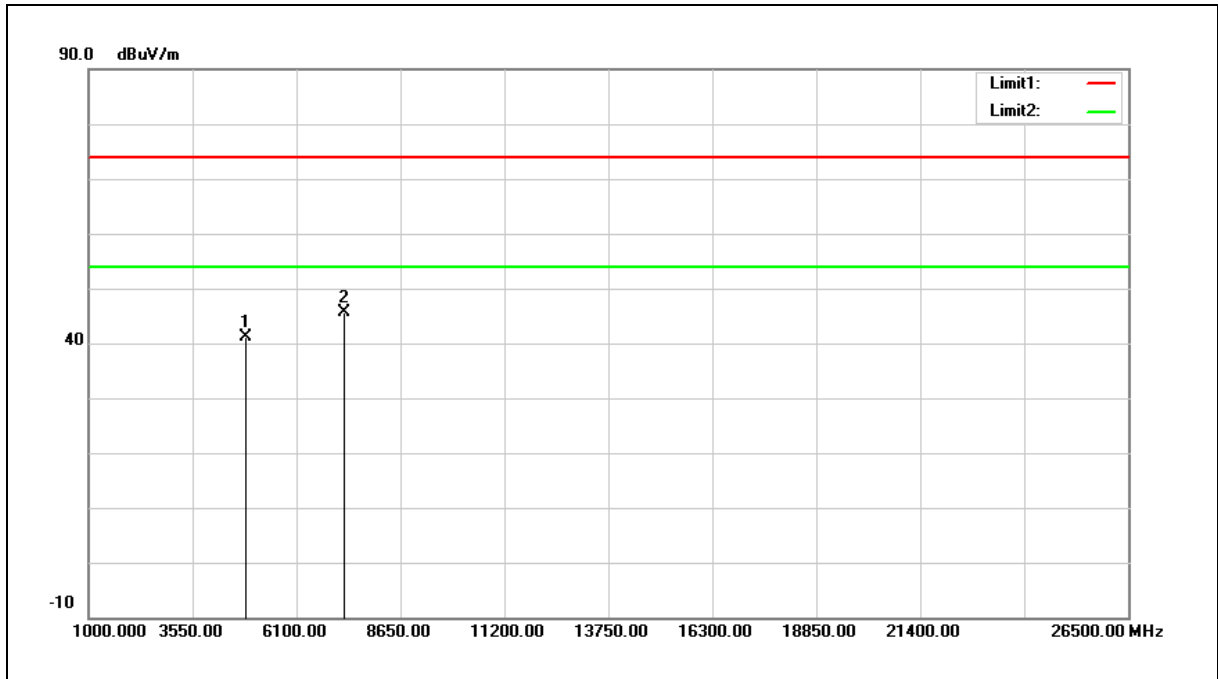


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4844.000        | 35.17          | 6.04                  | 41.21           | 74.00          | -32.79      | peak   |
| 2   | 7266.000        | 32.94          | 12.59                 | 45.53           | 74.00          | -28.47      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

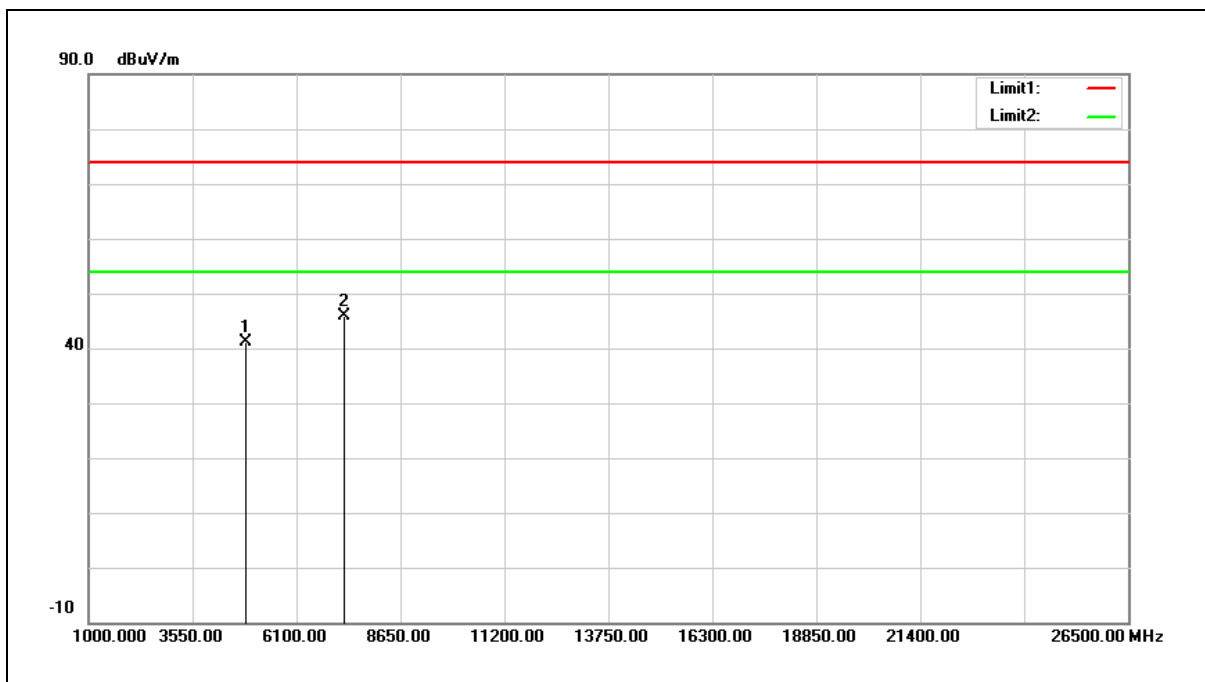


| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4844.000        | 35.03          | 6.04                  | 41.07           | 74.00          | -32.93      | peak   |
| 2   | 7266.000        | 33.19          | 12.59                 | 45.78           | 74.00          | -28.22      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

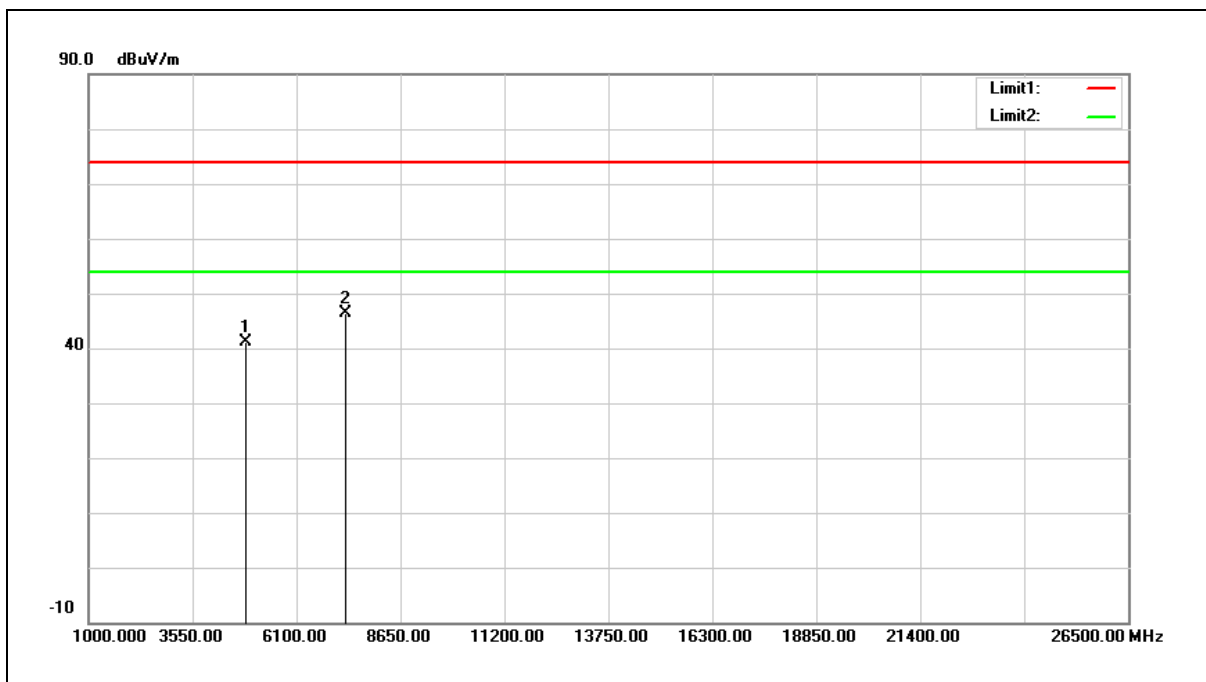


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 35.05             | 6.12                     | 41.17              | 74.00             | -32.83         | peak   |
| 2   | 7311.000           | 33.76             | 12.73                    | 46.49              | 74.00             | -27.51         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

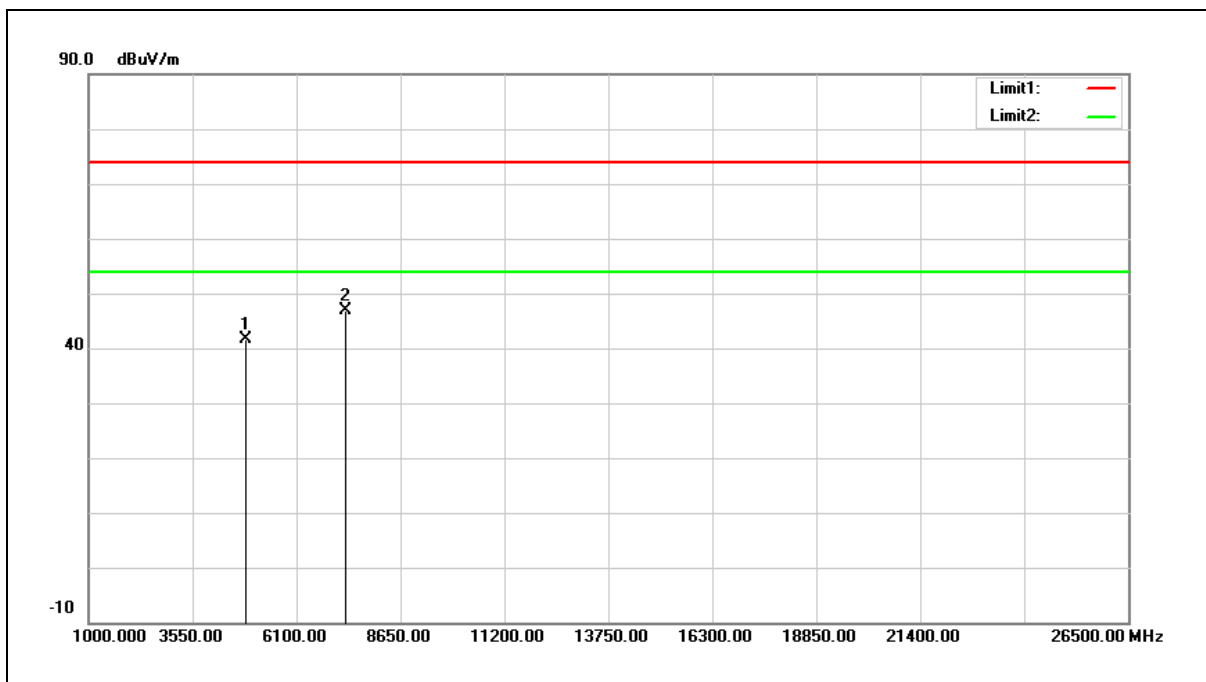

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4874.000           | 35.41             | 6.12                     | 41.53              | 74.00             | -32.47         | peak   |
| 2   | 7311.000           | 34.23             | 12.73                    | 46.96              | 74.00             | -27.04         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

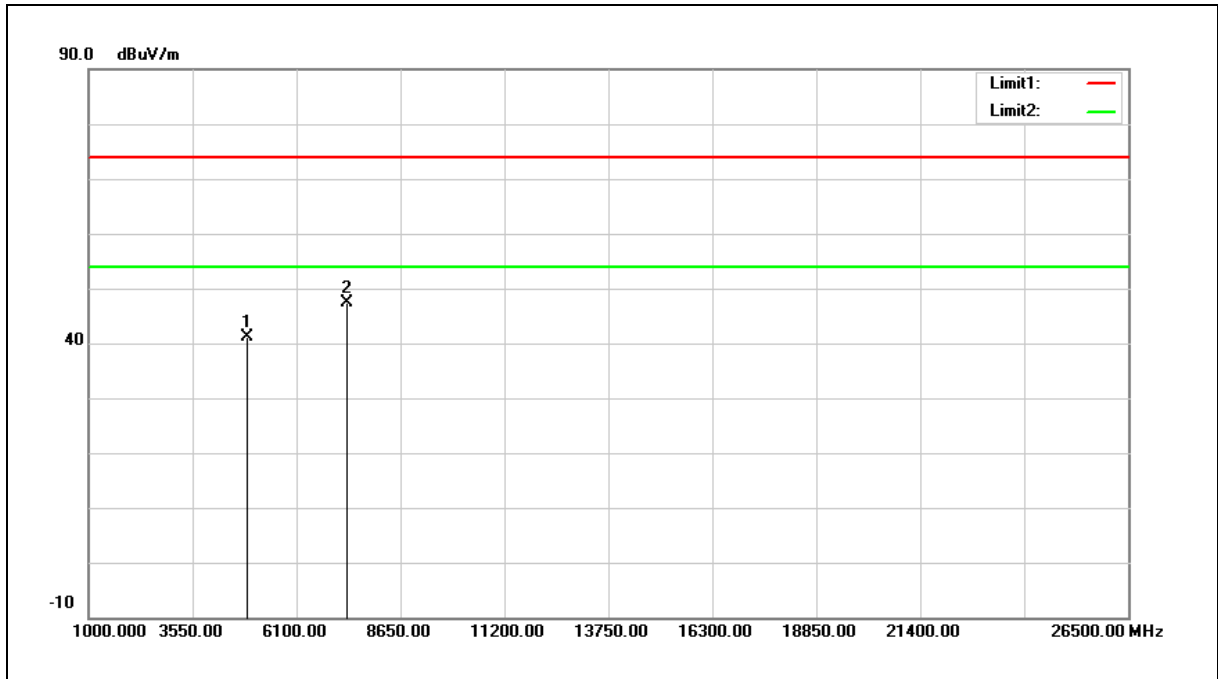

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 4904.000           | 34.84             | 6.21                     | 41.05              | 74.00             | -32.95         | peak   |
| 2   | 7356.000           | 34.48             | 12.89                    | 47.37              | 74.00             | -26.63         | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

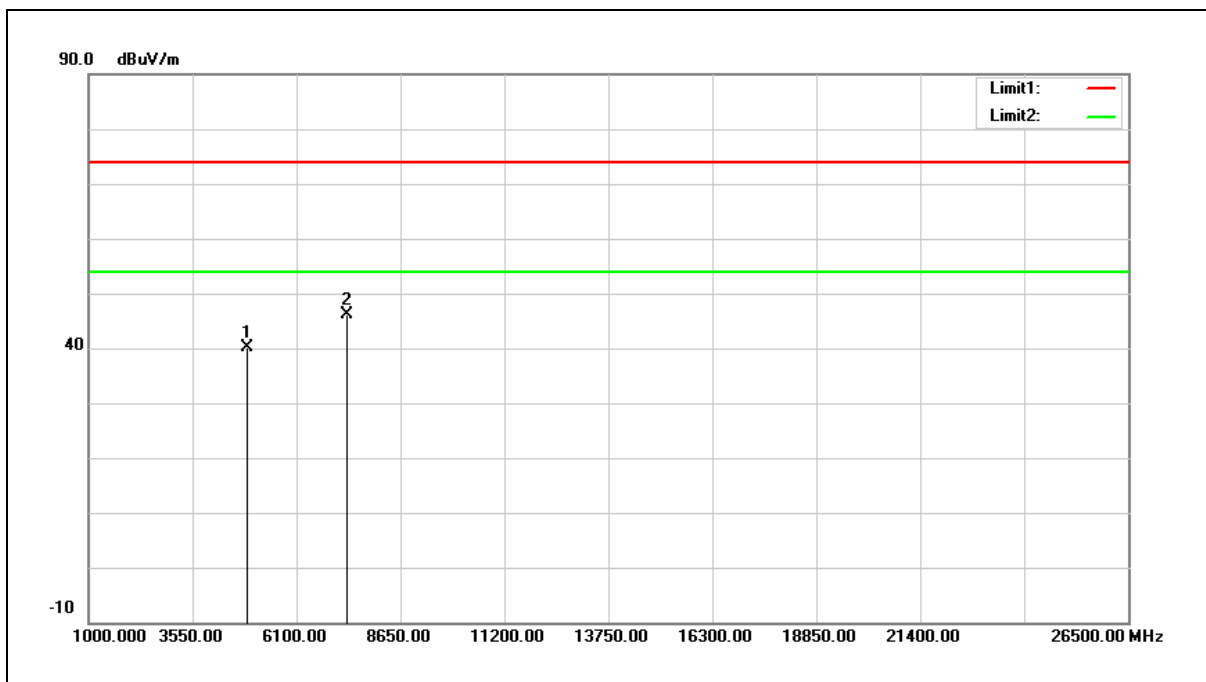

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 4904.000        | 33.82          | 6.21                  | 40.03           | 74.00          | -33.97      | peak   |
| 2   | 7356.000        | 33.14          | 12.89                 | 46.03           | 74.00          | -27.97      | peak   |


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

### Band Edge

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

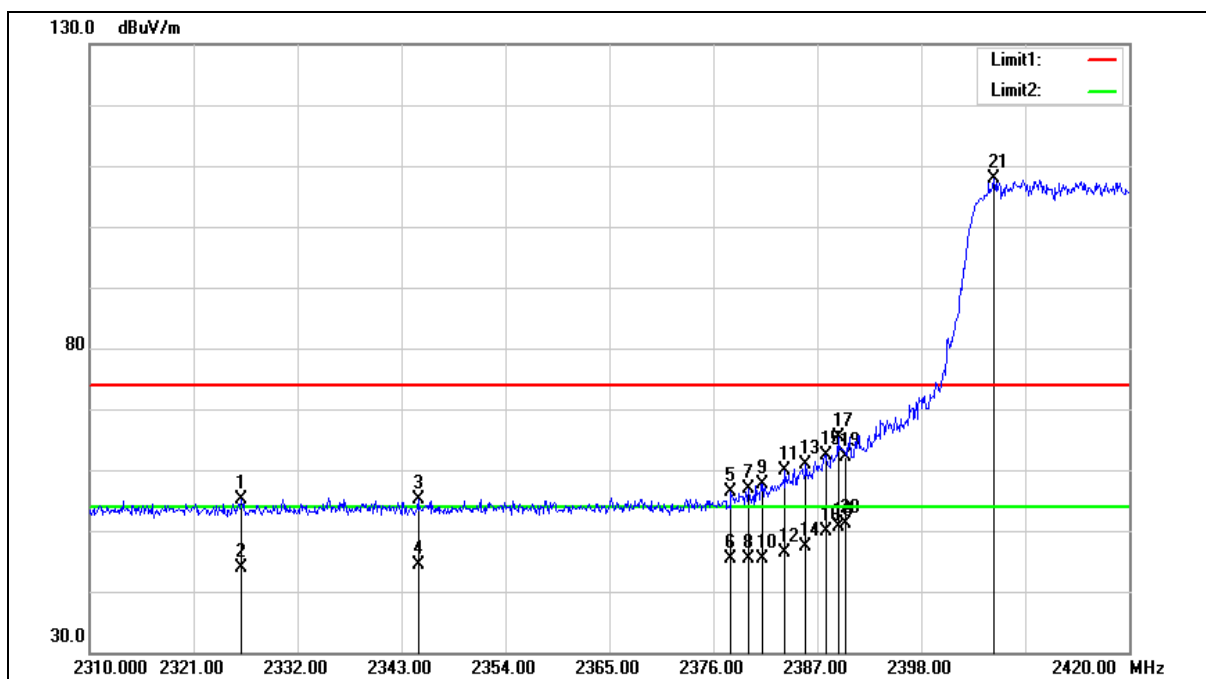

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2326.060        | 56.42          | -1.19                 | 55.23           | 74.00          | -18.77      | peak   |
| 2   | 2326.060        | 44.97          | -1.19                 | 43.78           | 54.00          | -10.22      | AVG    |
| 3   | 2344.760        | 56.11          | -1.10                 | 55.01           | 74.00          | -18.99      | peak   |
| 4   | 2344.760        | 45.43          | -1.10                 | 44.33           | 54.00          | -9.67       | AVG    |
| 5   | 2377.870        | 57.39          | -0.94                 | 56.45           | 74.00          | -17.55      | peak   |
| 6   | 2377.870        | 46.29          | -0.94                 | 45.35           | 54.00          | -8.65       | AVG    |
| 7   | 2379.740        | 57.81          | -0.93                 | 56.88           | 74.00          | -17.12      | peak   |
| 8   | 2379.740        | 46.22          | -0.93                 | 45.29           | 54.00          | -8.71       | AVG    |
| 9   | 2381.170        | 58.59          | -0.91                 | 57.68           | 74.00          | -16.32      | peak   |
| 10  | 2381.170        | 46.25          | -0.91                 | 45.34           | 54.00          | -8.66       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 11  | 2383.590           | 60.79             | -0.91                    | 59.88              | 74.00             | -14.12         | peak   |
| 12  | 2383.590           | 47.41             | -0.91                    | 46.50              | 54.00             | -7.50          | AVG    |
| 13  | 2385.790           | 61.71             | -0.90                    | 60.81              | 74.00             | -13.19         | peak   |
| 14  | 2385.790           | 48.21             | -0.90                    | 47.31              | 54.00             | -6.69          | AVG    |
| 15  | 2387.880           | 63.15             | -0.88                    | 62.27              | 74.00             | -11.73         | peak   |
| 16  | 2387.880           | 50.67             | -0.88                    | 49.79              | 54.00             | -4.21          | AVG    |
| 17  | 2389.200           | 66.35             | -0.88                    | 65.47              | 74.00             | -8.53          | peak   |
| 18  | 2389.200           | 51.54             | -0.88                    | 50.66              | 54.00             | -3.34          | AVG    |
| 19  | 2390.000           | 63.12             | -0.87                    | 62.25              | 74.00             | -11.75         | peak   |
| 20  | 2390.000           | 51.88             | -0.87                    | 51.01              | 54.00             | -2.99          | AVG    |
| 21  | 2405.700           | 108.63            | -0.79                    | 107.84             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

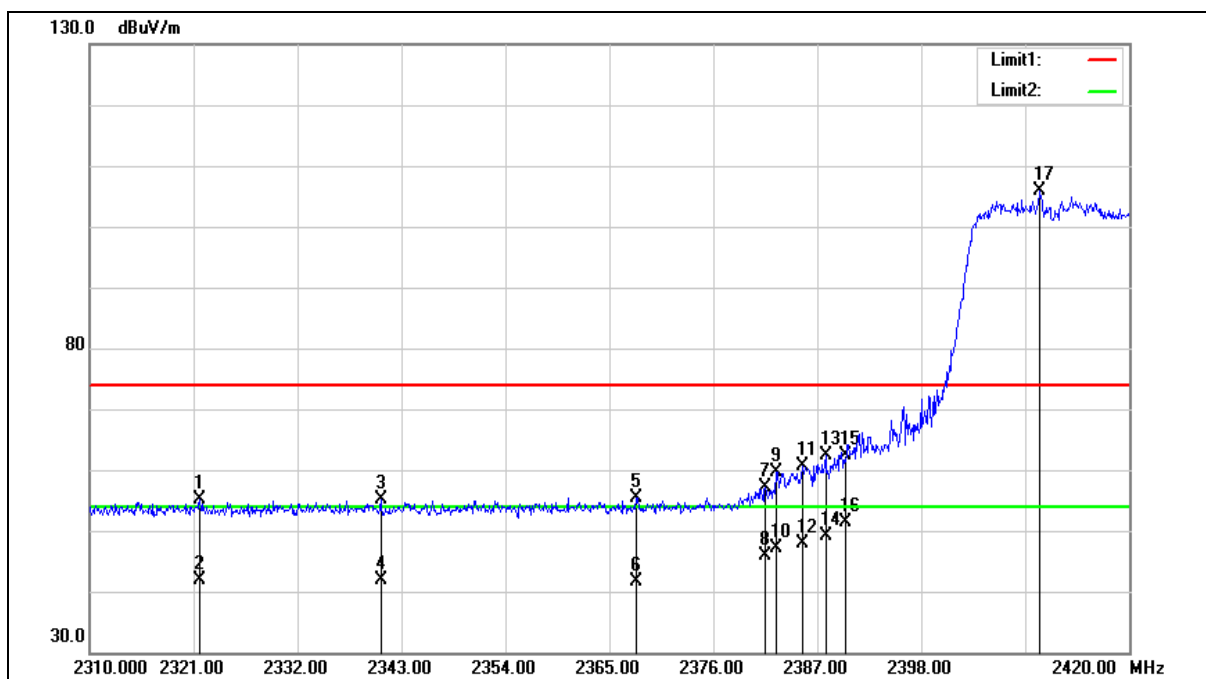

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2321.660        | 56.26          | -1.22                 | 55.04           | 74.00          | -18.96      | peak   |
| 2   | 2321.660        | 43.14          | -1.22                 | 41.92           | 54.00          | -12.08      | AVG    |
| 3   | 2340.800        | 56.23          | -1.11                 | 55.12           | 74.00          | -18.88      | peak   |
| 4   | 2340.800        | 42.92          | -1.11                 | 41.81           | 54.00          | -12.19      | AVG    |
| 5   | 2367.860        | 56.28          | -0.99                 | 55.29           | 74.00          | -18.71      | peak   |
| 6   | 2367.860        | 42.65          | -0.99                 | 41.66           | 54.00          | -12.34      | AVG    |
| 7   | 2381.500        | 57.97          | -0.91                 | 57.06           | 74.00          | -16.94      | peak   |
| 8   | 2381.500        | 46.68          | -0.91                 | 45.77           | 54.00          | -8.23       | AVG    |
| 9   | 2382.600        | 60.53          | -0.91                 | 59.62           | 74.00          | -14.38      | peak   |
| 10  | 2382.600        | 48.10          | -0.91                 | 47.19           | 54.00          | -6.81       | AVG    |
| 11  | 2385.460        | 61.47          | -0.90                 | 60.57           | 74.00          | -13.43      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2385.460           | 48.85             | -0.90                    | 47.95              | 54.00             | -6.05          | AVG    |
| 13  | 2387.880           | 63.24             | -0.88                    | 62.36              | 74.00             | -11.64         | peak   |
| 14  | 2387.880           | 50.12             | -0.88                    | 49.24              | 54.00             | -4.76          | AVG    |
| 15  | 2390.000           | 63.13             | -0.87                    | 62.26              | 74.00             | -11.74         | peak   |
| 16  | 2390.000           | 52.22             | -0.87                    | 51.35              | 54.00             | -2.65          | AVG    |
| 17  | 2410.540           | 106.65            | -0.76                    | 105.89             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

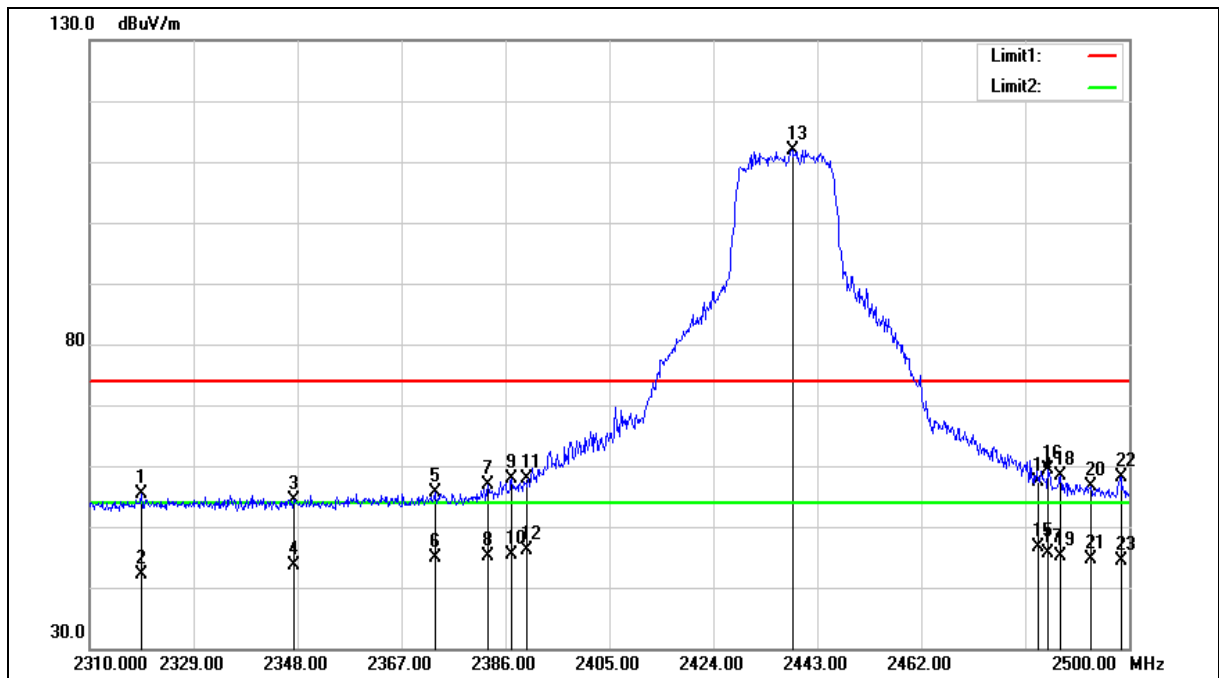

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2319.500        | 56.71          | -1.22                 | 55.49           | 74.00          | -18.51      | peak   |
| 2   | 2319.500        | 43.27          | -1.22                 | 42.05           | 54.00          | -11.95      | AVG    |
| 3   | 2347.240        | 55.53          | -1.08                 | 54.45           | 74.00          | -19.55      | peak   |
| 4   | 2347.240        | 44.73          | -1.08                 | 43.65           | 54.00          | -10.35      | AVG    |
| 5   | 2373.080        | 56.47          | -0.96                 | 55.51           | 74.00          | -18.49      | peak   |
| 6   | 2373.080        | 45.78          | -0.96                 | 44.82           | 54.00          | -9.18       | AVG    |
| 7   | 2382.770        | 57.86          | -0.91                 | 56.95           | 74.00          | -17.05      | peak   |
| 8   | 2382.770        | 46.06          | -0.91                 | 45.15           | 54.00          | -8.85       | AVG    |
| 9   | 2387.140        | 58.71          | -0.88                 | 57.83           | 74.00          | -16.17      | peak   |
| 10  | 2387.140        | 46.32          | -0.88                 | 45.44           | 54.00          | -8.56       | AVG    |
| 11  | 2390.000        | 58.67          | -0.87                 | 57.80           | 74.00          | -16.20      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2390.000           | 47.04             | -0.87                    | 46.17              | 54.00             | -7.83          | AVG    |
| 13  | 2438.440           | 112.59            | -0.63                    | 111.96             | --                | --             | peak   |
| 14  | 2483.500           | 57.89             | -0.40                    | 57.49              | 74.00             | -16.51         | peak   |
| 15  | 2483.500           | 46.99             | -0.40                    | 46.59              | 54.00             | -7.41          | AVG    |
| 16  | 2485.180           | 59.77             | -0.39                    | 59.38              | 74.00             | -14.62         | peak   |
| 17  | 2485.180           | 45.90             | -0.39                    | 45.51              | 54.00             | -8.49          | AVG    |
| 18  | 2487.460           | 58.66             | -0.37                    | 58.29              | 74.00             | -15.71         | peak   |
| 19  | 2487.460           | 45.56             | -0.37                    | 45.19              | 54.00             | -8.81          | AVG    |
| 20  | 2492.970           | 56.98             | -0.34                    | 56.64              | 74.00             | -17.36         | peak   |
| 21  | 2492.970           | 45.07             | -0.34                    | 44.73              | 54.00             | -9.27          | AVG    |
| 22  | 2498.480           | 58.50             | -0.32                    | 58.18              | 74.00             | -15.82         | peak   |
| 23  | 2498.480           | 44.69             | -0.32                    | 44.37              | 54.00             | -9.63          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

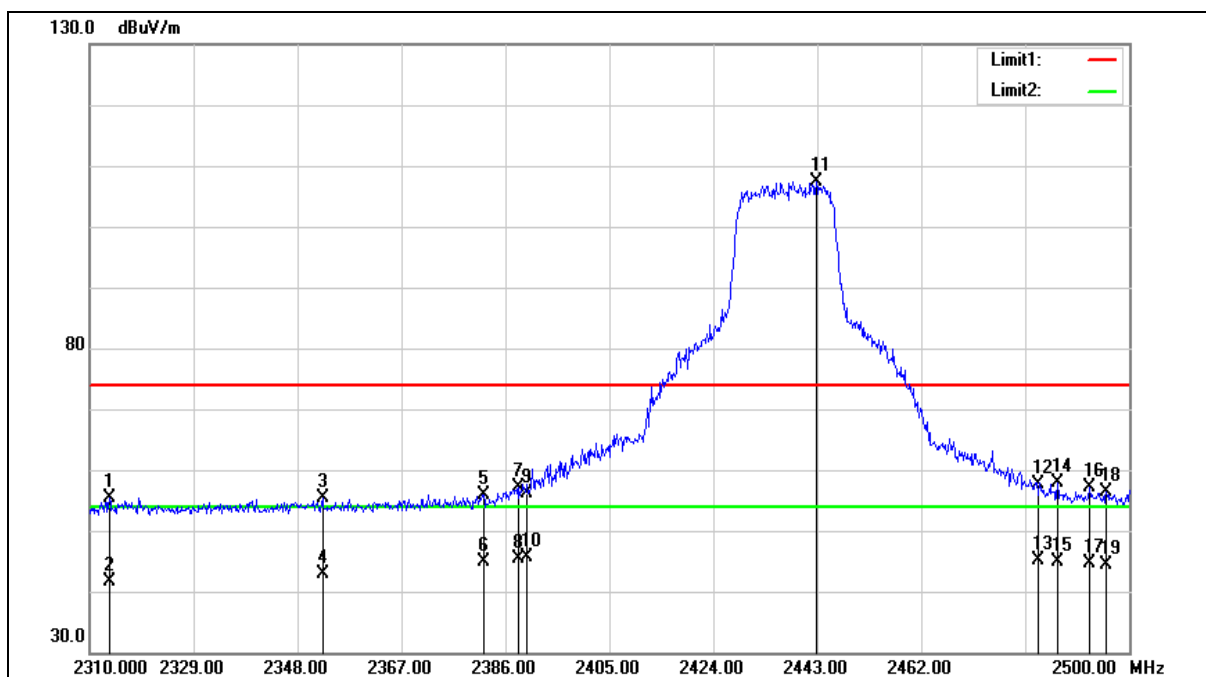

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2313.610        | 56.60          | -1.25                 | 55.35           | 74.00          | -18.65      | peak   |
| 2   | 2313.610        | 42.88          | -1.25                 | 41.63           | 54.00          | -12.37      | AVG    |
| 3   | 2352.560        | 56.32          | -1.05                 | 55.27           | 74.00          | -18.73      | peak   |
| 4   | 2352.560        | 43.84          | -1.05                 | 42.79           | 54.00          | -11.21      | AVG    |
| 5   | 2382.010        | 56.78          | -0.91                 | 55.87           | 74.00          | -18.13      | peak   |
| 6   | 2382.010        | 45.83          | -0.91                 | 44.92           | 54.00          | -9.08       | AVG    |
| 7   | 2388.470        | 58.03          | -0.88                 | 57.15           | 74.00          | -16.85      | peak   |
| 8   | 2388.470        | 46.21          | -0.88                 | 45.33           | 54.00          | -8.67       | AVG    |
| 9   | 2390.000        | 57.10          | -0.87                 | 56.23           | 74.00          | -17.77      | peak   |
| 10  | 2390.000        | 46.62          | -0.87                 | 45.75           | 54.00          | -8.25       | AVG    |
| 11  | 2442.810        | 107.96         | -0.60                 | 107.36          | --             | --          | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2483.500           | 58.15             | -0.40                    | 57.75              | 74.00             | -16.25         | peak   |
| 13  | 2483.500           | 45.58             | -0.40                    | 45.18              | 54.00             | -8.82          | AVG    |
| 14  | 2486.890           | 58.23             | -0.37                    | 57.86              | 74.00             | -16.14         | peak   |
| 15  | 2486.890           | 45.17             | -0.37                    | 44.80              | 54.00             | -9.20          | AVG    |
| 16  | 2492.780           | 57.50             | -0.34                    | 57.16              | 74.00             | -16.84         | peak   |
| 17  | 2492.780           | 44.87             | -0.34                    | 44.53              | 54.00             | -9.47          | AVG    |
| 18  | 2495.820           | 56.65             | -0.33                    | 56.32              | 74.00             | -17.68         | peak   |
| 19  | 2495.820           | 44.69             | -0.33                    | 44.36              | 54.00             | -9.64          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

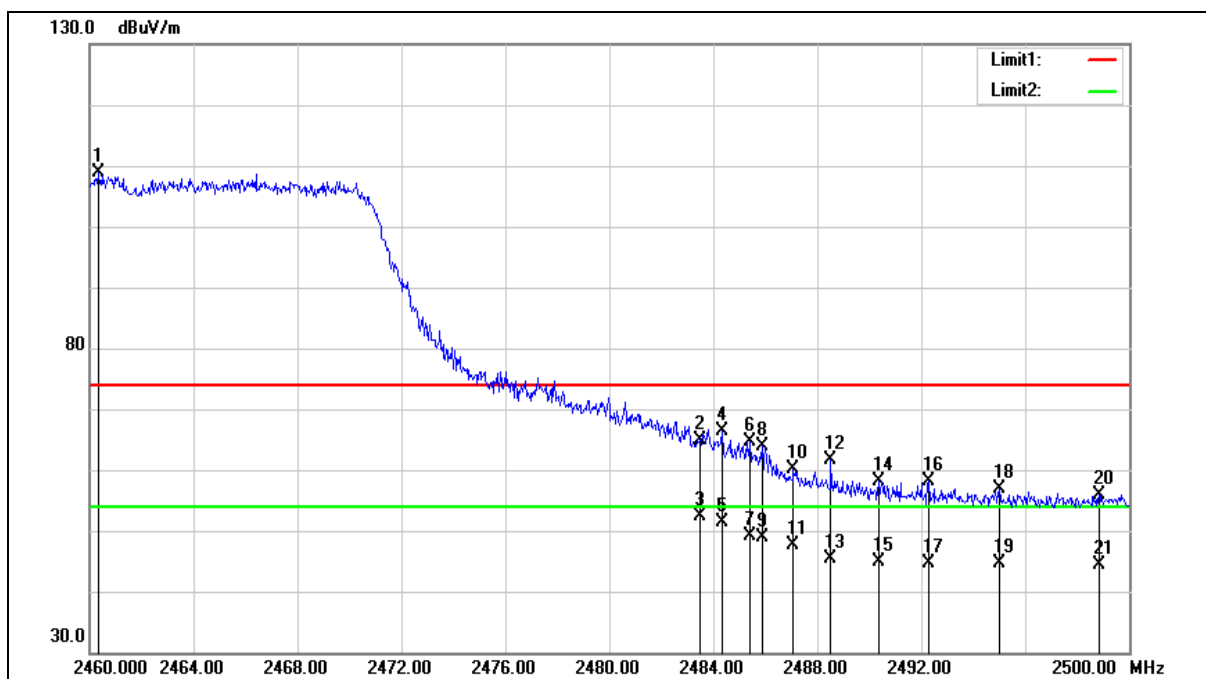

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2460.320        | 109.38         | -0.51                 | 108.87          | --             | --          | peak   |
| 2   | 2483.500        | 65.23          | -0.40                 | 64.83           | 74.00          | -9.17       | peak   |
| 3   | 2483.500        | 52.86          | -0.40                 | 52.46           | 54.00          | -1.54       | AVG    |
| 4   | 2484.320        | 66.73          | -0.39                 | 66.34           | 74.00          | -7.66       | peak   |
| 5   | 2484.320        | 51.66          | -0.39                 | 51.27           | 54.00          | -2.73       | AVG    |
| 6   | 2485.400        | 65.03          | -0.39                 | 64.64           | 74.00          | -9.36       | peak   |
| 7   | 2485.400        | 49.50          | -0.39                 | 49.11           | 54.00          | -4.89       | AVG    |
| 8   | 2485.880        | 64.14          | -0.38                 | 63.76           | 74.00          | -10.24      | peak   |
| 9   | 2485.880        | 49.33          | -0.38                 | 48.95           | 54.00          | -5.05       | AVG    |
| 10  | 2487.080        | 60.46          | -0.37                 | 60.09           | 74.00          | -13.91      | peak   |
| 11  | 2487.080        | 47.93          | -0.37                 | 47.56           | 54.00          | -6.44       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2488.520           | 62.08             | -0.37                    | 61.71              | 74.00             | -12.29         | peak   |
| 13  | 2488.520           | 45.63             | -0.37                    | 45.26              | 54.00             | -8.74          | AVG    |
| 14  | 2490.360           | 58.51             | -0.36                    | 58.15              | 74.00             | -15.85         | peak   |
| 15  | 2490.360           | 45.18             | -0.36                    | 44.82              | 54.00             | -9.18          | AVG    |
| 16  | 2492.280           | 58.46             | -0.35                    | 58.11              | 74.00             | -15.89         | peak   |
| 17  | 2492.280           | 45.02             | -0.35                    | 44.67              | 54.00             | -9.33          | AVG    |
| 18  | 2495.000           | 57.10             | -0.34                    | 56.76              | 74.00             | -17.24         | peak   |
| 19  | 2495.000           | 44.93             | -0.34                    | 44.59              | 54.00             | -9.41          | AVG    |
| 20  | 2498.840           | 56.21             | -0.31                    | 55.90              | 74.00             | -18.10         | peak   |
| 21  | 2498.840           | 44.64             | -0.31                    | 44.33              | 54.00             | -9.67          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |

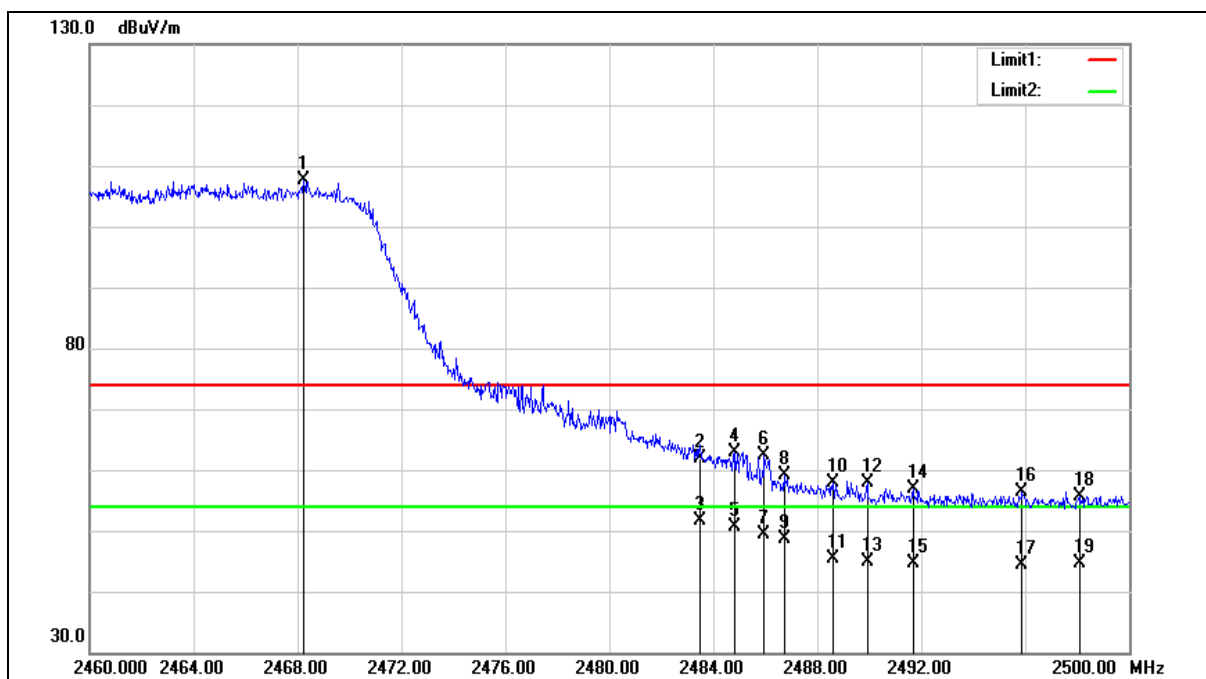

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2468.240        | 107.98         | -0.47                 | 107.51          | --             | --          | peak   |
| 2   | 2483.500        | 62.37          | -0.40                 | 61.97           | 74.00          | -12.03      | peak   |
| 3   | 2483.500        | 52.03          | -0.40                 | 51.63           | 54.00          | -2.37       | AVG    |
| 4   | 2484.800        | 63.35          | -0.39                 | 62.96           | 74.00          | -11.04      | peak   |
| 5   | 2484.800        | 50.94          | -0.39                 | 50.55           | 54.00          | -3.45       | AVG    |
| 6   | 2485.960        | 62.85          | -0.38                 | 62.47           | 74.00          | -11.53      | peak   |
| 7   | 2485.960        | 49.76          | -0.38                 | 49.38           | 54.00          | -4.62       | AVG    |
| 8   | 2486.720        | 59.42          | -0.38                 | 59.04           | 74.00          | -14.96      | peak   |
| 9   | 2486.720        | 49.03          | -0.38                 | 48.65           | 54.00          | -5.35       | AVG    |
| 10  | 2488.600        | 58.31          | -0.37                 | 57.94           | 74.00          | -16.06      | peak   |
| 11  | 2488.600        | 45.68          | -0.37                 | 45.31           | 54.00          | -8.69       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 4          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2489.920           | 58.32             | -0.36                    | 57.96              | 74.00             | -16.04         | peak   |
| 13  | 2489.920           | 45.12             | -0.36                    | 44.76              | 54.00             | -9.24          | AVG    |
| 14  | 2491.680           | 57.25             | -0.35                    | 56.90              | 74.00             | -17.10         | peak   |
| 15  | 2491.680           | 45.03             | -0.35                    | 44.68              | 54.00             | -9.32          | AVG    |
| 16  | 2495.880           | 56.60             | -0.33                    | 56.27              | 74.00             | -17.73         | peak   |
| 17  | 2495.880           | 44.62             | -0.33                    | 44.29              | 54.00             | -9.71          | AVG    |
| 18  | 2498.080           | 56.06             | -0.32                    | 55.74              | 74.00             | -18.26         | peak   |
| 19  | 2498.080           | 45.03             | -0.32                    | 44.71              | 54.00             | -9.29          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

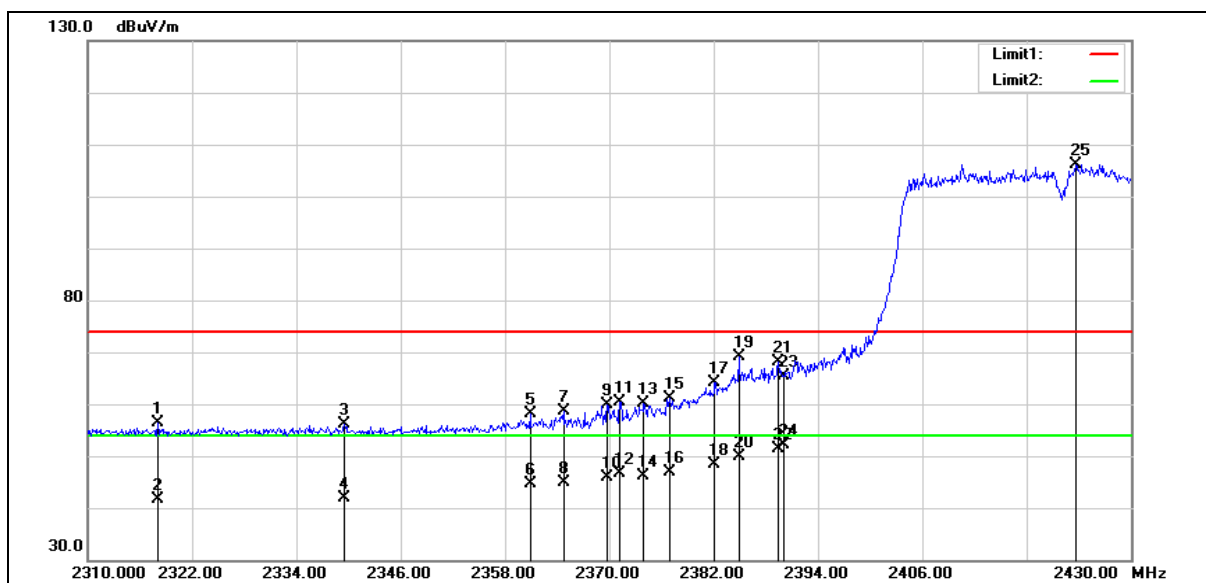

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2318.040        | 57.72          | -1.23                 | 56.49           | 74.00          | -17.51      | peak   |
| 2   | 2318.040        | 42.83          | -1.23                 | 41.60           | 54.00          | -12.40      | AVG    |
| 3   | 2339.520        | 57.22          | -1.13                 | 56.09           | 74.00          | -17.91      | peak   |
| 4   | 2339.520        | 42.91          | -1.13                 | 41.78           | 54.00          | -12.22      | AVG    |
| 5   | 2360.880        | 59.11          | -1.02                 | 58.09           | 74.00          | -15.91      | peak   |
| 6   | 2360.880        | 45.55          | -1.02                 | 44.53           | 54.00          | -9.47       | AVG    |
| 7   | 2364.720        | 59.66          | -1.00                 | 58.66           | 74.00          | -15.34      | peak   |
| 8   | 2364.720        | 45.87          | -1.00                 | 44.87           | 54.00          | -9.13       | AVG    |
| 9   | 2369.760        | 60.94          | -0.97                 | 59.97           | 74.00          | -14.03      | peak   |
| 10  | 2369.760        | 46.96          | -0.97                 | 45.99           | 54.00          | -8.01       | AVG    |
| 11  | 2371.200        | 61.37          | -0.97                 | 60.40           | 74.00          | -13.60      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2371.200           | 47.48             | -0.97                    | 46.51              | 54.00             | -7.49          | AVG    |
| 13  | 2373.960           | 61.13             | -0.96                    | 60.17              | 74.00             | -13.83         | peak   |
| 14  | 2373.960           | 47.09             | -0.96                    | 46.13              | 54.00             | -7.87          | AVG    |
| 15  | 2376.960           | 62.13             | -0.94                    | 61.19              | 74.00             | -12.81         | peak   |
| 16  | 2376.960           | 47.87             | -0.94                    | 46.93              | 54.00             | -7.07          | AVG    |
| 17  | 2382.120           | 65.09             | -0.91                    | 64.18              | 74.00             | -9.82          | peak   |
| 18  | 2382.120           | 49.36             | -0.91                    | 48.45              | 54.00             | -5.55          | AVG    |
| 19  | 2384.880           | 70.04             | -0.90                    | 69.14              | 74.00             | -4.86          | peak   |
| 20  | 2384.880           | 50.84             | -0.90                    | 49.94              | 54.00             | -4.06          | AVG    |
| 21  | 2389.440           | 69.01             | -0.88                    | 68.13              | 74.00             | -5.87          | peak   |
| 22  | 2389.440           | 52.35             | -0.88                    | 51.47              | 54.00             | -2.53          | AVG    |
| 23  | 2390.000           | 66.20             | -0.87                    | 65.33              | 74.00             | -8.67          | peak   |
| 24  | 2390.000           | 52.97             | -0.87                    | 52.10              | 54.00             | -1.90          | AVG    |
| 25  | 2423.640           | 106.81            | -0.70                    | 106.11             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

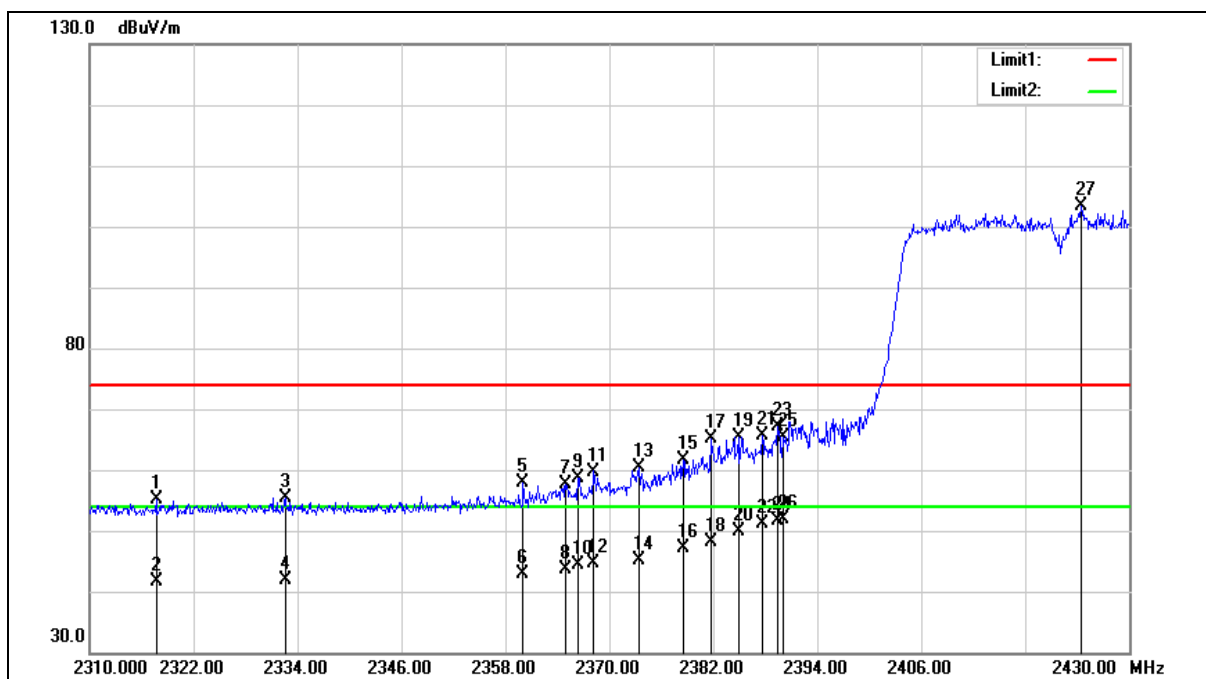

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2317.680        | 56.47          | -1.23                 | 55.24           | 74.00          | -18.76      | peak   |
| 2   | 2317.680        | 42.89          | -1.23                 | 41.66           | 54.00          | -12.34      | AVG    |
| 3   | 2332.560        | 56.42          | -1.16                 | 55.26           | 74.00          | -18.74      | peak   |
| 4   | 2332.560        | 43.14          | -1.16                 | 41.98           | 54.00          | -12.02      | AVG    |
| 5   | 2360.040        | 58.94          | -1.03                 | 57.91           | 74.00          | -16.09      | peak   |
| 6   | 2360.040        | 43.93          | -1.03                 | 42.90           | 54.00          | -11.10      | AVG    |
| 7   | 2364.960        | 58.55          | -1.00                 | 57.55           | 74.00          | -16.45      | peak   |
| 8   | 2364.960        | 44.58          | -1.00                 | 43.58           | 54.00          | -10.42      | AVG    |
| 9   | 2366.400        | 59.68          | -0.99                 | 58.69           | 74.00          | -15.31      | peak   |
| 10  | 2366.400        | 45.43          | -0.99                 | 44.44           | 54.00          | -9.56       | AVG    |
| 11  | 2368.200        | 60.74          | -0.99                 | 59.75           | 74.00          | -14.25      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2368.200           | 45.69             | -0.99                    | 44.70              | 54.00             | -9.30          | AVG    |
| 13  | 2373.480           | 61.35             | -0.96                    | 60.39              | 74.00             | -13.61         | peak   |
| 14  | 2373.480           | 46.21             | -0.96                    | 45.25              | 54.00             | -8.75          | AVG    |
| 15  | 2378.520           | 62.44             | -0.93                    | 61.51              | 74.00             | -12.49         | peak   |
| 16  | 2378.520           | 48.06             | -0.93                    | 47.13              | 54.00             | -6.87          | AVG    |
| 17  | 2381.760           | 66.13             | -0.91                    | 65.22              | 74.00             | -8.78          | peak   |
| 18  | 2381.760           | 48.99             | -0.91                    | 48.08              | 54.00             | -5.92          | AVG    |
| 19  | 2384.880           | 66.40             | -0.90                    | 65.50              | 74.00             | -8.50          | peak   |
| 20  | 2384.880           | 50.81             | -0.90                    | 49.91              | 54.00             | -4.09          | AVG    |
| 21  | 2387.640           | 66.51             | -0.88                    | 65.63              | 74.00             | -8.37          | peak   |
| 22  | 2387.640           | 51.97             | -0.88                    | 51.09              | 54.00             | -2.91          | AVG    |
| 23  | 2389.440           | 68.03             | -0.88                    | 67.15              | 74.00             | -6.85          | peak   |
| 24  | 2389.440           | 52.39             | -0.88                    | 51.51              | 54.00             | -2.49          | AVG    |
| 25  | 2390.000           | 66.26             | -0.87                    | 65.39              | 74.00             | -8.61          | peak   |
| 26  | 2390.000           | 52.75             | -0.87                    | 51.88              | 54.00             | -2.12          | AVG    |
| 27  | 2424.480           | 104.04            | -0.70                    | 103.34             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

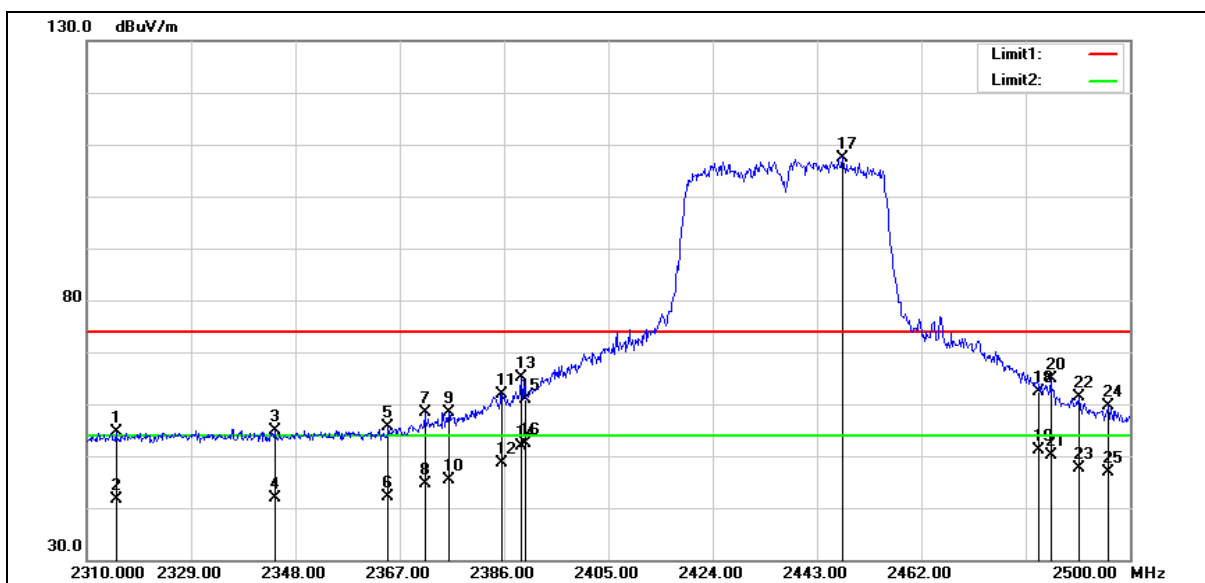

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2315.320        | 55.96          | -1.25                 | 54.71           | 74.00          | -19.29      | peak   |
| 2   | 2315.320        | 42.84          | -1.25                 | 41.59           | 54.00          | -12.41      | AVG    |
| 3   | 2344.200        | 56.08          | -1.10                 | 54.98           | 74.00          | -19.02      | peak   |
| 4   | 2344.200        | 42.93          | -1.10                 | 41.83           | 54.00          | -12.17      | AVG    |
| 5   | 2364.910        | 56.63          | -1.00                 | 55.63           | 74.00          | -18.37      | peak   |
| 6   | 2364.910        | 43.24          | -1.00                 | 42.24           | 54.00          | -11.76      | AVG    |
| 7   | 2371.560        | 59.46          | -0.97                 | 58.49           | 74.00          | -15.51      | peak   |
| 8   | 2371.560        | 45.64          | -0.97                 | 44.67           | 54.00          | -9.33       | AVG    |
| 9   | 2375.930        | 59.42          | -0.94                 | 58.48           | 74.00          | -15.52      | peak   |
| 10  | 2375.930        | 46.27          | -0.94                 | 45.33           | 54.00          | -8.67       | AVG    |
| 11  | 2385.620        | 62.88          | -0.90                 | 61.98           | 74.00          | -12.02      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2385.620           | 49.62             | -0.90                    | 48.72              | 54.00             | -5.28          | AVG    |
| 13  | 2389.230           | 65.96             | -0.88                    | 65.08              | 74.00             | -8.92          | peak   |
| 14  | 2389.230           | 52.82             | -0.88                    | 51.94              | 54.00             | -2.06          | AVG    |
| 15  | 2390.000           | 61.77             | -0.87                    | 60.90              | 74.00             | -13.10         | peak   |
| 16  | 2390.000           | 53.21             | -0.87                    | 52.34              | 54.00             | -1.66          | AVG    |
| 17  | 2447.560           | 108.08            | -0.58                    | 107.50             | --                | --             | peak   |
| 18  | 2483.500           | 62.78             | -0.40                    | 62.38              | 74.00             | -11.62         | peak   |
| 19  | 2483.500           | 51.56             | -0.40                    | 51.16              | 54.00             | -2.84          | AVG    |
| 20  | 2485.560           | 65.33             | -0.38                    | 64.95              | 74.00             | -9.05          | peak   |
| 21  | 2485.560           | 50.61             | -0.38                    | 50.23              | 54.00             | -3.77          | AVG    |
| 22  | 2490.690           | 61.64             | -0.36                    | 61.28              | 74.00             | -12.72         | peak   |
| 23  | 2490.690           | 47.99             | -0.36                    | 47.63              | 54.00             | -6.37          | AVG    |
| 24  | 2496.010           | 59.93             | -0.33                    | 59.60              | 74.00             | -14.40         | peak   |
| 25  | 2496.010           | 47.11             | -0.33                    | 46.78              | 54.00             | -7.22          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

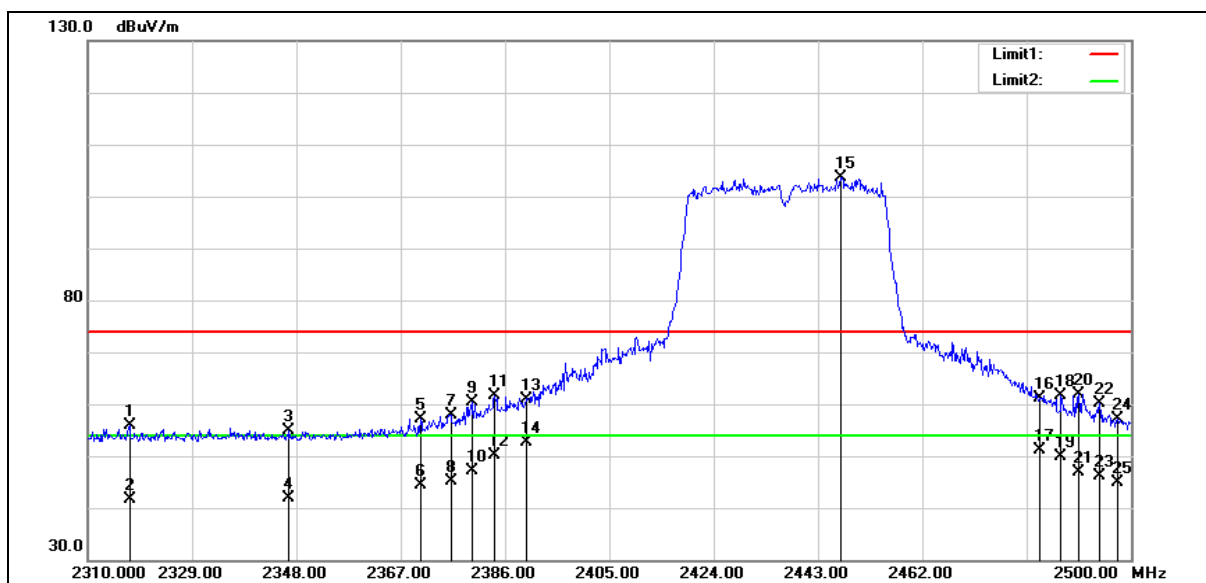

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2317.600        | 57.00          | -1.23                 | 55.77           | 74.00          | -18.23      | peak   |
| 2   | 2317.600        | 42.88          | -1.23                 | 41.65           | 54.00          | -12.35      | AVG    |
| 3   | 2346.670        | 55.88          | -1.08                 | 54.80           | 74.00          | -19.20      | peak   |
| 4   | 2346.670        | 42.99          | -1.08                 | 41.91           | 54.00          | -12.09      | AVG    |
| 5   | 2370.610        | 58.11          | -0.97                 | 57.14           | 74.00          | -16.86      | peak   |
| 6   | 2370.610        | 45.44          | -0.97                 | 44.47           | 54.00          | -9.53       | AVG    |
| 7   | 2376.120        | 58.88          | -0.94                 | 57.94           | 74.00          | -16.06      | peak   |
| 8   | 2376.120        | 46.04          | -0.94                 | 45.10           | 54.00          | -8.90       | AVG    |
| 9   | 2380.110        | 61.19          | -0.93                 | 60.26           | 74.00          | -13.74      | peak   |
| 10  | 2380.110        | 48.12          | -0.93                 | 47.19           | 54.00          | -6.81       | AVG    |
| 11  | 2384.100        | 62.49          | -0.90                 | 61.59           | 74.00          | -12.41      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2384.100           | 50.91             | -0.90                    | 50.01              | 54.00             | -3.99          | AVG    |
| 13  | 2390.000           | 61.75             | -0.87                    | 60.88              | 74.00             | -13.12         | peak   |
| 14  | 2390.000           | 53.41             | -0.87                    | 52.54              | 54.00             | -1.46          | AVG    |
| 15  | 2447.180           | 104.13            | -0.58                    | 103.55             | --                | --             | peak   |
| 16  | 2483.500           | 61.55             | -0.40                    | 61.15              | 74.00             | -12.85         | peak   |
| 17  | 2483.500           | 51.46             | -0.40                    | 51.06              | 54.00             | -2.94          | AVG    |
| 18  | 2487.270           | 62.00             | -0.37                    | 61.63              | 74.00             | -12.37         | peak   |
| 19  | 2487.270           | 50.30             | -0.37                    | 49.93              | 54.00             | -4.07          | AVG    |
| 20  | 2490.500           | 62.34             | -0.36                    | 61.98              | 74.00             | -12.02         | peak   |
| 21  | 2490.500           | 47.24             | -0.36                    | 46.88              | 54.00             | -7.12          | AVG    |
| 22  | 2494.300           | 60.46             | -0.34                    | 60.12              | 74.00             | -13.88         | peak   |
| 23  | 2494.300           | 46.36             | -0.34                    | 46.02              | 54.00             | -7.98          | AVG    |
| 24  | 2497.530           | 57.49             | -0.32                    | 57.17              | 74.00             | -16.83         | peak   |
| 25  | 2497.530           | 45.27             | -0.32                    | 44.95              | 54.00             | -9.05          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

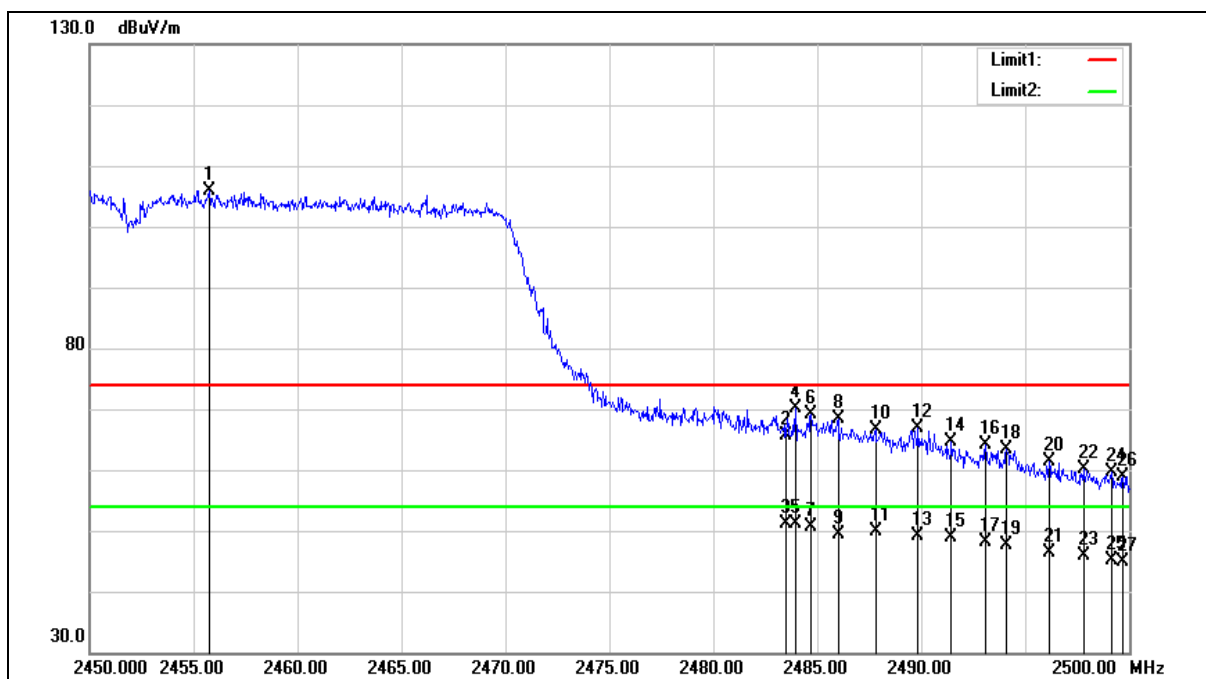

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2455.750        | 106.50         | -0.54                 | 105.96          | --             | --          | peak   |
| 2   | 2483.500        | 66.08          | -0.40                 | 65.68           | 74.00          | -8.32       | peak   |
| 3   | 2483.500        | 51.62          | -0.40                 | 51.22           | 54.00          | -2.78       | AVG    |
| 4   | 2483.950        | 70.62          | -0.39                 | 70.23           | 74.00          | -3.77       | peak   |
| 5   | 2483.950        | 51.47          | -0.39                 | 51.08           | 54.00          | -2.92       | AVG    |
| 6   | 2484.700        | 69.47          | -0.39                 | 69.08           | 74.00          | -4.92       | peak   |
| 7   | 2484.700        | 51.08          | -0.39                 | 50.69           | 54.00          | -3.31       | AVG    |
| 8   | 2486.000        | 68.86          | -0.38                 | 68.48           | 74.00          | -5.52       | peak   |
| 9   | 2486.000        | 49.85          | -0.38                 | 49.47           | 54.00          | -4.53       | AVG    |
| 10  | 2487.800        | 67.00          | -0.37                 | 66.63           | 74.00          | -7.37       | peak   |
| 11  | 2487.800        | 50.22          | -0.37                 | 49.85           | 54.00          | -4.15       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2489.850           | 67.27             | -0.36                    | 66.91              | 74.00             | -7.09          | peak   |
| 13  | 2489.850           | 49.58             | -0.36                    | 49.22              | 54.00             | -4.78          | AVG    |
| 14  | 2491.450           | 65.06             | -0.35                    | 64.71              | 74.00             | -9.29          | peak   |
| 15  | 2491.450           | 49.19             | -0.35                    | 48.84              | 54.00             | -5.16          | AVG    |
| 16  | 2493.100           | 64.44             | -0.34                    | 64.10              | 74.00             | -9.90          | peak   |
| 17  | 2493.100           | 48.38             | -0.34                    | 48.04              | 54.00             | -5.96          | AVG    |
| 18  | 2494.100           | 63.75             | -0.34                    | 63.41              | 74.00             | -10.59         | peak   |
| 19  | 2494.100           | 47.87             | -0.34                    | 47.53              | 54.00             | -6.47          | AVG    |
| 20  | 2496.150           | 61.68             | -0.33                    | 61.35              | 74.00             | -12.65         | peak   |
| 21  | 2496.150           | 46.78             | -0.33                    | 46.45              | 54.00             | -7.55          | AVG    |
| 22  | 2497.800           | 60.33             | -0.32                    | 60.01              | 74.00             | -13.99         | peak   |
| 23  | 2497.800           | 46.28             | -0.32                    | 45.96              | 54.00             | -8.04          | AVG    |
| 24  | 2499.150           | 59.99             | -0.31                    | 59.68              | 74.00             | -14.32         | peak   |
| 25  | 2499.150           | 45.39             | -0.31                    | 45.08              | 54.00             | -8.92          | AVG    |
| 26  | 2499.700           | 59.22             | -0.31                    | 58.91              | 74.00             | -15.09         | peak   |
| 27  | 2499.700           | 45.20             | -0.31                    | 44.89              | 54.00             | -9.11          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |

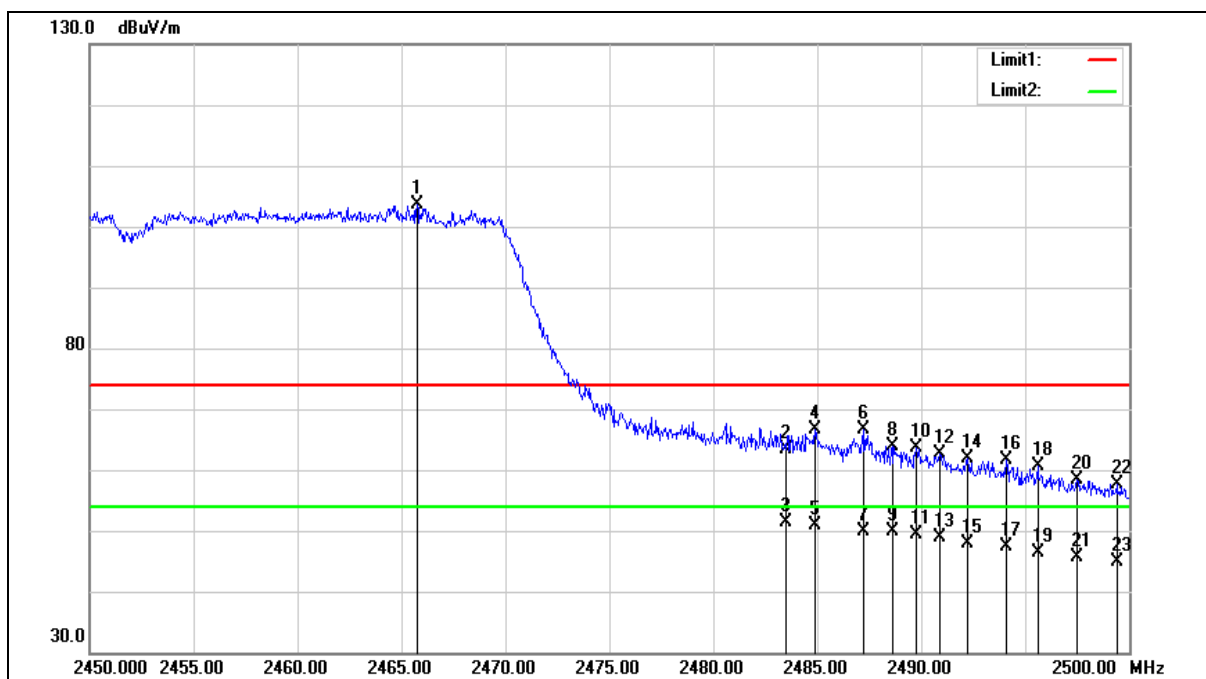

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2465.750        | 104.07         | -0.49                 | 103.58          | --             | --          | peak   |
| 2   | 2483.500        | 63.77          | -0.40                 | 63.37           | 74.00          | -10.63      | peak   |
| 3   | 2483.500        | 51.81          | -0.40                 | 51.41           | 54.00          | -2.59       | AVG    |
| 4   | 2484.900        | 67.13          | -0.39                 | 66.74           | 74.00          | -7.26       | peak   |
| 5   | 2484.900        | 51.21          | -0.39                 | 50.82           | 54.00          | -3.18       | AVG    |
| 6   | 2487.250        | 67.12          | -0.37                 | 66.75           | 74.00          | -7.25       | peak   |
| 7   | 2487.250        | 50.29          | -0.37                 | 49.92           | 54.00          | -4.08       | AVG    |
| 8   | 2488.600        | 64.35          | -0.37                 | 63.98           | 74.00          | -10.02      | peak   |
| 9   | 2488.600        | 50.15          | -0.37                 | 49.78           | 54.00          | -4.22       | AVG    |
| 10  | 2489.750        | 64.11          | -0.36                 | 63.75           | 74.00          | -10.25      | peak   |
| 11  | 2489.750        | 49.83          | -0.36                 | 49.47           | 54.00          | -4.53       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 5          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2490.900           | 62.98             | -0.36                    | 62.62              | 74.00             | -11.38         | peak   |
| 13  | 2490.900           | 49.14             | -0.36                    | 48.78              | 54.00             | -5.22          | AVG    |
| 14  | 2492.250           | 62.12             | -0.35                    | 61.77              | 74.00             | -12.23         | peak   |
| 15  | 2492.250           | 48.26             | -0.35                    | 47.91              | 54.00             | -6.09          | AVG    |
| 16  | 2494.100           | 62.03             | -0.34                    | 61.69              | 74.00             | -12.31         | peak   |
| 17  | 2494.100           | 47.61             | -0.34                    | 47.27              | 54.00             | -6.73          | AVG    |
| 18  | 2495.600           | 60.99             | -0.33                    | 60.66              | 74.00             | -13.34         | peak   |
| 19  | 2495.600           | 46.65             | -0.33                    | 46.32              | 54.00             | -7.68          | AVG    |
| 20  | 2497.500           | 58.63             | -0.32                    | 58.31              | 74.00             | -15.69         | peak   |
| 21  | 2497.500           | 45.84             | -0.32                    | 45.52              | 54.00             | -8.48          | AVG    |
| 22  | 2499.400           | 57.96             | -0.31                    | 57.65              | 74.00             | -16.35         | peak   |
| 23  | 2499.400           | 45.09             | -0.31                    | 44.78              | 54.00             | -9.22          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

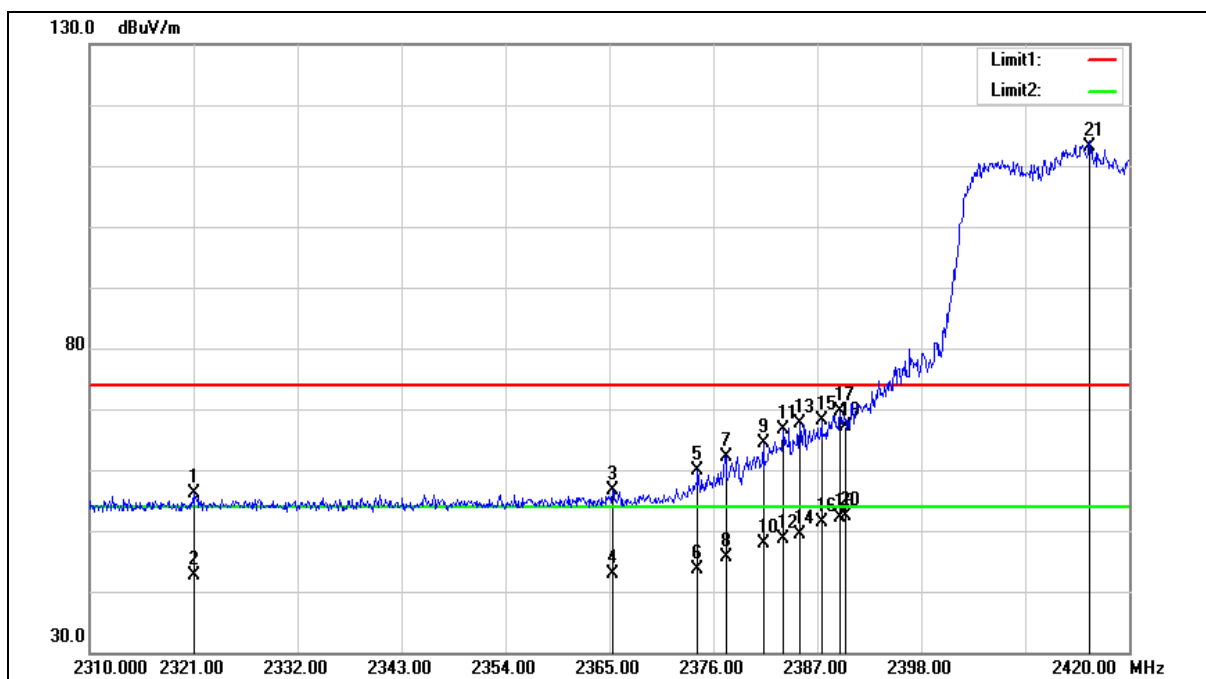

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2321.110        | 57.40          | -1.22                 | 56.18           | 74.00          | -17.82      | peak   |
| 2   | 2321.110        | 43.73          | -1.22                 | 42.51           | 54.00          | -11.49      | AVG    |
| 3   | 2365.330        | 57.67          | -1.00                 | 56.67           | 74.00          | -17.33      | peak   |
| 4   | 2365.330        | 43.96          | -1.00                 | 42.96           | 54.00          | -11.04      | AVG    |
| 5   | 2374.350        | 60.79          | -0.96                 | 59.83           | 74.00          | -14.17      | peak   |
| 6   | 2374.350        | 44.64          | -0.96                 | 43.68           | 54.00          | -10.32      | AVG    |
| 7   | 2377.320        | 63.17          | -0.94                 | 62.23           | 74.00          | -11.77      | peak   |
| 8   | 2377.320        | 46.59          | -0.94                 | 45.65           | 54.00          | -8.35       | AVG    |
| 9   | 2381.280        | 65.25          | -0.91                 | 64.34           | 74.00          | -9.66       | peak   |
| 10  | 2381.280        | 48.78          | -0.91                 | 47.87           | 54.00          | -6.13       | AVG    |
| 11  | 2383.370        | 67.66          | -0.91                 | 66.75           | 74.00          | -7.25       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2383.370           | 49.62             | -0.91                    | 48.71              | 54.00             | -5.29          | AVG    |
| 13  | 2385.130           | 68.59             | -0.90                    | 67.69              | 74.00             | -6.31          | peak   |
| 14  | 2385.130           | 50.38             | -0.90                    | 49.48              | 54.00             | -4.52          | AVG    |
| 15  | 2387.440           | 68.95             | -0.88                    | 68.07              | 74.00             | -5.93          | peak   |
| 16  | 2387.440           | 52.20             | -0.88                    | 51.32              | 54.00             | -2.68          | AVG    |
| 17  | 2389.420           | 70.58             | -0.88                    | 69.70              | 74.00             | -4.30          | peak   |
| 18  | 2389.420           | 52.89             | -0.88                    | 52.01              | 54.00             | -1.99          | AVG    |
| 19  | 2390.000           | 68.11             | -0.87                    | 67.24              | 74.00             | -6.76          | peak   |
| 20  | 2390.000           | 53.17             | -0.87                    | 52.30              | 54.00             | -1.70          | AVG    |
| 21  | 2415.820           | 113.97            | -0.74                    | 113.23             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

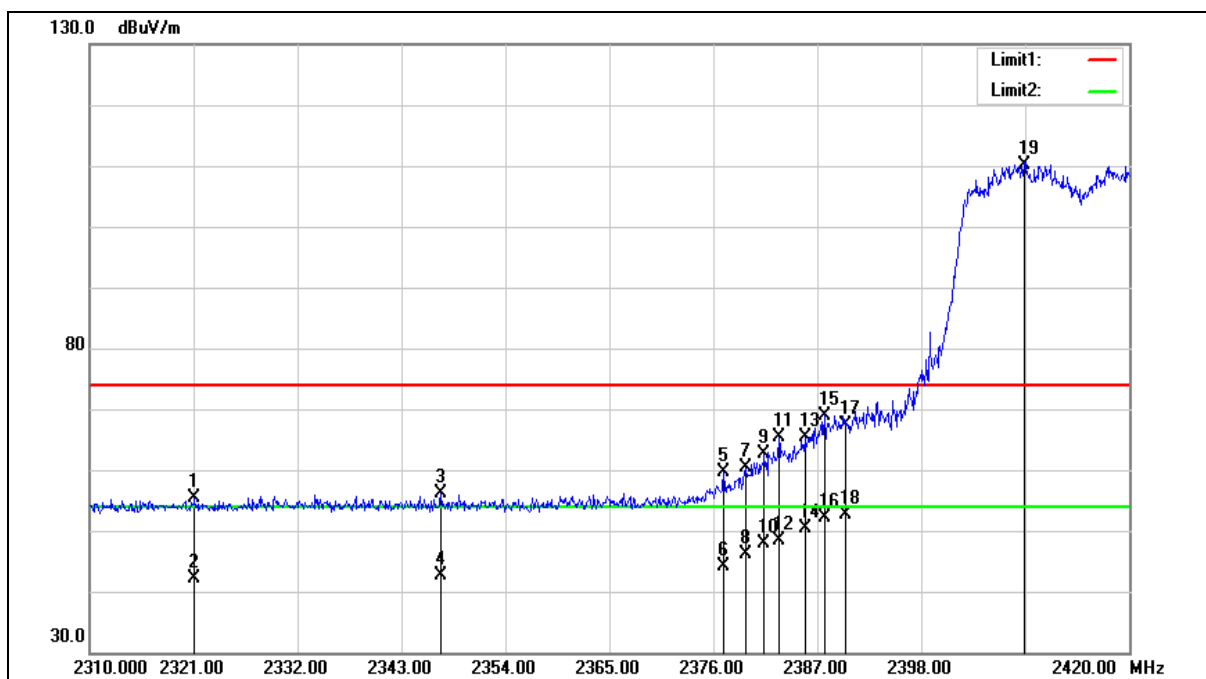

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2321.110        | 56.66          | -1.22                 | 55.44           | 74.00          | -18.56      | peak   |
| 2   | 2321.110        | 43.29          | -1.22                 | 42.07           | 54.00          | -11.93      | AVG    |
| 3   | 2347.180        | 57.16          | -1.08                 | 56.08           | 74.00          | -17.92      | peak   |
| 4   | 2347.180        | 43.62          | -1.08                 | 42.54           | 54.00          | -11.46      | AVG    |
| 5   | 2377.100        | 60.51          | -0.94                 | 59.57           | 74.00          | -14.43      | peak   |
| 6   | 2377.100        | 45.11          | -0.94                 | 44.17           | 54.00          | -9.83       | AVG    |
| 7   | 2379.410        | 61.31          | -0.93                 | 60.38           | 74.00          | -13.62      | peak   |
| 8   | 2379.410        | 47.14          | -0.93                 | 46.21           | 54.00          | -7.79       | AVG    |
| 9   | 2381.390        | 63.54          | -0.91                 | 62.63           | 74.00          | -11.37      | peak   |
| 10  | 2381.390        | 48.69          | -0.91                 | 47.78           | 54.00          | -6.22       | AVG    |
| 11  | 2382.930        | 66.39          | -0.91                 | 65.48           | 74.00          | -8.52       | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2412 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2382.930           | 49.29             | -0.91                    | 48.38              | 54.00             | -5.62          | AVG    |
| 13  | 2385.680           | 66.26             | -0.90                    | 65.36              | 74.00             | -8.64          | peak   |
| 14  | 2385.680           | 51.26             | -0.90                    | 50.36              | 54.00             | -3.64          | AVG    |
| 15  | 2387.770           | 69.88             | -0.88                    | 69.00              | 74.00             | -5.00          | peak   |
| 16  | 2387.770           | 52.96             | -0.88                    | 52.08              | 54.00             | -1.92          | AVG    |
| 17  | 2390.000           | 68.26             | -0.87                    | 67.39              | 74.00             | -6.61          | peak   |
| 18  | 2390.000           | 53.44             | -0.87                    | 52.57              | 54.00             | -1.43          | AVG    |
| 19  | 2408.890           | 110.90            | -0.78                    | 110.12             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

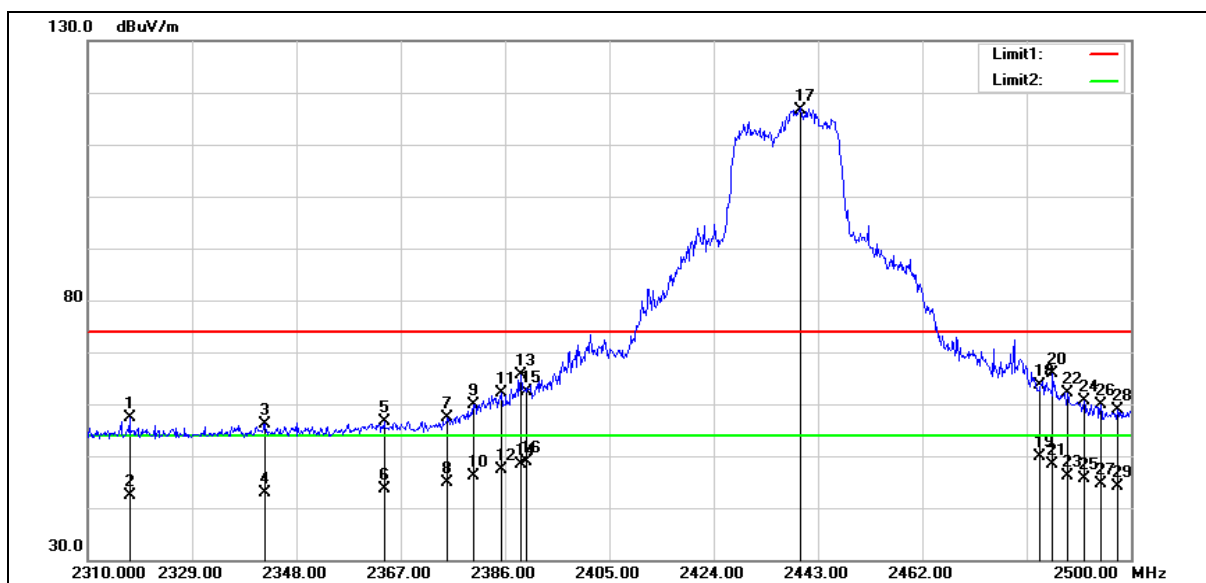

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2317.600        | 58.54          | -1.23                 | 57.31           | 74.00          | -16.69      | peak   |
| 2   | 2317.600        | 43.51          | -1.23                 | 42.28           | 54.00          | -11.72      | AVG    |
| 3   | 2342.300        | 57.36          | -1.11                 | 56.25           | 74.00          | -17.75      | peak   |
| 4   | 2342.300        | 43.98          | -1.11                 | 42.87           | 54.00          | -11.13      | AVG    |
| 5   | 2363.960        | 57.69          | -1.00                 | 56.69           | 74.00          | -17.31      | peak   |
| 6   | 2363.960        | 44.56          | -1.00                 | 43.56           | 54.00          | -10.44      | AVG    |
| 7   | 2375.550        | 58.40          | -0.94                 | 57.46           | 74.00          | -16.54      | peak   |
| 8   | 2375.550        | 45.75          | -0.94                 | 44.81           | 54.00          | -9.19       | AVG    |
| 9   | 2380.300        | 60.90          | -0.93                 | 59.97           | 74.00          | -14.03      | peak   |
| 10  | 2380.300        | 46.94          | -0.93                 | 46.01           | 54.00          | -7.99       | AVG    |
| 11  | 2385.430        | 63.08          | -0.90                 | 62.18           | 74.00          | -11.82      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2385.430           | 48.29             | -0.90                    | 47.39              | 54.00             | -6.61          | AVG    |
| 13  | 2388.850           | 66.42             | -0.88                    | 65.54              | 74.00             | -8.46          | peak   |
| 14  | 2388.850           | 49.18             | -0.88                    | 48.30              | 54.00             | -5.70          | AVG    |
| 15  | 2390.000           | 63.20             | -0.87                    | 62.33              | 74.00             | -11.67         | peak   |
| 16  | 2390.000           | 49.79             | -0.87                    | 48.92              | 54.00             | -5.08          | AVG    |
| 17  | 2439.770           | 117.14            | -0.61                    | 116.53             | --                | --             | peak   |
| 18  | 2483.500           | 64.09             | -0.40                    | 63.69              | 74.00             | -10.31         | peak   |
| 19  | 2483.500           | 50.27             | -0.40                    | 49.87              | 54.00             | -4.13          | AVG    |
| 20  | 2485.750           | 66.34             | -0.38                    | 65.96              | 74.00             | -8.04          | peak   |
| 21  | 2485.750           | 48.74             | -0.38                    | 48.36              | 54.00             | -5.64          | AVG    |
| 22  | 2488.410           | 62.42             | -0.37                    | 62.05              | 74.00             | -11.95         | peak   |
| 23  | 2488.410           | 46.49             | -0.37                    | 46.12              | 54.00             | -7.88          | AVG    |
| 24  | 2491.450           | 60.98             | -0.35                    | 60.63              | 74.00             | -13.37         | peak   |
| 25  | 2491.450           | 45.89             | -0.35                    | 45.54              | 54.00             | -8.46          | AVG    |
| 26  | 2494.490           | 60.10             | -0.34                    | 59.76              | 74.00             | -14.24         | peak   |
| 27  | 2494.490           | 44.85             | -0.34                    | 44.51              | 54.00             | -9.49          | AVG    |
| 28  | 2497.530           | 59.16             | -0.32                    | 58.84              | 74.00             | -15.16         | peak   |
| 29  | 2497.530           | 44.34             | -0.32                    | 44.02              | 54.00             | -9.98          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

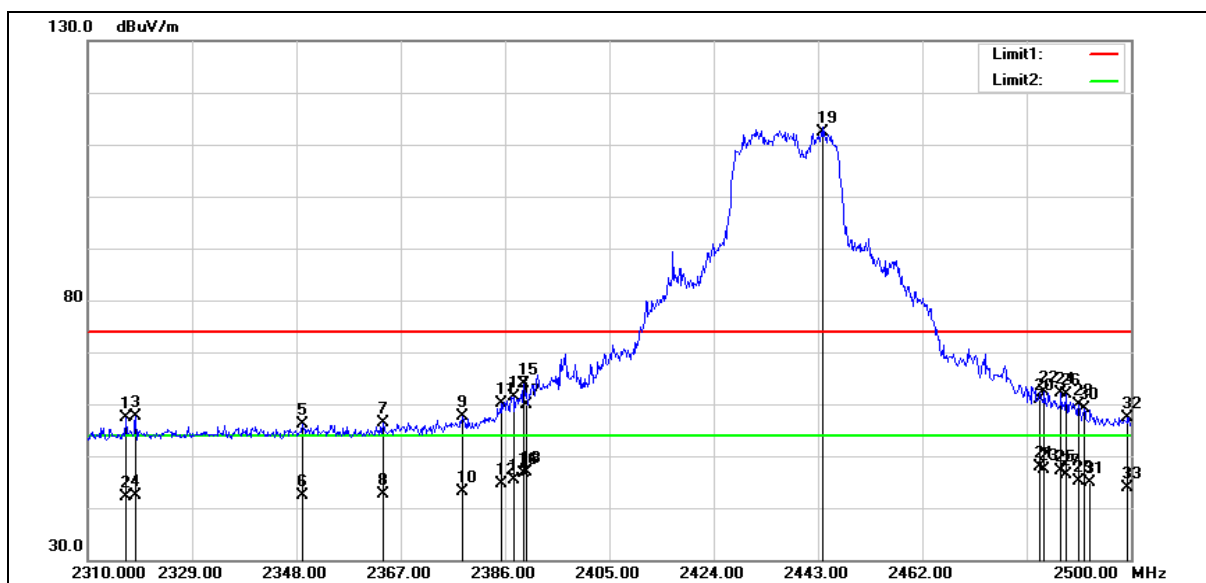

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 1   | 2317.030           | 58.65             | -1.23                    | 57.42              | 74.00             | -16.58         | peak   |
| 2   | 2317.030           | 43.41             | -1.23                    | 42.18              | 54.00             | -11.82         | AVG    |
| 3   | 2318.740           | 58.80             | -1.23                    | 57.57              | 74.00             | -16.43         | peak   |
| 4   | 2318.740           | 43.49             | -1.23                    | 42.26              | 54.00             | -11.74         | AVG    |
| 5   | 2349.140           | 57.17             | -1.07                    | 56.10              | 74.00             | -17.90         | peak   |
| 6   | 2349.140           | 43.54             | -1.07                    | 42.47              | 54.00             | -11.53         | AVG    |
| 7   | 2363.770           | 57.40             | -1.00                    | 56.40              | 74.00             | -17.60         | peak   |
| 8   | 2363.770           | 43.65             | -1.00                    | 42.65              | 54.00             | -11.35         | AVG    |
| 9   | 2378.210           | 58.62             | -0.93                    | 57.69              | 74.00             | -16.31         | peak   |
| 10  | 2378.210           | 44.13             | -0.93                    | 43.20              | 54.00             | -10.80         | AVG    |
| 11  | 2385.240           | 60.95             | -0.90                    | 60.05              | 74.00             | -13.95         | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2385.240           | 45.62             | -0.90                    | 44.72              | 54.00             | -9.28          | AVG    |
| 13  | 2387.520           | 62.19             | -0.88                    | 61.31              | 74.00             | -12.69         | peak   |
| 14  | 2387.520           | 46.36             | -0.88                    | 45.48              | 54.00             | -8.52          | AVG    |
| 15  | 2389.420           | 64.71             | -0.88                    | 63.83              | 74.00             | -10.17         | peak   |
| 16  | 2389.420           | 47.40             | -0.88                    | 46.52              | 54.00             | -7.48          | AVG    |
| 17  | 2390.000           | 60.65             | -0.87                    | 59.78              | 74.00             | -14.22         | peak   |
| 18  | 2390.000           | 47.83             | -0.87                    | 46.96              | 54.00             | -7.04          | AVG    |
| 19  | 2443.950           | 112.87            | -0.60                    | 112.27             | --                | --             | peak   |
| 20  | 2483.500           | 61.28             | -0.40                    | 60.88              | 74.00             | -13.12         | peak   |
| 21  | 2483.500           | 48.32             | -0.40                    | 47.92              | 54.00             | -6.08          | AVG    |
| 22  | 2484.230           | 62.68             | -0.39                    | 62.29              | 74.00             | -11.71         | peak   |
| 23  | 2484.230           | 47.89             | -0.39                    | 47.50              | 54.00             | -6.50          | AVG    |
| 24  | 2487.270           | 62.47             | -0.37                    | 62.10              | 74.00             | -11.90         | peak   |
| 25  | 2487.270           | 47.58             | -0.37                    | 47.21              | 54.00             | -6.79          | AVG    |
| 26  | 2488.220           | 62.30             | -0.37                    | 61.93              | 74.00             | -12.07         | peak   |
| 27  | 2488.220           | 46.85             | -0.37                    | 46.48              | 54.00             | -7.52          | AVG    |
| 28  | 2490.500           | 60.14             | -0.36                    | 59.78              | 74.00             | -14.22         | peak   |
| 29  | 2490.500           | 45.49             | -0.36                    | 45.13              | 54.00             | -8.87          | AVG    |
| 30  | 2491.450           | 59.59             | -0.35                    | 59.24              | 74.00             | -14.76         | peak   |
| 31  | 2492.590           | 45.27             | -0.35                    | 44.92              | 54.00             | -9.08          | AVG    |
| 32  | 2499.430           | 57.75             | -0.31                    | 57.44              | 74.00             | -16.56         | peak   |
| 33  | 2499.430           | 44.12             | -0.31                    | 43.81              | 54.00             | -10.19         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

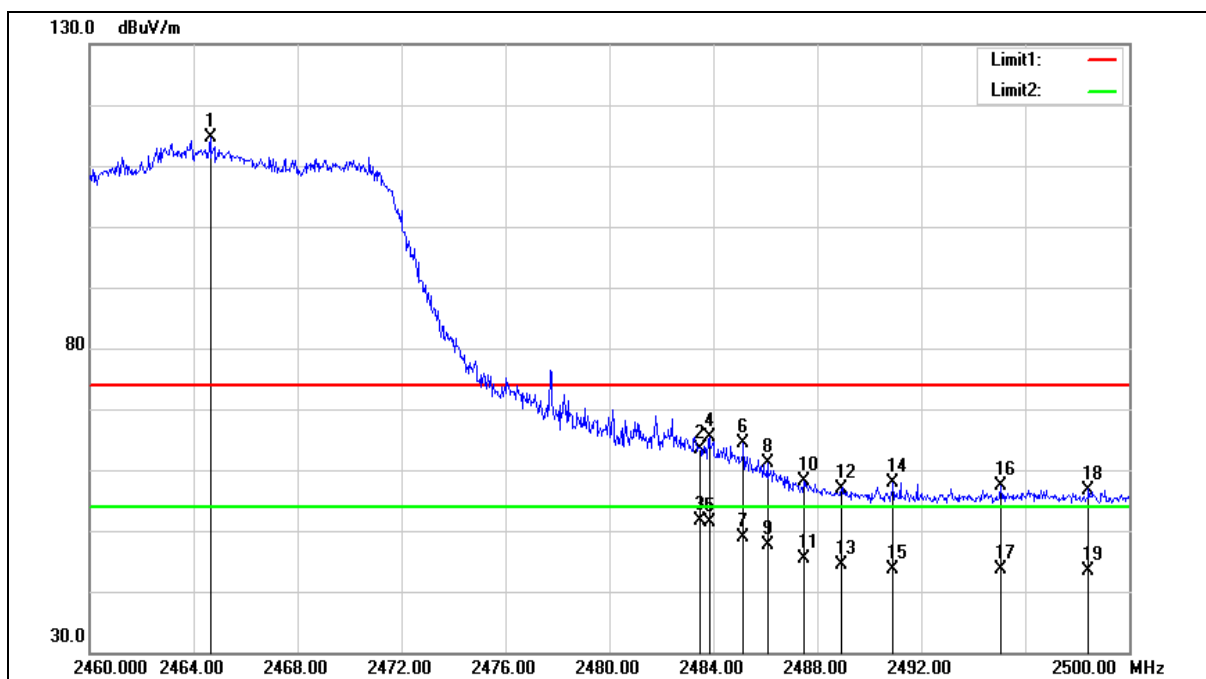

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2464.640        | 115.08         | -0.49                 | 114.59          | --             | --          | peak   |
| 2   | 2483.500        | 63.73          | -0.40                 | 63.33           | 74.00          | -10.67      | peak   |
| 3   | 2483.500        | 52.10          | -0.40                 | 51.70           | 54.00          | -2.30       | AVG    |
| 4   | 2483.840        | 65.67          | -0.39                 | 65.28           | 74.00          | -8.72       | peak   |
| 5   | 2483.840        | 51.67          | -0.39                 | 51.28           | 54.00          | -2.72       | AVG    |
| 6   | 2485.160        | 64.83          | -0.39                 | 64.44           | 74.00          | -9.56       | peak   |
| 7   | 2485.160        | 49.35          | -0.39                 | 48.96           | 54.00          | -5.04       | AVG    |
| 8   | 2486.080        | 61.49          | -0.38                 | 61.11           | 74.00          | -12.89      | peak   |
| 9   | 2486.080        | 47.92          | -0.38                 | 47.54           | 54.00          | -6.46       | AVG    |
| 10  | 2487.480        | 58.39          | -0.37                 | 58.02           | 74.00          | -15.98      | peak   |
| 11  | 2487.480        | 45.68          | -0.37                 | 45.31           | 54.00          | -8.69       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2488.920           | 57.35             | -0.37                    | 56.98              | 74.00             | -17.02         | peak   |
| 13  | 2488.920           | 44.65             | -0.37                    | 44.28              | 54.00             | -9.72          | AVG    |
| 14  | 2490.920           | 58.24             | -0.36                    | 57.88              | 74.00             | -16.12         | peak   |
| 15  | 2490.920           | 44.04             | -0.36                    | 43.68              | 54.00             | -10.32         | AVG    |
| 16  | 2495.040           | 57.81             | -0.34                    | 57.47              | 74.00             | -16.53         | peak   |
| 17  | 2495.040           | 43.93             | -0.34                    | 43.59              | 54.00             | -10.41         | AVG    |
| 18  | 2498.440           | 57.07             | -0.32                    | 56.75              | 74.00             | -17.25         | peak   |
| 19  | 2498.440           | 43.69             | -0.32                    | 43.37              | 54.00             | -10.63         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |

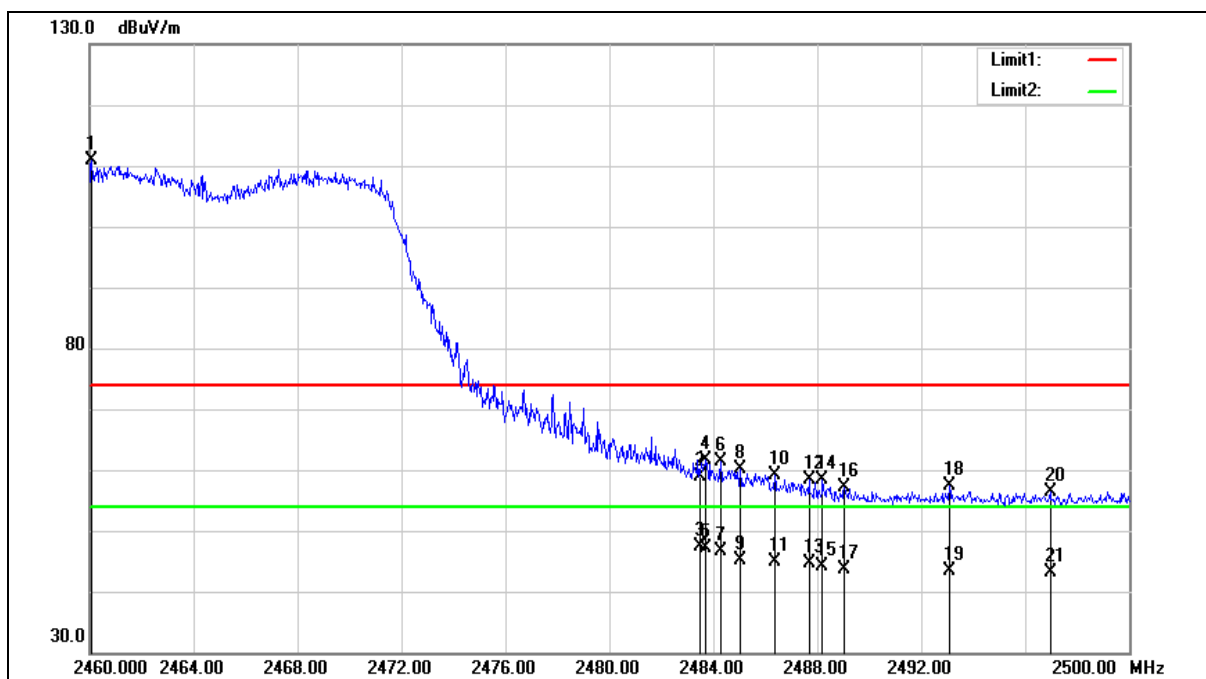

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2460.080        | 111.38         | -0.52                 | 110.86          | --             | --          | peak   |
| 2   | 2483.500        | 59.23          | -0.40                 | 58.83           | 74.00          | -15.17      | peak   |
| 3   | 2483.500        | 47.89          | -0.40                 | 47.49           | 54.00          | -6.51       | AVG    |
| 4   | 2483.720        | 61.97          | -0.40                 | 61.57           | 74.00          | -12.43      | peak   |
| 5   | 2483.720        | 47.42          | -0.40                 | 47.02           | 54.00          | -6.98       | AVG    |
| 6   | 2484.280        | 61.69          | -0.39                 | 61.30           | 74.00          | -12.70      | peak   |
| 7   | 2484.280        | 47.08          | -0.39                 | 46.69           | 54.00          | -7.31       | AVG    |
| 8   | 2485.040        | 60.54          | -0.39                 | 60.15           | 74.00          | -13.85      | peak   |
| 9   | 2485.040        | 45.43          | -0.39                 | 45.04           | 54.00          | -8.96       | AVG    |
| 10  | 2486.360        | 59.42          | -0.38                 | 59.04           | 74.00          | -14.96      | peak   |
| 11  | 2486.360        | 45.25          | -0.38                 | 44.87           | 54.00          | -9.13       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2462 MHz        |                |    |
| Mode:       | Mode 6          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2487.680           | 58.81             | -0.37                    | 58.44              | 74.00             | -15.56         | peak   |
| 13  | 2487.680           | 44.94             | -0.37                    | 44.57              | 54.00             | -9.43          | AVG    |
| 14  | 2488.200           | 58.80             | -0.37                    | 58.43              | 74.00             | -15.57         | peak   |
| 15  | 2488.200           | 44.40             | -0.37                    | 44.03              | 54.00             | -9.97          | AVG    |
| 16  | 2489.040           | 57.45             | -0.37                    | 57.08              | 74.00             | -16.92         | peak   |
| 17  | 2489.040           | 44.05             | -0.37                    | 43.68              | 54.00             | -10.32         | AVG    |
| 18  | 2493.080           | 57.66             | -0.34                    | 57.32              | 74.00             | -16.68         | peak   |
| 19  | 2493.080           | 43.62             | -0.34                    | 43.28              | 54.00             | -10.72         | AVG    |
| 20  | 2496.960           | 56.68             | -0.33                    | 56.35              | 74.00             | -17.65         | peak   |
| 21  | 2496.960           | 43.53             | -0.33                    | 43.20              | 54.00             | -10.80         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

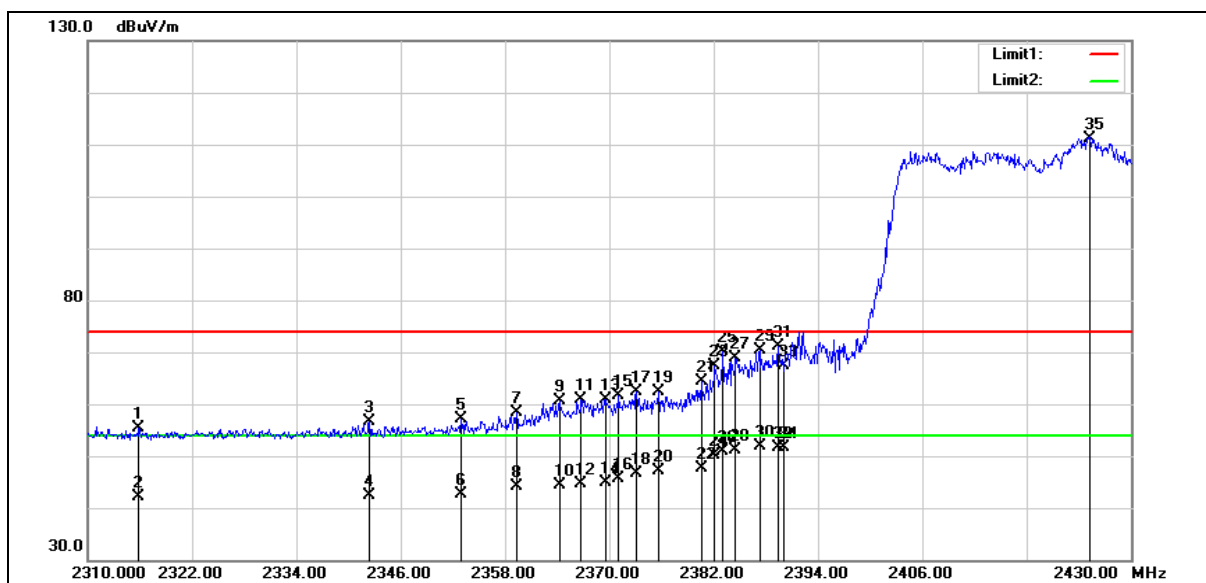

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2315.880        | 56.61          | -1.25                 | 55.36           | 74.00          | -18.64      | peak   |
| 2   | 2315.880        | 43.37          | -1.25                 | 42.12           | 54.00          | -11.88      | AVG    |
| 3   | 2342.400        | 57.68          | -1.11                 | 56.57           | 74.00          | -17.43      | peak   |
| 4   | 2342.400        | 43.59          | -1.11                 | 42.48           | 54.00          | -11.52      | AVG    |
| 5   | 2352.960        | 58.09          | -1.05                 | 57.04           | 74.00          | -16.96      | peak   |
| 6   | 2352.960        | 43.74          | -1.05                 | 42.69           | 54.00          | -11.31      | AVG    |
| 7   | 2359.320        | 59.53          | -1.03                 | 58.50           | 74.00          | -15.50      | peak   |
| 8   | 2359.320        | 45.10          | -1.03                 | 44.07           | 54.00          | -9.93       | AVG    |
| 9   | 2364.240        | 61.58          | -1.00                 | 60.58           | 74.00          | -13.42      | peak   |
| 10  | 2364.240        | 45.42          | -1.00                 | 44.42           | 54.00          | -9.58       | AVG    |
| 11  | 2366.760        | 61.87          | -0.99                 | 60.88           | 74.00          | -13.12      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2366.760           | 45.69             | -0.99                    | 44.70              | 54.00             | -9.30          | AVG    |
| 13  | 2369.520           | 61.95             | -0.97                    | 60.98              | 74.00             | -13.02         | peak   |
| 14  | 2369.520           | 45.92             | -0.97                    | 44.95              | 54.00             | -9.05          | AVG    |
| 15  | 2371.080           | 62.52             | -0.97                    | 61.55              | 74.00             | -12.45         | peak   |
| 16  | 2371.080           | 46.69             | -0.97                    | 45.72              | 54.00             | -8.28          | AVG    |
| 17  | 2373.120           | 63.41             | -0.96                    | 62.45              | 74.00             | -11.55         | peak   |
| 18  | 2373.120           | 47.55             | -0.96                    | 46.59              | 54.00             | -7.41          | AVG    |
| 19  | 2375.640           | 63.36             | -0.94                    | 62.42              | 74.00             | -11.58         | peak   |
| 20  | 2375.640           | 47.97             | -0.94                    | 47.03              | 54.00             | -6.97          | AVG    |
| 21  | 2380.560           | 65.35             | -0.93                    | 64.42              | 74.00             | -9.58          | peak   |
| 22  | 2380.560           | 48.61             | -0.93                    | 47.68              | 54.00             | -6.32          | AVG    |
| 23  | 2382.120           | 68.34             | -0.91                    | 67.43              | 74.00             | -6.57          | peak   |
| 24  | 2382.120           | 50.99             | -0.91                    | 50.08              | 54.00             | -3.92          | AVG    |
| 25  | 2383.080           | 71.13             | -0.91                    | 70.22              | 74.00             | -3.78          | peak   |
| 26  | 2383.080           | 51.87             | -0.91                    | 50.96              | 54.00             | -3.04          | AVG    |
| 27  | 2384.520           | 69.75             | -0.90                    | 68.85              | 74.00             | -5.15          | peak   |
| 28  | 2384.520           | 52.02             | -0.90                    | 51.12              | 54.00             | -2.88          | AVG    |
| 29  | 2387.280           | 71.17             | -0.88                    | 70.29              | 74.00             | -3.71          | peak   |
| 30  | 2387.280           | 52.74             | -0.88                    | 51.86              | 54.00             | -2.14          | AVG    |
| 31  | 2389.440           | 72.07             | -0.88                    | 71.19              | 74.00             | -2.81          | peak   |
| 32  | 2389.440           | 52.55             | -0.88                    | 51.67              | 54.00             | -2.33          | AVG    |
| 33  | 2390.000           | 68.15             | -0.87                    | 67.28              | 74.00             | -6.72          | peak   |
| 34  | 2390.000           | 52.40             | -0.87                    | 51.53              | 54.00             | -2.47          | AVG    |
| 35  | 2425.320           | 111.77            | -0.69                    | 111.08             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

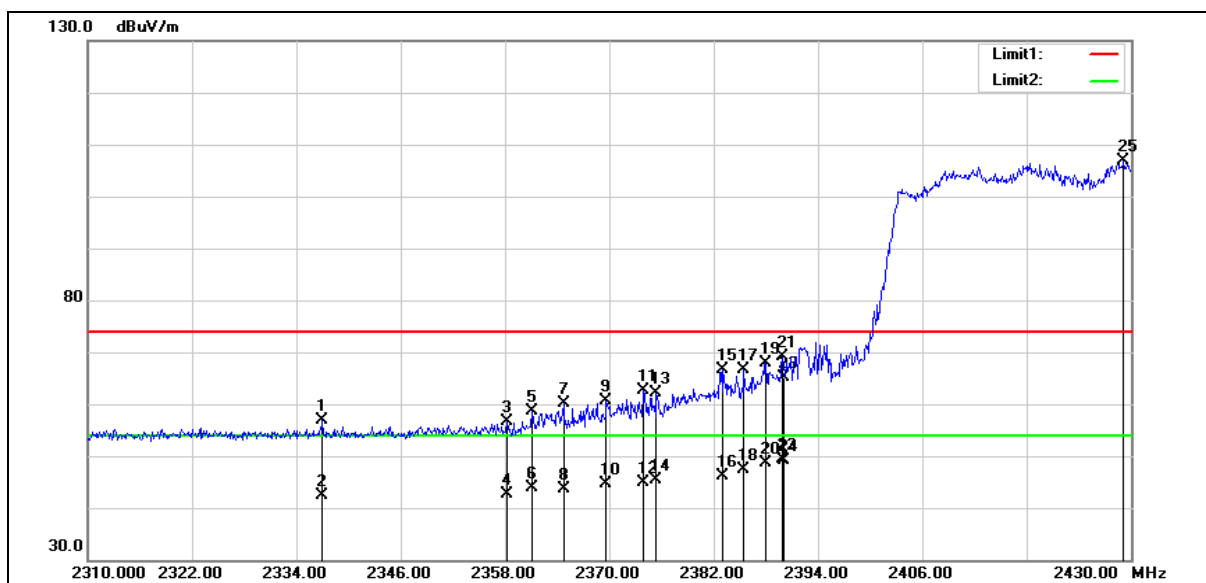

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2337.000        | 58.03          | -1.13                 | 56.90           | 74.00          | -17.10      | peak   |
| 2   | 2337.000        | 43.49          | -1.13                 | 42.36           | 54.00          | -11.64      | AVG    |
| 3   | 2358.240        | 57.56          | -1.03                 | 56.53           | 74.00          | -17.47      | peak   |
| 4   | 2358.240        | 43.55          | -1.03                 | 42.52           | 54.00          | -11.48      | AVG    |
| 5   | 2361.120        | 59.55          | -1.02                 | 58.53           | 74.00          | -15.47      | peak   |
| 6   | 2361.120        | 44.88          | -1.02                 | 43.86           | 54.00          | -10.14      | AVG    |
| 7   | 2364.720        | 61.09          | -1.00                 | 60.09           | 74.00          | -13.91      | peak   |
| 8   | 2364.720        | 44.62          | -1.00                 | 43.62           | 54.00          | -10.38      | AVG    |
| 9   | 2369.640        | 61.63          | -0.97                 | 60.66           | 74.00          | -13.34      | peak   |
| 10  | 2369.640        | 45.64          | -0.97                 | 44.67           | 54.00          | -9.33       | AVG    |
| 11  | 2373.960        | 63.51          | -0.96                 | 62.55           | 74.00          | -11.45      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2422 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2373.960           | 45.89             | -0.96                    | 44.93              | 54.00             | -9.07          | AVG    |
| 13  | 2375.400           | 62.99             | -0.94                    | 62.05              | 74.00             | -11.95         | peak   |
| 14  | 2375.400           | 46.32             | -0.94                    | 45.38              | 54.00             | -8.62          | AVG    |
| 15  | 2383.080           | 67.48             | -0.91                    | 66.57              | 74.00             | -7.43          | peak   |
| 16  | 2383.080           | 47.06             | -0.91                    | 46.15              | 54.00             | -7.85          | AVG    |
| 17  | 2385.480           | 67.46             | -0.90                    | 66.56              | 74.00             | -7.44          | peak   |
| 18  | 2385.480           | 48.27             | -0.90                    | 47.37              | 54.00             | -6.63          | AVG    |
| 19  | 2388.000           | 68.83             | -0.88                    | 67.95              | 74.00             | -6.05          | peak   |
| 20  | 2388.000           | 49.57             | -0.88                    | 48.69              | 54.00             | -5.31          | AVG    |
| 21  | 2389.920           | 70.12             | -0.87                    | 69.25              | 74.00             | -4.75          | peak   |
| 22  | 2389.920           | 50.26             | -0.87                    | 49.39              | 54.00             | -4.61          | AVG    |
| 23  | 2390.000           | 66.03             | -0.87                    | 65.16              | 74.00             | -8.84          | peak   |
| 24  | 2390.000           | 50.05             | -0.87                    | 49.18              | 54.00             | -4.82          | AVG    |
| 25  | 2429.160           | 107.47            | -0.67                    | 106.80             | --                | --             | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

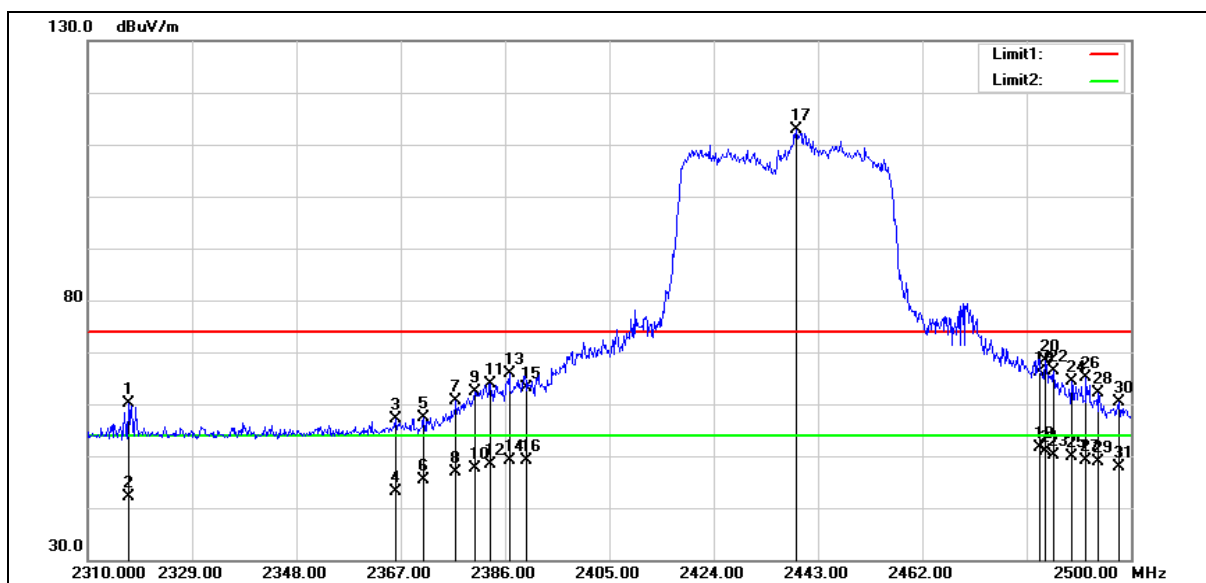

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2317.410        | 61.33          | -1.23                 | 60.10           | 74.00          | -13.90      | peak   |
| 2   | 2317.410        | 43.33          | -1.23                 | 42.10           | 54.00          | -11.90      | AVG    |
| 3   | 2366.050        | 58.17          | -1.00                 | 57.17           | 74.00          | -16.83      | peak   |
| 4   | 2366.050        | 44.12          | -1.00                 | 43.12           | 54.00          | -10.88      | AVG    |
| 5   | 2371.180        | 58.27          | -0.97                 | 57.30           | 74.00          | -16.70      | peak   |
| 6   | 2371.180        | 46.26          | -0.97                 | 45.29           | 54.00          | -8.71       | AVG    |
| 7   | 2377.070        | 61.46          | -0.94                 | 60.52           | 74.00          | -13.48      | peak   |
| 8   | 2377.070        | 47.70          | -0.94                 | 46.76           | 54.00          | -7.24       | AVG    |
| 9   | 2380.490        | 63.25          | -0.93                 | 62.32           | 74.00          | -11.68      | peak   |
| 10  | 2380.490        | 48.61          | -0.93                 | 47.68           | 54.00          | -6.32       | AVG    |
| 11  | 2383.340        | 64.81          | -0.91                 | 63.90           | 74.00          | -10.10      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2383.340           | 49.19             | -0.91                    | 48.28              | 54.00             | -5.72          | AVG    |
| 13  | 2386.760           | 66.86             | -0.89                    | 65.97              | 74.00             | -8.03          | peak   |
| 14  | 2386.760           | 49.96             | -0.89                    | 49.07              | 54.00             | -4.93          | AVG    |
| 15  | 2390.000           | 63.88             | -0.87                    | 63.01              | 74.00             | -10.99         | peak   |
| 16  | 2390.000           | 50.11             | -0.87                    | 49.24              | 54.00             | -4.76          | AVG    |
| 17  | 2439.010           | 113.60            | -0.62                    | 112.98             | --                | --             | peak   |
| 18  | 2483.500           | 66.47             | -0.40                    | 66.07              | 74.00             | -7.93          | peak   |
| 19  | 2483.500           | 52.08             | -0.40                    | 51.68              | 54.00             | -2.32          | AVG    |
| 20  | 2484.420           | 68.72             | -0.39                    | 68.33              | 74.00             | -5.67          | peak   |
| 21  | 2484.420           | 51.26             | -0.39                    | 50.87              | 54.00             | -3.13          | AVG    |
| 22  | 2485.940           | 66.79             | -0.38                    | 66.41              | 74.00             | -7.59          | peak   |
| 23  | 2485.940           | 50.62             | -0.38                    | 50.24              | 54.00             | -3.76          | AVG    |
| 24  | 2489.170           | 64.86             | -0.37                    | 64.49              | 74.00             | -9.51          | peak   |
| 25  | 2489.170           | 50.20             | -0.37                    | 49.83              | 54.00             | -4.17          | AVG    |
| 26  | 2491.830           | 65.49             | -0.35                    | 65.14              | 74.00             | -8.86          | peak   |
| 27  | 2491.830           | 49.60             | -0.35                    | 49.25              | 54.00             | -4.75          | AVG    |
| 28  | 2494.110           | 62.39             | -0.34                    | 62.05              | 74.00             | -11.95         | peak   |
| 29  | 2494.110           | 49.21             | -0.34                    | 48.87              | 54.00             | -5.13          | AVG    |
| 30  | 2497.910           | 60.61             | -0.32                    | 60.29              | 74.00             | -13.71         | peak   |
| 31  | 2497.910           | 48.28             | -0.32                    | 47.96              | 54.00             | -6.04          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

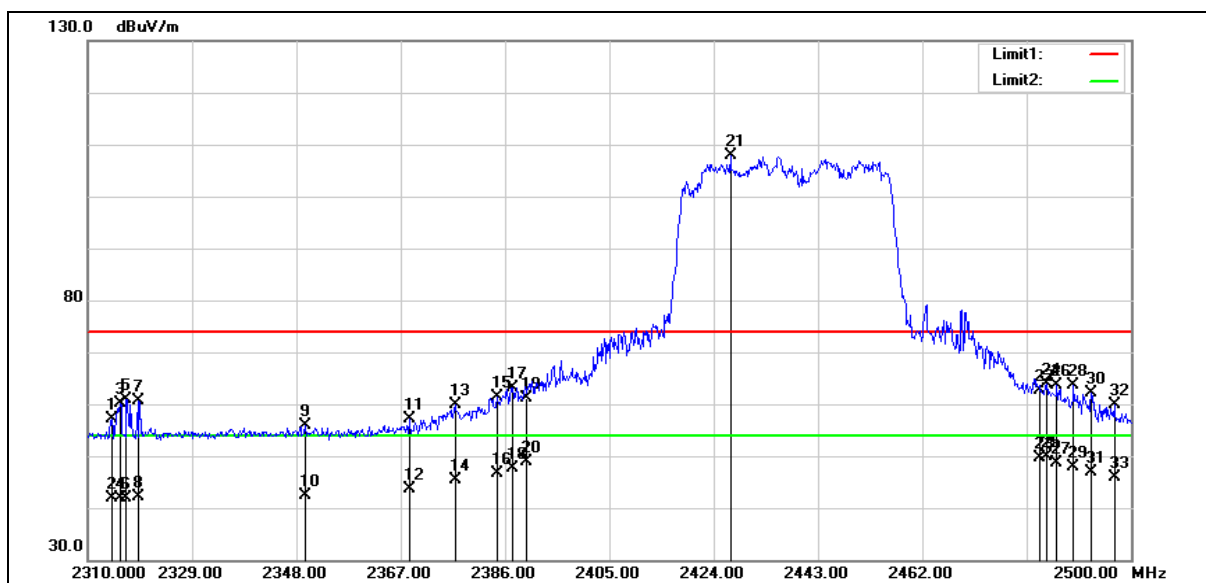

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2314.370        | 58.33          | -1.25                 | 57.08           | 74.00          | -16.92      | peak   |
| 2   | 2314.370        | 43.07          | -1.25                 | 41.82           | 54.00          | -12.18      | AVG    |
| 3   | 2315.890        | 61.39          | -1.25                 | 60.14           | 74.00          | -13.86      | peak   |
| 4   | 2315.890        | 43.14          | -1.25                 | 41.89           | 54.00          | -12.11      | AVG    |
| 5   | 2317.030        | 62.22          | -1.23                 | 60.99           | 74.00          | -13.01      | peak   |
| 6   | 2317.030        | 43.18          | -1.23                 | 41.95           | 54.00          | -12.05      | AVG    |
| 7   | 2319.120        | 61.86          | -1.22                 | 60.64           | 74.00          | -13.36      | peak   |
| 8   | 2319.120        | 43.23          | -1.22                 | 42.01           | 54.00          | -11.99      | AVG    |
| 9   | 2349.710        | 56.94          | -1.07                 | 55.87           | 74.00          | -18.13      | peak   |
| 10  | 2349.710        | 43.34          | -1.07                 | 42.27           | 54.00          | -11.73      | AVG    |
| 11  | 2368.520        | 58.17          | -0.99                 | 57.18           | 74.00          | -16.82      | peak   |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2437 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2368.520           | 44.57             | -0.99                    | 43.58              | 54.00             | -10.42         | AVG    |
| 13  | 2376.880           | 60.78             | -0.94                    | 59.84              | 74.00             | -14.16         | peak   |
| 14  | 2376.880           | 46.20             | -0.94                    | 45.26              | 54.00             | -8.74          | AVG    |
| 15  | 2384.480           | 62.24             | -0.90                    | 61.34              | 74.00             | -12.66         | peak   |
| 16  | 2384.480           | 47.61             | -0.90                    | 46.71              | 54.00             | -7.29          | AVG    |
| 17  | 2387.330           | 64.02             | -0.88                    | 63.14              | 74.00             | -10.86         | peak   |
| 18  | 2387.330           | 48.57             | -0.88                    | 47.69              | 54.00             | -6.31          | AVG    |
| 19  | 2390.000           | 62.00             | -0.87                    | 61.13              | 74.00             | -12.87         | peak   |
| 20  | 2390.000           | 49.80             | -0.87                    | 48.93              | 54.00             | -5.07          | AVG    |
| 21  | 2427.040           | 108.56            | -0.69                    | 107.87             | --                | --             | peak   |
| 22  | 2483.500           | 63.03             | -0.40                    | 62.63              | 74.00             | -11.37         | peak   |
| 23  | 2483.500           | 50.12             | -0.40                    | 49.72              | 54.00             | -4.28          | AVG    |
| 24  | 2484.610           | 64.19             | -0.39                    | 63.80              | 74.00             | -10.20         | peak   |
| 25  | 2484.610           | 50.19             | -0.39                    | 49.80              | 54.00             | -4.20          | AVG    |
| 26  | 2486.510           | 64.06             | -0.38                    | 63.68              | 74.00             | -10.32         | peak   |
| 27  | 2486.510           | 48.95             | -0.38                    | 48.57              | 54.00             | -5.43          | AVG    |
| 28  | 2489.550           | 63.99             | -0.37                    | 63.62              | 74.00             | -10.38         | peak   |
| 29  | 2489.550           | 48.22             | -0.37                    | 47.85              | 54.00             | -6.15          | AVG    |
| 30  | 2492.780           | 62.43             | -0.34                    | 62.09              | 74.00             | -11.91         | peak   |
| 31  | 2492.780           | 47.17             | -0.34                    | 46.83              | 54.00             | -7.17          | AVG    |
| 32  | 2496.960           | 60.20             | -0.33                    | 59.87              | 74.00             | -14.13         | peak   |
| 33  | 2496.960           | 46.12             | -0.33                    | 45.79              | 54.00             | -8.21          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |

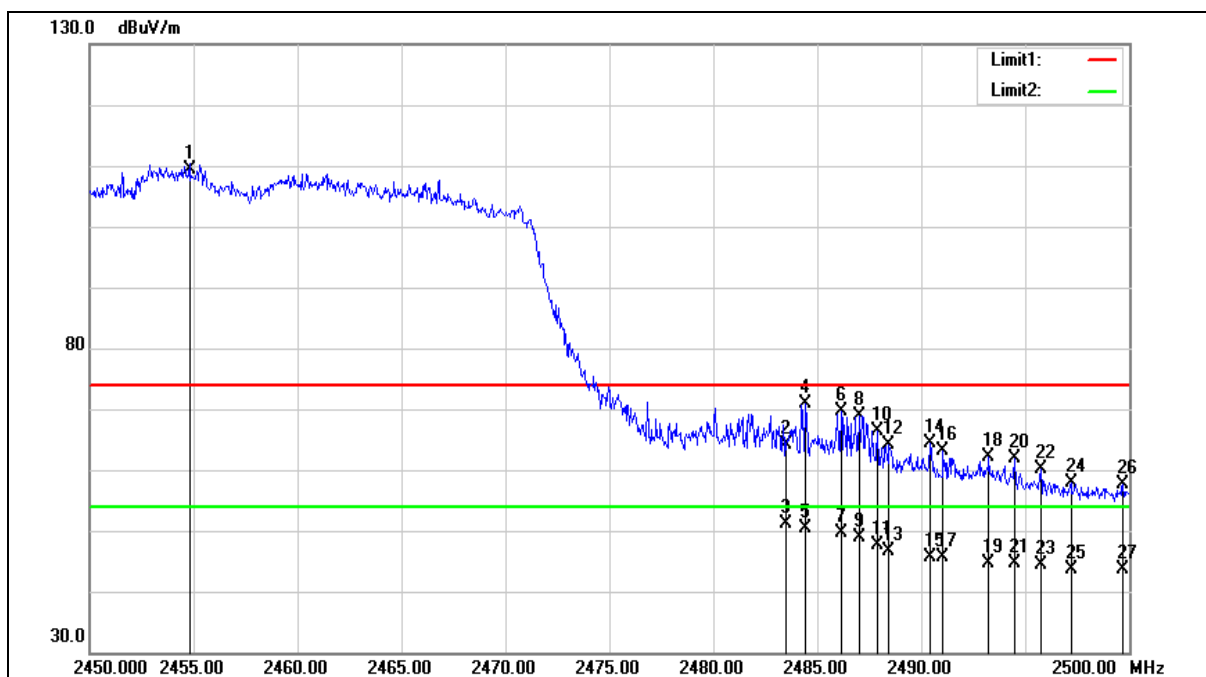

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2454.800        | 109.86         | -0.54                 | 109.32          | --             | --          | peak   |
| 2   | 2483.500        | 64.41          | -0.40                 | 64.01           | 74.00          | -9.99       | peak   |
| 3   | 2483.500        | 51.55          | -0.40                 | 51.15           | 54.00          | -2.85       | AVG    |
| 4   | 2484.400        | 71.17          | -0.39                 | 70.78           | 74.00          | -3.22       | peak   |
| 5   | 2484.400        | 50.78          | -0.39                 | 50.39           | 54.00          | -3.61       | AVG    |
| 6   | 2486.150        | 69.90          | -0.38                 | 69.52           | 74.00          | -4.48       | peak   |
| 7   | 2486.150        | 49.89          | -0.38                 | 49.51           | 54.00          | -4.49       | AVG    |
| 8   | 2487.000        | 69.22          | -0.37                 | 68.85           | 74.00          | -5.15       | peak   |
| 9   | 2487.000        | 49.34          | -0.37                 | 48.97           | 54.00          | -5.03       | AVG    |
| 10  | 2487.900        | 66.70          | -0.37                 | 66.33           | 74.00          | -7.67       | peak   |
| 11  | 2487.900        | 47.91          | -0.37                 | 47.54           | 54.00          | -6.46       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Horizontal      |                |    |


| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2488.450           | 64.47             | -0.37                    | 64.10              | 74.00             | -9.90          | peak   |
| 13  | 2488.450           | 46.94             | -0.37                    | 46.57              | 54.00             | -7.43          | AVG    |
| 14  | 2490.400           | 64.79             | -0.36                    | 64.43              | 74.00             | -9.57          | peak   |
| 15  | 2490.400           | 46.01             | -0.36                    | 45.65              | 54.00             | -8.35          | AVG    |
| 16  | 2491.050           | 63.45             | -0.36                    | 63.09              | 74.00             | -10.91         | peak   |
| 17  | 2491.050           | 46.03             | -0.36                    | 45.67              | 54.00             | -8.33          | AVG    |
| 18  | 2493.250           | 62.42             | -0.34                    | 62.08              | 74.00             | -11.92         | peak   |
| 19  | 2493.250           | 44.93             | -0.34                    | 44.59              | 54.00             | -9.41          | AVG    |
| 20  | 2494.500           | 62.32             | -0.34                    | 61.98              | 74.00             | -12.02         | peak   |
| 21  | 2494.500           | 45.02             | -0.34                    | 44.68              | 54.00             | -9.32          | AVG    |
| 22  | 2495.750           | 60.36             | -0.33                    | 60.03              | 74.00             | -13.97         | peak   |
| 23  | 2495.750           | 44.66             | -0.33                    | 44.33              | 54.00             | -9.67          | AVG    |
| 24  | 2497.200           | 58.16             | -0.32                    | 57.84              | 74.00             | -16.16         | peak   |
| 25  | 2497.200           | 43.99             | -0.32                    | 43.67              | 54.00             | -10.33         | AVG    |
| 26  | 2499.700           | 58.05             | -0.31                    | 57.74              | 74.00             | -16.26         | peak   |
| 27  | 2499.700           | 43.82             | -0.31                    | 43.51              | 54.00             | -10.49         | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

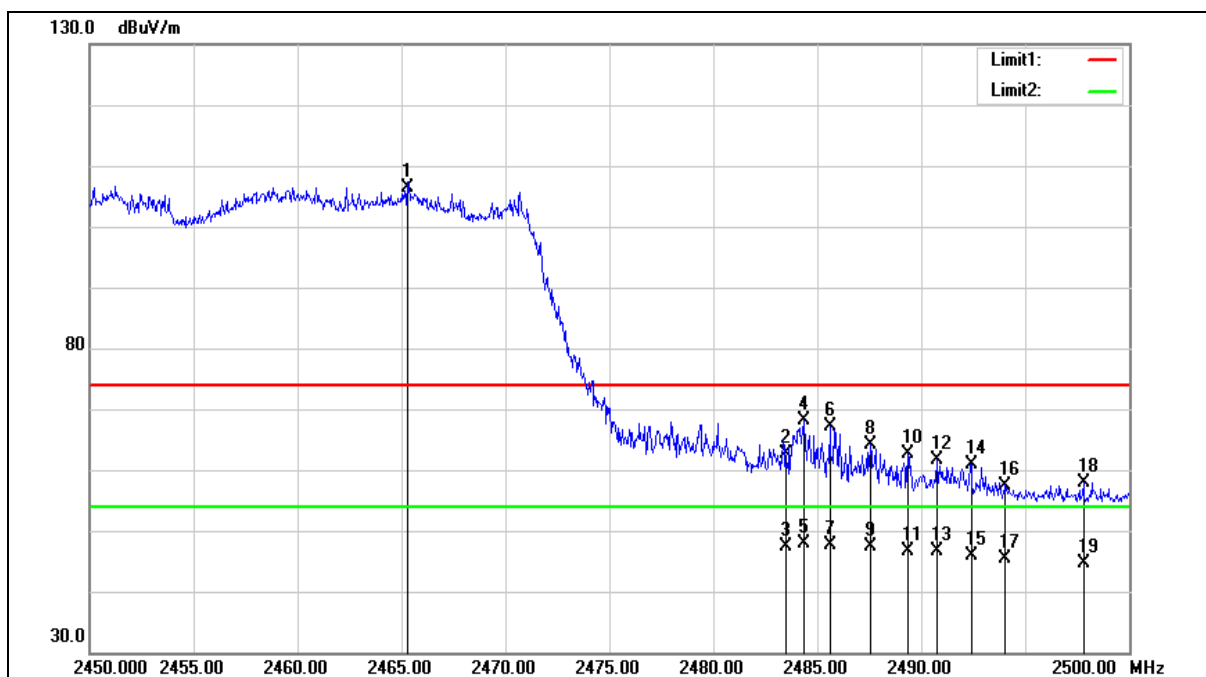

| No. | Frequency (MHz) | Reading (dBuV) | Correct Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----|-----------------|----------------|-----------------------|-----------------|----------------|-------------|--------|
| 1   | 2465.300        | 106.81         | -0.49                 | 106.32          | --             | --          | peak   |
| 2   | 2483.500        | 62.98          | -0.40                 | 62.58           | 74.00          | -11.42      | peak   |
| 3   | 2483.500        | 47.83          | -0.40                 | 47.43           | 54.00          | -6.57       | AVG    |
| 4   | 2484.350        | 68.56          | -0.39                 | 68.17           | 74.00          | -5.83       | peak   |
| 5   | 2484.350        | 48.19          | -0.39                 | 47.80           | 54.00          | -6.20       | AVG    |
| 6   | 2485.600        | 67.56          | -0.38                 | 67.18           | 74.00          | -6.82       | peak   |
| 7   | 2485.600        | 47.92          | -0.38                 | 47.54           | 54.00          | -6.46       | AVG    |
| 8   | 2487.550        | 64.59          | -0.37                 | 64.22           | 74.00          | -9.78       | peak   |
| 9   | 2487.550        | 47.64          | -0.37                 | 47.27           | 54.00          | -6.73       | AVG    |
| 10  | 2489.350        | 62.90          | -0.37                 | 62.53           | 74.00          | -11.47      | peak   |
| 11  | 2489.350        | 46.89          | -0.37                 | 46.52           | 54.00          | -7.48       | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.



|             |                 |                |    |
|-------------|-----------------|----------------|----|
| Standard:   | FCC Part 15.247 | Test Distance: | 3m |
| Frequency:  | 2452 MHz        |                |    |
| Mode:       | Mode 7          |                |    |
| Ant.Polar.: | Vertical        |                |    |

| No. | Frequency<br>(MHz) | Reading<br>(dBuV) | Correct Factor<br>(dB/m) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Remark |
|-----|--------------------|-------------------|--------------------------|--------------------|-------------------|----------------|--------|
| 12  | 2490.750           | 62.11             | -0.36                    | 61.75              | 74.00             | -12.25         | peak   |
| 13  | 2490.750           | 46.94             | -0.36                    | 46.58              | 54.00             | -7.42          | AVG    |
| 14  | 2492.400           | 61.24             | -0.35                    | 60.89              | 74.00             | -13.11         | peak   |
| 15  | 2492.400           | 46.15             | -0.35                    | 45.80              | 54.00             | -8.20          | AVG    |
| 16  | 2494.050           | 57.84             | -0.34                    | 57.50              | 74.00             | -16.50         | peak   |
| 17  | 2494.050           | 45.61             | -0.34                    | 45.27              | 54.00             | -8.73          | AVG    |
| 18  | 2497.800           | 58.20             | -0.32                    | 57.88              | 74.00             | -16.12         | peak   |
| 19  | 2497.800           | 44.85             | -0.32                    | 44.53              | 54.00             | -9.47          | AVG    |

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

--- END---