


Test Mode	IEEE 802.11ac(VHT20)	Test Date	2024/11/22
Test Frequency	5580MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

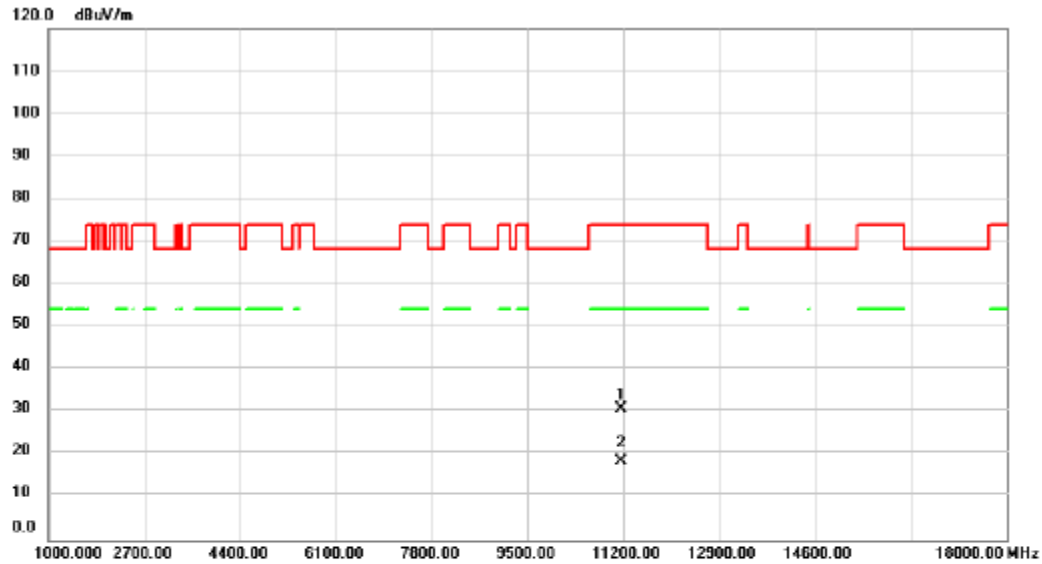


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.00	30.71	0.08	30.79	74.00	-43.21	peak	
2	*	11160.00	18.22	0.08	18.30	54.00	-35.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT20)	Test Date	2024/11/22
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

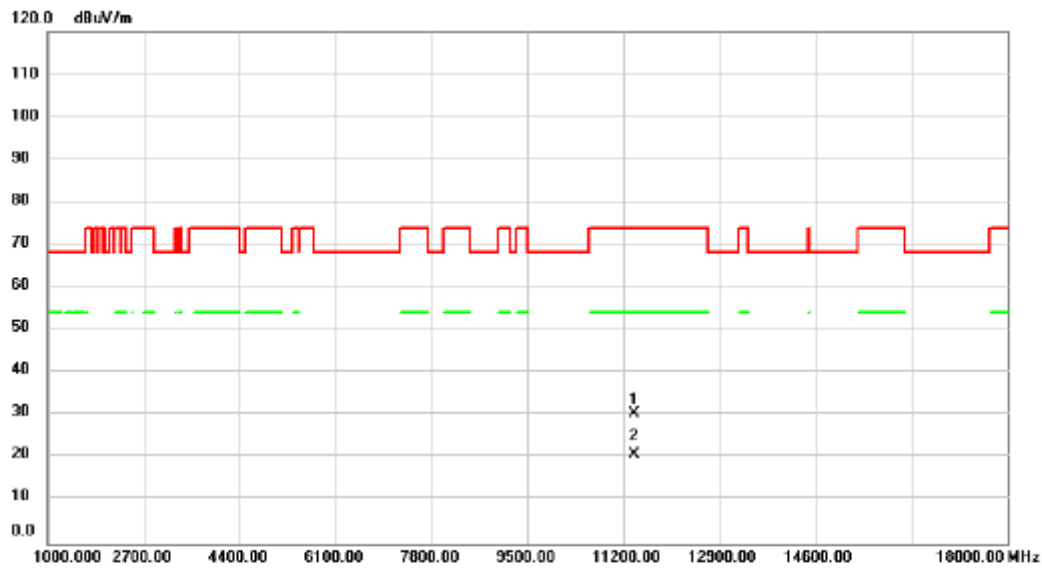


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	29.81	0.61	30.42	74.00	-43.58	peak	
2	*	11400.00	20.14	0.61	20.75	54.00	-33.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT20)	Test Date	2024/11/22
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

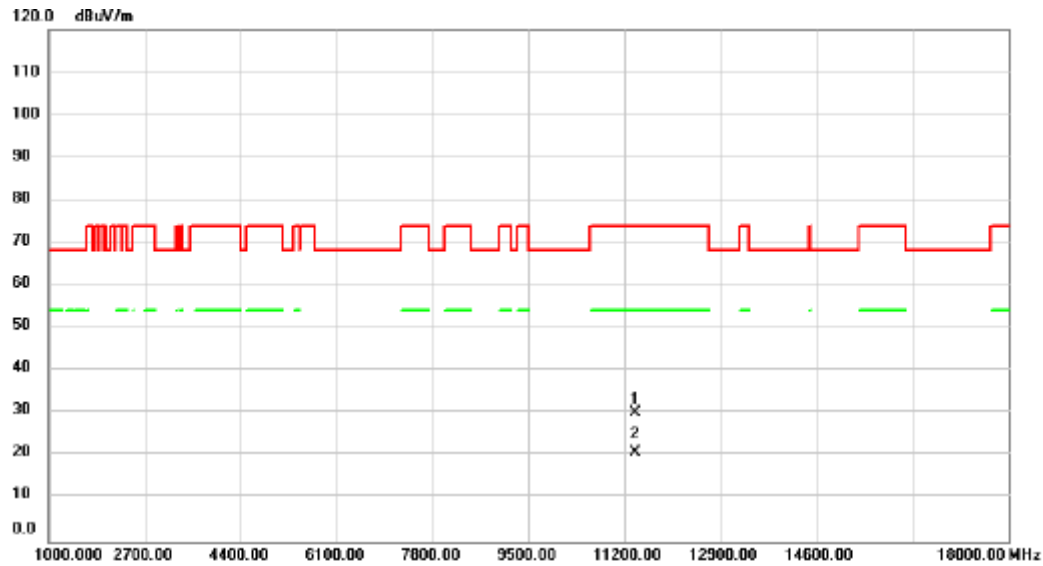


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	29.53	0.61	30.14	74.00	-43.86	peak	
2	*	11400.00	20.35	0.61	20.96	54.00	-33.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

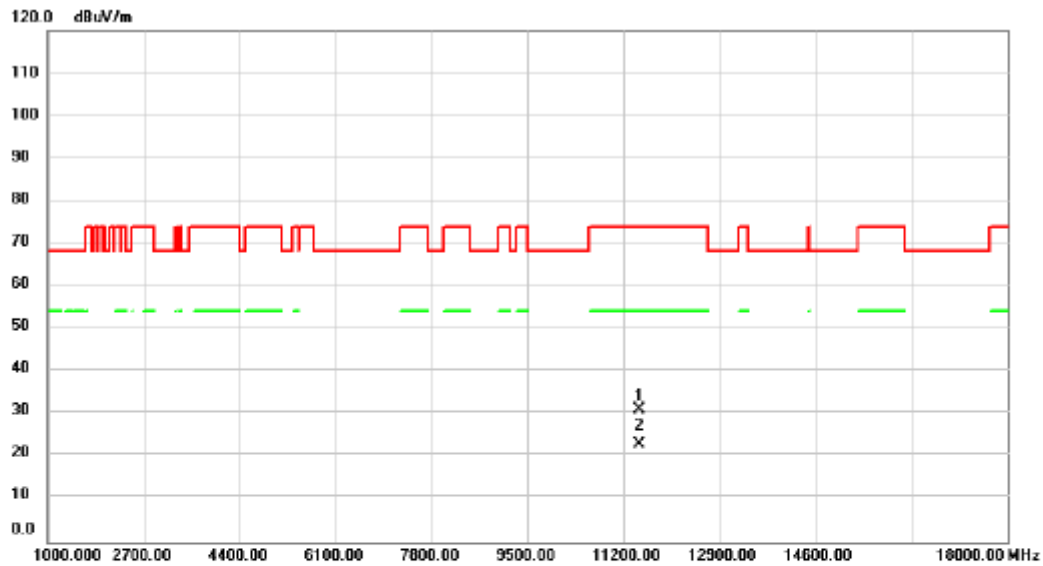


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	30.36	0.82	31.18	74.00	-42.82	peak	
2	*	11490.00	22.11	0.82	22.93	54.00	-31.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

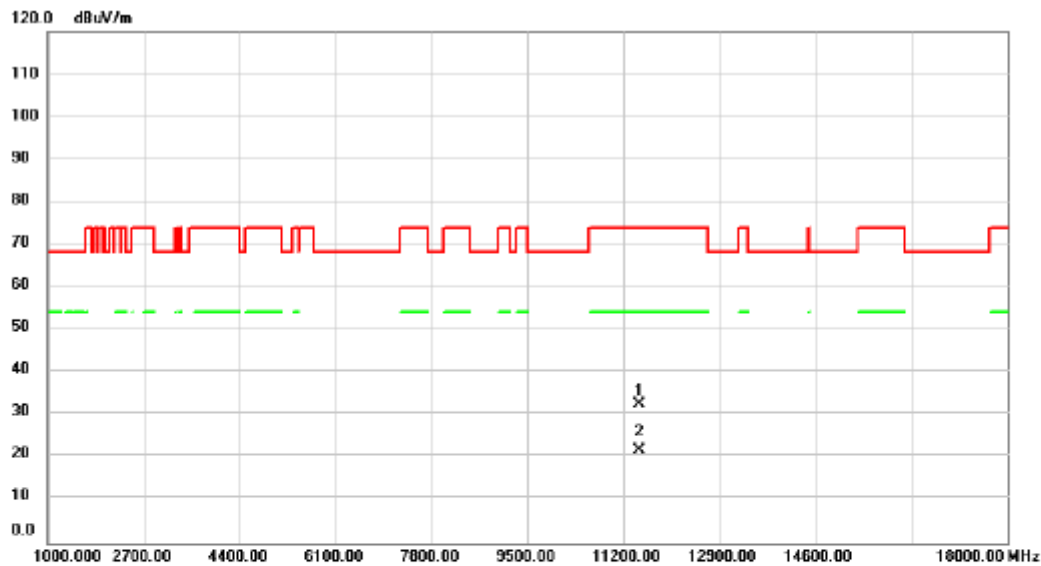


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11489.00	31.66	0.81	32.47	74.00	-41.53	peak	
2	*	11489.00	21.06	0.81	21.87	54.00	-32.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT20)	Test Date	2024/11/22
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

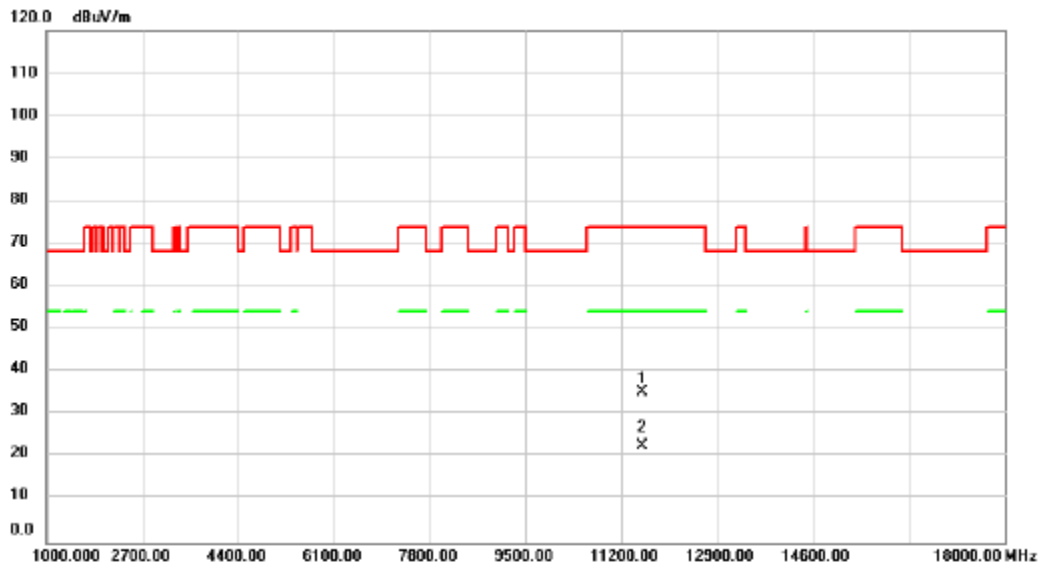


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11574.00	34.43	0.83	35.26	74.00	-38.74	peak	
2	*	11574.00	21.93	0.83	22.76	54.00	-31.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT20)	Test Date	2024/11/22
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

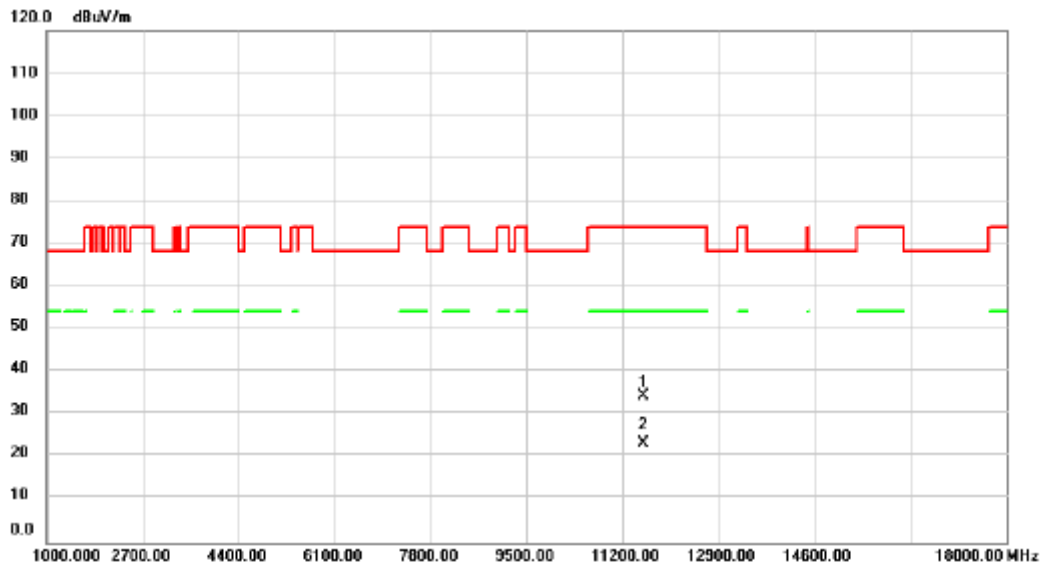


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11574.00	33.38	0.83	34.21	74.00	-39.79	peak	
2	*	11574.00	22.30	0.83	23.13	54.00	-30.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT20)	Test Date	2024/11/22
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

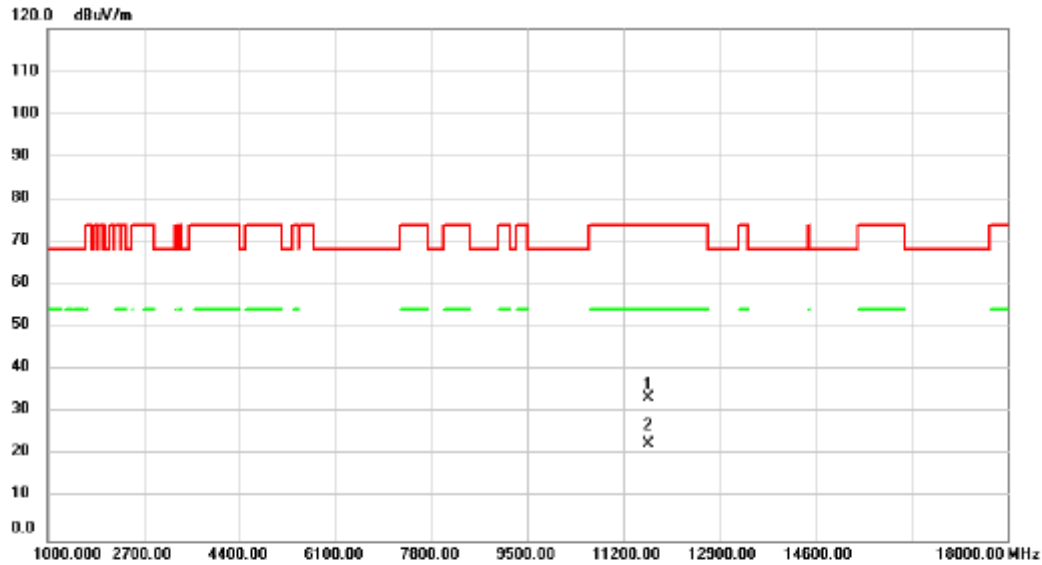


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11642.00	32.73	0.83	33.56	74.00	-40.44	peak	
2	*	11642.00	21.69	0.83	22.52	54.00	-31.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT20)	Test Date	2024/11/22
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

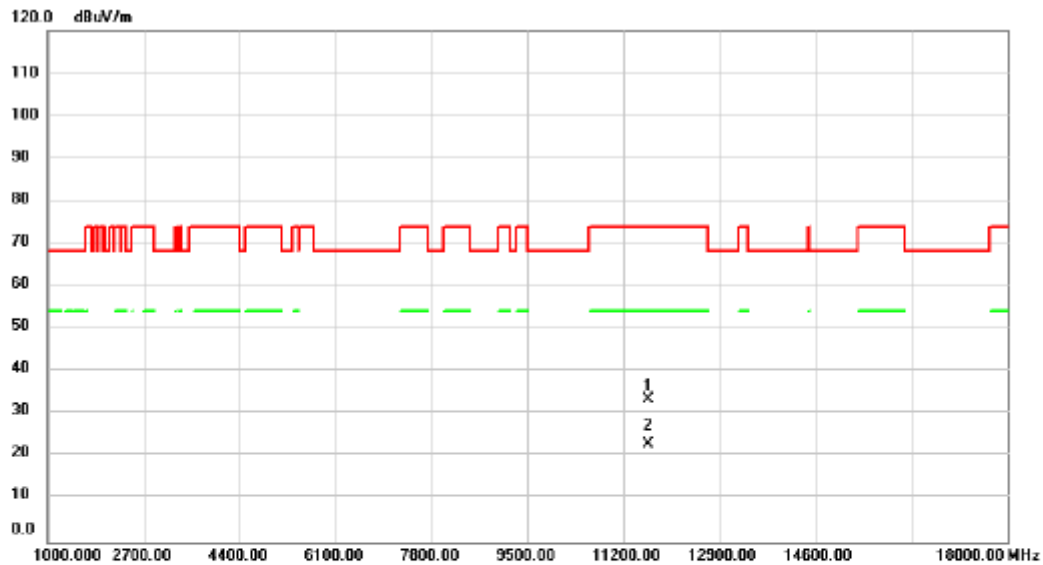


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11642.00	32.52	0.83	33.35	74.00	-40.65	peak	
2	*	11642.00	22.18	0.83	23.01	54.00	-30.99	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

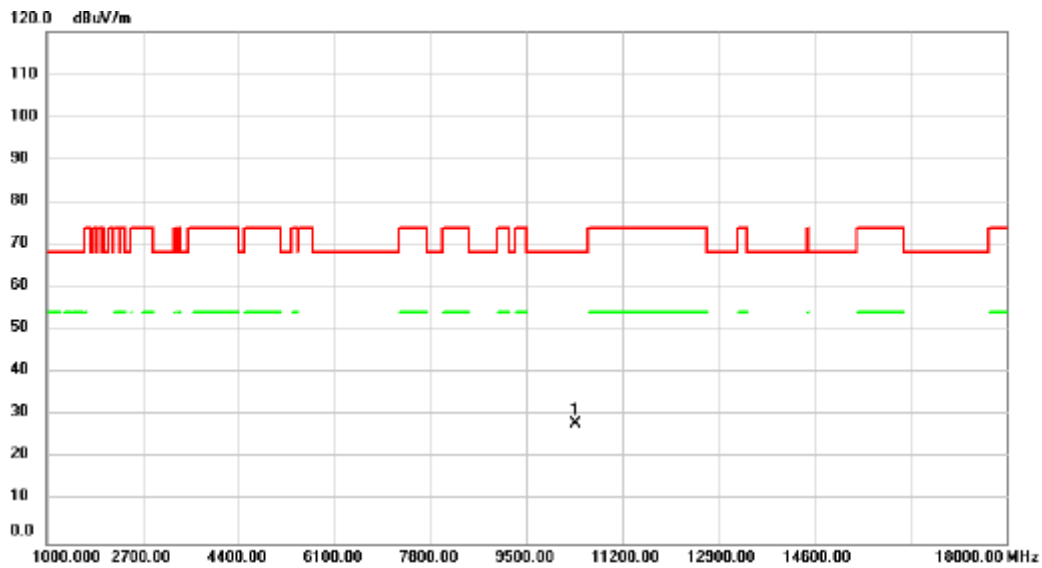


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	28.72	-0.57	28.15	68.20	-40.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

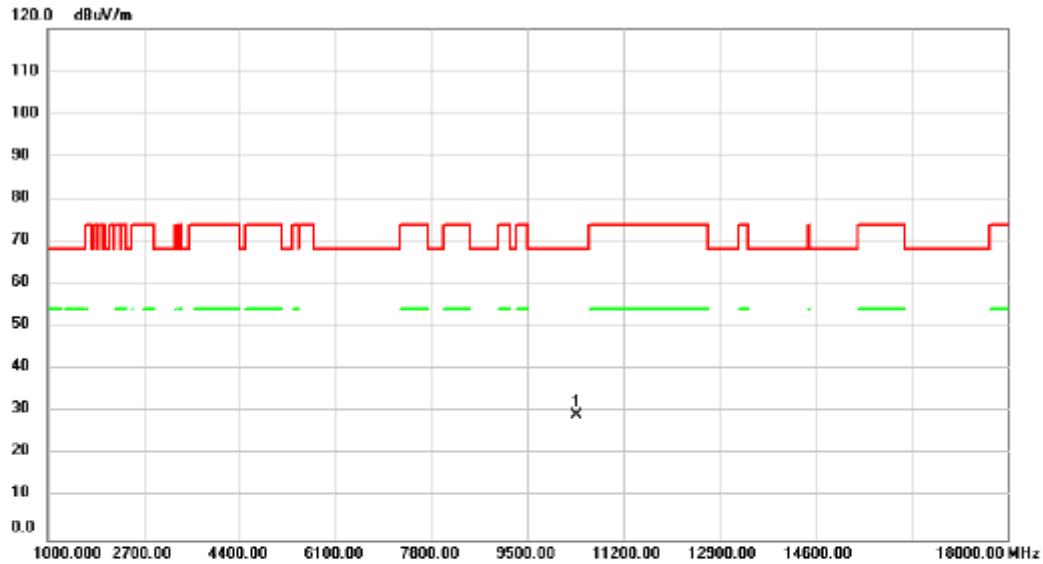


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	29.91	-0.57	29.34	68.20	-38.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

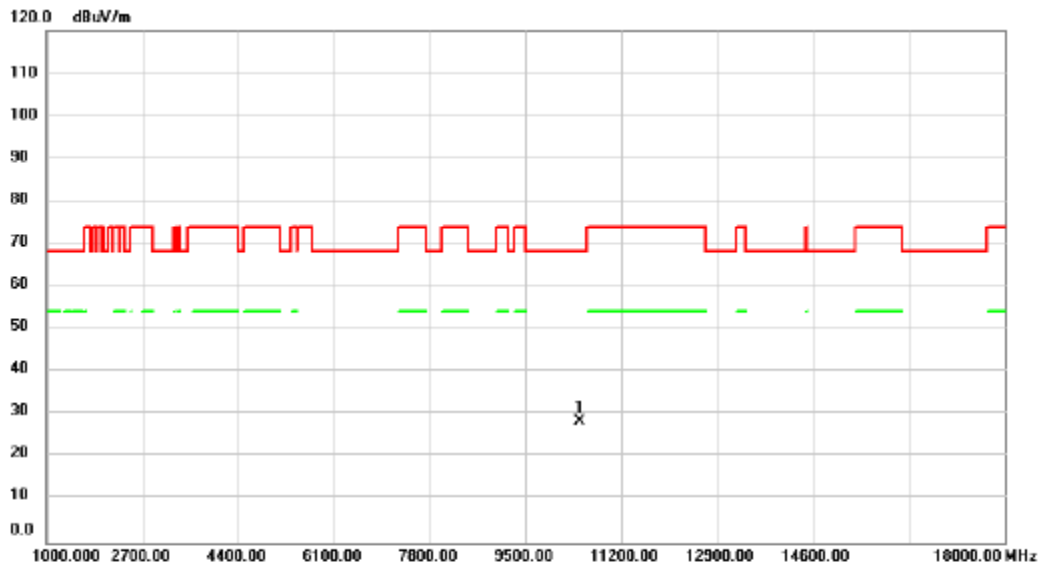


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	28.79	-0.49	28.30	68.20	-39.90	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

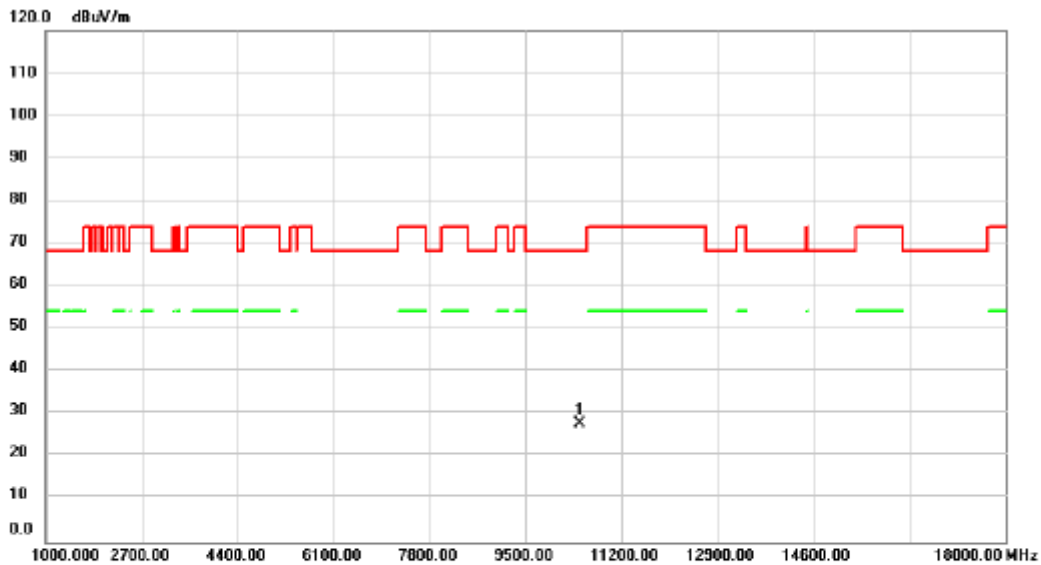


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	28.13	-0.49	27.64	68.20	-40.56	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

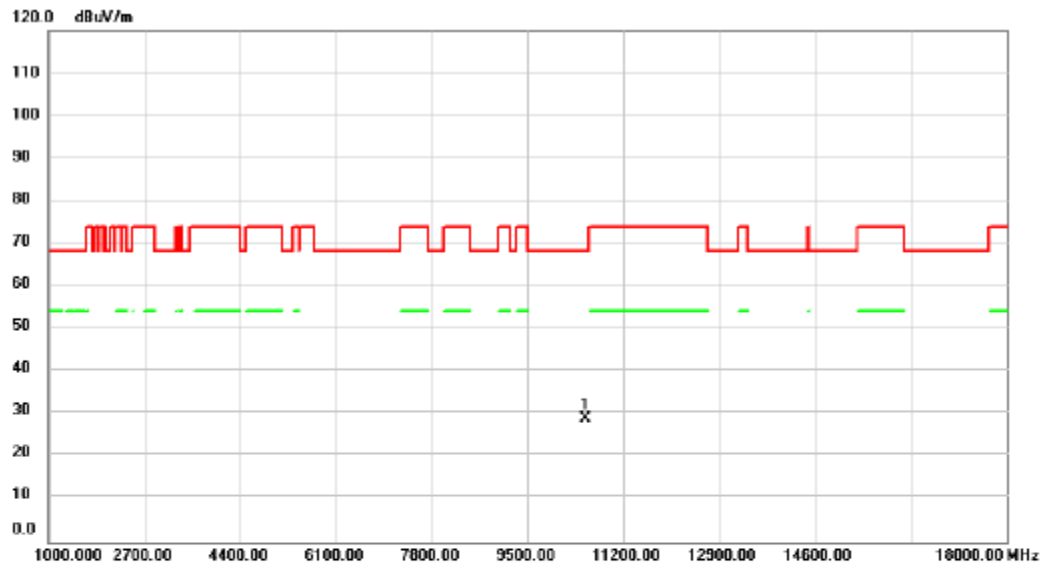


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	29.38	-0.44	28.94	68.20	-39.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

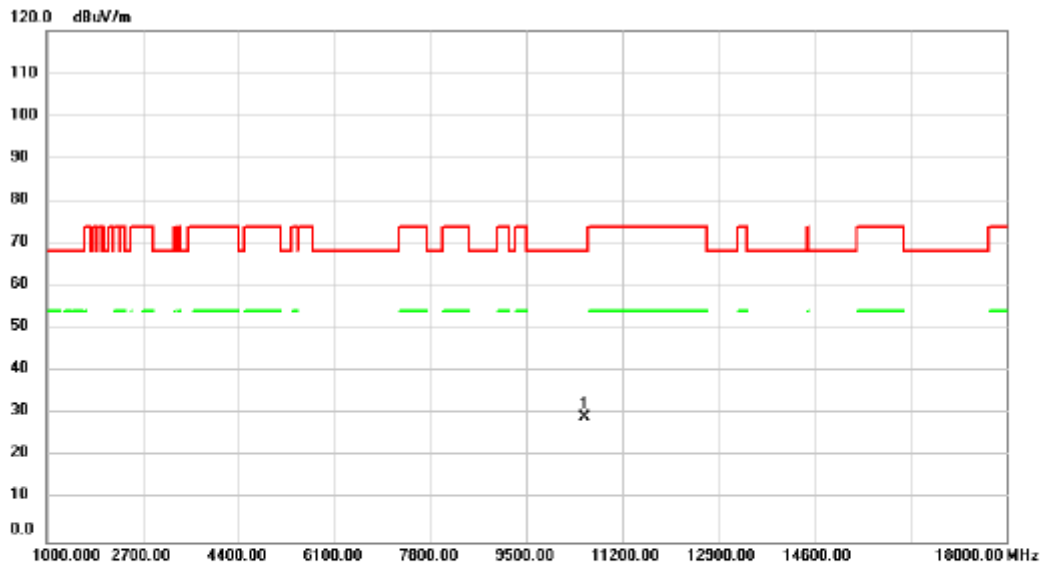


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10540.00	29.56	-0.44	29.12	68.20	-39.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

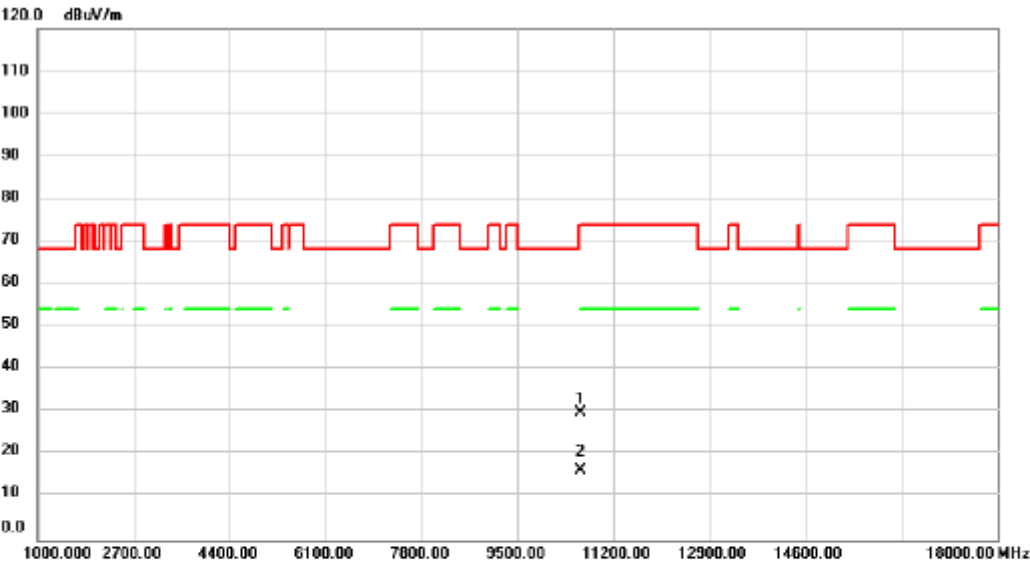

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	30.29	-0.40	29.89	74.00	-44.11	peak	
2	*	10620.00	16.88	-0.40	16.48	54.00	-37.52	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

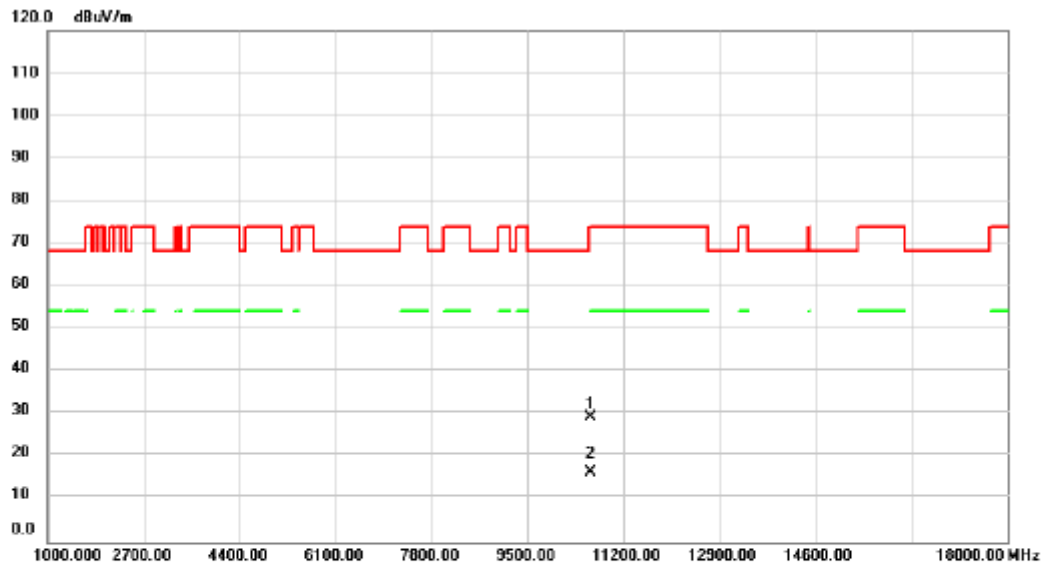


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10620.00	29.69	-0.40	29.29	74.00	-44.71	peak	
2 *	10620.00	16.67	-0.40	16.27	54.00	-37.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

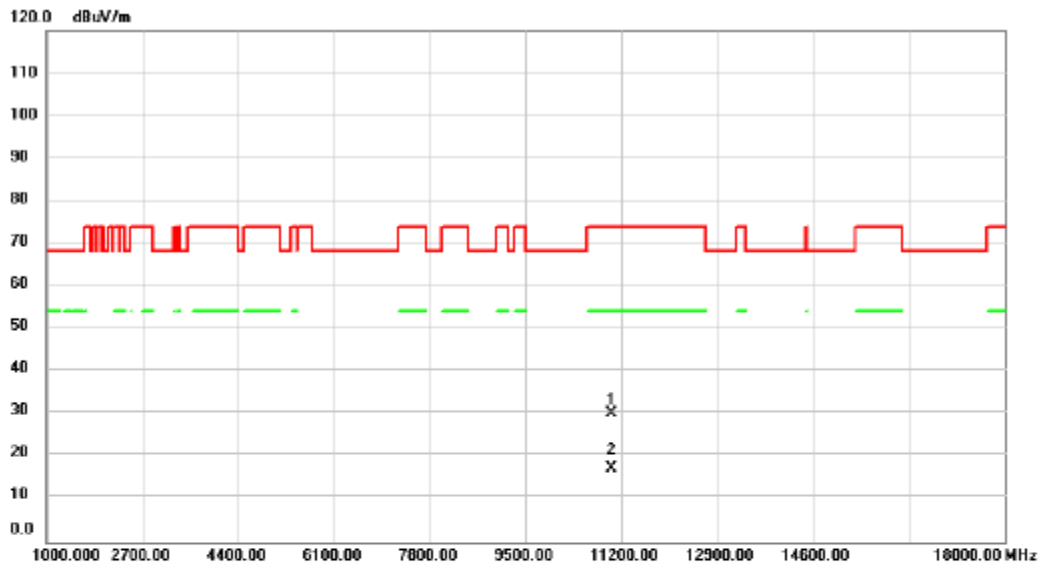


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11020.00	30.24	-0.22	30.02	74.00	-43.98	peak	
2	*	11020.00	17.56	-0.22	17.34	54.00	-36.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

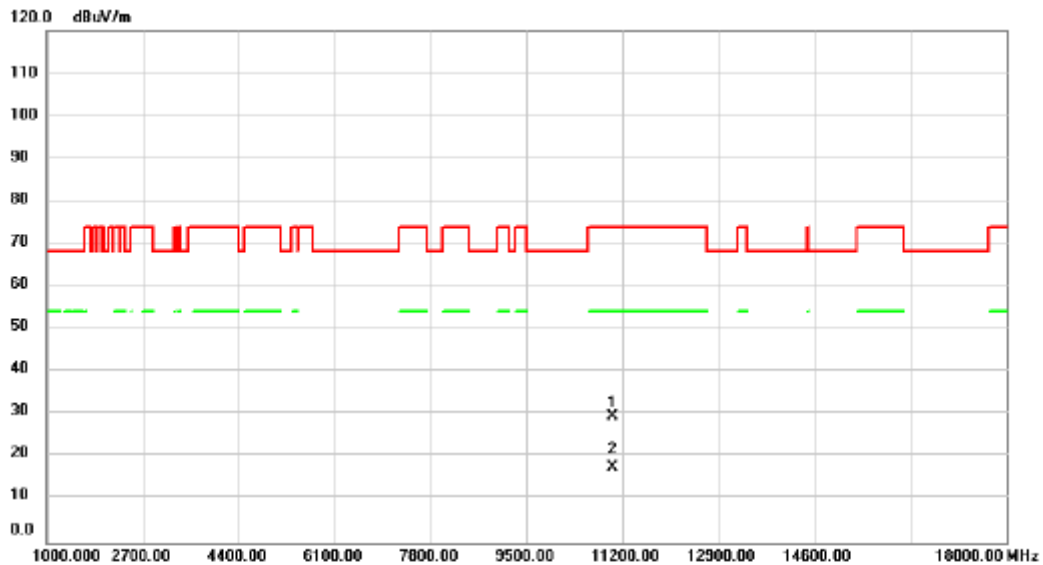


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.00	29.74	-0.22	29.52	74.00	-44.48	peak	
2	*	11020.00	17.79	-0.22	17.57	54.00	-36.43	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

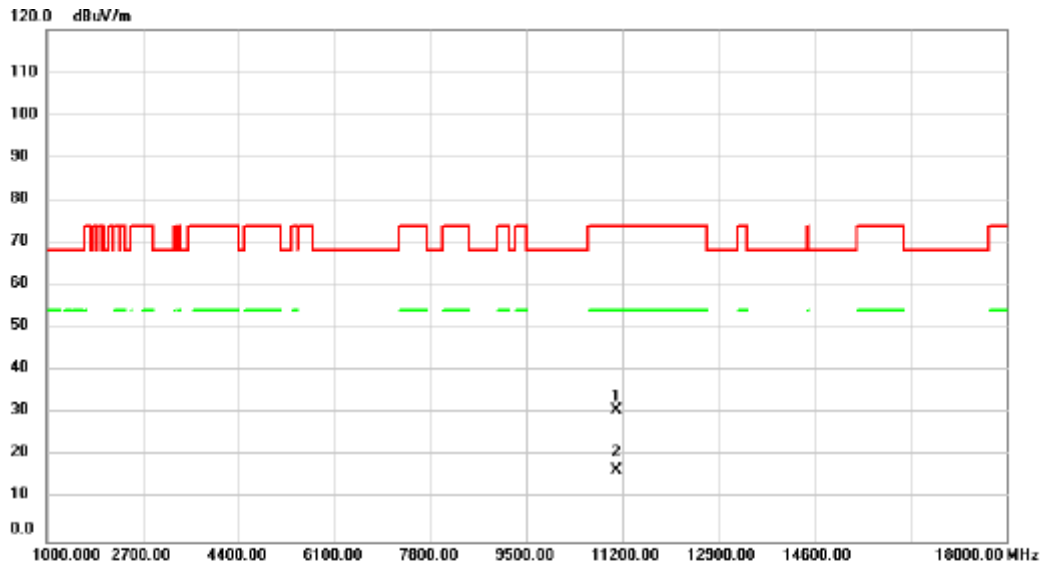


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.00	30.89	-0.04	30.85	74.00	-43.15	peak	
2	*	11100.00	16.68	-0.04	16.64	54.00	-37.36	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5550MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

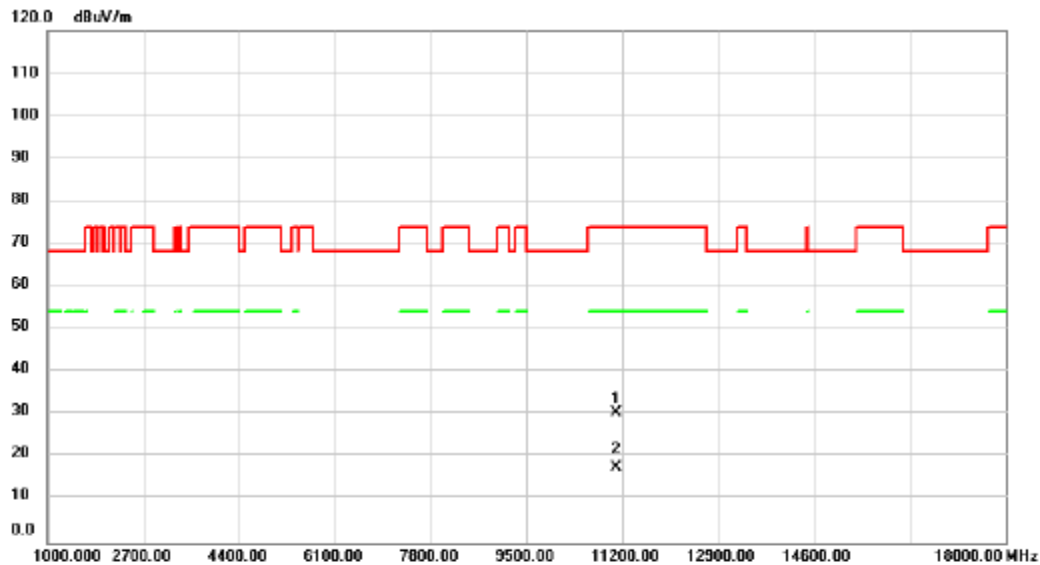


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.00	30.47	-0.04	30.43	74.00	-43.57	peak	
2	*	11100.00	17.65	-0.04	17.61	54.00	-36.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

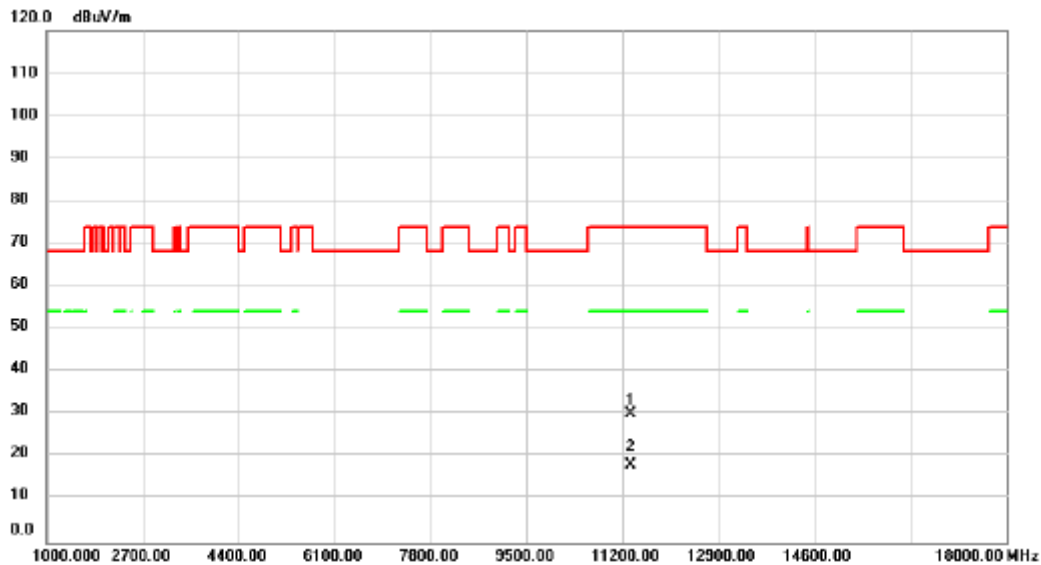


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	29.80	0.49	30.29	74.00	-43.71	peak	
2	*	11340.00	17.66	0.49	18.15	54.00	-35.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

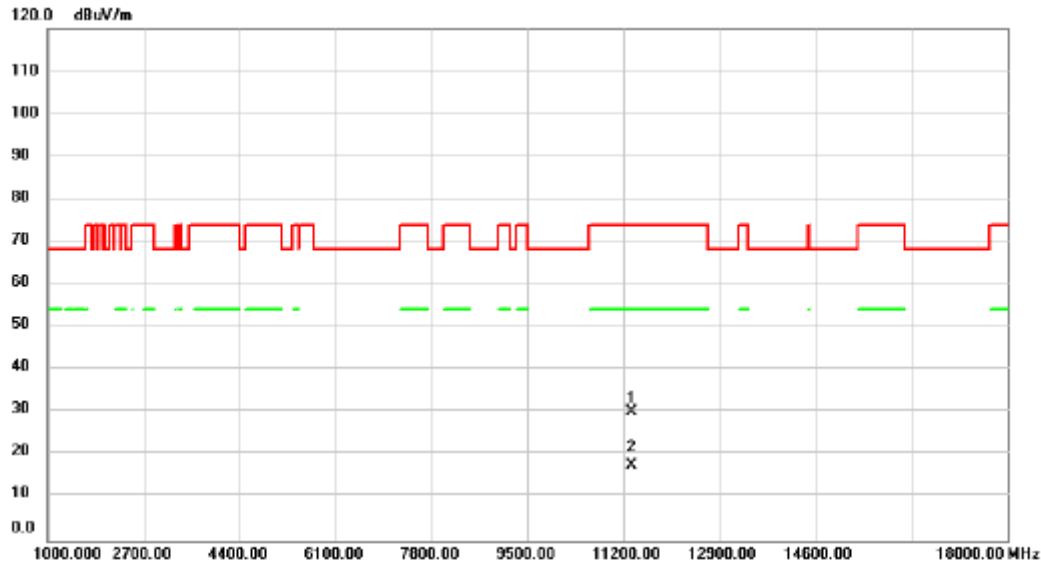


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11340.00	29.72	0.49	30.21	74.00	-43.79	peak	
2 *	11340.00	17.11	0.49	17.60	54.00	-36.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

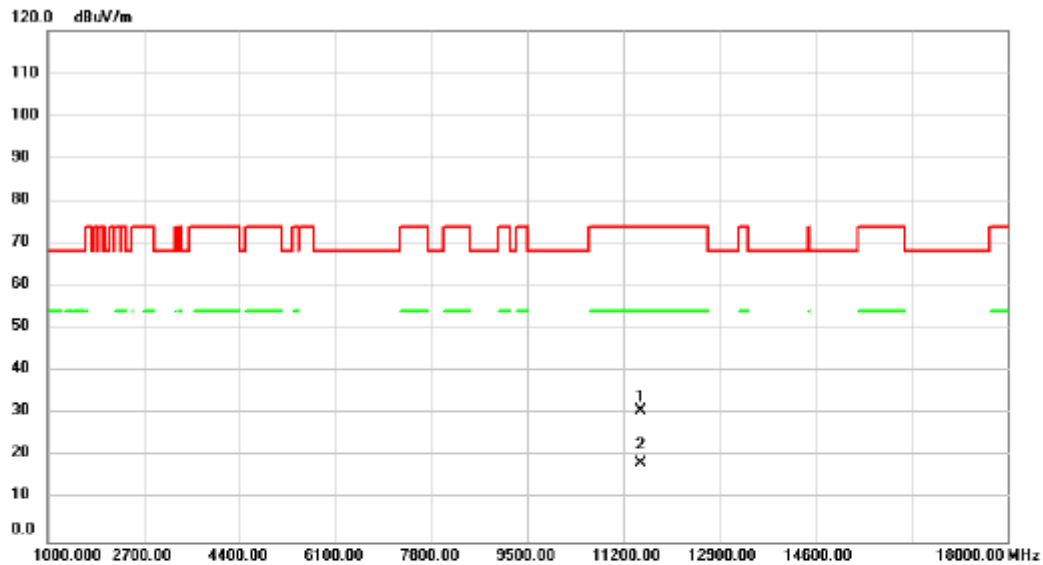


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	29.78	0.83	30.61	74.00	-43.39	peak	
2	*	11510.00	17.72	0.83	18.55	54.00	-35.45	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

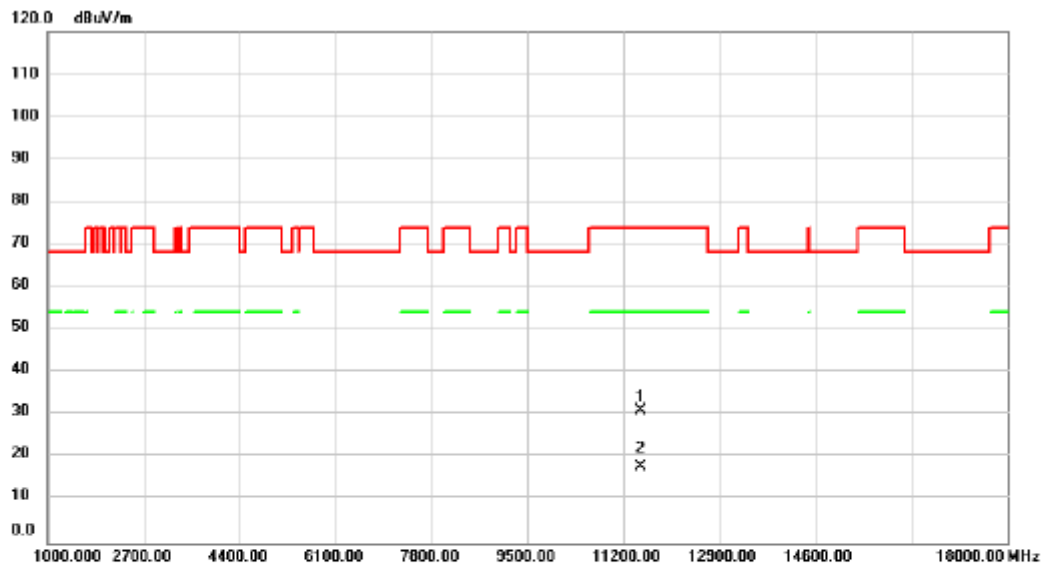


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	30.24	0.83	31.07	74.00	-42.93	peak	
2	*	11510.00	17.08	0.83	17.91	54.00	-36.09	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

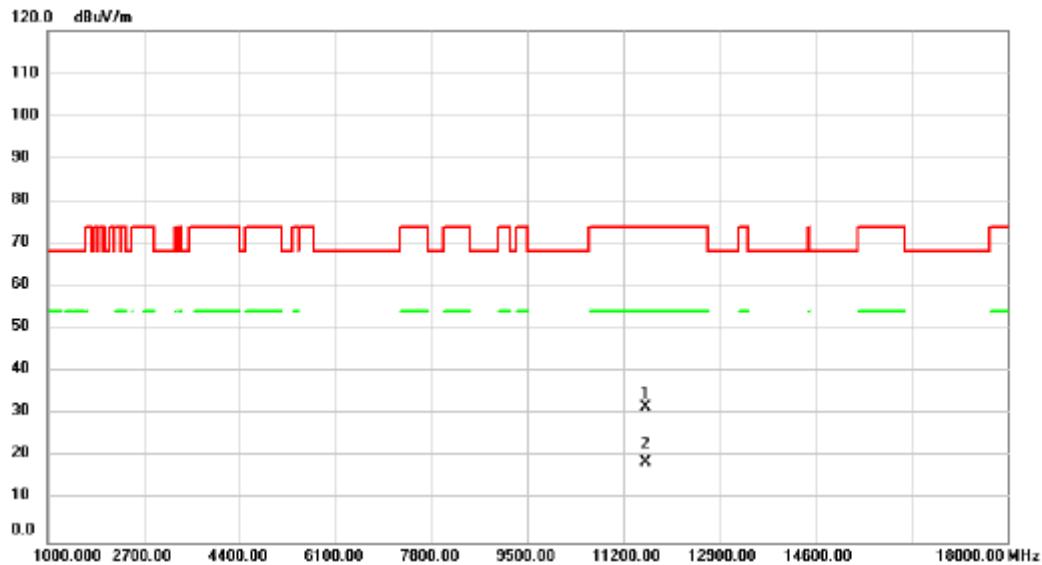


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	30.88	0.84	31.72	74.00	-42.28	peak	
2	*	11590.00	17.95	0.84	18.79	54.00	-35.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT40)	Test Date	2024/11/22
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

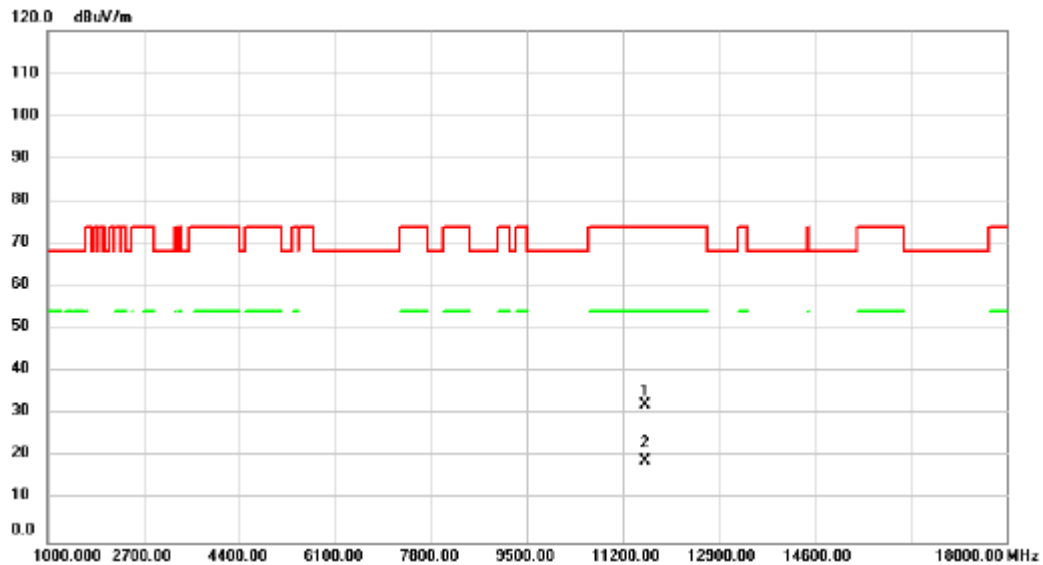


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	31.43	0.84	32.27	74.00	-41.73	peak	
2	*	11590.00	18.10	0.84	18.94	54.00	-35.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

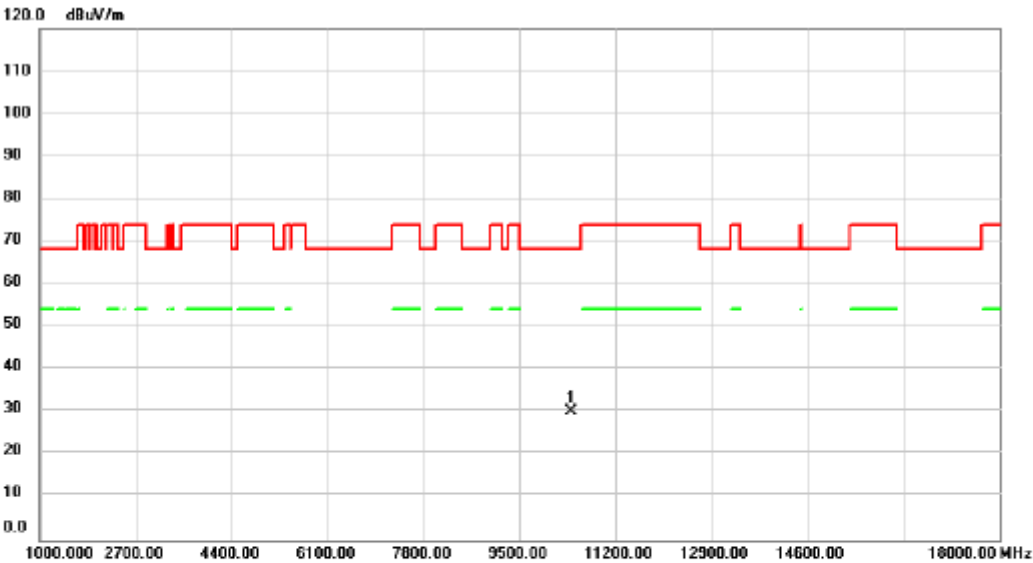


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	30.76	-0.54	30.22	68.20	-37.98	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

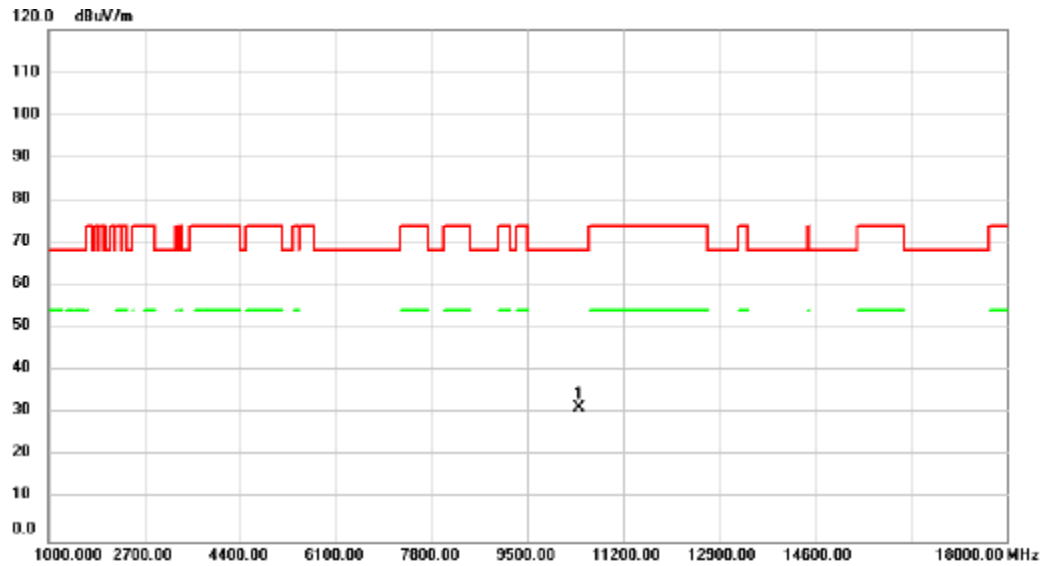


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	32.00	-0.54	31.46	68.20	-36.74	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

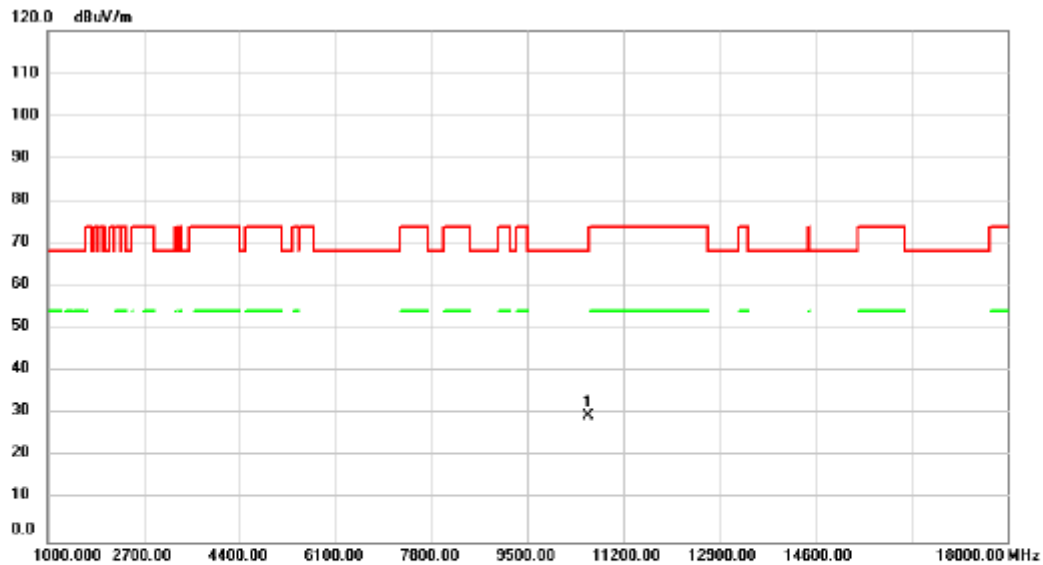


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	29.83	-0.42	29.41	68.20	-38.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

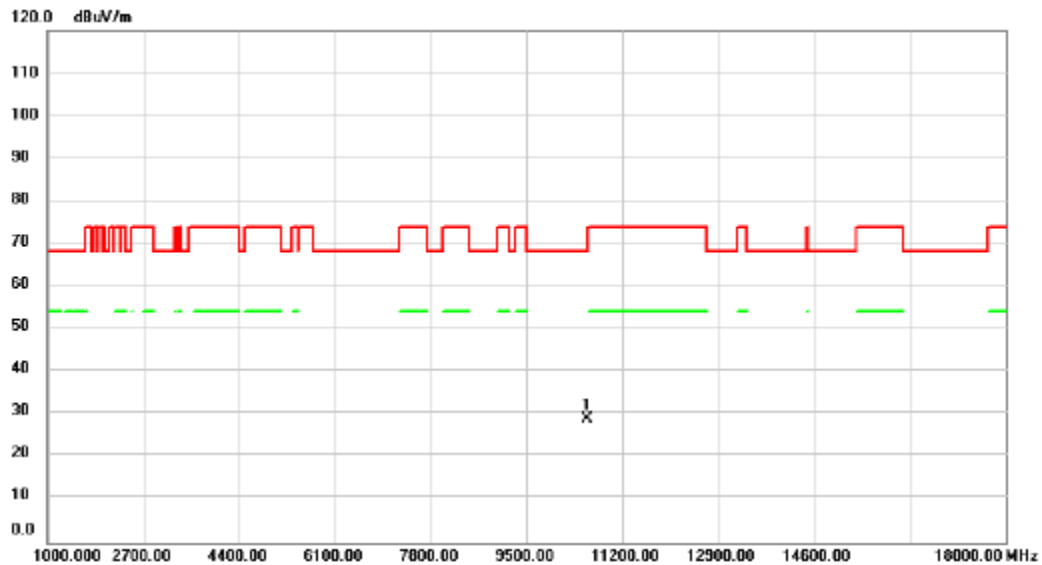


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10580.00	29.33	-0.42	28.91	68.20	-39.29	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

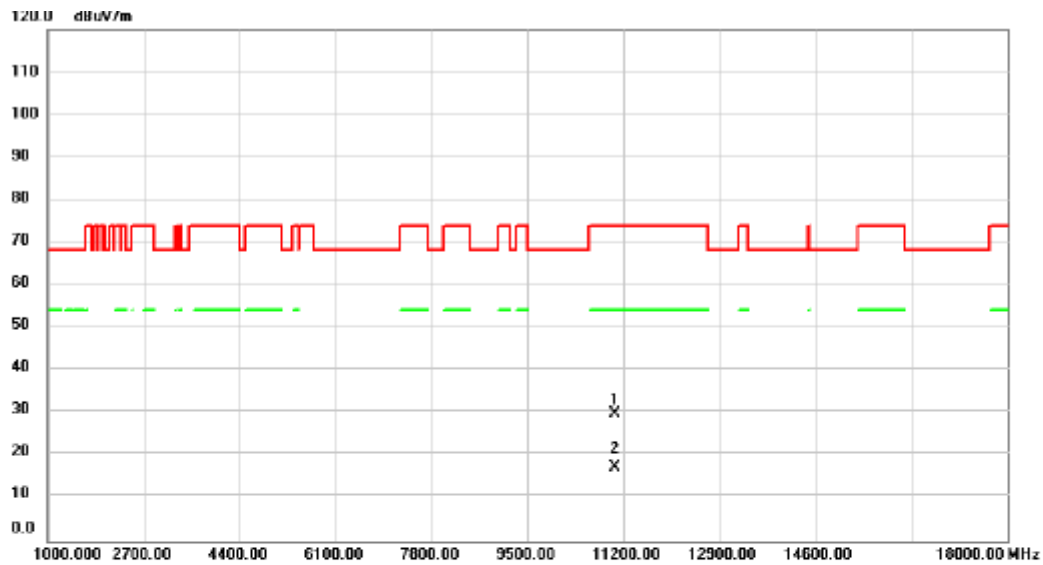


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	30.05	-0.13	29.92	74.00	-44.08	peak	
2	*	11060.00	17.30	-0.13	17.17	54.00	-36.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

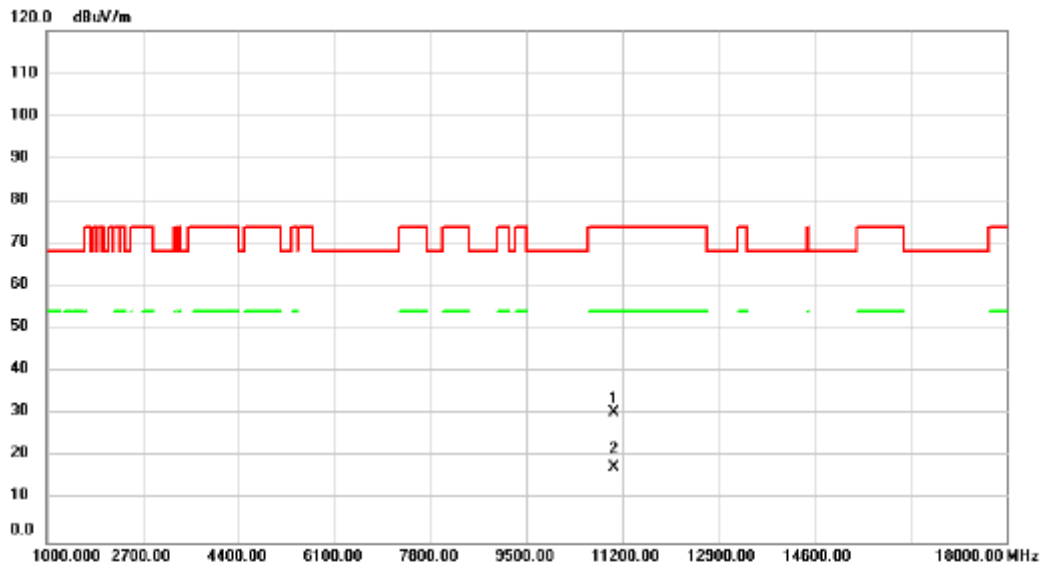


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	30.69	-0.13	30.56	74.00	-43.44	peak	
2	*	11060.00	17.60	-0.13	17.47	54.00	-36.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

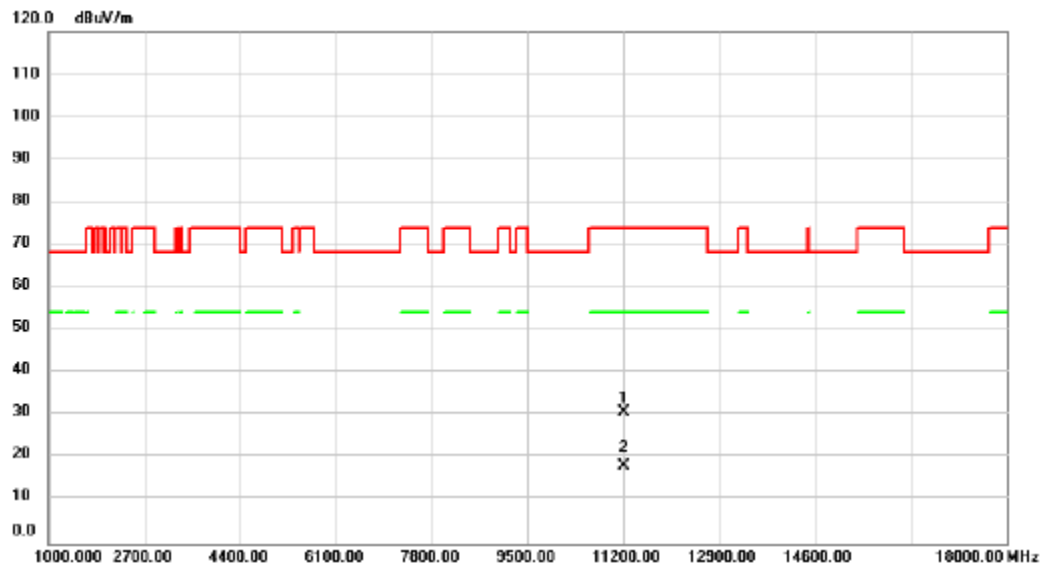


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	30.67	0.22	30.89	74.00	-43.11	peak	
2	*	11220.00	17.94	0.22	18.16	54.00	-35.84	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

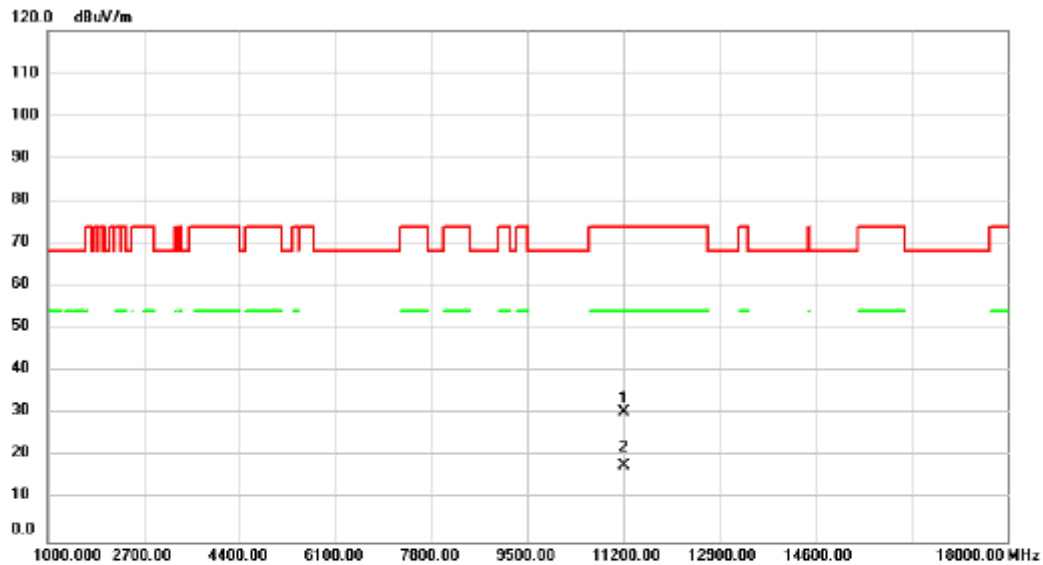


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	30.34	0.22	30.56	74.00	-43.44	peak	
2	*	11220.00	17.62	0.22	17.84	54.00	-36.16	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

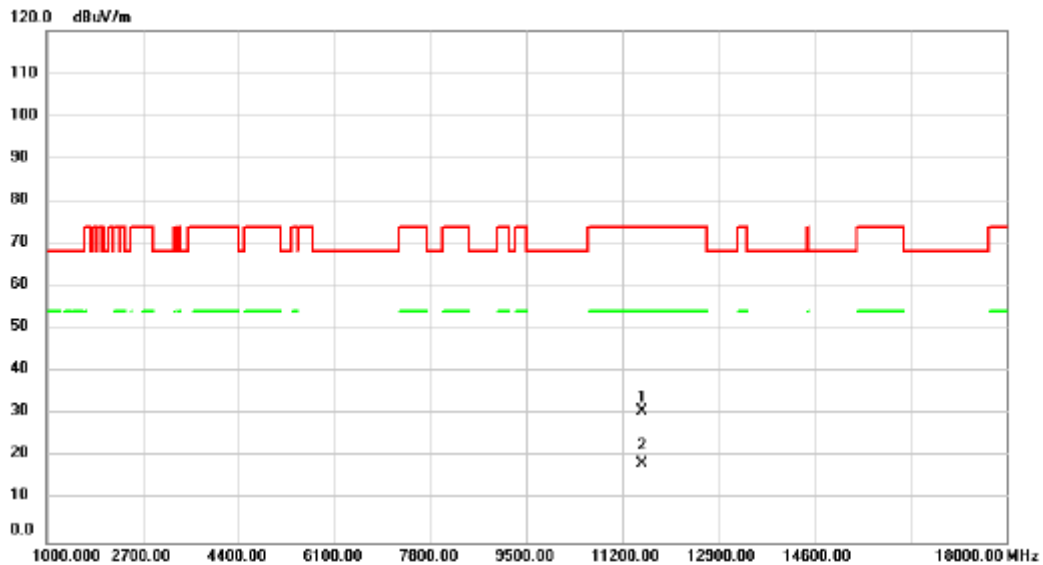


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	29.86	0.84	30.70	74.00	-43.30	peak	
2	*	11550.00	17.54	0.84	18.38	54.00	-35.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT80)	Test Date	2024/11/22
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

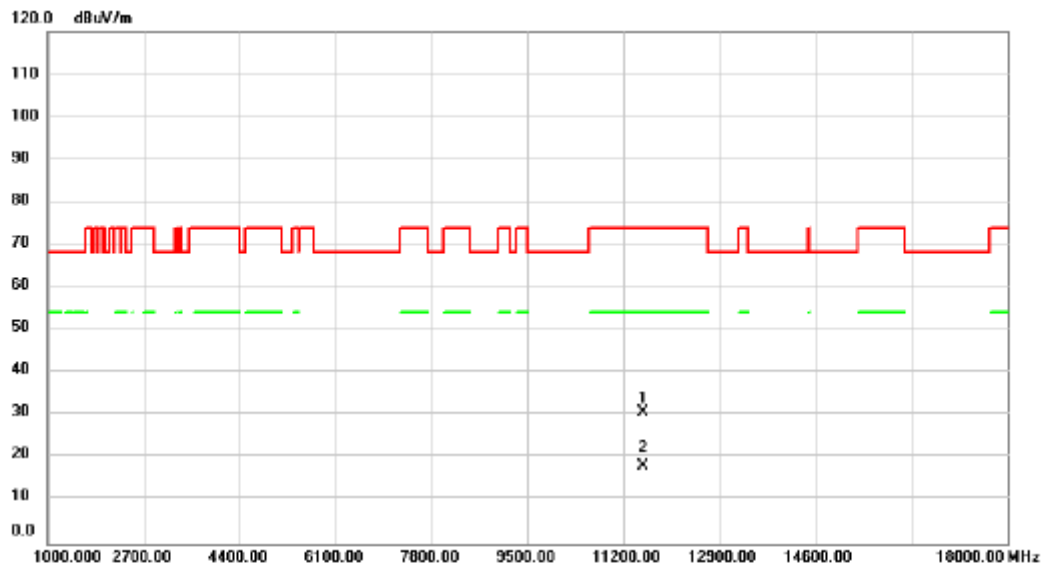


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	29.88	0.84	30.72	74.00	-43.28	peak	
2	*	11550.00	17.45	0.84	18.29	54.00	-35.71	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/11/22
Test Frequency	5250MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

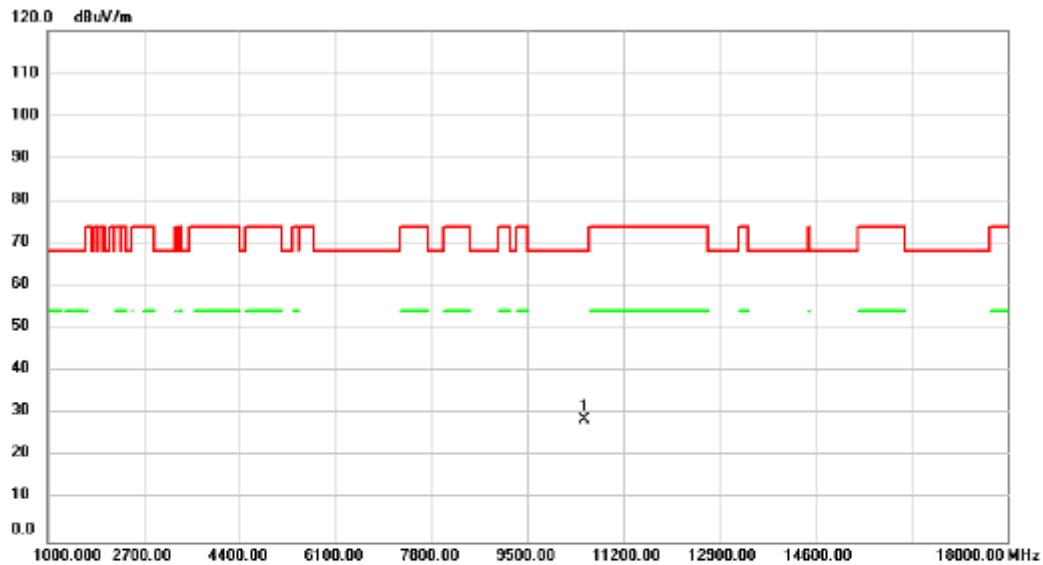


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	28.96	-0.45	28.51	68.20	-39.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/11/22
Test Frequency	5250MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

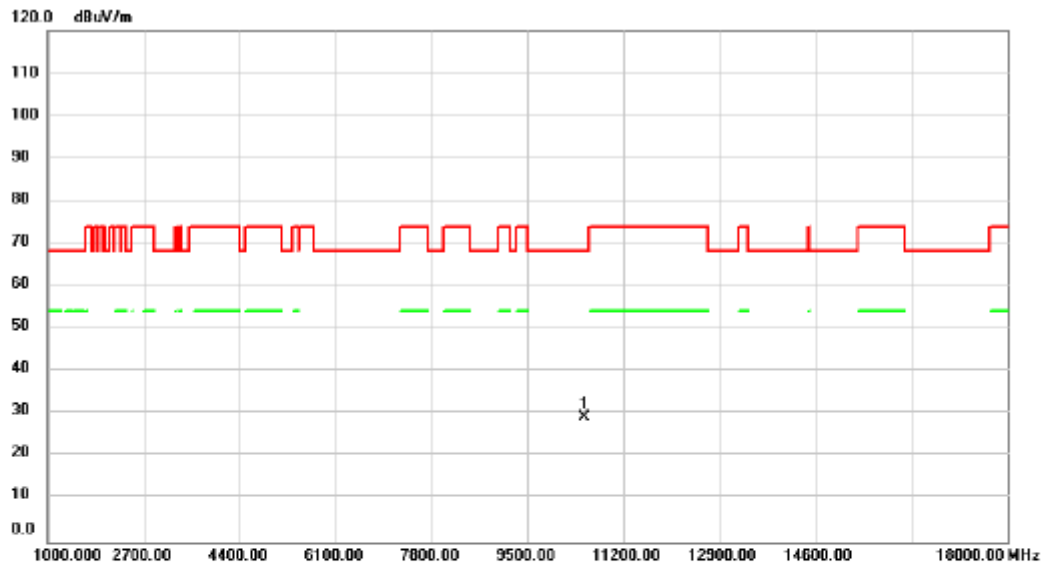


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10500.00	29.77	-0.45	29.32	68.20	-38.88	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/11/22
Test Frequency	5570MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

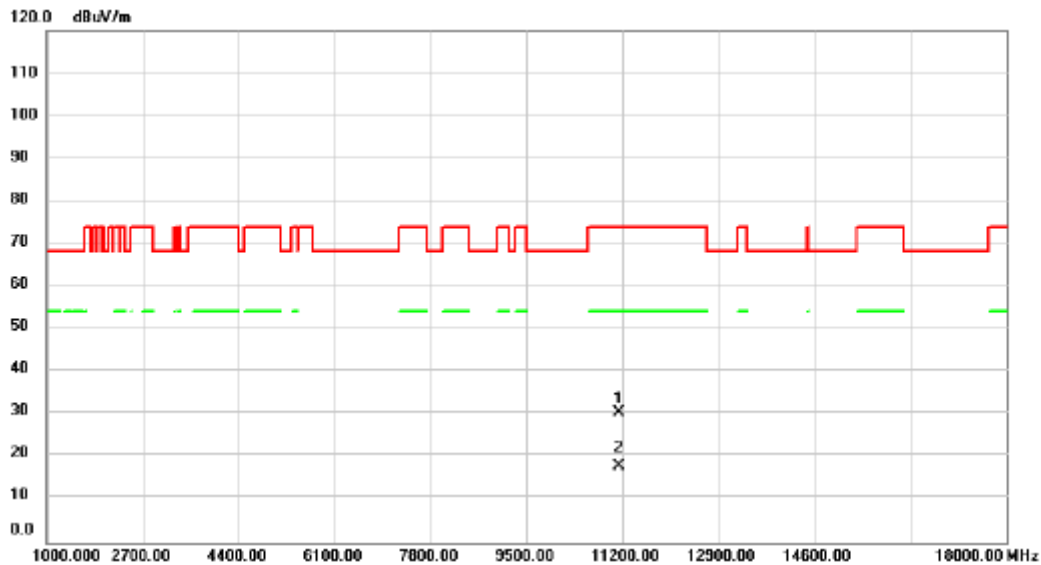


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.00	30.53	0.03	30.56	74.00	-43.44	peak	
2	*	11140.00	17.89	0.03	17.92	54.00	-36.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac(VHT160)	Test Date	2024/11/22
Test Frequency	5570MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

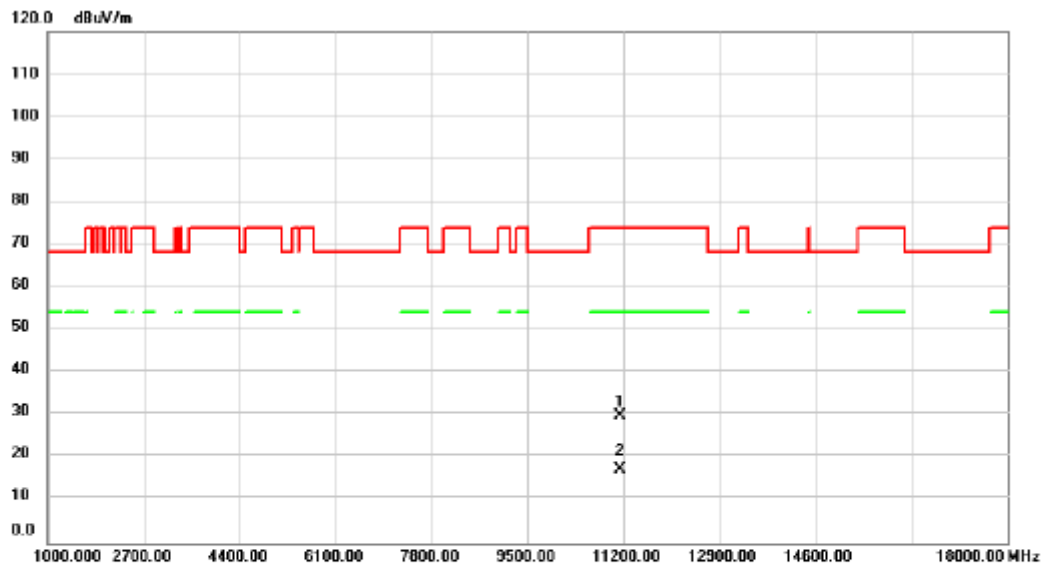


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.00	29.80	0.03	29.83	74.00	-44.17	peak	
2	*	11140.00	17.35	0.03	17.38	54.00	-36.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

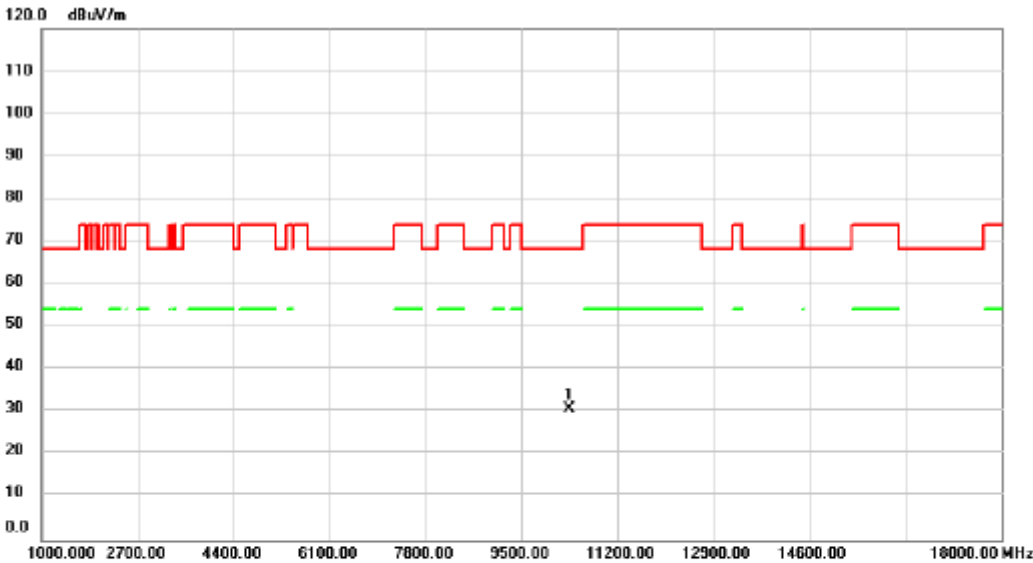

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10360.00	31.45	-0.60	30.85	68.20	-37.35	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5180MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

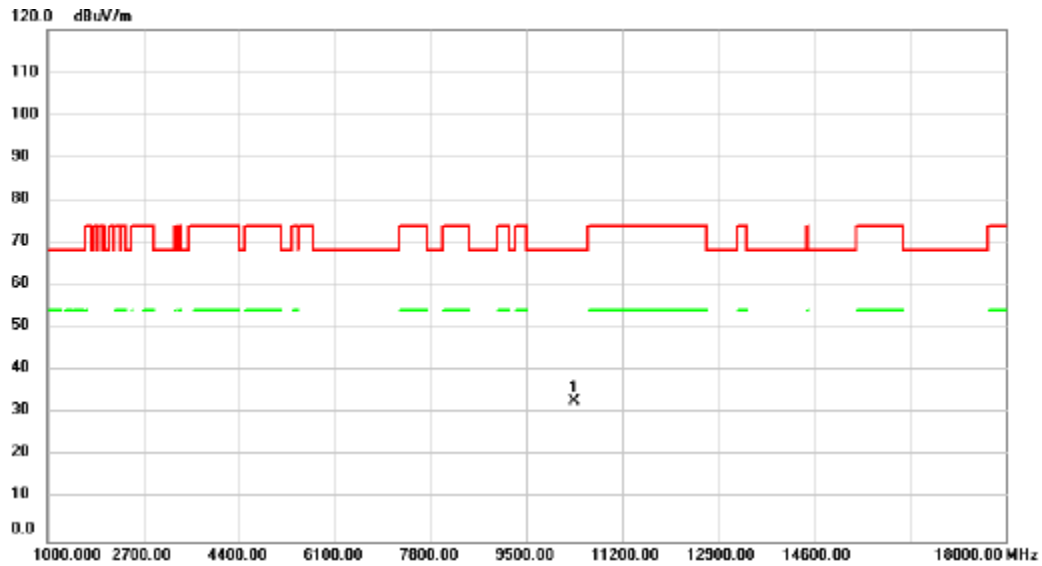


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	33.59	-0.60	32.99	68.20	-35.21	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

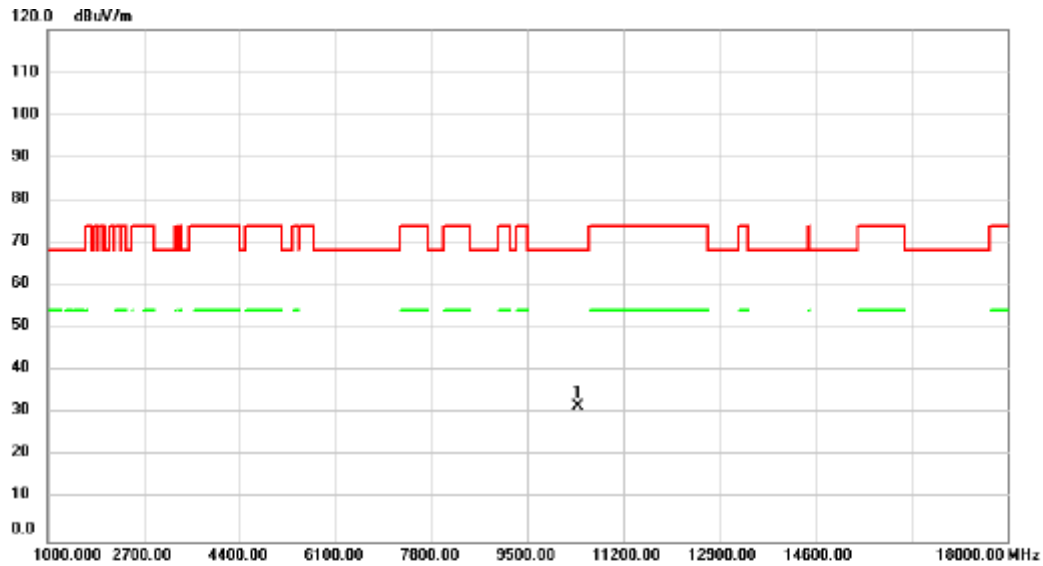


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector Comment
1	*	10400.00	32.09	-0.55	31.54	68.20	-36.66	peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

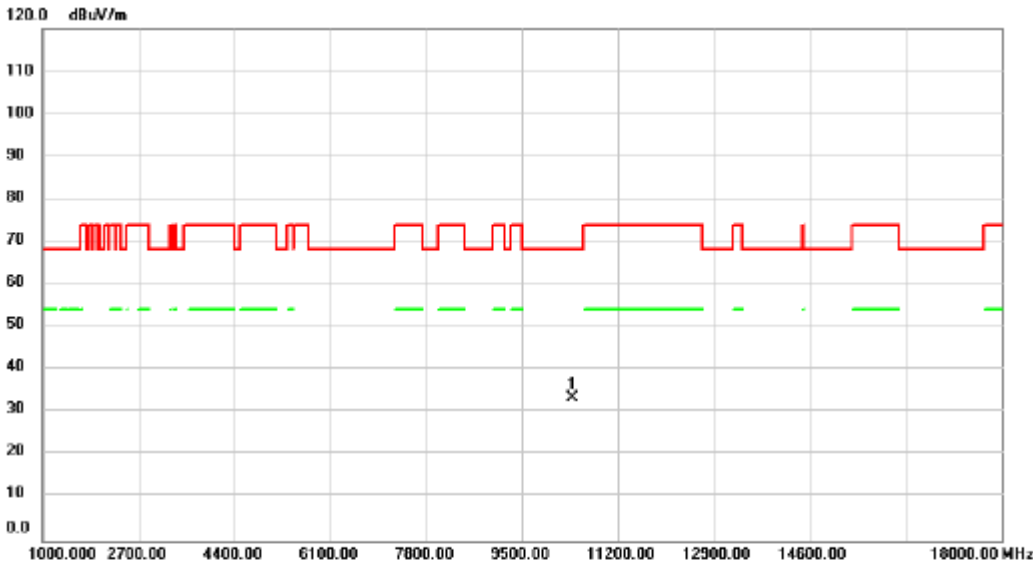


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.00	34.10	-0.55	33.55	68.20	-34.65	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

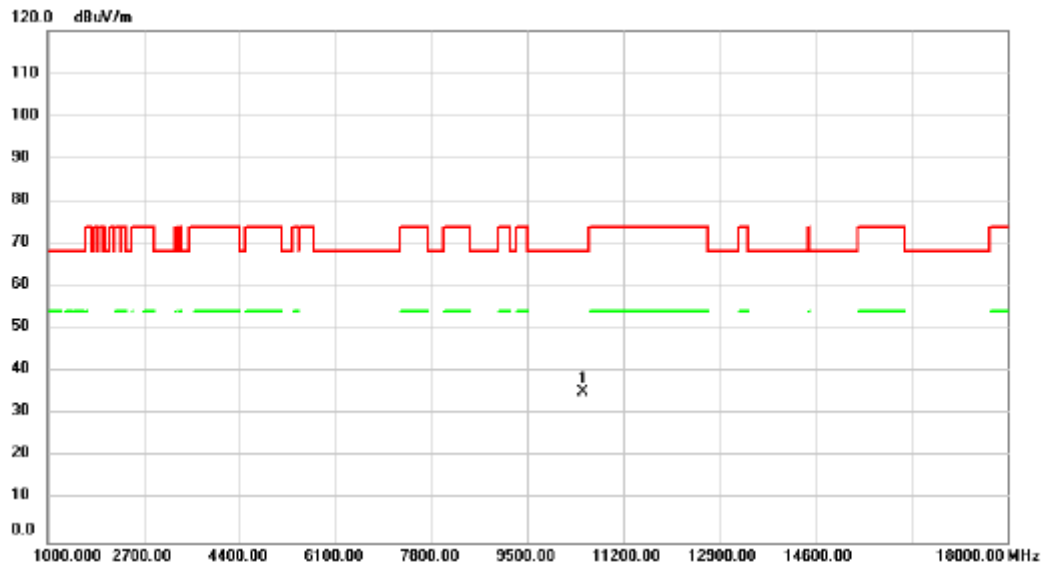


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	35.68	-0.47	35.21	68.20	-32.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5240MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

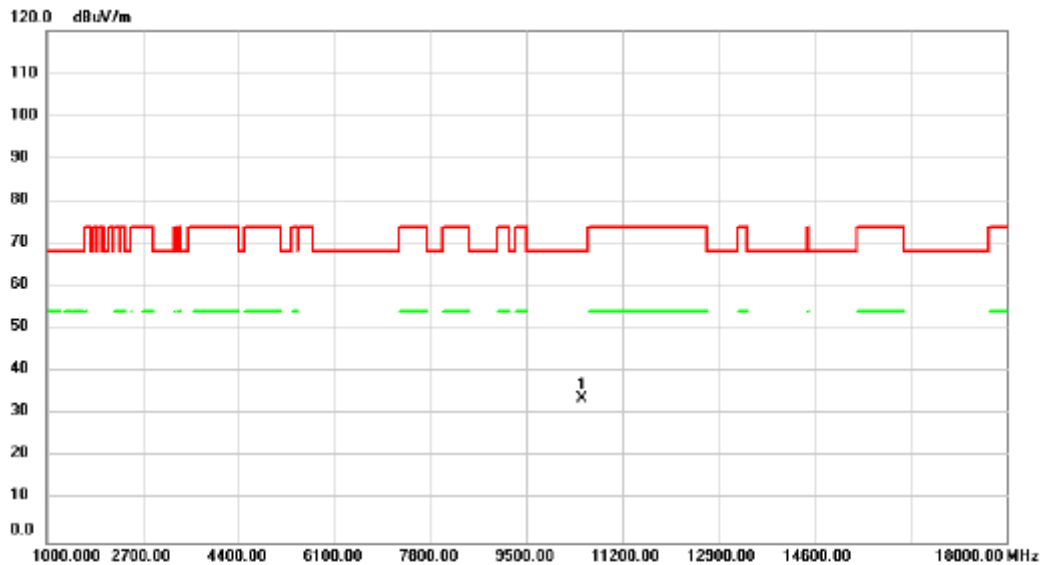


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	34.27	-0.47	33.80	68.20	-34.40	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

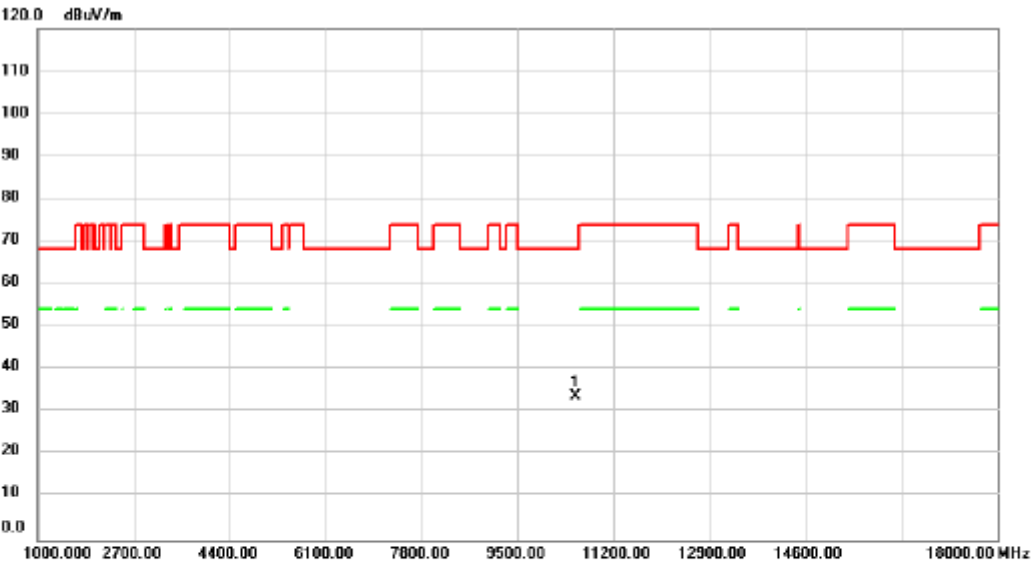


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	34.18	-0.44	33.74	68.20	-34.46	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5260MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

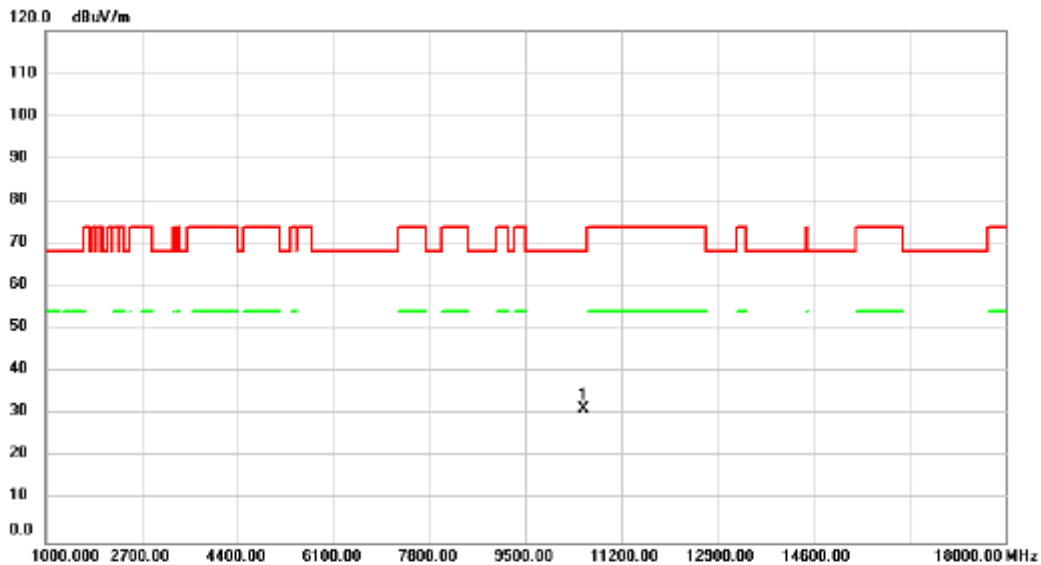


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10520.00	31.81	-0.44	31.37	68.20	-36.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

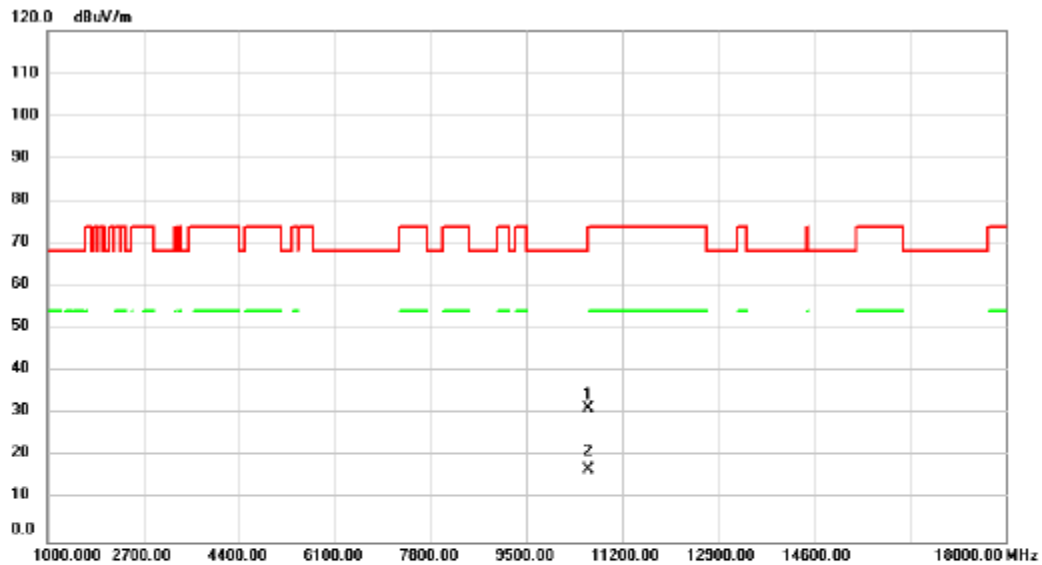


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10600.00	31.68	-0.41	31.27	68.20	-36.93	peak	
2		10600.00	17.34	-0.41	16.93	54.00	-37.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5300MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

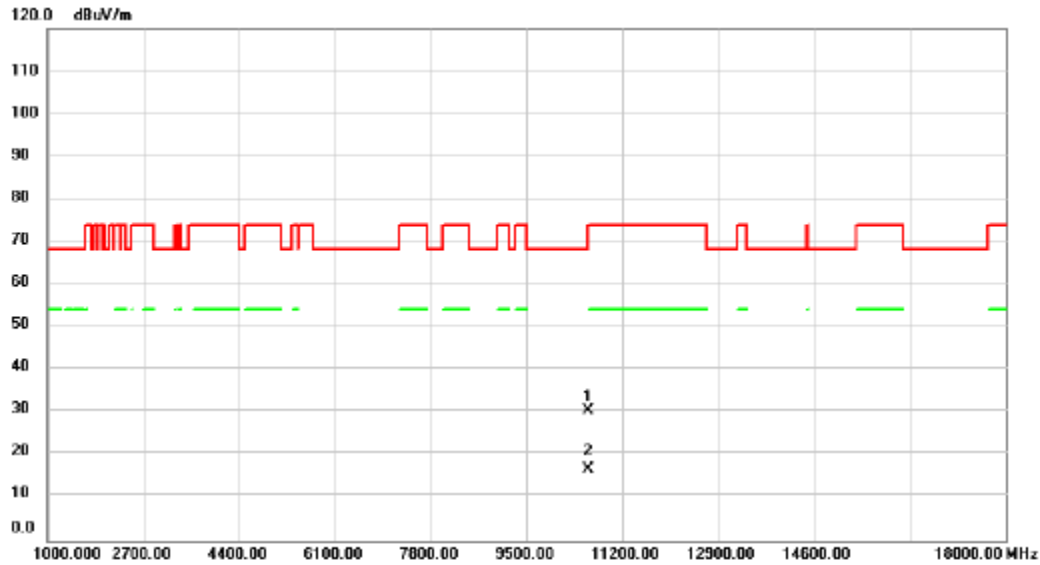


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		10600.00	30.81	-0.41	30.40	68.20	-37.80	peak	
2	*	10600.00	17.07	-0.41	16.66	54.00	-37.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

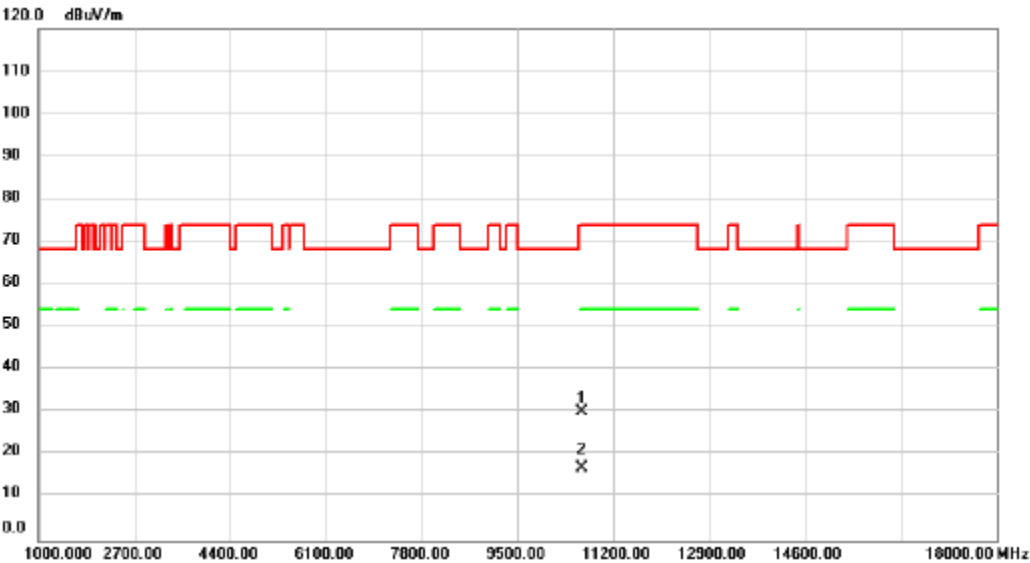

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	30.60	-0.41	30.19	74.00	-43.81	peak	
2	*	10640.00	17.38	-0.41	16.97	54.00	-37.03	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5320MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

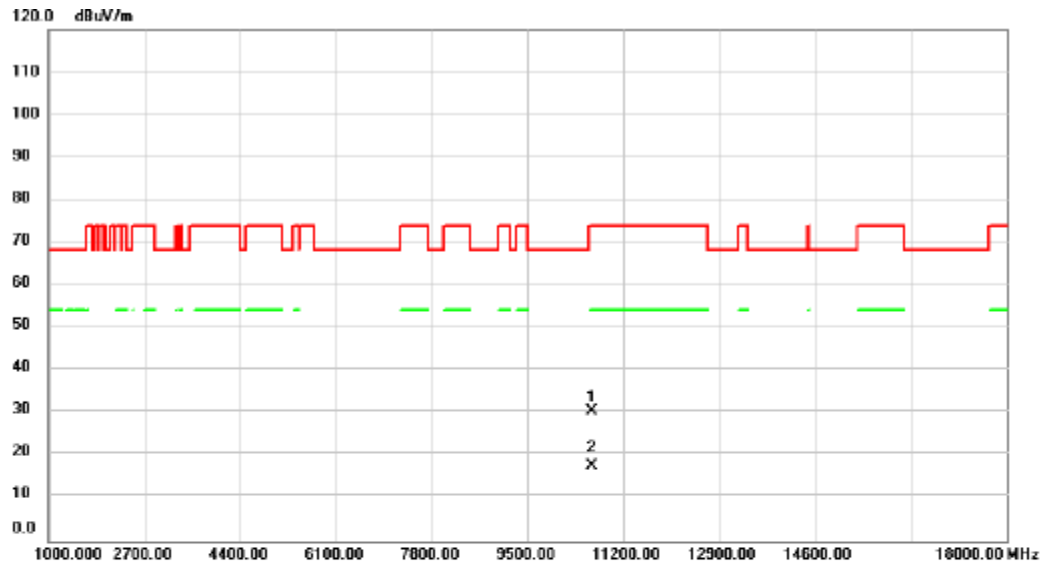


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	30.73	-0.41	30.32	74.00	-43.68	peak	
2	*	10640.00	17.99	-0.41	17.58	54.00	-36.42	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

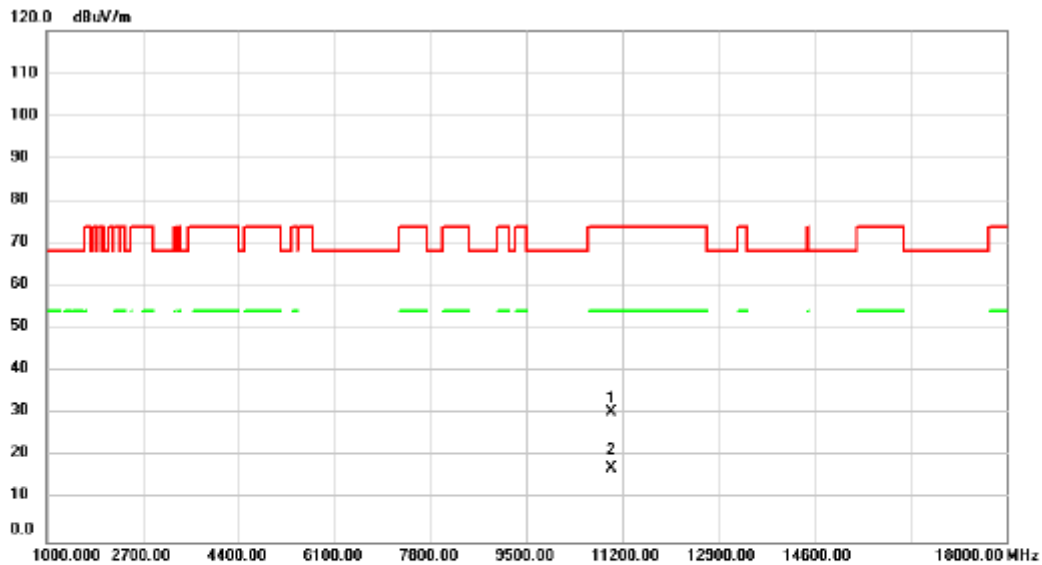


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	30.72	-0.27	30.45	74.00	-43.55	peak	
2	*	11000.00	17.55	-0.27	17.28	54.00	-36.72	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5500MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

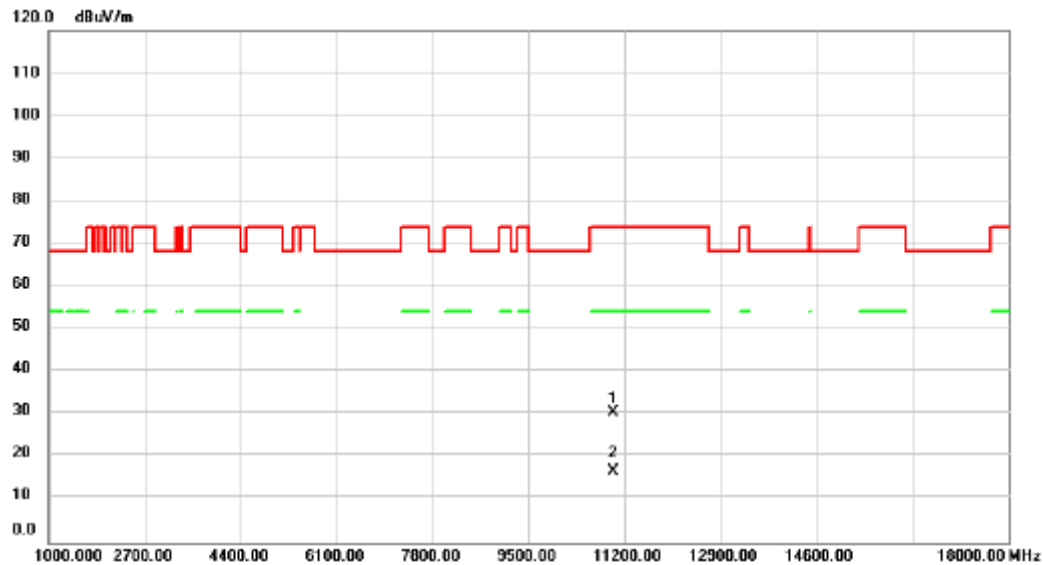


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	30.75	-0.27	30.48	74.00	-43.52	peak	
2	*	11000.00	17.03	-0.27	16.76	54.00	-37.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

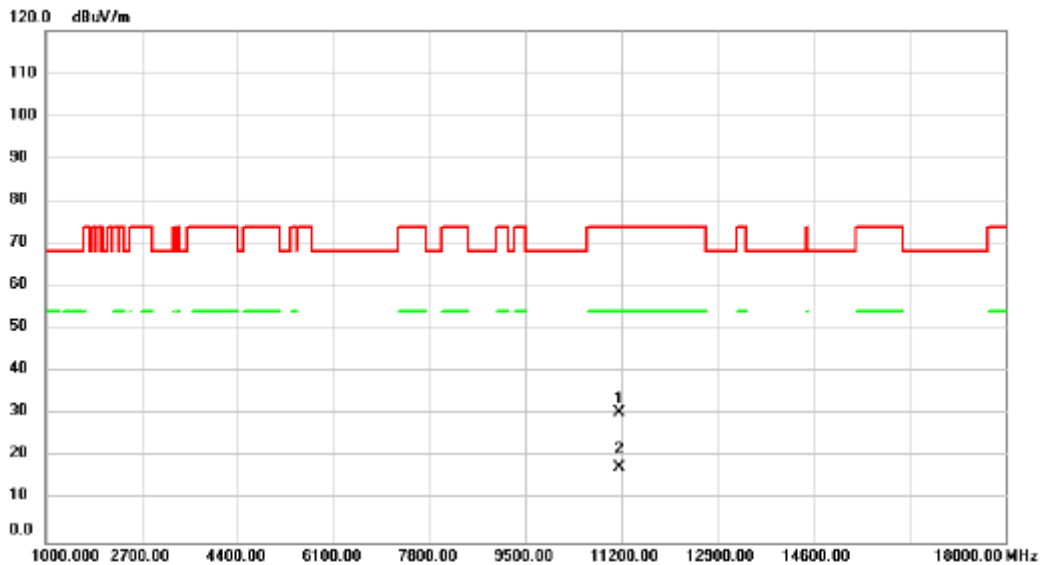


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.00	30.23	0.08	30.31	74.00	-43.69	peak	
2	*	11160.00	17.53	0.08	17.61	54.00	-36.39	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5580MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

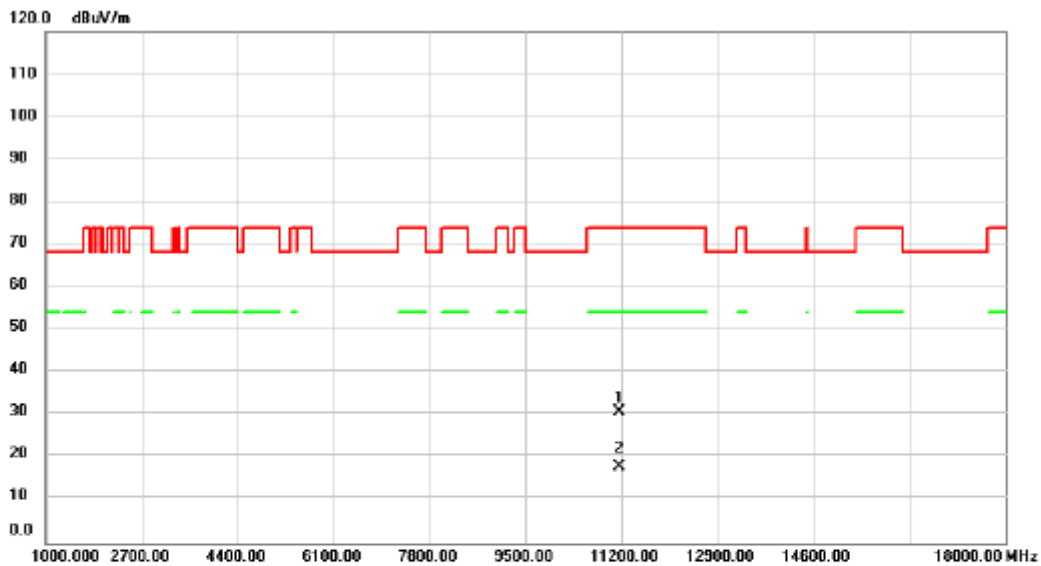


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.00	30.79	0.08	30.87	74.00	-43.13	peak	
2	*	11160.00	17.69	0.08	17.77	54.00	-36.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

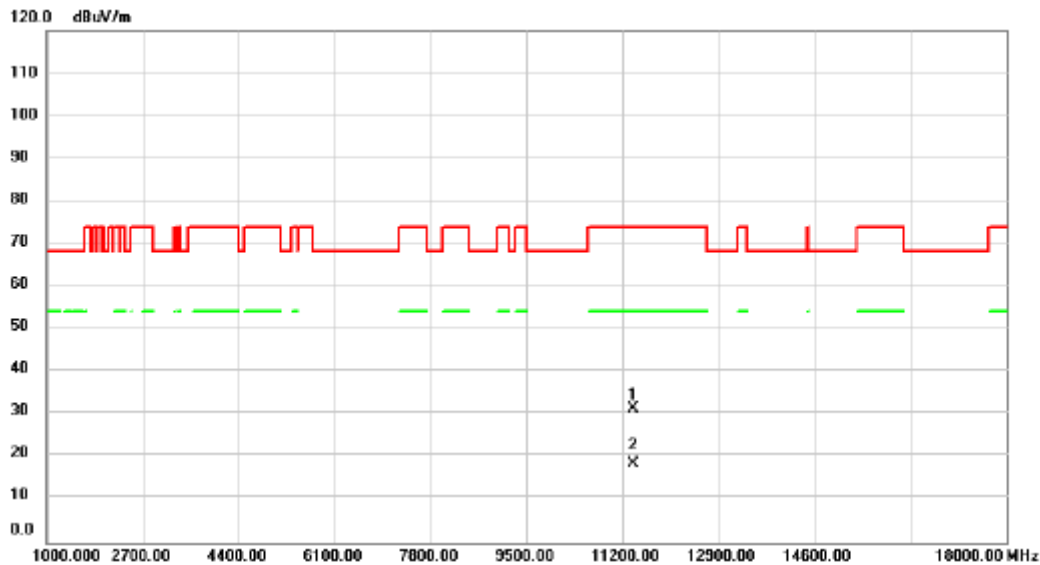


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	30.81	0.61	31.42	74.00	-42.58	peak	
2	*	11400.00	17.83	0.61	18.44	54.00	-35.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5700MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

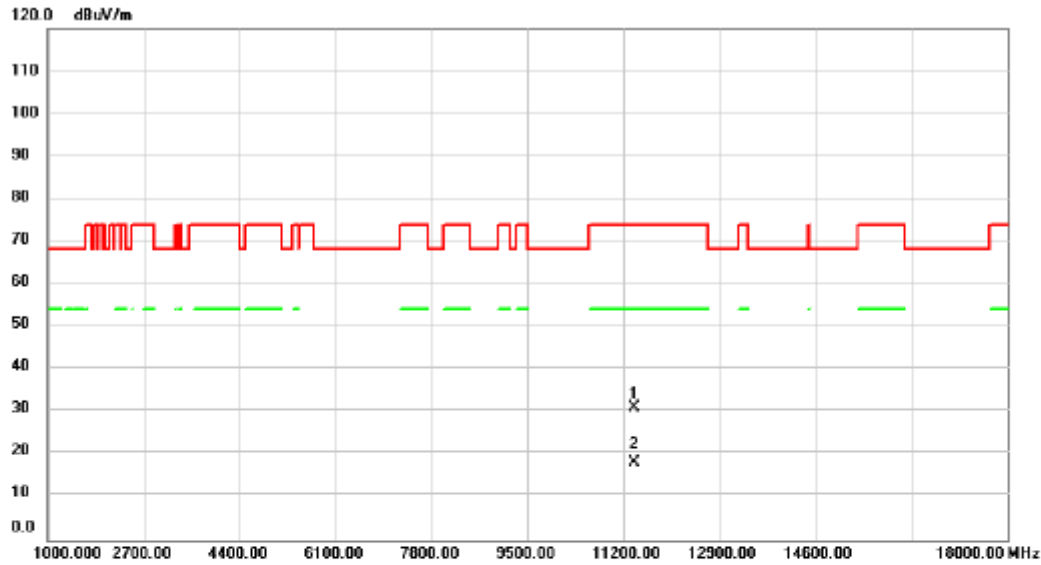


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	30.39	0.61	31.00	74.00	-43.00	peak	
2	*	11400.00	17.48	0.61	18.09	54.00	-35.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

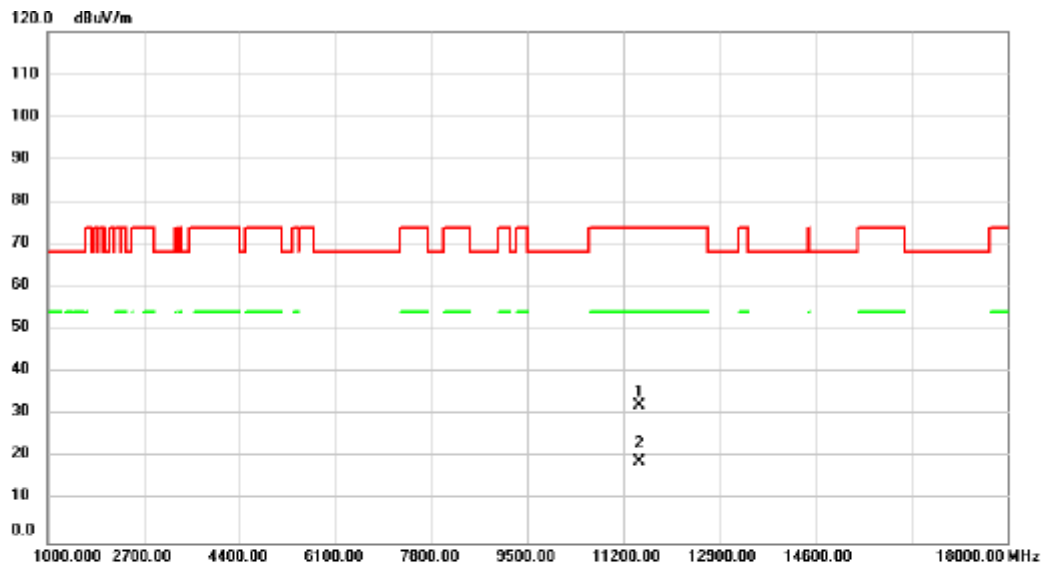


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.00	31.55	0.82	32.37	74.00	-41.63	peak	
2 *	11490.00	18.17	0.82	18.99	54.00	-35.01	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

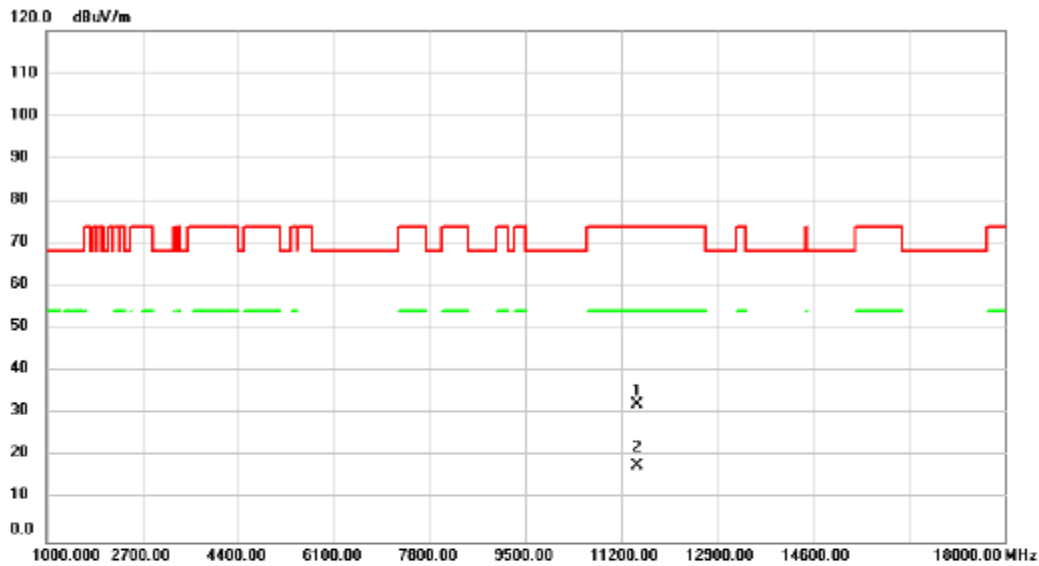


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	31.29	0.82	32.11	74.00	-41.89	peak	
2	*	11490.00	17.15	0.82	17.97	54.00	-36.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

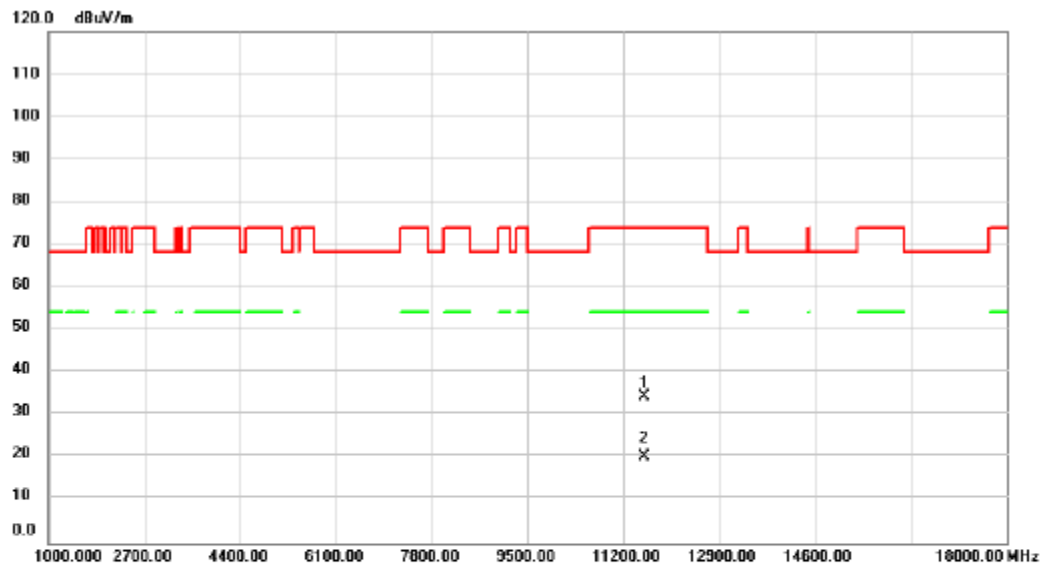


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	33.54	0.83	34.37	74.00	-39.63	peak	
2	*	11570.00	19.56	0.83	20.39	54.00	-33.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5785MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

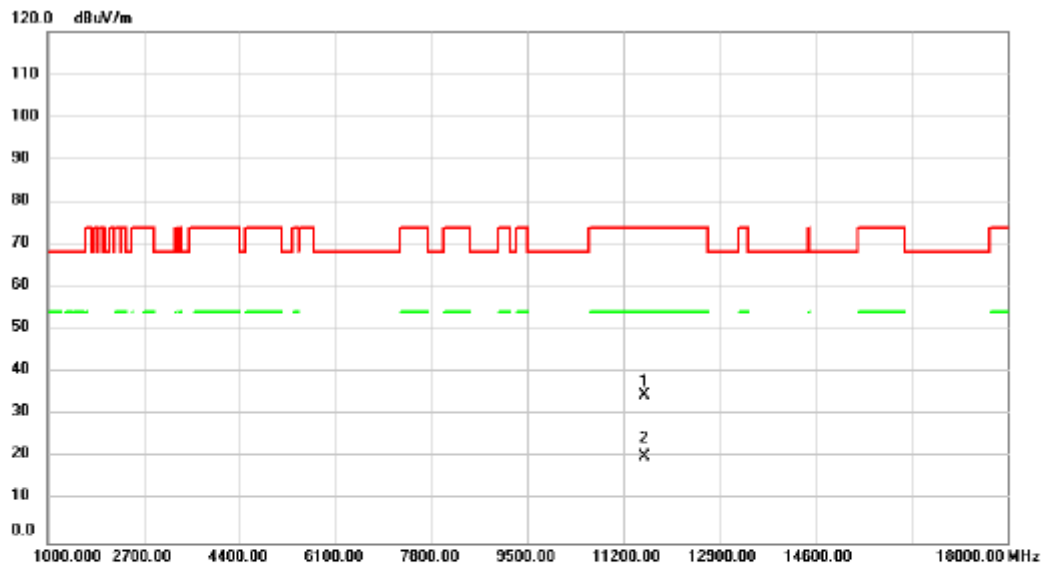


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.00	33.83	0.83	34.66	74.00	-39.34	peak	
2 *	11570.00	19.27	0.83	20.10	54.00	-33.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

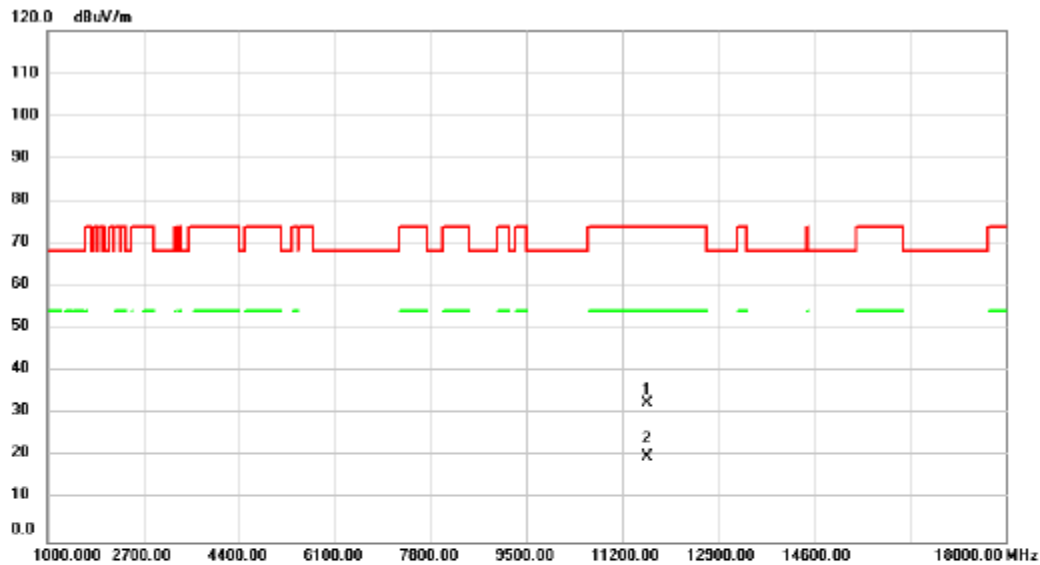


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	31.62	0.83	32.45	74.00	-41.55	peak	
2	*	11650.00	19.00	0.83	19.83	54.00	-34.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5825MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

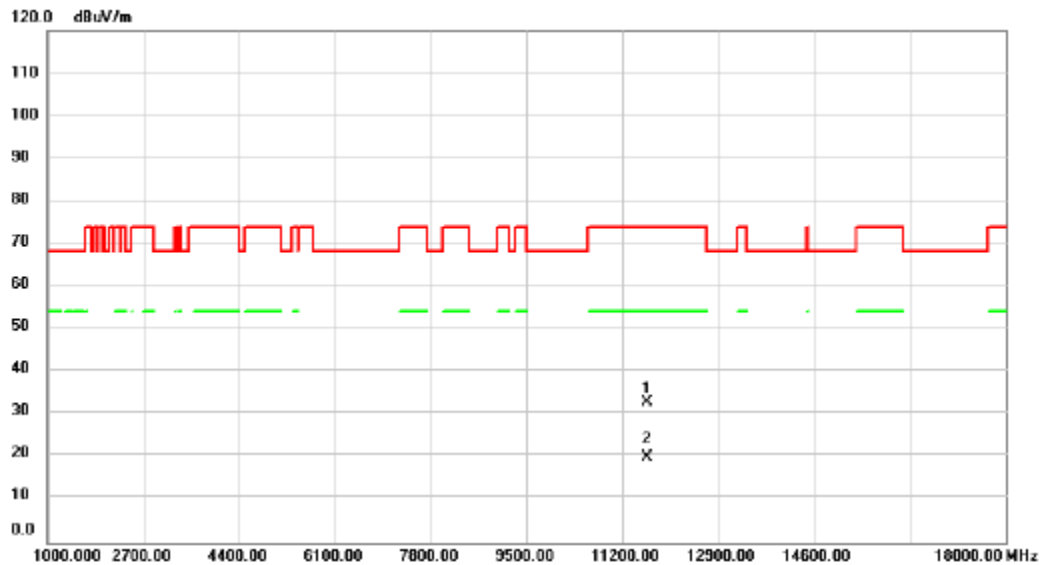


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	32.07	0.83	32.90	74.00	-41.10	peak	
2	*	11650.00	19.03	0.83	19.86	54.00	-34.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

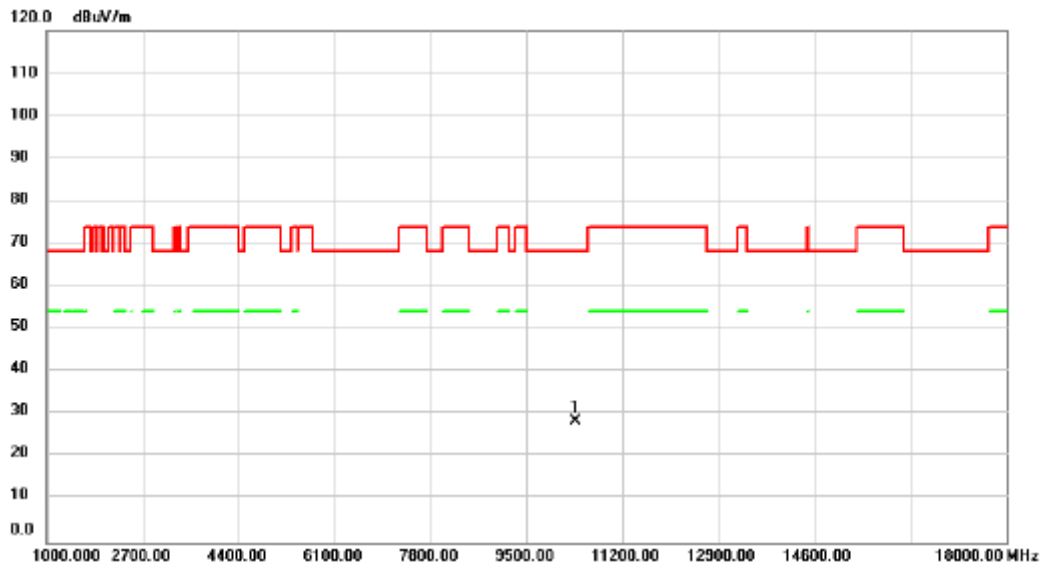


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	28.94	-0.57	28.37	68.20	-39.83	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5190MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

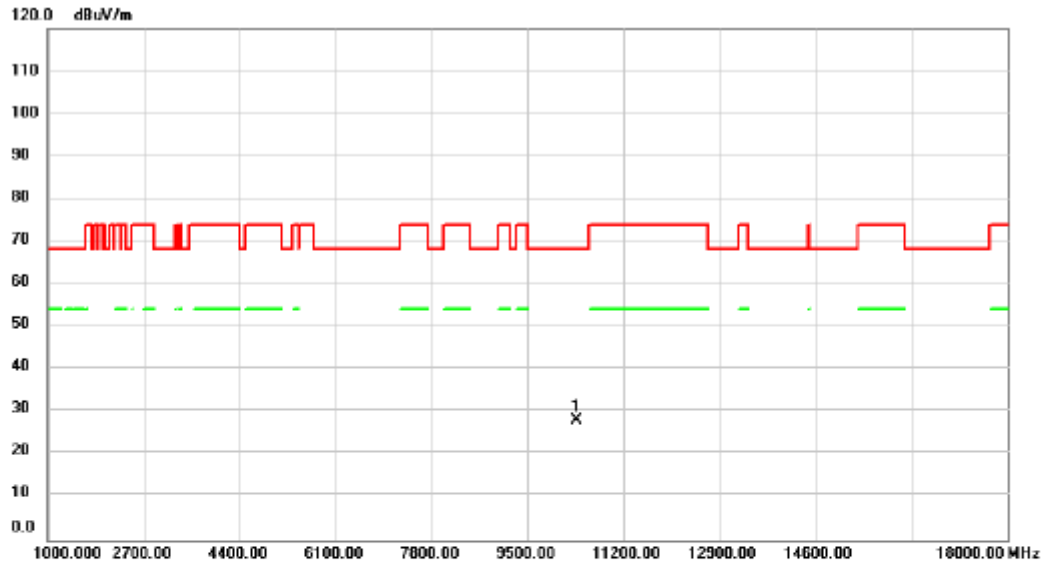


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	28.50	-0.57	27.93	68.20	-40.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

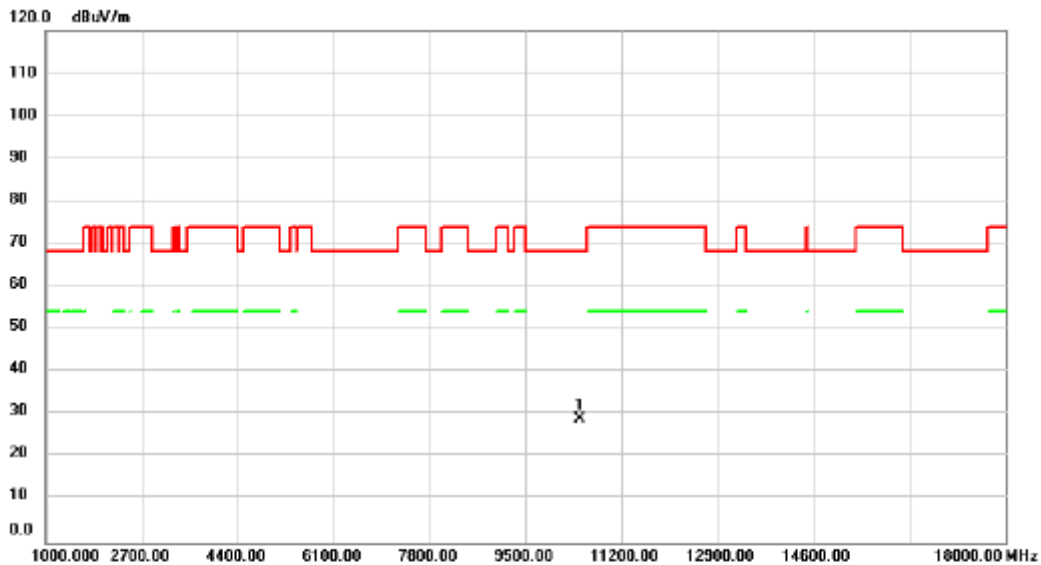


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10460.00	29.41	-0.49	28.92	68.20	-39.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5230MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

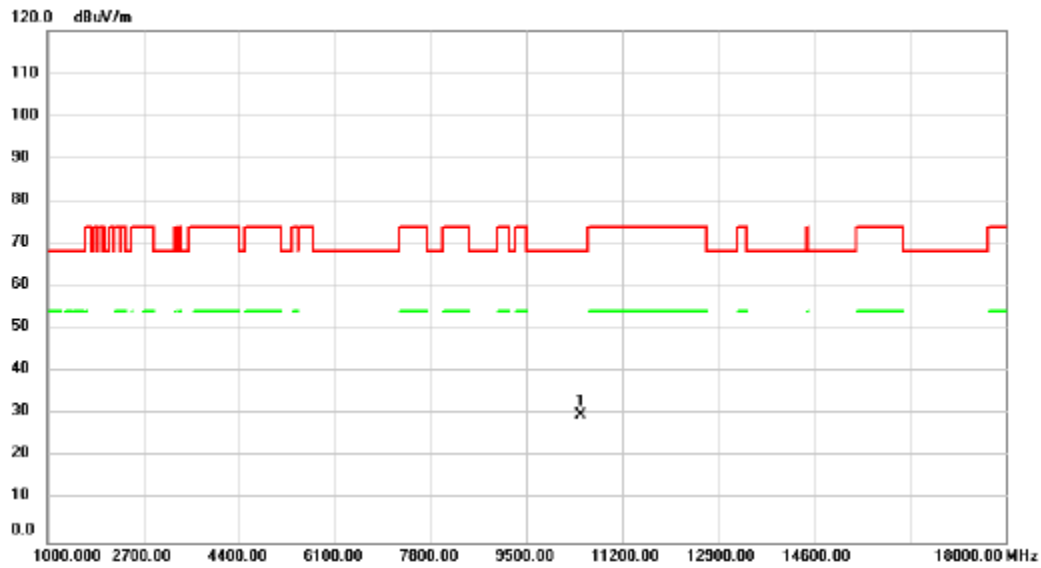


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	30.30	-0.49	29.81	68.20	-38.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

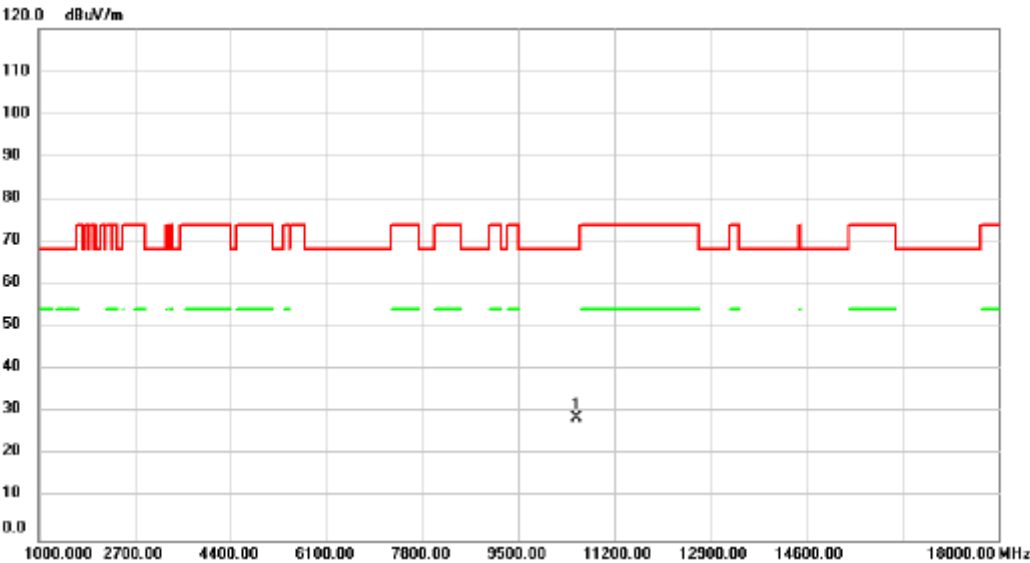


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10540.00	29.11	-0.44	28.67	68.20	-39.53	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5270MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

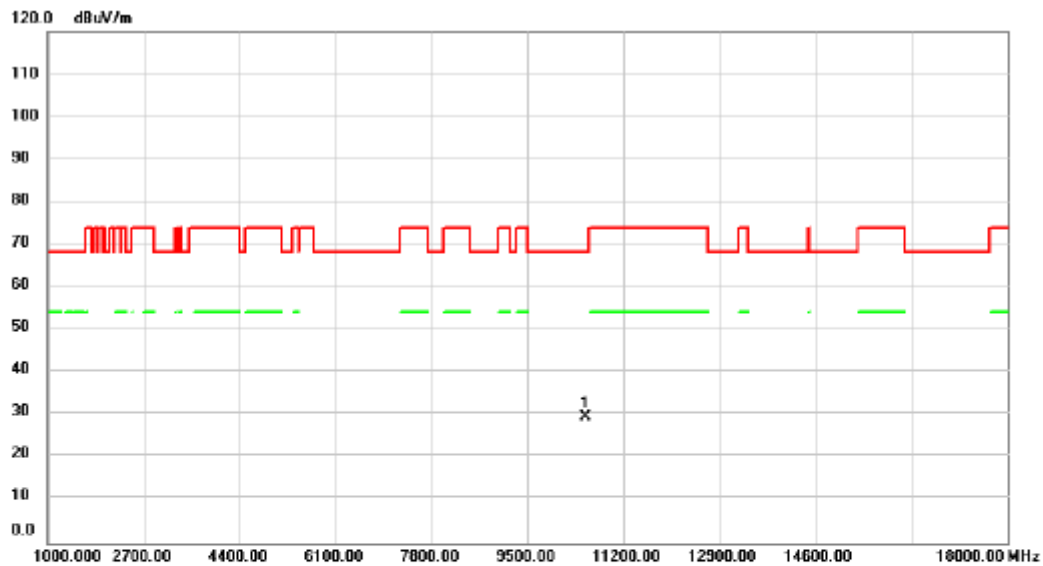


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10540.00	29.89	-0.44	29.45	68.20	-38.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

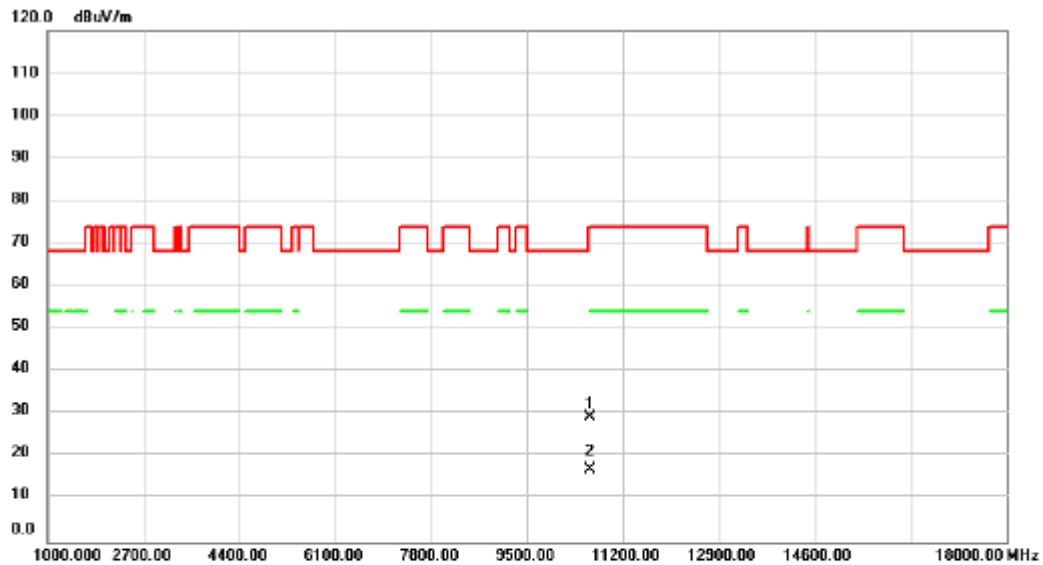


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	29.54	-0.40	29.14	74.00	-44.86	peak	
2	*	10620.00	17.22	-0.40	16.82	54.00	-37.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5310MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

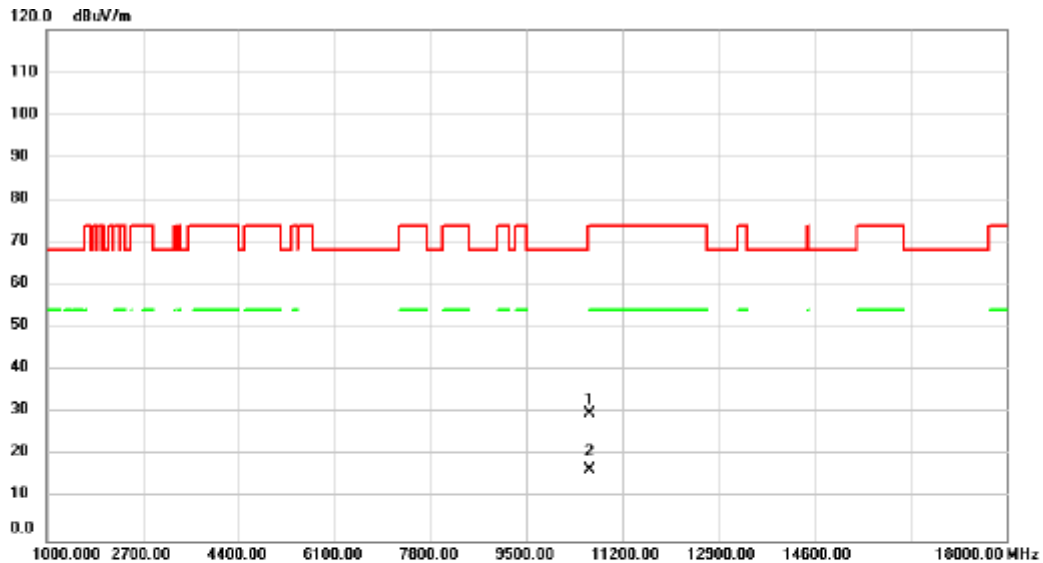


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	30.40	-0.40	30.00	74.00	-44.00	peak	
2	*	10620.00	17.09	-0.40	16.69	54.00	-37.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

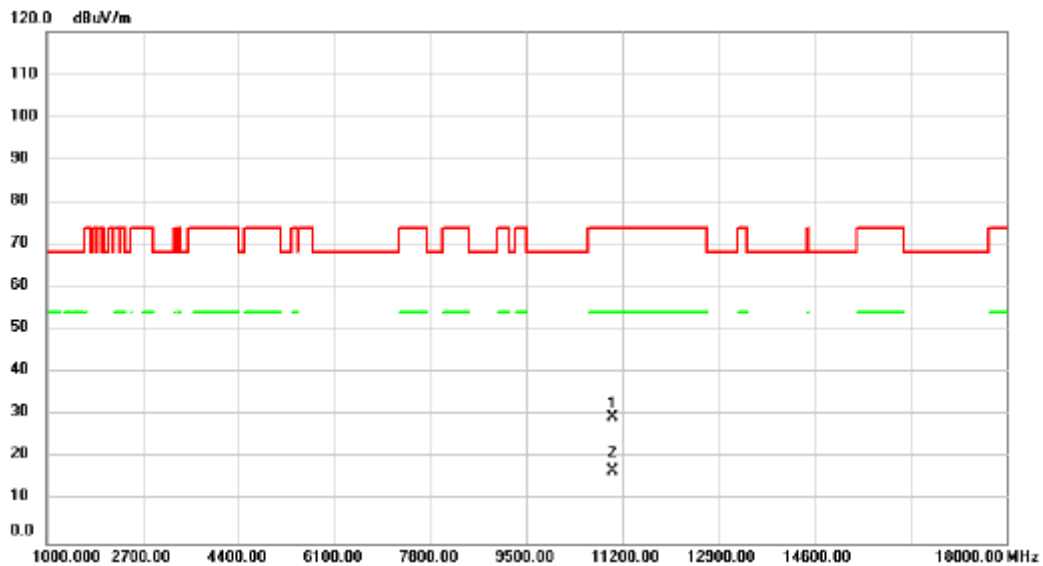


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.00	29.81	-0.22	29.59	74.00	-44.41	peak	
2	*	11020.00	17.27	-0.22	17.05	54.00	-36.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5510MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

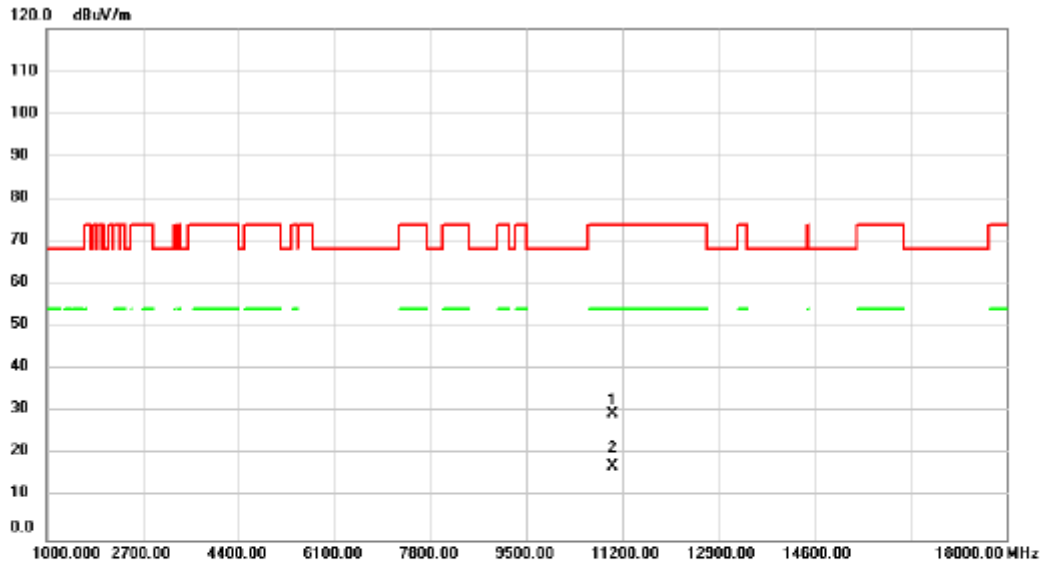


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.00	29.92	-0.22	29.70	74.00	-44.30	peak	
2	*	11020.00	17.48	-0.22	17.26	54.00	-36.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

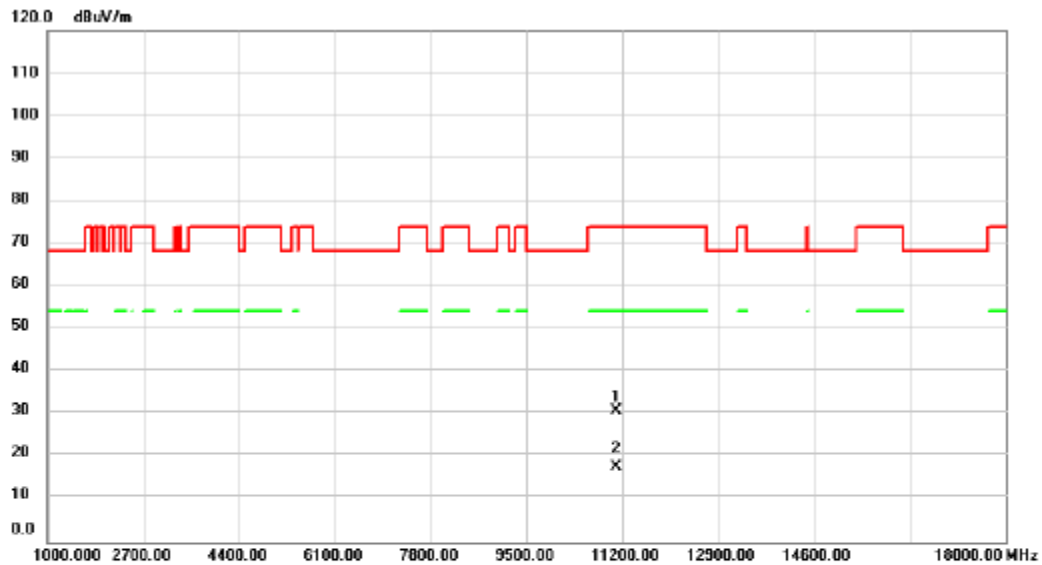


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11100.00	30.65	-0.04	30.61	74.00	-43.39	peak	
2 *	11100.00	17.51	-0.04	17.47	54.00	-36.53	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5550MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

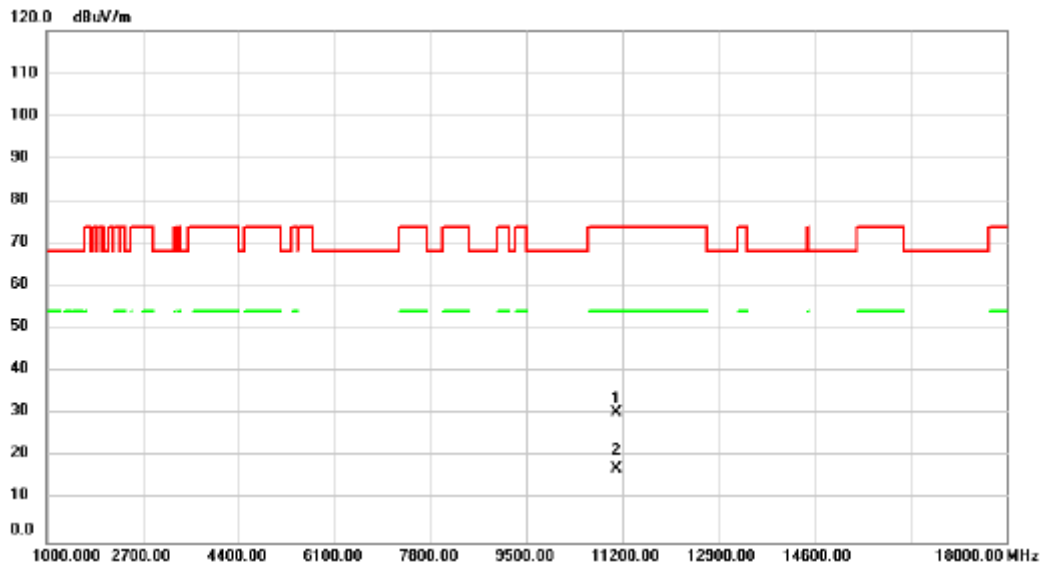


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.00	30.43	-0.04	30.39	74.00	-43.61	peak	
2	*	11100.00	17.42	-0.04	17.38	54.00	-36.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

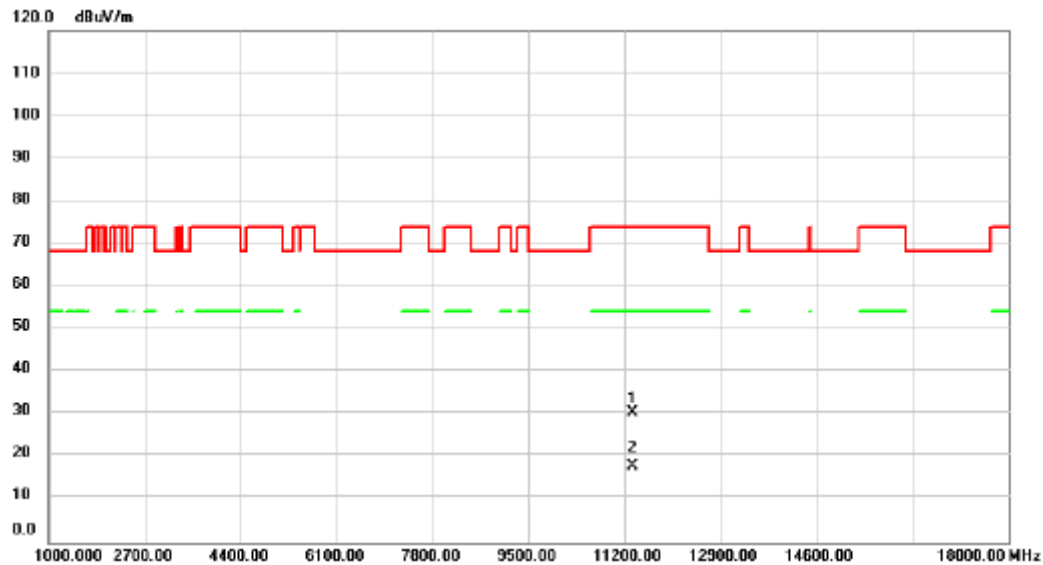


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	29.97	0.49	30.46	74.00	-43.54	peak	
2	*	11340.00	17.51	0.49	18.00	54.00	-36.00	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5670MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

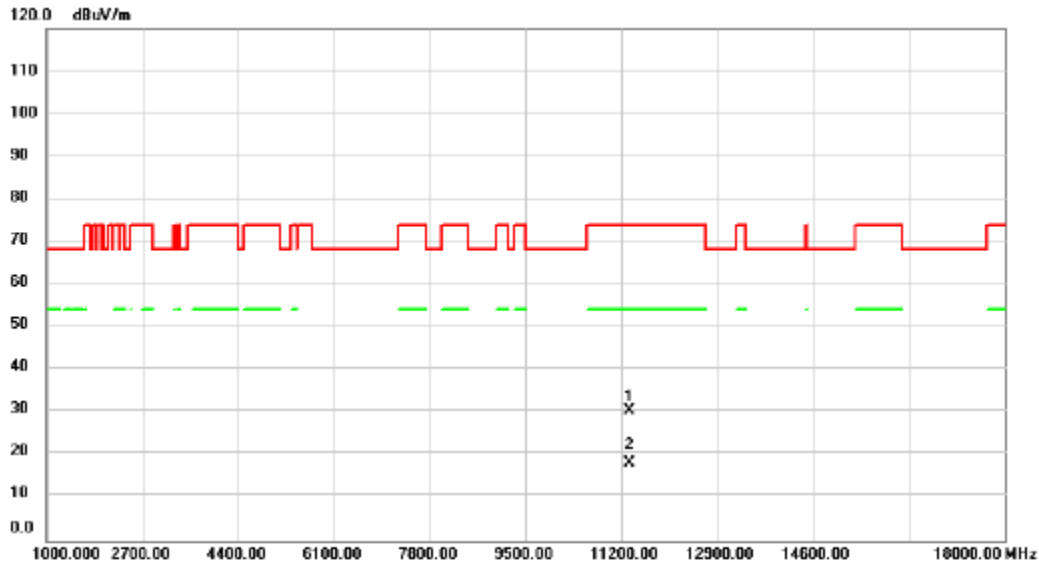


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	29.88	0.49	30.37	74.00	-43.63	peak	
2	*	11340.00	17.64	0.49	18.13	54.00	-35.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

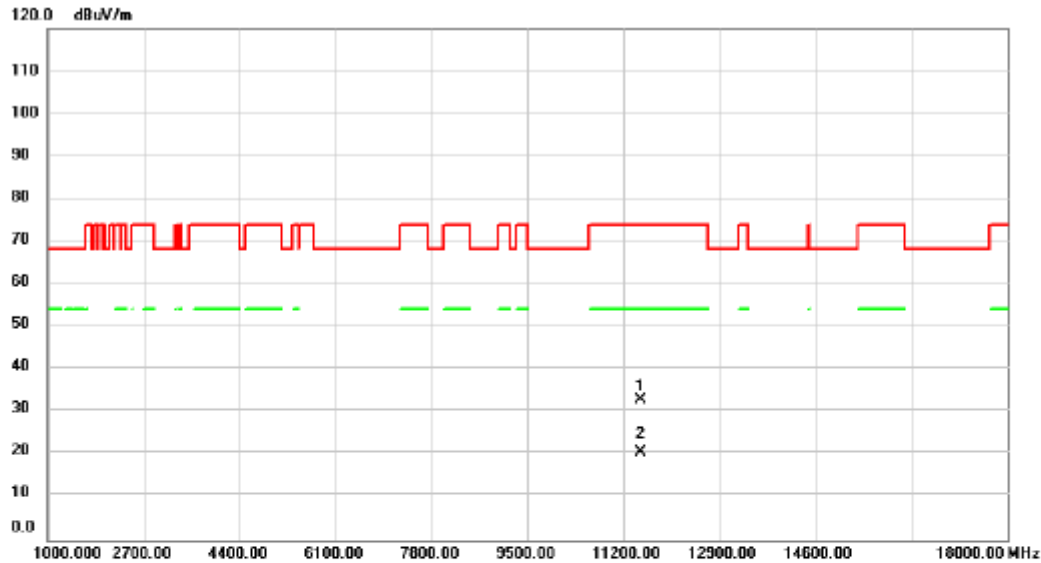


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	32.17	0.83	33.00	74.00	-41.00	peak	
2	*	11510.00	19.83	0.83	20.66	54.00	-33.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5755MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

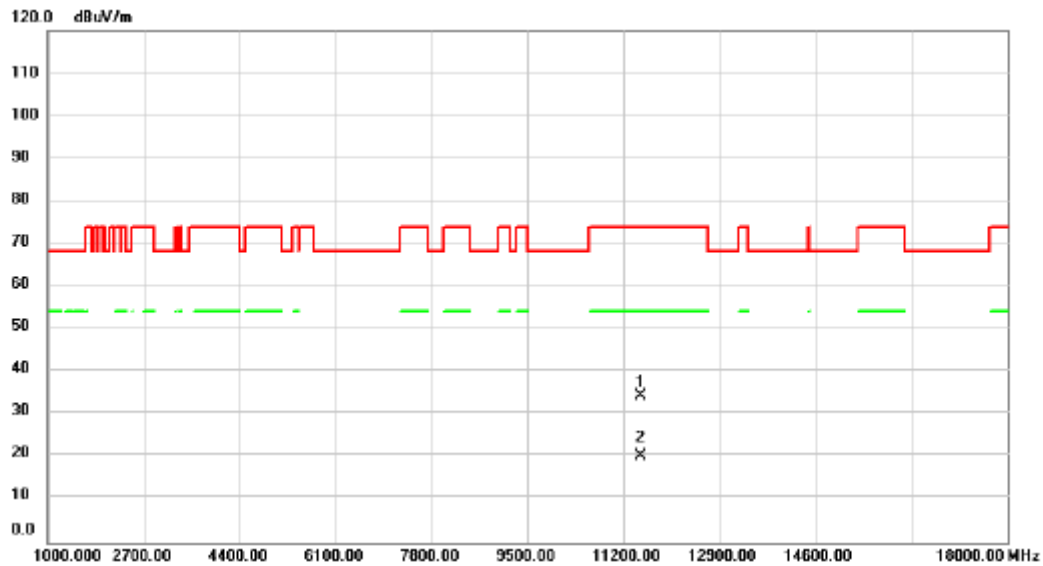


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	33.42	0.83	34.25	74.00	-39.75	peak	
2	*	11510.00	19.55	0.83	20.38	54.00	-33.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

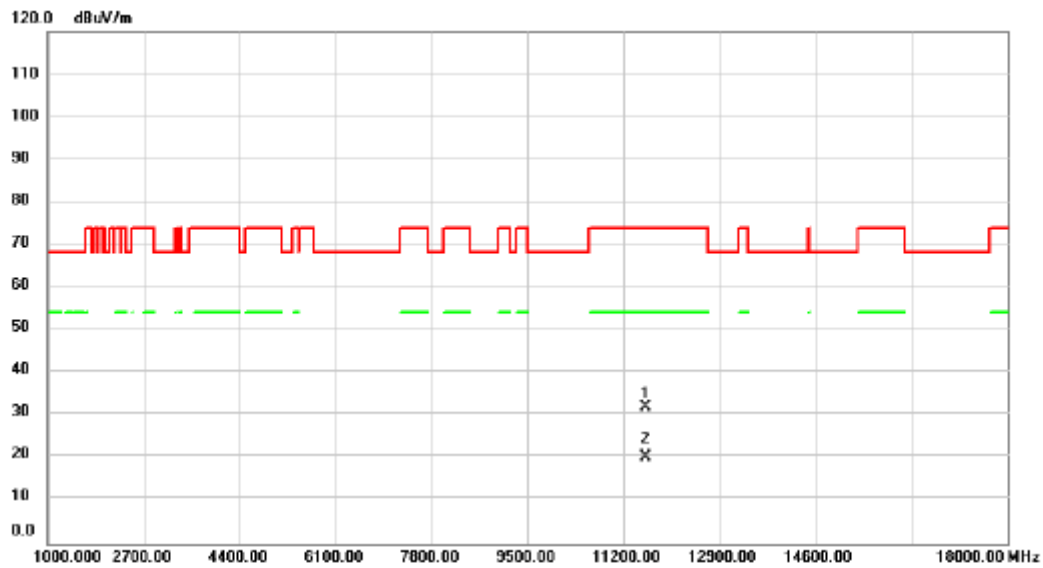


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.00	31.10	0.84	31.94	74.00	-42.06	peak	
2 *	11590.00	19.27	0.84	20.11	54.00	-33.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE40)	Test Date	2024/11/22
Test Frequency	5795MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

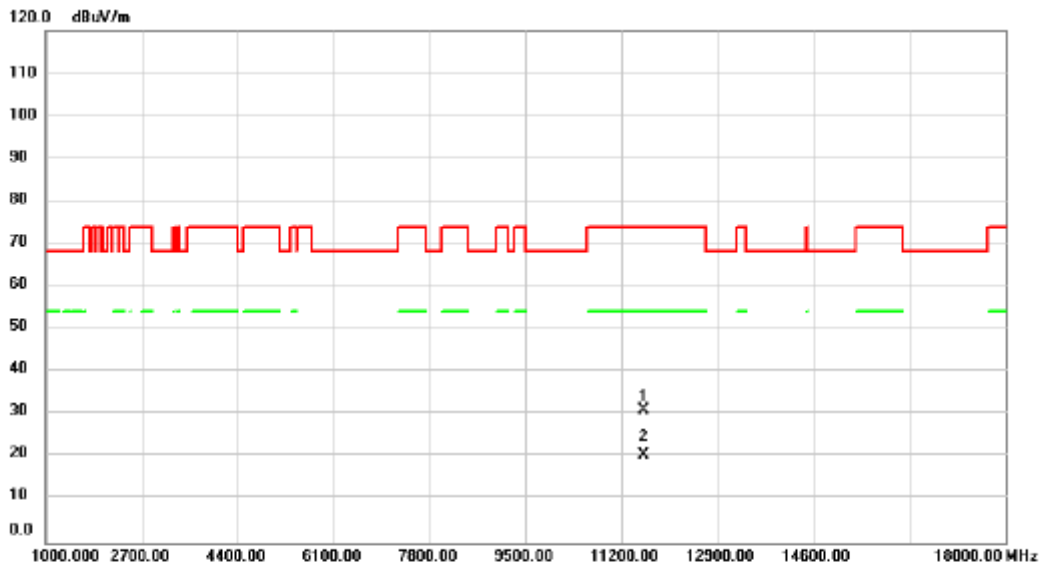


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	30.35	0.84	31.19	74.00	-42.81	peak	
2	*	11590.00	19.64	0.84	20.48	54.00	-33.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

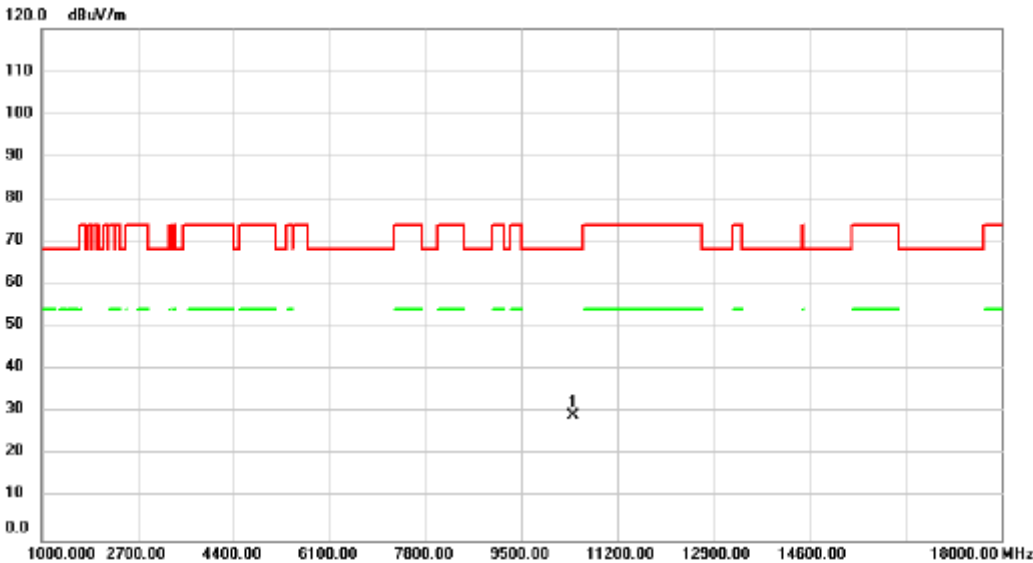

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	29.81	-0.54	29.27	68.20	-38.93	peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

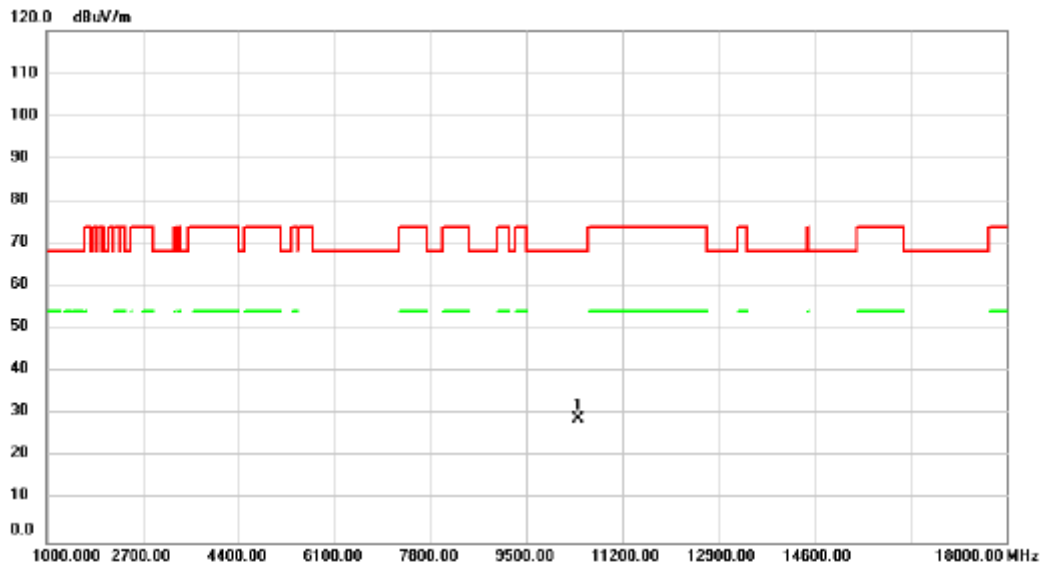


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	29.46	-0.54	28.92	68.20	-39.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

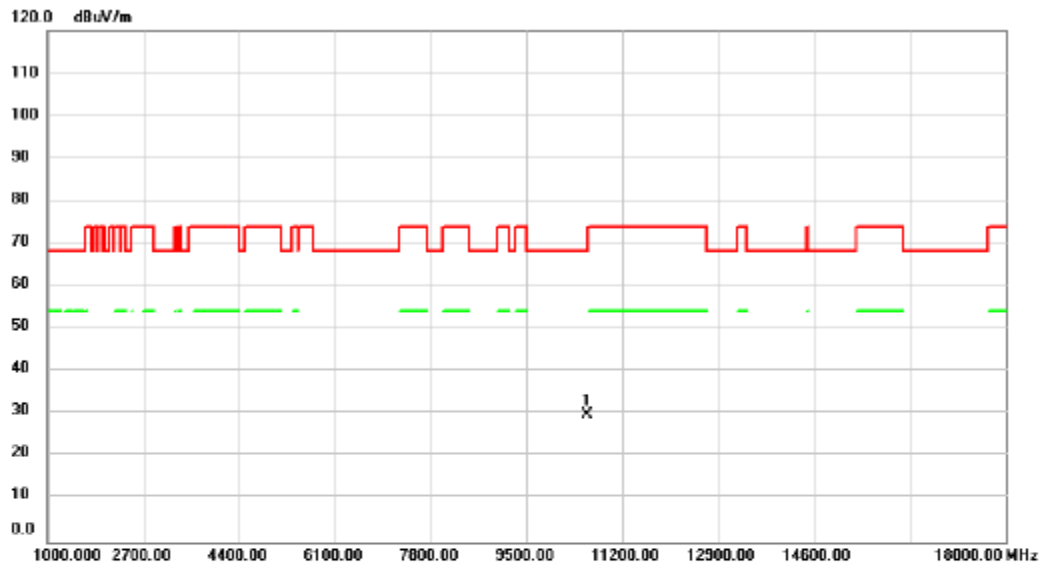


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10580.00	30.18	-0.42	29.76	68.20	-38.44	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5290MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

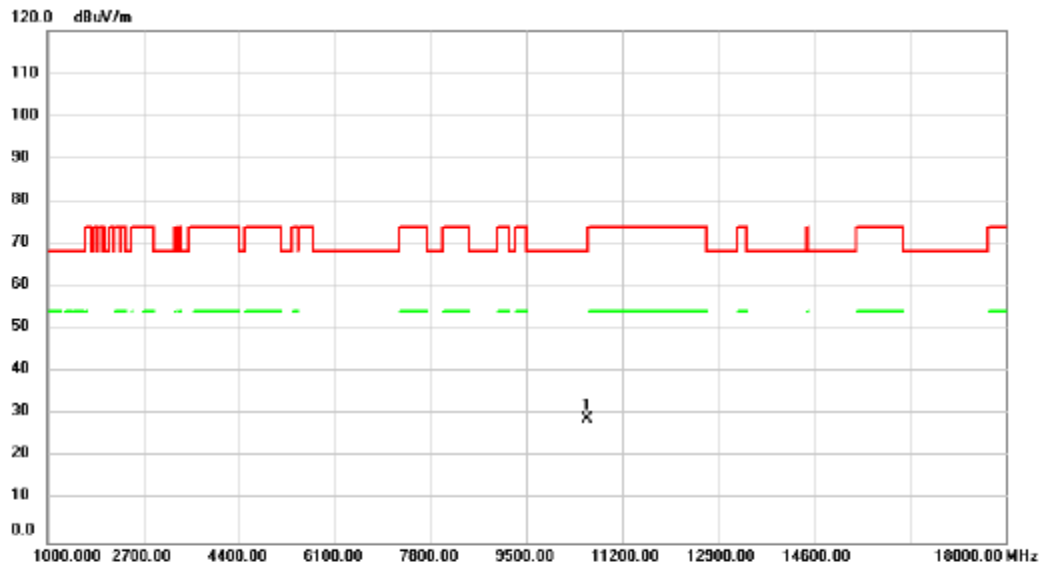


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	29.44	-0.42	29.02	68.20	-39.18	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

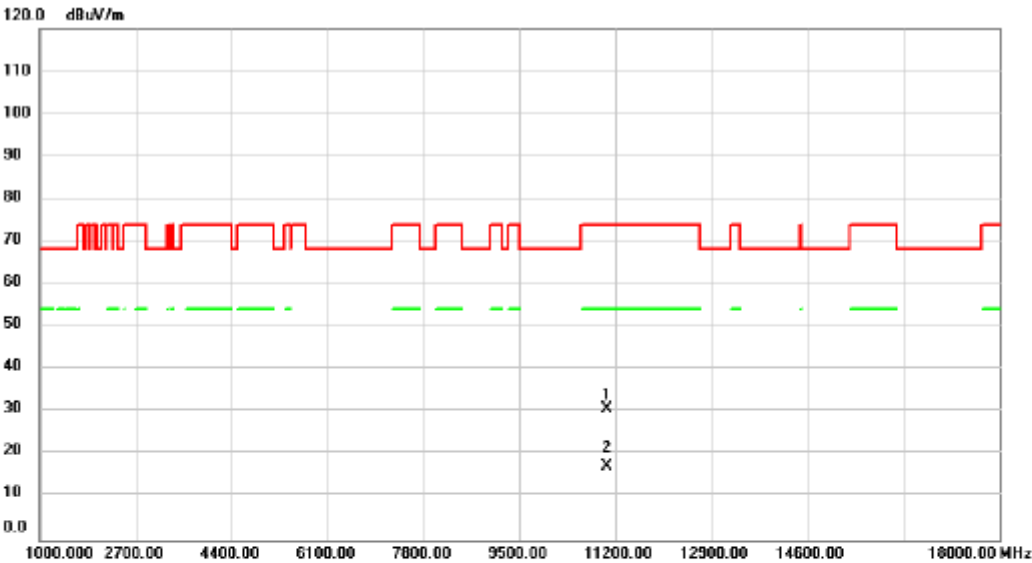


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11060.00	30.94	-0.13	30.81	74.00	-43.19	peak	
2	*	11060.00	17.46	-0.13	17.33	54.00	-36.67	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5530MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

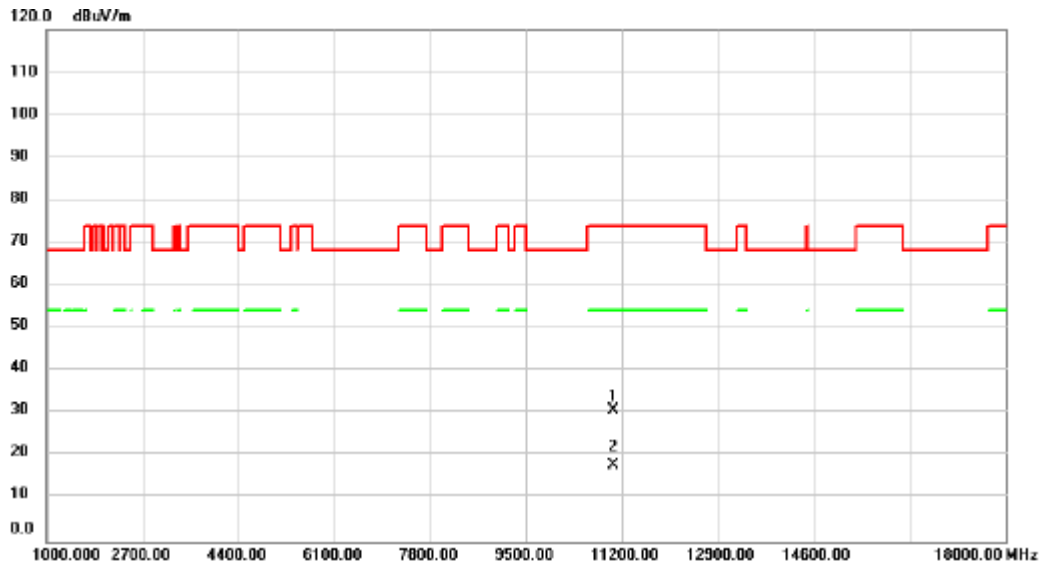


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11060.00	30.92	-0.13	30.79	74.00	-43.21	peak	
2 *	11060.00	17.92	-0.13	17.79	54.00	-36.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

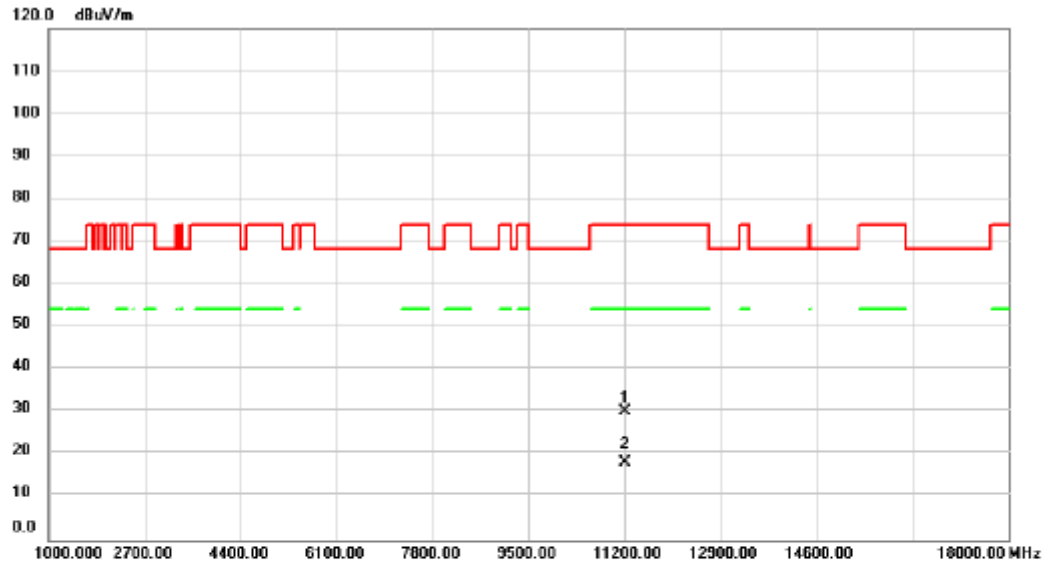


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	30.01	0.22	30.23	74.00	-43.77	peak	
2	*	11220.00	17.96	0.22	18.18	54.00	-35.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5610MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

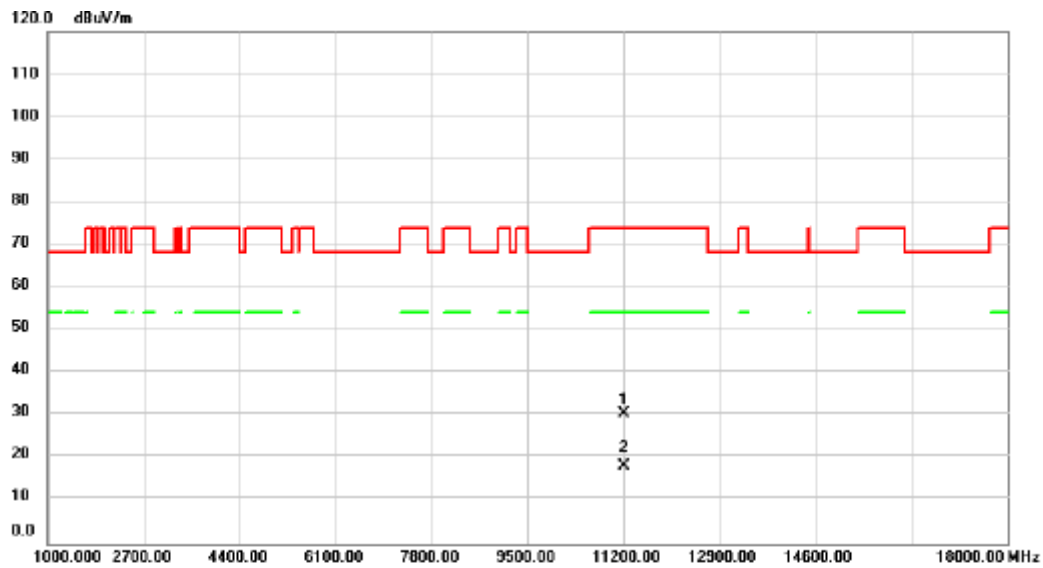


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	30.22	0.22	30.44	74.00	-43.56	peak	
2	*	11220.00	17.90	0.22	18.12	54.00	-35.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

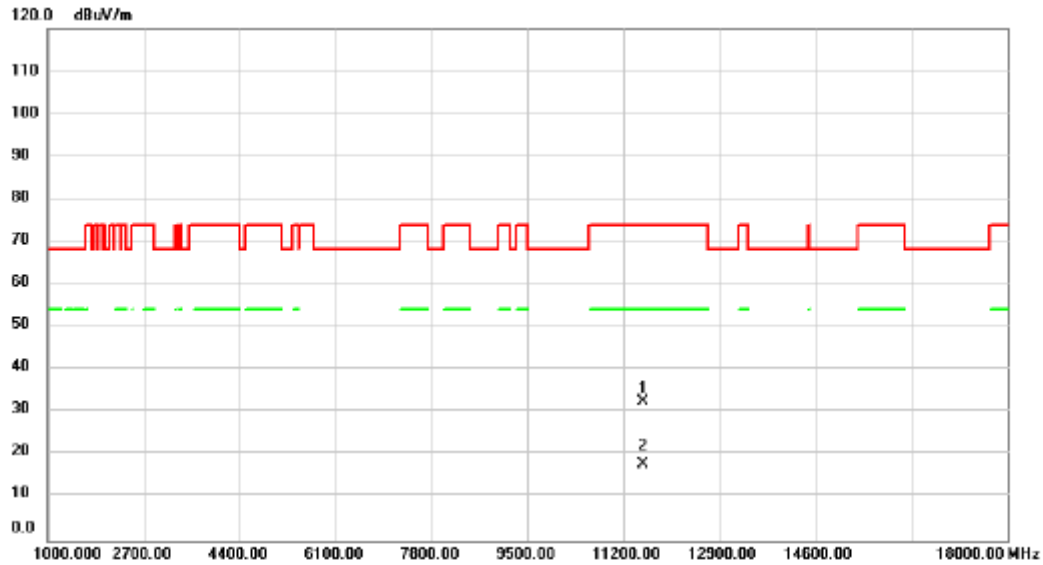


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	31.84	0.84	32.68	74.00	-41.32	peak	
2	*	11550.00	17.09	0.84	17.93	54.00	-36.07	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE80)	Test Date	2024/11/22
Test Frequency	5775MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

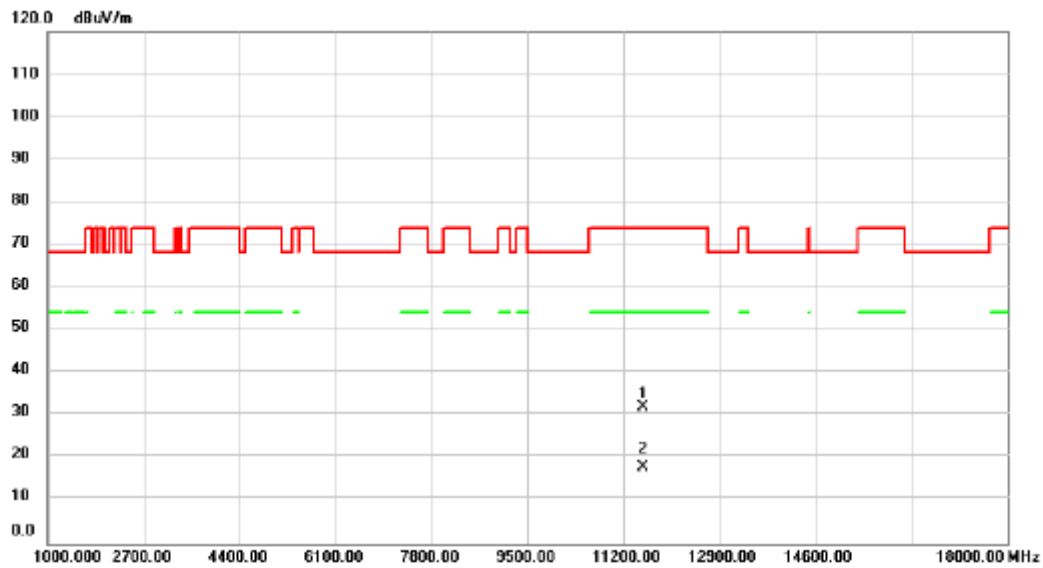


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.00	31.18	0.84	32.02	74.00	-41.98	peak	
2 *	11550.00	17.11	0.84	17.95	54.00	-36.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/11/22
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

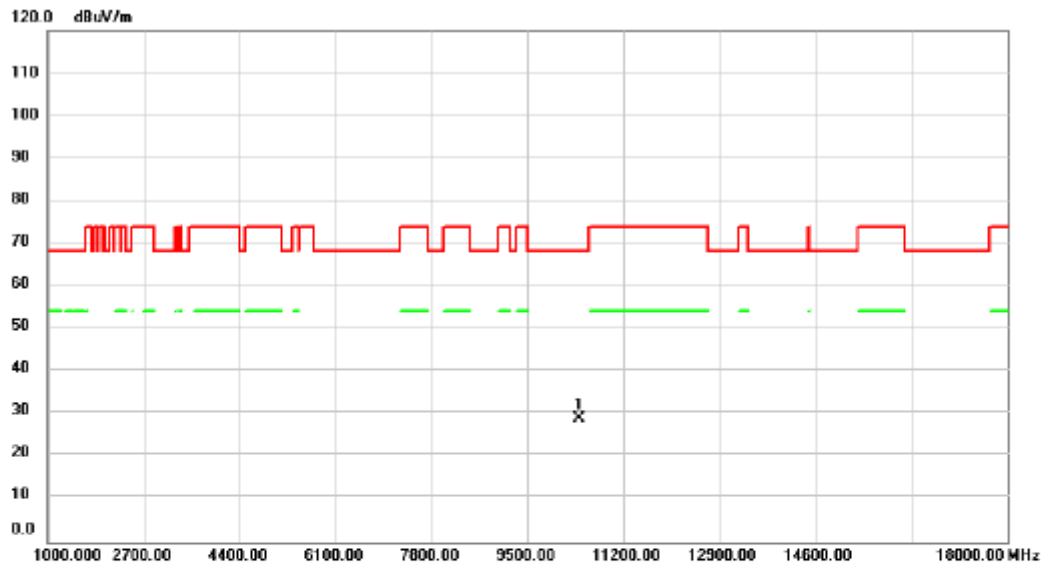


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	29.35	-0.54	28.81	68.20	-39.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/11/22
Test Frequency	5210MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

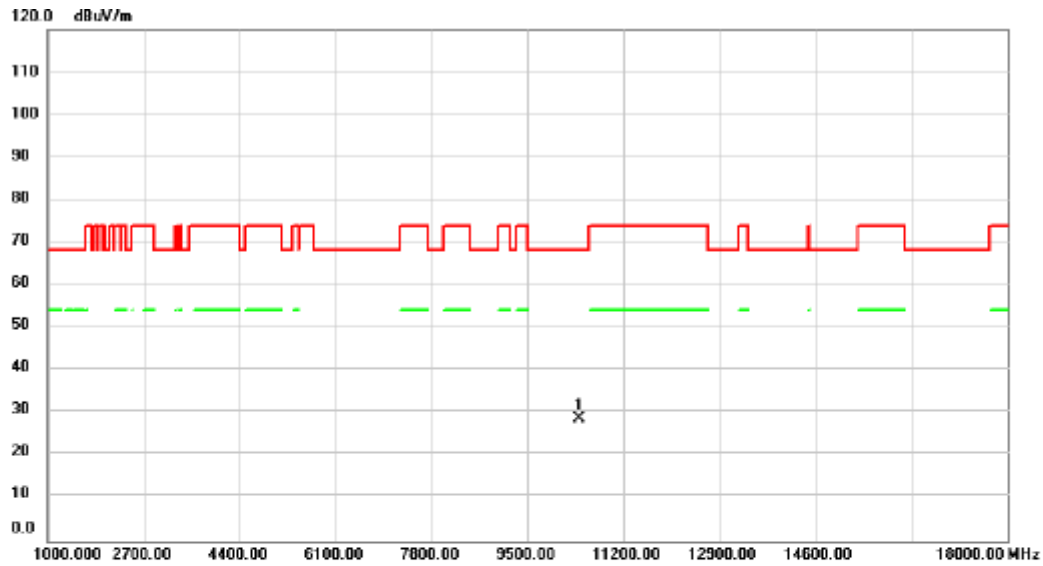


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10420.00	29.29	-0.54	28.75	68.20	-39.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/11/22
Test Frequency	5570MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

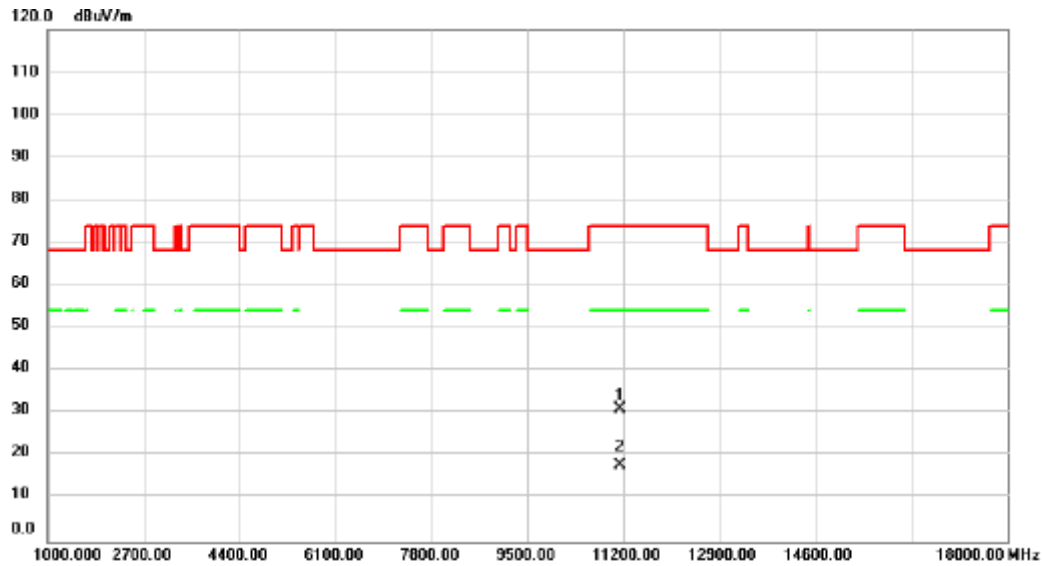


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.00	30.94	0.03	30.97	74.00	-43.03	peak	
2	*	11140.00	17.76	0.03	17.79	54.00	-36.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE160)	Test Date	2024/11/22
Test Frequency	5570MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

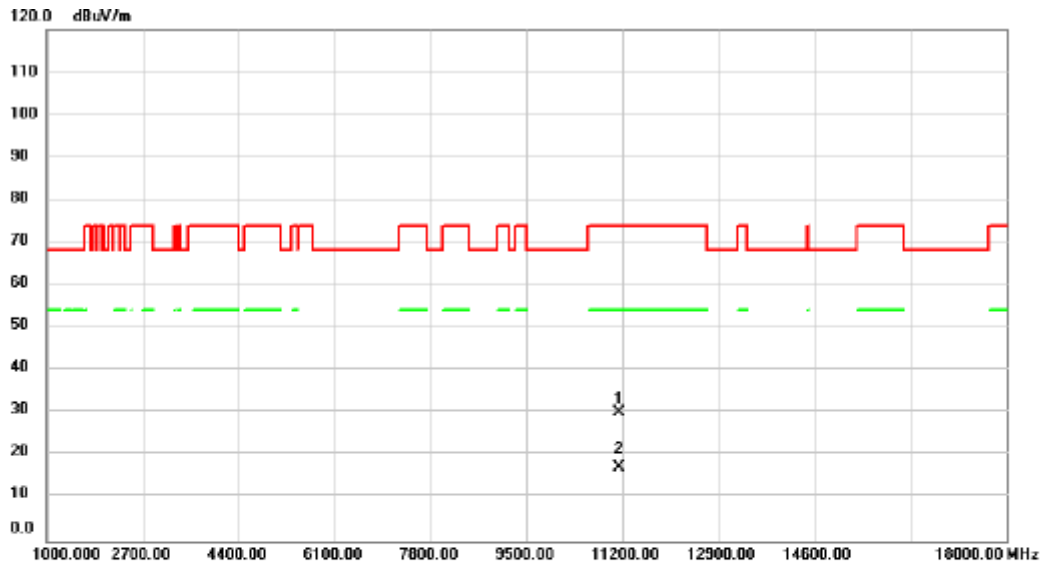


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.00	30.24	0.03	30.27	74.00	-43.73	peak	
2	*	11140.00	17.31	0.03	17.34	54.00	-36.66	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

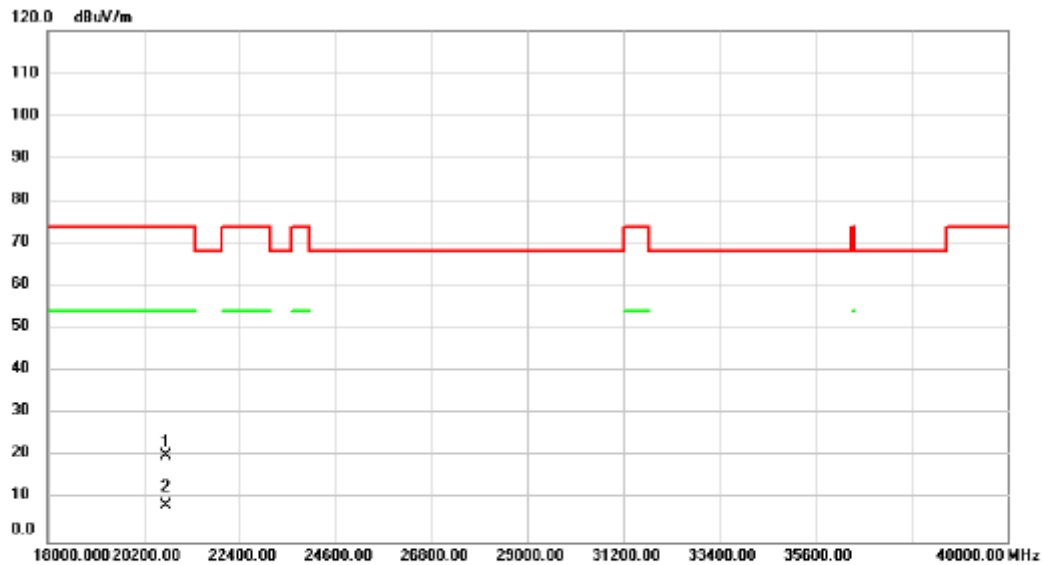


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		20720.00	30.10	-9.85	20.25	74.00	-53.75	peak	
2	*	20720.00	18.37	-9.85	8.52	54.00	-45.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

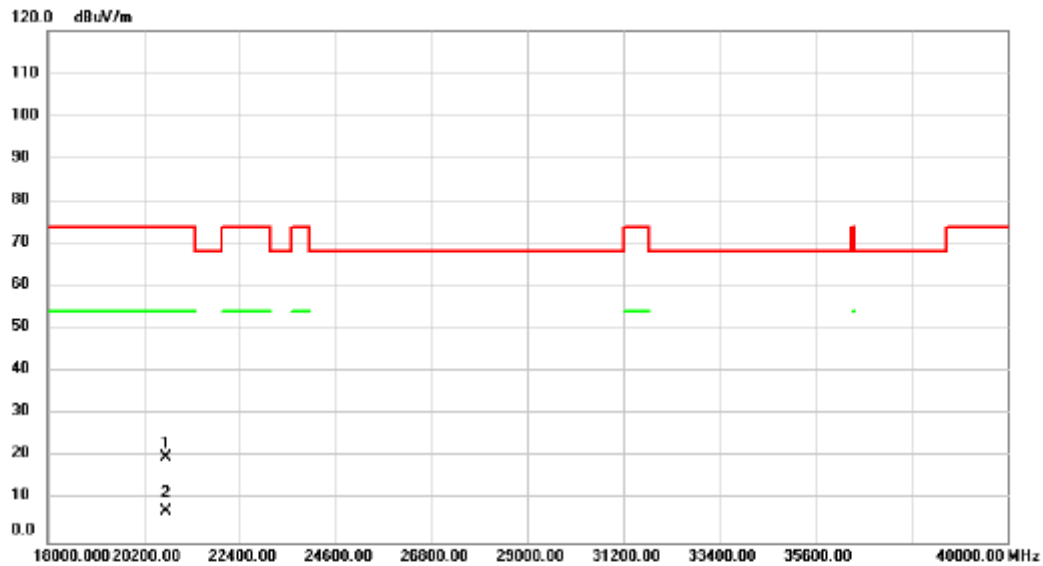


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		20720.00	29.92	-9.85	20.07	74.00	-53.93	peak	
2	*	20720.00	17.27	-9.85	7.42	54.00	-46.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/20
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

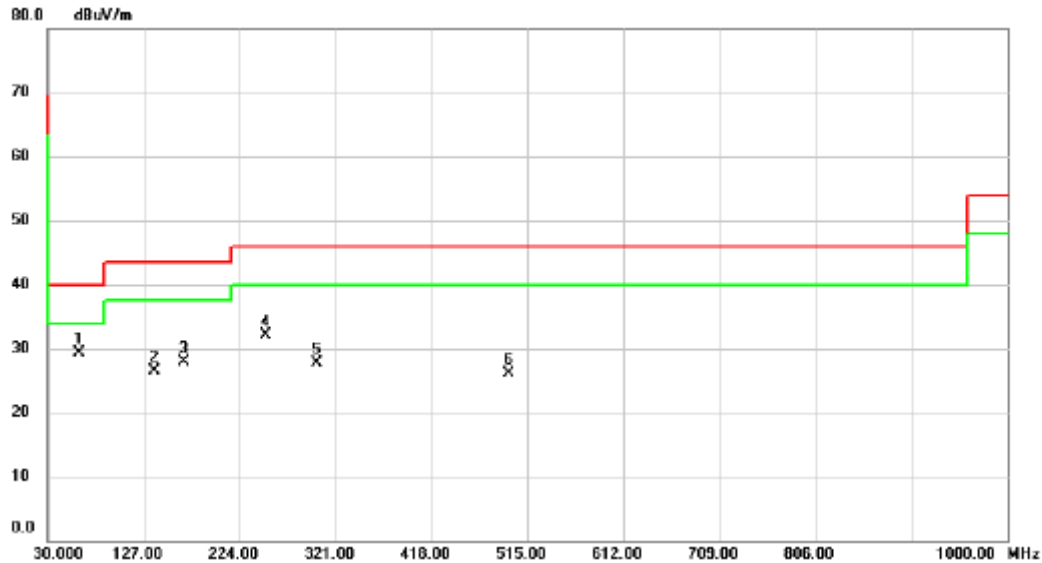


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	62.0100	41.52	-12.19	29.33	40.00	-10.67	peak	
2		138.6400	38.69	-12.11	26.58	43.50	-16.92	peak	
3		167.7400	39.50	-11.62	27.88	43.50	-15.62	peak	
4		250.1900	44.10	-11.99	32.11	46.00	-13.89	peak	
5		302.5700	37.80	-10.18	27.62	46.00	-18.38	peak	
6		496.5700	31.45	-5.29	26.16	46.00	-19.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/20
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

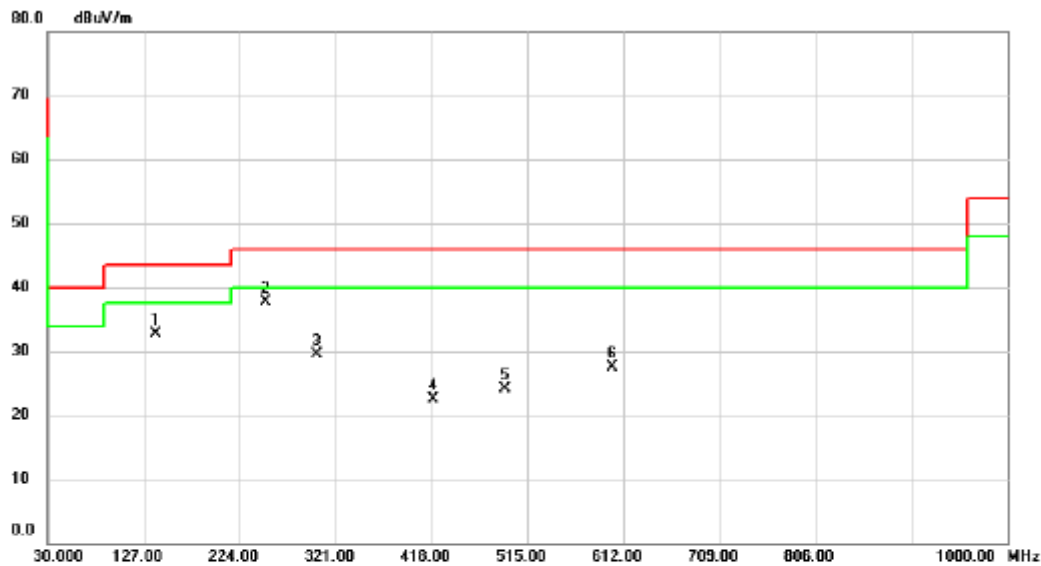


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		139.6100	44.75	-12.01	32.74	43.50	-10.76	peak	
2	*	250.1900	49.72	-11.99	37.73	46.00	-8.27	peak	
3		301.6000	39.65	-10.21	29.44	46.00	-16.56	peak	
4		419.9400	29.32	-6.89	22.43	46.00	-23.57	peak	
5		492.6900	29.53	-5.35	24.18	46.00	-21.82	peak	
6		601.3300	29.99	-2.56	27.43	46.00	-18.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

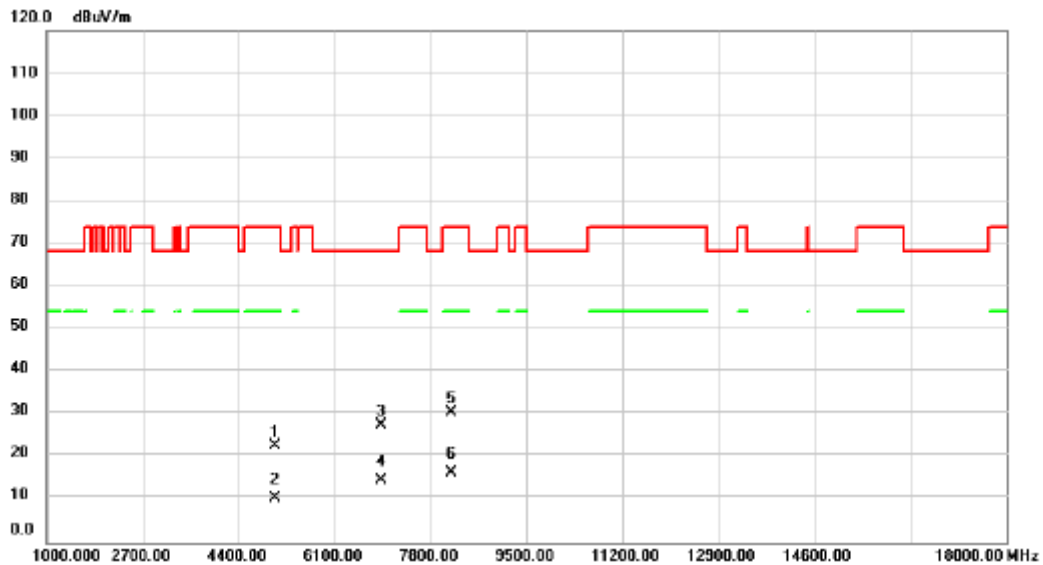


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5046.000	30.70	-8.11	22.59	74.00	-51.41	peak	
2		5046.000	18.58	-8.11	10.47	54.00	-43.53	AVG	
3		6933.000	31.56	-4.18	27.38	68.20	-40.82	peak	
4		6933.000	18.74	-4.18	14.56	68.20	-53.64	AVG	
5		8174.000	33.01	-2.60	30.41	74.00	-43.59	peak	
6	*	8174.000	19.08	-2.60	16.48	54.00	-37.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

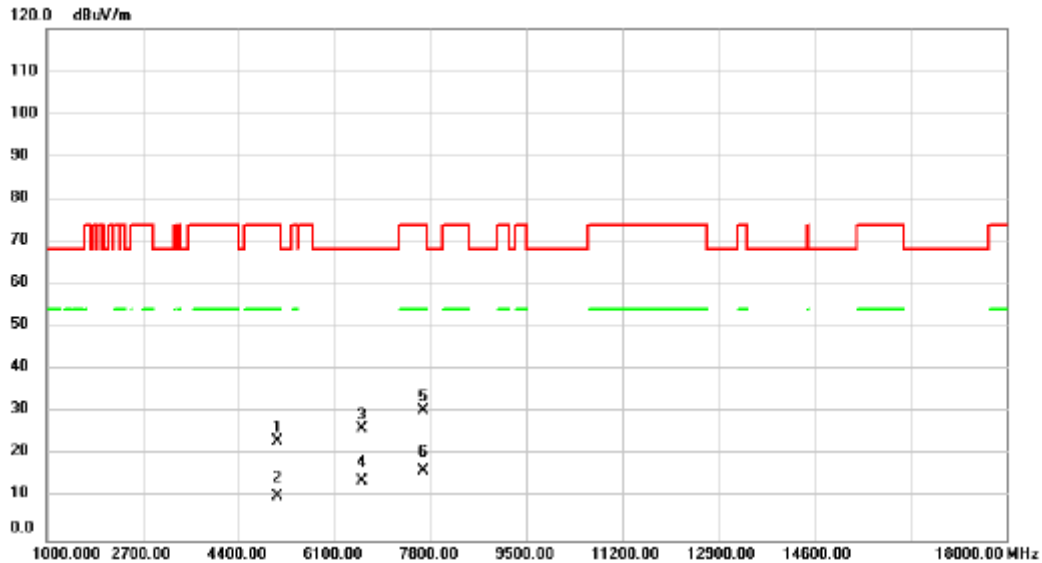


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5097.000	31.38	-8.09	23.29	74.00	-50.71	peak	
2		5097.000	18.48	-8.09	10.39	54.00	-43.61	AVG	
3		6593.000	30.79	-4.60	26.19	68.20	-42.01	peak	
4		6593.000	18.50	-4.60	13.90	68.20	-54.30	AVG	
5		7664.000	33.37	-3.02	30.35	74.00	-43.65	peak	
6	*	7664.000	19.40	-3.02	16.38	54.00	-37.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

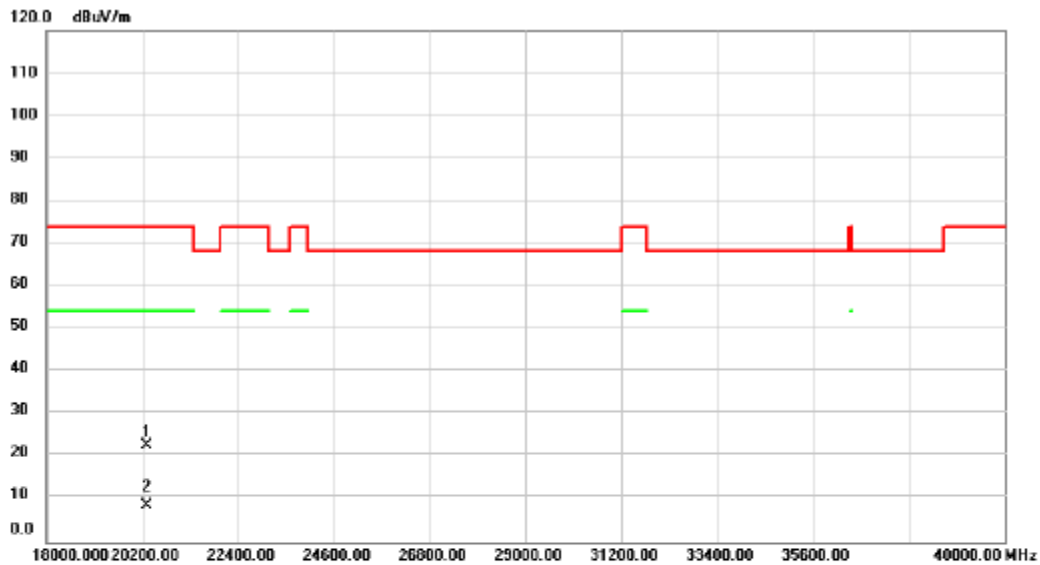


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		20288.00	32.85	-10.09	22.76	74.00	-51.24	peak	
2	*	20288.00	18.63	-10.09	8.54	54.00	-45.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2024/11/22
Test Frequency	5745MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

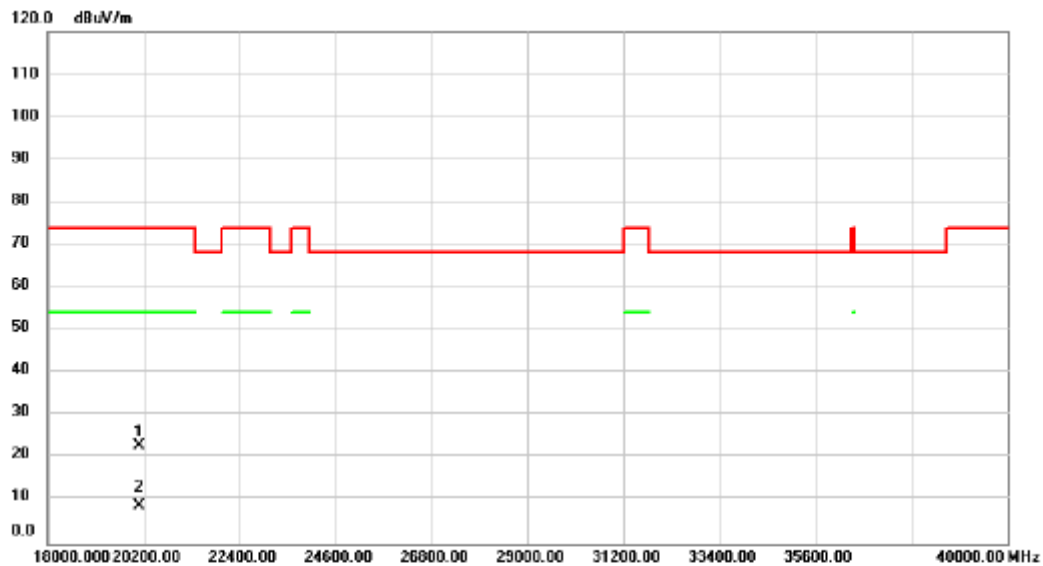

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		20090.00	32.81	-9.98	22.83	74.00	-51.17	peak	
2	*	20090.00	18.97	-9.98	8.99	54.00	-45.01	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D BANDWIDTH


Test Mode	UNII-1_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	31.500	17.200
40	5200	30.699	17.500
48	5240	26.599	17.200

CH36

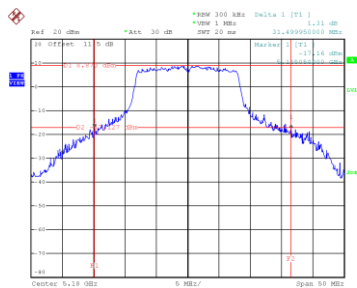


Date: 20.NOV.2024 21:51:59

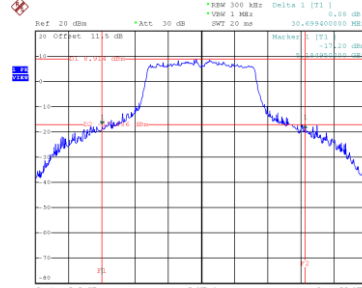CH40
26 dB Bandwidth



Date: 20.NOV.2024 21:53:12

CH48

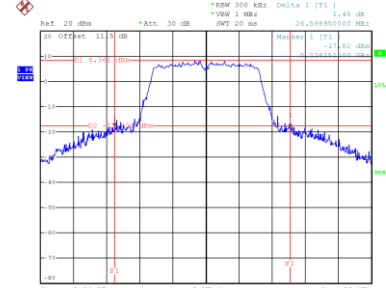


Date: 20.NOV.2024 21:54:37


99 % Occupied Bandwidth



Date: 20.NOV.2024 21:51:38



Date: 20.NOV.2024 21:52:45




Date: 20.NOV.2024 21:54:05


Test Mode	UNII-1_TX AC(VHT20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	32.200	18.300
40	5200	32.450	18.500
48	5240	26.390	18.200

CH36




Date: 20.NOV.2024 23:07:15

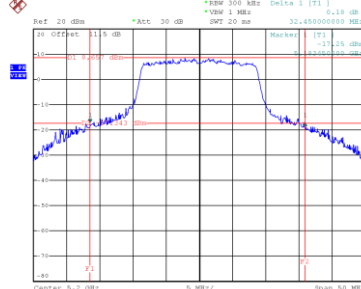CH40
26 dB Bandwidth



Date: 20.NOV.2024 23:09:27

CH48




Date: 20.NOV.2024 23:10:59


99 % Occupied Bandwidth



Date: 20.NOV.2024 23:06:55

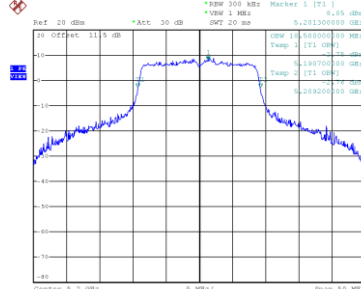

Date: 20.NOV.2024 23:09:06





Date: 20.NOV.2024 23:10:30



Test Mode	UNII-1_TX AC(VHT40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	51.997	37.600
46	5230	40.607	37.400

CH38

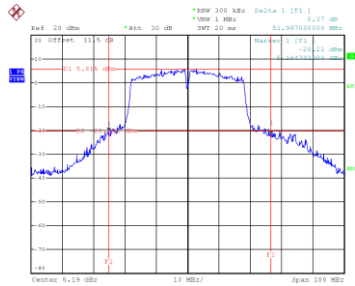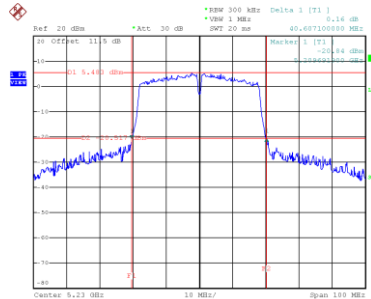
CH46
26 dB Bandwidth


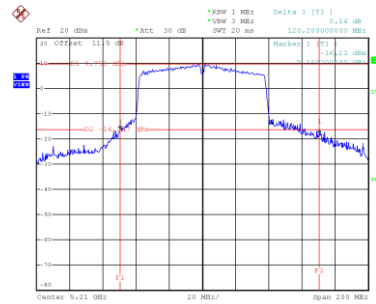
99 % Occupied Bandwidth

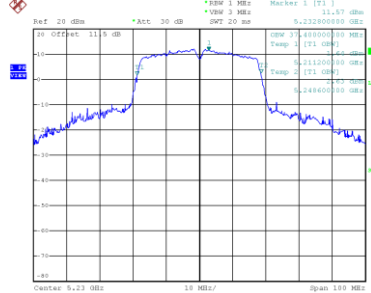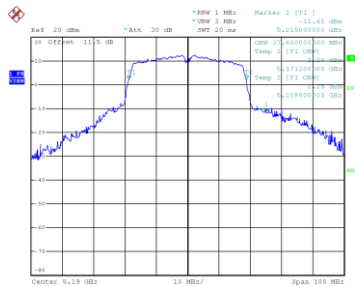

Test Mode	UNII-1_TX AC(VHT80) Mode_Ant. 1
-----------	---------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	120.200	76.400

CH42 26 dB Bandwidth



Date: 21.NOV.2024 00:00:49

99 % Occupied Bandwidth

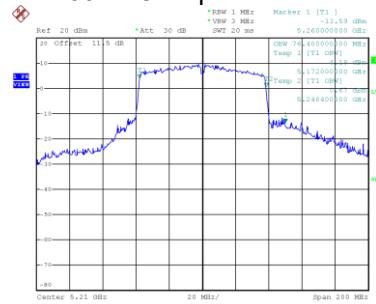


Date: 21.NOV.2024 00:00:13


Test Mode	UNII-1_TX AX(HE20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	25.690	19.300
40	5200	28.890	19.400
48	5240	28.150	19.000

CH36




Date: 21.NOV.2024 17:01:16

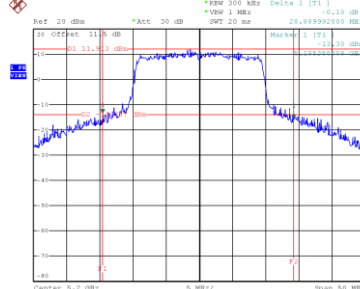CH40
26 dB Bandwidth



Date: 21.NOV.2024 17:02:48

CH48




Date: 21.NOV.2024 17:04:38


99 % Occupied Bandwidth



Date: 21.NOV.2024 17:00:43

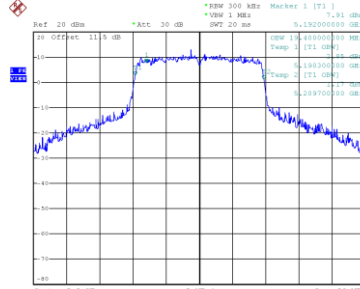

Date: 21.NOV.2024 17:02:23




Date: 21.NOV.2024 17:04:17


Test Mode	UNII-1_TX AX(HE40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	40.808	38.400
46	5230	46.999	38.200

CH38

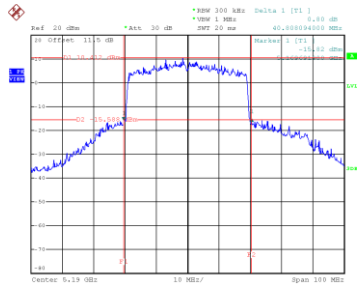


Date: 21.NOV.2024 17:13:16

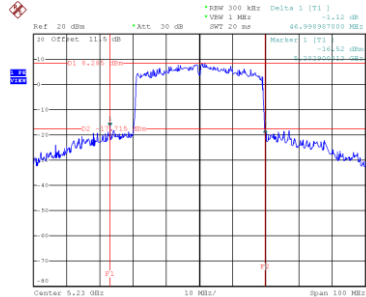
CH46
26 dB Bandwidth


Date: 21.NOV.2024 17:13:12

99 % Occupied Bandwidth



Date: 21.NOV.2024 17:12:16

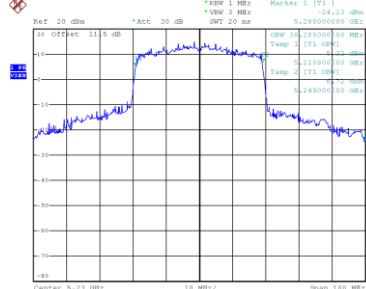


Date: 21.NOV.2024 17:13:13

Test Mode	UNII-1_TX AX(HE80) Mode_Ant. 1
-----------	--------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	93.400	77.600

CH42 26 dB Bandwidth

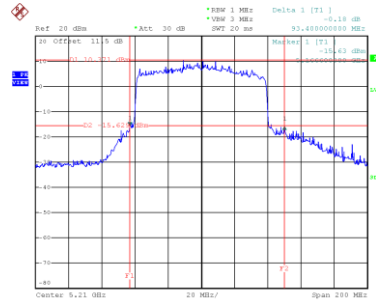

Date: 21.NOV.2024 18:07:17

99 % Occupied Bandwidth

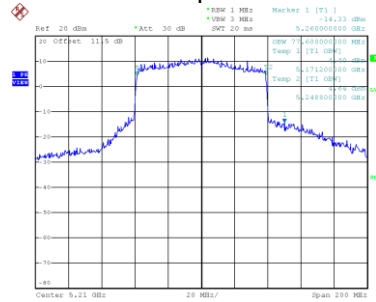


Date: 21.NOV.2024 17:48:36


Test Mode	UNII-2A_TX A Mode_Ant. 1
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	21.750	16.800
60	5300	30.950	17.400
64	5320	28.189	17.300

CH52




Date: 20.NOV.2024 21:56:02

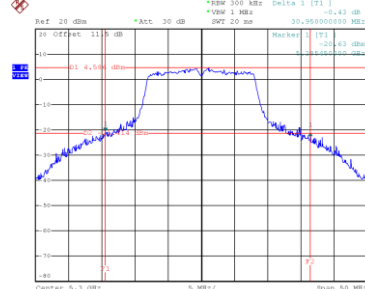CH60
26 dB Bandwidth



Date: 20.NOV.2024 21:57:14

CH64




Date: 20.NOV.2024 21:58:32


99 % Occupied Bandwidth



Date: 20.NOV.2024 21:56:37

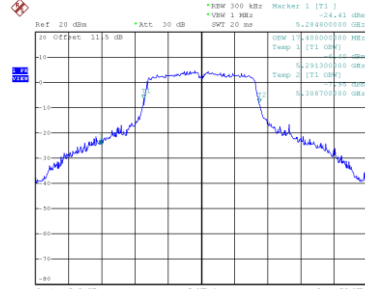

Date: 20.NOV.2024 21:56:52




Date: 20.NOV.2024 21:58:08


Test Mode	UNII-2A_TX AC(VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	22.550	18.000
60	5300	30.088	18.400
64	5320	30.350	18.400

CH52




Date: 20.NOV.2024 23:12:39

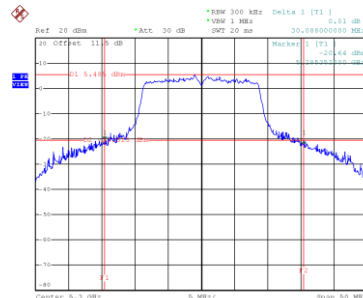CH60
26 dB Bandwidth


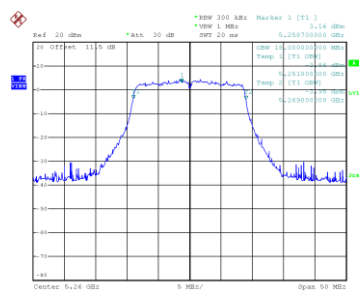
Date: 20.NOV.2024 23:13:56

CH64

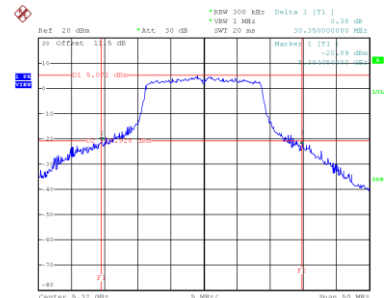


Date: 20.NOV.2024 23:15:33


99 % Occupied Bandwidth



Date: 20.NOV.2024 23:12:13

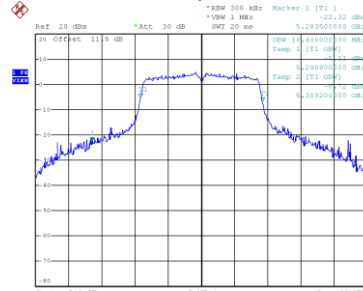

Date: 20.NOV.2024 23:13:35

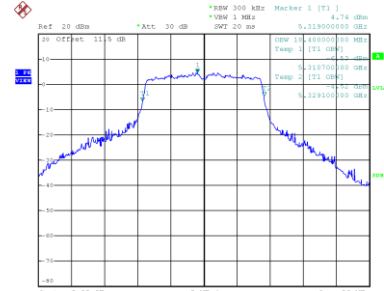


Date: 20.NOV.2024 23:15:12

Test Mode	UNII-2A_TX AC(VHT40) Mode_Ant. 1
-----------	----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	40.599	36.800
62	5310	52.300	37.000

CH54




Date: 20.NOV.2024 23:46:22

CH62
26 dB Bandwidth

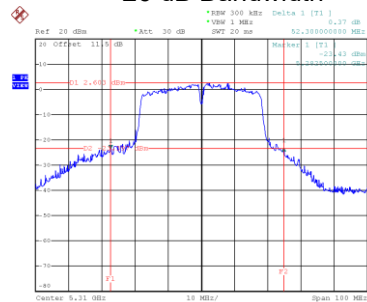


Date: 20.NOV.2024 23:48:37

99 % Occupied Bandwidth



Date: 20.NOV.2024 23:45:46

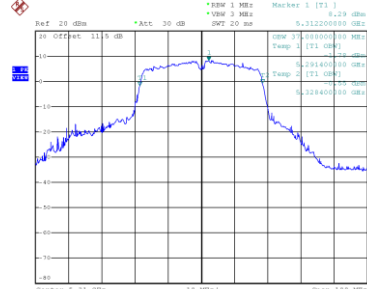


Date: 20.NOV.2024 23:47:55

Test Mode	UNII-2A_TX AC(VHT80) Mode_Ant. 1
-----------	----------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	109.400	76.000

CH58 26 dB Bandwidth

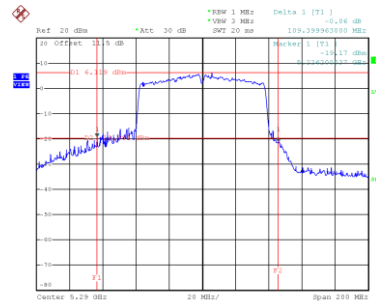

Date: 21.NOV.2024 00:04:13

99 % Occupied Bandwidth

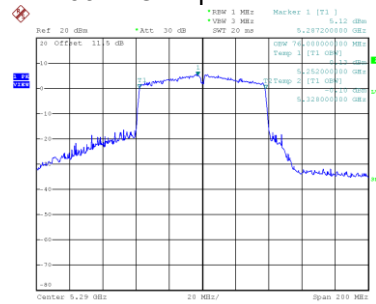


Date: 21.NOV.2024 00:03:26


Test Mode	UNII-2A_TX AX(HE20) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	23.050	19.200
60	5300	31.590	19.300
64	5320	28.790	19.300

CH52




Date: 21.NOV.2024 17:05:54

CH60
26 dB Bandwidth



Date: 21.NOV.2024 17:11:06

CH64




Date: 21.NOV.2024 17:16:29


99 % Occupied Bandwidth



Date: 21.NOV.2024 17:05:29



Date: 21.NOV.2024 17:11:28




Date: 21.NOV.2024 17:16:06


Test Mode	UNII-2A_TX AX(HE40) Mode_Ant. 1
-----------	---------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
54	5270	39.800	38.000
62	5310	48.698	38.200

CH54

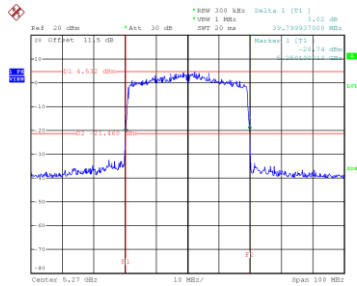


Date: 21.NOV.2024 17:13:00

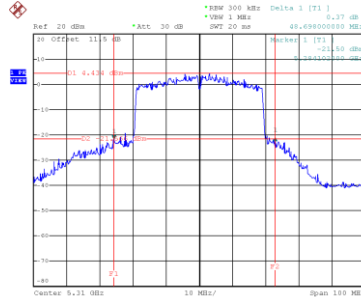
CH62
26 dB Bandwidth


Date: 21.NOV.2024 17:13:26

99 % Occupied Bandwidth

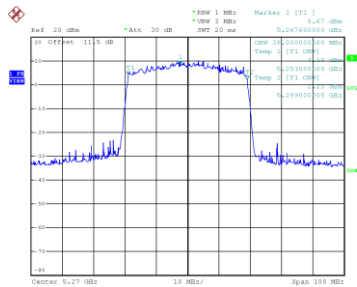

Date: 21.NOV.2024 17:13:24

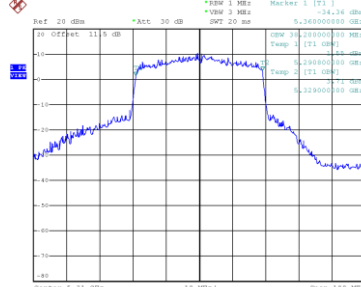


Date: 21.NOV.2024 17:13:54

Test Mode	UNII-2A_TX AX(HE80) Mode_Ant. 1
-----------	---------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
58	5290	93.400	77.600

CH58
26 dB Bandwidth

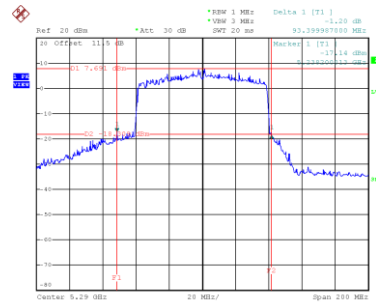

Date: 21.NOV.2024 17:50:43

99 % Occupied Bandwidth

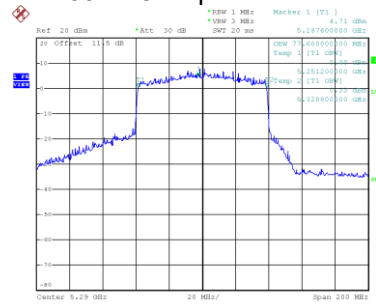


Date: 21.NOV.2024 17:50:10

Test Mode	UNII-1+UNII-2A_TX AC(VHT160) Mode_Ant. 1
-----------	--


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	174.000	155.200

CH50
26 dB Bandwidth

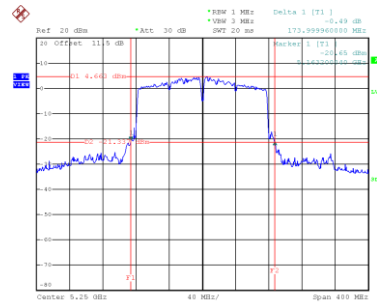

Date: 21.NOV.2024 00:12:38

99 % Occupied Bandwidth

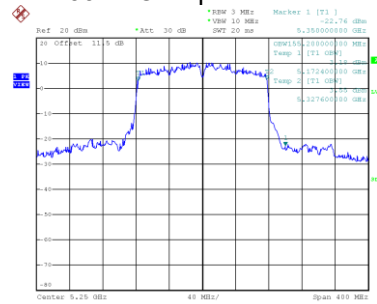


Date: 21.NOV.2024 00:11:55

Test Mode	UNII-1+UNII-2A_TX AX(HE160) Mode_Ant. 1
-----------	---


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
50	5250	162.400	156.800

CH50 26 dB Bandwidth

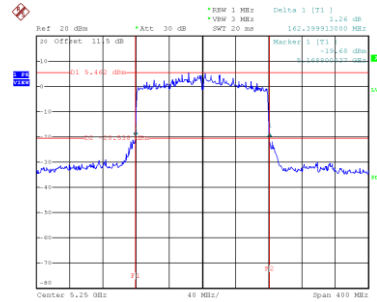

Date: 21.NOV.2024 17:15:142

99 % Occupied Bandwidth

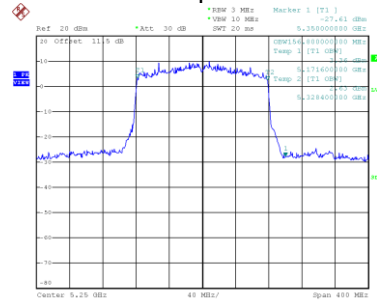


Date: 21.NOV.2024 17:15:159


Test Mode	UNII-2C_TX A Mode_Ant. 1
-----------	--------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
100	5500	28.190	17.300
116	5580	21.608	16.900
140	5700	29.550	17.200

CH100




Date: 20.NOV.2024 22:01:19

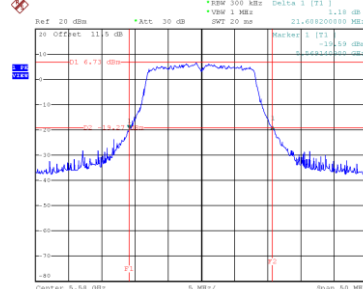CH116
26 dB Bandwidth



Date: 20.NOV.2024 22:02:36

CH140




Date: 20.NOV.2024 22:04:00


99 % Occupied Bandwidth



Date: 20.NOV.2024 22:00:55

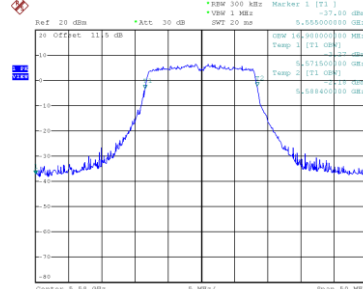

Date: 20.NOV.2024 22:02:10



Date: 20.NOV.2024 22:03:39