ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT UNINTENTIONAL RADIATOR CERTIFICATION TO FCC PART 18 REQUIREMENT

for

CFLs

M/N: GYT2S13/L-27, GYT2S13/L-50

FCC ID: VGZ2S13

Trade Name: Not Applicable

Report No.: SHEE080331259301-07

Issue Date: Oct. 30, 2008

Prepared for

JIANGXI ELEGANT LIGHTING CO LTD No. 713, Xihou St., Guixi, Jiangxi, China TEL: 86-701-377 1030 FAX: 86-701-379 4699

Prepared by

CENTRE TESTING INTERNATIONAL CO., LTD.

1F., BUILDING C, HONGWEI INDUSTRIAL ZONE,
BAOAN 70 DISTRICT, SHENZHEN, CHINA

TEL: 86-755-3368 3365 FAX: 86-755-3368 3365

This report shall not be reproduced, except in full, without the written approval of CENTRE TESTING INTERNATIONAL

Report No.: SHEE080331259301-07 Page 1 of 15

TABLE OF CONTENTS

1. General Information	3
2. Product Information	4
3. Test Methodology	4
4. Test Facility	4
5. Special Accessories	4
6. Equipment Modifications	4
7. Test Condition	5
7.1 Test Configuration	5 5 5
8. Summary of Test Results	6
9. Conducted Emissions Test	7
9.1 Measurement Procedure 9.2 Test Set-up (Block Diagram of Configuration) 9.3 Measurement Equipment Used 9.4 Measurement Results	7 7
10. Radiated Emission Test	10
10.1 Measurement Procedure	10 11
11. Measurement Uncertainty	13
APPENDIX 1 PHOTOGRAPHS OF TEST SETUP	14
APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT	15

1. General Information

Applicant: JIANGXI ELEGANT LIGHTING CO LTD

No. 713, Xihou St., Guixi, Jiangxi, China

Manufacturer: JIANGXI ELEGANT LIGHTING CO LTD

No. 713, Xihou St., Guixi, Jiangxi, China

Trade Name: Not Applicable

Product Name: CFLs

M/N: GYT2S13/L-27, GYT2S13/L-50

Report No.: SHEE080331259301-07

Date of Test: Apr. 01, 2008 to Aug. 31, 2008

We hereby certify that:

The above equipment was tested by Centre Testing International (CTI), The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4 (2003) and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 18.

The test results of this report relate only to the tested sample identified in this report.

Prepared by:

Inspected by:

Approved by:

Jacky Guo General Manager

hristy

Date : Oct. 30, 2008

Report No.: SHEE080331259301-07

Page 3 of 15

2. Product Information

Product name: CFLs

Model name: GYT2S13/L Trade name: Not Applicable

Technical data: T2 Spiral lamp 13W, AC 120V/60Hz

Model difference: The models GYT2S13/L-27 and GYT2S13/L-50 are identical in

schematic, PCB layout and appearance. And the tested model in the

report is GYT2S13/L-27.

Function: Lighting

3. Test Methodology

Both conducted and radiated tests were performed according to the procedures in ANSI C63.4 (2003). Radiated testing was performed at a distance 3 meters from the antenna to EUT.

4. Test Facility

The 3m Semi-Anechoic chamber test site and conducted measurement facility used to collect the radiated data is located on the address:

1F., Building C, Hongwei Industrial Zone 70 District., Baoan, Shenzhen, Guangdong, China.

The Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003 requirements. The test site Registration Number: 614926

5. Special Accessories

Not available for this EUT intended for grant.

6. Equipment Modifications

Not available for this EUT intended for grant.

Report No.: SHEE080331259301-07 Page 4 of 15

7. Test Condition

7.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.

7.2 Test Procedure

Conducted Emissions:

The EUT is a placed on as turn table which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4-2003. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

Radiated Emissions:

The EUT is a placed on as turn table which is 0.8 m above ground plane. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes according to the requirements in Section 13.1.4.1 of ANSI C63.4-2003.

7.3 EUT operation

EUT was tested according to the following operation modes provided by the specifications given by the manufacturer, and reported the worst emissions.

7.4 Peripherals / Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

Type of Peripheral Equipment Used: None

Type of Cables Used: None

Report No.: SHEE080331259301-07 Page 5 of 15

7.5 Limit

Conducted Emission:

According to section 18.307(c) Conducted Emission Limits is as following:

Frequency (MHz)	Maximum RF Line Voltage Q.P.(dBuV)
0.45-2.51	48
2.51-3.0	69.5
3.0-30	48

Radiated Emission:

According to section 18.305(c) Radiated Emission Limits is as following:

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m Q.P.)
30-88	3	40.0
88-216	3	43.5
216-1000	3	46.0

Remark:

- 1. Emission level in dBuV/m=20 log (uV/m)
- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.

8. Summary of Test Results

FCC Rules	Description Of Test	Result
§18.307(c)	Conducted Emission	Compliant
§18.305(c)	Radiated Emission	Compliant


Report No.: SHEE080331259301-07 Page 6 of 15

9. Conducted Emissions Test

9.1 Measurement Procedure

- 1. The EUT was placed on a table which is 0.8m above ground plane, connected to the LISN, and worked normally during the whole test.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. If the EUT emission level was less –6dB to the Q.P. limit in Peak mode, then the emission signal was re-checked using Q.P. detector.
- 4. Repeat above procedures until all frequencies measured were completed.

9.2 Test Set-up (Block Diagram of Configuration)

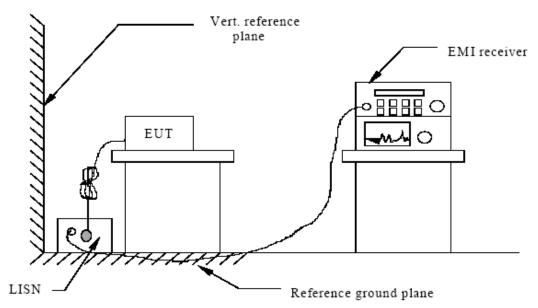

9.3 Measurement Equipment Used

Equipment Type	Manufacturer	Model Number	Serial Number	Last Calibration	Calibration Due
Receiver	R&S	ESCI	100435	01/29/2008	01/28/2009
LISN	ETS	3816	00060336	06/07/2008	06/06/2009

Report No.: SHEE080331259301-07 Page 7 of 15

9.4 Measurement Results

Limit : FCC Part 18 Conduction Power : AC 120V/60Hz

EUT : CFLs Temperature : 24° C M/N : GYT2S13/L-27 Humidity : 53% Mode : Normal Tested by : Lily Yan

(The chart below shows the highest readings taken from the final data)

	FCC Conducted Emission Test Result												
Frequency (MHz)	Rea	ding L (dBuV		Correct Factor		asurem (dBuV)			nits BuV)	Margin		Result (P/F)	Remarks (L/N)
(141112)	Peak	Q.P.	Avg.	(dB)	Peak	Q.P.	Avg.	Q.P.	Avg.	Q.P.	Avg.	(1 /1 /	(L/N)
0.4500	19.50	13.36		21.62	41.12	34.98		48.00		-13.02		Р	L
0.4820	18.08	11.56		21.60	39.68	33.16		48.00		-14.84		Р	L
0.5299	15.94	9.93		21.56	37.50	31.49		48.00		-16.51		Р	L
0.5660	14.01	12.48		21.55	35.56	34.03		48.00		-13.97		Р	L
0.6860	17.80	13.88		21.53	39.33	35.41		48.00		-12.59		Р	L
0.9260	20.65	18.44		21.57	42.22	40.01		48.00		-7.99		Р	L
	-		-				-						-
0.4500	22.64	16.51		21.62	44.26	38.13		48.00		-9.87		Р	N
0.4900	19.30	13.50		21.59	40.89	35.09		48.00		-12.91		Р	N
0.7220	14.73	12.87		21.53	36.26	34.40		48.00		-13.60		Р	N
0.8220	15.33	11.63		21.55	36.88	33.18		48.00		-14.82		Р	N
0.8500	16.67	12.56		21.56	38.23	34.12		48.00		-13.88		Р	N
0.9380	15.82	13.68		21.56	37.38	35.24		48.00		-12.76		Р	N

Freq. = Emission frequency in MHz


Reading level = Uncorrected Analyzer/Receiver reading

Factor = Cable loss + insertion loss
Emission level = Reading level + Factor
Limit = Limit stated in standard
Margin = Reading in reference to limit


Report No.: SHEE080331259301-07 Page 8 of 15

Graph of Conducted Emissions:

L: (normal Mode)

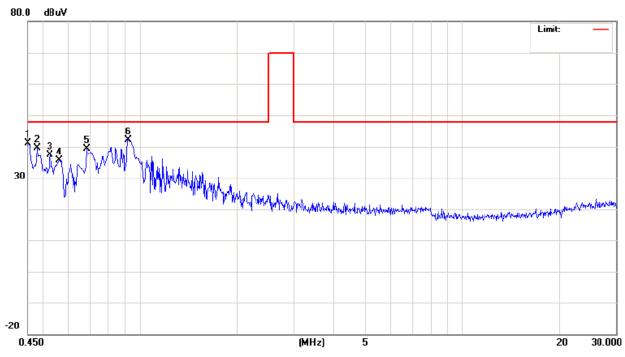

N: (normal Mode)

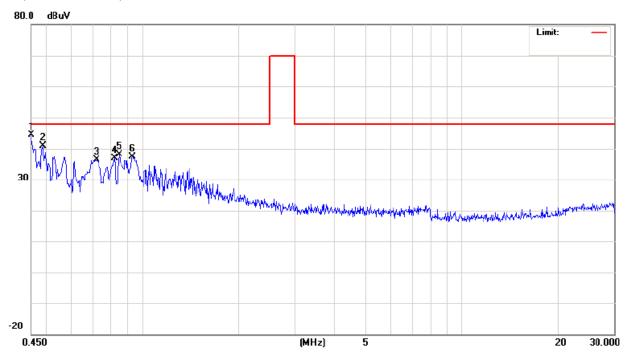

Report No.: SHEE080331259301-07 Page 9 of 15


10. Radiated Emission Test

10.1 Measurement Procedure


- 1. The EUT was placed on a turn table which is 0.8m above ground plane, and worked normally during the whole test.
- 2. Maximum procedure was performed on the twelve highest emissions to ensure EUT compliance.
- 3. If the EUT emission level was less –6dB to the Q.P. limit in Peak mode, then the emission signal was re-checked using Q.P. detector.
- 4. Repeat above procedures until all frequencies measured were completed.

10.2 Test Set-up (Block Diagram of Configuration)

A. Radiated Emission Test Set-Up, Frequency below 1000MHz

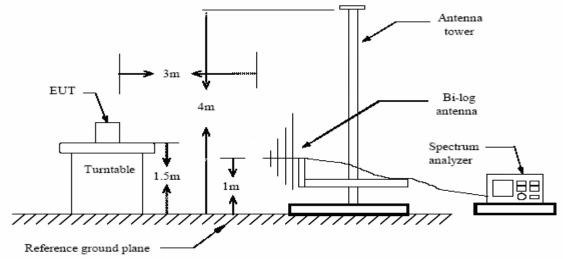

B. Radiated Emission Test Set-Up, Frequency above 1000MHz

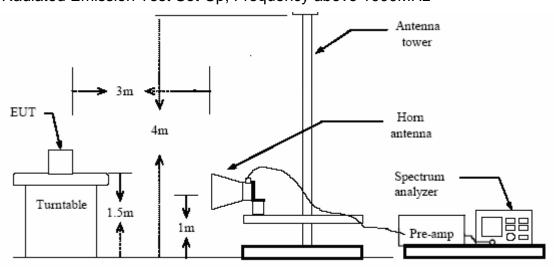

Report No.: SHEE080331259301-07 Page 10 of 15

10.3 Measurement Equipment Used

Equipment Type	Manufacturer	Model Number	Serial Number	Last Calibration	Calibration Due
Spectrum Analyzer	Agilent	E4443A	MY46185649	06/29/2008	06/28/2009
Biconilog Antenna	ETS	3142C	920250	05/30/2008	05/29/2009
ETS Horn Antenna	ETS	3117	57410	05/30/2008	05/29/2009
Multi device Controller	ETS	2090	00057230	06/07/2008	06/06/2009

10.4 Measurement Results

EUT: CFLsTemperature: 26° CM/N: GYT2S13/L-27Humidity: 60%Mode: NormalTested by: Lily Yan

(The chart below shows the highest readings taken from the final data)

FCC Radiated Emission Test Result													
Frequency (MHz)	uency		ading Level (dBuv)			Measurement (dBuV/m) (d		Lin (dBu			Margin (dB)		Remarks (H/V)
(141112)	Peak	Q.P.	Avg.	(dB)	Peak	Q.P.	Avg.	Q.P.	Avg.	Q.P.	Avg.	(P/F)	(11/4)
30.0000	7.48			17.63	25.11			40.00	1	<-10		Р	Н
104.3667	8.94			10.13	19.07			43.50	1	<-10		Р	Н
283.8167	8.23			15.16	23.39			46.00		<-10		Р	Н
408.3000	6.67			18.44	25.11			46.00		<-10		Р	Н
704.1500	9.30			24.72	34.02			46.00	1	<-10		Р	Н
911.0833	9.80			26.77	36.57			46.00	1	<-6		Р	Н
31.6767	9.05			16.67	25.72			40.00		<-10		Р	V
44.5500	13.17			10.51	23.68		-	40.00		<-10		Р	V
76.8833	15.21	-	-	8.64	23.85		-	40.00		<-10		Р	V
104.3667	12.56			10.13	22.69		-	43.50		<-10		Р	V
545.7167	10.05			21.36	31.41			46.00		<-10		Р	V
930.4833	13.04	9.78		26.88	39.92	36.66		46.00		-9.34		Р	V

Freq. = Emission frequency in MHz

Raw Data (dBuV/m) = Uncorrected Analyzer / Receiver reading

Corr. Factor (dB) = Correction factors of antenna factor and cable loss Emiss. Leve = Raw reading converted to dBuV/m and CF added

Limit dBuV/m = Limit stated in standard
Margin dB = Reading in reference to limit


PK = Peak Reading QP = Quasi-peak

Report No.: SHEE080331259301-07 Page 11 of 15

Graph of Radiated Emissions:

H:(Antenna)

Below 1GHz(normal mode)
76.9 dBuV/m

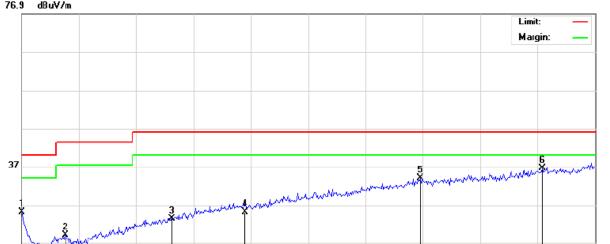

515.00

612.00

709.00

806.00

1000.00 MHz

V:(Antenna)
Below 1GHz(normal Mode)
76.9 dBuV/m

224.00


321.00

418.00

127.00

-3

30.000

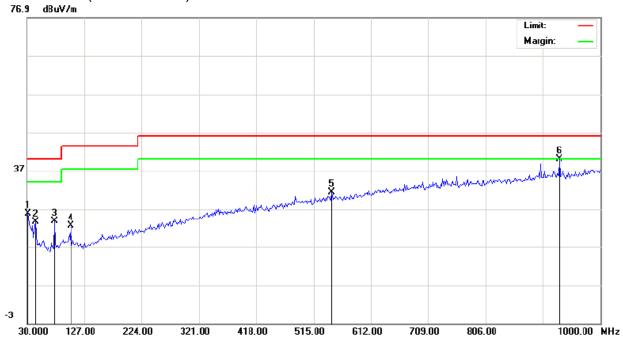

Report No.: SHEE080331259301-07 Page 12 of 15

11. Measurement Uncertainty

Conduction Uncertainty : \pm 2.8dB Radiation Uncertainty : \pm 3.4dB

Report No.: SHEE080331259301-07 Page 13 of 15

APPENDIX 1 PHOTOGRAPHS OF TEST SETUP

CONDUCTED EMISSION TEST



RADIATED EMISSION TEST



Report No.: SHEE080331259301-07 Page 14 of 15

APPENDIX 2 EXTERNAL PHOTOGRAPHS OF EUT



Whole View of EUT (GYT2S13/L) -1



Whole View of EUT (GYT2S13/L) -2 ----End of the report----

Report No.: SHEE080331259301-07 Page 15 of 15