

	ESTECH Co., Ltd. Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea	 	Electromagnetic Interference Test Report
---	---	---	---

Test Report for FCC

FCC ID:VH9-KDC200

Report Number		ESTF150712-012			
Applicant	Company name	AISOLUTION CO., LTD.			
	Address	148-3 Gwangjangdong, Gwangjingu, Seoul, Korea			
	Telephone	82-2-2201-3721			
Product	Product name	Barcode Reader			
	Model No.	KDC200	Manufacturer	AISOLUTION CO., LTD.	
	Serial No.	000045	Country of origin	KOREA	
Test date	2007-12-13	Date of issue	17-Dec-07		
Testing location	ESTECH. Co., Ltd. 97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea				
Standard	FCC PART 15 2007 , ANSI C 63.4 2003				
Test item	■ Conducted Emission	<input type="checkbox"/> Class A	■ Class B	Test result	OK
	■ Radiated Emission	<input type="checkbox"/> Class A	■ Class B	Test result	OK
Measurement facility registration number		94696			
Tested by	Engineer J.H.Kim				
Reviewed by	Engineering Manager J.M.Yang				
Abbreviation	OK, Pass = Passed, Fail = Failed, N/A = not applicable				
<p>* Note</p> <ul style="list-style-type: none"> - This test report is not permitted to copy partly without our permission - This test result is dependent on only equipment to be used - This test result based on a single evaluation of one sample of the above mentioned 					

	ESTECH Co., Ltd. Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea	  	Electromagnetic Interference Test Report
---	---	--	---

Contents

1. Laboratory Information	3
2. Description of EUT	4
3. Test Standards	5
4. Measurement condition	6
5. Measurement of radiated emission	8
5.1 Measurement equipment	8
5.2 Environmental conditions	8
5.3 Test data	9
6. Measurement of conducted emission	10
6.1 Measurement equipment	10
6.2 Environmental conditions	10
6.3 Test data	11
7. Photographs of test setup.....	12
7.1 Setup for Radiated Test : 30 ~ 1000 MHz.....	12
7.2 Setup for Conducted Test : 0.15 ~ 30 MHz.....	13
8. Photographs of EUT.....	14

Appendix 1. Spectral diagram

	ESTECH Co., Ltd. Rm 1015, World Venture Center II, 426-5 Gasan-dong, Gumecheon-gu, Seoul, 158-803, Korea	   	Electromagnetic Interference Test Report
---	--	--	---

1. Laboratory Information

1.1 General

This EUT (Equipment Under Test) has been shown to be capable of compliance with the applicable technical standards and is tested in accordance with the measurement procedures as indicated in this report.

ESTECH Lab attests to accuracy of test data. All measurement reported herein were performed by ESTECH Co., Ltd.

ESTECH Lab assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

1.2 Test Lab.

Corporation Name : ESTECH Co. Ltd

Head Office : Rm 1015, World Venture Center II, 426-5, Gasan-dong, Geumcheon-gu, Seoul, Korea
(Safety & Telecom. Test Lab)

EMC Test Lab : 58-1 Osan-Ri, GaNam-Myon, YeoJoo-Gun, KyungKi-Do, Korea
97-1 Hoiuk-Ri Majang-Myon, Icheon-city, KyungKi-Do, Korea

1.3 Official Qualification(s)

MIC : Granted Accreditation from Ministry of Information & Communication for EMC, Safety and Telecommunication

KOLAS : Accredited Lab By Korea Laboratory Accreditation Schema base on CENELEC requirements

FCC : Filed Laboratory at Federal Communications Commission

VCCI : Granted Accreditation from Voluntary Control Council for Interference from ITE

	ESTECH Co., Ltd. Bm 1015, World Venture Center II, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea	   	Electromagnetic Interference Test Report
---	---	--	---

2. Description of EUT

2.1 Summary of Equipment Under Test

Product name : Barcode Reader
 Model Number : KDC200
 Serial Number : NONE
 Manufacturer : AISOLUTION CO., LTD.
 Country of origin : KOREA
 Rating : Battery :Lithium-Polymer rechargeable(3.7V DC, 170mAh)
 Receipt Date : 21-Nov-07
 X-tail list(s) : 18.43MHz,24MHz

2.2 General descriptions of EUT

Physical Characteristics

Size: 35mm x 62mm x 15mm

Weight: 34g

Electrical Characteristics

Battery: Lithium-Polymer rechargeable (3.7V DC, 170mAh)

Charging: Via USB connector

Typical Operating Current: 130mA@3.3V

Scanning Performance

Scan Rate: 100 scans/sec

Humidity

5% ~ 90% (non condensing)

Scanning Performance

Scan Rate: 100 scans/sec (bi-directional)

Interface

Bluetooth V2.0+EDR, Class2, SPP

USB (Ultra mini USB port)

Serial (Ultra mini USB port)

	ESTECH Co., Ltd. Rm 1015, World Venture Center II, 426-5 Gasan-dong, Gumcheon-gu, Seoul, 158-803, Korea		Electromagnetic Interference Test Report
---	---	--	---

3. Test Standards

Test Standard : FCC PART 15 (2007)

This Standard sets out the regulations under which an intentional, unintentional, or incidental radiator may be operated without an individual license. It also contains the technical specifications, administrative requirements and other conditions relating to the marketing of Part 15 devices.

Test Method : ANSI C 63.4 (2003)

This standard sets forth uniform methods of measurement of radio-frequency (RF) signals and noise emitted from both unintentional and intentional emitters of RF energy in the frequency range 9 kHz to 40 GHz. Methods for the measurement of radiated and AC power-line conducted radio noise are covered and may be applied to any such equipment unless otherwise specified by individual equipment requirements. These methods cover measurement of certain devices that deliberately radiate energy, such as intentional emitters, but does not cover licensed transmitters. This standard is not intended for certification/approval of avionic equipment or for industrial, scientific, and medical (ISM) equipment. These methods apply to the measurement of individual units or systems comprised of multiple units


	ESTECH Co., Ltd. Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guro-gu, Seoul, 158-803, Korea	   	Electromagnetic Interference Test Report
---	---	--	---

4. Measurement Condition

4.1 EUT Operation.

1. Check to normal mode operation
2. The operational conditions of the EUT was determined by the manufacturer according to the typical use of the EUT with respect to the expected highest level of emission.
3. Connect EUT to PC USB port
4. Copy the “KTSync.exe” program from the CD
5. The scanned barcode will be displayed, along with barcode type and time stamp
6. Use the included Synchronization program to upload barcode data from EUT to PC.

4.2 Configuration and Peripherals

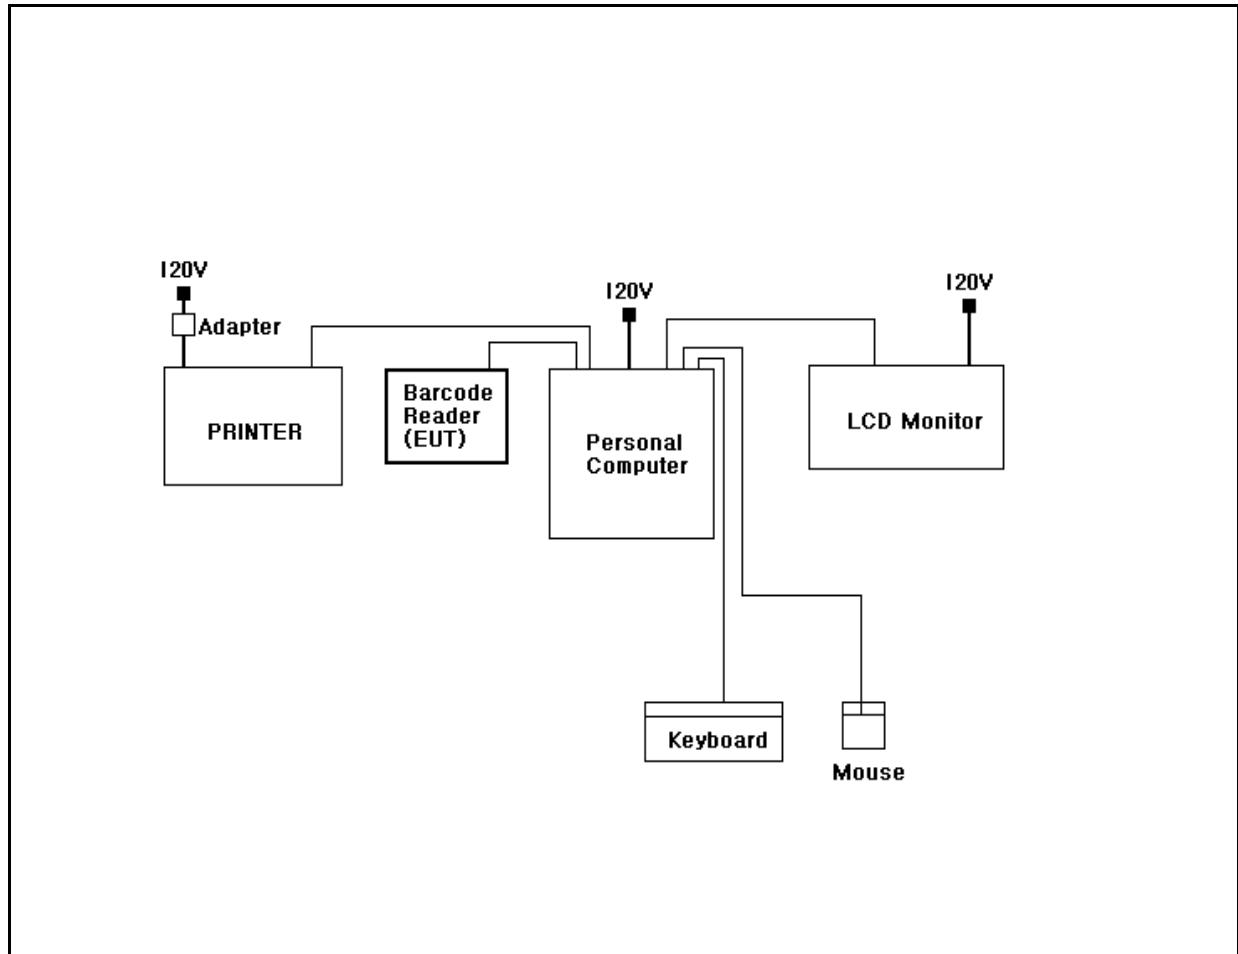

**ESTECH Co., Ltd.**Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea**Electromagnetic
Interference
Test Report**

4.3 EUT and Support equipment

Equipment Name	Model Name	S/N	Manufacturer	Remark (FCC ID)
Barcode Reader	KDC200	000045	AISOLUTION CO., LTD.	EUT
Personal Computer	DCSM	6RD11JS	Dell Asia Pacific Sdn.	
LCD Monitor	L17NS-3	508KPFXOF411	LG Electronics Inc.	
Keyboard	SK-8115	71616-76C-08JP	YET FOUNDATE LTD	
Mouse	M-UV88	LNA40200727	Logitech	
Printer	MJC-5750	NA34BFFP34102V	SAMSUNG ELECTRONICS(SHANGONG)DIGITAL PRINTING CO.,LTD	
Adapter	PA8040WB	0703016518	Bestec Electronics (Dongguan)Co.,Ltd.	

4.4 Cable Connecting

Start Equipment		End Equipment		Cable Standard		Remark
Name	I/O port	Name	I/O port	Length	Shielded	
Barcode Reader	USB	Personal Computer	USB	1	Yes	
Personal Computer	USB	Keyboard	USB	2	Yes	
Personal Computer	USB	Mouse	USB	2	Yes	
Personal Computer	USB	Printer	USB	2	Yes	
Personal Computer	VIDEO	LCD Monitor	VIDEO	2	Yes	
Printer	POWER	Adapter	-	2	No	

	ESTECH Co., Ltd. RM 1015, World Venture Center II, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea	   	Electromagnetic Interference Test Report
---	---	--	---

5. Measurement of radiated disturbance

Above 30 MHz Electric Field strength was measured in accordance with FCC Part 15 (2007) & ANSI C 63.4 (2003). The test setup was made according to FCC Part 15 (2007) & ANSI C 63.4 (2003) on an open test site, which allows a 3m distance measurement. The EUT was placed in the center of wooden turntable. The height of this table was 0.8m. The measurement was conducted with both horizontal and vertical antenna polarization. The turntable has fully rotated. For further description of the configuration refer to the picture of the test setup.

5.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
TEST Receiver	ESVS10	Rohde & Schwarz	838562/002	2008. 1. 23
Spectrum Analyzer	R3261C	ADVANTEST	61720116	2008. 4. 20
LogBicon Antenna	VULB 9160	Schwarzbeck	3142	2008. 5. 07
Amplifier	8447F	HP	2805A02972	2008. 6. 26
Turn Table	2087	EMCO	2129	–
Antenna Mast	2070-01	EMCO	9702-203	–
ANT Mast Controller	2090	EMCO	1535	–
Turn Table Controller	2090	EMCO	1535	–

5.2 Environmental Condition

Test Place : Open site(3m)
 Temperature (°C) : 9 °C
 Humidity (%) : 41 %

	ESTECH Co., Ltd. Bm 1015, World Venture Center II, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea	 	Electromagnetic Interference Test Report
---	---	---	---

5.3 Test data

Test Date : 13-Dec-07

Measurement Distance : 3 m

Frequency (MHz)	Reading (dB μ V)	Position (V/H)	Height (m)	Correction Factor		Result Value		
				Ant Factor (dB)	Cable (dB)	Limit (dB μ V/m)	Result (dB μ V/m)	Margin (dB)
48.02	12.20	V	1.0	12.41	1.1	40.0	25.71	-14.29
59.67	14.10	V	1.0	11.59	1.2	40.0	26.92	-13.08
108.59	13.10	V	1.0	10.13	1.6	43.5	24.84	-18.66
112.43	14.20	H	1.9	10.48	1.6	43.5	26.32	-17.18
132.32	13.30	H	1.7	12.13	1.8	43.5	27.22	-16.28
152.23	10.00	V	1.0	12.83	1.8	43.5	24.66	-18.84
189.58	13.00	H	1.3	10.47	2.2	43.5	25.63	-17.87
223.10	14.70	H	1.3	10.49	2.4	46.0	27.61	-18.39
240.00	15.80	H	1.2	11.14	2.5	46.0	29.46	-16.54
288.01	13.40	H	1.2	12.73	2.9	46.0	28.99	-17.01
337.78	9.50	H	1.1	13.96	3.2	46.0	26.67	-19.33
389.58	8.30	H	1.1	15.08	3.5	46.0	26.91	-19.09
480.00	7.50	V	1.0	16.98	4.1	46.0	28.58	-17.42
580.01	6.50	H	1.0	19.12	4.6	46.0	30.20	-15.80
620.00	6.30	H	1.0	19.87	4.9	46.0	31.06	-14.94
701.20	4.30	H	1.0	20.60	5.3	46.0	30.18	-15.82
912.01	3.30	H	1.0	23.40	6.6	46.0	33.32	-12.68
Remark	H : Horizontal, V : Vertical *CL = Cable Loss-Amplifier Gain(In case of above1000Mhz) *CL = Cable Loss(In case of below1000Mhz) *Checked in all 3 axis(X,Y,Z) and Y axis were reported by the maximum measured data. *The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120KHz for Quasi-peak detection at frequency below 1GHz. *The resolution bandwidth and video bandwidth of spectrum analyzer is 1MHz and 10Hz for Average peak detection at frequency above 1GHz.							

	ESTECH Co., Ltd. Rm 1015, World Venture Center II, 426-5 Gasan-dong, Guncheon-gu, Seoul, 158-803, Korea	   	Electromagnetic Interference Test Report
---	---	--	---

6. Measurement of conducted disturbance

The continuous disturbance voltage of AC Mains in the frequency from 0.15 to 30 MHz was measured in accordance to FCC Part 15 (2007) & ANSI C 63.4 (2003). The test setup was made according to FCC Part 15 (2007) & ANSI C 63.4 (2003) in a shielded Room. The EUT was placed on a non-conductive table at least 80 above the ground plan. A grounded vertical reference plane was positioned in a distance of 40cm from the EUT. The distance from the EUT to other metal surfaces was at least 0.8m. The EUT was only earthen by its power cord through the line impedance stabilizing network. The power cord has been bundled to a length of 1.0m.. The test receiver with Quasi Peak detector complies with CISPR 16.

6.1 Measurement equipments

Equipment Name	Type	Manufacturer	Serial No.	Next Calibration date
LISN	ESH3-Z5	Schwarzbeck	838979/010	2008. 2. 28
LISN	NNLA8120A	Schwarzbeck	8120161	2008. 2. 28
TEST Receiver	ESPI7	Rohde & Schwarz	100185	2008. 8. 27
Pulse Limiter	ESH3Z2	Rohde & Schwarz	NONE	-

6.2 Environmental Condition

Test Place : Shielded Room

Temperature (°C) : 20 °C

Humidity (%) : 39 %



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



Electromagnetic Interference Test Report

6.3 Test data

Test Date : 13-Dec-07



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



**Electromagnetic
Interference
Test Report**


7. Photographs of test setup

7.1 Setup for Radiated Test : 30 ~ 1000 MHz

[Front]



[Rear]

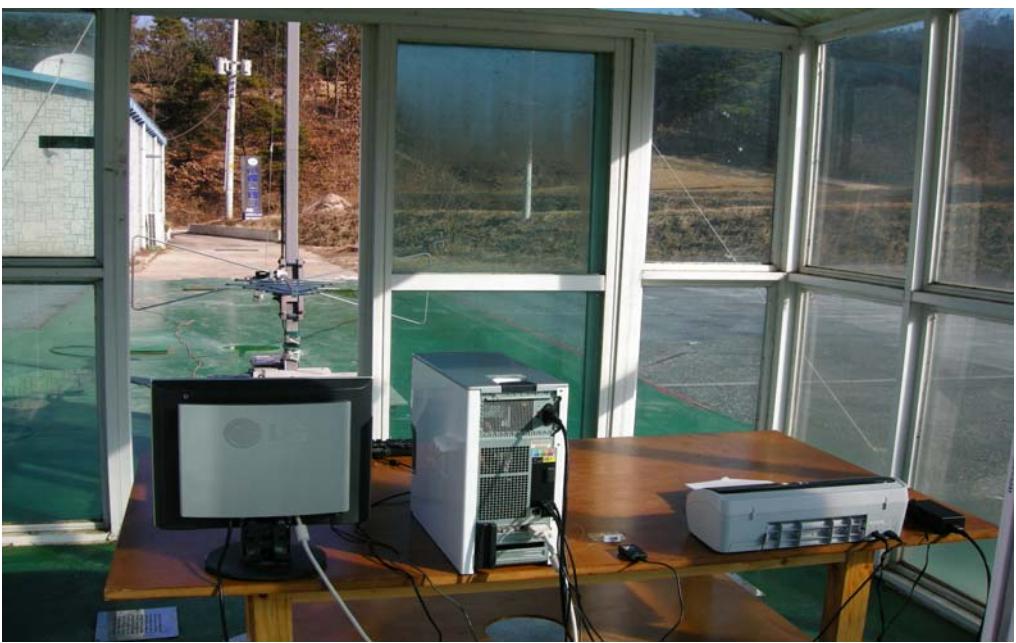



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea




**Electromagnetic
Interference
Test Report**

7.2 Setup for Conducted Test : 0.15 ~ 30 MHz

[Front]



[Rear]

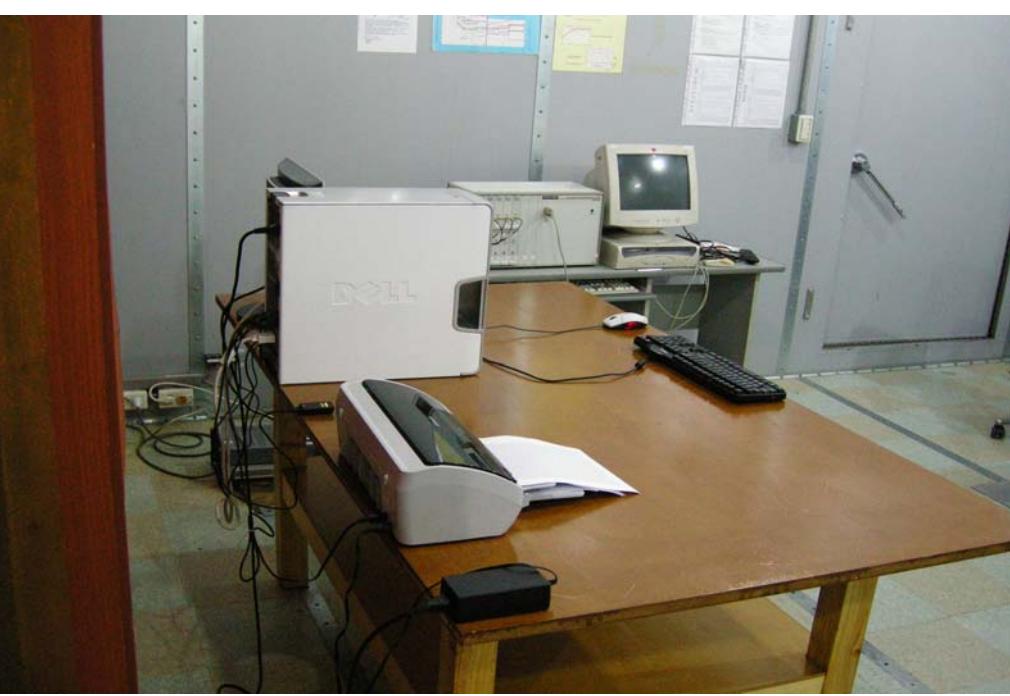



ESTECH Co., Ltd.

Rm 1015, World Venture Center II,
426-5 Gasan-dong, Guncheon-gu,
Seoul, 158-803, Korea



Electromagnetic
Interference
Test Report

8. Photographs of EUT


[Front]



[Rear]



Appendix 1. Spectral diagram

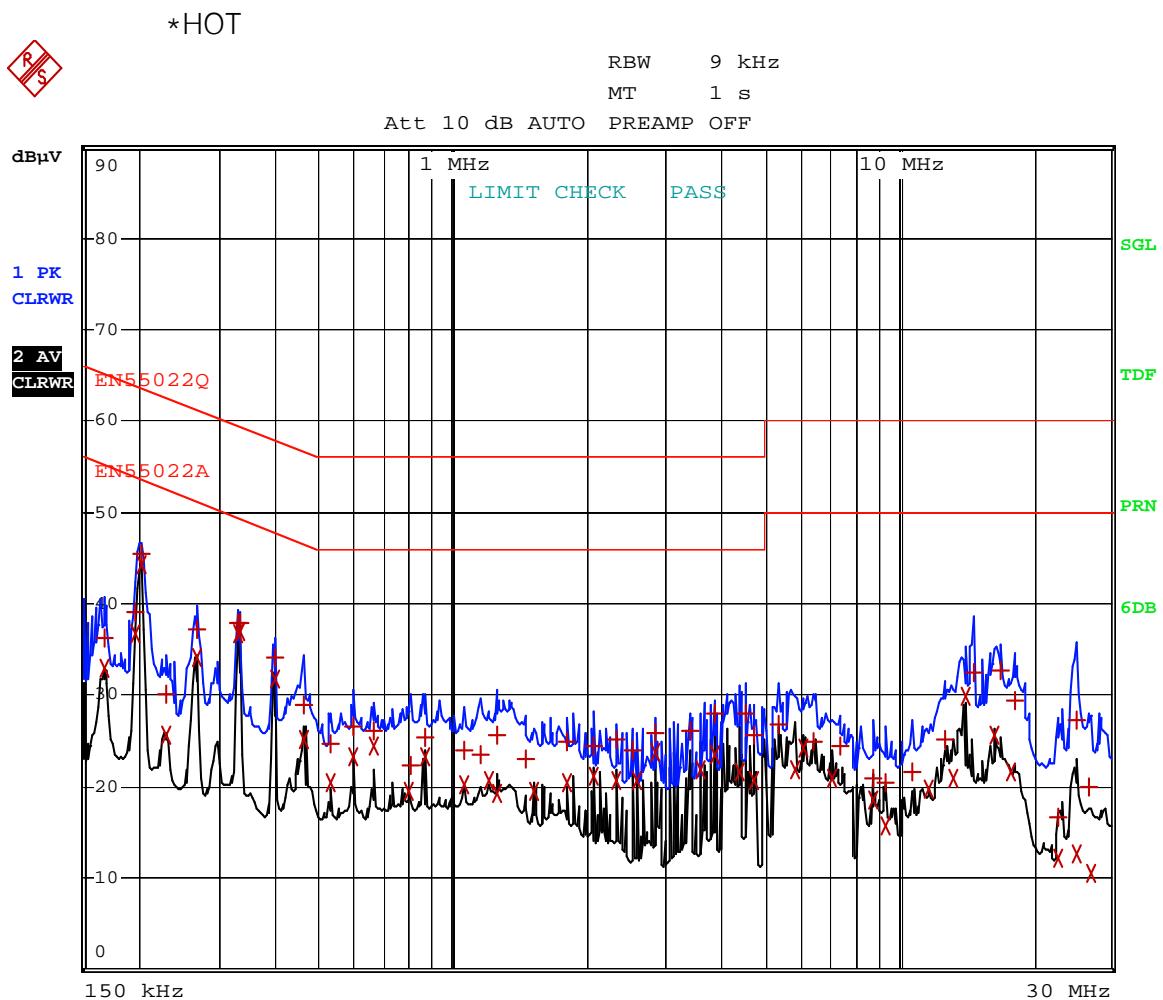


*NEUTRAL



RBW 9 kHz

MT 1 s

Att 10 dB AUTO PREAMP OFF

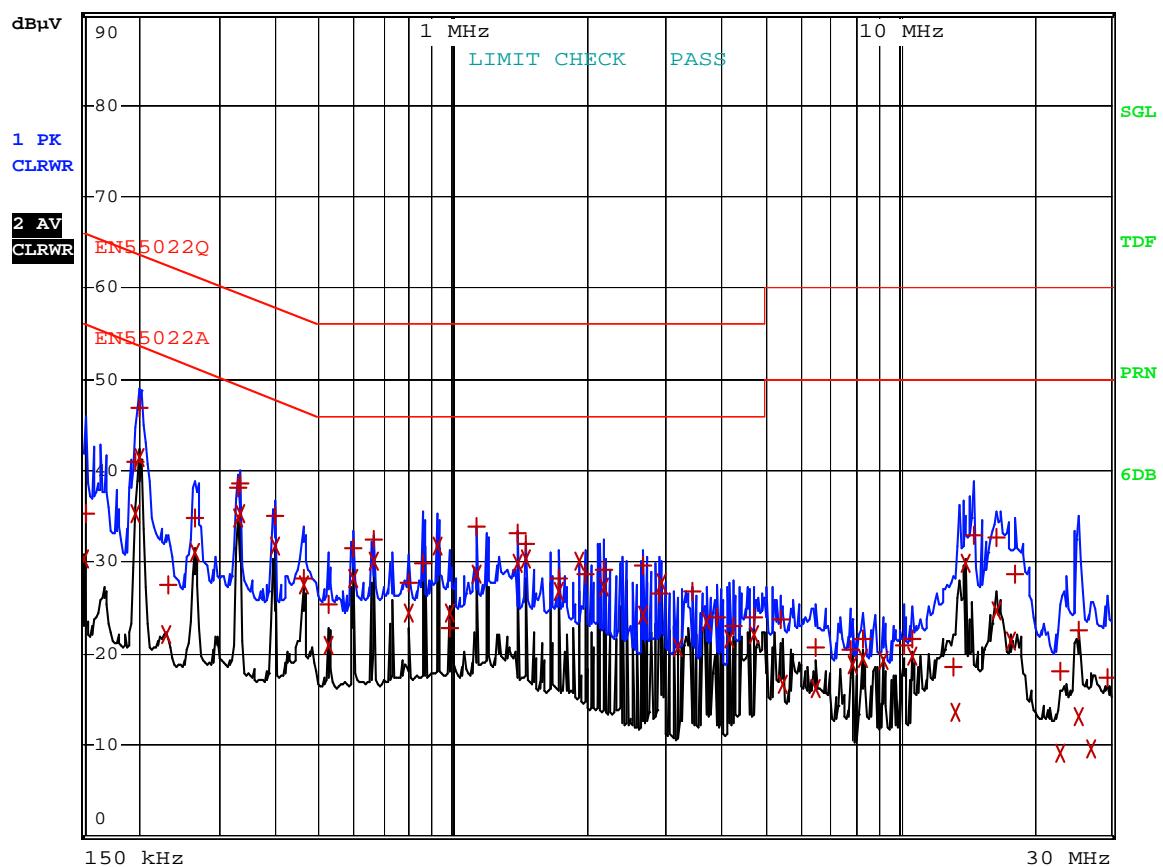

Comment: KDC200 NEUTRAL
Date: 13.DEC.2007 14:28:26