

Electromagnetic Emission

FCC MEASUREMENT REPORT

CERTIFICATION OF COMPLIANCE


FCC Part 15 Certification Measurement

PRODUCT : Barcode Scanner
MODEL/Serial No. : KDC350 / NONE
MULTIPLE MODEL : -
BRAND NAME : **KDC**
FCC ID : VH9KDC350A
APPLICANT : AISOLUTION CO., LTD.
691-4, Mia-dong, Gangbuk-gu, Seoul, 137-896, Republic of Korea
Attn.: HYOIN, LEE / Manager
MANUFACTURER : AISOLUTION CO., LTD.
691-4, Mia-dong, Gangbuk-gu, Seoul, 137-896, Republic of Korea
FCC CLASSIFICATION : DXX - Part 15 Low Power Communication Device Transmitter
TYPE OF MODULATION : ASK
FREQUENCY CHANNEL : 1 CH
ANTENNA TYPE : PCB Pattern Antenna (Integral)
ANTENNA GAIN : 3.14 dBi max
RULE PART(S) : FCC Part 15 Subpart C
FCC PROCEDURE : ANSI C63.10-2009
TEST REPORT No. : ETLT150527.0024
DATES OF TEST : June 08, 2015 to June 10, 2015
REPORT ISSUE DATE : July 22, 2015
TEST LABORATORY : ETL Inc. (FCC Designation Number : KR0022)

The Barcode Scanner, Model KDC350 has been tested in accordance with the measurement procedures specified in ANSI C63.10-2009 at the ETL Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart C section 15.247.

I attest to the accuracy of data. All measurement herein was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.



Prepared by:

Seok Lyong, Choi (Test Engineer)

July 22, 2015

Reviewed by:

Kug Kyoung, Yoon (Chief Engineer)

July 22, 2015

ETL Inc.

Head office: #371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

Open site: #499-1, Sagot-ri, Seosin-myeon, Hwaseong-si, Gyeonggi-do, 445-882, Korea

Tel: 82-2-858-0786 Fax: 82-2-858-0788

The test report merely corresponds to the test sample(s).

This report shall not be reproduced, in whole or in part without the written approval of ETL Inc.

Table of Contents

FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
 - 5.1 Summary of Test Results**
 - 5.2 Conducted Emissions**
 - 5.3 Radiated Emissions**
 - 5.4 13.56 MHz Carrier Field Strength within the Bands**
 - 5.5 Occupied Bandwidth**
 - 5.6 Frequency Tolerance**
- 6. Sample Calculation**
- 7. List of test Equipment used for Measurement**

FCC MEASUREMENT REPORT

Scope – *Measurement and determination of electromagnetic emission (EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)*

General Information

Applicant Name	: AISOLUTION CO., LTD.
Address	: 691-4, Mia-dong, Gangbuk-gu, Seoul, 137-896, Republic of Korea
Attention	: HYOIN, LEE / Manager

- **EUT Type** : Barcode Scanner
- **Model Number** : KDC350
- **S/N** : NONE
- **Freq. Range** : 13.56 MHz
- **Modulation Technique** : ASK
- **Antenna Type** : PCB Pattern Antenna (Integral)
- **Environmental of Tests** : Temperature: (25.0 ± 2.6) °C
Humidity: (51 ± 10) % R.H.
Atmospheric Pressure: (100.8 ± 0.4) kPa
- **FCC Rule Part(s)** : FCC Part 15 Subpart C
- **Test Procedure** : ANSI C63.10-2009
- **FCC Classification** : DXX - Part 15 Low Power Communication Device Transmitter
- **Place of Tests** : ETL Inc. Testing Lab. (FCC Designation Number : KR0022)

Radiated Emission test 1;
#499-1, Sagot-ri, Seosin-myeon, Hwaseong-si,
Gyeonggi-do, 445-882, Korea

Radiated Emission test 2 and Conducted Emission test;
#371-51, Gasan-dong, Geumcheon-gu, Seoul, 153-803, Korea

1. INTRODUCTION

The measurement test for radiated and conducted emission test was conducted at the ETL Inc. The site is constructed in conformance with the requirements of the ANSI C63.10-2009 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 m and 10 m site configurations. Detailed description of test facility was found to be in compliance with FCC Rules according to the ANSI C63.10-2009 and registered to the Federal Communications Commission (FCC Designation Number : KR0022).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (ANSI C63.10-2009) was used in determining radiated and conducted emissions from the AISOLUTION CO., LTD. Model: KDC350

2. PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the Barcode Scanner (model: KDC350).

The model KDC350 is basic model that was tested.

2.2 General Specification

Hardware Specifications	
Physical Characteristics	Size: 43 mm x 94 mm x 24 mm (1.69" x 3.70" x 0.94")
	Weight: 3.0 oz (85 g)
Electrical Characteristics	Battery: Lithium-Ion (3.7 V DC) softpack
	Charging: Via USB connector, charging cradle
	Typical Operating Current: 300 mA @ 3.3 V
NFC	MIFARE Ultralight/Ultralight C/1K, iso15693
	ASK
	13.56 MHz
	PCB Pattern Antenna
User Environment	Ingress Protection Rating: IP65
	Drop Spec: 5 feet (1.5 m)
	Operating Temperature: (59 ± 63) °F ((15 ± 35) °C)
	Storage Temperature: (68 ± 72) °F ((20 ± 40) °C)
	Humidity: (50 ± 45) % R.H. (non condensing)
Interfaces	Bluetooth® V2.1 + EDR, Class 2, HID/SPP/MFi
	USB to Serial (Ultra mini USB port)
Keypad	19 Alphanumeric including scan and scroll buttons
Functionality	Memory Flash ROM: 256 kB Program, 4 MB User Data
	Memory RAM: 64 kB
	Microprocessor: ARM7, 32 bits
	Real-time Clock: Quartz RTC for timestamp

Hardware Specifications	
	Compliant to 2.4 GHz IEEE 802.11b/g/n
	Support 802.11g/n OFDM with BPSK, QPSK, 16-QAM and 64-QAM; 802.11b with BPSK, QPSK and CCK
WIFI (Optional)	<p>Support for following data rates:</p> <ul style="list-style-type: none"> - 802.11n (20 MHz): MCS0 - 7; (7.2, 14.4, 21.7, 28.9, 43.3, 57.8, 65.0, 72.2) Mbps - 802.11g: (6, 9, 12, 18, 24, 36, 48, 54) Mbps - 802.11b: (1, 2, 5.5, 11) Mbps
High Internal Frequency	Wi-Fi Module → X-tal: 40 MHz
Scan Engine & Symbologies	
Scan Engine	Option VLM4122(1D), Honeywell 5100
Symbologies	All major 1D and 2D Symbologies
Wedging & Synchronization	
Store to a file or transfer to the application	
Keyboard wedge function	
Add-on prefixes and suffixes	
Barcode option selection	
Application Generation	
SDK for PC and Smartphone application	
Application generation tool	
Database lookup feature	
Inventory management feature	

3. DESCRIPTION OF TESTS

The tests documented in this report were performed in accordance with ANSI C63.10-2009 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 Radiated Emission Measurement

Radiated emission measurements were made in accordance with § 13 in ANSI C63.10-2009 "Measurement of Intentional radiators" The measurements were performed over the frequency range of 30 MHz to 40 GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak, Quasi-peak, Average" within a bandwidth of 120 kHz and above 1 GHz is 1 MHz.

Preliminary measurements were made at 3 m using broadband antennas, and spectrum analyzer to determine the frequency producing the maximum emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 MHz to 1 000 MHz using Log-Bicon antenna. Above 1 GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site or SVSWR chamber at 3 m. The test equipment was placed on a styrofoam table. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8 m high nonmetallic 1.0 m x 1.5 m table. The EUT, support equipment, and interconnecting cables were rearranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 m to 4 m and stopped at the azimuth or height producing the maximum emission.

Varying the mode of operating frequencies of the EUT maximized each emission. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst-case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor (20 dB/decade) as per section 15.31(f).

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.1.1 Radiated Emission Limits:

(1) According to §15.209 Radiated emission limits, general requirements

(a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies [MHz]	Field Strength [μ V/m]	Measurement Distance [m]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 MHz - 72 MHz, 76 MHz - 88 MHz, 174 MHz - 216 MHz or 470 MHz - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241

3.2 Carrier field strength and field strength outside 13.110 MHz - 14.010 MHz and occupied bandwidth

(1) According to §15.225 Operation within the band 13.110 MHz - 14.010 MHz

- (a) The field strength of any emissions within the band 13.553 MHz - 13.567 MHz shall not exceed 15 848 microvolts/meter at 30 meters
- (b) Within the bands 13.410 MHz - 13.553 MHz and 13.567 MHz - 13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters
- (c) Within the bands 13.110 MHz - 13.410 MHz and 13.710 MHz - 14.010 MHz, the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters
- (d) The field strength of any emissions appearing outside of the 13.110 MHz - 14.010 MHz band shall not exceed the general radiated emission limits in § 15.209

Frequency [MHz]	Field Strength Limit [μ V/m] @ 30 m	Field Strength Limit [dB(μ V/m)] @ 30 m	Field Strength Limit [dB(μ V/m)] @ 3 m
13.110 - 13.410	106	40.5	80.5
13.410 - 13.553	334	50.5	90.5
13.553 - 13.567	15 848	84.0	124.0
13.567 - 13.710	334	50.5	90.5
13.710 - 14.010	106	40.5	80.5

(2) According to §15.215(c) Occupied bandwidth

- (a) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80 % of the permitted band in order to minimize the possibility of out-of-band operation.

3.3 Frequency tolerance

(1) According to §15.225 Operation within the band 13.110 MHz - 14.010 MHz

- (e) The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -20°C to $+50^{\circ}\text{C}$ at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20°C . For battery-operated equipment, the equipment tests shall be performed using a new battery.

3.4 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section § 13 in ANSI C63.10-2009 "measurement of intentional radiators" The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω/50 μH LISN as the input transducer to a Spectrum Analyzer or a Test Receiver. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 9 kHz or for "quasi-peak" within a bandwidth of 9 kHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1 m x 1.5 m x 0.8 m wooden table which is placed 0.4 m away from the vertical wall and 1.5 m away from the side wall of the chamber room. Two LISN are bonded to the shielded room. The EUT is powered from the LISN and the support equipment is powered from the other LISN. Power to the LISNs are filtered by a noise cut power line filters. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the LISN. Non-inductive bundling to a 1 m length shortened all interconnecting cables more than 1 m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the EMI Test Receiver to determine the frequency producing the maximum emission from the EUT. The frequency producing the maximum level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 MHz to 30 MHz. The bandwidth of the spectrum analyzer was set to 9 kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

3.5 FCC Part 15.205 Restricted Bands of Operations

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.694 75 - 16.695 25	608 - 614	5.35 - 5.46
2.173 5 - 2.190 5	16.804 25 - 16.804 75	960 - 1 240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1 300 - 1 427	8.025 - 8.5
4.177 25 - 4.177 75	37.5 - 38.25	1 435 - 1 626.5	9.0 - 9.2
4.207 25 - 4.207 75	73 - 74.6	1 645.5 - 1 646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1 660 - 1 710	10.6 - 12.7
6.267 75 - 6.268 25	108 - 121.94	1 718.8 - 1 722.2	13.25 - 13.4
6.311 75 - 6.312 25	123 - 138	2 200 - 2 300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2 310 - 2 390	15.35 - 16.2
8.362 - 8.366	156.524 75 - 156.525 25	2 483.5 - 2 500	17.7 - 21.4
8.376 25 - 8.386 75	156.7 - 156.9	2 690 - 2 900	22.01 - 23.12
8.414 25 - 8.414 75	162.012 5 - 167.17	3 260 - 3 267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3 332 - 3 339	31.2 - 31.8
12.519 75 - 12.520 25	240 - 285	3 345.8 - 3 358	36.43 - 36.5
12.576 75 - 12.577 25	322 - 335.4	3 600 - 4 400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490 MHz - 0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1 000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1 000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.6 Antenna connection requirement

(1) According to §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

4. TEST CONDITION

4.1 Test Configuration


The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

* This test was applied to X, Y, Z. and the worst result were investigated and reported.

4.2 Description of Test modes

Barcode Scanner that has the control software.

4.3 The setup drawing(s)

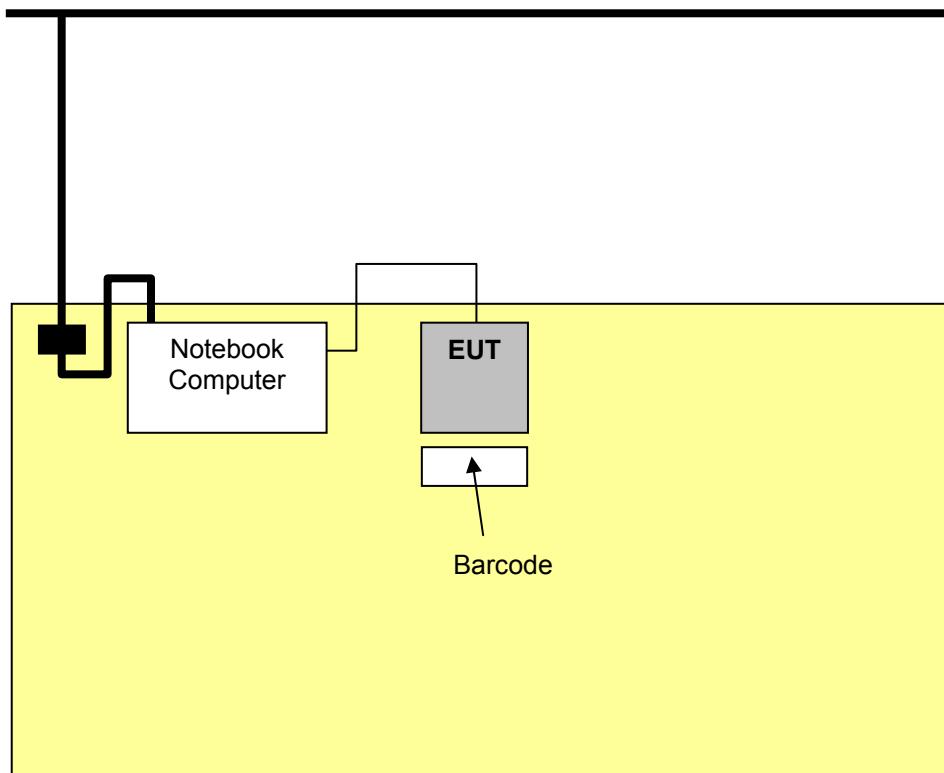

— : Signal Line

— : Power Line



: Adapter

5. TEST RESULTS

5.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

Test Rule Parts	Measurement Required	Result
15.207(a),(d)	Conducted emissions	Pass *
15.209 15.225(d)	Radiated emissions Field strength outside 13.110 MHz - 14.010 MHz	Pass
15.225(a)(b)(c)	13.56 MHz carrier field strength within the bands	Pass
15.215	Occupied Bandwidth	Pass
15.225(e)	Frequency Tolerance	Pass
15.203	Antenna connection requirement	Integral antenna which is permanently attached and cannot be replaced.

** This test was tested at main host computer (EUT was connected USB port of the host computer).*

The data collected shows that the **AISOLUTION CO., LTD. / Barcode Scanner / KDC350** complied with technical requirements of above rules part 15.207, 209 and 15.247 Limits.

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

5.2 Conducted Emissions Measurement

EUT	Barcode Scanner / KDC350 (S/N: N/A)
Limit apply to	FCC Part 15.207
Test Date	June 09, 2015
Environmental of Test	(25.2 ± 0.2) °C, (44 ± 1) % R.H., (101.2 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed by 10.10 dB

Limit

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission [MHz]	Conducted limit [dB(μ V)]	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46 *
0.5 - 5	56	46
5 - 30	60	50

* Decreases with the logarithm of the frequency.

Test Results

- Refer to see the measured plot in next page.

Conducted Emission Test Data


The following data and graph shows the highest levels of conducted emissions on both polarizations of hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

NOTES:

1. Please see the measured data and graph in next page.
2. The c.f value was included the LISN factor and cable loss.
3. Result value = Reading + c.f
4. Margin value = Limit - Result
5. If the Quasi-Peak limit is met when using a Peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the Quasi-Peak detector receiver is unnecessary.
6. If the average limit is met when using a Quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.
7. Measurements were performed at the AC Power Inlet in the frequency band of 150 kHz ~ 30 MHz according to the FCC Part 15 Class B.
8. Frequency of 13.56 MHz is excluded. It is because the carrier frequency.

Line: HOT

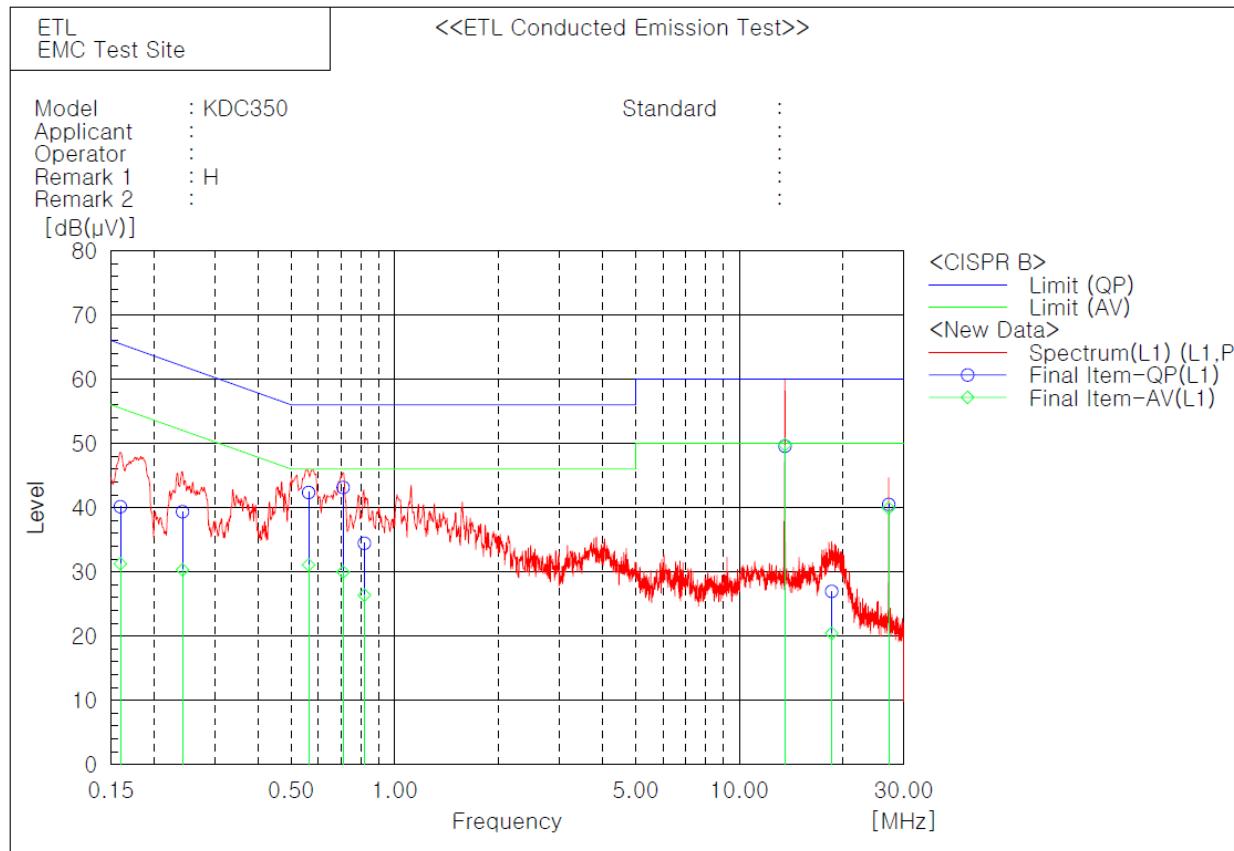


Final Result

--- L1 Phase ---

No.	Frequency [MHz]	Reading QP [dB(μV)]	Reading AV [dB(μV)]	c.f [dB]	Result QP [dB(μV)]	Result AV [dB(μV)]	Limit QP [dB(μV)]	Limit AV [dB(μV)]	Margin QP [dB]	Margin AV [dB]
1	0.15988	29.1	20.3	11.0	40.1	31.3	65.5	55.5	25.4	24.2
2	0.24207	28.9	19.8	10.5	39.4	30.3	62.0	52.0	22.6	21.7
3	0.562	32.0	20.8	10.3	42.3	31.1	56.0	46.0	13.7	14.9
4	0.7079	32.8	19.7	10.3	43.1	30.0	56.0	46.0	12.9	16.0
5	0.8165	24.1	16.1	10.3	34.4	26.4	56.0	46.0	21.6	19.6
6	13.5606	39.3	39.4	10.3	49.6	49.7	60.0	50.0	10.4	0.3
7	18.5352	16.7	10.1	10.3	27.0	20.4	60.0	50.0	33.0	29.6
8	27.1222	30.2	29.6	10.3	40.5	39.9	60.0	50.0	19.5	10.1

Line: Neutral

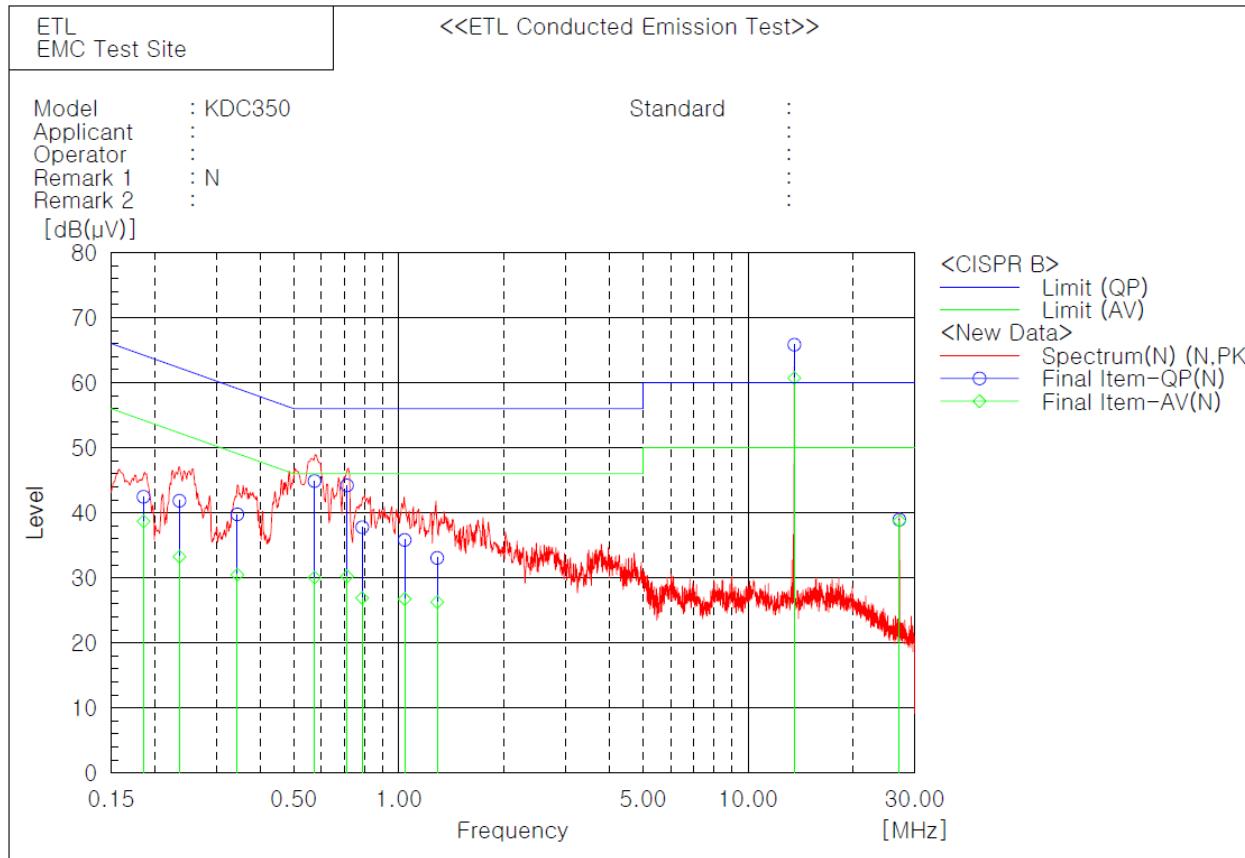

Final Result

--- N Phase ---

No.	Frequency [MHz]	Reading		c.f	Result		Result		Limit		Margin	
		QP [dB(μV)]	AV [dB(μV)]		QP [dB]	QP [dB(μV)]	AV [dB(μV)]	AV [dB(μV)]	QP [dB(μV)]	AV [dB(μV)]	QP [dB]	AV [dB]
1	0.18566	31.8	28.0	10.7	42.5	38.7	64.2	54.2	21.7	15.5		
2	0.23532	31.3	22.7	10.5	41.8	33.2	62.3	52.3	20.5	19.1		
3	0.34489	29.4	20.2	10.3	39.7	30.5	59.1	49.1	19.4	18.6		
4	0.57335	34.6	19.7	10.3	44.9	30.0	56.0	46.0	11.1	16.0		
5	0.71055	33.9	19.9	10.3	44.2	30.2	56.0	46.0	11.8	15.8		
6	0.78545	27.5	16.6	10.3	37.8	26.9	56.0	46.0	18.2	19.1		
7	1.0395	25.6	16.5	10.2	35.8	26.7	56.0	46.0	20.2	19.3		
8	1.2884	22.8	16.1	10.2	33.0	26.3	56.0	46.0	23.0	19.7		
9	13.5602	55.5	50.4	10.3	65.8	60.7	60.0	50.0	-5.8	-10.7		
10	27.1182	28.2	28.0	10.7	38.9	38.7	60.0	50.0	21.1	11.3		

5.3 Spurious Emissions

EUT	Barcode Scanner / KDC350 (S/N: N/A)
Limit apply to	FCC Part 15.209
Operating Condition	RF transmitting continuously during the tested.
Result	Passed

Limit

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequencies [MHz]	Field Strength [μ V/m]	Measurement Distance [m]
0.009 - 0.490	2 400/F(kHz)	300
0.490 - 1.705	24 000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54 MHz - 72 MHz, 76 MHz - 88 MHz, 174 MHz - 216 MHz or 470 MHz - 806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Test Results

- Refer to see the measured plot in next page.

Radiated Emissions Test data

- 9 kHz to 30 MHz

Test Date	June 08, 2015
Environmental of Test	(27.2 ± 0.3) °C, (57 ± 3) % R.H., (100.5 ± 0.1) kPa

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (100 Hz, 9 kHz)

Frequency [MHz]	Reading [dB(µV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(µV/m)]	Limit [dB(µV/m)]	Margin [dB]
Emission attenuated more than 20 dB below the limit are not reported.							

Result: All emissions below noise floor of 20 dB(µV/m).

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin = Limit - Result
4. The measurement was performed for the frequency range 9 kHz to 30 MHz according to FCC Part 15.209.

- Below 1 GHz (30 MHz to 1 GHz)

Test Date	June 08, 2015							
Environmental of Test	$(27.2 \pm 0.3) ^\circ\text{C}$, $(57 \pm 3) \%$ R.H., $(100.5 \pm 0.1) \text{kPa}$							

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB(μV)]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB(μV)]	Height [cm]	Result [dB($\mu\text{V}/\text{m}$)]	Limit [dB($\mu\text{V}/\text{m}$)]	Margin [dB]
42.12	22.57	V	11.20	1.03	100	34.80	40.00	5.20

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range above 30 MHz according to FCC Part 15.209.

5.4 13.56 MHz carrier field strength within bands

EUT	Barcode Scanner / KDC350 (S/N: N/A)
Limit apply to	FCC Part 15.225(a)(b)(c)
Test Date	June 08, 2015
Environmental of Test	(26.3 ± 0.2) °C, (60 ± 1) % R.H., (100.6 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested
Result	Passed

Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarizations of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6 dB Bandwidth: 9 kHz)

Frequency [MHz]	Reading [dB(µV) @ 3 m]	Polarization (*H/**V)	Ant. Factor [dB/m]	Cable Loss [dB]	Result [dB(µV/m) @ 3 m]	Limit [dB(µV/m) @ 3 m]	Margin [dB]
13.56	32.70	H	9.10	0.70	42.50	124.00	81.50

NOTES:

1. * H : Horizontal polarization , ** V : Vertical polarization
2. Result = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Result
4. The measurement was performed for the frequency range 13.56 MHz according to FCC Part 15.225(a)(b)(c)

5.5 Occupied Bandwidth

EUT	Barcode Scanner / KDC350 (S/N: N/A)
Limit apply to	FCC Part 15.215
Test Date	June 10, 2015
Environmental of Test	(22.7 ± 0.1) °C, (45 ± 0) % R.H., (100.7 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested.
Result	Passed


5.5.1 Occupied Bandwidth

Frequency [MHz]	20 dB Bandwidth [kHz]
13.56	3.93

NOTES:

1. Measure frequency separation of relevant channel using spectrum analyzer.

Plots of 20 dB Bandwidth

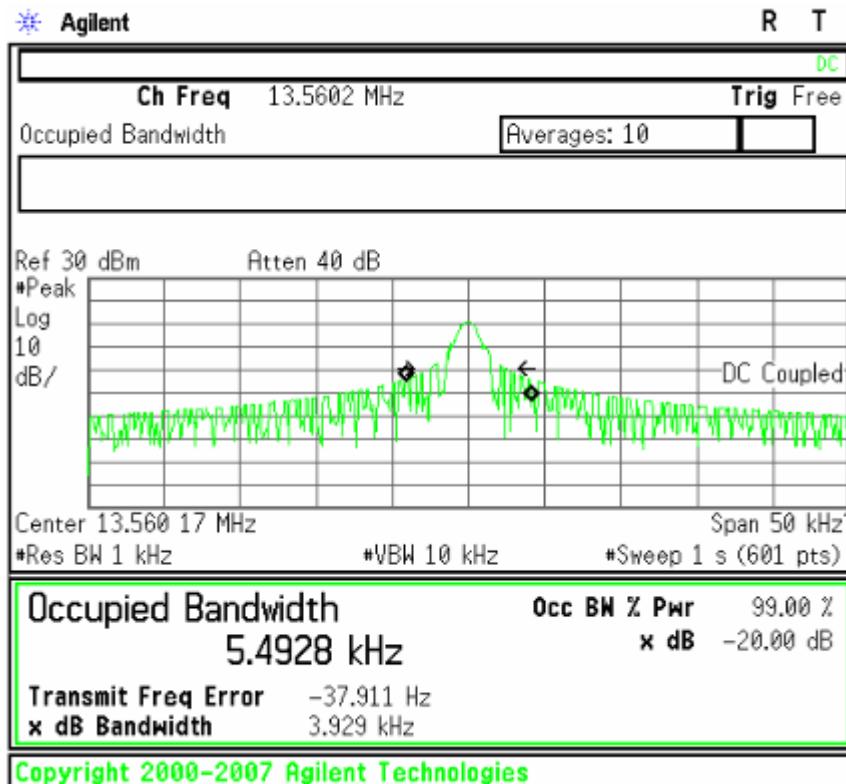

5.6 Frequency Tolerance

EUT	Barcode Scanner / KDC350 (S/N: N/A)
Limit apply to	FCC Part 15.215(e)
Test Date	June 10, 2015
Environmental of Test	(23.1 ± 0.7) °C, (43 ± 2) % R.H., (100.5 ± 0.0) kPa
Operating Condition	RF transmitting continuously during the tested
Result	Passed

Frequency Tolerance Test Data

The Frequency Tolerance of the carrier signal shall be maintained within ± 0.01 % of operating frequency over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C.

- Operating frequency: 13.56 MHz
- Limit: ± 1 356 Hz
- Within the band: 13.558 644 MHz - 13.561 356 MHz

Frequency Stability Versus Environment Temperature (+50 °C ~ -20 °C)

Reference Frequency: 13.56 MHz				Limit: ± 1 356 Hz			
Environment Temperature [°C]	Frequency Measure with Time Elapsed						
	Start up		2 Minute		5 Minute		10 Minute
	MHz	Deviation	MHz	Deviation	MHz	Deviation	MHz
50	13.560 043	0.000 043	13.560 044	0.000 044	13.560 025	0.000 025	13.560 033
40	13.560 024	0.000 024	13.560 031	0.000 031	13.560 038	0.000 038	13.560 051
30	13.560 057	0.000 057	13.560 061	0.000 061	13.560 056	0.000 056	13.560 072
20	13.560 088	0.000 088	13.560 093	0.000 093	13.560 103	0.000 103	13.560 106
10	13.560 139	0.000 139	13.560 148	0.000 148	13.560 157	0.000 157	13.560 152
0	13.560 165	0.000 165	13.560 174	0.000 174	13.560 183	0.000 183	13.560 174
-10	13.560 200	0.000 200	13.560 204	0.000 204	13.560 201	0.000 201	13.560 208
-20	13.560 213	0.000 213	13.560 219	0.000 219	13.560 208	0.000 208	13.560 203

Frequency Stability Versus Input Power (± 15 %): Environment Temperature: 25 °C

Reference Frequency: 13.56 MHz				Limit: ± 1 356 Hz			
Power Supplied [Vdc]	Frequency Measure with Time Elapsed						
	Start up		2 Minute		5 Minute		10 Minute
	MHz	Deviation	MHz	Deviation	MHz	Deviation	MHz
10.80	13.560 077	0.000 077	13.560 062	0.000 062	13.560 057	0.000 057	13.560 047
12.00	13.560 085	0.000 085	13.560 054	0.000 054	13.560 050	0.000 050	13.560 057
13.20	13.560 142	0.000 142	13.560 109	0.000 109	13.560 082	0.000 082	13.560 078

6. SAMPLE CALCULATION

Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - PA$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

PA* = Preamplifier Factor

* PA is only be used for the measuring frequency above 1 GHz.

$$dB(\mu V) = 20 \log_{10} (\mu V) : \text{Equation}$$

$$dB(\mu V) = dBm + 107$$

Example : @ 42.12 MHz

Class B Limit	= 40.00 dB(μ V/m)
Reading	= 22.57 dB(μ V)
Antenna Factor + (Cable Loss)	= 11.20 + 1.03 = 12.23 dB(μ V/m)
Total	= 34.80 dB(μ V/m)
Margin	= 40.00 – 34.80 = 5.20 dB
	= 5.20 dB below Limit

7. List of test equipments used for measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Date	Cal. Due Date
<input checked="" type="checkbox"/>	EMI Test Receiver	ESVS 10	R&S	835165/001	15.03.17	16.03.17
<input checked="" type="checkbox"/>	EMI Test Receiver	ESPI3	R&S	100478	14.09.03	15.09.03
<input checked="" type="checkbox"/>	EMI Test Receiver	ESCS30	R&S	847793/005	15.03.17	16.03.17
<input checked="" type="checkbox"/>	Two-Line V-Network	ENV216	R&S	958599/106	15.03.17	16.03.17
<input checked="" type="checkbox"/>	Loop Antenna	AL-130	EMCO	121025	14.04.08	16.04.08
<input checked="" type="checkbox"/>	LogBicon Antenna	VULB9160	Schwarzbeck	3082	13.07.25	15.07.25
<input checked="" type="checkbox"/>	DC Power Supply	HYP-3030	Han Young	990554	15.03.16	16.03.16
<input checked="" type="checkbox"/>	Turn-Table	DS1200-S	Innco Systems GmbH	2740311	N/A	N/A
<input checked="" type="checkbox"/>	Turn-Table	TT 1.35 SI	SES	-	N/A	N/A
<input checked="" type="checkbox"/>	Antenna Master	AM 4.5	SES	-	N/A	N/A
<input checked="" type="checkbox"/>	Constant TEMP.&HUMID. Chamber	PL-1KP	Tabai Espec Corp.	14006754	15.03.16	16.03.16