

APPLICATION CERTIFICATION
On Behalf of
Golden Regent Electronics Ind., Ltd.

Wireless Electronic Locator
Model No.: EZ Find

FCC ID: VHQEZ433

Prepared for : Golden Regent Electronics Ind., Ltd.
Address : Gong Le Industry Village, Xin An Town, Xi Xiang, Bao
An District, Shenzhen, Guangdong, China

Prepared by : ACCURATE TECHNOLOGY CO. LTD
Address : F1, Bldg. A, Changyuan New Material Port, Keyuan Rd.
Science & Industry Park, Nanshan, Shenzhen, Guangdong
P.R. China

Tel: (0755) 26503290
Fax: (0755) 26503396

Report Number : ATE20071654
Date of Test : July 13, 2007
Date of Report : July 16, 2007

TABLE OF CONTENTS

Description	Page
Test Report Certification	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT).....	4
1.2. Description of Test Facility	4
1.3. Measurement Uncertainty	4
2. MEASURING DEVICE AND TEST EQUIPMENT	5
3. THE FIELD STRENGTH OF RADIATION EMISSION	6
3.1. Block Diagram of Test Setup.....	6
3.2. The Field Strength of Radiation Emission Measurement Limits.....	6
3.3. Configuration of EUT on Measurement	7
3.4. Operating Condition of EUT	7
3.5. Test Procedure	7
3.6. The Field Strength of Radiation Emission Measurement Results	8
4. 20DB OCCUPIED BANDWIDTH	10
4.1. Block Diagram of Test Setup.....	10
4.2. The Bandwidth of Emission Limit According To FCC Part 15 Section 15.231(c)	10
4.3. EUT Configuration on Measurement	11
4.4. Operating Condition of EUT	11
4.5. Test Procedure	11
4.6. Measurement Result	12
5. RELEASE TIME MEASUREMENT.....	13
5.1. Block Diagram of Test Setup.....	13
5.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)	13
5.3. EUT Configuration on Measurement	14
5.4. Operating Condition of EUT	14
5.5. Test Procedure	14
5.6. Measurement Result	15
6. AVERAGE FACTOR MEASUREMENT	16
6.1. Block Diagram of Test Setup.....	16
6.2. Average factor Measurement according to ANSI 63.4: 2003.....	16
6.3. EUT Configuration on Measurement	17
6.4. Operating Condition of EUT	17
6.5. Test Procedure	17
6.6. Measurement Result	18
APPENDIX I (TEST CURVES) (10 pages)	

Test Report Certification

Applicant : Golden Regent Electronics Ind., Ltd.
 Manufacturer : Golden Regent Electronics Ind., Ltd.
 EUT Description : Wireless Electronic Locator
 (A) MODEL NO.: EZ Find
 (B) SERIAL NO.: N/A
 (C) POWER SUPPLY: 4.5V DC ("AAA" battery Type×3)

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart C Section 15.231: 2006 & ANSI 63.4: 2003


The device described above is tested by ACCURATE TECHNOLOGY CO. LTD to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C Section 15.231. The measurement results are contained in this test report and ACCURATE TECHNOLOGY CO. LTD is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of ACCURATE TECHNOLOGY CO. LTD.

Date of Test :


July 13, 2007

Prepared by :




(Engineer)

Reviewer :



(Quality Manager)

Approved & Authorized Signer :



(Manager)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Wireless Electronic Locator
Model Number : EZ Find
Power Supply : 4.5V DC (“AAA” battery Type ×3)
Applicant : Golden Regent Electronics Ind., Ltd.
Address : Gong Le Industry Village, Xin An Town, Xi Xiang, Bao An District, Shenzhen, Guangdong, China
Manufacturer : Golden Regent Electronics Ind., Ltd.
Address (1) : Gong Le Industry Village, Xin An Town, Xi Xiang, Bao An District, Shenzhen, Guangdong, China
Address (2) : Chao Jing Development Zone, Bai Sha Town, Taishan Guangdong, China
Date of sample received : July 09, 2007
Date of Test : July 13, 2007

1.2. Description of Test Facility

EMC Lab	: Accredited by TUV Rheinland Shenzhen, May 10, 2004
	Accredited by FCC, May 10, 2004
	The Certificate Registration Number is 253065
	Accredited by Industry Canada, May 18, 2004
	The Certificate Registration Number is IC 5077
Name of Firm	: ACCURATE TECHNOLOGY CO. LTD
Site Location	: F1, Bldg. A, Changyuan New Material Port, Keyuan Rd. Science & Industry Park, Nanshan, Shenzhen, Guangdong P.R. China

1.3. Measurement Uncertainty

Conducted emission expanded uncertainty = 2.23dB, k=2
Radiated emission expanded uncertainty = 4.12dB, k=2

2. MEASURING DEVICE AND TEST EQUIPMENT

Table 1: List of Test and Measurement Equipment

Kind of equipment	Manufacturer	Type	S/N	Calibrated until
EMI Test Receiver	Rohde&Schwarz	ESCS30	100307	03.31.2008
EMI Test Receiver	Rohde&Schwarz	ESI26	838786/013	01.24.2008
Bilog Antenna	Schwarzbeck	VULB9163	9163-194	03.31.2008
Bilog Antenna	Chase	CBL6112B	2591	01.24.2008
Horn Antenna	Rohde&Schwarz	HF906	100013	01.24.2008
Spectrum Analyzer	Anritsu	MS2651B	6200238856	03.31.2008
Pre-Amplifier	Agilent	8447D	2944A10619	03.31.2008

3. THE FIELD STRENGTH OF RADIATION EMISSION


3.1. Block Diagram of Test Setup

3.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Electronic Locator)

3.1.2. Anechoic Chamber Test Setup Diagram

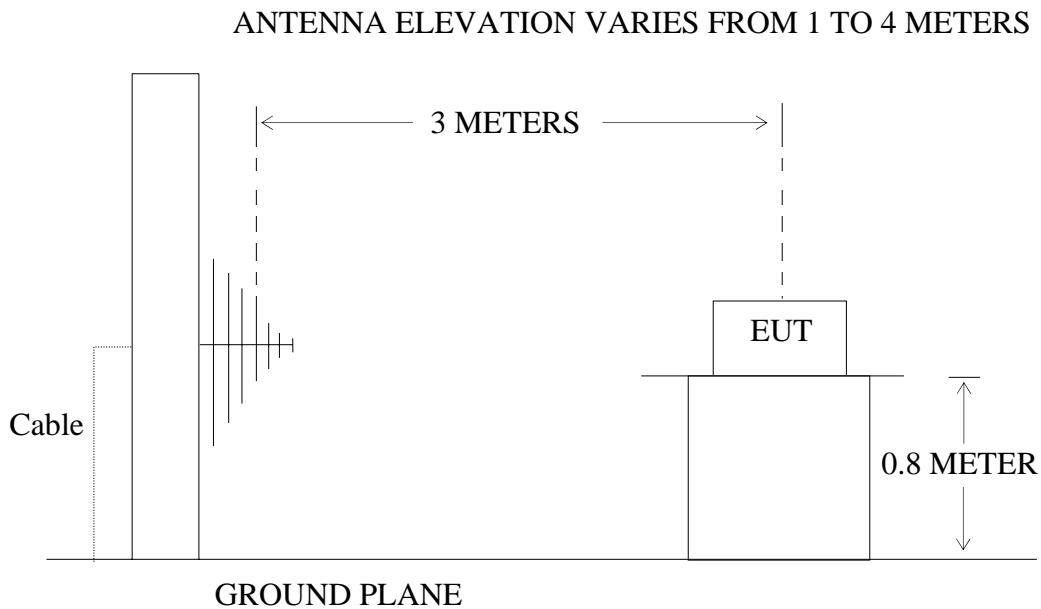

(EUT: Wireless Electronic Locator)

3.2. The Field Strength of Radiation Emission Measurement Limits

3.2.1. Radiation Emission Measurement Limits According to FCC Part 15 Section 15.231(b)

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Average] [μ V/m]	Field Strength of Spurious Emission [Average] [μ V/m]
40.66-40.70	2250	225
70-130	1250	125
130-174	1250-3750	125-375
174-260	3750	375
260-470	3750-12500	375-1250

Above 470	12500	1250
-----------	-------	------

Where F is the frequency in MHz, The formulas for calculating the maximum permitted fundamental field strengths are as follows: for the band 130-174MHz, μ V/m at 3 meters=56.81818(F)-6136.3636; For the band 260-470MHz, μ V/m at 3 meters=41.6667(F)-7083.3333. The maximum permissible unwanted emission level is 20dB below the maximum permitted fundamental level.

3.2.2. Restricted Band Radiation Emission Measurement Limits According to FCC part 15 Section 15.205 and Section15.209.

3.3. Configuration of EUT on Measurement

The following equipment are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.3.1. Wireless Electronic Locator (EUT)

Model Number : EZ Find
 Serial Number : N/A
 Manufacturer : Golden Regent Electronics Ind., Ltd.

3.4. Operating Condition of EUT

3.4.1. Setup the EUT and simulator as shown as Section 3.1.

3.4.2. Turn on the power of all equipment.

3.4.3. Let the EUT work in measuring modes (TX) measure it.

3.5. Test Procedure

The EUT and its simulators are placed on a turntable, which is 0.8 meter high above ground. The turntable can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on an antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bi-log antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the EUT location must be manipulated according to ANSI 63.4 on radiated emission measurement.

The bandwidth of test receiver (R&S ESI26) is set at 120KHz in 30-1000MHz, and 1MHz in 1000-5000MHz.

The frequency range from 30MHz to 5000MHz is checked.

3.6. The Field Strength of Radiation Emission Measurement Results PASS.

The frequency range 30MHz to 5000MHz is investigated.

Date of Test:	July 13, 2007	Temperature:	23°C
EUT:	Wireless Electronic Locator	Humidity:	49%
Model No.:	EZ Find	Power Supply:	4.5V DC ("AAA" battery Type×3)
Test Mode:	TX	Test Engineer:	Andy

Fundamental Emission

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr.	Average Factor	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
433.966	85.6	-16.1	-9.2	60.3	69.5	80.8	108.8	20.5	39.3	Horizontal
433.966	74.7	-16.1	-9.2	49.4	58.6	80.8	108.8	31.4	50.2	Vertical

Spurious Emission

Frequency (MHz)	Reading (dB μ V/m)	Factor Corr.	Average Factor	Result(dB μ V/m)		Limit(dB μ V/m)		Margin(dB μ V/m)		Polarization
	PEAK	(dB)	(dB)	AV	PEAK	AV	PEAK	AV	PEAK	
867.928	71.7	-12.1	-9.2	50.4	59.6	60.8	80.8	10.4	21.2	Horizontal
*1301.886	58.6	-7.2	-9.2	42.2	51.4	54	74	11.8	22.6	
1735.858	44.2	-5.7	-9.2	29.3	38.5	60.8	80.8	31.5	42.3	
2169.806	37.6	-4.5	-9.2	23.9	33.1	60.8	80.8	36.9	47.7	
2603.776	51.0	-3.0	-9.2	38.8	48.0	60.8	80.8	22.0	32.8	
3037.747	49.3	-1.8	-9.2	38.3	47.5	60.8	80.8	22.5	33.3	
3471.689	40.4	-0.4	-9.2	30.8	40.0	60.8	80.8	30.0	40.8	
*3905.635	35.1	0.7	-9.2	26.6	35.8	54	74	27.4	38.2	
*4339.609	37.4	1.5	-9.2	29.7	38.9	54	74	24.3	35.1	
*4773.575	45.0	2.0	-9.2	37.8	47.0	54	74	16.2	27.0	
867.928	57.9	-12.1	-9.2	36.6	45.8	60.8	80.8	24.2	35.0	Vertical
*1301.886	62.1	-7.2	-9.2	45.7	54.9	54	74	8.3	19.1	
1735.858	45.5	-5.7	-9.2	30.6	39.8	60.8	80.8	30.2	41.0	
2169.806	39.4	-4.5	-9.2	25.7	34.9	60.8	80.8	35.1	45.9	
2603.776	51.3	-3.0	-9.2	39.1	48.3	60.8	80.8	21.7	32.5	
3037.747	49.5	-1.8	-9.2	38.5	47.7	60.8	80.8	22.3	33.1	
3471.689	39.0	-0.4	-9.2	29.4	38.6	60.8	80.8	31.4	42.2	

*3905.635	38.0	0.7	-9.2	29.5	38.7	54	74	24.5	35.3	
*4339.609	37.2	1.5	-9.2	29.5	38.7	54	74	24.5	35.3	
*4773.575	44.0	2.0	-9.2	36.8	46.0	54	74	17.2	28.0	

Note:

1. *: Denotes restricted band of operation.

Measurements were made using a peak detector and average detector. Any emission Above 1000MHz and falling within the restricted bands of FCC Part 15 Section 15.205 were compliance with the emission limit of FCC Part 15 Section 15.209.

2. The field strength is calculated by adding the antenna factor, high pass filter loss(if used) and cable loss, and subtracting the amplifier gain(if any)from the measured reading. The basic equation calculation is as follows:


$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

Where Corrected Factor = Antenna Factor + Cable Loss + High Pass Filter Loss – Amplifier Gain

$$3. \text{ FCC Limit for Average Measurement} = 41.6667(433)-7083.3333 = 10958.3478\mu\text{V/m}=80.8\text{dB}\mu\text{V/m}$$

4. The spectral diagrams in appendix I display the measurement of peak values.

Reviewer :



4. 20DB OCCUPIED BANDWIDTH


4.1. Block Diagram of Test Setup

4.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Electronic Locator)

4.1.2. Anechoic Chamber Test Setup Diagram

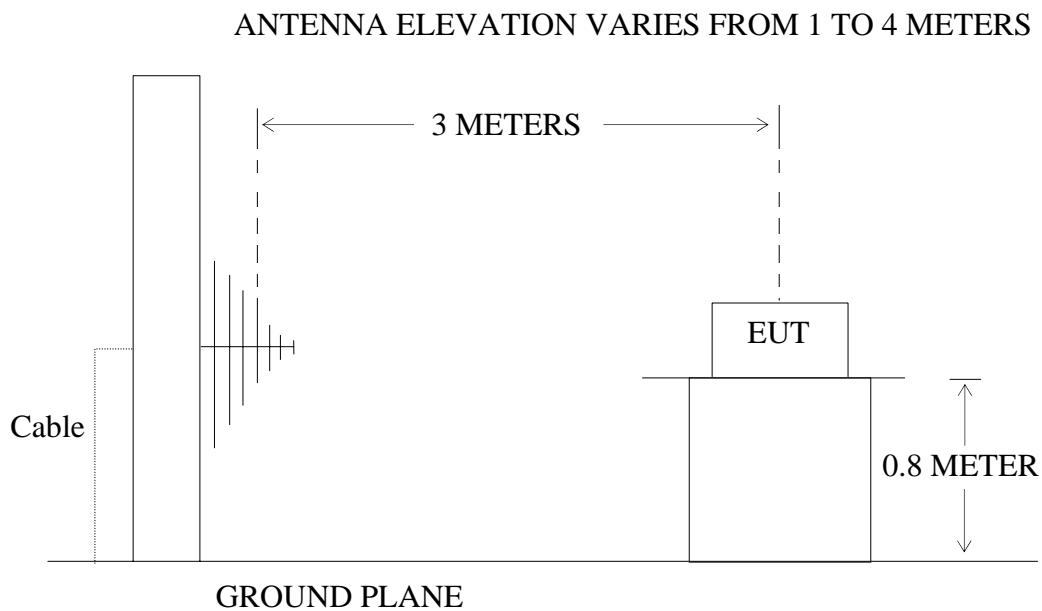

(EUT: Wireless Electronic Locator)

4.2. The Bandwidth of Emission Limit According To FCC Part 15 Section

15.231(c)

The bandwidth of emission shall be no wider than 0.25% of the center frequency. Therefore, the bandwidth of the emission limit is $433\text{MHz} \times 0.25\% = 1082.5\text{KHz}$. Bandwidth is determined at the two points 20 dB down from the top of modulated carrier.

4.3. EUT Configuration on Measurement

The following equipment are installed on the bandwidth of emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

4.3.1. Wireless Electronic Locator (EUT)

Model Number : EZ Find
Serial Number : N/A
Manufacturer : Golden Regent Electronics Ind., Ltd.

4.4. Operating Condition of EUT

- 4.4.1. Setup the EUT and simulator as shown as Section 4.1.
- 4.4.2. Turn on the power of all equipment.
- 4.4.3. Let the EUT work in measuring mode (TX) measure it.

4.5. Test Procedure

- 4.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 10kHz, VBW = 30kHz, Span = 100kHz.
- 4.5.2. Set SPA Max hold. Mark peak, -20dB

4.6. Measurement Result

The EUT does meet the FCC requirement.

-20dB bandwidth = 26.8KHz < 1082.5KHz.

The spectral diagrams in appendix I.

Reviewer : Sean

5. RELEASE TIME MEASUREMENT


5.1. Block Diagram of Test Setup

5.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Electronic Locator)

5.1.2. Anechoic Chamber Test Setup Diagram

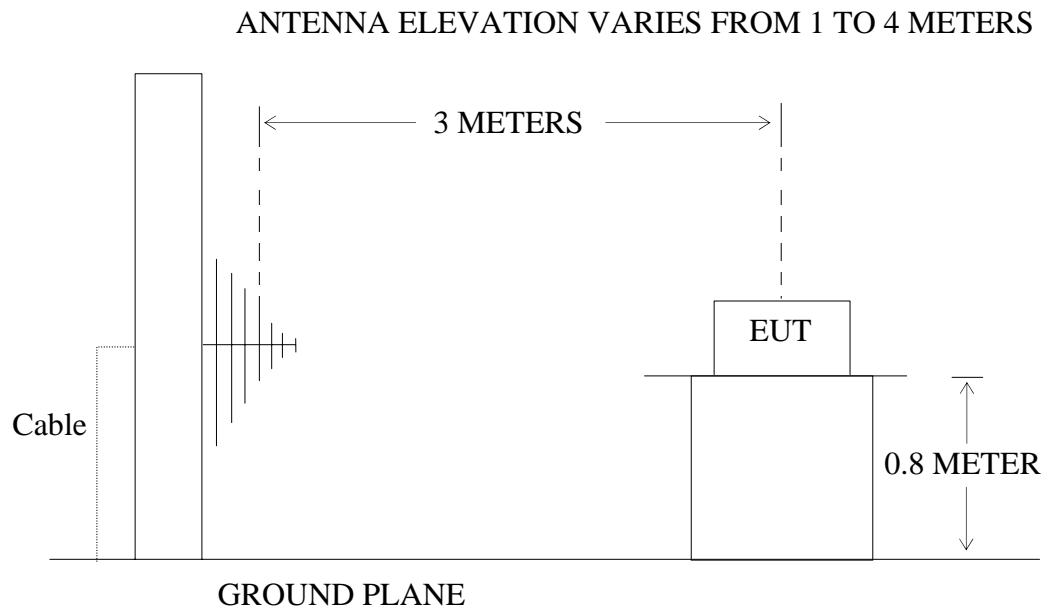

(EUT: Wireless Electronic Locator)

5.2. Release Time Measurement According To FCC Part 15 Section 15.231(a)

Section 15.231(a) (1) A manually operated transmitter shall employ a switch that will automatically deactivate the transmitter within not more than 5 seconds of being released.

5.3. EUT Configuration on Measurement

The following equipment are installed on Release Time Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

5.3.1. Wireless Electronic Locator (EUT)

Model Number : EZ Find
Serial Number : N/A
Manufacturer : Golden Regent Electronics Ind., Ltd.

5.4. Operating Condition of EUT

5.4.1. Setup the EUT and simulator as shown as Section 5.1.

5.4.2. Turn on the power of all equipment.

5.4.3. Let the EUT work in measuring mode (TX) measure it.

5.5. Test Procedure

5.5.1. Set SPA Center Frequency = Fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 0Hz. Sweep time = 10seconds.

5.5.2. Set EUT as normal operation and press Transmitter 'find' button.

5.5.3. Set SPA View. Delta Mark time.

5.6. Measurement Result

The release time less than 5 seconds.

Release Time= 4.00 s < 5 s

The spectral diagrams in appendix I.

Reviewer : Seaw

6. AVERAGE FACTOR MEASUREMENT


6.1. Block Diagram of Test Setup

6.1.1. Block diagram of connection between the EUT and simulators



(EUT: Wireless Electronic Locator)

6.1.2. Anechoic Chamber Test Setup Diagram

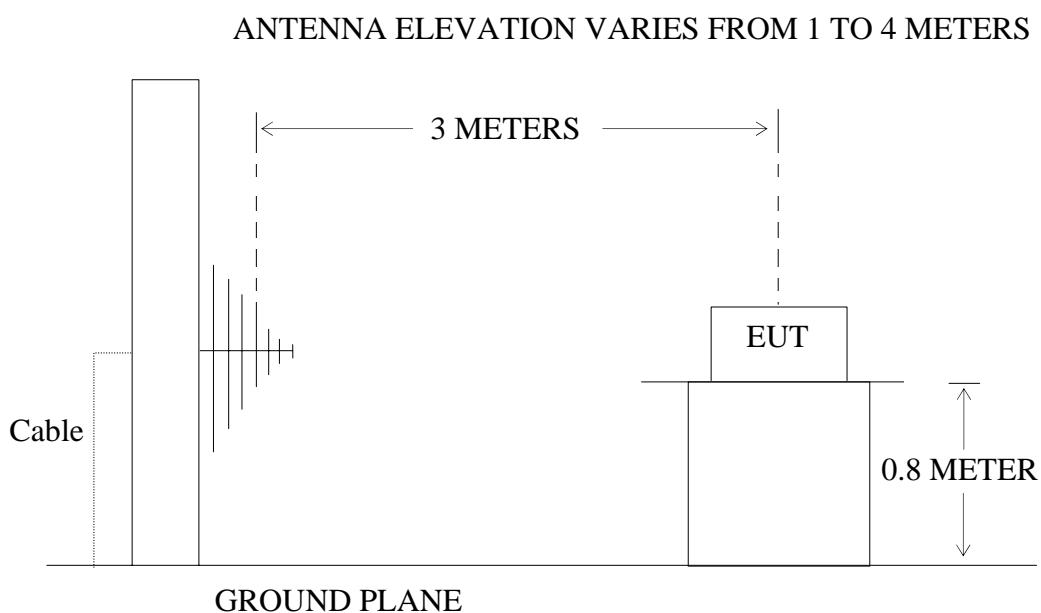

(EUT: Wireless Electronic Locator)

6.2. Average factor Measurement according to ANSI 63.4: 2003

ANSI 63.4: 2003 Section 13.1.4.2 Devices transmitting pulsed emissions and subject to a limit requiring an average detector function for radiated emissions shall initially be measured with an instrument that uses a peak detector. A radiated emission measured with a peak detector may then be corrected to a true average using the appropriate factor for emission duty cycle. This correction factor relates the measured peak level to the average limit and is derived by averaging absolute field strength over one complete pulse train that is 0.1 s, or less, in length. If the pulse train is longer than 0.1 s, the average shall be determined from the average absolute field strength during the 0.1 s interval in which the field strength is at a maximum. Instructions on calculating the duty cycle of a transmitter with pulsed emissions are provided in ANSI 63.4 H.4, step j.

Average factor in dB = $20 \log (\text{duty cycle})$

6.3. EUT Configuration on Measurement

The following equipment are installed on average factor Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

6.3.1. Wireless Electronic Locator (EUT)

Model Number	:	EZ Find
Serial Number	:	N/A
Manufacturer	:	Golden Regent Electronics Ind., Ltd.

6.4. Operating Condition of EUT

6.4.1. Setup the EUT and simulator as shown as Section 6.1.

6.4.2. Turn on the power of all equipment.

6.4.3. Let the EUT work in measuring mode (TX) measure it.

6.5. Test Procedure

6.5.1. The time period over which the duty cycle is measured is 100 milliseconds, or the repetition cycle, whichever is a shorter time frame. The worst case (highest percentage on) duty cycle is used for the calculation.

6.5.2. Set SPA Center Frequency = Fundamental frequency, RBW = 100kHz, VBW = 300kHz, Span = 0Hz.

6.5.3. Set EUT as normal operation.

6.5.4. Set SPA View. Delta Mark time.

6.6. Measurement Result

The duty cycle is simply the on time divided by the period:

The duration of one cycle = 100ms

Effective period of the cycle = $(3 \times 1.32) + (25 \times 0.82) + (36 \times 0.276)$ ms = 34.396ms

Duty Cycle = 34.396ms/100ms = 0.34396

Therefore, the average factor is found by $20\log 0.34396 = -9.2\text{dB}$

The spectral diagrams in appendix I.


Reviewer :



APPENDIX I (Test Curves)


*Radiated Disturbance**FCC Part 15*

EUT: Wireless Electronic Loator M/N: EZ Find
 Manufacturer: Golden Regent Electronics Ind., Ltd.
 Operating Condition: TX
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Horizontal
 Comment : DC 4.5V

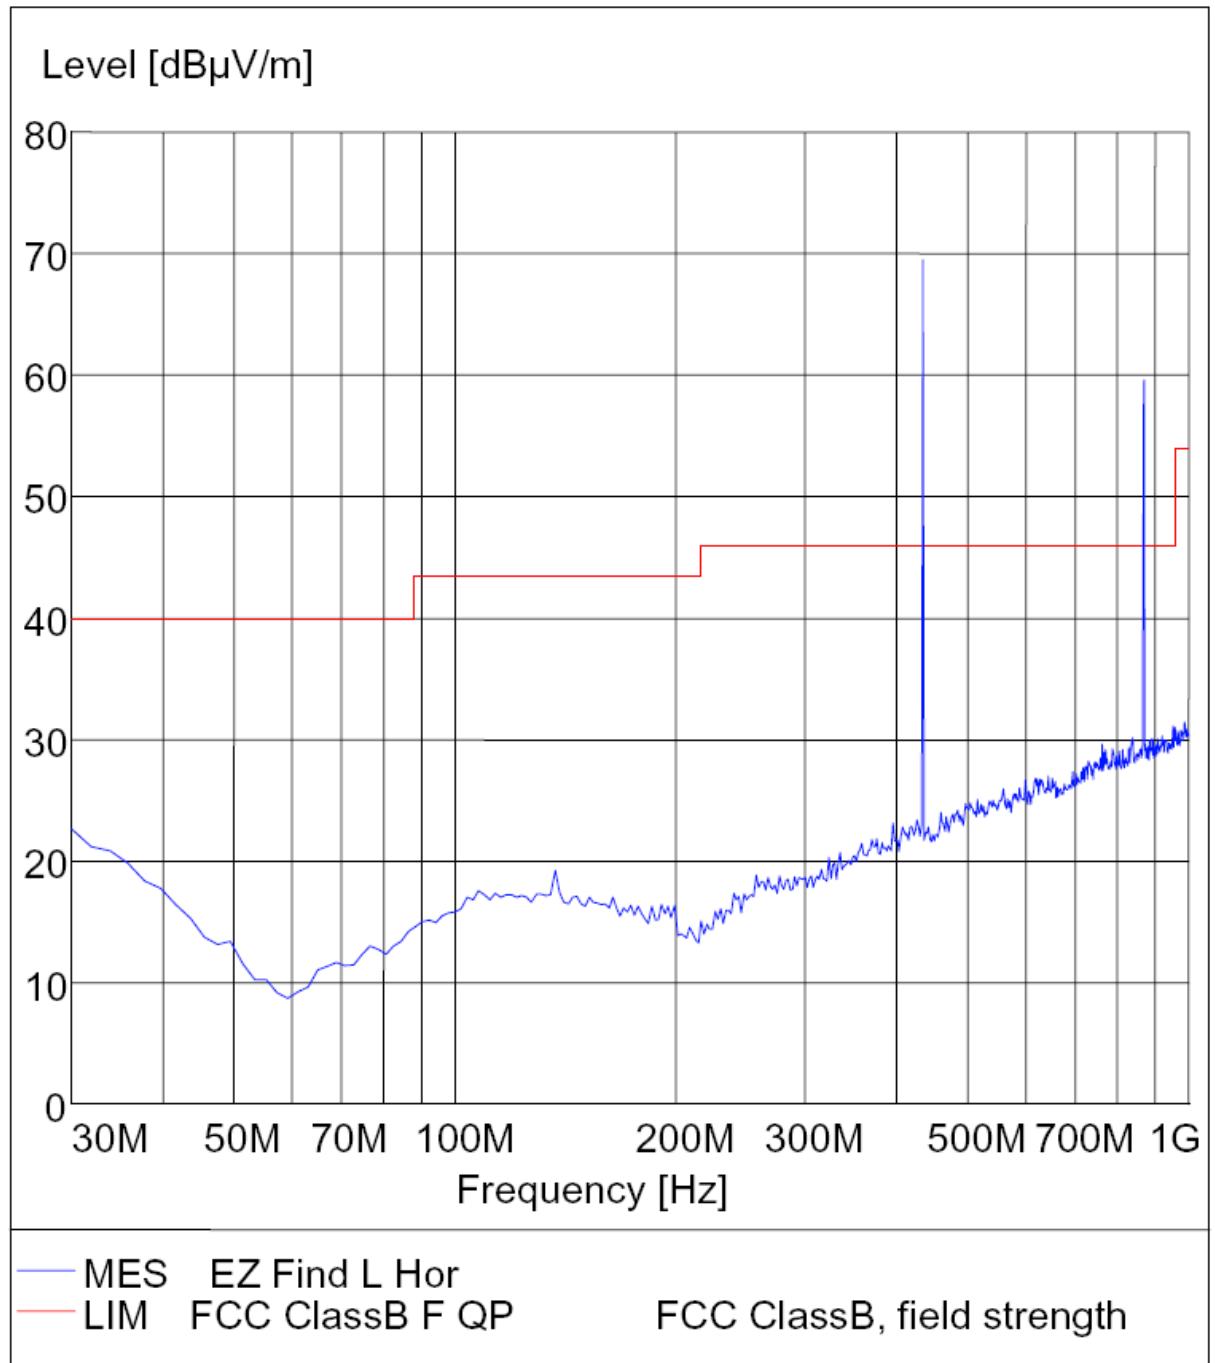


Radiated Disturbance**FCC Part 15**

EUT: Wireless Electronic Loator M/N: EZ Find
 Manufacturer: Golden Regent Electronics Ind., Ltd.
 Operating Condition: TX
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Vertical
 Comment : DC 4.5V

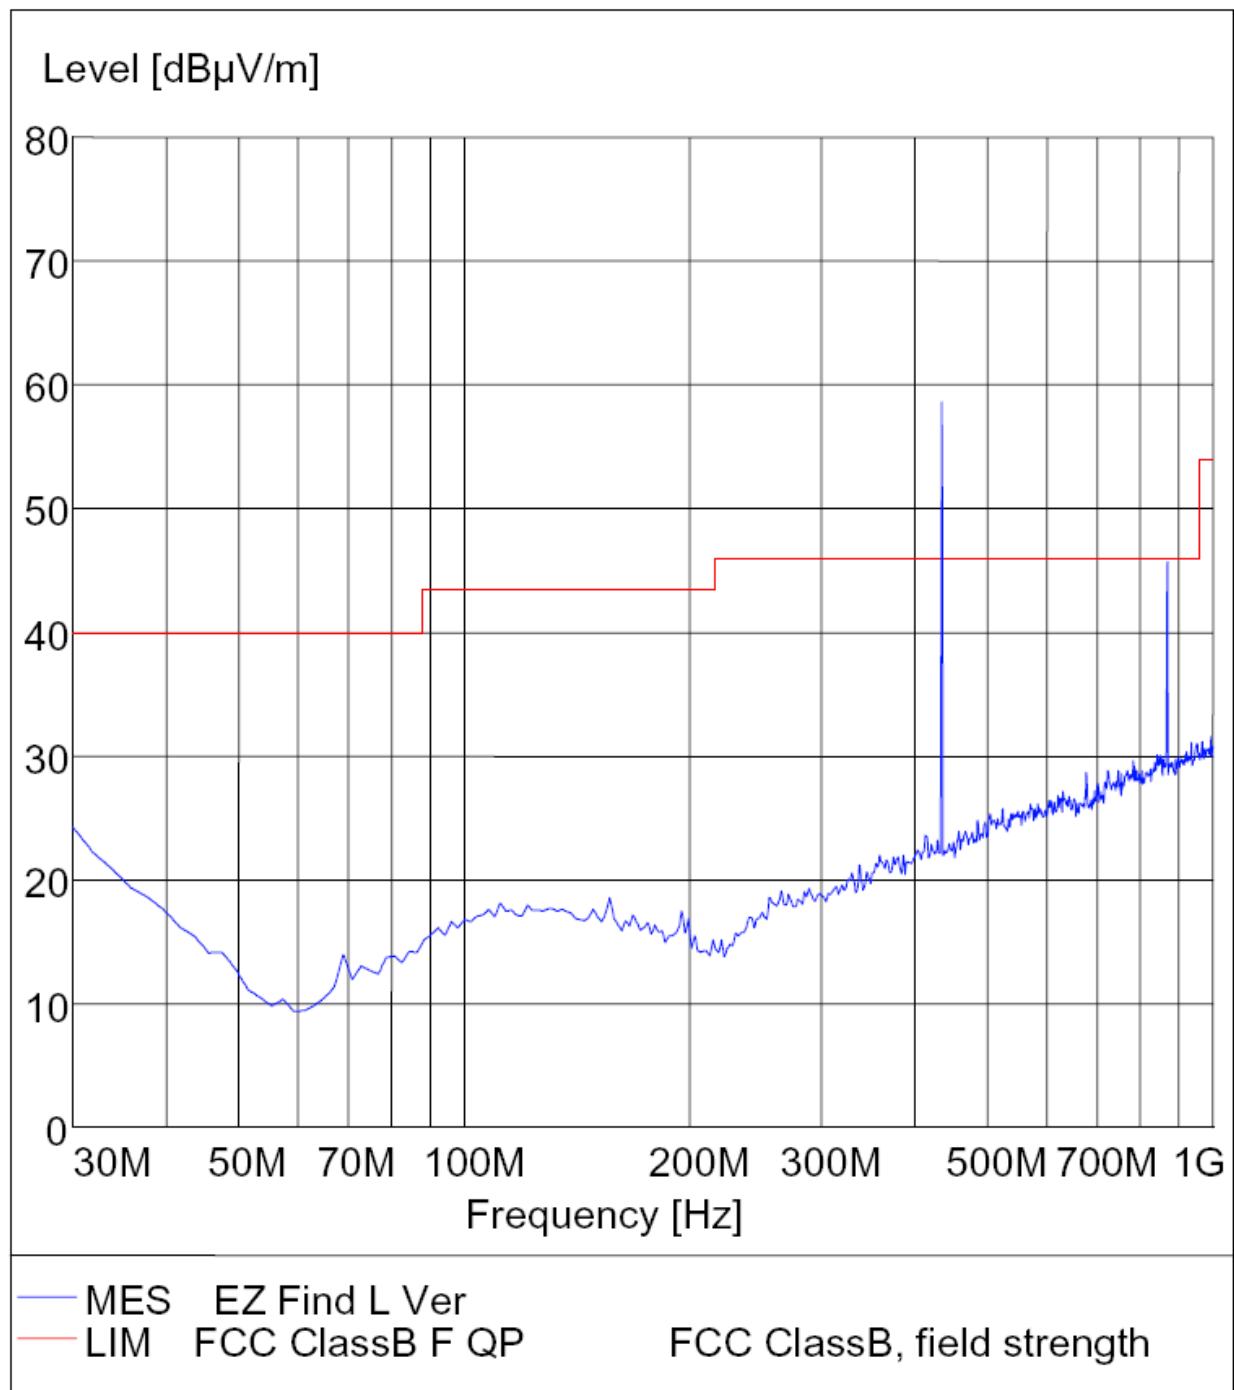


*Radiated Disturbance**FCC Part 15*


EUT: Wireless Electronic Loator M/N: EZ Find
 Manufacturer: Golden Regent Electronics Ind., Ltd.
 Operating Condition: TX
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Horizontal
 Comment: DC 4.5V

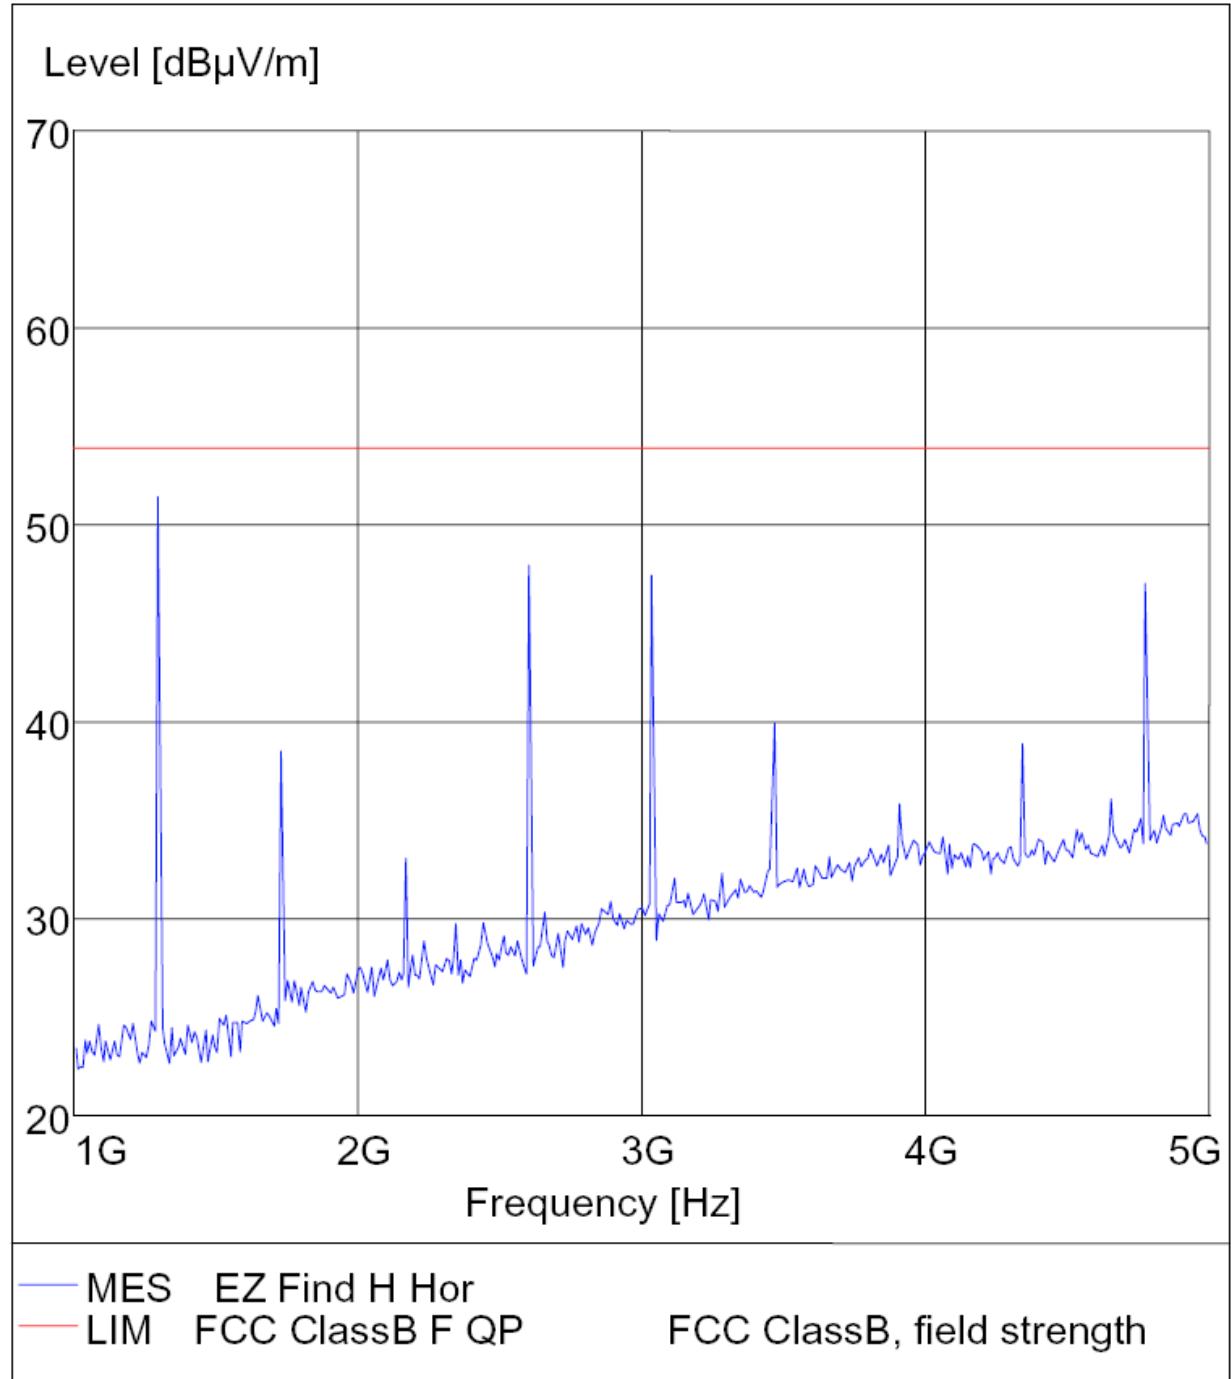



*Radiated Disturbance**FCC Part 15*

EUT: Wireless Electronic Loator M/N: EZ Find
 Manufacturer: Golden Regent Electronics Ind., Ltd.
 Operating Condition: TX
 Test Site: ATC EMC Lab.SAC
 Operator: Andy
 Test Specification: Vertical
 Comment: DC 4.5V

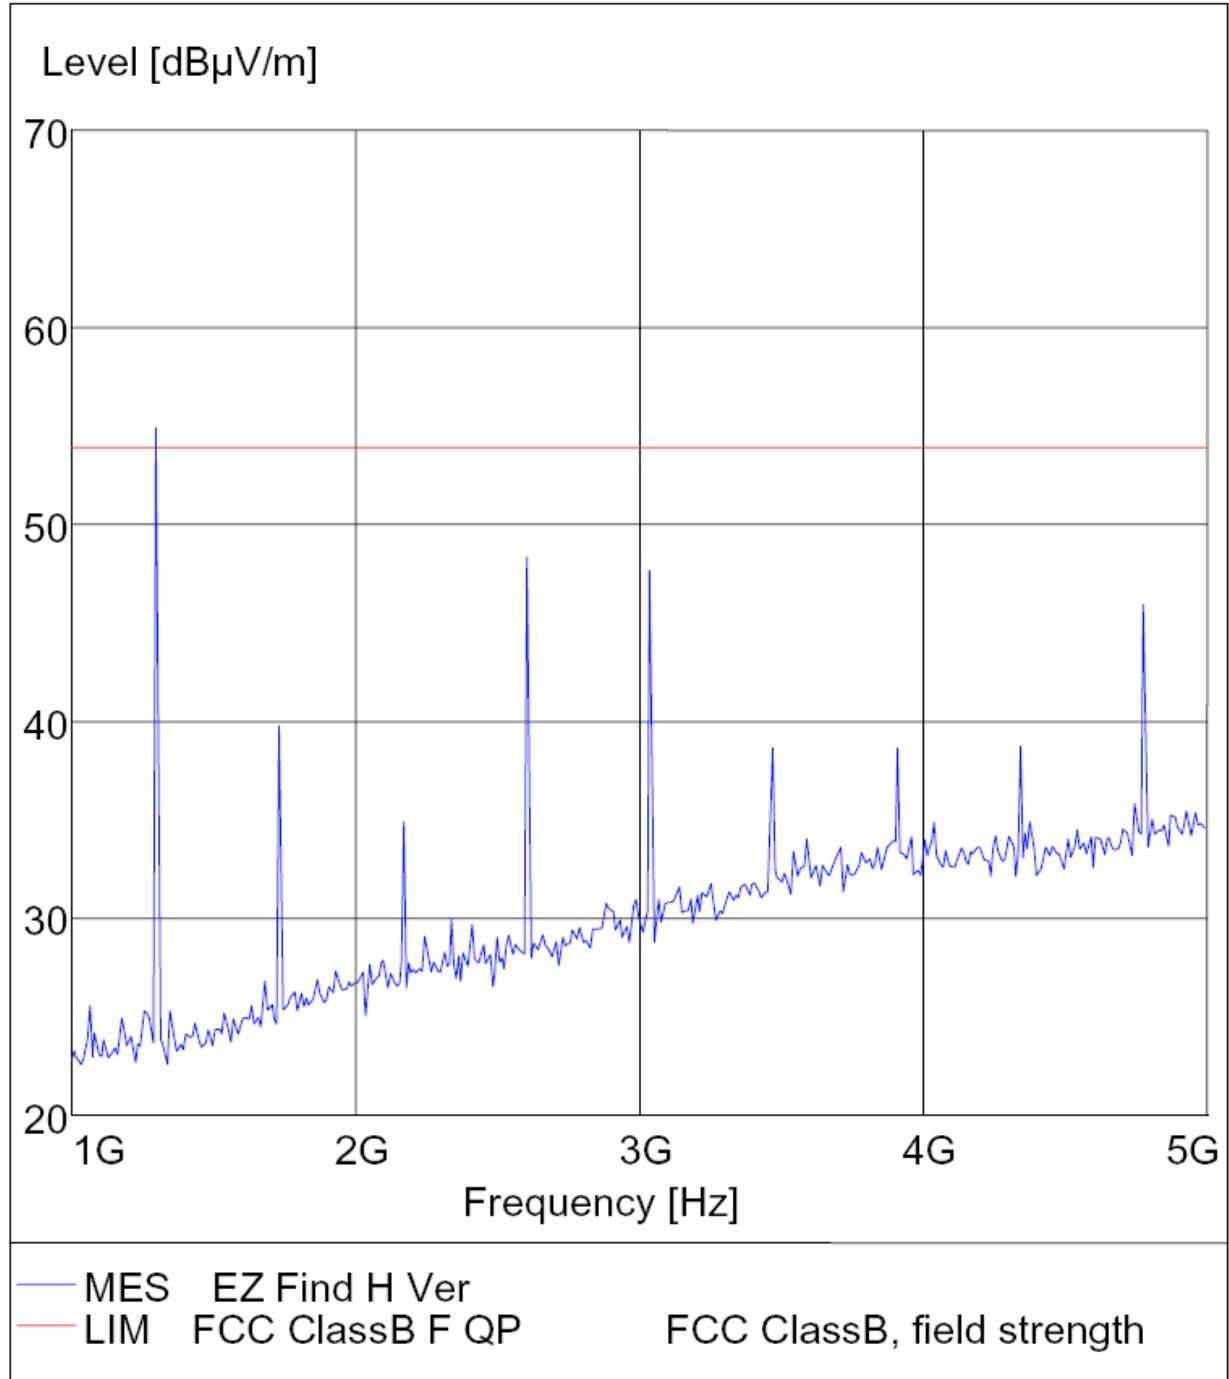


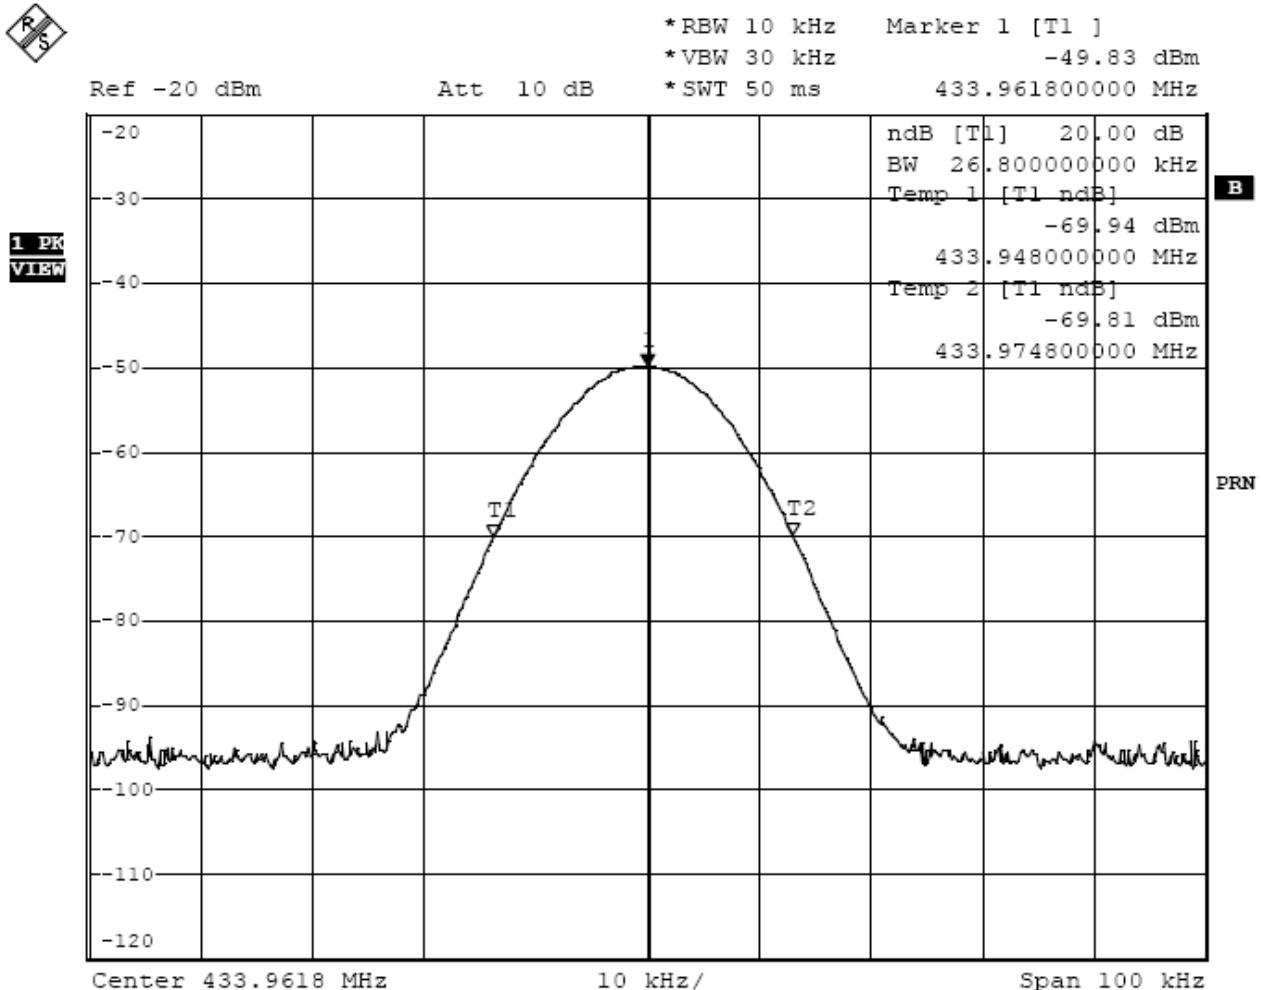

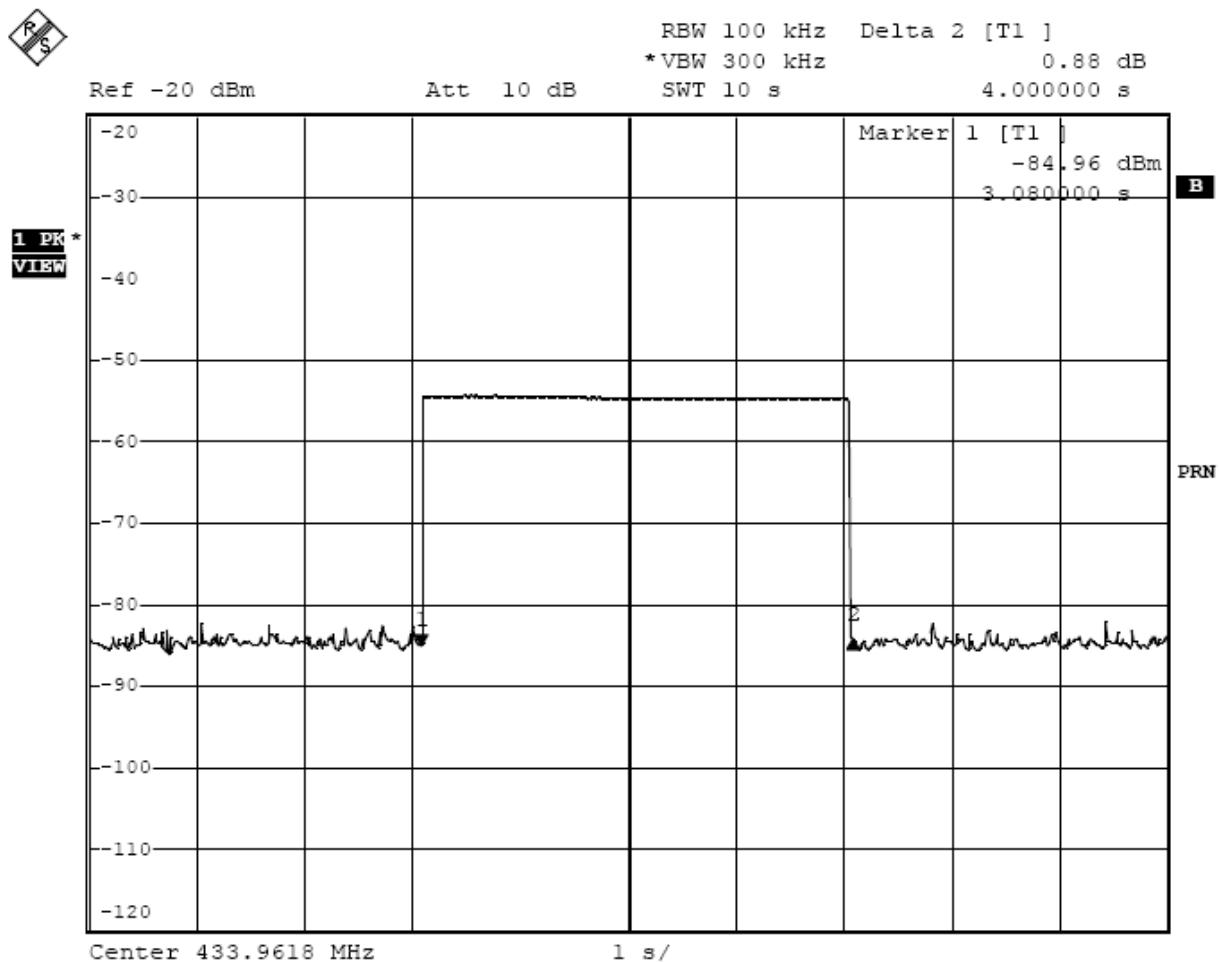


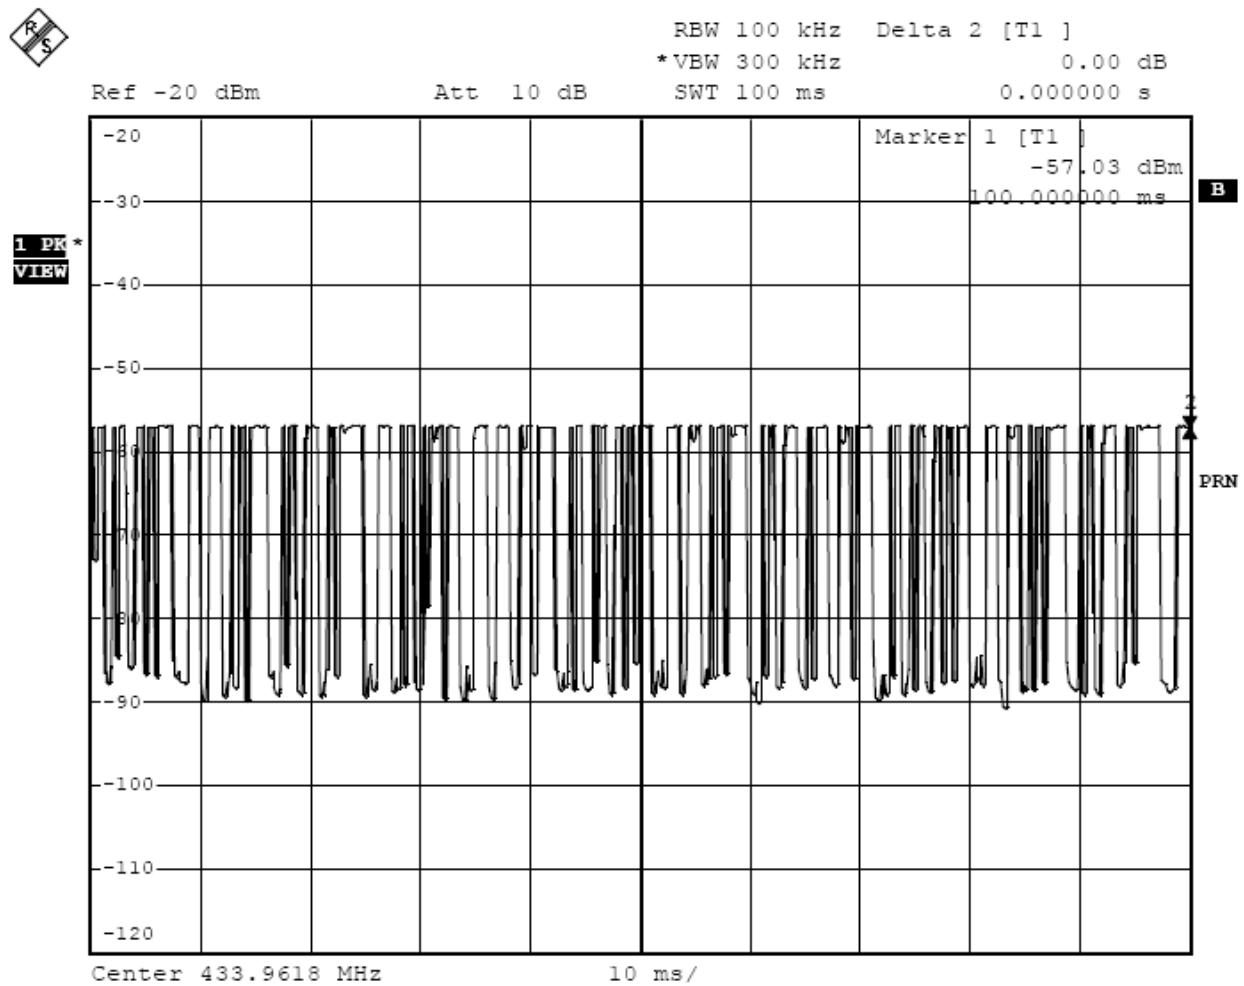


The graph shows the pattern of coding during the signal transmission.
 It sums of 3 long 'on' signals and 25 middle 'on' signals and 36 short 'on' signals.

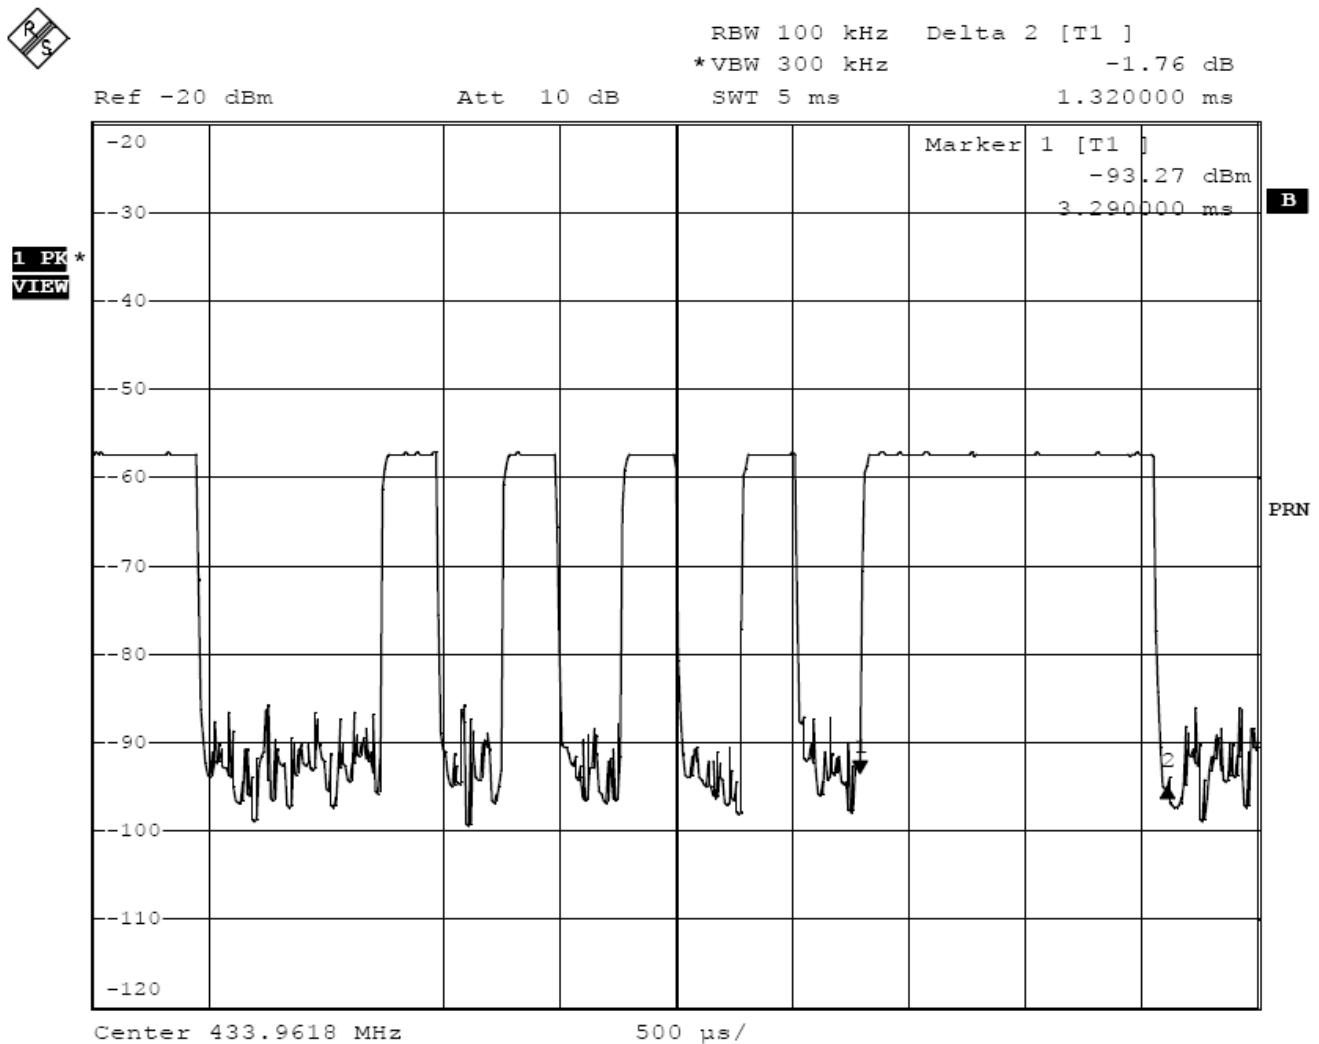

The graph shows the duration of long 'on' signal. From marker 1 to marker 2, duration is 1.32ms.

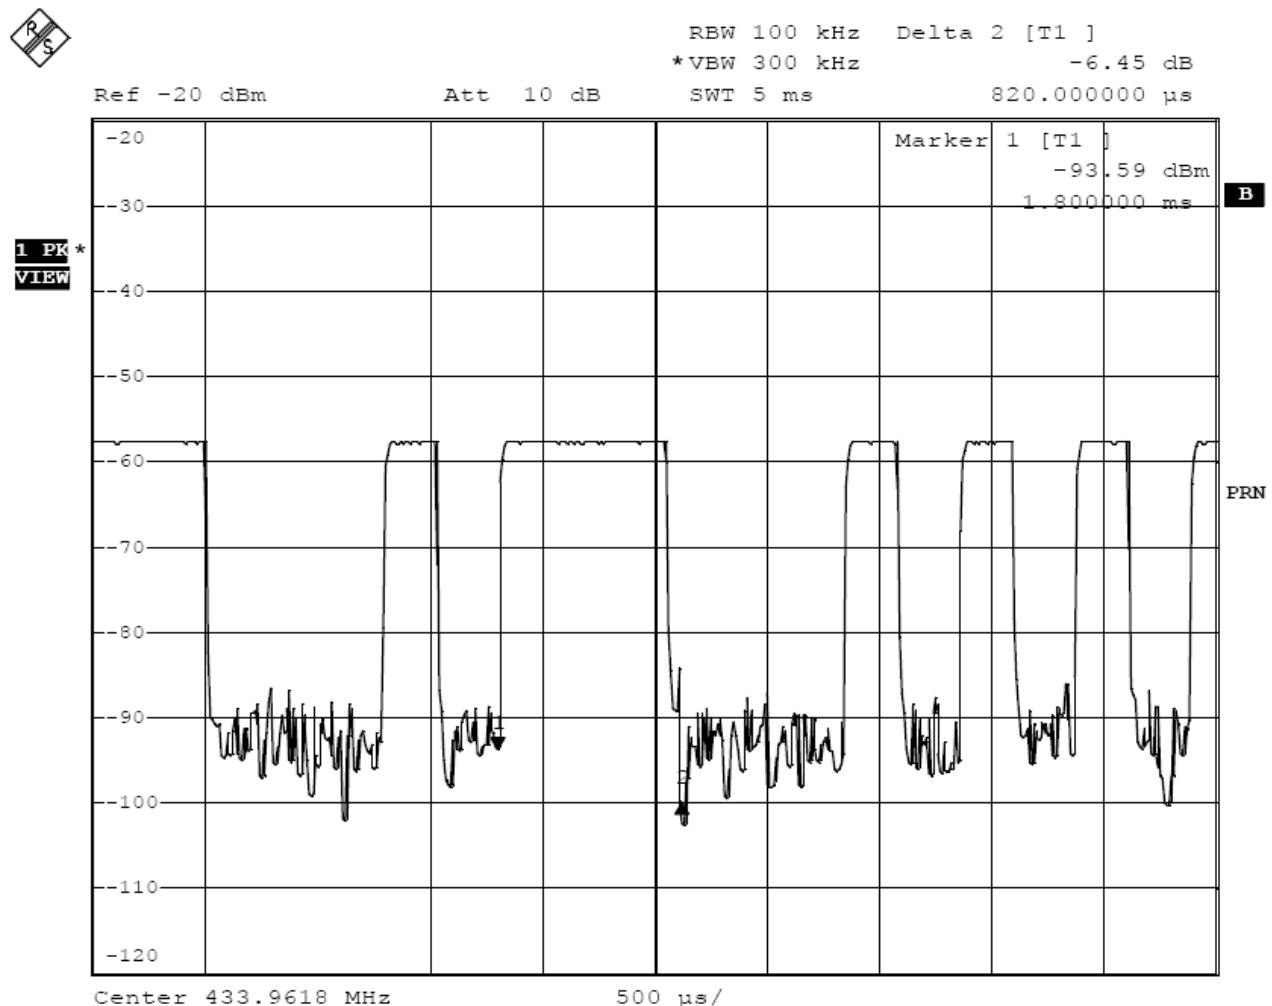

The graph shows the duration of middle 'on' signal. From marker 1 to marker 2, duration is 0.82ms.

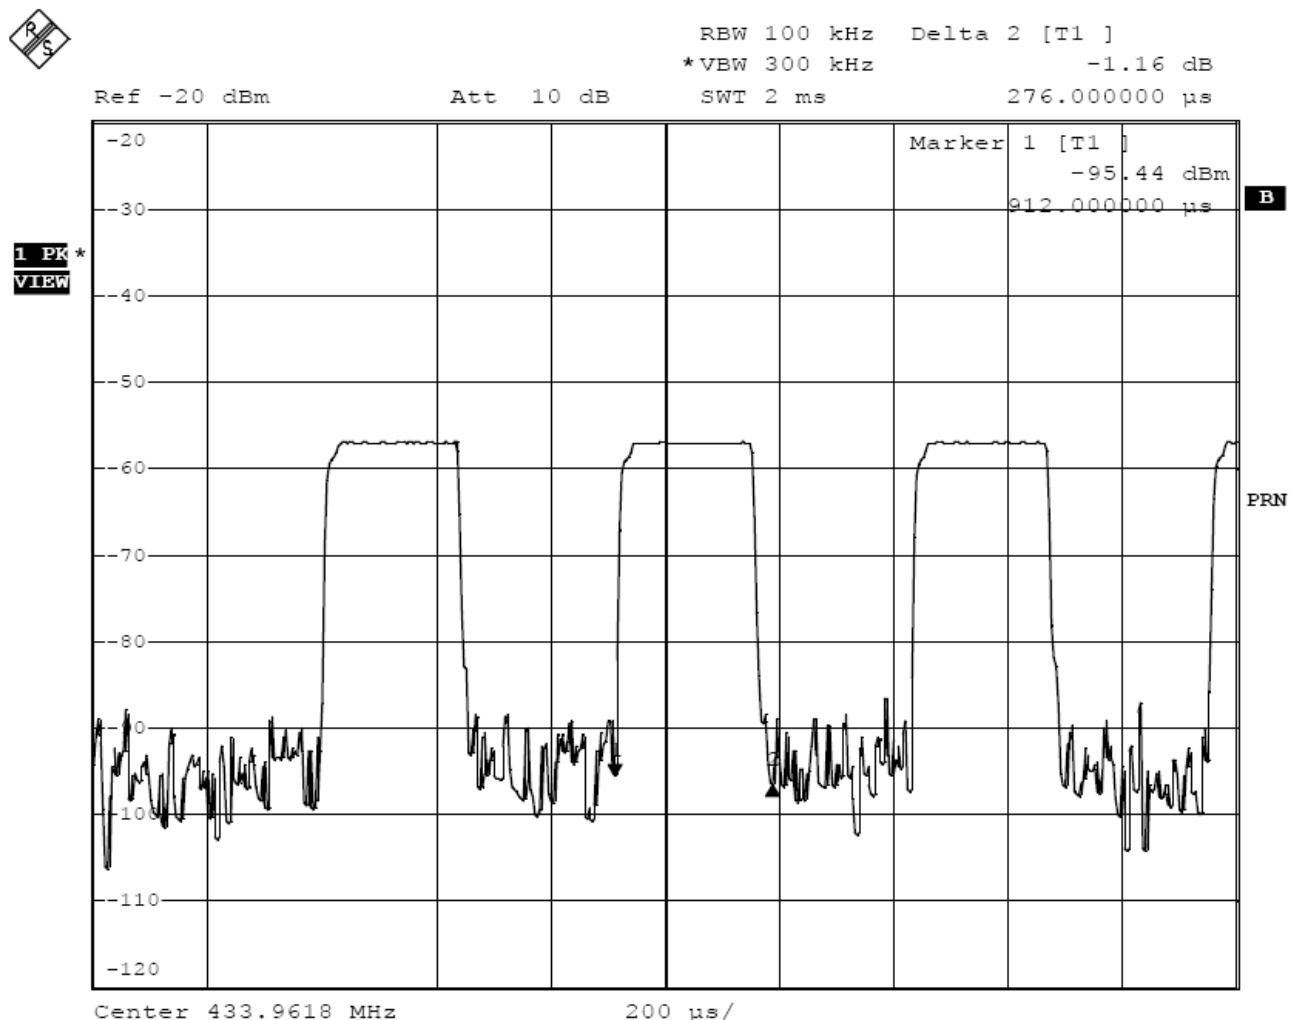

The graph shows the duration of short 'on' signal. From marker 1 to marker 2, duration is 0.276ms.