FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

Firewall appliance for SMB

Model: SX-50

Trade Name: Halon

Issued for

Halon Security Attahogsgatan 8:b, 416 74 Gothenburg, Sweden

Issued by



Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
http://www.ccsemc.com.tw
service@tw.ccsemc.com



Date of Issue: May 17, 2007

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

TABLE OF CONTENTS

| 1. T | EST RESULT CERTIFICATION | 3 |
|-------|--|----|
| 2. E | UT DESCRIPTION | 4 |
| 3. T | EST METHODOLOGY | 5 |
| 3.1 | EUT CONFIGURATION | 5 |
| 3.2 | EUT EXERCISE | |
| 3.3 | GENERAL TEST PROCEDURES | |
| 3.4 | FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS | 6 |
| 3.5 | DESCRIPTION OF TEST MODES | 7 |
| 4. IN | NSTRUMENT CALIBRATION | 8 |
| 4.1 | MEASURING INSTRUMENT CALIBRATION | 8 |
| 4.2 | MEASUREMENT EQUIPMENT USED | |
| 5. F. | ACILITIES AND ACCREDITATIONS | 9 |
| 5.1 | FACILITIES | 9 |
| 5.2 | EQUIPMENT | |
| 5.3 | TABLE OF ACCREDITATIONS AND LISTINGS. | |
| 6. Sl | ETUP OF EQUIPMENT UNDER TEST | 11 |
| 6.1 | SETUP CONFIGURATION OF EUT | 11 |
| 6.2 | SUPPORT EQUIPMENT | 11 |
| 7. F | CC PART 15.247 REQUIREMENTS | 12 |
| 7.1 | 6DB BANDWIDTH | 12 |
| 7.2 | PEAK POWER | |
| 7.3 | BAND EDGES MEASUREMENT | 20 |
| 7.4 | PEAK POWER SPECTRAL DENSITY | 29 |
| 7.5 | SPURIOUS EMISSIONS | 34 |
| 7.6 | POWERLINE CONDUCTED EMISSIONS | 48 |
| APPE | ENDIX I RADIO FREQUENCY EXPOSURE | 51 |
| APPE | ENDIX II PHOTOGRAPHS OF TEST SETUP | 53 |

1. TEST RESULT CERTIFICATION

Applicant: Halon Security

Attahogsgatan 8:b, 416 74 Gothenburg, Sweden

Date of Issue: May 17, 2007

Equipment Under Test: Firewall appliance for SMB

Trade Name: Halon **Model:** SX-50

Date of Test: January 22 ~ March 8, 2007

| APPLICABLE STANDARDS | | | |
|------------------------------|-------------------------|--|--|
| STANDARD TEST RESULT | | | |
| FCC 47 CFR Part 15 Subpart C | No non-compliance noted | | |

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by: Reviewed by:

S.C. Wang

Executive Vice President

Compliance Certification Services Inc.

Miller Lee

Deputy Manager of Linkou Laboratory Compliance Certification Services Inc.

Mille Lee

Page 3 Rev. 00

2. EUT DESCRIPTION

| Product | Firewall appliance for SMB |
|-----------------------|--|
| Trade Name | Halon |
| Model Number | SX-50 |
| Model Discrepancy | N/A |
| Power Supply | Power Adapter: SUNPOWER / SPD-050-05 I/P: 100-240VAC, 47-63Hz, 1.2A O/P: 5VDC, 8A |
| Frequency Range | 2412 ~ 2462 MHz |
| Transmit Power | IEEE 802.11b: 18.02 dBm IEEE 802.11g: 14.51 dBm |
| Modulation Technique | IEEE802.11b: DSSS IEEE802.11g: OFDM |
| Transmit Data Rate | IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps |
| Number of Channels | 11 Channels |
| Antenna Specification | Gain: 2 dBi |
| Antenna Designation | Dipole Antenna |

Remark:

- 1. The sample selected for test was production product and was provided by manufacturer.
- 2. This submittal(s) (test report) is intended for FCC ID: <u>VHZSX-50</u> filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.

Page 4 Rev. 00

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

Date of Issue: May 17, 2007

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.

Page 5 Rev. 00

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

Date of Issue: May 17, 2007

| MHz | MHz | MHz | GHz |
|----------------------------|---------------------|-----------------|------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.52525 | 2655 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 156.7 - 156.9 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 162.0125 - 167.17 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 167.72 - 173.2 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 240 - 285 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | 322 - 335.4 | | |

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

Page 6 Rev. 00

² Above 38.6

⁽b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: SX-50) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

Date of Issue: May 17, 2007

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode only.

The worst case data rate is determined as the data rate with highest output power.

IEEE802.11b mode:

Channel Low, Channel Mid and Channel High with 1Mbps data rate were chosen for full testing.

IEEE802.11g mode:

Channel Low, Channel Mid and Channel High with 6Mbps data rate were chosen for full testing.

Page 7 Rev. 00

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

Date of Issue: May 17, 2007

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

| Conducted Emissions Test Site | | | | | | | |
|-------------------------------|--|-------|--------|------------|--|--|--|
| Name of Equipment | Name of Equipment Manufacturer Model Serial Number Calibration Due | | | | | | |
| Spectrum Analyzer | R&S | FSP30 | 100112 | 09/12/2007 | | | |

| Open Area Test Site # 3 | | | | | | |
|-------------------------|-----------------|------------------------------|---------------|-----------------|--|--|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Due | | |
| Spectrum Analyzer | Agilnet | E4411B | MY41440314 | N.C.R | | |
| Spectrum Analyzer | R&S | FSP30 | 100112 | 10/10/2007 | | |
| EMI Test Receiver | SCHAFFNER | SCR 3501 | 436 | 11/22/2007 | | |
| Pre-Amplifier | Anritsu | MH648A | M18767 | 08/31/2007 | | |
| Pre-Amplifier | MITEQ | AFS42-00102650- 42-10P-42 | 924206 | 04/27/2008 | | |
| Bilog Antenna | SCHWAZBECK | VULB9163 | 144 | 03/31/2008 | | |
| Horn Antenna | EMCO | 3115 | 00022250 | 04/16/2008 | | |
| Loop Antenna | EMCO | 6502 | 2356 | N.C.R | | |
| Turn Table | Chance Most | CM-T003-1 | T807-6 | N.C.R | | |
| Antenna Tower | Chance Most | CM-A003-1 | A807-6 | N.C.R | | |
| Controller | CCS | CC-C-1F | N/A | N.C.R | | |
| RF Switch | ANRITSU | MP59B | M53867 | N.C.R | | |
| Site NSA | CCS | N/A | N/A | 05/05/2008 | | |
| Test S/W | LABVIEW (V 6.1) | | | | | |

Remark: The measurement uncertainty is less than +/- 4.5248dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

| Powerline Conducted Emissions Test Site | | | | | | | |
|--|---|--------|------------|------------|--|--|--|
| Name of Equipment Manufacturer Model Serial Number Calibration Due | | | | | | | |
| EMI TEST RECEIVER 9kHz-30MHz | ROHDE & SCHWARZ | ESHS30 | 828144/003 | 10/31/2007 | | | |
| TWO-LINE V-NETWORK 9kHz-30MHz | SCHAFFNER | NNB41 | 03/10013 | 06/14/2008 | | | |
| LISN 10kHz-100MHz | SN 10kHz-100MHz EMCO 3825/2 9106-1809 03/20/200 | | | | | | |
| Test S/W | LABVIEW (V 6.1) | | | | | | |

Remark: The measurement uncertainty is less than +/- 3.4600dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Page 8 Rev. 00

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

| All 1 | measurement facilities used to collect the measurement data are located at |
|-------|--|
| | No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C. Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029 |
| | No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045 |
| | No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan Tel: 886-3-324-0332 / Fax: 886-3-324-5235 |

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

Page 9 Rev. 00

5.3 TABLE OF ACCREDITATIONS AND LISTINGS

The test facilities used to perform Electromagnetic compatibility tests are registered or accredited by the organizations listed in the following table which includes the recognized scope specifically. This accredited organization maintains A2LA accreditation to ISO/IEC 17025 for the specific test listed in A2LA Certificate # 0824-01.

Date of Issue: May 17, 2007

| Country | Agency | Scope of Accreditation | Logo |
|---------|--------------------|---|--|
| USA | A2LA | EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001 | ACCREDITED 0824-01 |
| USA | FCC | 3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements | FC 93105, 90471 |
| Japan | VCCI | 3/10 meter Open Area Test Sites and conducted test sites to perform radiated/conducted measurements | VCCI R- 2541/2316/725/1868 C-402/747/912 |
| Norway | NEMKO | EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328-2, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2 | ELA 124a ELA 124b ELA 124c |
| Taiwan | TAF | EN 300 328-1, EN 300 328-2, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3 | Testing Laboratory 0363 |
| Taiwan | BSMI | CNS 13438, CNS 13783-1, CNS 13439, CNS 14115 | SL2-IS-E-0014 / IN-E-0014 /A1-E-0014 /R1-E-0014 /R2-E-0014 /L1-E-0014 |
| Canada | Industry Canada | RSS212, Issue 1 | Canada IC 2324C-3 IC 2324C-5 |

Note: No part of this report may be used to claim or imply product endorsement by TAF, CNLA or other government agency.

Page 10 Rev. 00

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix 1 for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

| No. | Device Type | Brand | Model | Series No. | FCC ID | Data Cable | Power Cord |
|-----|-------------|----------|----------|------------|--------|-------------------------------|---|
| 1. | Notebook PC | PDG-6GFP | J000YXJM | FCC DOC | SONY | LAN Cable: Unshielded, 10m | AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core |

Date of Issue: May 17, 2007

Remark: Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

Page 11 Rev. 00


7. FCC PART 15.247 REQUIREMENTS

7.1 6dB BANDWIDTH

LIMIT

For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in the transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 20 MHz, Sweep = auto.
- 4. Mark the peak frequency and –6dB (upper and lower) frequency.
- 5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit (kHz) | Result |
|---------|--------------------|--------------------|----------------|--------|
| Low | 2412 | 12120 | | PASS |
| Mid | 2437 | 12160 | >500 | PASS |
| High | 2462 | 11960 | | PASS |

Test mode: IEEE 802.11g


| Channel | Frequency (MHz) | Bandwidth (kHz) | Limit (kHz) | Result |
|---------|--------------------|--------------------|----------------|--------|
| Low | 2412 | 16520 | | PASS |
| Mid | 2437 | 16600 | >500 | PASS |
| High | 2462 | 16560 | | PASS |

Page 12 Rev. 00

Test Plot


IEEE 802.11b

6dB Bandwidth (CH Low)

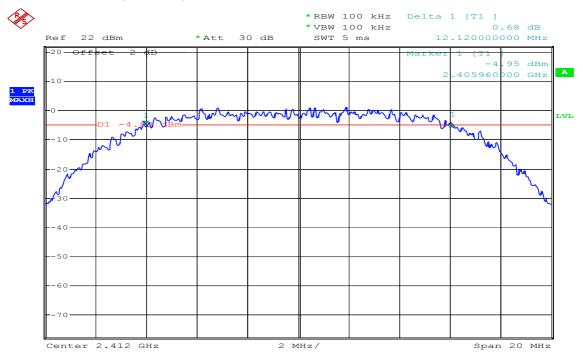

Date: 8.MAR.2007 13:40:05

6dB Bandwidth (CH Mid)

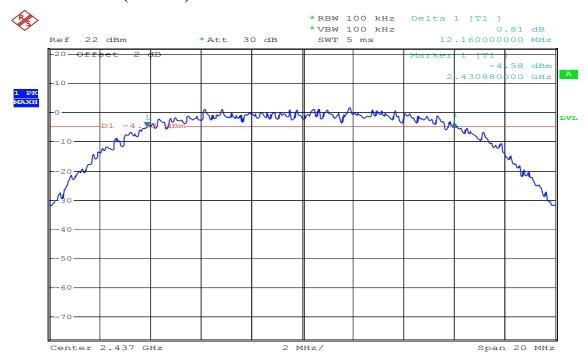


Date: 8.MAR.2007 13:41:15

Page 13 Rev. 00

C ID: VHZSX-50 Date of Issue: May 17, 2007


6dB Bandwidth (CH High)

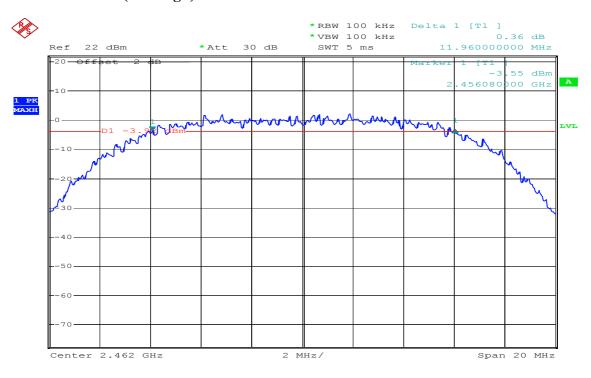

Date: 8.MAR.2007 13:42:23

IEEE 802.11g

6dB Bandwidth (CH Low)

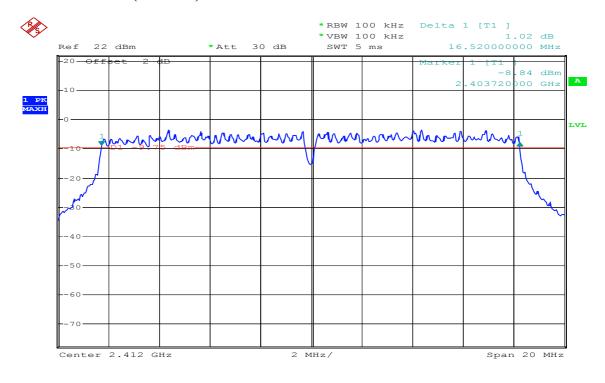


Date: 8.MAR.2007 13:34:46

Page 14 Rev. 00


CC ID: VHZSX-50 Date of Issue: May 17, 2007

6dB Bandwidth (CH Mid)

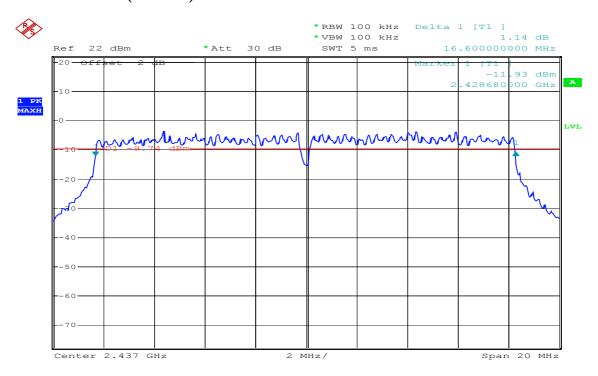

Date: 8.MAR.2007 13:36:45

6dB Bandwidth (CH High)

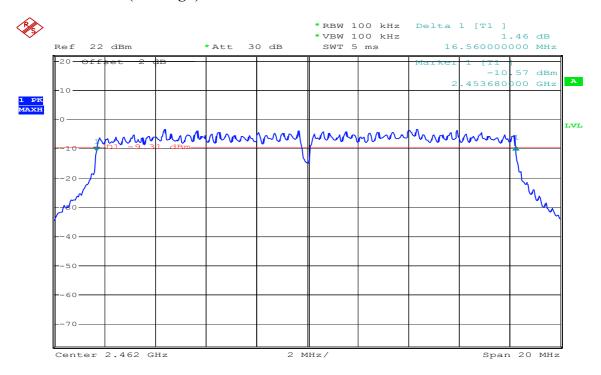

Date: 8.MAR.2007 13:37:51

Page 15 Rev. 00

7.2 PEAK POWER


LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

Date of Issue: May 17, 2007

- 1. According to \$15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
- 2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|-----------------|--------------------|---------------------|--------------|--------|
| Low | 2412 | 17.40 | 0.05495 | | PASS |
| Mid | 2437 | 17.57 | 0.05715 | 1.00 | PASS |
| High | 2462 | 18.02 | 0.06339 | | PASS |

Test mode: IEEE 802.11g

| Channel | Frequency (MHz) | Output Power (dBm) | Output Power (W) | Limit (W) | Result |
|---------|--------------------|--------------------|---------------------|--------------|--------|
| Low | 2412 | 14.40 | 0.02754 | | PASS |
| Mid | 2437 | 14.35 | 0.02723 | 1.00 | PASS |
| High | 2462 | 14.51 | 0.02825 | | PASS |


Page 16 Rev. 00

C ID: VHZSX-50 Date of Issue: May 17, 2007

Test Plot


IEEE 802.11b

Peak Power (CH Low)

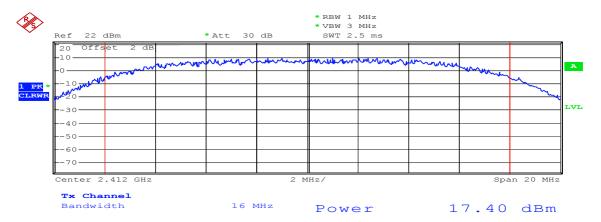

Date: 8.MAR.2007 13:25:35


Peak Power (CH Mid)

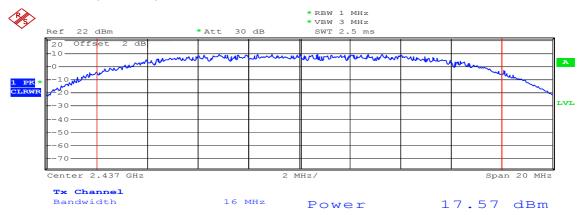

Date: 8.MAR.2007 13:27:35

Page 17 Rev. 00


Peak Power (CH High)

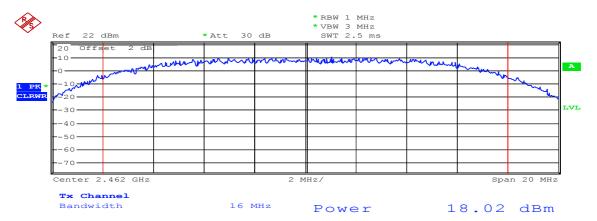

Date: 8.MAR.2007 13:28:33

IEEE 802.11g


Peak Power (CH Low)

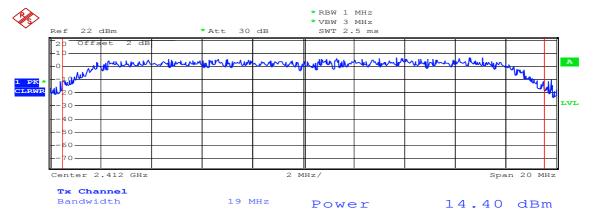

Date: 8.MAR.2007 13:31:30


Page 18 Rev. 00

Peak Power (CH Mid)

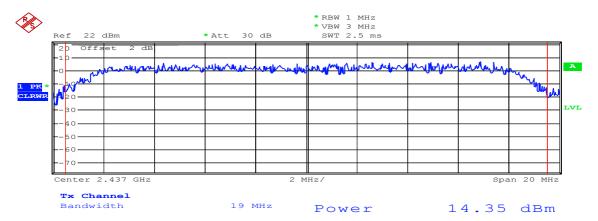

Date: 8.MAR.2007 13:30:51

Peak Power (CH High)

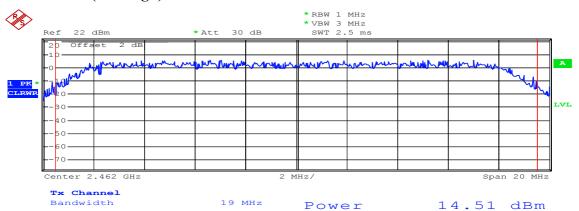

Date: 8.MAR.2007 13:30:09

Page 19 Rev. 00


7.3 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Date of Issue: May 17, 2007

Test Configuration

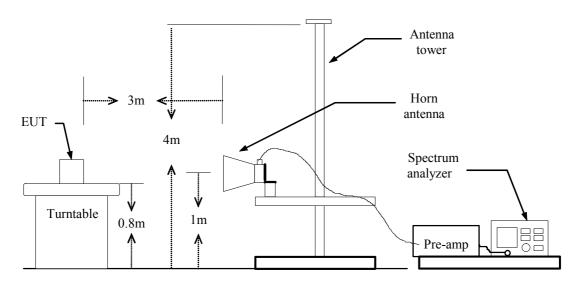

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
- 4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
- 5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.


TEST RESULTS

Refer to attach spectrum analyzer data chart.

Page 20 Rev. 00

Band Edges (IEEE 802.11b / CH Low)

Detector mode: Peak Polarity: Vertical

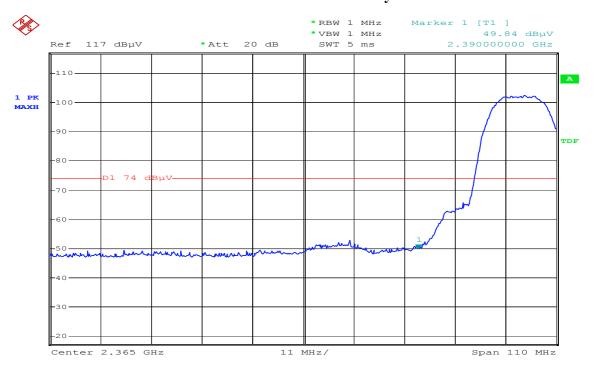


Date: 8.MAR.2007 10:32:15

Detector mode: Average

Polarity: Vertical

Date of Issue: May 17, 2007

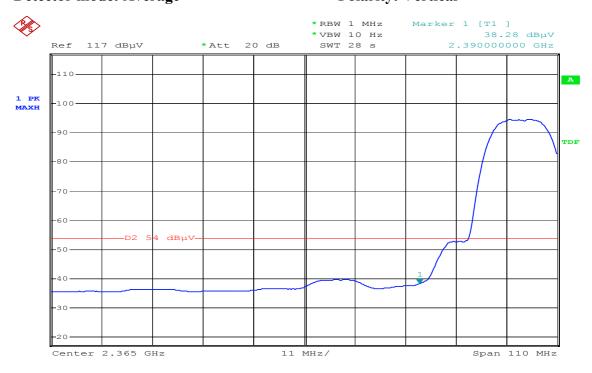


Date: 8.MAR.2007 10:33:50

Page 21 Rev. 00

Date of Issue: May 17, 2007

Detector mode: Peak


Polarity: Horizontal

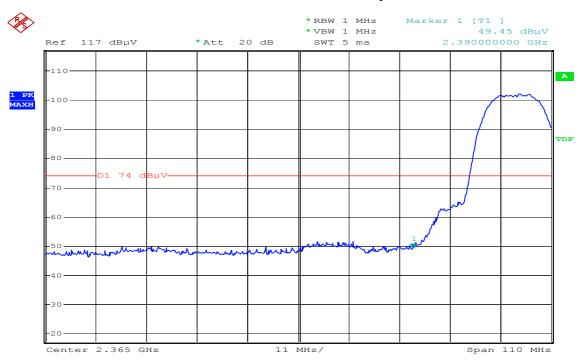

8.MAR.2007 10:39:06

Detector mode: Average

Polarity: Horizontal

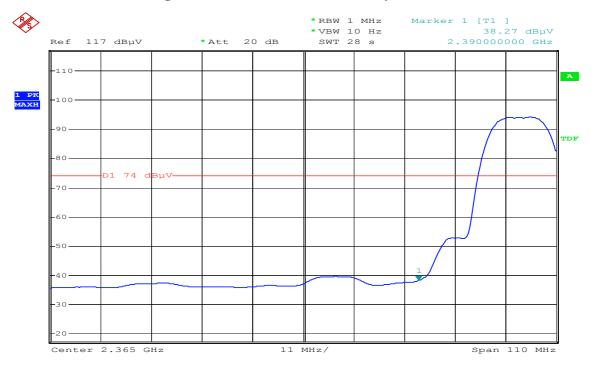

8.MAR.2007 10:40:09 Date:


> Page 22 Rev. 00

Band Edges (IEEE 802.11b / CH High)

Detector mode: Peak

Polarity: Vertical


Date of Issue: May 17, 2007

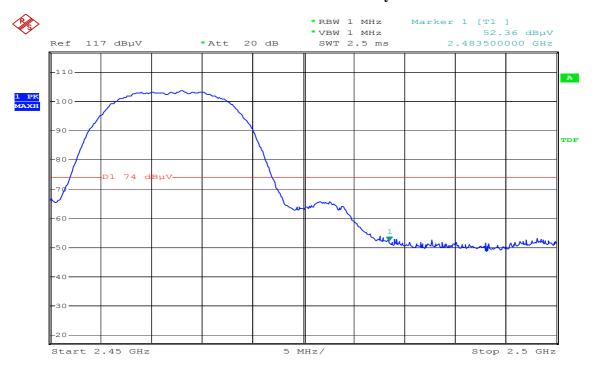

Date: 8.MAR.2007 10:51:15

Detector mode: Average

Polarity: Vertical

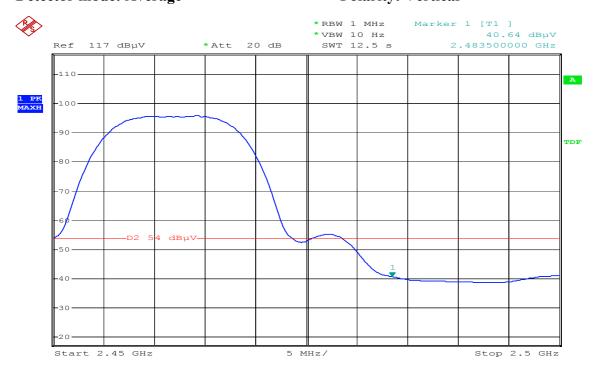


Date: 8.MAR.2007 10:51:44

Page 23 Rev. 00

Detector mode: Peak

Polarity: Horizontal


Date of Issue: May 17, 2007

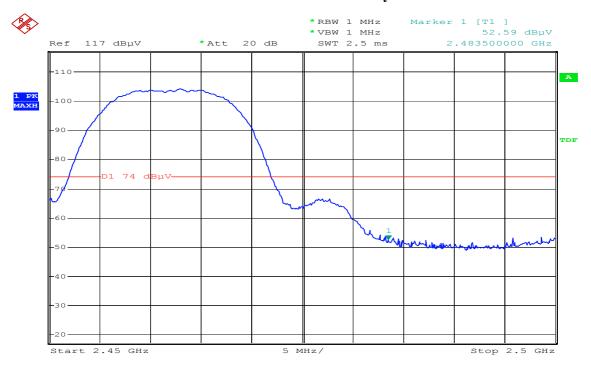

Date: 8.MAR.2007 10:46:50

Detector mode: Average

Polarity: Horizontal

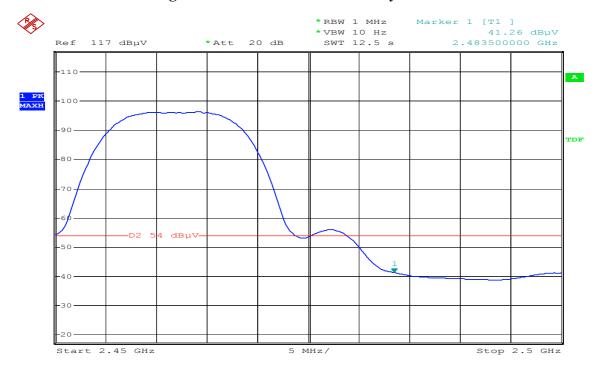


Date: 8.MAR.2007 10:48:22

Page 24 Rev. 00

Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak Polarity: Vertical

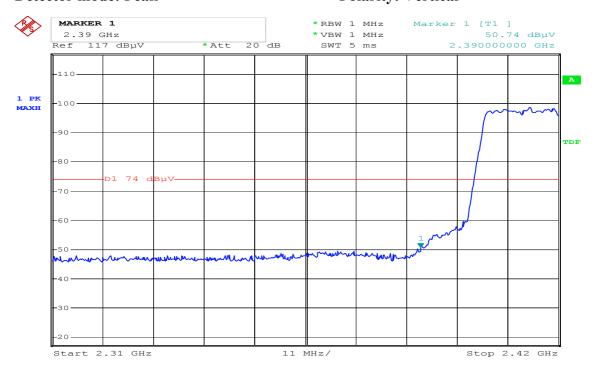


Date: 8.MAR.2007 11:21:57

Detector mode: Average

Polarity: Vertical

Date of Issue: May 17, 2007

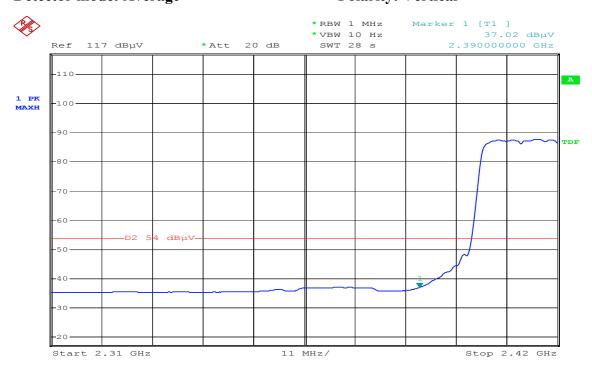


Date: 8.MAR.2007 11:22:58

Page 25 Rev. 00

FCC ID: VHZSX-50 Date of Issue: May 17, 2007

Detector mode: Peak


Polarity: Horizontal

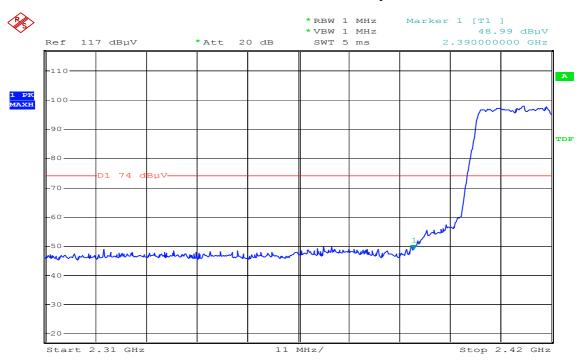

8.MAR.2007 11:17:38

Detector mode: Average

Polarity: Horizontal

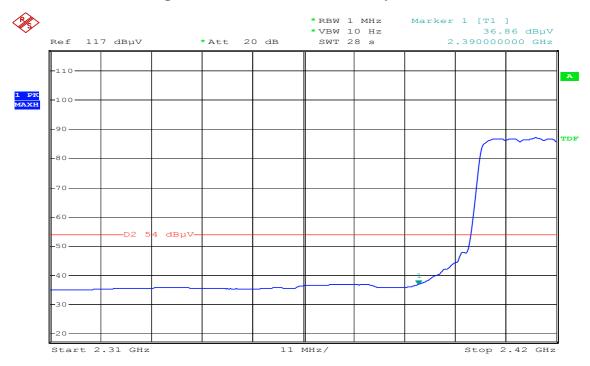

8.MAR.2007 11:18:35 Date:


> Page 26 Rev. 00

Band Edges (IEEE 802.11g / CH High)

Detector mode: Peak

Polarity: Vertical


Date of Issue: May 17, 2007

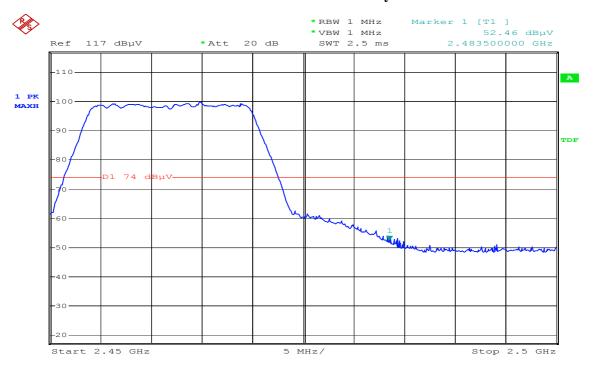

Date: 8.MAR.2007 10:56:03

Detector mode: Average

Polarity: Vertical

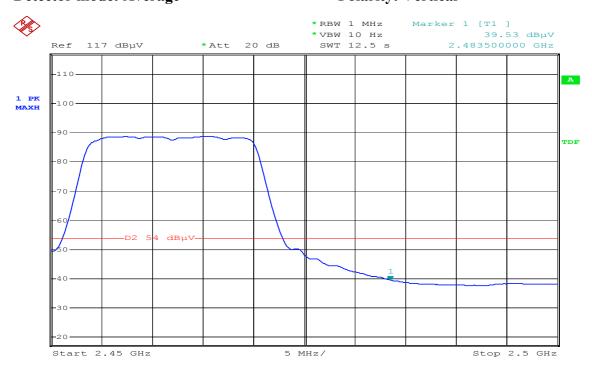


Date: 8.MAR.2007 10:56:41

Page 27 Rev. 00

Detector mode: Peak

Polarity: Horizontal


Date of Issue: May 17, 2007

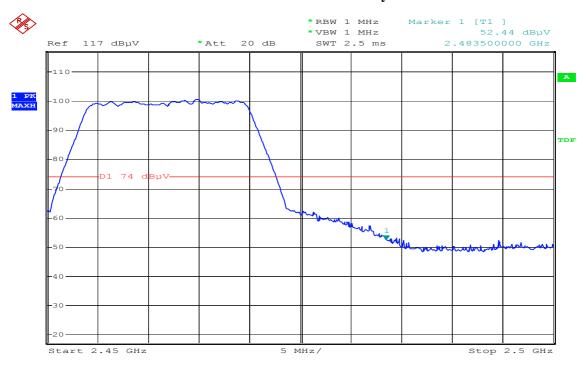

Date: 8.MAR.2007 10:59:08

Detector mode: Average

Polarity: Horizontal

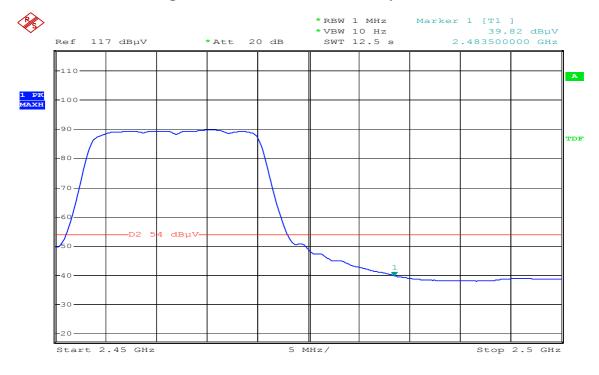

Date: 8.MAR.2007 10:59:38

Page 28 Rev. 00

7.4 PEAK POWER SPECTRAL DENSITY


LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Date of Issue: May 17, 2007

2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.

 Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep = 100 s
- 3. Record the max reading.
- 4. Repeat the above procedure until the measurements for all frequencies are completed.

Page 29 Rev. 00

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|--------------------|------------|-------------|--------|
| Low | 2412 | -12.91 | | PASS |
| Mid | 2437 | -12.61 | 8.00 | PASS |
| High | 2462 | -10.73 | | PASS |

Test mode: IEEE 802.11g

| Channel | Frequency (MHz) | PPSD (dBm) | Limit (dBm) | Result |
|---------|--------------------|------------|-------------|--------|
| Low | 2412 | -17.76 | | PASS |
| Mid | 2437 | -17.88 | 8.00 | PASS |
| High | 2462 | -17.47 | | PASS |


Page 30 Rev. 00

FCC ID: VHZSX-50 Date of Issue: May 17, 2007

Test Plot


IEEE 802.11b

PPSD (CH Low)

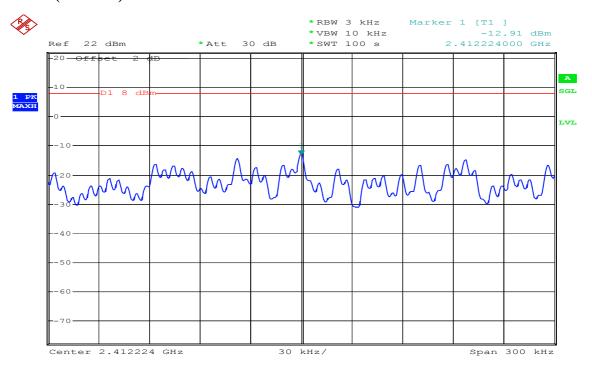

Date: 8.MAR.2007 14:08:29

PPSD (CH Mid)

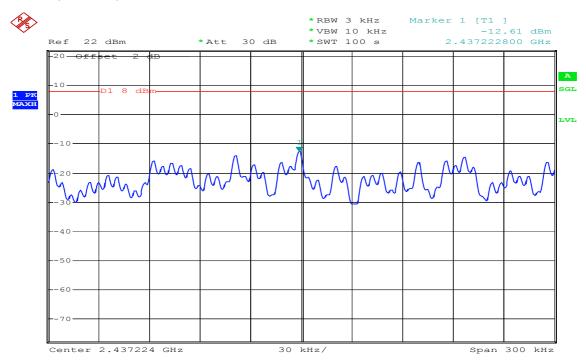


Date: 8.MAR.2007 13:52:24

Page 31 Rev. 00

Date of Issue: May 17, 2007


PPSD (CH High)

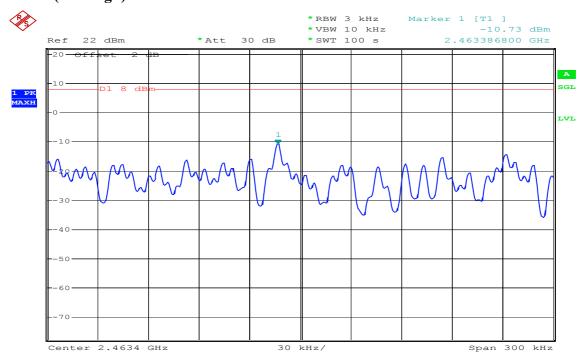

8.MAR.2007 13:48:38

IEEE 802.11g


PPSD (CH Low)

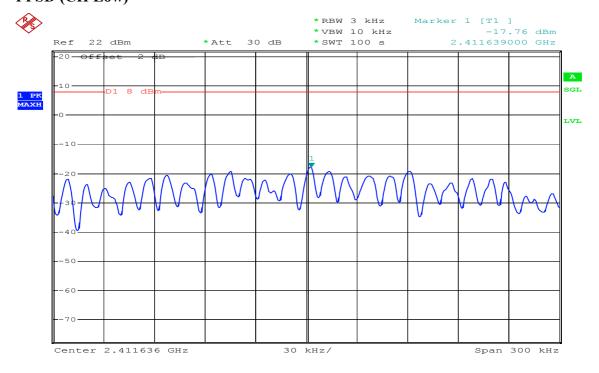

Date: 8.MAR.2007 14:14:48


> Page 32 Rev. 00

PPSD (CH Mid)

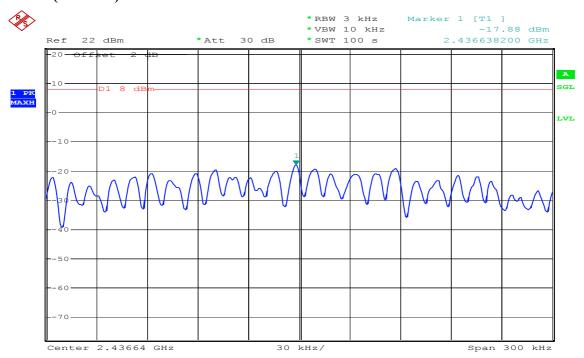

Date: 8.MAR.2007 14:17:54

PPSD (CH High)

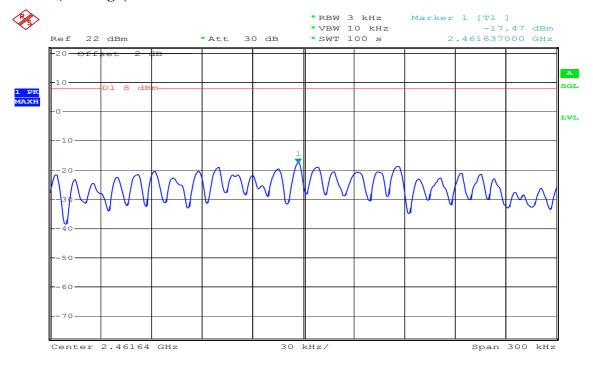

Date: 8.MAR.2007 14:21:09

Page 33 Rev. 00

7.5 SPURIOUS EMISSIONS


7.5.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Date of Issue: May 17, 2007

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS


No non-compliance noted

Page 34 Rev. 00

Test Plot


IEEE 802.11b

CH Low

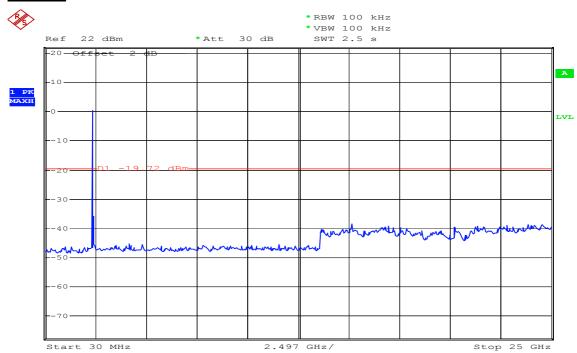

Date: 8.MAR.2007 14:33:56


CH Mid

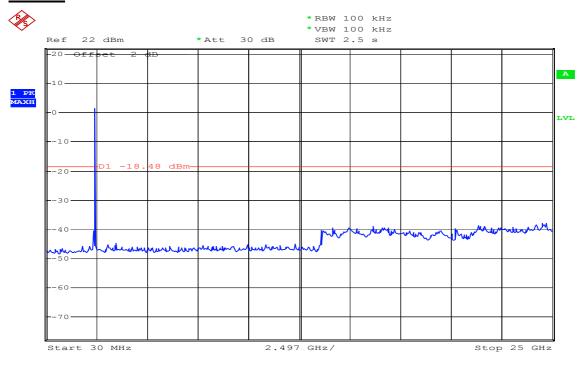

Date: 8.MAR.2007 14:35:17

Page 35 Rev. 00


CH High

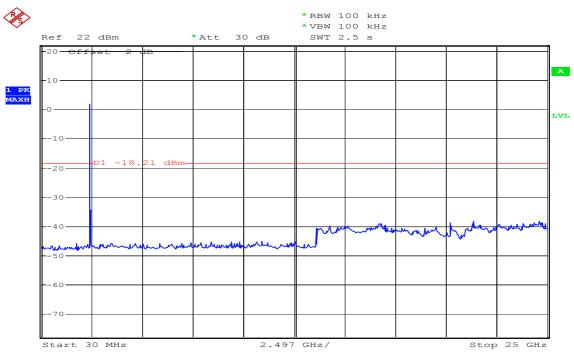

Date: 8.MAR.2007 14:36:50

IEEE 802.11g


CH Low

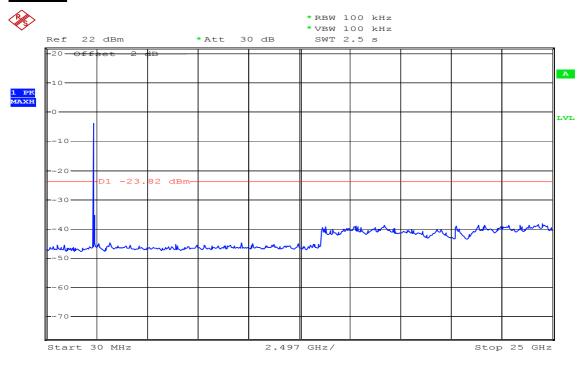

Date: 8.MAR.2007 14:32:19


Page 36 Rev. 00

CH Mid

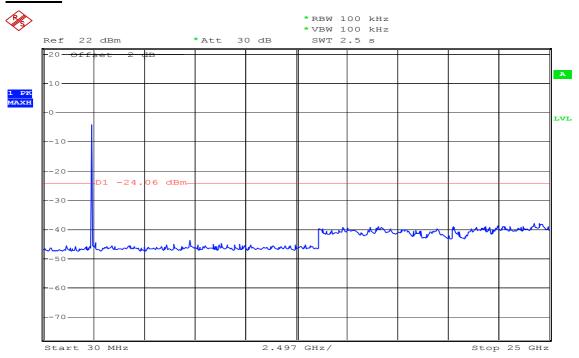

Date: 8.MAR.2007 14:29:32

CH High

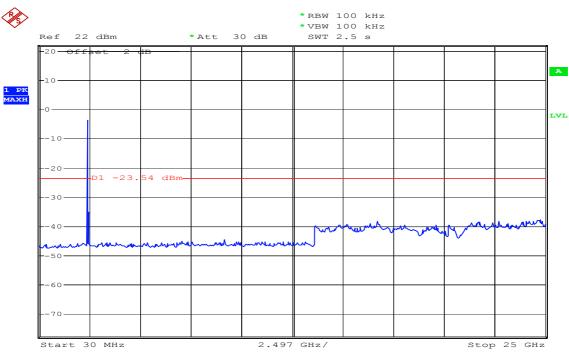

Date: 8.MAR.2007 14:25:56

Page 37 Rev. 00

Date of Issue: May 17, 2007

7.5.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

| Frequency (MHz) | Field Strength (μV/m) | Measurement Distance (m) |
|--------------------|-----------------------|--------------------------|
| 30-88 | 100* | 3 |
| 88-216 | 150* | 3 |
| 216-960 | 200* | 3 |
| Above 960 | 500 | 3 |

Date of Issue: May 17, 2007

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


| Frequency (MHz) | Field Strength (μV/m at 3-meter) | Field Strength (dBµV/m at 3-meter) |
|--------------------|-------------------------------------|---------------------------------------|
| 30-88 | 100 | 40 |
| 88-216 | 150 | 43.5 |
| 216-960 | 200 | 46 |
| Above 960 | 500 | 54 |

Page 38 Rev. 00


Date of Issue: May 17, 2007

Test Configuration

Below 1 GHz

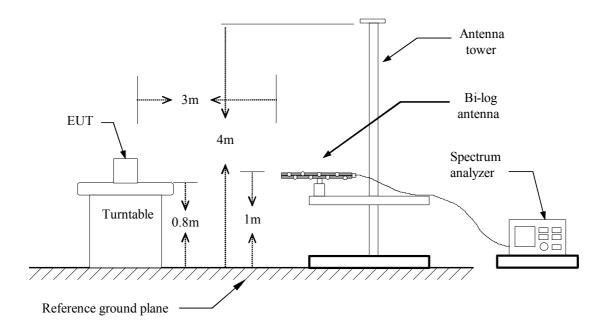

Above 1 GHz

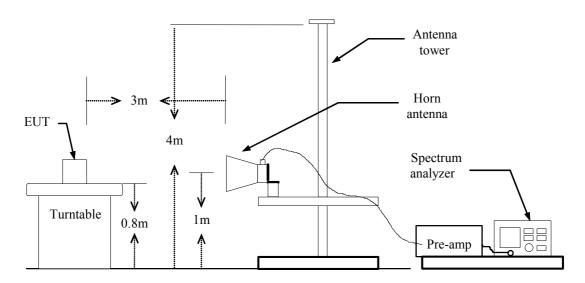

Page 39 Rev. 00

TEST PROCEDURE

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.

Date of Issue: May 17, 2007

- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

Page 40 Rev. 00

TEST RESULTS

Below 1GHz

Operation Mode: Normal Link **Test Date:** March 7, 2007

Date of Issue: May 17, 2007

Temperature: 20°C **Tested by:** Arno Hsieh

Humidity: 55% RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant.Pol. (H/V) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark |
|-----------------|-------------------|----------------|--------------------------|-----------------|-------------------|----------------|--------|
| 133.30 | V | 18.35 | 10.59 | 28.94 | 43.50 | -14.56 | Peak |
| 333.65 | V | 13.18 | 16.32 | 29.49 | 46.00 | -16.51 | Peak |
| 528.03 | V | 6.50 | 20.16 | 26.66 | 46.00 | -19.34 | Peak |
| 552.03 | V | 7.21 | 20.66 | 27.88 | 46.00 | -18.12 | Peak |
| 666.60 | V | 4.13 | 22.16 | 26.28 | 46.00 | -19.72 | Peak |
| 933.30 | V | 7.72 | 25.18 | 32.90 | 46.00 | -13.10 | Peak |
| | | | | | | | |
| 192.01 | Н | 21.69 | 12.07 | 33.76 | 43.50 | -9.74 | Peak |
| 264.01 | Н | 19.67 | 14.52 | 34.20 | 46.00 | -11.80 | Peak |
| 312.02 | Н | 23.93 | 15.70 | 39.63 | 46.00 | -6.37 | Peak |
| 336.01 | Н | 14.85 | 16.38 | 31.23 | 46.00 | -14.77 | Peak |
| 528.02 | Н | 8.41 | 20.16 | 28.58 | 46.00 | -17.42 | Peak |
| 552.03 | Н | 8.10 | 20.66 | 28.76 | 46.00 | -17.24 | Peak |

Remark:

- 1. Measuring frequencies from 30 MHz to the 1GHz.
- 2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
- 3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
- 4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 5. Margin(dB) = Remark result(dBuV/m) Quasi-peak limit(dBuV/m).

Page 41 Rev. 00

Above 1 GHz

Operation Mode: TX / IEEE 802.11b / CH Low **Test Date:** March 7, 2007

Date of Issue: May 17, 2007

Temperature: 20°C **Tested by:** Arno Hsieh

Humidity: 54 % RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|--------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|-------------|--------|
| 1028.00 | V | 50.10 | | -10.57 | 39.53 | | 74.00 | 54.00 | -14.47 | Peak |
| 2332.00 | V | 51.23 | | -4.78 | 46.45 | | 74.00 | 54.00 | -7.55 | Peak |
| 2456.00 | V | 53.53 | | -4.50 | 49.03 | | 74.00 | 54.00 | -4.97 | Peak |
| 4820.00 | V | 45.25 | | 1.87 | 47.13 | | 74.00 | 54.00 | -6.87 | Peak |
| 6440.00 | V | 43.31 | | 4.35 | 47.66 | | 74.00 | 54.00 | -6.34 | Peak |
| N/A | V | | | | | | | | | Peak |
| 1024.00 | Н | 52.03 | | -10.59 | 41.44 | | 74.00 | 54.00 | -12.56 | Peak |
| 2192.00 | Н | 50.49 | | -5.10 | 45.40 | | 74.00 | 54.00 | -8.60 | Peak |
| 2372.00 | Н | 52.73 | | -4.69 | 48.04 | | 74.00 | 54.00 | -5.96 | Peak |
| 2452.00 | Н | 54.21 | | -4.51 | 49.70 | | 74.00 | 54.00 | -4.30 | Peak |
| 4820.00 | Н | 47.23 | | 1.87 | 49.11 | | 74.00 | 54.00 | -4.89 | Peak |
| N/A | Н | | | | | | | | | Peak |

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin(dB) = Remark result(dBuV/m) Average limit(dBuV/m).

Page 42 Rev. 00

Operation Mode: TX / IEEE 802.11b / CH Mid **Test Date:** March 7, 2007

Date of Issue: May 17, 2007

Temperature: 20°C **Tested by:** Arno Hsieh

Humidity: 54 % RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|--------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|----------------|--------|
| 1052.00 | V | 50.52 | | -10.46 | 40.06 | | 74.00 | 54.00 | -13.94 | Peak |
| 1996.00 | V | 48.15 | | -5.55 | 42.60 | | 74.00 | 54.00 | -11.40 | Peak |
| 2360.00 | V | 51.79 | | -4.72 | 47.07 | | 74.00 | 54.00 | -6.93 | Peak |
| 2476.00 | V | 56.15 | | -4.45 | 51.69 | | 74.00 | 54.00 | -2.31 | Peak |
| 4870.00 | V | 47.17 | | 2.02 | 49.19 | | 74.00 | 54.00 | -4.81 | Peak |
| 6500.00 | V | 44.66 | | 4.36 | 49.02 | | 74.00 | 54.00 | -4.98 | Peak |
| 1028.00 | Н | 50.86 | | -10.57 | 40.29 | | 74.00 | 54.00 | -13.71 | Peak |
| 1660.00 | Н | 48.82 | | -7.47 | 41.34 | | 74.00 | 54.00 | -12.66 | Peak |
| 2164.00 | Н | 50.52 | | -5.16 | 45.36 | | 74.00 | 54.00 | -8.64 | Peak |
| 2516.00 | Н | 53.26 | | -4.33 | 48.93 | | 74.00 | 54.00 | -5.07 | Peak |
| 4870.00 | Н | 48.67 | | 2.02 | 50.69 | | 74.00 | 54.00 | -3.31 | Peak |
| N/A | Н | | | | | | | | | Peak |

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 43 Rev. 00

Operation Mode: TX / IEEE 802.11b / CH High Test Date: March 7, 2007

Date of Issue: May 17, 2007

Temperature: 20°C **Tested by:** Arno Hsieh

Humidity: 54 % RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|--------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|-------------|--------|
| 1032.00 | V | 51.64 | | -10.55 | 41.08 | | 74.00 | 54.00 | -12.92 | Peak |
| 1108.00 | V | 50.11 | | -10.20 | 39.91 | | 74.00 | 54.00 | -14.09 | Peak |
| 2424.00 | V | 53.07 | | -4.57 | 48.49 | | 74.00 | 54.00 | -5.51 | Peak |
| 2532.00 | V | 51.48 | | -4.25 | 47.22 | | 74.00 | 54.00 | -6.78 | Peak |
| 4920.00 | V | 49.85 | 38.98 | 2.16 | 52.01 | 41.14 | 74.00 | 54.00 | -12.82 | Peak |
| 6570.00 | V | 44.11 | | 4.56 | 48.67 | | 74.00 | 54.00 | -5.33 | Peak |
| 1032.00 | Н | 51.74 | | -10.55 | 41.18 | | 74.00 | 54.00 | -12.82 | Peak |
| 2188.00 | Н | 51.62 | | -5.11 | 46.51 | | 74.00 | 54.00 | -7.49 | Peak |
| 2508.00 | Н | 54.75 | | -4.36 | 50.39 | | 74.00 | 54.00 | -3.61 | Peak |
| 4920.00 | Н | 48.80 | | 2.16 | 50.96 | | 74.00 | 54.00 | -3.04 | Peak |
| 6570.00 | Н | 42.41 | | 4.56 | 46.97 | | 74.00 | 54.00 | -7.03 | Peak |
| N/A | Н | | | | | | | | | Peak |

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 44 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH Low **Test Date:** March 7, 2007

Date of Issue: May 17, 2007

Temperature: 20°C **Tested by:** Arno Hsieh

Humidity: 54 % RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|--------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|----------------|--------|
| 1048.00 | V | 51.75 | | -10.48 | 41.27 | | 74.00 | 54.00 | -12.73 | Peak |
| 1656.00 | V | 48.12 | | -7.50 | 40.62 | | 74.00 | 54.00 | -13.38 | Peak |
| 2220.00 | V | 49.32 | | -5.03 | 44.28 | | 74.00 | 54.00 | -9.72 | Peak |
| 2492.00 | V | 52.15 | | -4.42 | 47.74 | | 74.00 | 54.00 | -6.26 | Peak |
| 6440.00 | V | 43.74 | | 4.35 | 48.09 | | 74.00 | 54.00 | -5.91 | Peak |
| N/A | V | | | | | | | | | Peak |
| 1028.00 | Н | 51.71 | | -10.57 | 41.14 | | 74.00 | 54.00 | -12.86 | Peak |
| 1100.00 | Н | 49.79 | | -10.24 | 39.55 | | 74.00 | 54.00 | -14.45 | Peak |
| 2464.00 | Н | 53.50 | | -4.48 | 49.02 | | 74.00 | 54.00 | -4.98 | Peak |
| N/A | Н | | | | | | | | | Peak |
| | Н | | | | | | | | | Peak |
| | Н | | | | | | | | | Peak |

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 45 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH Mid **Test Date:** March 7, 2007

Date of Issue: May 17, 2007

Temperature: 20°C **Tested by:** Arno Hsieh

Humidity: 54 % RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|--------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|----------------|--------|
| 1116.00 | V | 51.21 | | -10.16 | 41.05 | | 74.00 | 54.00 | -12.95 | Peak |
| 1500.00 | V | 48.08 | | -8.39 | 39.69 | | 74.00 | 54.00 | -14.31 | Peak |
| 2000.00 | V | 48.54 | | -5.53 | 43.01 | | 74.00 | 54.00 | -10.99 | Peak |
| 2532.00 | V | 52.31 | | -4.25 | 48.06 | | 74.00 | 54.00 | -5.94 | Peak |
| N/A | V | | | | | | | | | Peak |
| | V | | | | | | | | | Peak |
| 1032.00 | Н | 50.21 | | -10.55 | 39.66 | | 74.00 | 54.00 | -14.34 | Peak |
| 2208.00 | Н | 50.40 | | -5.06 | 45.34 | | 74.00 | 54.00 | -8.66 | Peak |
| 2568.00 | Н | 51.12 | | -4.09 | 47.03 | | 74.00 | 54.00 | -6.97 | Peak |
| N/A | Н | | | | | | | | | Peak |
| | Н | | | | | | | | | Peak |
| | Н | | | | | | | | | Peak |

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 46 Rev. 00

Operation Mode: TX / IEEE 802.11g / CH High Test Date: March 7, 2007

Date of Issue: May 17, 2007

Temperature: 20°C **Tested by:** Arno Hsieh

Humidity: 54 % RH **Polarity:** Ver. / Hor.

| Frequency (MHz) | Ant. Pol. (H/V) | Reading (Peak) (dBuV) | Reading (Average) (dBuV) | Correction Factor (dB/m) | Result (Peak) (dBuV/m) | Result (Average) (dBuV/m) | Limit (Peak) (dBuV/m) | Limit (Average) (dBuV/m) | Margin (dB) | Remark |
|-----------------|--------------------|-----------------------------|--------------------------------|--------------------------------|------------------------------|---------------------------------|-----------------------------|--------------------------------|-------------|--------|
| 1040.00 | V | 50.25 | | -10.52 | 39.74 | | 74.00 | 54.00 | -14.26 | Peak |
| 2184.00 | V | 49.87 | | -5.11 | 44.76 | | 74.00 | 54.00 | -9.24 | Peak |
| 2348.00 | V | 49.93 | | -4.74 | 45.19 | | 74.00 | 54.00 | -8.81 | Peak |
| 2504.00 | V | 52.61 | | -4.38 | 48.23 | | 74.00 | 54.00 | -5.77 | Peak |
| 4930.00 | V | 43.63 | | 2.19 | 45.82 | | 74.00 | 54.00 | -8.18 | Peak |
| 6570.00 | V | 43.53 | | 4.56 | 48.09 | | 74.00 | 54.00 | -5.91 | Peak |
| 1032.00 | Н | 50.49 | | -10.55 | 39.94 | | 74.00 | 54.00 | -14.06 | Peak |
| 1664.00 | Н | 48.93 | | -7.45 | 41.48 | | 74.00 | 54.00 | -12.52 | Peak |
| 2236.00 | Н | 50.62 | | -5.00 | 45.63 | | 74.00 | 54.00 | -8.37 | Peak |
| 2500.00 | Н | 53.17 | | -4.40 | 48.77 | | 74.00 | 54.00 | -5.23 | Peak |
| 4930.00 | Н | 43.19 | | 2.19 | 45.38 | | 74.00 | 54.00 | -8.62 | Peak |
| N/A | Н | | | | | | | | | Peak |

Remark:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
- 3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
- 4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- 5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 6. Margin (dB) = Remark result (dBuV/m) Average limit (dBuV/m).

Page 47 Rev. 00

7.6 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Date of Issue: May 17, 2007

| Frequency Range (MHz) | Limits (dBµV) | | | | | |
|--------------------------|------------------|-----------|--|--|--|--|
| (171112) | Quasi-peak | Average | | | | |
| 0.15 to 0.50 | 66 to 56* | 56 to 46* | | | | |
| 0.50 to 5 | 56 | 46 | | | | |
| 5 to 30 | 60 | 50 | | | | |

^{*} Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

- 1. The EUT was placed on a table, which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

Page 48 Rev. 00

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Date of Issue: May 17, 2007

Test Data

Operation Mode: Normal Link **Test Date:** March 8, 2007

Temperature: 22°C Tested by: Arno Hsieh

Humidity: 45% RH

| Freq. (MHz) | QP Reading (dBuV) | AV Reading (dBuV) | Corr. factor (dB) | QP Result (dBuV) | AV Result (dBuV) | QP Limit (dBuV) | AV Limit (dBuV) | QP Margin (dB) | AV Margin (dB) | Note |
|----------------|-------------------------|-------------------------|-------------------------|------------------------|------------------------|-----------------------|-----------------------|----------------------|----------------------|------|
| 0.15 | 56.42 | 49.83 | 0.20 | 56.62 | 50.03 | 66.00 | 56.00 | -9.38 | -5.97 | L1 |
| 1.28 | 41.05 | 39.56 | 0.13 | 41.18 | 39.69 | 56.00 | 46.00 | -14.82 | -6.31 | L1 |
| 1.92 | 40.55 | 37.61 | 0.19 | 40.74 | 37.80 | 56.00 | 46.00 | -15.26 | -8.20 | L1 |
| 3.69 | 38.03 | 29.01 | 0.28 | 38.31 | 29.29 | 56.00 | 46.00 | -17.69 | -16.71 | L1 |
| 5.81 | 24.11 | 16.16 | 0.46 | 24.57 | 16.62 | 60.00 | 50.00 | -35.43 | -33.38 | L1 |
| 25.76 | 47.08 | 38.96 | 1.90 | 48.98 | 40.86 | 60.00 | 50.00 | -11.02 | -9.14 | L1 |
| 0.15 | 58.90 | 51.48 | 0.20 | 59.10 | 51.68 | 66.00 | 56.00 | -6.90 | -4.32 | L2 |
| 0.25 | 48.64 | 44.86 | 0.20 | 48.84 | 45.06 | 61.76 | 51.76 | -12.92 | -6.70 | L2 |
| 0.98 | 41.16 | 39.83 | 0.10 | 41.26 | 39.93 | 56.00 | 46.00 | -14.74 | -6.07 | L2 |
| 1.34 | 22.20 | 11.11 | 0.13 | 22.33 | 11.24 | 56.00 | 46.00 | -33.67 | -34.76 | L2 |
| 3.61 | 19.08 | 8.84 | 0.20 | 19.28 | 9.04 | 56.00 | 46.00 | -36.72 | -36.96 | L2 |
| 25.81 | 48.35 | 38.25 | 1.62 | 49.97 | 39.87 | 60.00 | 50.00 | -10.03 | -10.13 | L2 |


Remark:

- 1. Measuring frequencies from 0.15 MHz to 30MHz.
- 2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
- 3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
- 4. $L1 = Line \ One \ (Live \ Line) \ / \ L2 = Line \ Two \ (Neutral \ Line)$


Page 49 Rev. 00

<u>Test Plots</u>

Conducted emissions (Line 1)

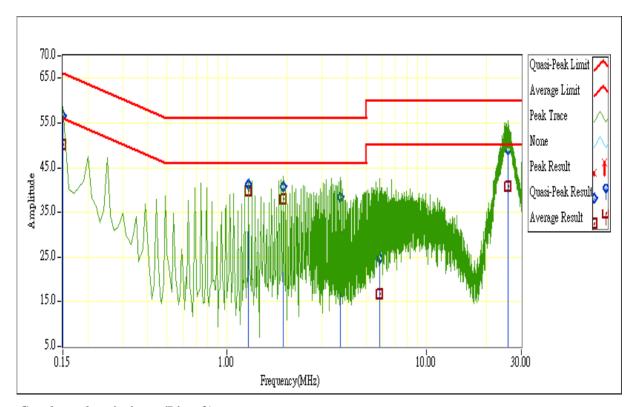

Conducted emissions (Line 2)

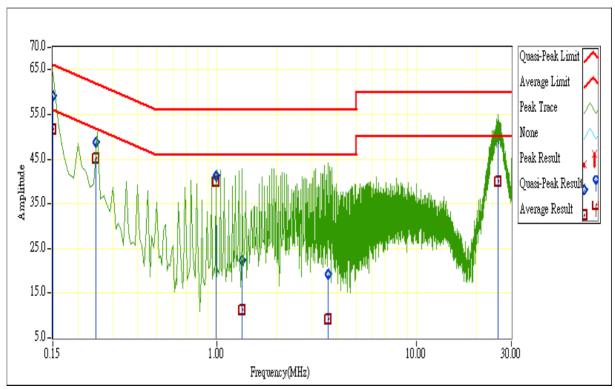

Page 50 Rev. 00

Date of Issue: May 17, 2007

APPENDIX I RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

Date of Issue: May 17, 2007

EUT Specification

| EUT | Firewall appliance for SMB |
|---|---|
| Frequency band (Operating) | WLAN: 2.412GHz ~ 2.462GHz WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz WLAN: 5.745GHz ~ 5.825GHz Others |
| Device category | ☐ Portable (<20cm separation) ☐ Mobile (>20cm separation) ☐ Others |
| Exposure classification | ☐ Occupational/Controlled exposure (S = 5mW/cm²) ☐ General Population/Uncontrolled exposure (S=1mW/cm²) |
| Antenna diversity | ☐ Single antenna ☐ Multiple antennas ☐ Tx diversity ☐ Rx diversity ☐ Tx/Rx diversity |
| Max. output power | IEEE 802.11b: 18.02 dBm (63.39mW) IEEE 802.11g: 14.51 dBm (28.25mW) |
| Antenna gain (Max) | 2 dBi (Numeric gain:1.584) |
| Evaluation applied | ☐ MPE Evaluation ☐ SAR Evaluation ☐ N/A |
| antenna gain.) DTS device is not subject to recompliance. For mobile or fixed location to | s 18.02dBm (63.39mW) at 2462MHz (with 1.584 numeric outine RF evaluation; MPE estimate is used to justify the ransmitters, no SAR consideration applied. The maximum even if the calculation indicates that the power density |

TEST RESULTS

No non-compliance noted.

Page 51 Rev. 00

MPE evaluation

Calculation

Given

$$E = \frac{\sqrt{30 \times P \times G}}{d} \& S = \frac{E^2}{3770}$$

Where E = Field strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power density in milliwatts / square centimeter

Combining equations and re-arranging the terms to express the distance as a function of the remaining variables yields:

$$S = \frac{30 \times P \times G}{3770d^2}$$

Changing to units of mW and cm, using:

$$P(mW) = P(W) / 1000 \text{ and}$$

$$d(cm) = d(m) / 100$$

Yields

$$S = \frac{30 \times (P/1000) \times G}{3770 \times (d/100)^2} = 0.0796 \times \frac{P \times G}{d^2}$$
 Equation 1

Where d = Distance in cm

P = Power in mW

G = Numeric antenna gain

 $S = Power density in mW/cm^2$

Maximum Permissible Exposure

EUT output power = 63.39mW

Numeric Antenna gain = 1.584

Substituting the MPE safe distance using d = 20 cm into Equation 1:

Yields

$$S = 0.000199 \times P \times G$$

Where P = Power in mW

G = Numeric antenna gain

 $S = Power\ density\ in\ mW/cm^2$

 \rightarrow Power density = -0.01998 mW/cm²

(For mobile or fixed location transmitters, the maximum power density is 1.0 mW/cm² even if the calculation indicates that the power density would be larger.)

Page 52 Rev. 00

Date of Issue: May 17, 2007