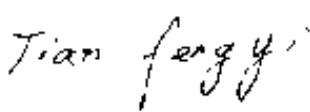
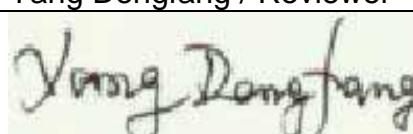


TEST REPORT

Report No.:	Z09J0249103		Page 1 of 12
Applicant:	HUIZHOU FORYOU GENERAL ELECTRONICS CO.,LTD.		
Applicant Address:	NO.6 Zhongkai Songshan Industrial District Huizhou, Guangdong.		
Sample Description:	Tire Pressure Monitoring System		
Model:	TPMAI1DIC1		
FCC ID	VIPTPMAI1DIC1-R		
Test Location:	EMC Laboratory of Guangzhou GRG Metrology and Test Technology Co., Ltd.		
Test Specification:	FCC PART 15 :2008		
Test Date:	2009-05-24 to 2009-05-27		
Test Result:	According to the kind and extend of tests performed the test item passed test specification.		
Tested By:	Reviewed By:	Approved By:	
Tian Fengyi / Test Engineer	Yang Dengfang / Reviewer	Frank Chen / Director	
			
Date: 28 th May. 2009	Date: 28 th May. 2009	Date: 2009-06-04	
Other Aspects:			
None			
Abbreviations: ok / P = passed; fail / F = failed; n.a. / N = not applicable			
The test result in this test report refers exclusively to the presented test sample. This report shall not be reproduced except in full, without the written approval of GRGT.			

1 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Radiated Emission	FCC PART 15 :2008	Section 15.231(b) Section 15.209 Section 15.205	PASS
Restricted Band	FCC PART 15 :2008		PASS
Antenna Requirement	FCC PART 15 :2008	Section 15.203	PASS
Active Time	FCC PART 15 :2008	Section 15.231(a)	PASS
Bandwidth of Emission	FCC PART 15 :2008	Section 15.231(c)	PASS
Conducted Emission	FCC PART 15 :2008	Section 15.207	* N/A

* The device is powered by DC 3.6V(transmitter) and DC 12V(receiver) battery.

Contents

1	TEST SUMMARY	2
2	GENERAL INFORMATION	4
2.1	CLIENT INFORMATION.....	4
2.2	MANUFACTURER INFORMATION.....	4
2.3	E.U.T. GENERAL DESCRIPTION	4
2.4	CHARACTERISTICS OF E.U.T.	4
2.5	STANDARDS APPLICABLE FOR TESTING	4
2.6	TEST LOCATION	4
2.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	4
2.8	TEST FACILITY	4
3	ANTENNA REQUIREMENT	5
3.1	STANDARD REQUIREMENT.....	5
3.2	EUT ANTENNA	5
4	EQUIPMENTS USED DURING TEST.....	6
5	RADIATED SPURIOUS EMISSIONS	7
5.1	HARMONIC AND OTHER SPURIOUS EMISSIONS	9

2 General Information

2.1 Client Information

Applicant: HUIZHOU FORYOU GENERAL ELECTRONICS CO.,LTD.
Address of Applicant: NO.6 Zhongkai Songshan Industrial District Huizhou, Guangdong.

2.2 Manufacturer Information

Manufacturer: HUIZHOU FORYOU GENERAL ELECTRONICS CO.,LTD.
Address of Applicant: NO.6 Zhongkai Songshan Industrial District Huizhou, Guangdong.

2.3 E.U.T. General Description

Product Name: Tire Pressure Monitoring System
Model: TPMAI1DIC1
Trade Name: FORYOU
Working Frequency: 433.920MHz
Antenna Type: Integral
Power Supply: DC 3.6V battery for Transmitter, DC 12V battery for Receiver

2.4 Characteristics of E.U.T.

Receiver:
Dimensions: 130 x 40 x 45mm
Operating Temp. -30 ~ 70
Range:
Receive Frequency: 433.920MHz

2.5 Standards Applicable for Testing

The standard used was FCC PART 15 Subpart C: 2008. ANSI C63.4:2003.

2.6 Test Location

All tests were performed at:
EMC Laboratory of Guangzhou GRG Metrology and Test Technology Co., Ltd.
No tests were sub-contracted.

2.7 Other Information Requested by the Customer

None.

2.8 Test Facility

Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC Listed Lab No. 688188
China	CNAS No.L0446
China	DILAC No.DL175
VCCI	VCCI No.2914

3 Antenna Requirement

3.1 Standard requirement

15.203 requirement:

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 EUT Antenna

The antenna is integrated on the main PCB and no consideration of replacement.



Antenna of the receiver

Test result: The device does meet the FCC requirements.

4 Equipments Used during Test

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Semi-anechoic chamber	ETS-LINGGREN	RFD-F/A-100	3730	2010-04-10
Test Receiver	ROHDE & SCHWARZ	ESU 40	100012	2009-06-02
Log period antenna	ETS-LINGGREN	3142C	00075971	2009-08-03
Horn antenna	ETS.LINDGREN	3117C	00075824	2009-08-03
Coaxial	GRGT	Cable 2	N/A	2009-07-01

5 Radiated Spurious Emissions

Test Requirement: FCC 15.231(b)
 Test Method: ANSI C63.4 chapter13
 Test Date: 2009-05-26
 Test Status: Normal working Mode
 Test site: Measurement Distance: 3m (Semi-Anechoic Chamber)
 Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector applies (30 MHz – 1000 MHz). 1MHz resolution bandwidth and Peak detector apply (1000 MHz – 5GHz).
 Receive antenna scan height 1 m – 4 m, polarization: Vertical / Horizontal
Power supply: DC 12V battery(receiver)

Radiated Emission Limits:

According to 15.231, Periodic operation in the band 40.66-40.70 MHz and above 70MHz, the field strength of emissions from intentional radiators operated under this section shall not exceed the following:

Fundamental frequency (MHz)	Field Strength of Fundamental(µV/m)	Field Strength of spurious emissions (µV/m)
40.66-40.70	2250	225
70-130	1250	125
130-174	1,250 to 3,750 *	125 to 375 *
174-260	3750	375
260-470	3,750 to 12,500 *	375 to 1250 *
Above 470	12500	1250

* linear interpolations

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209, as following table:

Fundamental frequency (MHz)	Field Strength of spurious emissions	
	(µV/m)	dB (µV/m)
30 - 88	100	40.0
88 - 216	150	43.5
216 - 960	200	46.0
Above 960	500	54.0

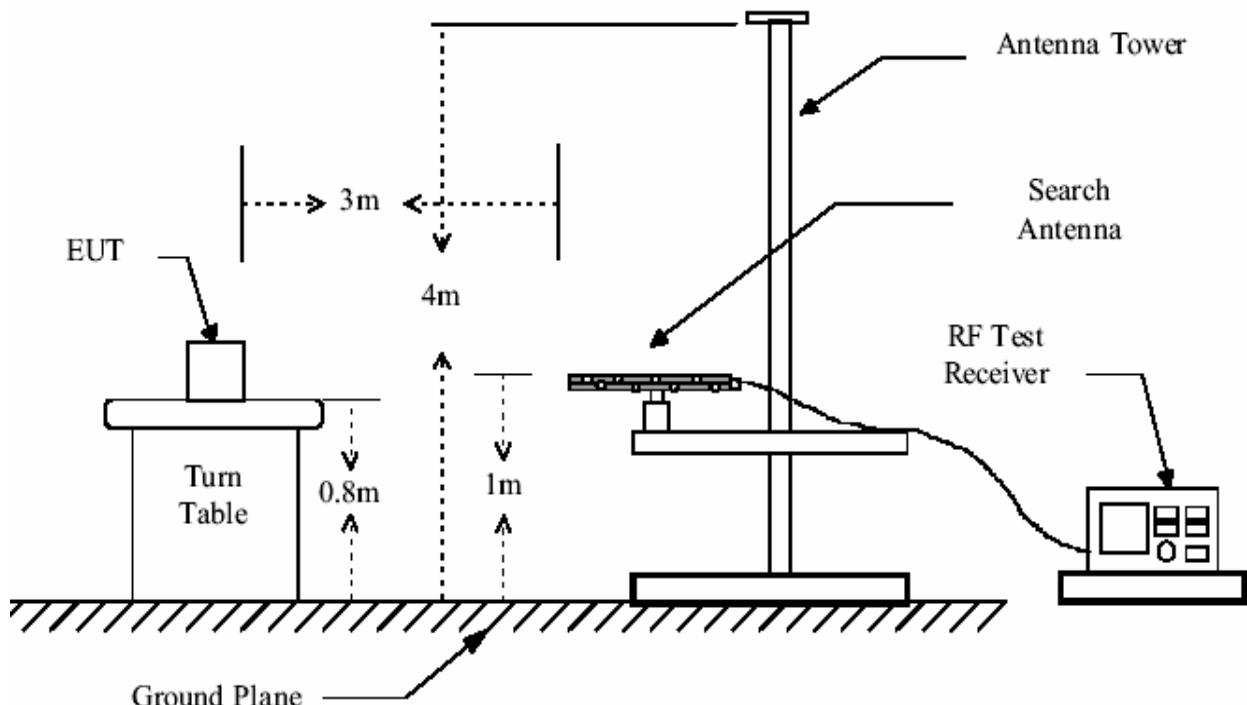
Test Configuration:

Figure1. 30MHz to 1GHz radiated emissions test configuration


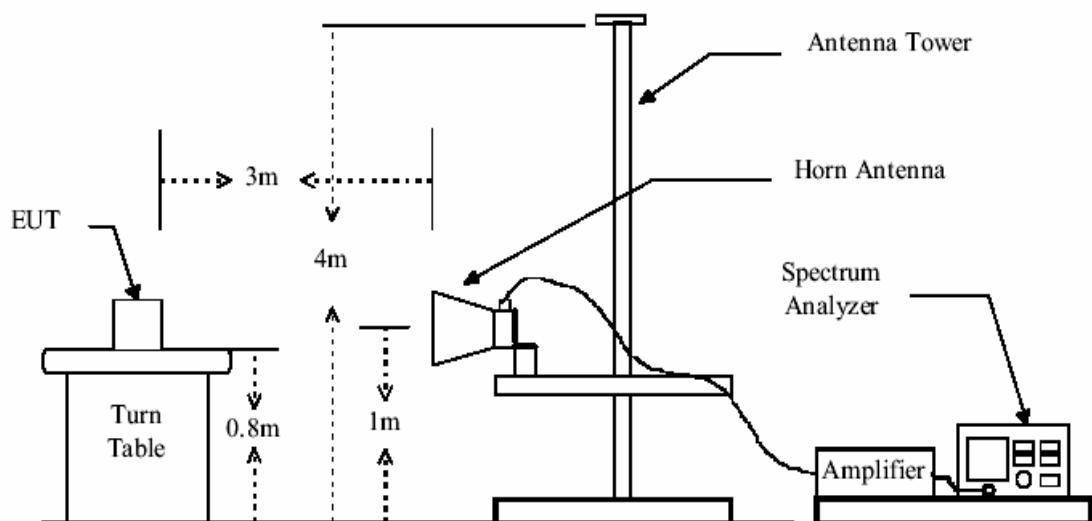


Figure2. Above 1GHz radiated emissions test configuration

Test Procedure: The procedure used was ANSI Standard C63.4-2003. The receiver was scanned from 30MHz to 5GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. The worst case emissions were reported.

5.1 Harmonic and other spurious emissions


E.U.T	Receiver		
Environment	Tem:25 Hum:55%	Test Engineer:	Tian Fengyi
Site :	3M chamber	Limit	FCC 15.209
Note :	Normal Operation (ANT Horizontal)		

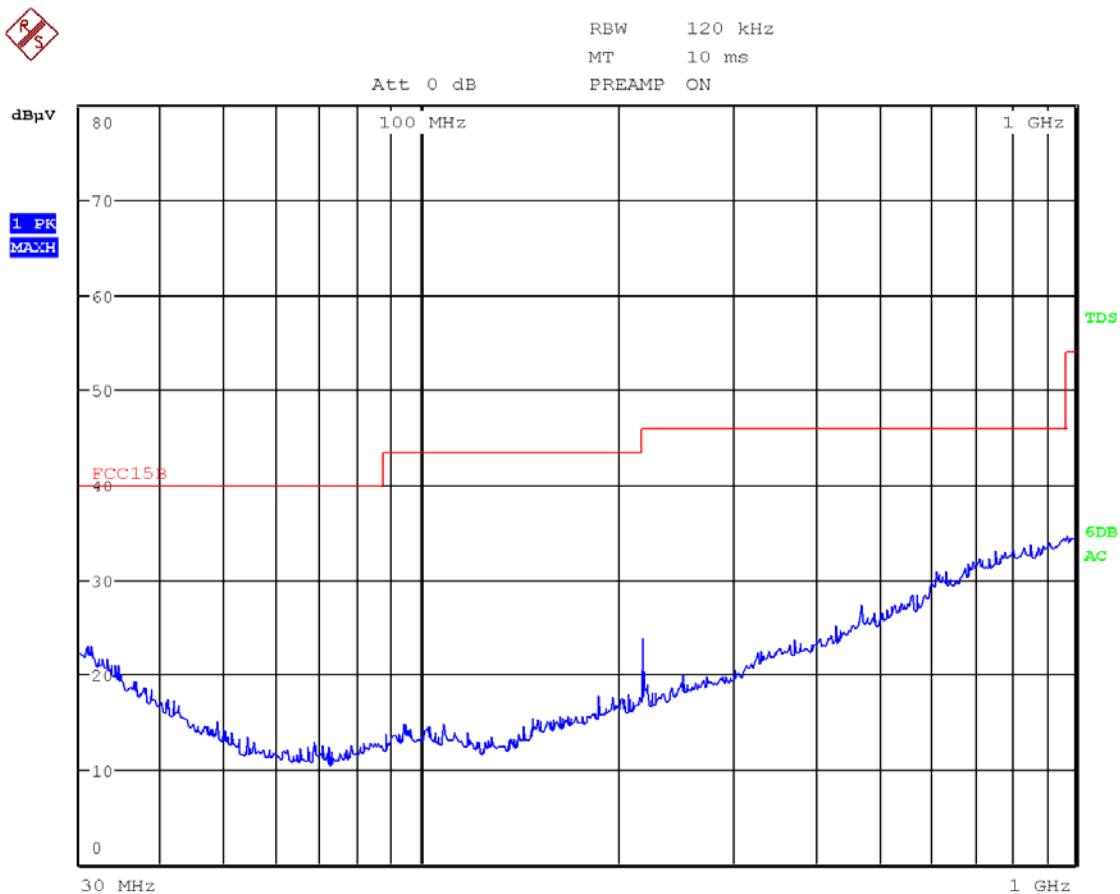

Detected Peaks:


No.	Frequency (MHz)	Reading dB(μV/m)	QP Limit dB(μV/m)	Margin dB(μV/m)	Angle (degrees)	Height (m)	Result	H/V	Remark
1	30.840	27.6	40.0	12.4	0	1	Pass	H	Others
2	218.640	21.4	46.0	24.6	0	1	Pass	H	Others
3	471.560	29.3	46.0	16.7	90	1	Pass	H	Others
4	614.44	32.3	46.0	13.7	0	1	Pass	H	Others
5	755.72	34.2	46.0	11.8	0	1	Pass	H	Others
6	974.64	37.2	54.0	16.8	0	1	Pass	H	Others

E.U.T	Receiver		
Environment	Tem:25 Hum:55%	Test Engineer:	Tian Fengyi
Site :	3M chamber	Limit	FCC 15.209
Note :	Normal Operation (ANT Horizontal)		

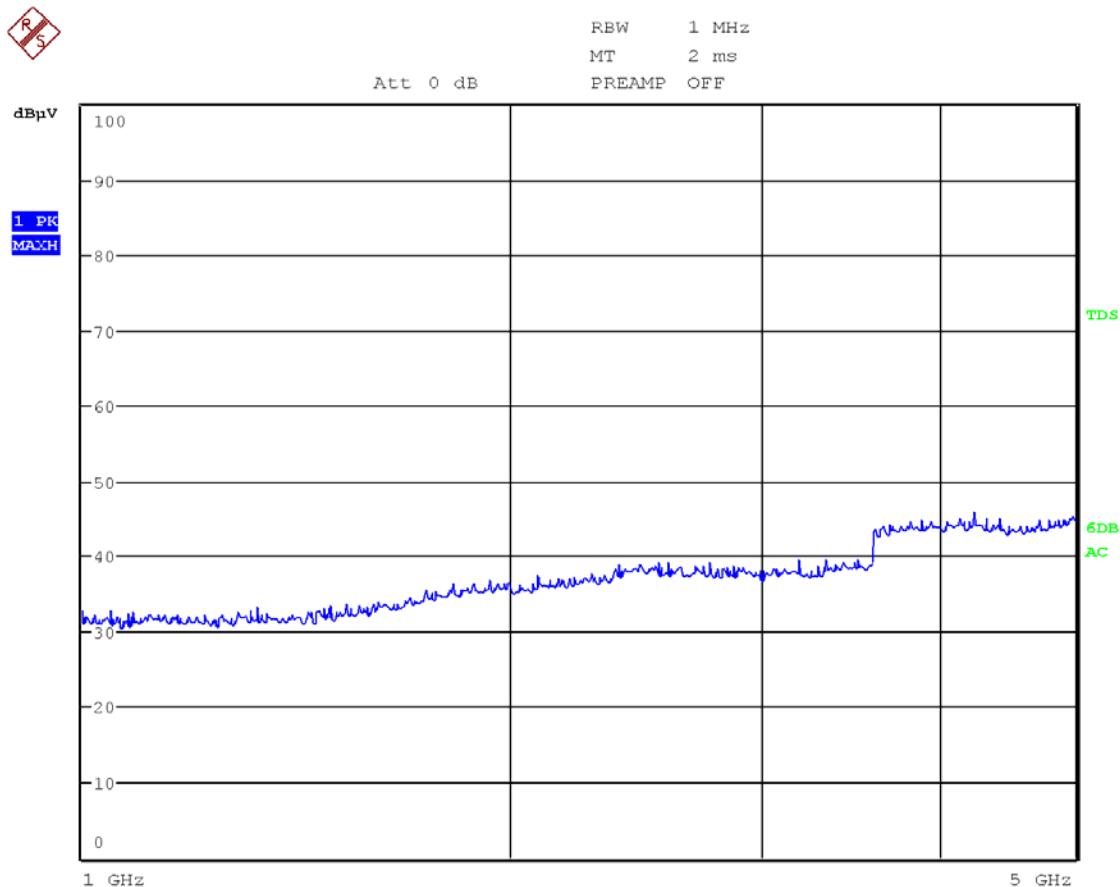

Detected Peaks: /


E.U.T	Receiver		
Environment	Tem:25 Hum:55%	Test Engineer:	Tian Fengyi
Site :	3M chamber	Limit	FCC 15.209
Note :	Normal Operation (ANT Vertical)		

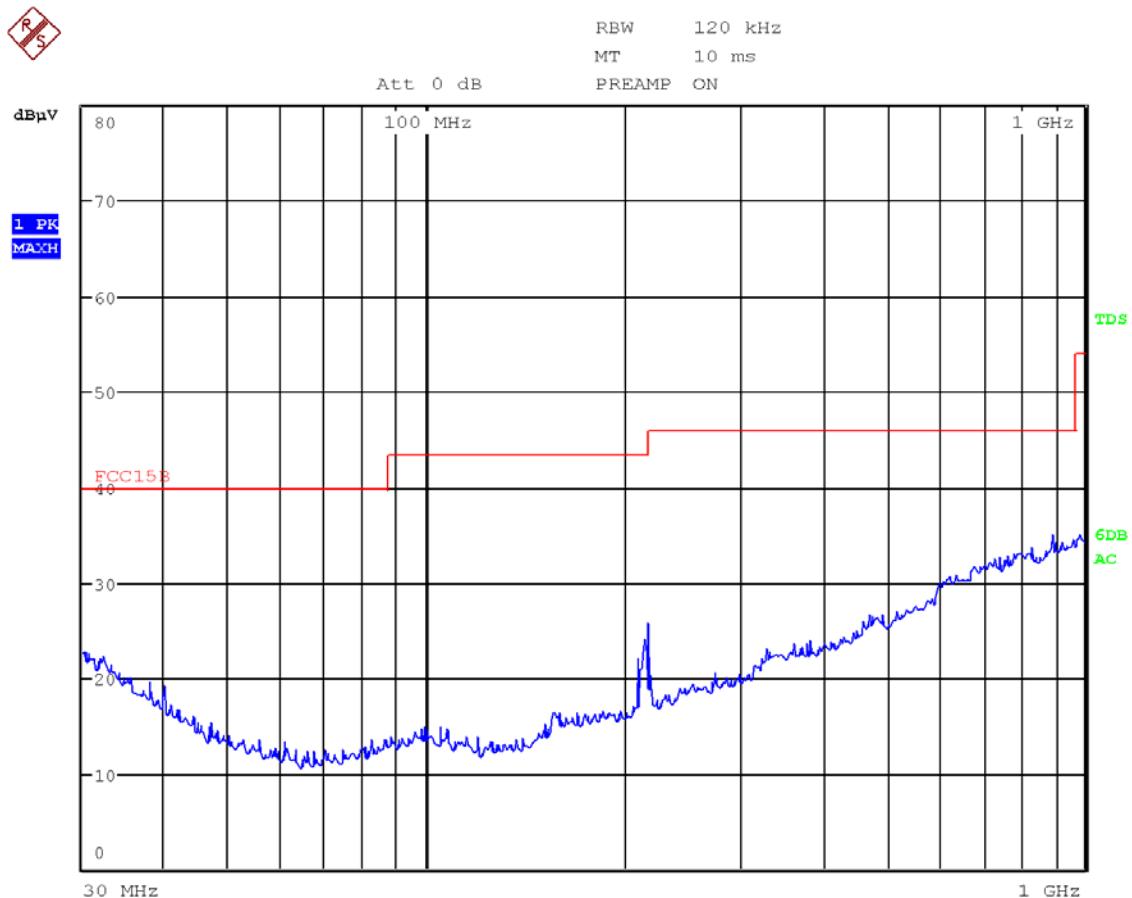

Detected Peaks:

No.	Frequency (MHz)	Reading dB(μ V/m)	QP Limit dB(μ V/m)	Margin dB(μ V/m)	Angle (degrees)	Height (m)	Result	H/V	Remark
1	30.360	27.8	40.0	12.2	0	1	Pass	V	Others
2	209.240	20.9	43.5	22.6	0	1	Pass	V	Others
3	216.560	21.4	46.0	24.6	0	1	Pass	V	Others
4	638.200	32.5	46.0	13.5	0	1	Pass	V	Others
5	762.240	34.4	46.0	11.6	0	1	Pass	V	Others
6	895.080	36.0	46.0	10.0	0	1	Pass	V	Others

E.U.T	Receiver		
Environment	Tem:25 Hum:55%	Test Engineer:	Tian Fengyi
Site :	3M chamber	Limit	FCC 15.209
Note :	Normal Operation(ANT Vertical)		

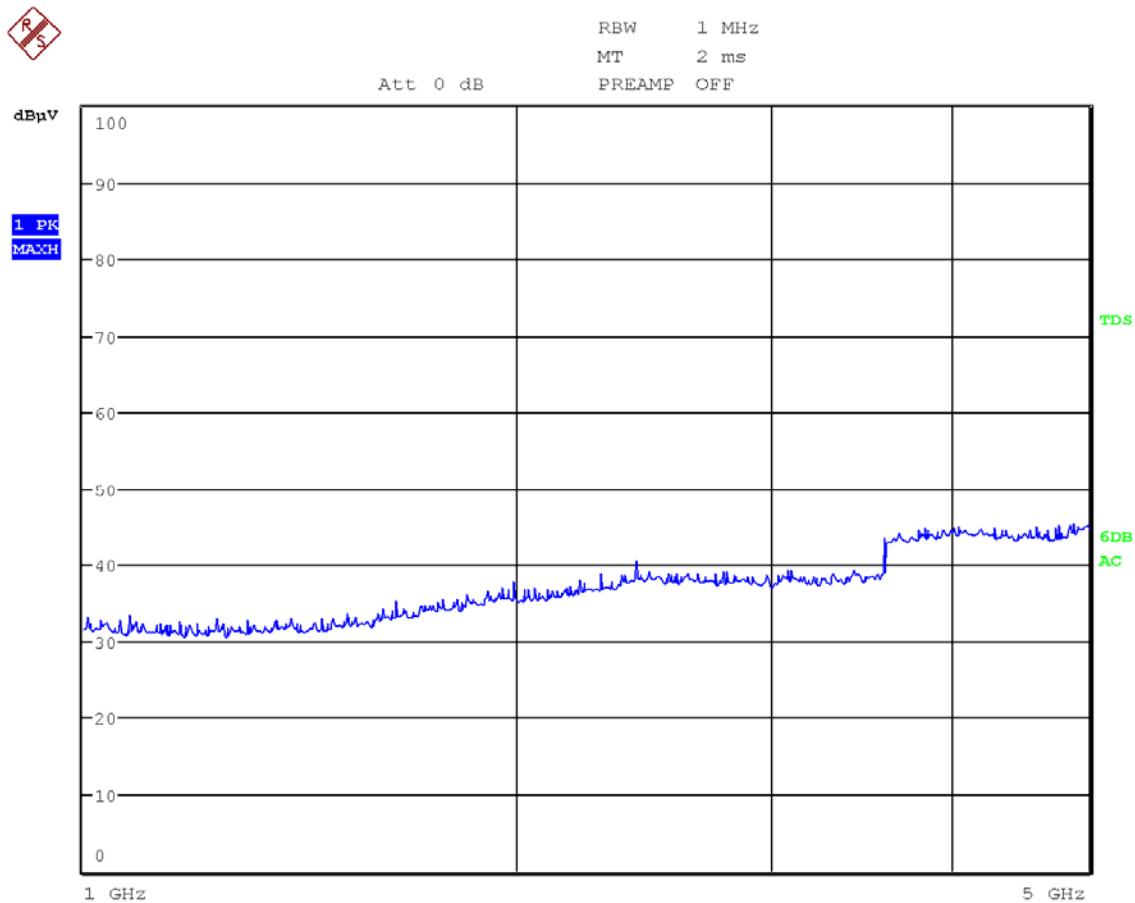

Detected Peaks: /