



# Radio Test Report

Report No.: STS2503347W02

Issued for

ELC Lighting BV

Weerijs 8 5422WV Gemert The Netherlands

Product Name: Green-GO Stride DECT Antenna

Brand Name: Green-GO

Model Name: Green-GO Stride DECT Antenna

Series Model(s): N/A

FCC ID: VIW-GGOSTRIDEA

Test Standards: Title 47 of the CFR, Part 15 Subpart D

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.



## TEST RESULT

**Applicant's Name** ..... : ELC Lighting BV

Address ..... : Weerijs 8 5422WV Gemert The Netherlands

**Manufacturer's Name** ..... : ELC Lighting BV

Address ..... : Weerijs 8 5422WV Gemert The Netherlands

### Product Description

Product Name ..... : Green-GO Stride DECT Antenna

Brand Name ..... : Green-GO

Model Name ..... : Green-GO Stride DECT Antenna

Series Model ..... : N/A

**Test Standards** ..... : Title 47 of the CFR, Part 15. Subpart D

Test procedure ..... : ANSI C63.17-2013

This device described above has been tested by STS and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**Date of Test** ..... :

Date of receipt of test item ..... : 28 Mar. 2025

Date of performance of tests ..... : 28 Mar. 2025~ 14 May 2025

Date of Issue ..... : 14 May 2025

Test Result ..... : **Pass**

Testing Engineer : *Lenon. Hou*

(Lenon Hou)

Technical Manager : *Skylar. Li*

(Skylar Li)

Authorized Signatory : *Bovey Yang*

(Bovey Yang)



**TABLE OF CONTENTS**

	Page
<b>1 INTRODUCTION</b>	<b>7</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2 PRODUCT INFORMATION</b>	<b>8</b>
<b>3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST</b>	<b>9</b>
3.1 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	9
3.2 SYSTEM TEST CONFIGURATION	10
<b>4 MEASUREMENT INSTRUMENTS</b>	<b>11</b>
<b>5 TEST ITEMS</b>	<b>12</b>
5.1 ANTENNA REQUIREMENT	12
5.2 MODULATION TECHNIQUES	12
5.3 EMISSION BANDWIDTH	13
5.4 PEAK TRANSMIT POWER	16
5.5 POWER SPECTRAL DENSITY	19
5.6 POWER ADJUSTMENT FOR ANTENNA GAIN	22
5.7 AUTOMATICALLY DISCONTINUE TRANSMISSION	23
5.8 SYSTEM ACKNOWLEDGE-MENT TEST	24
5.9 MONITORING THRESHOLD	26
5.10 DURATION OF TRANSMISSION	27
5.11 SELECTED CHANNEL CONFIRMATION, POWER ACCURACY, OCCUPANCY	SEGMENT 28
5.12 RANDOM WAITING	31
5.13 MONITORING REQUIREMENTS	32
5.14 MONITORING ANTENNA	33
5.15 DUPLEX CONNECTIONS	33
5.16 ALTERNATIVE MONITORING INTERVAL FOR CO-LOCATED DEVICES	34
5.17 FAIR ACCESS	34
5.18 SPURIOUS EMISSIONS	35
5.19 FRAME PERIOD	43
5.20 FREQUENCY STABILITY	44
5.21 CONDUCTED EMISSION MEASUREMENT	46
5.22 RADIATED SPURIOUS EMISSION	50

Revision History

Rev.	Issue Date	Report No.	Effect Page	Contents
00	14 May 2025	STS2503347W02	ALL	Initial Issue



## SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart D.

Requirement	FCC Part	Test Procedure	Result
Emission Bandwidth	15.323 (a)	6.1.3	Compliant
Labeling Requirements	15.19(a)(3)	--	Compliant
Conducted Emissions	15.315 & 15.207	ANSI C63.4	Not Applicable
Antenna Requirements	15.317 & 15.203	Declaration	Compliant
Use digital modulation	15.319 (b)	6.1.4	Compliant
Peak transmit power	15.319 (c)	6.1.2	Compliant
Power spectral density	15.319 (d)	6.1.5	Compliant
Power adjustment for antenna gain	15.319 (e)	4.3.1	Compliant
Automatically discontinue transmission	15.319 (f)	--	Compliant
Spurious emissions conducted	15.323 (d)	6.1.6	Compliant
RF Exposure	15.319 (i) & 1.1307(b), 2.1091 and 2.1093	ANSI/IEEE C95.1	Compliant (The test data please refer to RF exposure report)
Monitoring time	15.323 (c)(1)	7.3.4	Compliant
Monitoring threshold	15.323 (c)(2)	7.3	Compliant
Duration of transmission	15.323 (c)(3)	8.2.2	Not Applicable
System acknowledgment test	15.323(c)(4)	8.2.1	Compliant
Channel confirmation, Power accuracy, Segment occupancy	15.323 (c)(5)	7.3.3 & 7.3.4	Compliant
Random waiting	15.323 (c)(6)	8.1.3	Not Applicable
Monitoring bandwidth	15.323 (c)(7)	7.4	Compliant



Monitoring reaction time	15.323 (c)(1 )	7.5	Compliant
Monitoring antenna	15.323 (c)(8)	4	Compliant
Monitoring threshold relaxation	15.323 (c)(9)	4	Compliant
Duplex connections	15.323 (c)(10)	8.3	Not Applicable
Alternate monitoring interval	15.323 (c)(11)	8.4	Not Applicable
Fair access	15.323 (c)(12)	Declaration	Not Applicable
Frame period	15.323 (e)	6.2.2 & 6.2.3	Compliant
Frequency stability	15.323 (f)	6.2.1	Compliant
Radiated Out of Band Emissions	15.319 (g), 15.309 (b) & FCC Part 15 Subpart B, 15.109 and 15.209	--	Compliant



## 1 INTRODUCTION

### 1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 30-1GHz	$\pm 4.18\text{dB}$
4	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
5	All emissions, radiated>6G	$\pm 5.24\text{dB}$
6	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
7	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$



## 2 PRODUCT INFORMATION

Product Name	Green-GO Stride DECT Antenna
Brand Name	Green-GO
Model Name	Green-GO Stride DECT Antenna
Series Model	N/A
Product Differences	N/A
Hardware version number	5
Software version number	5.1.1
EUT Frequency Ranges	1920 MHz - 1930MHz
Type of Modulations	GFSK
Packet type	PP32Z, PP64Z
Number of Channels	5 CH. Please see Note 2.
Antenna Type	Type A:PCB Type B:PCB
Antenna Gain	Type A: 4.4dBi Type B: 4.4dBi
Power Rating	Input: 37.0–57.0V at 200mA max on the ethernet port 4.5-6V at 800mA max on the USB-C port
Adapter	N/A
Battery	N/A
Extreme Temp. Tolerance	0°C to 55°C

Note: 1. Channel list:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
04	1921.536	03	1923.264	02	1924.992
01	1926.720	00	1928.448	--	--



### 3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST

#### 3.1 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
N/A	N/A	N/A	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
N/A	N/A	N/A	N/A	N/A

Note:


(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

## 3.2 SYSTEM TEST CONFIGURATION

Figure 1:



Figure 2:

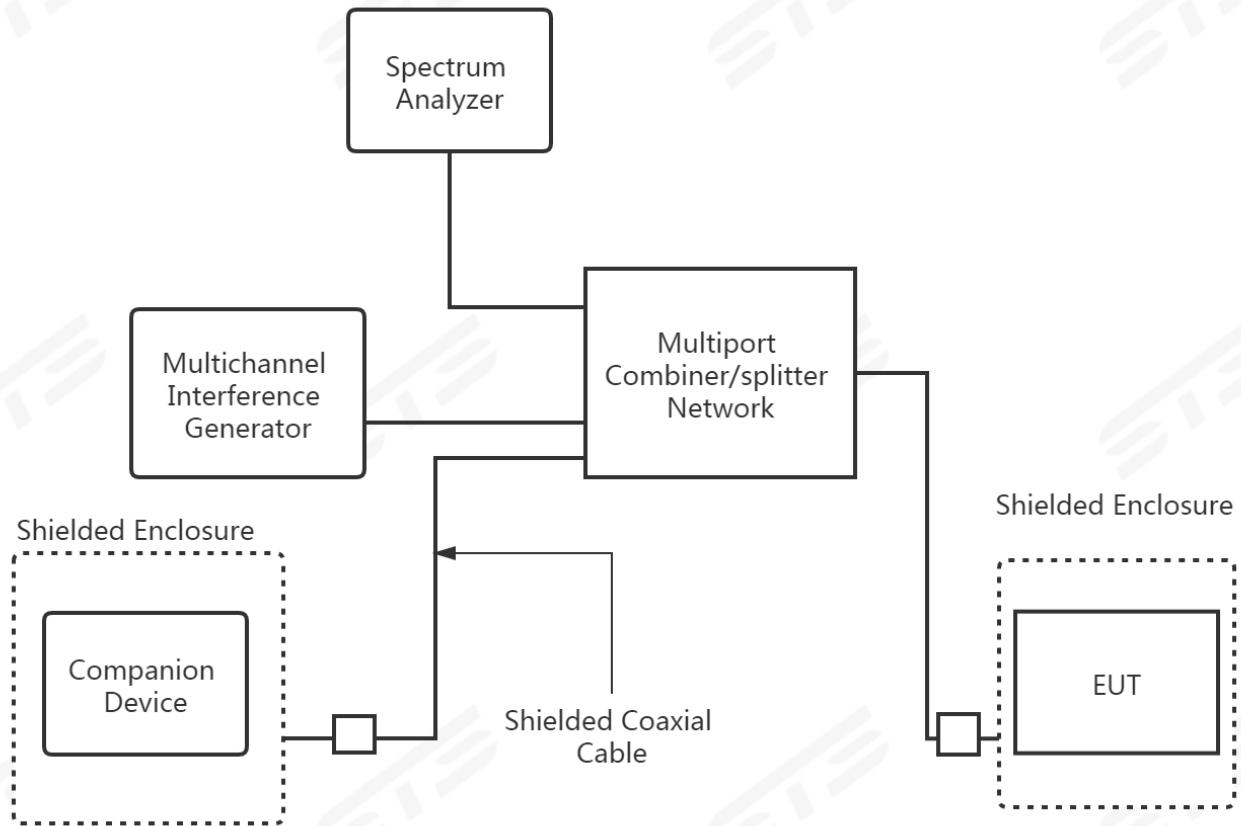



## 4 MEASUREMENT INSTRUMENTS

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Wireless Communications Test Set	R&S	CMW 500	117239	2024.09.23	2025.09.22
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
Pre-Amplifier (1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2024.09.23	2025.09.22
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2024.09.23	2025.09.22
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Video Controller	SKET	FCS C-3	N/A	N/A	N/A
Bilog Antenna	TESEQ	CBL6111D	34678	2024.09.30	2025.09.29
Horn Antenna	SCHWARZ-BECK	BBHA 9120D	02014	2024.09.25	2025.09.24
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	N/A	N/A	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC Power Supply	Zhaoxin	RXN 605D	20R605D11010081	N/A	N/A
Test SW	EMC Test Software	15.2.0.339			
Conduction Test equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2024.09.23	2025.09.22
LISN	R&S	ENV216	101242	2024.09.23	2025.09.22
LISN	EMCO	3810/2NM	23625	2024.09.23	2025.09.22
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
RF Connected Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
RF Test Platform For DECT	RTX	RTX 2012 HS	1138-6122	2025.02.22	2026.02.21
Signal Generator	Agilent	N5182A	MY46240556	2024.09.23	2025.09.22
Signal Analyzer	Agilent	N9020A	MY52440124	2025.02.22	2026.02.21
Temperature & Humidity Test Chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
Programmable Power Supply	Agilent	E3642A	MY40002025	2024.09.23	2025.09.22
Attenuator	HP	8494B	DC-18G	2025.02.25	2026.02.24
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
Test SW	RTX2012	RTX20xx v0.9.61 A			

Equipment with a calibration date of "NCR" shown in this list was not used to make direct calibrated measurements.



## 5 TEST ITEMS

### 5.1 ANTENNA REQUIREMENT

#### TEST OVERVIEW

§ 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

#### TEST RESULT

The EUT as tested is compliant the criteria of §15.203. The antenna is permanently attached to the unit.

### 5.2 MODULATION TECHNIQUES

#### TEST REQUIREMENT

All transmissions must use only digital modulation techniques.

#### TEST PROCEDURES

Attestation of manufacturer supported by reference to relevant DECT specifications.

#### ATTESTATION

This device is compliant with the DECT standards described in European Standards EN 300 175-2 and EN 300 175-3. DECT transmissions are MC/TDMA/TDD (Multi carrier / Time Division Multiple Access / Time Division Duplex) using Digital GFSK modulation. For further details see operational description or relevant portions of the DECT standards.

#### TEST RESULTS

The EUT as tested is compliant the criteria of §15.319(b).



## 5.3 EMISSION BANDWIDTH

### TEST OVERVIEW

§ 15.323(a): For purposes of this subpart the emission bandwidth shall be determined by measuring the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, that are 26 dB down relative to the maximum level of the modulated carrier. Compliance with the emissions limits is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

### TEST PROCEDURE

Operation shall be contained within the 1920-1930 MHz band. The emission bandwidth shall be less than 2.5 MHz. The power level shall be as specified in §15.319(c), but in no event shall the emission bandwidth be less than 50 kHz.

### TEST SETUP


The test setup is shown in section 3.2 figure 1.





## TEST RESULTS

The Eut was compliant with this requirement.

Channel	Left frequency	Right frequency	26dB BW(MHz)	Limit
Low	1920.858	1922.223	1.365	50KHz~2.5MHz
Mid	1924.311	1925.682	1.371	
High	1927.767	1929.147	1.380	
AVG	\	\	1.372	

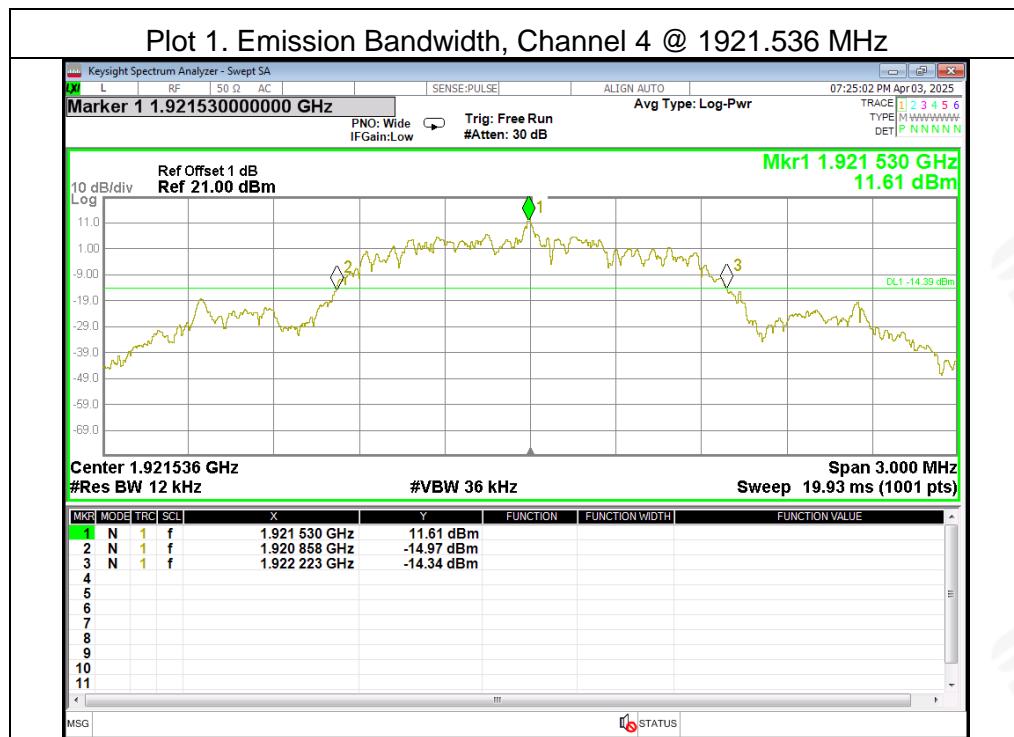

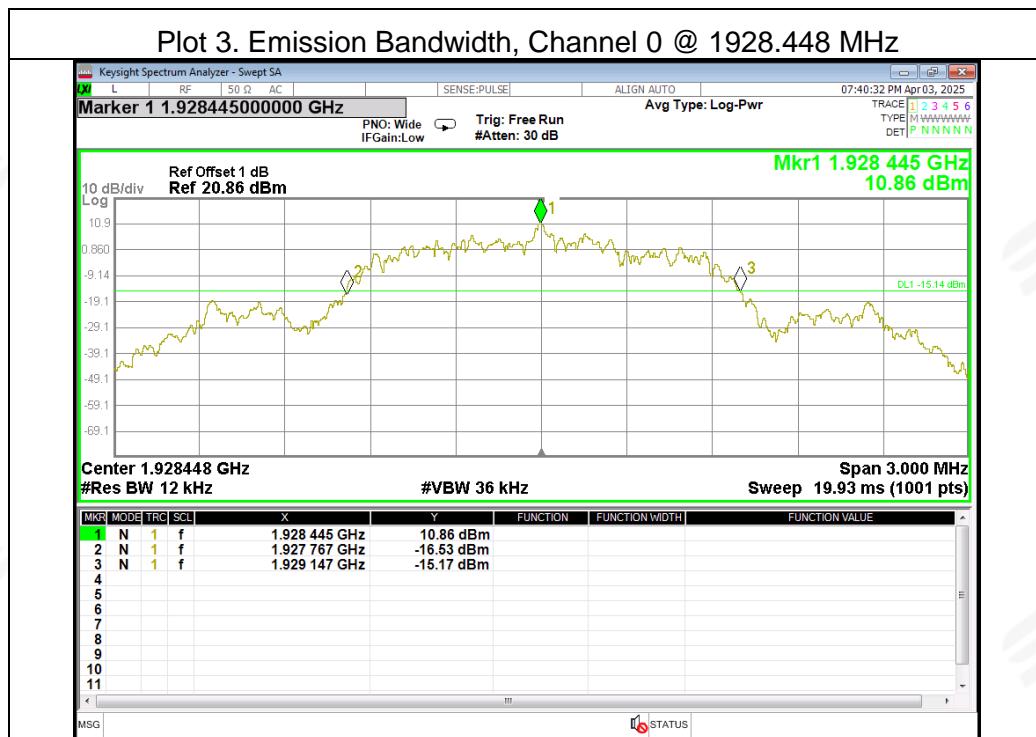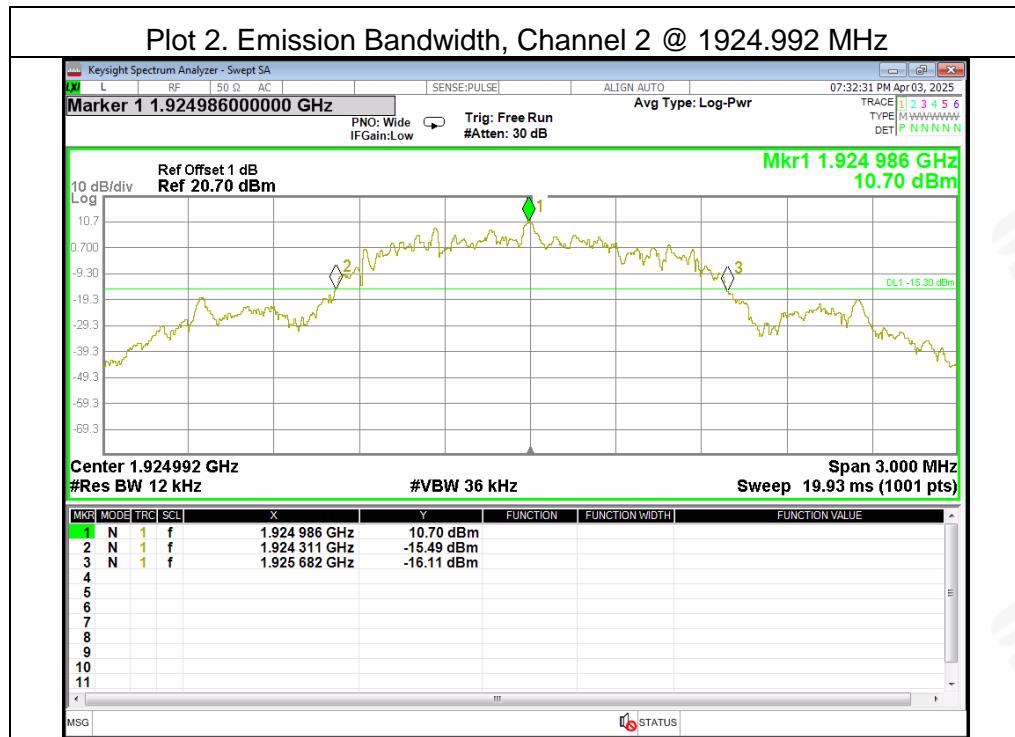



## 5.4 PEAK TRANSMIT POWER

### TEST OVERVIEW

§15.319(c)&RSS 213(5.6): The peak transmit power shall not exceed 100 microwatts multiplied by the square root of the emission bandwidth in hertz. Peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

### TEST PROCEDURE


Testing to ANSI C63.17-2013 Clause 6.1.2, which provides the test methodology for this provision. The EUT is controlled from a personal computer and set into continuous transmission mode.


### TEST SETUP

The test setup is shown in section 3.2 figure 1.

### TEST RESULTS

Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)	Limit (uW)	Limit (dBm)
Low	1921.536	17.31	116833	19.28
Mid	1924.992	17.28	117090	19.29
High	1928.448	17.26	117473	19.30
EBWLow Channel=	1365000			Hz
EBWMid Channel=	1371000			Hz
EBWHigh Channel=	1380000			Hz
Note:Peak Transmitter Power Limit=100 ( EBW ) 1/2μW				

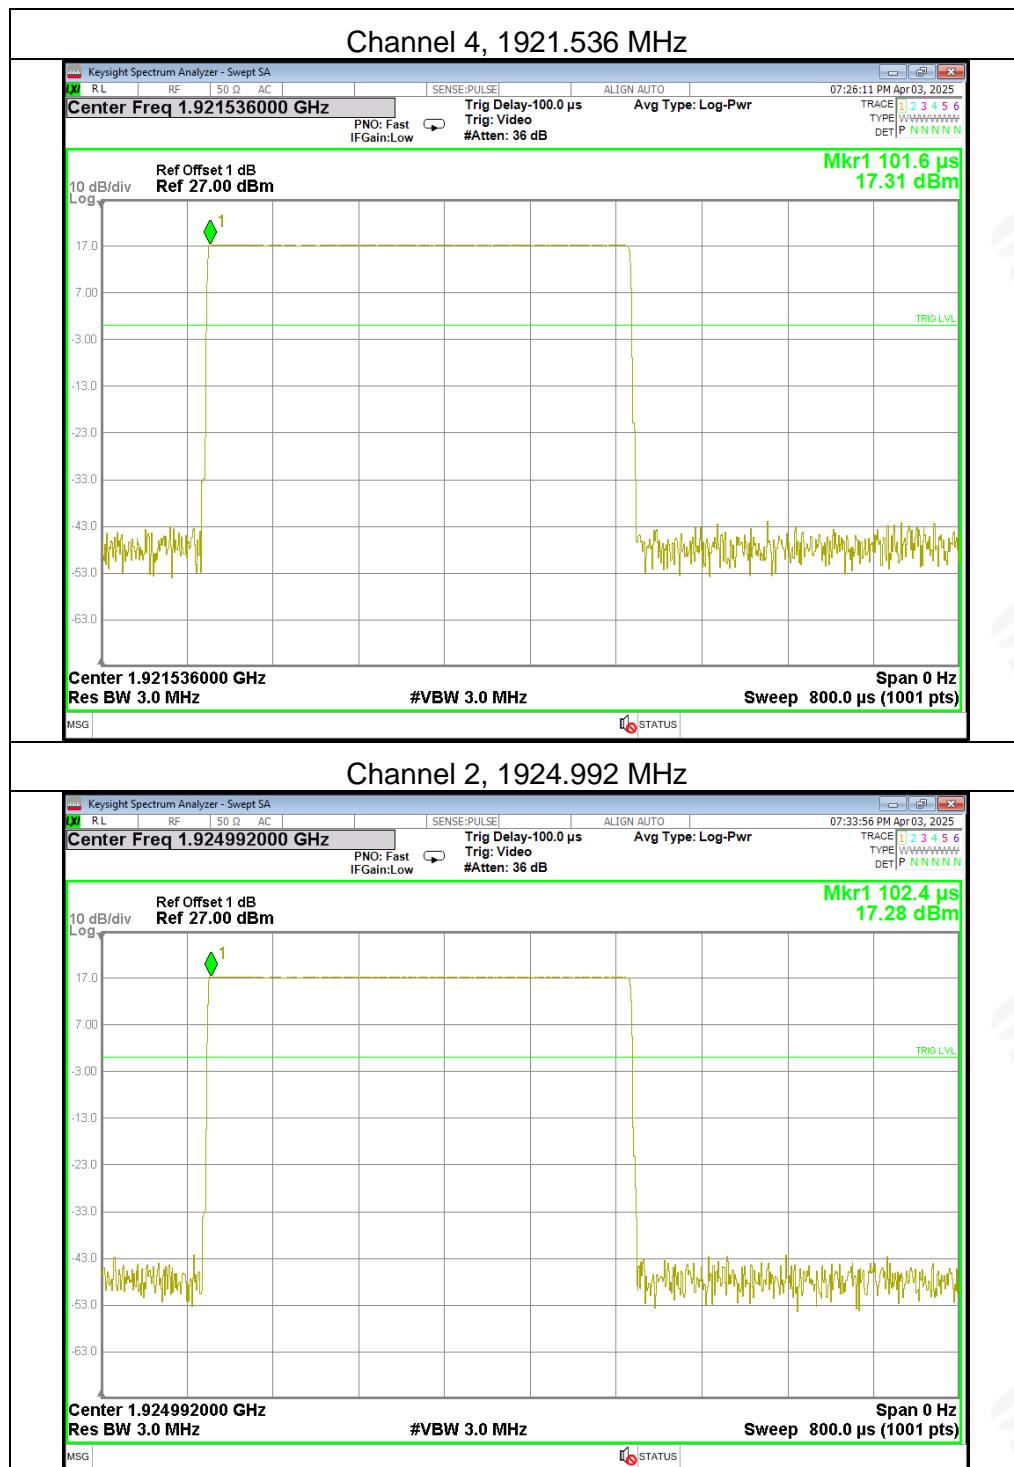

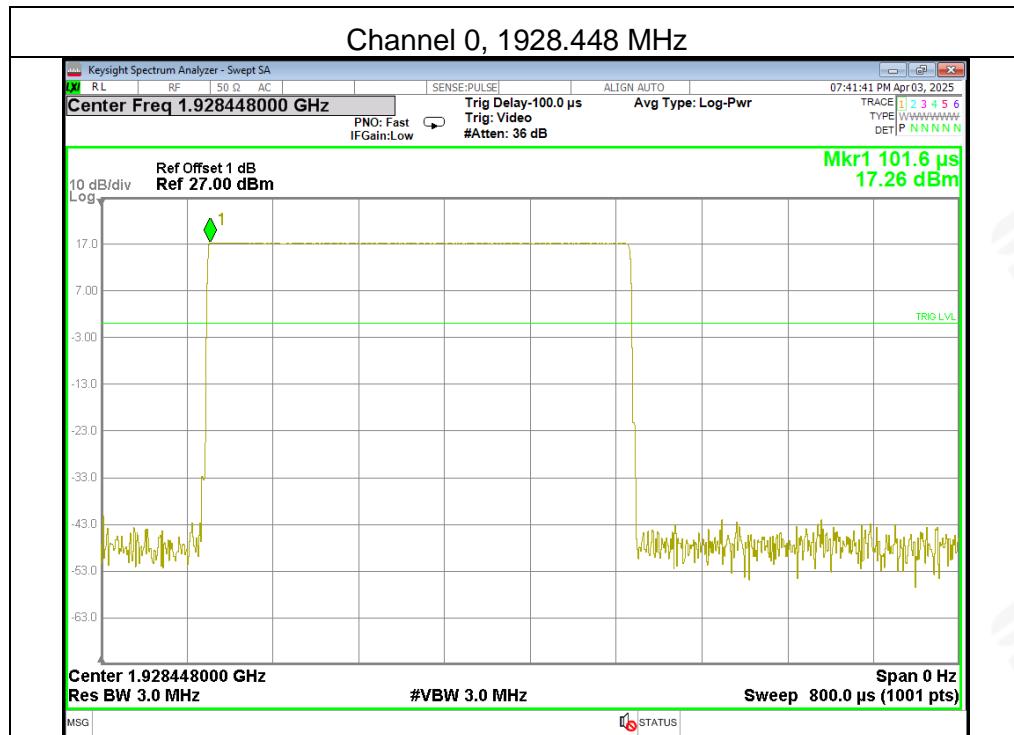



## 5.5 POWER SPECTRAL DENSITY

### TEST OVERVIEW

§15.319(d): Power spectral density shall not exceed 3 milliwatts in any 3 kHz bandwidth as measured with a spectrum analyzer having a resolution bandwidth of 3 kHz.

### TEST PROCEDURE


Testing to ANSI C63.17-2013 Clause 6.1.5, which provides the test methodology for this provision.


### TEST SETUP

The test setup is shown in section 3.2 figure 1.

### TEST RESULTS

Carrier Channel	Frequency (MHz)	Measured AVG Power Spectral Density (dBm)	Limit(mw)	Limit(dBm)
Low	1921.536	-4.18	3	4.77
Mid	1924.992	-3.90		
High	1928.448	-2.89		

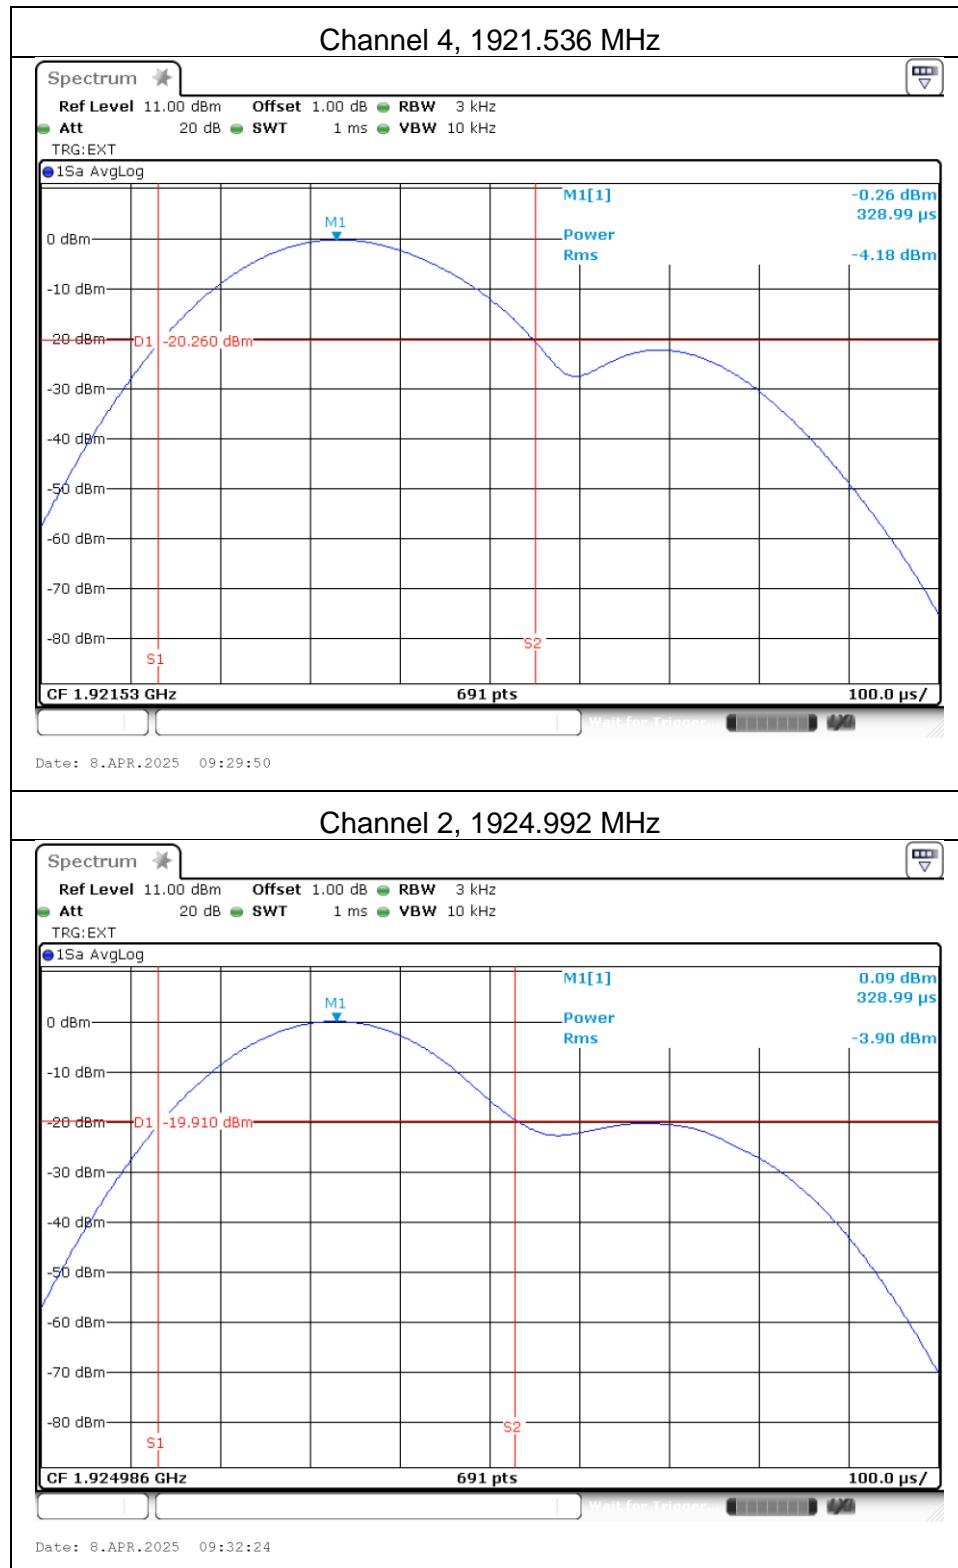

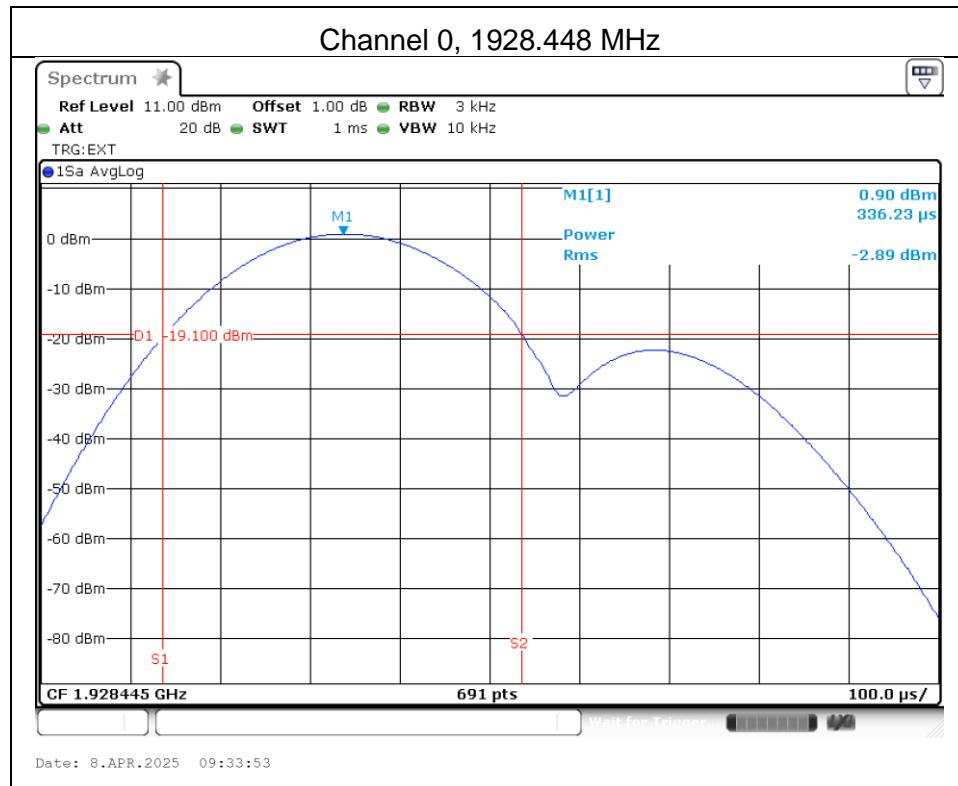



## 5.6 POWER ADJUSTMENT FOR ANTENNA GAIN

### TEST OVERVIEW

§15.319(e): The peak transmit power shall be reduced by the amount in decibels that the maximum directional gain of the antenna exceeds 3 dBi.

### TEST PROCEDURE

Testing to ANSI C63.17-2013 Clause 4.3.1, which provides the test methodology for this provision.

### TEST RESULT

Equipment Employs a 4.4 dBi Antenna. Max output power allowed with this gain by the EUT is 17.31dBm. The Max output power does not need to be reduced.

The Output Power complies with the Power Adjustment for Antenna Gain requirements of §15.319(e).



## 5.7 AUTOMATICALLY DISCONTINUE TRANSMISSION

### OVERVIEW

§15.319(f): The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude transmission of control and signaling information or use of repetitive codes used by certain digital technologies to complete frame or burst intervals.

### TEST RESULTS

	Test	Reaction of EUT	Result
1	Remove Power from Companion Device	A	Pass
2	Switch off the companion device	A	Pass
3	Terminate call at the companion device	NA1	Pass
4	Switch off the EUT	NA2	Pass
5	Terminate call at the EUT	NA3	Pass

A - Connection was terminated and transmission ceased.

B - Connection was terminated but the EUT transmits control or signaling information.

C - Connection was terminated but the companion device transmits control or signaling information.

NA 1 - Companion Device does not have an on/off switch for terminate call.

NA 2 - EUT does not have an on/off switch.

NA 3 – EUT does not have a switch for terminate call.



## 5.8 SYSTEM ACKNOWLEDGEMENT TEST

### TEST OVERVIEW

§ 15.323(c)(4): Once access to specific combined time and spectrum windows is obtained an acknowledgement from a system participant must be received by the initiating transmitter within one second or transmission must cease. Periodic acknowledgments must be received at least every 30 seconds or transmission must cease. Channels used exclusively for control and signaling information may transmit continuously for 30 seconds without receiving an acknowledgment, at which time the access criteria must be repeated.

### TEST PROCEDURE

Measurement method according to ANSI C63.17 2013 clause 8.2.1

During testing initial transmission without acknowledgement, the signal from the EUT to the companion device is blocked by the circulator.

The test of the transmission time after loss of acknowledgements is performed by cutting off the signal from the companion device by a RF switch and measuring the time until the EUT stops transmitting.

### TEST SETUP

The test setup is shown in section 3.2 figure 2.