



FCC RF Test Report

(U-NII)

Applicant: Rajant Corporation
Address of Applicant: 200 Chesterfield Parkway, Malvern PA 19355, United States
Equipment Under Test (EUT)
Product Name: Breadcrumb Module AG1
Model No.: AG1-5250M
Trade Mark: Cardinal
FCC ID: VJA-AG15250M
Applicable Standards: FCC CFR Title 47 Part 15E (§15.407)
Date of Sample Receipt: 19 Jun., 2023
Date of Test: 20 Jun., to 08 Oct., 2023
Date of Report Issued: 09 Oct., 2023
Test Result: PASS

Tested by:

June Li
Test Engineer

Date:

09 Oct., 2023

Reviewed by:

June Li
Project Engineer

Date:

09 Oct., 2023

Approved by:

June Li
Manager

Date:

09 Oct., 2023

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

1 Version

Version No.	Date	Description
00	25 Aug., 2023	Original
01	09 Oct., 2023	1. Updated pages 12, 13, 15, 20, 21, 22, 23, 24, 25.

2 Contents

Page

Cover Page	1
1 Version	2
2 Contents.....	3
3 General Information.....	4
3.1 Client Information	4
3.2 General Description of E.U.T.	4
3.3 Test Mode and Environment	5
3.4 Description of Test Auxiliary Equipment	5
3.5 Measurement Uncertainty	5
3.6 Additions to, Deviations, or Exclusions from the Method	5
3.7 Laboratory Facility	6
3.8 Laboratory Location.....	6
3.9 Test Instruments List	6
4 Measurement Setup and Procedure	9
4.1 Test Channel	9
4.2 Test Setup	9
4.3 Test Procedure	11
5 Test Results.....	12
5.1 Summary	12
5.1.1 Clause and Data Summary.....	12
5.1.2 Test Limit.....	13
5.2 Antenna requirement.....	15
5.3 AC Power Line Conducted Emission	16
5.4 EIRP of Band 1.....	20
5.5 Unwanted Emissions.....	26

3 General Information

3.1 Client Information

Applicant:	Rajant Corporation
Address:	200 Chesterfield Parkway, Malvern PA 19355, United States
Manufacturer:	8devices
Address:	Antakalnio g. 17, LT-10312 Vilnius
Factory:	8devices
Address:	Zirniu g. 26D, LT-02119 Vilnius

3.2 General Description of E.U.T.

Product Name:	Breadcrumb Module AG1	
Model No.:	AG1-5250M	
Operation Frequency:	Band 1: 5150 MHz - 5250 MHz	
	Band 4: 5725 MHz - 5850 MHz	
Channel Numbers:	Band 1, 2: 4 , Band 3: 11, Band 4: 5 (802.11a, n-HT20, ac-VHT20)	
	Band 1, 2, 4: 2 , Band 3: 5 (802.11n-HT40, ac-VHT40)	
	Band 1, 2, 4: 1 , Band 3: 2 (802.11ac-VHT80)	
Modulation Technology: (IEEE 802.11a/802.11n)	OFDM-BPSK, QPSK, 16QAM, 64QAM	
Modulation Technology: (IEEE 802.11ac)	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM	
Antenna Type:	External Antenna	
Antenna Gain:	ANT A Band 1 (KMA-5250-7-NM)	Band 1:7.0 dBi
	ANT A Band 4 (KMA-5800-6-NM)	Band 4:6.0 dBi
	ANT B (PUCK-12)	7.5 dBi
Antenna Transmit Mode:	MIMO (2TX, 2RX)	
Power Supply:	DC 24V	
Test Sample Condition:	The test samples were provided in good working order with no visible defects.	

3.3 Test Mode and Environment

Test Mode:	
Transmitting mode:	Keep the EUT in continuous transmitting with modulation
Per-scan all kind of data rate, the follow list were the worst case:	
Mode	Data rate
802.11a	6.0 Mbps
802.11n-HT20	6.5 Mbps
802.11n-HT40	13.5 Mbps
802.11ac-VHT20	6.5 Mbps
802.11ac-VHT40	13.5 Mbps
802.11ac-VHT80	29.3 Mbps
Remark: For AC power line conducted emission and radiated spurious emission (below 1GHz), pre-scan 802.11a, n, ac modulation mode, found 802.11a modulation mode was worse case mode. The report only reflects the test data of worst mode.	
Operating Environment:	
Temperature:	15°C ~ 35°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 21.6 Vdc, Extreme: Low 24.0 Vdc, High 26.4 Vdc

3.4 Description of Test Auxiliary Equipment

The EUT has been tested as an independent unit.

3.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 10MHz)	1.9 dB
Conducted Emission for LISN (10MHz ~ 30MHz)	2.6 dB
Radiated Emission (30MHz ~ 1GHz) (3m SAC)	3.8 dB
Radiated Emission (1GHz ~ 6GHz) (3m FAR)	4.95 dB
Radiated Emission (6GHz ~ 18GHz) (3m FAR)	5.23 dB
Radiated Emission (18GHz ~ 40GHz) (3m FAR)	5.32 dB
Radiated Emission (30MHz ~ 1GHz) (10m SAC)	3.7 dB
Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.	

3.6 Additions to, Deviations, or Exclusions from the Method

No

3.7 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

● **FCC - Designation No.: CN1211**

JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

● **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

● **CNAS - Registration No.: CNAS L15527**

JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.

● **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

3.8 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.

Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.

Tel: +86-755-23118282, Fax: +86-755-23116366

Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

3.9 Test Instruments List

Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	04-14-2021	04-13-2024
Loop Antenna	Schwarzbeck	FMZB 1519 B	WXJ002-4	02-09-2023	02-08-2024
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	02-09-2023	02-08-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	02-09-2023	02-08-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	01-09-2023	01-08-2024
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXJ001-2	01-10-2023	01-09-2024
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXJ001-3	01-10-2023	01-09-2024
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	01-11-2023	01-10-2024
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	01-11-2023	01-10-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	01-10-2023	01-09-2024
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ004-2	10-17-2022	10-16-2023
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	01-18-2023	01-17-2024
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	01-18-2023	01-17-2024
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	01-18-2023	01-17-2024
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Radiated Emission(3m FAR):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m FAR	YUNYI	9m*6m*6m	WXJ097	06-15-2023	06-14-2028
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ097-2	07-13-2023	07-12-2024
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	07-02-2021	07-01-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ097-3	07-14-2023	07-13-2024
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	01-09-2023	01-08-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-5	01-09-2023	01-08-2024
Horn Antenna	Schwarzbeck	BBHA9170	WXJ002-6	01-09-2023	01-08-2024
Pre-amplifier (30MHz ~ 1GHz)	YUNYI	PAM-310N	WXJ097-5	05-14-2023	05-13-2024
Pre-amplifier (1GHz ~ 18GHz)	YUNYI	PAM-118N	WXJ097-6	05-14-2023	05-13-2024
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXJ002-7	01-11-2023	01-10-2024
EMI Test Receiver	Rohde & Schwarz	ESCI3	WXJ003	01-10-2023	01-09-2024
Spectrum Analyzer	Rohde & Schwarz	FSP 30	WXJ004	01-10-2023	01-09-2024
Spectrum Analyzer	KEYSIGHT	N9010B	WXJ081-1	06-13-2023	06-12-2024
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-13M	WXG097-1	08-01-2023	07-31-2024
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG097-2	08-01-2023	07-31-2024
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG097-3	08-01-2023	07-31-2024
High Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Low Band Reject Filter Group	Tonscend	JS0806-F	WXJ097-4	N/A	
Test Software	Tonscend	TS+	Version: 5.0.0		

Radiated Emission(10m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
10m SAC	ETS	RFSD-100-F/A	WXJ090	04-28-2021	04-27-2024
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-1	01-17-2023	01-16-2024
BiConiLog Antenna	SCHWARZBECK	VULB 9168	WXJ090-2	01-10-2023	01-09-2024
EMI Test Receiver	R&S	ESR 3	WXJ090-3	01-10-2023	01-09-2024
EMI Test Receiver	R&S	ESR 3	WXJ090-4	01-11-2023	01-09-2024
Low Pre-amplifier	Bost	LNA 0920N	WXJ090-6	01-10-2023	01-09-2024
Low Pre-amplifier	Bost	LNA 0920N	WXJ090-7	01-10-2023	01-09-2024
Cable	Bost	JYT10M-1G-NN-10M	WXG002-7	01-18-2023	01-17-2024
Cable	Bost	JYT10M-1G-NN-10M	WXG002-8	01-18-2023	01-17-2024
Test Software	R&S	EMC32	Version: 10.50.40		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESR3	WXJ003-2	07-12-2022	07-11-2023
				07-09-2023	07-10-2024
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	01-10-2023	01-09-2024
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	01-11-2023	01-10-2024
LISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-NN-2M	WXG003-1	02-22-2023	02-21-2024
RF Switch	TOP PRECISION	RSU0301	WXG003	N/A	
Test Software	AUDIX	E3	Version: 6.110919b		

Conducted Method:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Keysight	N9010B	WXJ004-3	10-17-2022	10-16-2023
DC Power Supply	Keysight	E3642A	WXJ025-2	N/A	
Temperature Humidity Chamber	ZHONG ZHI	CZ-A-80D	WXJ032-3	01-09-2023	01-08-2025
Power Detector Box	MWRFTTEST	MW100-PSB	WXJ007-4	10-17-2022	10-16-2023
RF Control Unit	MWRFTTEST	MW100-RFCB	WXG006	N/A	
Test Software	MWRFTTEST	MTS 8310	Version: 2.0.0.0		

4 Measurement Setup and Procedure

4.1 Test Channel


According to ANSI C63.10-2013 chapter 5.6.1 Table 4 requirement, select lowest channel, middle channel, and highest channel in the frequency range in which device operates for testing. The detailed frequency points are as follows:

Operation frequency: 5150 MHz – 5250 MHz						
Modulation mode	Lowest channel		Middle channel		Highest channel	
	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11a, n-HT20, ac-VHT20	36	5180	40	5200	48	5240
802.11n-HT40, ac-VHT40	38	5190	/	/	46	5230
802.11ac-VHT80	/	/	42	5210	/	/

Operation frequency: 5725 MHz – 5850 MHz						
Modulation mode	Lowest channel		Middle channel		Highest channel	
	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
802.11a, n-HT20, ac-VHT20	149	5745	157	5785	165	5825
802.11n-HT40, ac-VHT40	151	5755	/	/	159	5795
802.11ac-VHT80	/	/	155	5775	/	/

4.2 Test Setup


1) Conducted emission measurement:

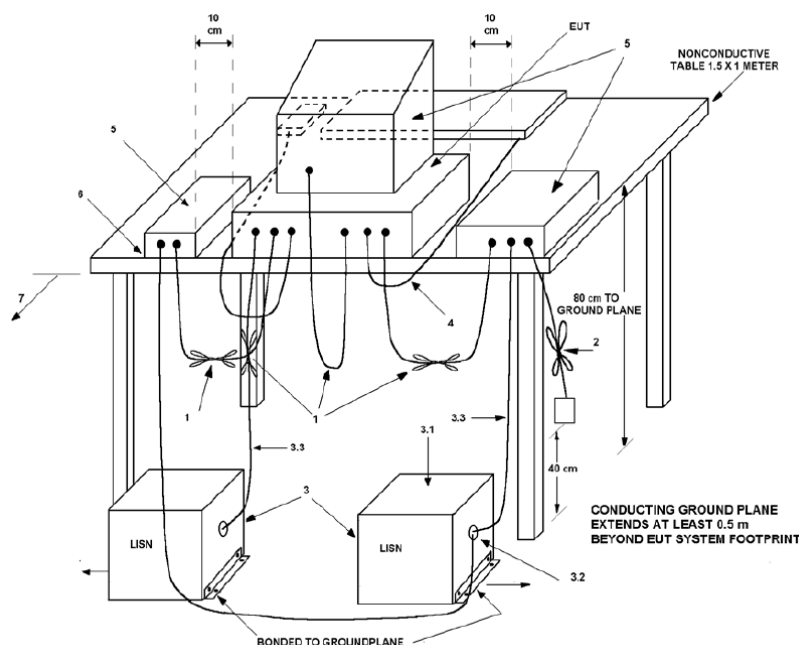


Note: The detailed descriptions please refer to Figure 8 of ANSI C63.4:2014.

2) Radiated emission measurement:


Below 1GHz (10m SAC)

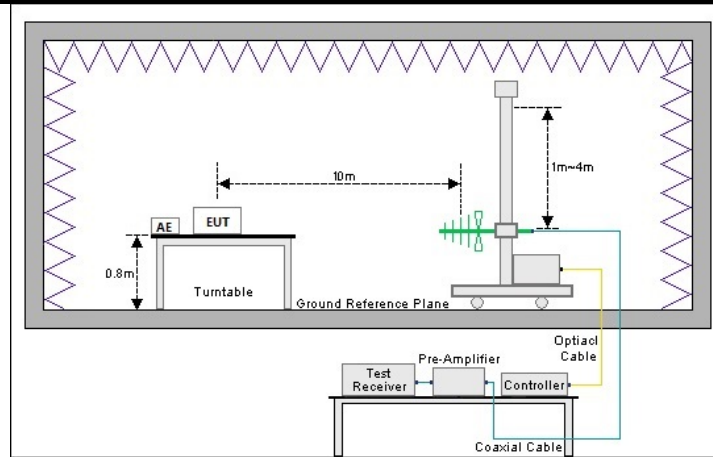

Above 1GHz (3m SAC)

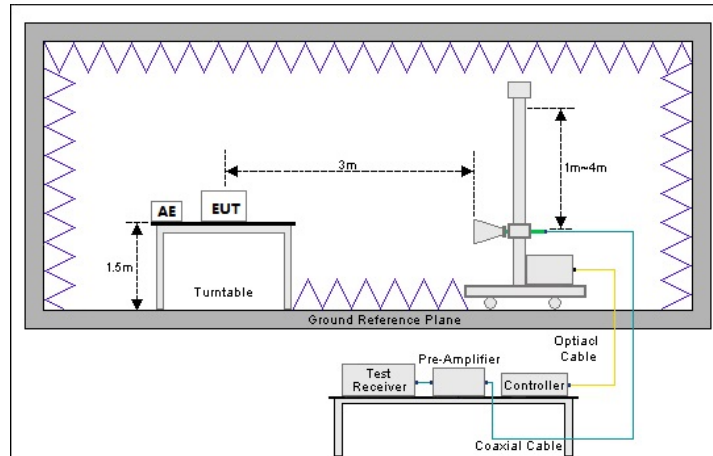

3) Conducted test method

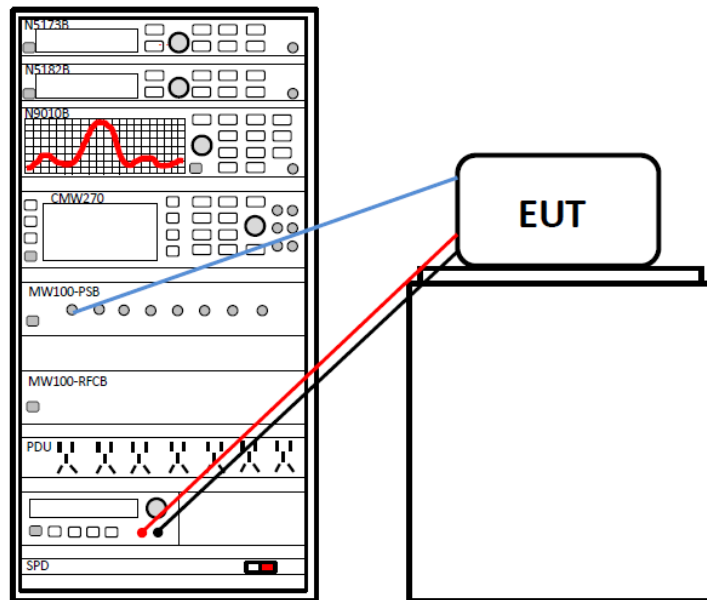

4.3 Test Procedure

Test method	Test step
Conducted emission	1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.
Radiated emission	For below 1GHz: 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 10 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 10 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. For above 1GHz: 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested , and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.
Conducted test method	1. The Wi-Fi antenna port of EUT was connected to the test port of the test system through an RF cable. 2. The EUT is keeping in continuous transmission mode and tested in all modulation modes. 3. Open the test software, prepare a test plan, and control the system through the software. After the test is completed, the test report is exported through the test software.

5 Test Results

5.1 Summary

5.1.1 Clause and Data Summary

Test items	Standard clause	Test data	Result
Antenna Requirement	15.203	See Section 5.2	Pass
AC Power Line Conducted Emission	15.207 15.407 (b)(9)	See Section 5.3	Pass
Duty Cycle	ANSI C63.10-2013	Appendix A – 5.2G Wi-Fi Ant0 Appendix A – 5.8G Wi-Fi Ant0 Appendix A – 5.2G Wi-Fi Ant1 Appendix A – 5.8G Wi-Fi Ant1	Pass
Conducted Peak Output Power Power Spectral Density	15.407 (a)(1)(i), (a)(3)(i)	Appendix A – 5.2G Wi-Fi Ant0 Appendix A – 5.8G Wi-Fi Ant0 Appendix A – 5.2G Wi-Fi Ant1 Appendix A – 5.8G Wi-Fi Ant1	Pass
26dB Emission Bandwidth 99% Occupied Bandwidth	15.407 (a)(12)	Appendix A – 5.2G Wi-Fi Ant0 Appendix A – 5.8G Wi-Fi Ant0 Appendix A – 5.2G Wi-Fi Ant1 Appendix A – 5.8G Wi-Fi Ant1	Pass
6dB Emission Bandwidth	15.407 (e)	Appendix A – 5.2G Wi-Fi Ant0 Appendix A – 5.8G Wi-Fi Ant0 Appendix A – 5.2G Wi-Fi Ant1 Appendix A – 5.8G Wi-Fi Ant1	Pass
Unwanted Emissions	15.205 15.209 15.407 (b)(1), (4), (9), (10)	See Section 5.4	Pass
Frequency Stability	15.407 (g)	Appendix A – 5.2G Wi-Fi Ant0 Appendix A – 5.8G Wi-Fi Ant0 Appendix A – 5.2G Wi-Fi Ant1 Appendix A – 5.8G Wi-Fi Ant1	Pass
Dynamic frequency selection	15.407 (h)(2)	N/A	N/A
Remark: 1. Pass: The EUT complies with the essential requirements in the standard. 2. N/A: Not Applicable. 3. The cable insertion loss used by “RF Output Power” and other conduction measurement items is 1.0dB (provided by the customer). 4. For the band 5.15–5.25 GHz, the EIRP at any elevation angle above 30 degrees was tested, and found the 90 ° was the worst-case. Only the worst-case reflected in the report.			
Test Method:	ANSI C63.10-2013 KDB 789033 D02 General U-NII Test Procedures New Rules v02r01		

5.1.2 Test Limit

Test items	Limit														
AC Power Line Conducted Emission	<table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBμV)</th></tr><tr><th>Quasi-Peak</th><th>Average</th></tr><tr><td>0.15 – 0.5</td><td>66 to 56 Note 1</td><td>56 to 46 Note 1</td></tr><tr><td>0.5 – 5</td><td>56</td><td>46</td></tr><tr><td>5 – 30</td><td>60</td><td>50</td></tr></table> Note 1: The limit level in dBμV decreases linearly with the logarithm of frequency. Note 2: The more stringent limit applies at transition frequencies.	Frequency (MHz)	Limit (dBμV)		Quasi-Peak	Average	0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1	0.5 – 5	56	46	5 – 30	60	50
Frequency (MHz)	Limit (dBμV)														
	Quasi-Peak	Average													
0.15 – 0.5	66 to 56 Note 1	56 to 46 Note 1													
0.5 – 5	56	46													
5 – 30	60	50													
Conducted Peak Output Power Power Spectral Density	For the 5.15-5.25 GHz band: For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm). For the band 5.725-5.895 GHz: For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, Fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.														
26dB Emission Bandwidth 99% Occupied Bandwidth	N/A														
6dB Emission Bandwidth	Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.														

Unwanted Emissions	(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz. (4) For transmitters operating solely in the 5.725-5.850 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. (5) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. The provisions of § 15.205 apply to intentional radiators operating under this section: <table><tr><th rowspan="2">Frequency (MHz)</th><th colspan="2">Limit (dBµV/m)</th><th rowspan="2">Detector</th></tr><tr><th>@ 3m</th><th>@ 10m</th></tr><tr><td>30 – 88</td><td>40.0</td><td>30.0</td><td>Quasi-peak</td></tr><tr><td>88 – 216</td><td>43.5</td><td>33.5</td><td>Quasi-peak</td></tr><tr><td>216 – 960</td><td>46.0</td><td>36.0</td><td>Quasi-peak</td></tr><tr><td>960 – 1000</td><td>54.0</td><td>44.0</td><td>Quasi-peak</td></tr></table> Note: The more stringent limit applies at transition frequencies. <table><tr><th rowspan="2">Frequency</th><th colspan="2">Limit (dBµV/m) @ 3m</th></tr><tr><th>Average</th><th>Peake</th></tr><tr><td>Above 1 GHz</td><td>54.0</td><td>74.0</td></tr></table> Note: The measurement bandwidth shall be 1 MHz or greater.	Frequency (MHz)	Limit (dBµV/m)		Detector	@ 3m	@ 10m	30 – 88	40.0	30.0	Quasi-peak	88 – 216	43.5	33.5	Quasi-peak	216 – 960	46.0	36.0	Quasi-peak	960 – 1000	54.0	44.0	Quasi-peak	Frequency	Limit (dBµV/m) @ 3m		Average	Peake	Above 1 GHz	54.0	74.0
Frequency (MHz)	Limit (dBµV/m)		Detector																												
	@ 3m	@ 10m																													
30 – 88	40.0	30.0	Quasi-peak																												
88 – 216	43.5	33.5	Quasi-peak																												
216 – 960	46.0	36.0	Quasi-peak																												
960 – 1000	54.0	44.0	Quasi-peak																												
Frequency	Limit (dBµV/m) @ 3m																														
	Average	Peake																													
Above 1 GHz	54.0	74.0																													
Frequency Stability	Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.																														


5.2 Antenna requirement

Standard requirement:	FCC Part 15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221 or §15.236 Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d) must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.	
E.U.T Antenna:	
The Wi-Fi antenna is an External Antenna, the best case gain of the antenna is 7.5 dBi. See product internal photos for details. Note: For Wi-Fi Band 1: 1. <i>Usage Scenario 1(ANT A+ANT A):</i> Directional gain = $G_{ANT} + 10 \log(N_{ANT}) = 7.0 + 10 \log(2) = 10.01$ dBi. 2. <i>Usage Scenario 2(ANT B+ANT B):</i> Directional gain = $G_{ANT} + 10 \log(N_{ANT}) = 7.5 + 10 \log(2) = 10.51$ dBi. In the preceding application scenario, the antenna gain in scenario 1 is greater than 6dBi and the attached data is the data in scenario 2 For Wi-Fi Band 4: 1. <i>Usage Scenario 1(ANT A+ANT A):</i> Directional gain = $G_{ANT} + 10 \log(N_{ANT}) = 6.0 + 10 \log(2) = 9.01$ dBi. 2. <i>Usage Scenario 2(ANT B+ANT B):</i> Directional gain = $G_{ANT} + 10 \log(N_{ANT}) = 7.5 + 10 \log(2) = 10.51$ dBi. In the preceding application scenario, the antenna gain in scenario 1 is greater than 6dBi and the attached data is the data in scenario 2	

5.3 AC Power Line Conducted Emission

ANT A:

Product name:	Breadcrumb Module AG1	Product model:	AG1-5250M
Test by:	June	Test mode:	5G Wi-Fi mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

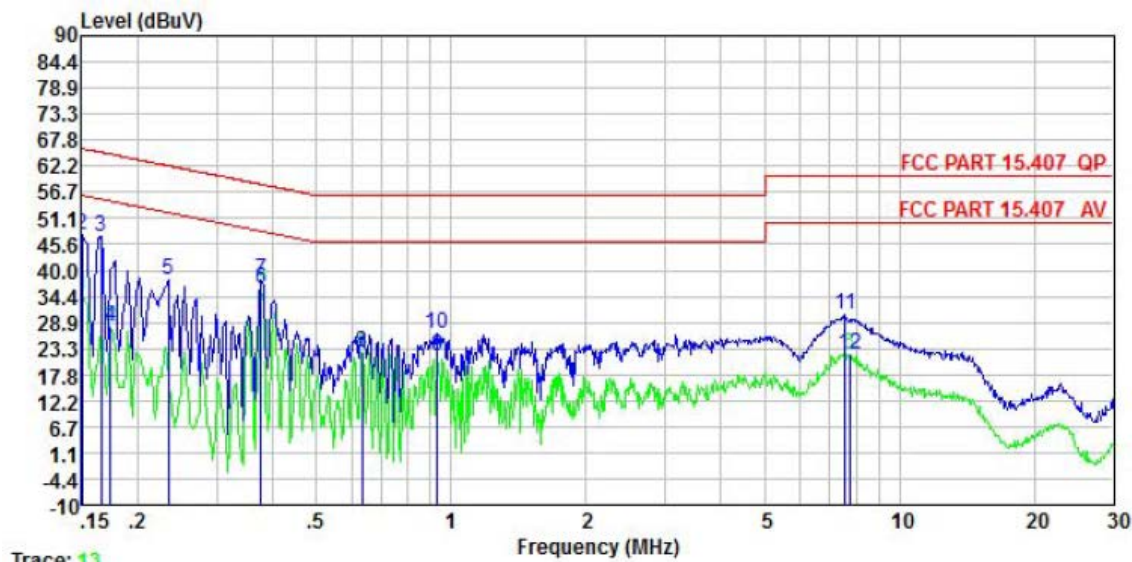


	Freq	Read Level	LISN Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	24.00	0.04	10.50	0.01	34.55	56.00	-21.45	Average
2	0.150	36.90	0.04	10.50	0.01	47.45	66.00	-18.55	QP
3	0.166	36.70	0.04	10.50	0.01	47.25	65.16	-17.91	QP
4	0.174	17.53	0.05	10.50	0.01	28.09	54.77	-26.68	Average
5	0.234	27.44	0.05	10.50	0.02	38.01	62.30	-24.29	QP
6	0.377	25.49	0.06	10.50	0.03	36.08	48.34	-12.26	Average
7	0.377	27.20	0.06	10.50	0.03	37.79	58.34	-20.55	QP
8	0.634	12.01	0.06	10.50	0.02	22.59	46.00	-23.41	Average
9	0.933	11.16	0.07	10.50	0.04	21.77	46.00	-24.23	Average
10	0.933	15.81	0.07	10.50	0.04	26.42	56.00	-29.58	QP
11	7.566	19.98	0.18	10.50	0.10	30.76	60.00	-29.24	QP
12	7.728	11.46	0.18	10.50	0.10	22.24	50.00	-27.76	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Breadcrumb Module AG1	Product model:	AG1-5250M
Test by:	June	Test mode:	5G Wi-Fi mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

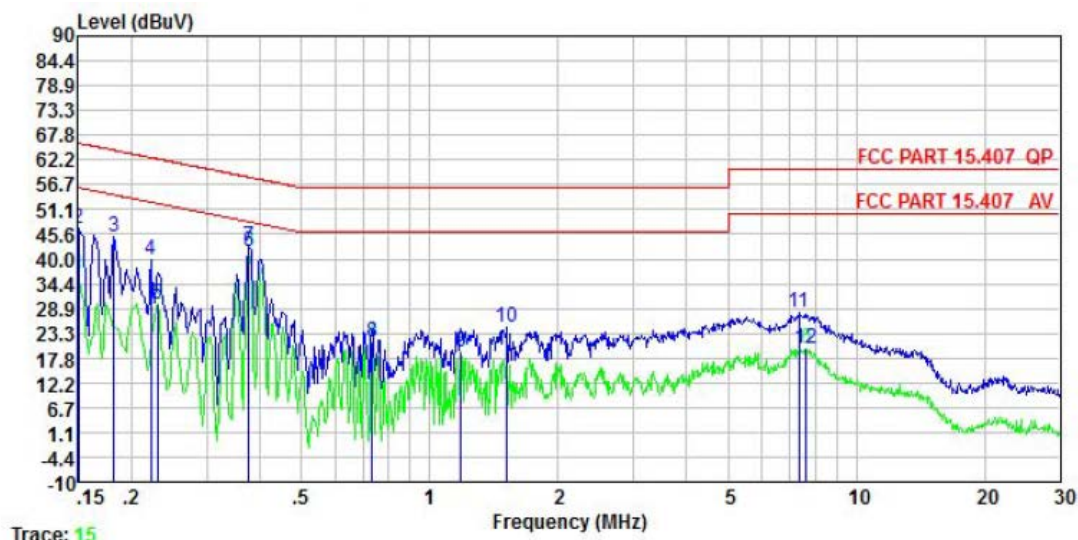


	Freq	Read Level	LISN Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	25.78	0.06	10.50	0.01	36.35	56.00	-19.65	Average
2	0.150	36.32	0.06	10.50	0.01	46.89	66.00	-19.11	QP
3	0.182	34.38	0.05	10.50	0.01	44.94	64.42	-19.48	QP
4	0.222	29.27	0.05	10.50	0.03	39.85	62.74	-22.89	QP
5	0.230	19.26	0.05	10.50	0.02	29.83	52.44	-22.61	Average
6	0.377	31.08	0.05	10.50	0.03	41.66	48.34	-6.68	Average
7	0.377	32.33	0.05	10.50	0.03	42.91	58.34	-15.43	QP
8	0.731	10.59	0.06	10.50	0.03	21.18	46.00	-24.82	Average
9	1.184	8.32	0.06	10.50	0.09	18.97	46.00	-27.03	Average
10	1.519	13.94	0.07	10.50	0.15	24.66	56.00	-31.34	QP
11	7.329	17.24	0.17	10.50	0.10	28.01	60.00	-31.99	QP
12	7.646	8.97	0.17	10.50	0.10	19.74	50.00	-30.26	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

ANT B:

Product name:	Breadcrumb Module AG1	Product model:	AG1-5250M
Test by:	June	Test mode:	5G Wi-Fi mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

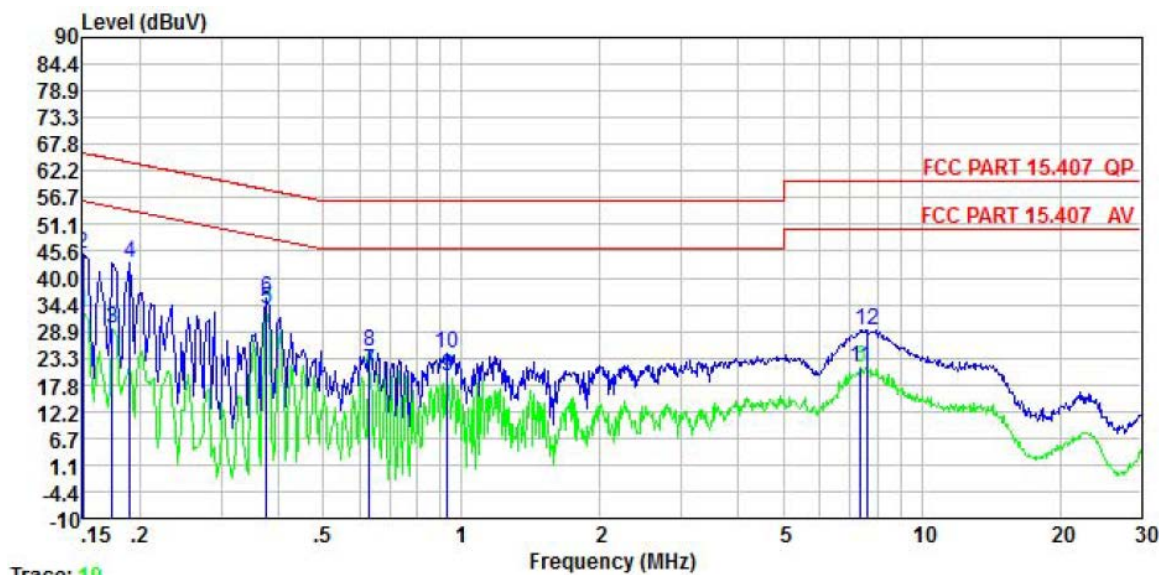


	Freq	Read Level	LISN Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	22.41	0.04	10.50	0.01	32.96	56.00	-23.04	Average
2	0.150	34.45	0.04	10.50	0.01	45.00	66.00	-21.00	QP
3	0.174	19.01	0.05	10.50	0.01	29.57	54.77	-25.20	Average
4	0.190	32.61	0.05	10.50	0.03	43.19	64.02	-20.83	QP
5	0.377	23.07	0.06	10.50	0.03	33.66	48.34	-14.68	Average
6	0.377	25.12	0.06	10.50	0.03	35.71	58.34	-22.63	QP
7	0.630	9.90	0.06	10.50	0.02	20.48	46.00	-25.52	Average
8	0.630	13.92	0.06	10.50	0.02	24.50	56.00	-31.50	QP
9	0.933	8.98	0.07	10.50	0.04	19.59	46.00	-26.41	Average
10	0.933	13.56	0.07	10.50	0.04	24.17	56.00	-31.83	QP
11	7.368	10.48	0.18	10.50	0.10	21.26	50.00	-28.74	Average
12	7.646	18.41	0.18	10.50	0.10	29.19	60.00	-30.81	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Breadcrumb Module AG1	Product model:	AG1-5250M
Test by:	June	Test mode:	5G Wi-Fi mode
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

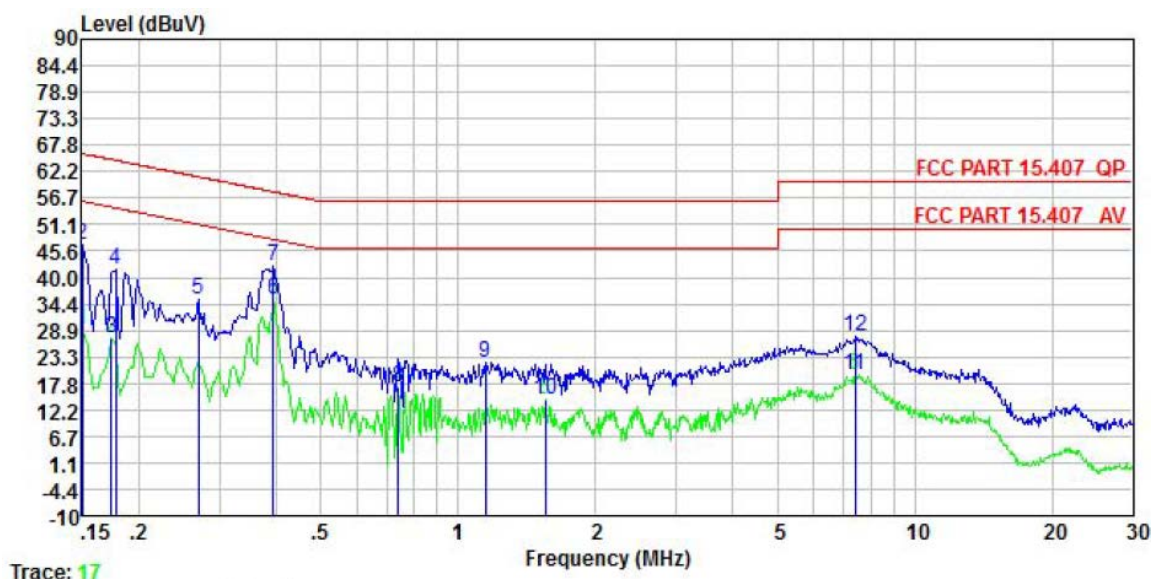


	Freq	Read Level	LISN Factor	Aux2 Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.150	18.46	0.06	10.50	0.01	29.03	56.00	-26.97	Average
2	0.150	36.43	0.06	10.50	0.01	47.00	66.00	-19.00	QP
3	0.174	16.78	0.05	10.50	0.01	27.34	54.77	-27.43	Average
4	0.178	30.95	0.05	10.50	0.01	41.51	64.59	-23.08	QP
5	0.270	24.69	0.05	10.50	0.02	35.26	61.12	-25.86	QP
6	0.393	24.87	0.04	10.50	0.04	35.45	47.99	-12.54	Average
7	0.393	31.69	0.04	10.50	0.04	42.27	57.99	-15.72	QP
8	0.739	6.50	0.06	10.50	0.03	17.09	46.00	-28.91	Average
9	1.147	11.63	0.06	10.50	0.08	22.27	56.00	-33.73	QP
10	1.552	3.50	0.07	10.50	0.15	14.22	46.00	-31.78	Average
11	7.407	8.68	0.17	10.50	0.10	19.45	50.00	-30.55	Average
12	7.407	16.76	0.17	10.50	0.10	27.53	60.00	-32.47	QP

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

5.4 EIRP of Band 1

Product Name:	Breadcrumb Module AG1	Product Model:	AG1-5250M
Test By:	June	Test mode:	5G Wi-Fi mode
Test Frequency:	5180MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

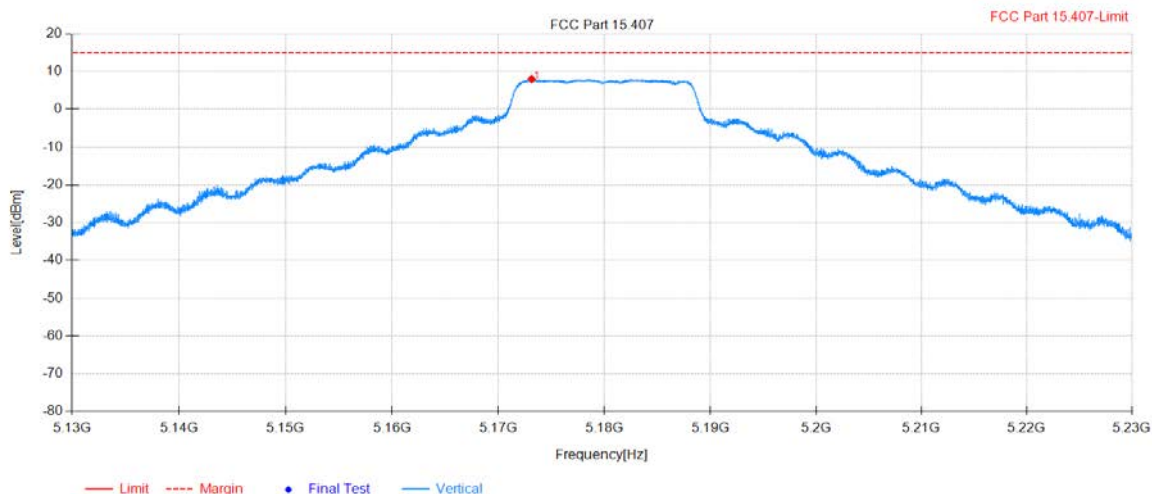


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle[°]	Verdict	Polarity
1	5173.137	3.74	4.26	8.00	21.00	13.00	150	90	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Breadcrumb Module AG1	Product Model:	AG1-5250M
Test By:	June	Test mode:	5G Wi-Fi mode
Test Frequency:	5180MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

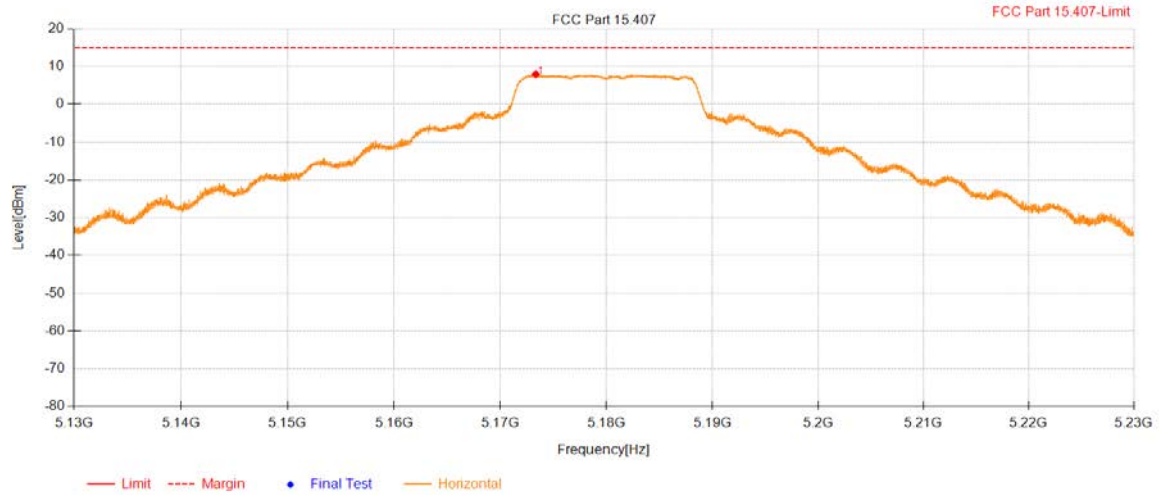


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle[°]	Verdict	Polarity
1	5173.337	3.72	4.23	7.95	21.00	13.05	150	90	PASS	Horizontal

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Breadcrumb Module AG1	Product Model:	AG1-5250M
Test By:	June	Test mode:	5G Wi-Fi mode
Test Frequency:	5200MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

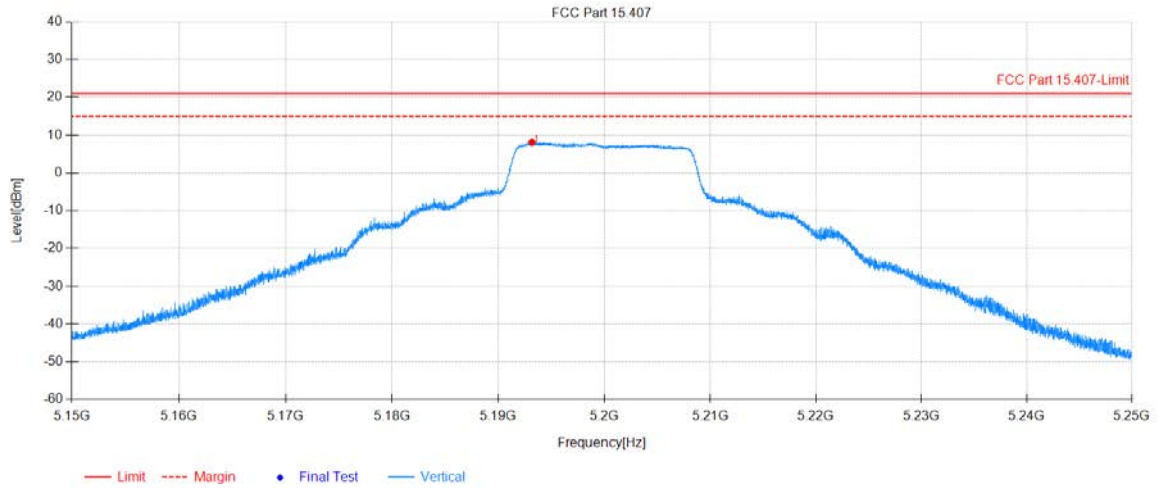


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle[°]	Verdict	Polarity
1	5193.162	3.93	4.18	8.11	21.00	12.89	150	90	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Breadcrumb Module AG1	Product Model:	AG1-5250M
Test By:	June	Test mode:	5G Wi-Fi mode
Test Frequency:	5200MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

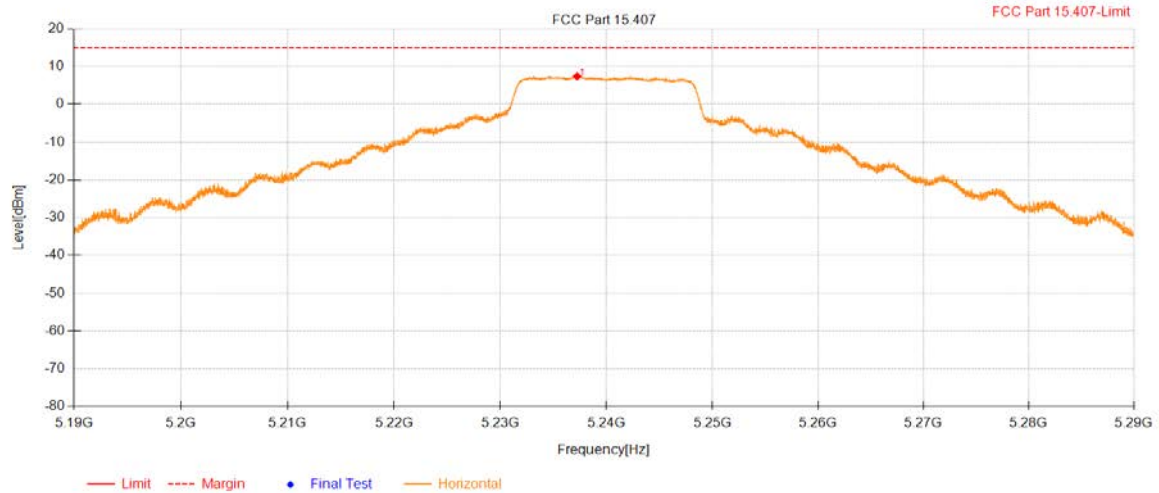


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle[°]	Verdict	Polarity
1	5237.237	3.64	3.76	7.40	21.00	13.60	150	90	PASS	Horizont

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Breadcrumb Module AG1	Product Model:	AG1-5250M
Test By:	June	Test mode:	5G Wi-Fi mode
Test Frequency:	5240MHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz		

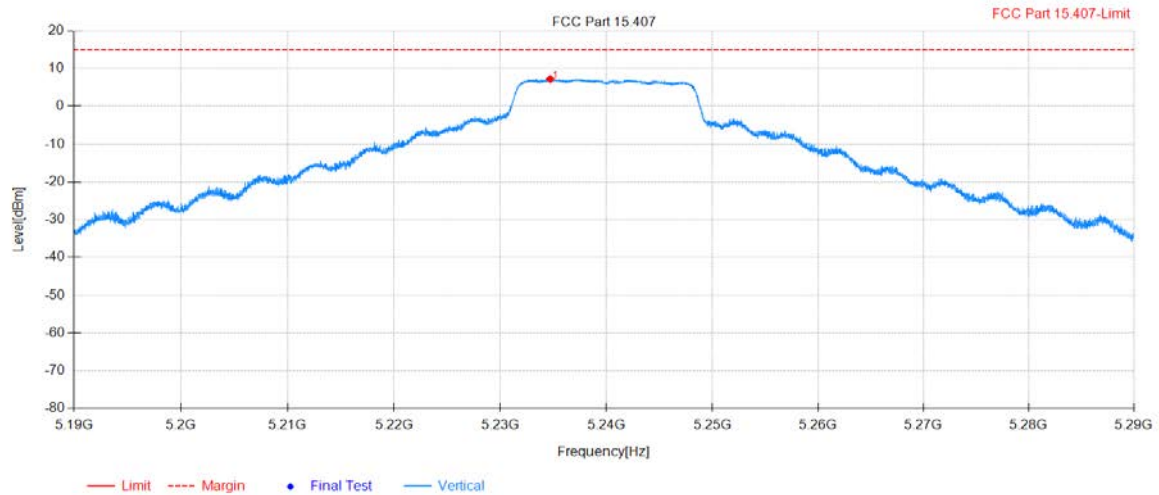


Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle[°]	Verdict	Polarity
1	5234.7	3.59	3.63	7.22	21.00	13.78	150	90	PASS	Vertical

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Product Name:	Breadcrumb Module AG1	Product Model:	AG1-5250M
Test By:	June	Test mode:	5G Wi-Fi mode
Test Frequency:	5180MHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz		

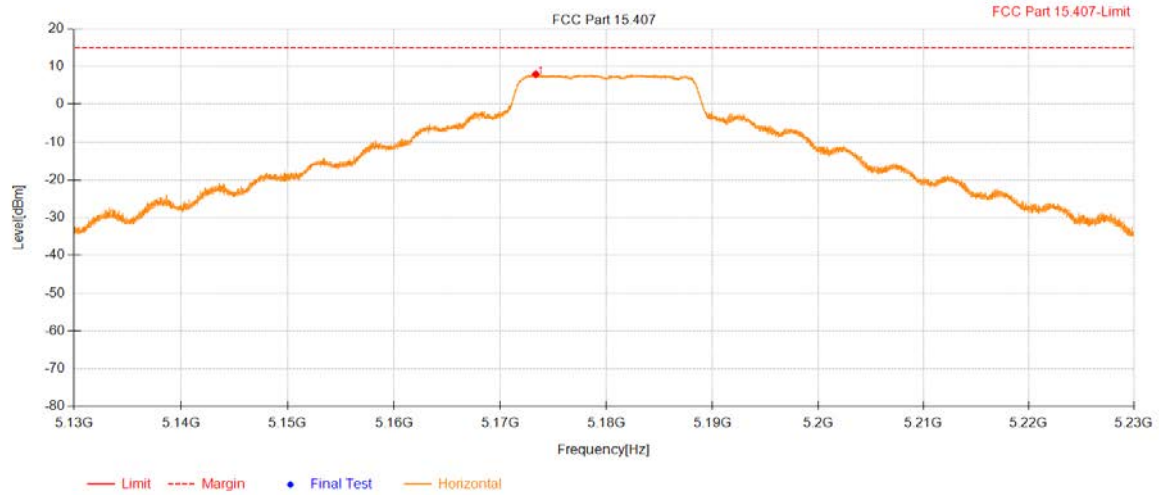

Suspected Data List

NO.	Freq. [MHz]	Reading [dBm]	Factor [dB]	Level [dBm]	Limit [dBm]	Margin [dB]	Height [cm]	Angle[°]	Verdict	Polarity
1	5173.337	3.72	4.23	7.95	21.00	13.05	150	90	PASS	Horizontal

Remark:


1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

5.5 Unwanted Emissions

Below 1GHz:

ANT A:

Product Name:	Breadcrumb Module AG1	Product Model:	AG1-5250M
Test By:	June	Test mode:	5G Wi-Fi mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical & Horizontal
Test Voltage:	AC 120/60Hz		

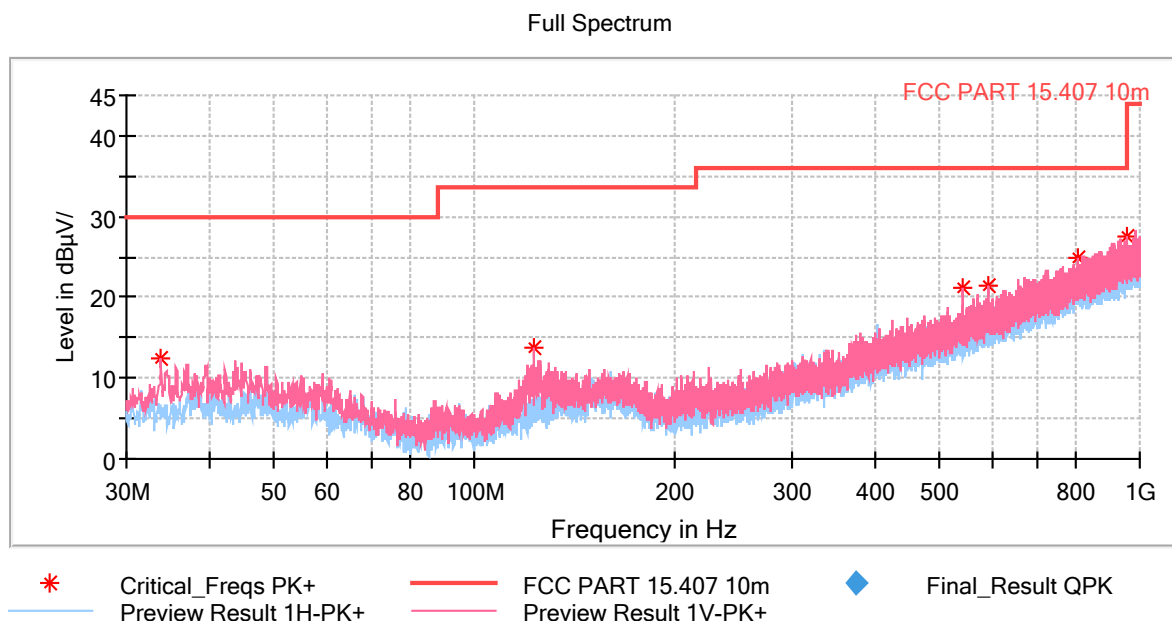

Critical_Freqs


Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
33.831500	12.45	30.00	17.55	100.0	V	88.0	-16.4
122.683500	13.72	33.50	19.78	100.0	V	219.0	-1□.1
539.977500	21.13	36.00	14.87	100.0	V	207.0	-8.1
592.503000	21.34	36.00	14.66	10□.0	V	36.0	-7.1
807.600500	24.91	36.00	11.09	100.0	V	74.0	-2.3
958.241500	27.60	36.00	8.40	100.0	V	207.0	0.2

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

ANT B:

Product Name:	Breadcrumb Module AG1	Product Model:	AG1-5250M
Test By:	June	Test mode:	5G Wi-Fi mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical & Horizontal
Test Voltage:	AC 120/60Hz		

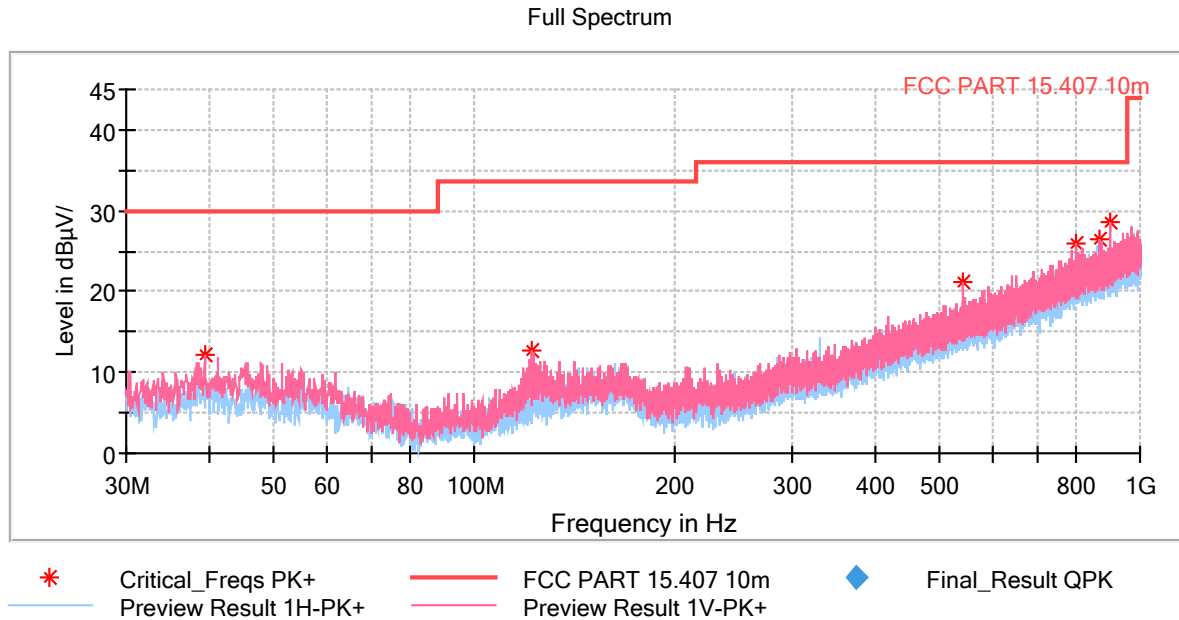

Critical_Freqs

Frequency (MHz)	MaxPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
39.360500	12.29	30.00	17.71	100.0	V	315.0	-15.4
121.810500	12.77	33.50	20.73	100.0	V	257.0	-17.2
539.977500	21.26	36.00	14.74	100.0	V	218.0	-8.1
803.429500	26.02	36.00	9.98	100.0	V	53.0	-2.3
869.632000	26.48	36.00	9.52	100.0	V	129.0	-1.8
901.981500	28.69	36.00	7.31	100.0	V	20.0	-1.2

Remark:

1. Level = Reading + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).

Above 1GHz:

WiFi 0:

ANTA-1:

Band 1: 5150 MHz - 5250 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	60.43	-6.29	54.14	74.00	19.86	Vertical
10360.00	56.65	1.96	58.61	68.20	9.59	Vertical
5150.00	59.24	-6.29	52.95	74.00	21.05	Horizontal
10360.00	57.82	1.96	59.78	68.20	8.42	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	49.01	-6.29	42.72	54.00	11.28	Vertical
5150.00	48.18	-6.29	41.89	54.00	12.11	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	58.72	1.58	60.30	68.20	7.90	Vertical
10400.00	56.29	1.58	57.87	68.20	10.33	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.02	-6.43	52.59	74.00	21.41	Vertical
10480.00	59.75	2.25	62.00	68.20	6.20	Vertical
5350.00	70.35	-6.43	63.92	74.00	10.08	Horizontal
10480.00	58.02	2.25	60.27	68.20	7.93	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	48.91	-6.43	42.48	54.00	11.52	Vertical
5350.00	55.91	-6.43	49.48	54.00	4.52	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTA-2:

Band 1: 5150 MHz - 5250 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	59.45	-6.29	53.16	74.00	20.84	Vertical
10360.00	57.00	1.96	58.96	68.20	9.24	Vertical
5150.00	59.26	-6.29	52.97	74.00	21.03	Horizontal
10360.00	57.63	1.96	59.59	68.20	8.61	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	48.73	-6.29	42.44	54.00	11.56	Vertical
5150.00	48.33	-6.29	42.04	54.00	11.96	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	58.56	1.58	60.14	68.20	8.06	Vertical
10400.00	56.05	1.58	57.63	68.20	10.57	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	58.83	-6.43	52.40	74.00	21.60	Vertical
10480.00	59.95	2.25	62.20	68.20	6.00	Vertical
5350.00	70.39	-6.43	63.96	74.00	10.04	Horizontal
10480.00	58.02	2.25	60.27	68.20	7.93	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	48.74	-6.43	42.31	54.00	11.69	Vertical
5350.00	56.20	-6.43	49.77	54.00	4.23	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.45	-6.29	52.16	74.00	21.84	Vertical
10360.00	56.98	1.96	58.94	68.20	9.26	Vertical
5150.00	70.04	-6.29	63.75	74.00	10.25	Horizontal
10360.00	58.08	1.96	60.04	68.20	8.16	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	48.83	-6.29	42.54	54.00	11.46	Vertical
5150.00	55.45	-6.29	49.16	54.00	4.84	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	59.06	1.58	60.64	68.20	7.56	Vertical
10400.00	56.10	1.58	57.68	68.20	10.52	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.51	-6.43	53.08	74.00	20.92	Vertical
10480.00	59.99	2.25	62.24	68.20	5.96	Vertical
5350.00	70.60	-6.43	64.17	74.00	9.83	Horizontal
10480.00	58.09	2.25	60.34	68.20	7.86	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	49.32	-6.43	42.89	54.00	11.11	Vertical
5350.00	55.74	-6.43	49.31	54.00	4.69	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	66.65	-6.29	60.36	74.00	13.64	Vertical
10380.00	57.53	1.77	59.30	68.20	8.90	Vertical
5150.00	63.86	-6.29	57.57	74.00	16.43	Horizontal
10380.00	57.43	1.77	59.20	68.20	9.00	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	52.21	-6.29	45.92	54.00	8.08	Vertical
5150.00	51.65	-6.29	45.36	54.00	8.64	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	68.29	-6.43	61.86	74.00	12.14	Vertical
10460.00	57.64	2.08	59.72	68.20	8.48	Vertical
5350.00	68.99	-6.43	62.56	74.00	11.44	Horizontal
10460.00	56.38	2.08	58.46	68.20	9.74	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	56.58	-6.43	50.15	54.00	3.85	Vertical
5350.00	56.78	-6.43	50.35	54.00	3.65	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.12	-6.29	51.83	74.00	22.17	Vertical
10360.00	57.36	1.96	59.32	68.20	8.88	Vertical
5150.00	70.20	-6.29	63.91	74.00	10.09	Horizontal
10360.00	57.86	1.96	59.82	68.20	8.38	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	48.41	-6.29	42.12	54.00	11.88	Vertical
5150.00	55.67	-6.29	49.38	54.00	4.62	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	59.35	1.58	60.93	68.20	7.27	Vertical
10400.00	56.30	1.58	57.88	68.20	10.32	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.09	-6.43	52.66	74.00	21.34	Vertical
10480.00	59.49	2.25	61.74	68.20	6.46	Vertical
5350.00	70.67	-6.43	64.24	74.00	9.76	Horizontal
10480.00	57.78	2.25	60.03	68.20	8.17	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	49.61	-6.43	43.18	54.00	10.82	Vertical
5350.00	55.87	-6.43	49.44	54.00	4.56	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	67.92	-6.29	61.63	74.00	12.37	Vertical
10380.00	57.20	1.77	58.97	68.20	9.23	Vertical
5150.00	68.07	-6.29	61.78	74.00	12.22	Horizontal
10380.00	57.43	1.77	59.20	68.20	9.00	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	56.61	-6.29	50.32	54.00	3.68	Vertical
5150.00	57.32	-6.29	51.03	54.00	2.97	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	68.09	-6.43	61.66	74.00	12.34	Vertical
10460.00	57.78	2.08	59.86	68.20	8.34	Vertical
5350.00	69.38	-6.43	62.95	74.00	11.05	Horizontal
10460.00	56.81	2.08	58.89	68.20	9.31	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	56.97	-6.43	50.54	54.00	3.46	Vertical
5350.00	56.32	-6.43	49.89	54.00	4.11	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT80						
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	63.67	-6.29	57.38	74.00	16.62	Vertical
5350.00	59.18	-6.43	52.75	74.00	21.25	Vertical
10420.00	58.78	1.75	60.53	68.20	7.67	Vertical
5150.00	68.55	-6.29	62.26	74.00	11.74	Horizontal
5350.00	59.44	-6.43	53.01	74.00	20.99	Horizontal
10420.00	56.35	1.75	58.10	68.20	10.10	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	49.05	-6.29	42.76	54.00	11.24	Vertical
5350.00	47.97	-6.43	41.54	54.00	12.46	Vertical
5150.00	55.99	-6.29	49.70	54.00	4.3	Horizontal
5350.00	48.47	-6.43	42.04	54.00	11.96	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTB-1:

Band 1: 5150 MHz - 5250 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.68	-6.29	52.39	74.00	21.61	Vertical
10360.00	56.38	1.96	58.34	68.20	9.86	Vertical
5150.00	70.66	-6.29	64.37	74.00	9.63	Horizontal
10360.00	57.36	1.96	59.32	68.20	8.88	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	48.15	-6.29	41.86	54.00	12.14	Vertical
5150.00	55.30	-6.29	49.01	54.00	4.99	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	58.36	1.58	59.94	68.20	8.26	Vertical
10400.00	56.73	1.58	58.31	68.20	9.89	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.19	-6.43	52.76	74.00	21.24	Vertical
10480.00	56.56	2.25	58.81	68.20	9.39	Vertical
5350.00	59.67	-6.43	53.24	74.00	20.76	Horizontal
10480.00	57.76	2.25	60.01	68.20	8.19	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.60	-6.43	41.17	54.00	12.83	Vertical
5350.00	47.88	-6.43	41.45	54.00	12.55	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTB-2:

Band 1: 5150 MHz - 5250 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	59.39	-6.29	53.10	74.00	20.90	Vertical
10360.00	56.44	1.96	58.40	68.20	9.80	Vertical
5150.00	69.68	-6.29	63.39	74.00	10.61	Horizontal
10360.00	57.58	1.96	59.54	68.20	8.66	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.99	-6.29	41.70	54.00	12.30	Vertical
5150.00	55.88	-6.29	49.59	54.00	4.41	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	58.85	1.58	60.43	68.20	7.77	Vertical
10400.00	56.42	1.58	58.00	68.20	10.20	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.59	-6.43	53.16	74.00	20.84	Vertical
10480.00	56.72	2.25	58.97	68.20	9.23	Vertical
5350.00	58.93	-6.43	52.50	74.00	21.50	Horizontal
10480.00	57.81	2.25	60.06	68.20	8.14	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.53	-6.43	41.10	54.00	12.90	Vertical
5350.00	48.59	-6.43	42.16	54.00	11.84	Horizontal
Remark:						
7. Level = Reading + Factor.						
8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.91	-6.29	52.62	74.00	21.38	Vertical
10360.00	57.35	1.96	59.31	68.20	8.89	Vertical
5150.00	70.19	-6.29	63.90	74.00	10.10	Horizontal
10360.00	58.46	1.96	60.42	68.20	7.78	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	49.19	-6.29	42.90	54.00	11.10	Vertical
5150.00	55.73	-6.29	49.44	54.00	4.56	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	58.86	1.58	60.44	68.20	7.76	Vertical
10400.00	56.30	1.58	57.88	68.20	10.32	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.86	-6.43	53.43	74.00	20.57	Vertical
10480.00	60.16	2.25	62.41	68.20	5.79	Vertical
5350.00	70.33	-6.43	63.90	74.00	10.10	Horizontal
10480.00	58.01	2.25	60.26	68.20	7.94	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	49.72	-6.43	43.29	54.00	10.71	Vertical
5350.00	56.13	-6.43	49.70	54.00	4.30	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	68.03	-6.29	61.74	74.00	12.26	Vertical
10380.00	56.76	1.77	58.53	68.20	9.67	Vertical
5150.00	68.33	-6.29	62.04	74.00	11.96	Horizontal
10380.00	56.79	1.77	58.56	68.20	9.64	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	56.50	-6.29	50.21	54.00	3.79	Vertical
5150.00	57.28	-6.29	50.99	54.00	3.01	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.36	-6.43	52.93	74.00	21.07	Vertical
10460.00	57.17	2.08	59.25	68.20	8.95	Vertical
5350.00	59.72	-6.43	53.29	74.00	20.71	Horizontal
10460.00	56.64	2.08	58.72	68.20	9.48	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	48.10	-6.43	41.67	54.00	12.33	Vertical
5350.00	48.44	-6.43	42.01	54.00	11.99	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	59.30	-6.29	53.01	74.00	20.99	Vertical
10360.00	57.76	1.96	59.72	68.20	8.48	Vertical
5150.00	70.26	-6.29	63.97	74.00	10.03	Horizontal
10360.00	58.52	1.96	60.48	68.20	7.72	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	49.04	-6.29	42.75	54.00	11.25	Vertical
5150.00	56.11	-6.29	49.82	54.00	4.18	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	59.09	1.58	60.67	68.20	7.53	Vertical
10400.00	56.45	1.58	58.03	68.20	10.17	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.38	-6.43	52.95	74.00	21.05	Vertical
10480.00	59.68	2.25	61.93	68.20	6.27	Vertical
5350.00	70.29	-6.43	63.86	74.00	10.14	Horizontal
10480.00		2.25	2.25	68.20	65.95	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	49.96	-6.43	43.53	54.00	10.47	Vertical
5350.00	56.57	-6.43	50.14	54.00	3.86	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	67.91	-6.29	61.62	74.00	12.38	Vertical
10380.00	57.07	1.77	58.84	68.20	9.36	Vertical
5150.00	68.29	-6.29	62.00	74.00	12.00	Horizontal
10380.00	57.04	1.77	58.81	68.20	9.39	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	56.65	-6.29	50.36	54.00	3.64	Vertical
5150.00	57.52	-6.29	51.23	54.00	2.77	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	68.43	-6.43	62.00	74.00	12.00	Vertical
10460.00	57.29	2.08	59.37	68.20	8.83	Vertical
5350.00	68.30	-6.43	61.87	74.00	12.13	Horizontal
10460.00	56.83	2.08	58.91	68.20	9.29	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	56.38	-6.43	49.95	54.00	4.05	Vertical
5350.00	56.41	-6.43	49.98	54.00	4.02	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT80						
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	63.36	-6.29	57.07	74.00	16.93	Vertical
5350.00	58.88	-6.43	52.45	74.00	21.55	Vertical
10420.00	59.26	1.75	61.01	68.20	7.19	Vertical
5150.00	68.14	-6.29	61.85	74.00	12.15	Horizontal
5350.00	59.31	-6.43	52.88	74.00	21.12	Horizontal
10420.00	56.06	1.75	57.81	68.20	10.39	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	49.09	-6.29	42.80	54.00	11.2	Vertical
5350.00	48.20	-6.43	41.77	54.00	12.23	Vertical
5150.00	55.62	-6.29	49.33	54.00	4.67	Horizontal
5350.00	48.36	-6.43	41.93	54.00	12.07	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTA-1:

Band 4: 5725 MHz - 5825 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	70.11	-7.47	62.64	68.20	5.56	Vertical
5700.00	89.80	-8.05	81.75	105.20	23.45	Vertical
5720.00	99.50	-7.63	91.87	110.80	18.93	Vertical
5725.00	103.64	-7.52	96.12	122.20	26.08	Vertical
11490.00	55.82	3.22	59.04	74.00	14.96	Vertical
5650.00	69.94	-7.47	62.47	68.20	5.73	Horizontal
5700.00	88.52	-8.05	80.47	105.20	24.73	Horizontal
5720.00	99.73	-7.63	92.10	110.80	18.70	Horizontal
5725.00	104.43	-7.52	96.91	122.20	25.29	Horizontal
11490.00	55.68	3.22	58.90	74.00	15.10	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	47.08	3.22	50.30	54.00	3.70	Vertical
11490.00	46.91	3.22	50.13	54.00	3.87	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.64	3.94	60.58	74.00	13.42	Vertical
11570.00	56.35	3.94	60.29	74.00	13.71	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	47.22	3.94	51.16	54.00	2.84	Vertical
11570.00	47.51	3.94	51.45	54.00	2.55	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	97.89	-5.80	92.09	122.20	30.11	Vertical
5855.00	93.31	-5.79	87.52	110.80	23.28	Vertical
5875.00	81.70	-5.78	75.92	105.20	29.28	Vertical
5925.00	63.67	-5.53	58.14	68.20	10.06	Vertical
11650.00	56.49	3.85	60.34	74.00	13.66	Vertical
5850.00	100.88	-5.80	95.08	122.20	27.12	Horizontal
5855.00	96.87	-5.79	91.08	110.80	19.72	Horizontal
5875.00	86.62	-5.78	80.84	105.20	24.36	Horizontal
5925.00	69.67	-5.53	64.14	68.20	4.06	Horizontal
11650.00	58.14	3.85	61.99	74.00	12.01	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.50	3.85	51.35	54.00	2.65	Vertical
11650.00	47.02	3.85	50.87	54.00	3.13	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTA-2:

Band 4: 5725 MHz - 5825 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	69.71	-7.47	62.24	68.20	5.96	Vertical
5700.00	89.80	-8.05	81.75	105.20	23.45	Vertical
5720.00	99.94	-7.63	92.31	110.80	18.49	Vertical
5725.00	103.20	-7.52	95.68	122.20	26.52	Vertical
11490.00	55.73	3.22	58.95	74.00	15.05	Vertical
5650.00	69.63	-7.47	62.16	68.20	6.04	Horizontal
5700.00	88.66	-8.05	80.61	105.20	24.59	Horizontal
5720.00	100.21	-7.63	92.58	110.80	18.22	Horizontal
5725.00	104.37	-7.52	96.85	122.20	25.35	Horizontal
11490.00	55.18	3.22	58.40	74.00	15.60	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	46.88	3.22	50.10	54.00	3.90	Vertical
11490.00	47.28	3.22	50.50	54.00	3.50	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.34	3.94	60.28	74.00	13.72	Vertical
11570.00	56.67	3.94	60.61	74.00	13.39	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	47.46	3.94	51.40	54.00	2.60	Vertical
11570.00	45.76	3.94	49.70	54.00	4.30	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	98.49	-5.80	92.69	122.20	29.51	Vertical
5855.00	93.15	-5.79	87.36	110.80	23.44	Vertical
5875.00	81.79	-5.78	76.01	105.20	29.19	Vertical
5925.00	63.62	-5.53	58.09	68.20	10.11	Vertical
11650.00	55.29	3.85	59.14	74.00	14.86	Vertical
5850.00	100.56	-5.80	94.76	122.20	27.44	Horizontal
5855.00	96.75	-5.79	90.96	110.80	19.84	Horizontal
5875.00	87.30	-5.78	81.52	105.20	23.68	Horizontal
5925.00	69.49	-5.53	63.96	68.20	4.24	Horizontal
11650.00	56.98	3.85	60.83	74.00	13.17	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.51	3.85	51.36	54.00	2.64	Vertical
11650.00	47.00	3.85	50.85	54.00	3.15	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	69.89	-7.47	62.42	68.20	5.78	Vertical
5700.00	89.51	-8.05	81.46	105.20	23.74	Vertical
5720.00	99.66	-7.63	92.03	110.80	18.77	Vertical
5725.00	103.91	-7.52	96.39	122.20	25.81	Vertical
11490.00	55.45	3.22	58.67	74.00	15.33	Vertical
5650.00	70.07	-7.47	62.60	68.20	5.60	Horizontal
5700.00	88.65	-8.05	80.60	105.20	24.60	Horizontal
5720.00	100.12	-7.63	92.49	110.80	18.31	Horizontal
5725.00	104.44	-7.52	96.92	122.20	25.28	Horizontal
11490.00	55.81	3.22	59.03	74.00	14.97	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	46.83	3.22	50.05	54.00	3.95	Vertical
11490.00	47.18	3.22	50.40	54.00	3.60	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.97	3.94	60.91	74.00	13.09	Vertical
11570.00	56.54	3.94	60.48	74.00	13.52	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	47.16	3.94	51.10	54.00	2.90	Vertical
11570.00	47.56	3.94	51.50	54.00	2.50	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	97.94	-5.80	92.14	122.20	30.06	Vertical
5855.00	93.09	-5.79	87.30	110.80	23.50	Vertical
5875.00	81.81	-5.78	76.03	105.20	29.17	Vertical
5925.00	63.91	-5.53	58.38	68.20	9.82	Vertical
11650.00	56.13	3.85	59.98	74.00	14.02	Vertical
5850.00	100.61	-5.80	94.81	122.20	27.39	Horizontal
5855.00	96.66	-5.79	90.87	110.80	19.93	Horizontal
5875.00	86.60	-5.78	80.82	105.20	24.38	Horizontal
5925.00	69.51	-5.53	63.98	68.20	4.22	Horizontal
11650.00	58.63	3.85	62.48	74.00	11.52	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.94	3.85	51.79	54.00	2.21	Vertical
11650.00	47.00	3.85	50.85	54.00	3.15	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	66.13	-7.47	58.66	68.20	9.54	Vertical
5700.00	86.54	-8.05	78.49	105.20	26.71	Vertical
5720.00	99.81	-7.63	92.18	110.80	18.62	Vertical
5725.00	99.17	-7.52	91.65	122.20	30.55	Vertical
11510.00	55.74	3.23	58.97	74.00	15.03	Vertical
5650.00	66.92	-7.47	59.45	68.20	8.75	Horizontal
5700.00	84.65	-8.05	76.60	105.20	28.60	Horizontal
5720.00	98.38	-7.63	90.75	110.80	20.05	Horizontal
5725.00	98.76	-5.80	92.96	122.20	29.24	Horizontal
11510.00	55.79	3.23	59.02	74.00	14.98	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	47.06	3.23	50.29	54.00	3.71	Vertical
11510.00	47.11	3.23	50.34	54.00	3.66	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	88.08	-5.80	82.28	122.20	39.92	Vertical
5855.00	83.89	-5.79	78.10	110.80	32.70	Vertical
5875.00	73.15	-5.78	67.37	105.20	37.83	Vertical
5925.00	72.97	-5.53	67.44	68.20	0.76	Vertical
11590.00	56.52	4.16	60.68	74.00	13.32	Vertical
5850.00	84.24	-5.80	78.44	122.20	43.76	Horizontal
5855.00	82.38	-5.79	76.59	110.80	34.21	Horizontal
5875.00	71.64	-5.78	65.86	105.20	39.34	Horizontal
5925.00	60.26	-5.53	54.73	68.20	13.47	Horizontal
11590.00	55.32	4.16	59.48	74.00	14.52	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	47.07	4.16	51.23	54.00	2.77	Vertical
11590.00	47.47	4.16	51.63	54.00	2.37	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 8802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	70.04	-7.47	62.57	68.20	5.63	Vertical
5700.00	89.38	-8.05	81.33	105.20	23.87	Vertical
5720.00	99.88	-7.63	92.25	110.80	18.55	Vertical
5725.00	101.39	-7.52	93.87	122.20	28.33	Vertical
11490.00	55.29	3.22	58.51	74.00	15.49	Vertical
5650.00	69.89	-7.47	62.42	68.20	5.78	Horizontal
5700.00	88.29	-8.05	80.24	105.20	24.96	Horizontal
5720.00	100.08	-7.63	92.45	110.80	18.35	Horizontal
5725.00	104.26	-7.52	96.74	122.20	25.46	Horizontal
11490.00	55.89	3.22	59.11	74.00	14.89	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	46.72	3.22	49.94	54.00	4.06	Vertical
11490.00	47.34	3.22	50.56	54.00	3.44	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.95	3.94	60.89	74.00	13.11	Vertical
11570.00	56.37	3.94	60.31	74.00	13.69	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	47.60	3.94	51.54	54.00	2.46	Vertical
11570.00	47.63	3.94	51.57	54.00	2.43	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	97.50	-5.80	91.70	122.20	30.50	Vertical
5855.00	92.64	-5.79	86.85	110.80	23.95	Vertical
5875.00	81.96	-5.78	76.18	105.20	29.02	Vertical
5925.00	63.45	-5.53	57.92	68.20	10.28	Vertical
11650.00	56.49	3.85	60.34	74.00	13.66	Vertical
5850.00	100.93	-5.80	95.13	122.20	27.07	Horizontal
5855.00	96.52	-5.79	90.73	110.80	20.07	Horizontal
5875.00	86.41	-5.78	80.63	105.20	24.57	Horizontal
5925.00	69.20	-5.53	63.67	68.20	4.53	Horizontal
11650.00	58.67	3.85	62.52	74.00	11.48	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	48.22	3.85	52.07	54.00	1.93	Vertical
11650.00	47.17	3.85	51.02	54.00	2.98	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	66.07	-7.47	58.60	68.20	9.60	Vertical
5700.00	86.39	-8.05	78.34	105.20	26.86	Vertical
5720.00	99.78	-7.63	92.15	110.80	18.65	Vertical
5725.00	98.82	-7.52	91.30	122.20	30.90	Vertical
11510.00	55.99	3.23	59.22	74.00	14.78	Vertical
5650.00	66.97	-7.47	59.50	68.20	8.70	Horizontal
5700.00	84.33	-8.05	76.28	105.20	28.92	Horizontal
5720.00	98.15	-7.63	90.52	110.80	20.28	Horizontal
5725.00	98.79	-5.80	92.99	122.20	29.21	Horizontal
11510.00	55.53	3.23	58.76	74.00	15.24	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	47.04	3.23	50.27	54.00	3.73	Vertical
11510.00	46.76	3.23	49.99	54.00	4.01	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	88.27	-5.80	82.47	122.20	39.73	Vertical
5855.00	83.39	-5.79	77.60	110.80	33.20	Vertical
5875.00	72.86	-5.78	67.08	105.20	38.12	Vertical
5925.00	72.78	-5.53	67.25	68.20	0.95	Vertical
11590.00	56.51	4.16	60.67	74.00	13.33	Vertical
5850.00	83.84	-5.80	78.04	122.20	44.16	Horizontal
5855.00	82.27	-5.79	76.48	110.80	34.32	Horizontal
5875.00	71.99	-5.78	66.21	105.20	38.99	Horizontal
5925.00	59.92	-5.53	54.39	68.20	13.81	Horizontal
11590.00	55.44	4.16	59.60	74.00	14.40	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	47.37	4.16	51.53	54.00	2.47	Vertical
11590.00	47.07	4.16	51.23	54.00	2.77	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT80						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	67.54	-7.47	60.07	68.20	8.13	Vertical
5700.00	80.1	-8.05	72.05	105.20	33.15	Vertical
5720.00	84.11	-7.63	76.48	110.80	34.32	Vertical
5725.00	83.99	-7.52	76.47	122.20	45.73	Vertical
5850.00	82.99	-5.80	77.19	122.20	45.01	Vertical
5855.00	77.97	-5.79	72.18	110.80	38.62	Vertical
5875.00	73.53	-5.78	67.75	105.20	37.45	Vertical
5925.00	60.94	-5.53	55.41	68.20	12.79	Vertical
11550.00	56.82	3.72	60.54	74.00	13.46	Vertical
5650.00	69.92	-7.47	62.45	68.20	5.75	Horizontal
5700.00	85.97	-8.05	77.92	105.20	27.28	Horizontal
5720.00	89.20	-7.63	81.57	110.80	29.23	Horizontal
5725.00	90.63	-7.52	83.11	122.20	39.09	Horizontal
5850.00	85.68	-5.80	79.88	122.20	42.32	Horizontal
5855.00	83.66	-5.79	77.87	110.80	32.93	Horizontal
5875.00	78.22	-5.78	72.44	105.20	32.76	Horizontal
5925.00	68.72	-5.53	63.19	68.20	5.01	Horizontal
11550.00	55.78	3.72	59.50	74.00	14.50	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11550.00	46.77	3.72	50.49	54.00	3.51	Vertical
11550.00	44.72	3.72	48.44	54.00	5.56	Horizontal
Remark: 1. Level = Reading + Factor. 2. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTB-1:

Band 4: 5725 MHz - 5825 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	69.31	-7.47	61.84	68.20	6.36	Vertical
5700.00	86.68	-8.05	78.63	105.20	26.57	Vertical
5720.00	97.94	-7.63	90.31	110.80	20.49	Vertical
5725.00	100.57	-7.52	93.05	122.20	29.15	Vertical
11490.00	55.91	3.22	59.13	74.00	14.87	Vertical
5650.00	71.34	-7.47	63.87	68.20	4.33	Horizontal
5700.00	88.58	-8.05	80.53	105.20	24.67	Horizontal
5720.00	99.78	-7.63	92.15	110.80	18.65	Horizontal
5725.00	103.50	-7.52	95.98	122.20	26.22	Horizontal
11490.00	56.22	3.22	59.44	74.00	14.56	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	46.91	3.22	50.13	54.00	3.87	Vertical
11490.00	46.82	3.22	50.04	54.00	3.96	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.37	3.94	60.31	74.00	13.69	Vertical
11570.00	56.42	3.94	60.36	74.00	13.64	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	46.81	3.94	50.75	54.00	3.25	Vertical
11570.00	47.11	3.94	51.05	54.00	2.95	Horizontal
Remark:						
5. Level = Reading + Factor.						
6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	98.27	-5.80	92.47	122.20	29.73	Vertical
5855.00	92.75	-5.79	86.96	110.80	23.84	Vertical
5875.00	81.61	-5.78	75.83	105.20	29.37	Vertical
5925.00	63.51	-5.53	57.98	68.20	10.22	Vertical
11650.00	55.53	3.85	59.38	74.00	14.62	Vertical
5850.00	100.18	-5.80	94.38	122.20	27.82	Horizontal
5855.00	97.19	-5.79	91.40	110.80	19.40	Horizontal
5875.00	86.93	-5.78	81.15	105.20	24.05	Horizontal
5925.00	69.59	-5.53	64.06	68.20	4.14	Horizontal
11650.00	57.38	3.85	61.23	74.00	12.77	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.88	3.85	51.73	54.00	2.27	Vertical
11650.00	46.72	3.85	50.57	54.00	3.43	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTB-2:

Band 4: 5725 MHz - 5825 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	69.70	-7.47	62.23	68.20	5.97	Vertical
5700.00	84.84	-8.05	76.79	105.20	28.41	Vertical
5720.00	96.83	-7.63	89.20	110.80	21.60	Vertical
5725.00	100.98	-7.52	93.46	122.20	28.74	Vertical
11490.00	56.10	3.22	59.32	74.00	14.68	Vertical
5650.00	70.72	-7.47	63.25	68.20	4.95	Horizontal
5700.00	88.34	-8.05	80.29	105.20	24.91	Horizontal
5720.00	99.11	-7.63	91.48	110.80	19.32	Horizontal
5725.00	101.91	-7.52	94.39	122.20	27.81	Horizontal
11490.00	55.96	3.22	59.18	74.00	14.82	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	46.57	3.22	49.79	54.00	4.21	Vertical
11490.00	46.82	3.22	50.04	54.00	3.96	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.17	3.94	60.11	74.00	13.89	Vertical
11570.00	56.97	3.94	60.91	74.00	13.09	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	47.81	3.94	51.75	54.00	2.25	Vertical
11570.00	45.90	3.94	49.84	54.00	4.16	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	98.15	-5.80	92.35	122.20	29.85	Vertical
5855.00	92.91	-5.79	87.12	110.80	23.68	Vertical
5875.00	81.24	-5.78	75.46	105.20	29.74	Vertical
5925.00	63.27	-5.53	57.74	68.20	10.46	Vertical
11650.00	56.02	3.85	59.87	74.00	14.13	Vertical
5850.00	100.39	-5.80	94.59	122.20	27.61	Horizontal
5855.00	96.84	-5.79	91.05	110.80	19.75	Horizontal
5875.00	86.92	-5.78	81.14	105.20	24.06	Horizontal
5925.00	69.92	-5.53	64.39	68.20	3.81	Horizontal
11650.00	57.72	3.85	61.57	74.00	12.43	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.56	3.85	51.41	54.00	2.59	Vertical
11650.00	46.87	3.85	50.72	54.00	3.28	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	70.12	-7.47	62.65	68.20	5.55	Vertical
5700.00	89.96	-8.05	81.91	105.20	23.29	Vertical
5720.00	99.48	-7.63	91.85	110.80	18.95	Vertical
5725.00	103.13	-7.52	95.61	122.20	26.59	Vertical
11490.00	55.70	3.22	58.92	74.00	15.08	Vertical
5650.00	69.84	-7.47	62.37	68.20	5.83	Horizontal
5700.00	88.71	-8.05	80.66	105.20	24.54	Horizontal
5720.00	100.42	-7.63	92.79	110.80	18.01	Horizontal
5725.00	104.67	-7.52	97.15	122.20	25.05	Horizontal
11490.00	55.65	3.22	58.87	74.00	15.13	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	46.41	3.22	49.63	54.00	4.37	Vertical
11490.00	46.82	3.22	50.04	54.00	3.96	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.58	3.94	60.52	74.00	13.48	Vertical
11570.00	56.20	3.94	60.14	74.00	13.86	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	47.33	3.94	51.27	54.00	2.73	Vertical
11570.00	45.64	3.94	49.58	54.00	4.42	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	98.60	-5.80	92.80	122.20	29.40	Vertical
5855.00	93.15	-5.79	87.36	110.80	23.44	Vertical
5875.00	81.42	-5.78	75.64	105.20	29.56	Vertical
5925.00	63.19	-5.53	57.66	68.20	10.54	Vertical
11650.00	55.76	3.85	59.61	74.00	14.39	Vertical
5850.00	100.46	-5.80	94.66	122.20	27.54	Horizontal
5855.00	96.93	-5.79	91.14	110.80	19.66	Horizontal
5875.00	87.34	-5.78	81.56	105.20	23.64	Horizontal
5925.00	69.72	-5.53	64.19	68.20	4.01	Horizontal
11650.00	57.43	3.85	61.28	74.00	12.72	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.23	3.85	51.08	54.00	2.92	Vertical
11650.00	46.71	3.85	50.56	54.00	3.44	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	66.33	-7.47	58.86	68.20	9.34	Vertical
5700.00	86.81	-8.05	78.76	105.20	26.44	Vertical
5720.00	99.85	-7.63	92.22	110.80	18.58	Vertical
5725.00	99.66	-7.52	92.14	122.20	30.06	Vertical
11510.00	56.04	3.23	59.27	74.00	14.73	Vertical
5650.00	66.86	-7.47	59.39	68.20	8.81	Horizontal
5700.00	85.03	-8.05	76.98	105.20	28.22	Horizontal
5720.00	97.92	-7.63	90.29	110.80	20.51	Horizontal
5725.00	99.15	-5.80	93.35	122.20	28.85	Horizontal
11510.00	55.76	3.23	58.99	74.00	15.01	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	46.58	3.23	49.81	54.00	4.19	Vertical
11510.00	46.99	3.23	50.22	54.00	3.78	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	88.58	-5.80	82.78	122.20	39.42	Vertical
5855.00	83.52	-5.79	77.73	110.80	33.07	Vertical
5875.00	73.15	-5.78	67.37	105.20	37.83	Vertical
5925.00	63.31	-5.53	57.78	68.20	10.42	Vertical
11590.00	56.52	4.16	60.68	74.00	13.32	Vertical
5850.00	84.08	-5.80	78.28	122.20	43.92	Horizontal
5855.00	82.50	-5.79	76.71	110.80	34.09	Horizontal
5875.00	71.97	-5.78	66.19	105.20	39.01	Horizontal
5925.00	60.66	-5.53	55.13	68.20	13.07	Horizontal
11590.00	55.39	4.16	59.55	74.00	14.45	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	46.78	4.16	50.94	54.00	3.06	Vertical
11590.00	47.38	4.16	51.54	54.00	2.46	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 8802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	69.75	-7.47	62.28	68.20	5.92	Vertical
5700.00	90.04	-8.05	81.99	105.20	23.21	Vertical
5720.00	99.95	-7.63	92.32	110.80	18.48	Vertical
5725.00	102.91	-7.52	95.39	122.20	26.81	Vertical
11490.00	55.44	3.22	58.66	74.00	15.34	Vertical
5650.00	69.42	-7.47	61.95	68.20	6.25	Horizontal
5700.00	89.14	-8.05	81.09	105.20	24.11	Horizontal
5720.00	100.87	-7.63	93.24	110.80	17.56	Horizontal
5725.00	105.10	-7.52	97.58	122.20	24.62	Horizontal
11490.00	55.89	3.22	59.11	74.00	14.89	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	46.09	3.22	49.31	54.00	4.69	Vertical
11490.00	46.89	3.22	50.11	54.00	3.89	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.11	3.94	60.05	74.00	13.95	Vertical
11570.00	55.96	3.94	59.90	74.00	14.10	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	47.82	3.94	51.76	54.00	2.24	Vertical
11570.00	45.59	3.94	49.53	54.00	4.47	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	98.39	-5.80	92.59	122.20	29.61	Vertical
5855.00	93.01	-5.79	87.22	110.80	23.58	Vertical
5875.00	81.16	-5.78	75.38	105.20	29.82	Vertical
5925.00	62.77	-5.53	57.24	68.20	10.96	Vertical
11650.00	55.73	3.85	59.58	74.00	14.42	Vertical
5850.00	100.55	-5.80	94.75	122.20	27.45	Horizontal
5855.00	97.19	-5.79	91.40	110.80	19.40	Horizontal
5875.00	86.91	-5.78	81.13	105.20	24.07	Horizontal
5925.00	69.39	-5.53	63.86	68.20	4.34	Horizontal
11650.00	56.99	3.85	60.84	74.00	13.16	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.23	3.85	51.08	54.00	2.92	Vertical
11650.00	46.59	3.85	50.44	54.00	3.56	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	66.02	-7.47	58.55	68.20	9.65	Vertical
5700.00	86.73	-8.05	78.68	105.20	26.52	Vertical
5720.00	100.24	-7.63	92.61	110.80	18.19	Vertical
5725.00	100.12	-7.52	92.60	122.20	29.60	Vertical
11510.00	56.48	3.23	59.71	74.00	14.29	Vertical
5650.00	66.56	-7.47	59.09	68.20	9.11	Horizontal
5700.00	85.06	-8.05	77.01	105.20	28.19	Horizontal
5720.00	85.43	-7.63	77.80	110.80	33.00	Horizontal
5725.00	84.71	-5.80	78.91	122.20	43.29	Horizontal
11510.00	55.30	3.23	58.53	74.00	15.47	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	46.67	3.23	49.90	54.00	4.10	Vertical
11510.00	46.62	3.23	49.85	54.00	4.15	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	88.18	-5.80	82.38	122.20	39.82	Vertical
5855.00	83.31	-5.79	77.52	110.80	33.28	Vertical
5875.00	72.79	-5.78	67.01	105.20	38.19	Vertical
5925.00	63.79	-5.53	58.26	68.20	9.94	Vertical
11590.00	56.14	4.16	60.30	74.00	13.70	Vertical
5850.00	84.17	-5.80	78.37	122.20	43.83	Horizontal
5855.00	82.21	-5.79	76.42	110.80	34.38	Horizontal
5875.00	72.43	-5.78	66.65	105.20	38.55	Horizontal
5925.00	60.43	-5.53	54.90	68.20	13.30	Horizontal
11590.00	54.93	4.16	59.09	74.00	14.91	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	46.96	4.16	51.12	54.00	2.88	Vertical
11590.00	47.00	4.16	51.16	54.00	2.84	Horizontal
Remark: 3. Level = Reading + Factor. 4. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT80						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	67.51	-7.47	60.04	68.20	8.16	Vertical
5700.00	80.36	-8.05	72.31	105.20	32.89	Vertical
5720.00	84.2	-7.63	76.57	110.80	34.23	Vertical
5725.00	84.03	-7.52	76.51	122.20	45.69	Vertical
5850.00	82.63	-5.80	76.83	122.20	45.37	Vertical
5855.00	78.09	-5.79	72.30	110.80	38.50	Vertical
5875.00	73.88	-5.78	68.10	105.20	37.10	Vertical
5925.00	60.79	-5.53	55.26	68.20	12.94	Vertical
11550.00	57.15	3.72	60.87	74.00	13.13	Vertical
5650.00	69.52	-7.47	62.05	68.20	6.15	Horizontal
5700.00	86.11	-8.05	78.06	105.20	27.14	Horizontal
5720.00	89.16	-7.63	81.53	110.80	29.27	Horizontal
5725.00	90.36	-7.52	82.84	122.20	39.36	Horizontal
5850.00	85.50	-5.80	79.70	122.20	42.50	Horizontal
5855.00	83.38	-5.79	77.59	110.80	33.21	Horizontal
5875.00	78.16	-5.78	72.38	105.20	32.82	Horizontal
5925.00	68.83	-5.53	63.30	68.20	4.90	Horizontal
11550.00	56.24	3.72	59.96	74.00	14.04	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11550.00	47.18	3.72	50.90	54.00	3.10	Vertical
11550.00	45.06	3.72	48.78	54.00	5.22	Horizontal
Remark: 3. <i>Level = Reading + Factor.</i> 4. <i>Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.</i>						

WiFi1:
ANTA-1:

Band 1: 5150 MHz - 5250 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	59.75	-6.29	53.46	74.00	20.54	Vertical
10360.00	56.88	1.96	58.84	68.20	9.36	Vertical
5150.00	59.34	-6.29	53.05	74.00	20.95	Horizontal
10360.00	58.21	1.96	60.17	68.20	8.03	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.84	-6.29	41.55	54.00	12.45	Vertical
5150.00	47.88	-6.29	41.59	54.00	12.41	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	59.30	1.58	60.88	68.20	7.32	Vertical
10400.00	53.36	1.58	54.94	68.20	13.26	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.12	-6.43	52.69	74.00	21.31	Vertical
10480.00	57.07	2.25	59.32	68.20	8.88	Vertical
5350.00	59.30	-6.43	52.87	74.00	21.13	Horizontal
10480.00	57.03	2.25	59.28	68.20	8.92	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.72	-6.43	41.29	54.00	12.71	Vertical
5350.00	47.84	-6.43	41.41	54.00	12.59	Horizontal
Remark: 9. Level = Reading + Factor. 10. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTA-2:

Band 1: 5150 MHz - 5250 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	60.22	-6.29	53.93	74.00	20.07	Vertical
10360.00	56.69	1.96	58.65	68.20	9.55	Vertical
5150.00	58.60	-6.29	52.31	74.00	21.69	Horizontal
10360.00	58.63	1.96	60.59	68.20	7.61	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.99	-6.29	41.70	54.00	12.30	Vertical
5150.00	47.80	-6.29	41.51	54.00	12.49	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	58.83	1.58	60.41	68.20	7.79	Vertical
10400.00	56.36	1.58	57.94	68.20	10.26	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.28	-6.43	52.85	74.00	21.15	Vertical
10480.00	56.61	2.25	58.86	68.20	9.34	Vertical
5350.00	60.63	-6.43	54.20	74.00	19.80	Horizontal
10480.00	57.30	2.25	59.55	68.20	8.65	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.72	-6.43	41.29	54.00	12.71	Vertical
5350.00	47.87	-6.43	41.44	54.00	12.56	Horizontal
Remark:						
11. Level = Reading + Factor.						
12. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	59.37	-6.29	53.08	74.00	20.92	Vertical
10360.00	56.48	1.96	58.44	68.20	9.76	Vertical
5150.00	58.98	-6.29	52.69	74.00	21.31	Horizontal
10360.00	57.78	1.96	59.74	68.20	8.46	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	48.23	-6.29	41.94	54.00	12.06	Vertical
5150.00	48.30	-6.29	42.01	54.00	11.99	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	59.46	1.58	61.04	68.20	7.16	Vertical
10400.00	53.39	1.58	54.97	68.20	13.23	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.57	-6.43	53.14	74.00	20.86	Vertical
10480.00	56.79	2.25	59.04	68.20	9.16	Vertical
5350.00	59.51	-6.43	53.08	74.00	20.92	Horizontal
10480.00	57.24	2.25	59.49	68.20	8.71	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.93	-6.43	41.50	54.00	12.50	Vertical
5350.00	48.14	-6.43	41.71	54.00	12.29	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.29	-6.29	52.00	74.00	22.00	Vertical
10380.00	56.69	1.77	58.46	68.20	9.74	Vertical
5150.00	58.51	-6.29	52.22	74.00	21.78	Horizontal
10380.00	56.12	1.77	57.89	68.20	10.31	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.40	-6.29	41.11	54.00	12.89	Vertical
5150.00	47.86	-6.29	41.57	54.00	12.43	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	58.77	-6.43	52.34	74.00	21.66	Vertical
10460.00	57.35	2.08	59.43	68.20	8.77	Vertical
5350.00	59.06	-6.43	52.63	74.00	21.37	Horizontal
10460.00	56.57	2.08	58.65	68.20	9.55	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.33	-6.43	40.90	54.00	13.10	Vertical
5350.00	48.29	-6.43	41.86	54.00	12.14	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	59.39	-6.29	53.10	74.00	20.90	Vertical
10360.00	56.17	1.96	58.13	68.20	10.07	Vertical
5150.00	59.25	-6.29	52.96	74.00	21.04	Horizontal
10360.00	58.17	1.96	60.13	68.20	8.07	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	48.72	-6.29	42.43	54.00	11.57	Vertical
5150.00	48.01	-6.29	41.72	54.00	12.28	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	59.79	1.58	61.37	68.20	6.83	Vertical
10400.00	53.59	1.58	55.17	68.20	13.03	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.25	-6.43	52.82	74.00	21.18	Vertical
10480.00	56.46	2.25	58.71	68.20	9.49	Vertical
5350.00	59.93	-6.43	53.50	74.00	20.50	Horizontal
10480.00	57.08	2.25	59.33	68.20	8.87	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.90	-6.43	41.47	54.00	12.53	Vertical
5350.00	47.95	-6.43	41.52	54.00	12.48	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.57	-6.29	52.28	74.00	21.72	Vertical
10380.00	57.18	1.77	58.95	68.20	9.25	Vertical
5150.00	58.20	-6.29	51.91	74.00	22.09	Horizontal
10380.00	56.33	1.77	58.10	68.20	10.10	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	46.91	-6.29	40.62	54.00	13.38	Vertical
5150.00	47.49	-6.29	41.20	54.00	12.80	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	58.48	-6.43	52.05	74.00	21.95	Vertical
10460.00	57.26	2.08	59.34	68.20	8.86	Vertical
5350.00	58.65	-6.43	52.22	74.00	21.78	Horizontal
10460.00	56.42	2.08	58.50	68.20	9.70	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	46.95	-6.43	40.52	54.00	13.48	Vertical
5350.00	48.65	-6.43	42.22	54.00	11.78	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT80						
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.82	-6.29	52.53	74.00	21.47	Vertical
5350.00	58.35	-6.43	51.92	74.00	22.08	Vertical
10420.00	58.80	1.75	60.55	68.20	7.65	Vertical
5150.00	69.58	-6.29	63.29	74.00	10.71	Horizontal
5350.00	58.94	-6.43	52.51	74.00	21.49	Horizontal
10420.00	56.77	1.75	58.52	68.20	9.68	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.94	-6.29	41.65	54.00	12.35	Vertical
5350.00	47.70	-6.43	41.27	54.00	12.73	Vertical
5150.00	57.54	-6.29	51.25	54.00	2.75	Horizontal
5350.00	48.49	-6.43	42.06	54.00	11.94	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTB-1:

Band 1: 5150 MHz - 5250 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	59.58	-6.29	53.29	74.00	20.71	Vertical
10360.00	56.86	1.96	58.82	68.20	9.38	Vertical
5150.00	66.46	-6.29	60.17	74.00	13.83	Horizontal
10360.00	57.92	1.96	59.88	68.20	8.32	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.86	-6.29	41.57	54.00	12.43	Vertical
5150.00	54.67	-6.29	48.38	54.00	5.62	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	59.05	1.58	60.63	68.20	7.57	Vertical
10400.00	56.54	1.58	58.12	68.20	10.08	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	58.72	-6.43	52.29	74.00	21.71	Vertical
10480.00	56.94	2.25	59.19	68.20	9.01	Vertical
5350.00	62.63	-6.43	56.20	74.00	17.80	Horizontal
10480.00	57.65	2.25	59.90	68.20	8.30	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.52	-6.43	41.09	54.00	12.91	Vertical
5350.00	48.62	-6.43	42.19	54.00	11.81	Horizontal
Remark: 13. Level = Reading + Factor. 14. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTB-2:

Band 1: 5150 MHz - 5250 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	59.73	-6.29	53.44	74.00	20.56	Vertical
10360.00	57.28	1.96	59.24	68.20	8.96	Vertical
5150.00	66.65	-6.29	60.36	74.00	13.64	Horizontal
10360.00	57.51	1.96	59.47	68.20	8.73	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.74	-6.29	41.45	54.00	12.55	Vertical
5150.00	55.11	-6.29	48.82	54.00	5.18	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	59.56	1.58	61.14	68.20	7.06	Vertical
10400.00	56.95	1.58	58.53	68.20	9.67	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.58	-6.43	53.15	74.00	20.85	Vertical
10480.00	57.04	2.25	59.29	68.20	8.91	Vertical
5350.00	60.09	-6.43	53.66	74.00	20.34	Horizontal
10480.00	57.27	2.25	59.52	68.20	8.68	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.48	-6.43	41.05	54.00	12.95	Vertical
5350.00	48.98	-6.43	42.55	54.00	11.45	Horizontal
Remark: 15. Level = Reading + Factor. 16. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	60.29	-6.29	54.00	74.00	20.00	Vertical
10360.00	57.15	1.96	59.11	68.20	9.09	Vertical
5150.00	58.65	-6.29	52.36	74.00	21.64	Horizontal
10360.00	59.08	1.96	61.04	68.20	7.16	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	48.40	-6.29	42.11	54.00	11.89	Vertical
5150.00	47.83	-6.29	41.54	54.00	12.46	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	58.42	1.58	60.00	68.20	8.20	Vertical
10400.00	56.62	1.58	58.20	68.20	10.00	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.08	-6.43	52.65	74.00	21.35	Vertical
10480.00	56.60	2.25	58.85	68.20	9.35	Vertical
5350.00	60.64	-6.43	54.21	74.00	19.79	Horizontal
10480.00	57.58	2.25	59.83	68.20	8.37	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.58	-6.43	41.15	54.00	12.85	Vertical
5350.00	47.58	-6.43	41.15	54.00	12.85	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.36	-6.29	52.07	74.00	21.93	Vertical
10380.00	56.83	1.77	58.60	68.20	9.60	Vertical
5150.00	58.60	-6.29	52.31	74.00	21.69	Horizontal
10380.00	56.56	1.77	58.33	68.20	9.87	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.80	-6.29	41.51	54.00	12.49	Vertical
5150.00	47.71	-6.29	41.42	54.00	12.58	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.17	-6.43	52.74	74.00	21.26	Vertical
10460.00	57.03	2.08	59.11	68.20	9.09	Vertical
5350.00	58.95	-6.43	52.52	74.00	21.48	Horizontal
10460.00	57.06	2.08	59.14	68.20	9.06	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.53	-6.43	41.10	54.00	12.90	Vertical
5350.00	48.40	-6.43	41.97	54.00	12.03	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	60.09	-6.29	53.80	74.00	20.20	Vertical
10360.00	57.13	1.96	59.09	68.20	9.11	Vertical
5150.00	58.40	-6.29	52.11	74.00	21.89	Horizontal
10360.00	58.70	1.96	60.66	68.20	7.54	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	48.52	-6.29	42.23	54.00	11.77	Vertical
5150.00	48.24	-6.29	41.95	54.00	12.05	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
10400.00	58.70	1.58	60.28	68.20	7.92	Vertical
10400.00	56.37	1.58	57.95	68.20	10.25	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	58.84	-6.43	52.41	74.00	21.59	Vertical
10480.00	56.18	2.25	58.43	68.20	9.77	Vertical
5350.00	60.65	-6.43	54.22	74.00	19.78	Horizontal
10480.00		2.25	2.25	68.20	65.95	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.57	-6.43	41.14	54.00	12.86	Vertical
5350.00	48.02	-6.43	41.59	54.00	12.41	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.16	-6.29	51.87	74.00	22.13	Vertical
10380.00	56.74	1.77	58.51	68.20	9.69	Vertical
5150.00	58.56	-6.29	52.27	74.00	21.73	Horizontal
10380.00	56.78	1.77	58.55	68.20	9.65	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.48	-6.29	41.19	54.00	12.81	Vertical
5150.00	47.25	-6.29	40.96	54.00	13.04	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	59.15	-6.43	52.72	74.00	21.28	Vertical
10460.00	57.53	2.08	59.61	68.20	8.59	Vertical
5350.00	58.49	-6.43	52.06	74.00	21.94	Horizontal
10460.00	57.06	2.08	59.14	68.20	9.06	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5350.00	47.78	-6.43	41.35	54.00	12.65	Vertical
5350.00	48.08	-6.43	41.65	54.00	12.35	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 1: 5150 MHz - 5250 MHz, 802.11ac-VHT80						
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	58.90	-6.29	52.61	74.00	21.39	Vertical
5350.00	58.57	-6.43	52.14	74.00	21.86	Vertical
10420.00	58.99	1.75	60.74	68.20	7.46	Vertical
5150.00	69.37	-6.29	63.08	74.00	10.92	Horizontal
5350.00	58.64	-6.43	52.21	74.00	21.79	Horizontal
10420.00	56.37	1.75	58.12	68.20	10.08	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5150.00	47.48	-6.29	41.19	54.00	12.81	Vertical
5350.00	47.32	-6.43	40.89	54.00	13.11	Vertical
5150.00	57.22	-6.29	50.93	54.00	3.07	Horizontal
5350.00	48.09	-6.43	41.66	54.00	12.34	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTA-1:

Band 4: 5725 MHz - 5825 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	64.94	-7.47	57.47	68.20	10.73	Vertical
5700.00	85.87	-8.05	77.82	105.20	27.38	Vertical
5720.00	97.92	-7.63	90.29	110.80	20.51	Vertical
5725.00	100.56	-7.52	93.04	122.20	29.16	Vertical
11490.00	54.78	3.22	58.00	74.00	16.00	Vertical
5650.00	70.39	-7.47	62.92	68.20	5.28	Horizontal
5700.00	89.19	-8.05	81.14	105.20	24.06	Horizontal
5720.00	99.44	-7.63	91.81	110.80	18.99	Horizontal
5725.00	101.94	-7.52	94.42	122.20	27.78	Horizontal
11490.00	55.98	3.22	59.20	74.00	14.80	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	47.21	3.22	50.43	54.00	3.57	Vertical
11490.00	46.98	3.22	50.20	54.00	3.80	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	57.19	3.94	61.13	74.00	12.87	Vertical
11570.00	55.51	3.94	59.45	74.00	14.55	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	46.77	3.94	50.71	54.00	3.29	Vertical
11570.00	47.51	3.94	51.45	54.00	2.55	Horizontal
Remark: 9. Level = Reading + Factor. 10. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	97.60	-5.80	91.80	122.20	30.40	Vertical
5855.00	94.97	-5.79	89.18	110.80	21.62	Vertical
5875.00	84.60	-5.78	78.82	105.20	26.38	Vertical
5925.00	66.06	-5.53	60.53	68.20	7.67	Vertical
11650.00	56.55	3.85	60.40	74.00	13.60	Vertical
5850.00	97.78	-5.80	91.98	122.20	30.22	Horizontal
5855.00	95.41	-5.79	89.62	110.80	21.18	Horizontal
5875.00	84.59	-5.78	78.81	105.20	26.39	Horizontal
5925.00	67.89	-5.53	62.36	68.20	5.84	Horizontal
11650.00	58.64	3.85	62.49	74.00	11.51	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	48.60	3.85	52.45	54.00	1.55	Vertical
11650.00	47.66	3.85	51.51	54.00	2.49	Horizontal
Remark: 9. Level = Reading + Factor. 10. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTA-2:

Band 4: 5725 MHz - 5825 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	64.66	-7.47	57.19	68.20	11.01	Vertical
5700.00	84.48	-8.05	76.43	105.20	28.77	Vertical
5720.00	97.35	-7.63	89.72	110.80	21.08	Vertical
5725.00	101.08	-7.52	93.56	122.20	28.64	Vertical
11490.00	55.12	3.22	58.34	74.00	15.66	Vertical
5650.00	69.90	-7.47	62.43	68.20	5.77	Horizontal
5700.00	87.72	-8.05	79.67	105.20	25.53	Horizontal
5720.00	98.74	-7.63	91.11	110.80	19.69	Horizontal
5725.00	102.39	-7.52	94.87	122.20	27.33	Horizontal
11490.00	55.70	3.22	58.92	74.00	15.08	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	47.37	3.22	50.59	54.00	3.41	Vertical
11490.00	47.48	3.22	50.70	54.00	3.30	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.71	3.94	60.65	74.00	13.35	Vertical
11570.00	55.81	3.94	59.75	74.00	14.25	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	46.91	3.94	50.85	54.00	3.15	Vertical
11570.00	47.20	3.94	51.14	54.00	2.86	Horizontal
Remark: 11. Level = Reading + Factor. 12. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	88.39	-5.80	82.59	122.20	39.61	Vertical
5855.00	81.17	-5.79	75.38	110.80	35.42	Vertical
5875.00	61.90	-5.78	56.12	105.20	49.08	Vertical
5925.00	59.33	-5.53	53.80	68.20	14.40	Vertical
11650.00	56.96	3.85	60.81	74.00	13.19	Vertical
5850.00	95.07	-5.80	89.27	122.20	32.93	Horizontal
5855.00	91.16	-5.79	85.37	110.80	25.43	Horizontal
5875.00	77.09	-5.78	71.31	105.20	33.89	Horizontal
5925.00	59.31	-5.53	53.78	68.20	14.42	Horizontal
11650.00	58.75	3.85	62.60	74.00	11.40	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.14	3.85	50.99	54.00	3.01	Vertical
11650.00	47.61	3.85	51.46	54.00	2.54	Horizontal
Remark: 11. Level = Reading + Factor. 12. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	65.17	-7.47	57.70	68.20	10.50	Vertical
5700.00	85.76	-8.05	77.71	105.20	27.49	Vertical
5720.00	98.31	-7.63	90.68	110.80	20.12	Vertical
5725.00	100.68	-7.52	93.16	122.20	29.04	Vertical
11490.00	54.73	3.22	57.95	74.00	16.05	Vertical
5650.00	70.43	-7.47	62.96	68.20	5.24	Horizontal
5700.00	89.22	-8.05	81.17	105.20	24.03	Horizontal
5720.00	99.41	-7.63	91.78	110.80	19.02	Horizontal
5725.00	101.86	-7.52	94.34	122.20	27.86	Horizontal
11490.00	55.63	3.22	58.85	74.00	15.15	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	47.00	3.22	50.22	54.00	3.78	Vertical
11490.00	46.50	3.22	49.72	54.00	4.28	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.98	3.94	60.92	74.00	13.08	Vertical
11570.00	55.47	3.94	59.41	74.00	14.59	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	46.98	3.94	50.92	54.00	3.08	Vertical
11570.00	47.91	3.94	51.85	54.00	2.15	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	97.39	-5.80	91.59	122.20	30.61	Vertical
5855.00	94.83	-5.79	89.04	110.80	21.76	Vertical
5875.00	94.55	-5.78	88.77	105.20	16.43	Vertical
5925.00	65.96	-5.53	60.43	68.20	7.77	Vertical
11650.00	56.08	3.85	59.93	74.00	14.07	Vertical
5850.00	97.47	-5.80	91.67	122.20	30.53	Horizontal
5855.00	95.19	-5.79	89.40	110.80	21.40	Horizontal
5875.00	84.31	-5.78	78.53	105.20	26.67	Horizontal
5925.00	68.05	-5.53	62.52	68.20	5.68	Horizontal
11650.00	59.09	3.85	62.94	74.00	11.06	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	48.52	3.85	52.37	54.00	1.63	Vertical
11650.00	47.84	3.85	51.69	54.00	2.31	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	59.52	-7.47	52.05	68.20	16.15	Vertical
5700.00	70.01	-8.05	61.96	105.20	43.24	Vertical
5720.00	87.16	-7.63	79.53	110.80	31.27	Vertical
5725.00	91.92	-7.52	84.40	122.20	37.80	Vertical
11510.00	55.19	3.23	58.42	74.00	15.58	Vertical
5650.00	61.53	-7.47	54.06	68.20	14.14	Horizontal
5700.00	79.23	-8.05	71.18	105.20	34.02	Horizontal
5720.00	93.79	-7.63	86.16	110.80	24.64	Horizontal
5725.00	96.00	-5.80	90.20	122.20	32.00	Horizontal
11510.00	55.13	3.23	58.36	74.00	15.64	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	47.10	3.23	50.33	54.00	3.67	Vertical
11510.00	46.23	3.23	49.46	54.00	4.54	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	68.89	-5.80	63.09	122.20	59.11	Vertical
5855.00	65.16	-5.79	59.37	110.80	51.43	Vertical
5875.00	59.55	-5.78	53.77	105.20	51.43	Vertical
5925.00	58.14	-5.53	52.61	68.20	15.59	Vertical
11590.00	55.30	4.16	59.46	74.00	14.54	Vertical
5850.00	77.23	-5.80	71.43	122.20	50.77	Horizontal
5855.00	76.90	-5.79	71.11	110.80	39.69	Horizontal
5875.00	62.64	-5.78	56.86	105.20	48.34	Horizontal
5925.00	59.90	-5.53	54.37	68.20	13.83	Horizontal
11590.00	54.47	4.16	58.63	74.00	15.37	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	46.86	4.16	51.02	54.00	2.98	Vertical
11590.00	46.68	4.16	50.84	54.00	3.16	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 8802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	64.98	-7.47	57.51	68.20	10.69	Vertical
5700.00	86.16	-8.05	78.11	105.20	27.09	Vertical
5720.00	98.10	-7.63	90.47	110.80	20.33	Vertical
5725.00	100.51	-7.52	92.99	122.20	29.21	Vertical
11490.00	54.65	3.22	57.87	74.00	16.13	Vertical
5650.00	70.59	-7.47	63.12	68.20	5.08	Horizontal
5700.00	89.65	-8.05	81.60	105.20	23.60	Horizontal
5720.00	99.03	-7.63	91.40	110.80	19.40	Horizontal
5725.00	102.01	-7.52	94.49	122.20	27.71	Horizontal
11490.00	55.93	3.22	59.15	74.00	14.85	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	46.62	3.22	49.84	54.00	4.16	Vertical
11490.00	46.59	3.22	49.81	54.00	4.19	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.97	3.94	60.91	74.00	13.09	Vertical
11570.00	55.94	3.94	59.88	74.00	14.12	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	46.80	3.94	50.74	54.00	3.26	Vertical
11570.00	48.03	3.94	51.97	54.00	2.03	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	97.04	-5.80	91.24	122.20	30.96	Vertical
5855.00	94.40	-5.79	88.61	110.80	22.19	Vertical
5875.00	94.89	-5.78	89.11	105.20	16.09	Vertical
5925.00	65.70	-5.53	60.17	68.20	8.03	Vertical
11650.00	55.96	3.85	59.81	74.00	14.19	Vertical
5850.00	97.83	-5.80	92.03	122.20	30.17	Horizontal
5855.00	94.81	-5.79	89.02	110.80	21.78	Horizontal
5875.00	83.86	-5.78	78.08	105.20	27.12	Horizontal
5925.00	68.29	-5.53	62.76	68.20	5.44	Horizontal
11650.00	58.93	3.85	62.78	74.00	11.22	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	48.70	3.85	52.55	54.00	1.45	Vertical
11650.00	47.76	3.85	51.61	54.00	2.39	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	59.33	-7.47	51.86	68.20	16.34	Vertical
5700.00	69.74	-8.05	61.69	105.20	43.51	Vertical
5720.00	86.99	-7.63	79.36	110.80	31.44	Vertical
5725.00	92.14	-7.52	84.62	122.20	37.58	Vertical
11510.00	55.24	3.23	58.47	74.00	15.53	Vertical
5650.00	61.61	-7.47	54.14	68.20	14.06	Horizontal
5700.00	78.83	-8.05	70.78	105.20	34.42	Horizontal
5720.00	94.27	-7.63	86.64	110.80	24.16	Horizontal
5725.00	95.77	-5.80	89.97	122.20	32.23	Horizontal
11510.00	55.10	3.23	58.33	74.00	15.67	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	46.65	3.23	49.88	54.00	4.12	Vertical
11510.00	46.33	3.23	49.56	54.00	4.44	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	68.72	-5.80	62.92	122.20	59.28	Vertical
5855.00	64.69	-5.79	58.90	110.80	51.90	Vertical
5875.00	59.78	-5.78	54.00	105.20	51.20	Vertical
5925.00	57.65	-5.53	52.12	68.20	16.08	Vertical
11590.00	55.20	4.16	59.36	74.00	14.64	Vertical
5850.00	77.28	-5.80	71.48	122.20	50.72	Horizontal
5855.00	77.20	-5.79	71.41	110.80	39.39	Horizontal
5875.00	63.02	-5.78	57.24	105.20	47.96	Horizontal
5925.00	60.06	-5.53	54.53	68.20	13.67	Horizontal
11590.00	54.41	4.16	58.57	74.00	15.43	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	46.49	4.16	50.65	54.00	3.35	Vertical
11590.00	46.99	4.16	51.15	54.00	2.85	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT80						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	58.78	-7.47	51.31	68.20	16.89	Vertical
5700.00	75.22	-8.05	67.17	105.20	38.03	Vertical
5720.00	79.04	-7.63	71.41	110.80	39.39	Vertical
5725.00	78.31	-7.52	70.79	122.20	51.41	Vertical
5850.00	74.95	-5.80	69.15	122.20	53.05	Vertical
5855.00	74.75	-5.79	68.96	110.80	41.84	Vertical
5875.00	70.55	-5.78	64.77	105.20	40.43	Vertical
5925.00	57.98	-5.53	52.45	68.20	15.75	Vertical
11550.00	56.66	3.72	60.38	74.00	13.62	Vertical
5650.00	68.84	-7.47	61.37	68.20	6.83	Horizontal
5700.00	85.91	-8.05	77.86	105.20	27.34	Horizontal
5720.00	91.65	-7.63	84.02	110.80	26.78	Horizontal
5725.00	89.98	-7.52	82.46	122.20	39.74	Horizontal
5850.00	87.55	-5.80	81.75	122.20	40.45	Horizontal
5855.00	85.72	-5.79	79.93	110.80	30.87	Horizontal
5875.00	79.75	-5.78	73.97	105.20	31.23	Horizontal
5925.00	66.89	-5.53	61.36	68.20	6.84	Horizontal
11550.00	56.08	3.72	59.80	74.00	14.20	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11550.00	46.81	3.72	50.53	54.00	3.47	Vertical
11550.00	44.61	3.72	48.33	54.00	5.67	Horizontal
Remark: 5. Level = Reading + Factor. 6. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTB-1:

Band 4: 5725 MHz - 5825 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	66.37	-7.47	58.90	68.20	9.30	Vertical
5700.00	83.48	-8.05	75.43	105.20	29.77	Vertical
5720.00	95.60	-7.63	87.97	110.80	22.83	Vertical
5725.00	100.33	-7.52	92.81	122.20	29.39	Vertical
11490.00	55.41	3.22	58.63	74.00	15.37	Vertical
5650.00	70.73	-7.47	63.26	68.20	4.94	Horizontal
5700.00	87.99	-8.05	79.94	105.20	25.26	Horizontal
5720.00	99.42	-7.63	91.79	110.80	19.01	Horizontal
5725.00	103.35	-7.52	95.83	122.20	26.37	Horizontal
11490.00	55.39	3.22	58.61	74.00	15.39	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	46.94	3.22	50.16	54.00	3.84	Vertical
11490.00	47.45	3.22	50.67	54.00	3.33	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.83	3.94	60.77	74.00	13.23	Vertical
11570.00	56.29	3.94	60.23	74.00	13.77	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	46.65	3.94	50.59	54.00	3.41	Vertical
11570.00	47.29	3.94	51.23	54.00	2.77	Horizontal
Remark: 13. Level = Reading + Factor. 14. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	88.07	-5.80	82.27	122.20	39.93	Vertical
5855.00	79.70	-5.79	73.91	110.80	36.89	Vertical
5875.00	64.33	-5.78	58.55	105.20	46.65	Vertical
5925.00	58.32	-5.53	52.79	68.20	15.41	Vertical
11650.00	56.38	3.85	60.23	74.00	13.77	Vertical
5850.00	95.53	-5.80	89.73	122.20	32.47	Horizontal
5855.00	90.83	-5.79	85.04	110.80	25.76	Horizontal
5875.00	78.02	-5.78	72.24	105.20	32.96	Horizontal
5925.00	58.53	-5.53	53.00	68.20	15.20	Horizontal
11650.00	58.82	3.85	62.67	74.00	11.33	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	48.21	3.85	52.06	54.00	1.94	Vertical
11650.00	47.47	3.85	51.32	54.00	2.68	Horizontal
Remark: 13. Level = Reading + Factor. 14. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

ANTB-2:

Band 4: 5725 MHz - 5825 MHz, 802.11a						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	64.66	-7.47	57.19	68.20	11.01	Vertical
5700.00	83.42	-8.05	75.37	105.20	29.83	Vertical
5720.00	97.85	-7.63	90.22	110.80	20.58	Vertical
5725.00	102.25	-7.52	94.73	122.20	27.47	Vertical
11490.00	55.57	3.22	58.79	74.00	15.21	Vertical
5650.00	72.56	-7.47	65.09	68.20	3.11	Horizontal
5700.00	87.37	-8.05	79.32	105.20	25.88	Horizontal
5720.00	99.74	-7.63	92.11	110.80	18.69	Horizontal
5725.00	103.55	-7.52	96.03	122.20	26.17	Horizontal
11490.00	55.81	3.22	59.03	74.00	14.97	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	47.15	3.22	50.37	54.00	3.63	Vertical
11490.00	47.00	3.22	50.22	54.00	3.78	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.37	3.94	60.31	74.00	13.69	Vertical
11570.00	56.02	3.94	59.96	74.00	14.04	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	47.07	3.94	51.01	54.00	2.99	Vertical
11570.00	47.19	3.94	51.13	54.00	2.87	Horizontal
Remark: 15. Level = Reading + Factor. 16. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	88.43	-5.80	82.63	122.20	39.57	Vertical
5855.00	81.66	-5.79	75.87	110.80	34.93	Vertical
5875.00	61.52	-5.78	55.74	105.20	49.46	Vertical
5925.00	59.27	-5.53	53.74	68.20	14.46	Vertical
11650.00	56.62	3.85	60.47	74.00	13.53	Vertical
5850.00	95.47	-5.80	89.67	122.20	32.53	Horizontal
5855.00	91.63	-5.79	85.84	110.80	24.96	Horizontal
5875.00	77.56	-5.78	71.78	105.20	33.42	Horizontal
5925.00	59.63	-5.53	54.10	68.20	14.10	Horizontal
11650.00	58.33	3.85	62.18	74.00	11.82	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	48.41	3.85	52.26	54.00	1.74	Vertical
11650.00	47.13	3.85	50.98	54.00	3.02	Horizontal
Remark: 15. Level = Reading + Factor. 16. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	65.03	-7.47	57.56	68.20	10.64	Vertical
5700.00	84.63	-8.05	76.58	105.20	28.62	Vertical
5720.00	97.43	-7.63	89.80	110.80	21.00	Vertical
5725.00	101.42	-7.52	93.90	122.20	28.30	Vertical
11490.00	55.00	3.22	58.22	74.00	15.78	Vertical
5650.00	69.61	-7.47	62.14	68.20	6.06	Horizontal
5700.00	87.71	-8.05	79.66	105.20	25.54	Horizontal
5720.00	98.24	-7.63	90.61	110.80	20.19	Horizontal
5725.00	102.37	-7.52	94.85	122.20	27.35	Horizontal
11490.00	55.32	3.22	58.54	74.00	15.46	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	47.65	3.22	50.87	54.00	3.13	Vertical
11490.00	47.24	3.22	50.46	54.00	3.54	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.61	3.94	60.55	74.00	13.45	Vertical
11570.00	56.13	3.94	60.07	74.00	13.93	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	46.49	3.94	50.43	54.00	3.57	Vertical
11570.00	47.05	3.94	50.99	54.00	3.01	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	88.16	-5.80	82.36	122.20	39.84	Vertical
5855.00	81.65	-5.79	75.86	110.80	34.94	Vertical
5875.00	62.04	-5.78	56.26	105.20	48.94	Vertical
5925.00	59.55	-5.53	54.02	68.20	14.18	Vertical
11650.00	57.43	3.85	61.28	74.00	12.72	Vertical
5850.00	95.17	-5.80	89.37	122.20	32.83	Horizontal
5855.00	91.20	-5.79	85.41	110.80	25.39	Horizontal
5875.00	76.69	-5.78	70.91	105.20	34.29	Horizontal
5925.00	59.01	-5.53	53.48	68.20	14.72	Horizontal
11650.00	58.40	3.85	62.25	74.00	11.75	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.05	3.85	50.90	54.00	3.10	Vertical
11650.00	47.66	3.85	51.51	54.00	2.49	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11n-HT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	59.77	-7.47	52.30	68.20	15.90	Vertical
5700.00	72.36	-8.05	64.31	105.20	40.89	Vertical
5720.00	88.14	-7.63	80.51	110.80	30.29	Vertical
5725.00	88.14	-7.52	80.62	122.20	41.58	Vertical
11510.00	55.69	3.23	58.92	74.00	15.08	Vertical
5650.00	69.14	-7.47	61.67	68.20	6.53	Horizontal
5700.00	83.53	-8.05	75.48	105.20	29.72	Horizontal
5720.00	95.95	-7.63	88.32	110.80	22.48	Horizontal
5725.00	98.53	-5.80	92.73	122.20	29.47	Horizontal
11510.00	55.62	3.23	58.85	74.00	15.15	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	47.45	3.23	50.68	54.00	3.32	Vertical
11510.00	46.64	3.23	49.87	54.00	4.13	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	73.27	-5.80	67.47	122.20	54.73	Vertical
5855.00	70.71	-5.79	64.92	110.80	45.88	Vertical
5875.00	60.66	-5.78	54.88	105.20	50.32	Vertical
5925.00	58.15	-5.53	52.62	68.20	15.58	Vertical
11590.00	55.80	4.16	59.96	74.00	14.04	Vertical
5850.00	84.14	-5.80	78.34	122.20	43.86	Horizontal
5855.00	83.88	-5.79	78.09	110.80	32.71	Horizontal
5875.00	74.10	-5.78	68.32	105.20	36.88	Horizontal
5925.00	61.22	-5.53	55.69	68.20	12.51	Horizontal
11590.00	54.78	4.16	58.94	74.00	15.06	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	47.01	4.16	51.17	54.00	2.83	Vertical
11590.00	46.71	4.16	50.87	54.00	3.13	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 8802.11ac-VHT20						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	64.67	-7.47	57.20	68.20	11.00	Vertical
5700.00	84.66	-8.05	76.61	105.20	28.59	Vertical
5720.00	97.52	-7.63	89.89	110.80	20.91	Vertical
5725.00	101.44	-7.52	93.92	122.20	28.28	Vertical
11490.00	54.97	3.22	58.19	74.00	15.81	Vertical
5650.00	69.93	-7.47	62.46	68.20	5.74	Horizontal
5700.00	87.31	-8.05	79.26	105.20	25.94	Horizontal
5720.00	97.84	-7.63	90.21	110.80	20.59	Horizontal
5725.00	102.32	-7.52	94.80	122.20	27.40	Horizontal
11490.00	55.47	3.22	58.69	74.00	15.31	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11490.00	48.12	3.22	51.34	54.00	2.66	Vertical
11490.00	47.11	3.22	50.33	54.00	3.67	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	56.61	3.94	60.55	74.00	13.45	Vertical
11570.00	55.65	3.94	59.59	74.00	14.41	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11570.00	46.57	3.94	50.51	54.00	3.49	Vertical
11570.00	47.01	3.94	50.95	54.00	3.05	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	88.14	-5.80	82.34	122.20	39.86	Vertical
5855.00	81.84	-5.79	76.05	110.80	34.75	Vertical
5875.00	61.71	-5.78	55.93	105.20	49.27	Vertical
5925.00	59.21	-5.53	53.68	68.20	14.52	Vertical
11650.00	57.25	3.85	61.10	74.00	12.90	Vertical
5850.00	95.01	-5.80	89.21	122.20	32.99	Horizontal
5855.00	91.56	-5.79	85.77	110.80	25.03	Horizontal
5875.00	77.01	-5.78	71.23	105.20	33.97	Horizontal
5925.00	58.66	-5.53	53.13	68.20	15.07	Horizontal
11650.00	58.77	3.85	62.62	74.00	11.38	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11650.00	47.36	3.85	51.21	54.00	2.79	Vertical
11650.00	47.32	3.85	51.17	54.00	2.83	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT40						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	59.85	-7.47	52.38	68.20	15.82	Vertical
5700.00	72.82	-8.05	64.77	105.20	40.43	Vertical
5720.00	88.44	-7.63	80.81	110.80	29.99	Vertical
5725.00	88.57	-7.52	81.05	122.20	41.15	Vertical
11510.00	55.95	3.23	59.18	74.00	14.82	Vertical
5650.00	69.22	-7.47	61.75	68.20	6.45	Horizontal
5700.00	83.87	-8.05	75.82	105.20	29.38	Horizontal
5720.00	95.76	-7.63	88.13	110.80	22.67	Horizontal
5725.00	98.76	-5.80	92.96	122.20	29.24	Horizontal
11510.00	55.31	3.23	58.54	74.00	15.46	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11510.00	47.18	3.23	50.41	54.00	3.59	Vertical
11510.00	46.38	3.23	49.61	54.00	4.39	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5850.00	73.56	-5.80	67.76	122.20	54.44	Vertical
5855.00	70.71	-5.79	64.92	110.80	45.88	Vertical
5875.00	60.85	-5.78	55.07	105.20	50.13	Vertical
5925.00	57.88	-5.53	52.35	68.20	15.85	Vertical
11590.00	55.40	4.16	59.56	74.00	14.44	Vertical
5850.00	84.43	-5.80	78.63	122.20	43.57	Horizontal
5855.00	83.63	-5.79	77.84	110.80	32.96	Horizontal
5875.00	74.19	-5.78	68.41	105.20	36.79	Horizontal
5925.00	61.54	-5.53	56.01	68.20	12.19	Horizontal
11590.00	54.70	4.16	58.86	74.00	15.14	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11590.00	46.93	4.16	51.09	54.00	2.91	Vertical
11590.00	46.52	4.16	50.68	54.00	3.32	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

Band 4: 5725 MHz - 5825 MHz, 802.11ac-VHT80						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
5650.00	59.6	-7.47	52.13	68.20	16.07	Vertical
5700.00	73.48	-8.05	65.43	105.20	39.77	Vertical
5720.00	77.35	-7.63	69.72	110.80	41.08	Vertical
5725.00	76.36	-7.52	68.84	122.20	53.36	Vertical
5850.00	75.25	-5.80	69.45	122.20	52.75	Vertical
5855.00	73.39	-5.79	67.60	110.80	43.20	Vertical
5875.00	68.2	-5.78	62.42	105.20	42.78	Vertical
5925.00	58.57	-5.53	53.04	68.20	15.16	Vertical
11550.00	56.31	3.72	60.03	74.00	13.97	Vertical
5650.00	63.63	-7.47	56.16	68.20	12.04	Horizontal
5700.00	81.33	-8.05	73.28	105.20	31.92	Horizontal
5720.00	84.80	-7.63	77.17	110.80	33.63	Horizontal
5725.00	84.22	-7.52	76.70	122.20	45.50	Horizontal
5850.00	80.29	-5.80	74.49	122.20	47.71	Horizontal
5855.00	79.81	-5.79	74.02	110.80	36.78	Horizontal
5875.00	74.11	-5.78	68.33	105.20	36.87	Horizontal
5925.00	60.46	-5.53	54.93	68.20	13.27	Horizontal
11550.00	55.69	3.72	59.41	74.00	14.59	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBμV)	Factor (dB)	Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Polarization
11550.00	46.38	3.72	50.10	54.00	3.90	Vertical
11550.00	45.10	3.72	48.82	54.00	5.18	Horizontal
Remark: 7. Level = Reading + Factor. 8. Test Frequency up to 40GHz, and the emission levels of other frequencies are lower than the limit 20dB, not show in test report.						

-----End of report-----