FCC Radio Test Report FCC ID: VJA-DLM108RJT

This report concerns (check one) : Original Grant Class I Change

Issued Date : Jan. 10, 2011 **Project No.** : R1011009

Equipment: mini-PCI radio Module

Model Name: DLM108-RJT

Applicant : RAJANT CORPORATION

Address: 400 East King Street, Malvern, PA,

United States 19355-3258

Tested by: Neutron Engineering Inc. EMC Laboratory

Date of Receipt: Nov. 19, 2010

Date of Test: Nov. 19, 2010 ~ Nov. 24, 2010

Testing Engineer

Technical Manager

Authorized Signatory

Neutron Engineering Inc.

B1, No. 37, Lane 365, YangGuang St., NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299 FAX: +886-2-2657-3331









Declaration

Neutron represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

Neutron's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

Neutron's reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

Neutron's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Report No.: NEI-FCCP-1-R1011009 Page 2 of 80

Table of Contents	Page
1. CERTIFICATION	5
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
	-
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TES	TED 11
3.4 DESCRIPTION OF SUPPORT UNITS	12
4. EMC EMISSION TEST	13
4.1 CONDUCTED EMISSION MEASUREMENT	13
4.1.1 POWER LINE CONDUCTED EMISSION	13
4.1.2 MEASUREMENT INSTRUMENTS LIST	13
4.1.3 TEST PROCEDURE	14
4.1.4 DEVIATION FROM TEST STANDARD	14
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14 15
4.1.7 TEST RESULTS	
4.2 RADIATED EMISSION MEASUREMENT	17
4.2.1 RADIATED EMISSION LIMITS	17
4.2.2 MEASUREMENT INSTRUMENTS LIST 4.2.3 TEST PROCEDURE	18 18
4.2.4 DEVIATION FROM TEST STANDARD	18
4.2.5 TEST SETUP	19
4.2.6 EUT OPERATING CONDITIONS	19
4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ	20
4.2.8 TEST RESULTS-ABOVE 1000MHZ	22
5 . BANDWITH TEST	46
5.1 APPLIED PROCEDURES / LIMIT	46
5.1.1 MEASUREMENT INSTRUMENTS LIST	46
5.1.2 TEST PROCEDURE	46
5.1.3 DEVIATION FROM STANDARD	46
5.1.4 TEST SETUP	46
5.1.5 EUT OPERATION CONDITIONS 5.1.6 TEST RESULTS	46 <i>4</i> 7



Table of Contents	Page
6 . PEAK OUTPUT POWER TEST	54
6.1 APPLIED PROCEDURES / LIMIT	54
6.1.1 MEASUREMENT INSTRUMENTS LIST	54
6.1.2 TEST PROCEDURE	54
6.1.3 DEVIATION FROM STANDARD	54
6.1.4 TEST SETUP	54
6.1.5 EUT OPERATION CONDITIONS	54
6.1.6 TEST RESULTS	55
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	56
7.1 APPLIED PROCEDURES / LIMIT	56
7.1.1 MEASUREMENT INSTRUMENTS LIST	56
7.1.2 TEST PROCEDURE	56
7.1.3 DEVIATION FROM STANDARD	56
7.1.4 TEST SETUP	56
7.1.5 EUT OPERATION CONDITIONS	56
7.1.6 TEST RESULTS	57
8 . POWER SPECTRAL DENSITY TEST	69
8.1 APPLIED PROCEDURES / LIMIT	69
8.1.1 MEASUREMENT INSTRUMENTS LIST	69
8.1.2 TEST PROCEDURE	69
8.1.3 DEVIATION FROM STANDARD	69
8.1.4 TEST SETUP	69
8.1.5 EUT OPERATION CONDITIONS	69
8.1.6 TEST RESULTS	70
9 . RF EXPOSURE TEST	77
9.1 APPLIED PROCEDURES / LIMIT	77
9.1.1 MPE CALCULATION METHOD	77
10 FUT TEST PHOTO	78



1. CERTIFICATION

Equipment: mini-PCI radio Module

Brand Name: Doodle Labs Model Name: DLM108-RJT

Applicant: RAJANT CORPORATION
Date of Test: Nov. 19, 2010 ~ Nov. 24, 2010

Standards: FCC Part15, Subpart C / ANCI C63.4: 2003

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-R1011009) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

Report No.: NEI-FCCP-1-R1011009 Page 5 of 80



2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Reference Description		Results				
Transmitter Mode (TX)						
15.207	AC Power Line Conducted Emissions	Compliant				
15.203/15.247(c)	Antenna Requirement	Compliant				
15.247(a)	6dB Occupied Bandw	Compliant				
15.247(b)	Maximum Peak Conducted Output Power	Compliant				
15.247(d), 15.205, 15.209	Spurious Radiated and Conducted Emissions	Compliant				
15.247(e)	Peak Power Spectral Density and RF Exposure	Compliant				

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Report No.: NEI-FCCP-1-R1011009 Page 6 of 80

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

C03: (VCCI RN: T-1667)

B1, No. 37, Lane 365, YangGuang St., NeiHu District 114, Taipei, Taiwan.

CB08: (VCCI RN: G-91; FCC RN: 614388; IC Assigned Code: 4428C-1)

1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $\mathbf{y} \pm \mathbf{U}$, where expended uncertainty \mathbf{U} is based on a standard uncertainty multiplied by a coverage factor of $\mathbf{k=2}$, providing a level of confidence of approximately $\mathbf{95}\%$ \circ

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U,(dB)	NOTE
C03	ANSI	150 KHz ~ 30MHz	1.94	

B. Radiated Measurement:

Test Site	Item	Measurement	Frequency Range	Uncertainty	NOTE											
			30 - 200MHz	3.35 dB												
	Radiated Emission at 3m	Horizontal	200 - 1000MHz	3.11 dB												
		Polarization	1 - 18GHz	3.97 dB												
CDO		Emission at	Emission at		18 - 40GHz	4.01 dB										
CBUO						30 - 200MHz	3.22 dB									
					3111	3111	3111	OIII	3111	Jili	3111	5111	3111	3111	5111	Vertical
		Polarization	1 - 18GHz	4.05 dB												
			18 - 40GHz	4.04 dB												

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our U_{lab} values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called U_{CISPR} , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our U_{lab} values are smaller than U_{CISPR} .



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	mini-PCI radio Module			
Brand Name	Doodle Labs			
Model Name	DLM108-RJT			
OEM Brand/Model Name	N/A			
Model Difference	N/A			
	The EUT is a mini-PCI	radio Module.		
	Operation Frequency:	907~922 MHz		
	Modulation Type:	DSSS/BPSK		
	Bit Rate of Transmitter:			
		11/5.5/2/1 Mbps		
		11g:		
		54/48/36/24/18/12/9/6 Mbps		
	Channel Bandwidth	5/10/20M		
Product Description	Number Of Channel:	Please see Note 2.		
	Antenna Designation:	+		
		Please see Note 3.		
	Output Power(Max):	11b: 29.14dBm (Max.)		
		11g: 29.70dBm (Max.)		
		on, features, or specification		
	exhibited in User's Manual, the EUT is considered as an			
	ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.			
D 0				
Power Source	Supplied from miniPCI Slot.			
Power Rating	N/A			
Connecting I/O Port(s)	Please refer to the Use	er's Manual		
Products Covered	Antenna: Please refer	to the Note 3.		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2

Channel List				
Channel	Frequency (MHz)			
01	907			
02	912			
03	917			
04	922			

3. Table for Filed Antenna

Ar	nt.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)				
1	1	Pacific Wireless	OD9-5	Omni Directional	N Female	5				

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Test Mode	TX	RX	Description
Mode 1	٧		907MHz
Mode 2	٧		912MHz
Mode 3	٧		917MHz
Mode 4	٧		922MHz


For Final Conducted Test				
Final Test Mode	TX	RX	Description	
Mode 1	٧		TX	

For Final Radiated Test < 1GHz					
Final Test Mode	TX	RX	Description		
Mode 1	٧		917MHz		

For Final Radiated Test > 1GHz					
Final Test Mode	TX	RX	Description		
Mode 1	٧		907MHz		
Mode 2	٧		912MHz		
Mode 3	٧		917MHz		
Mode 4	٧		922MHz		

Report No.: NEI-FCCP-1-R1011009 Page 10 of 80

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

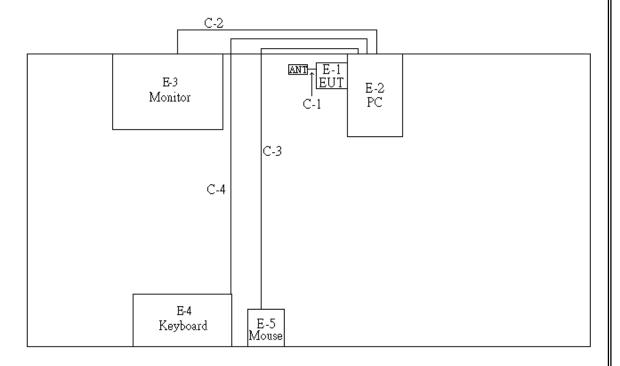



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	mini-PCI radio Module	Doodle Labs	DLM108-RJT	VJA-DLM108RJT	N/A	EUT
E-2	PC	HP	HP Compaq dx7400 MT	DOC	SGH7480DKZ	
E-3	22" LCD TV Monitor	BenQ	ET-0026-NA	DOC	ETE6902198026	
E-4	USB K/B	DELL	SK-8115	DOC	E145614	
E-5	PS/2 Mouse	Logitech	M-SBF69	DOC	HCA44601156	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	0.2M	ANT cable
C-2	YES	YES	1.8M	Monitor D-SUB cable
C-3	YES	YES	1.7M	Mouse USB cable
C-4	YES	YES	2M	Keyboard USB cable

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in <code>[Length]</code> column.



4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A	(dBuV)	Class B (dBuV)		
TREQUENCT (WITZ)	Quasi-peak	Average	Quasi-peak	Average	
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *	
0.50 -5.0	73.00	60.00	56.00	46.00	
5.0 -30.0	73.00	60.00	60.00	50.00	

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

4.1.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TWO-LINE V-NETWORK	R&S	ENV216	101050	Jun. 07, 2011
2	TWO-LINE V-NETWORK	R&S	ENV216	101051	Jun. 07, 2011
3	Test Cable	TIMES	CFD300-NL	130	Jun. 17, 2011
4	EMI Test Receiver	R&S	ESCI	100080	Mar. 10, 2011

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.




4.1.3 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

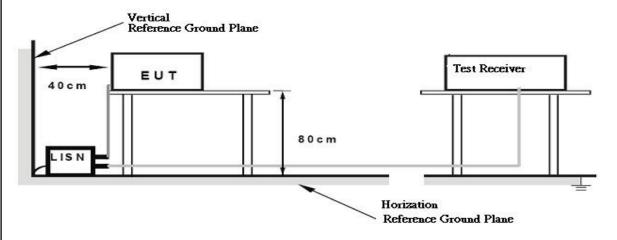

4.1.6 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.


4.1.7 TEST RESULTS

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	43%
Test Voltage:	AC 120V/60Hz		
Test Mode :	TX	_	

Freq.	Terminal	Reading Le	evel(dBuV)	Correct	Measurem	ent(dBuV)	Limit(dBuV)	Margin	Note
(MHz)	L/N	QP-Mode	AV-Mode	Factor(dB)	QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dB)	Note
0.1507	Line	43.85	*	9.69	53.54	*	65.96	55.96	-12.42	(QP)
0.2200	Line	39.30	*	9.69	48.99	*	62.82	52.82	-13.83	(QP)
0.3026	Line	35.11	*	9.69	44.80	*	60.17	50.17	-15.37	(QP)
0.4643	Line	34.19	*	9.69	43.88	*	56.62	46.62	-12.74	(QP)
0.9770	Line	33.81	*	9.79	43.60	*	56.00	46.00	-12.40	(QP)
1.5800	Line	31.87	*	9.74	41.61	*	56.00	46.00	-14.39	(QP)

Remark

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.2 sec./MHz∘ Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.2 sec./MHz∘
- (2) All readings are QP Mode value unless otherwise stated AVG in column of <code>『Note』</code>. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform ∘ In this case, a " * " marked in AVG Mode column of Interference Voltage Measured ∘
- (3) Measuring frequency range from 150KHz to 30MHz •

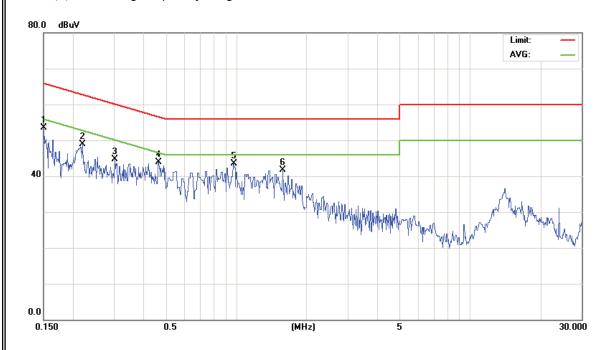




EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT		
Temperature:	24°C	Relative Humidity:	43%		
Test Voltage:	AC 120V/60Hz				
Test Mode :	TX				

Freq.	Terminal	Reading Le	evel(dBuV)	Correct	Measurem	ent(dBuV)	Limit(dBuV)	Margin	Note
(MHz)	L/N	QP-Mode	AV-Mode	Factor(dB)	QP-Mode	AV-Mode	QP-Mode	AV-Mode	(dB)	NOTE
0.1527	Neutral	42.70	*	9.68	52.38	*	65.85	55.85	-13.47	(QP)
0.2353	Neutral	38.28	*	9.68	47.96	*	62.26	52.26	-14.30	(QP)
0.3669	Neutral	36.62	*	9.68	46.30	*	58.57	48.57	-12.27	(QP)
0.4901	Neutral	33.89	*	9.68	43.57	*	56.17	46.17	-12.60	(QP)
1.0759	Neutral	34.01	*	9.77	43.78	*	56.00	46.00	-12.22	(QP)
13.8500	Neutral	26.41	*	9.87	36.28	*	60.00	50.00	-23.72	(QP)

- (1) Reading in which marked as QP means measurements by using are Quasi-Peak Mode with Detector BW=9KHz; SPA setting in RBW=10KHz,VBW =10KHz, Swp. Time = 0.2 sec./MHz ∘ Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW=10KHz,VBW=10KHz, Swp. Time =0.2 sec./MHz ∘
- (2) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』. If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform ∘ In this case, a " * " marked in AVG Mode column of Interference Voltage Measured ∘
- (3) Measuring frequency range from 150KHz to 30MHz •

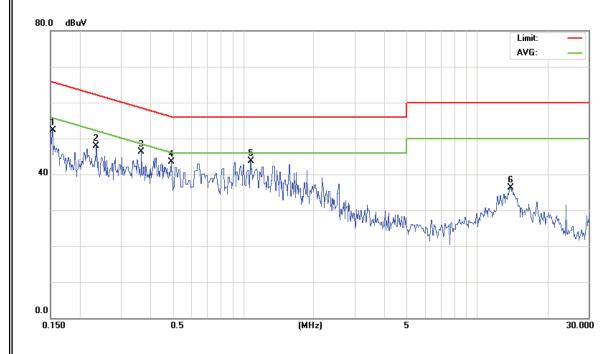



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies	Field Strength	Measurement Distance
(MHz)	(micorvolts/meter)	(meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class A (dBu	ıV/m) (at 3m)	Class B (dBuV/m) (at 3m)		
PREQUENCY (MHZ)	PEAK	AVERAGE	PEAK	AVERAGE	
Above 1000	80	60	74	54	

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15B.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).



4.2.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Dec. 15, 2010
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 20, 2011
4	Microflex Cable	N/A	N/A	1m	May. 19, 2011
5	Microflex Cable	AISI	S104-SMAP-1	10m	Aug. 22, 2011
6	Microflex Cable	N/A	N/A	3m	Aug. 22, 2011
7	Test Cable	N/A	LMR-400	966_12m	Jun. 17, 2011
8	Test Cable	N/A	LMR-400	966_3m	Jun. 17, 2011
9	Pre-Amplifier	EMC	EMC-330	980001	Jun. 03, 2011
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 17, 2011

Remark: "N/A" denotes No Model Name / Serial No. and No Calibration specified.

4.2.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4-2003 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW / VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

(A) Radiated Emission Test Set-Up, Frequency Below 1000MHz

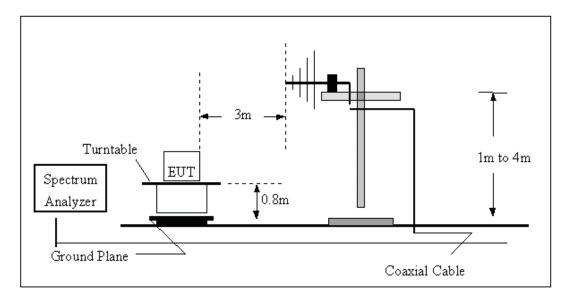

(B) Radiated Emission Test Set-UP Frequency Over 1 GHz

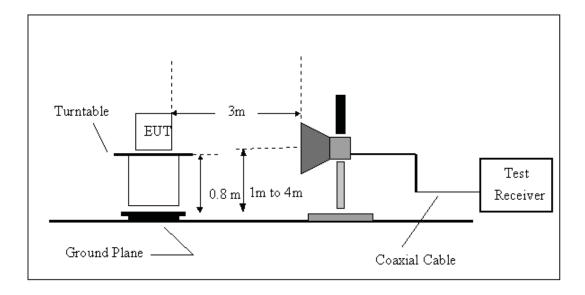

4.2.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **4.1.6** Unless otherwise a special operating condition is specified in the follows during the testing.


4.2.7 TEST RESULTS-BETWEEN 30MHZ - 1000MHZ

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT			
Temperature:	24°C	Relative Humidity:	51%			
Test Voltage:	AC 120V/60Hz					
Test Mode :	TX 917MHz					

Freq.	Ant.	Reading(RA)	Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note
(MHz)	H/V	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Note
185.20	V	28.62	12.59	41.21	43.50	- 2.29	
233.70	V	31.30	12.88	44.18	46.00	- 1.82	
332.64	V	23.44	16.12	39.56	46.00	- 6.44	
464.56	V	22.85	19.33	42.18	46.00	- 3.82	
522.76	V	22.10	20.33	42.43	46.00	- 3.57	
580.96	V	22.24	21.57	43.81	46.00	- 2.19	

Remark:


- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of ${}^{\mathbb{F}}$ Note ${}_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ${}^{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

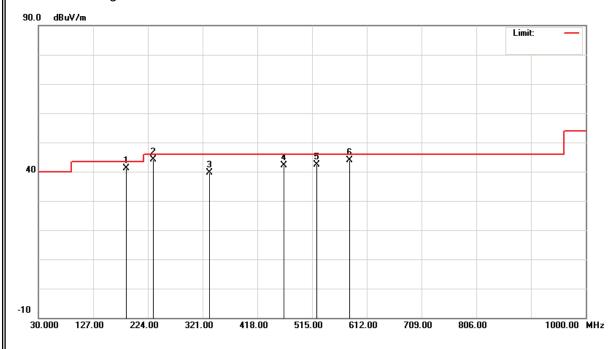

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage:	AC 120V/60Hz		
Test Mode :	TX 917MHz		

Freq.	Ant.	Reading(RA)	Corr.Factor(CF)	Measured(FS)	Limits(QP)	Margin	Note
(MHz)	H/V	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	Note
144.46	Ι	26.91	14.50	41.41	43.50	- 2.09	
266.68	Η	29.61	14.26	43.87	46.00	- 2.13	
340.40	Н	27.63	16.31	43.94	46.00	- 2.06	
423.82	Η	25.18	18.38	43.56	46.00	- 2.44	
466.50	Н	23.81	19.37	43.18	46.00	- 2.82	
563.50	Η	22.63	21.14	43.77	46.00	- 2.23	

- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of \lceil Note $_{
 m l}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{
 m o}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (4) Radiated emissions measured in frequency range from 30 MHz to 1000 MHz were made with an instrument using Peak detector mode or QP detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

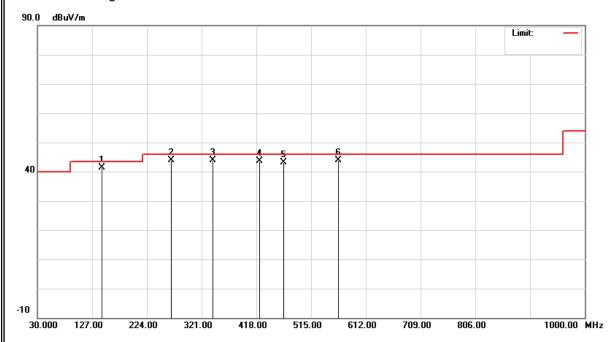


4.2.8 TEST RESULTS-ABOVE 1000MHZ

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 907MHz_11G 5MHz		

Freq.	Ant.Pol.	Read	ling	Ant./CF	A	ct.	Lir	mit	
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1813.84	V	75.80	*	-5.15	70.65	*	74.00	54.00	X/H
2720.20	V	59.90	39.65	-2.48	57.42	37.17	74.00	54.00	X/H
1813.76	Н	60.37	*	-5.15	55.22	*	74.00	54.00	X/H
2719.88	Н	54.22	35.90	-2.48	51.74	33.42	74.00	54.00	X/H

Remark:

- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission o
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

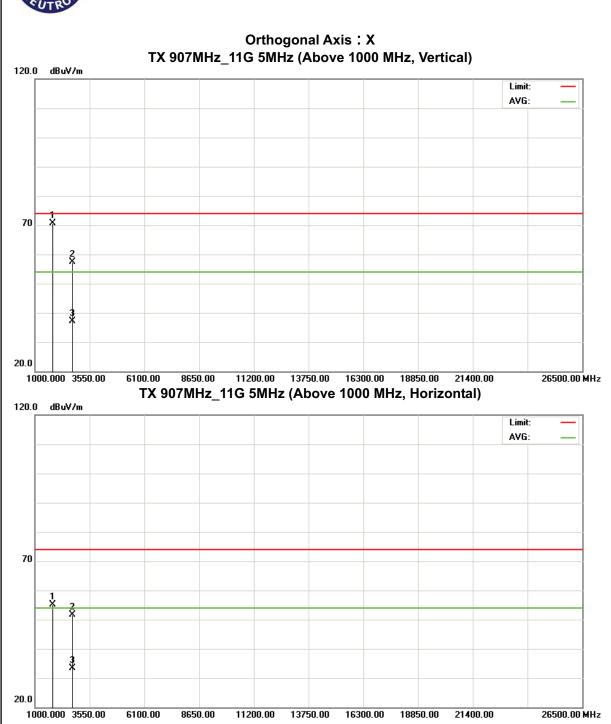

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 907MHz_11G 10MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Lir		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1809.34	V	66.72	*	-5.16	61.56	*	74.00	54.00	X/H
2417.76	V	54.80	37.20	-2.48	52.32	34.72	74.00	54.00	X/H
1811.80	Н	61.33	*	-5.16	56.17	*	74.00	54.00	X/H
2718.60	Н	64.62	44.65	-2.48	62.14	42.17	74.00	54.00	X/H

- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of Fr denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 912MHz_11B 20MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Lir		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1823.95	V	73.50	*	-5.13	68.37	*	74.00	54.00	X/H
2740.66	V	58.85	54.74	-2.50	56.35	52.24	74.00	54.00	X/H
1823.93	Н	58.44	*	-5.13	53.31	*	74.00	54.00	X/H
2740.64	Н	55.58	50.86	-2.50	53.08	48.36	74.00	54.00	X/H


- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 912MHz_11G 5MHz		

Freq.	Ant.Pol.	Read	ling	Ant./CF	A	ct.	Lir	mit	
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1824.04	V	73.61	*	-5.13	68.48	*	74.00	54.00	X/H
2736.56	V	56.69	38.84	-2.50	54.19	36.34	74.00	54.00	X/H
1824.28	Н	55.98	*	-5.13	50.85	*	74.00	54.00	X/H
2736.92	Н	51.96	35.04	-2.50	49.46	32.54	74.00	54.00	X/H

- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of Fr denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

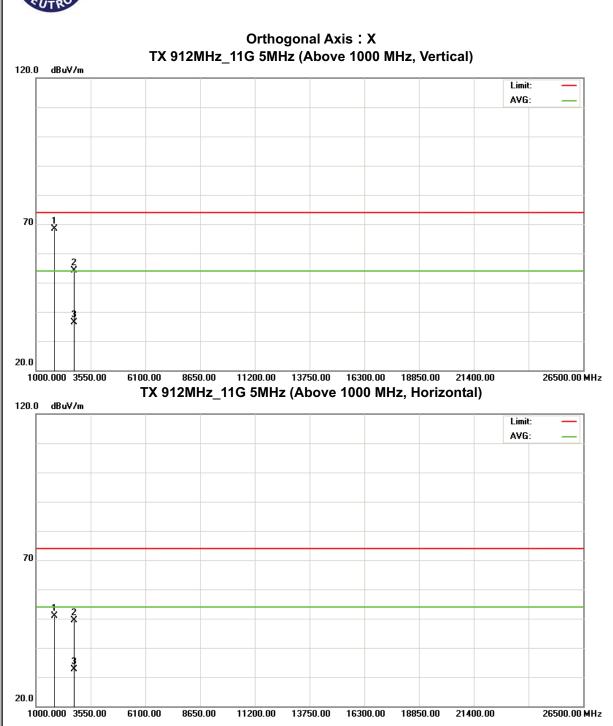




EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 912MHz_11G 10MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1824.40	V	71.68	*	-5.13	66.55	*	74.00	54.00	X/H
2739.34	V	51.70	35.39	-2.50	49.20	32.89	74.00	54.00	X/H
1823.56	Н	56.31	*	-5.13	51.18	*	74.00	54.00	X/H
2738.60	Н	48.52	33.77	-2.50	46.02	31.27	74.00	54.00	X/H

- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

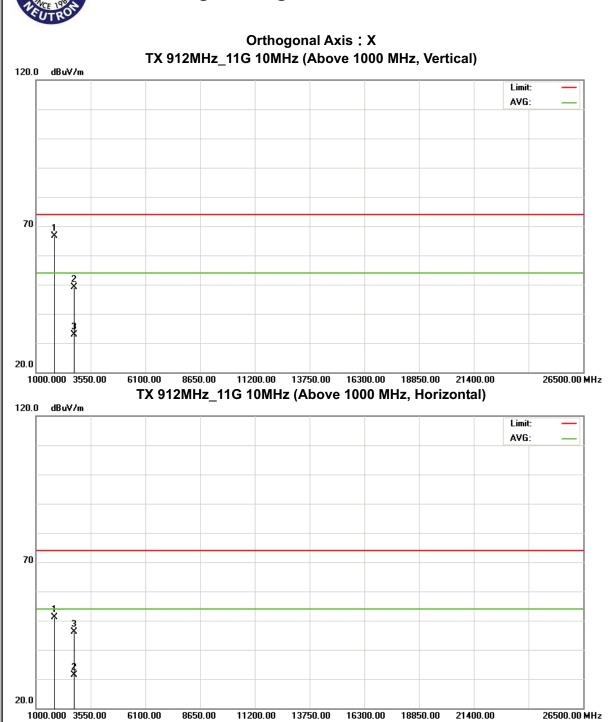




EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 912MHz_11G 20MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1823.70	V	68.00	*	-5.13	62.87	*	74.00	54.00	X/H
2741.10	V	49.95	37.04	-2.50	47.45	34.54	74.00	54.00	X/H
1823.00	Н	54.19	*	-5.13	49.06	*	74.00	54.00	X/H
2740.60	Н	45.79	33.37	-2.50	43.29	30.87	74.00	54.00	X/H


- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of Fr denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

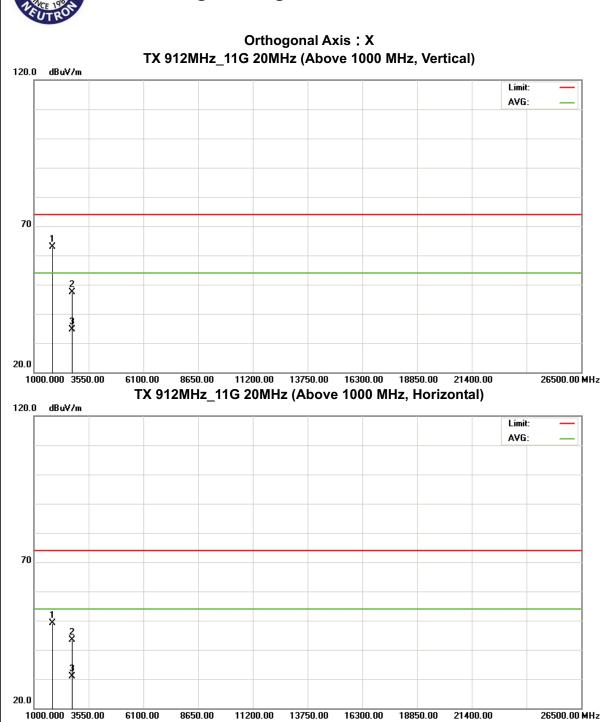

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 917MHz_11B 20MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Ad	Act.		Limit	
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1833.96	V	71.64	*	-5.11	66.53	*	74.00	54.00	X/H
2751.64	V	60.25	55.00	-2.51	57.74	52.49	74.00	54.00	X/H
1833.96	Н	58.47	*	-5.11	53.36	*	74.00	54.00	X/H
2751.68	Н	56.91	51.36	-2.51	54.40	48.85	74.00	54.00	X/H

- (1) Spectrum Setting : 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission o
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

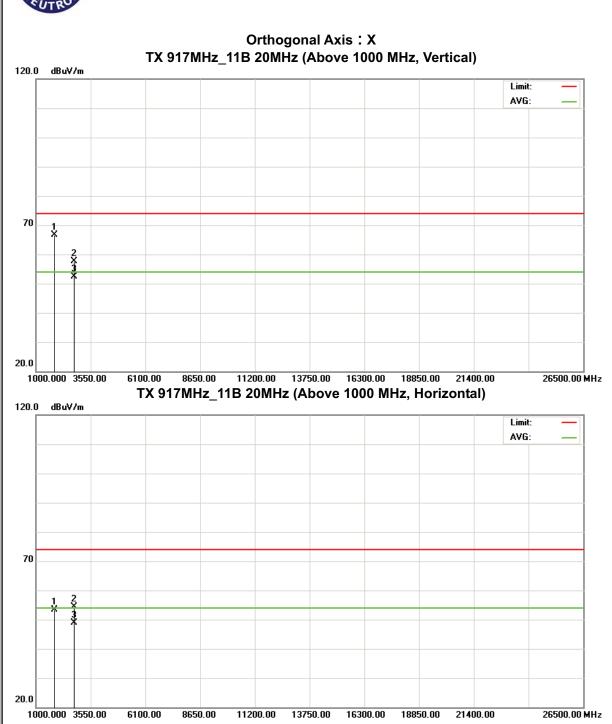




EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 917MHz_11G 5MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1834.32	V	73.92	*	-5.10	68.82	*	74.00	54.00	X/H
2751.52	V	57.24	38.45	-2.51	54.73	35.94	74.00	54.00	X/H
1834.24	Н	57.67	*	-5.10	52.57	*	74.00	54.00	X/H
2751.68	Н	49.04	33.13	-2.51	46.53	30.62	74.00	54.00	X/H

- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of Fr denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

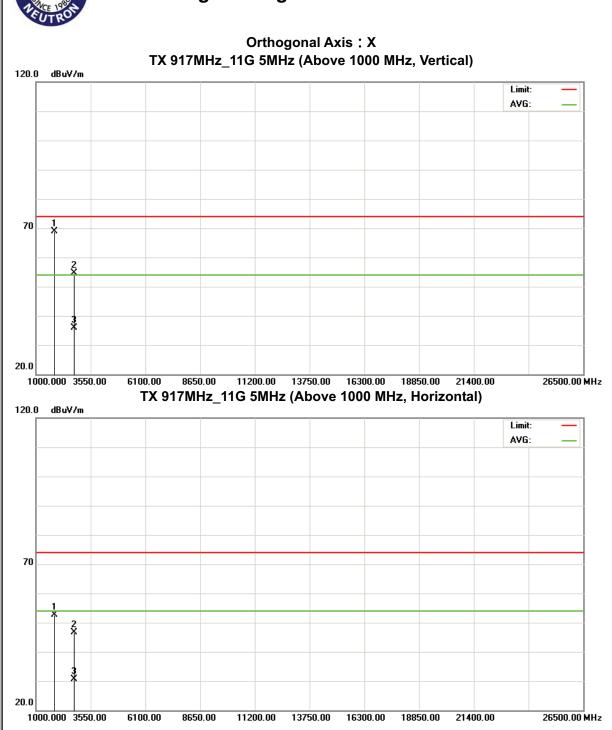



EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage:	AC 120V/60Hz		
Test Mode :	TX 917MHz_11G 10MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1835.48	V	71.83	*	-5.10	66.73	*	74.00	54.00	X/H
2752.20	V	54.26	37.18	-2.51	51.75	34.67	74.00	54.00	X/H
1834.32	Н	58.03	*	-5.10	52.93	*	74.00	54.00	X/H
2752.04	Н	50.55	35.08	-2.51	48.04	32.57	74.00	54.00	X/H


- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.



EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 917MHz_11G 20MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1835.90	V	66.89	*	-5.10	61.79	*	74.00	54.00	X/H
2751.60	V	48.67	36.60	-2.51	46.16	34.09	74.00	54.00	X/H
1837.10	Н	54.40	*	-5.10	49.30	*	74.00	54.00	X/H
2750.20	Н	42.82	32.48	-2.51	40.31	29.97	74.00	54.00	X/H

- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of Fr denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

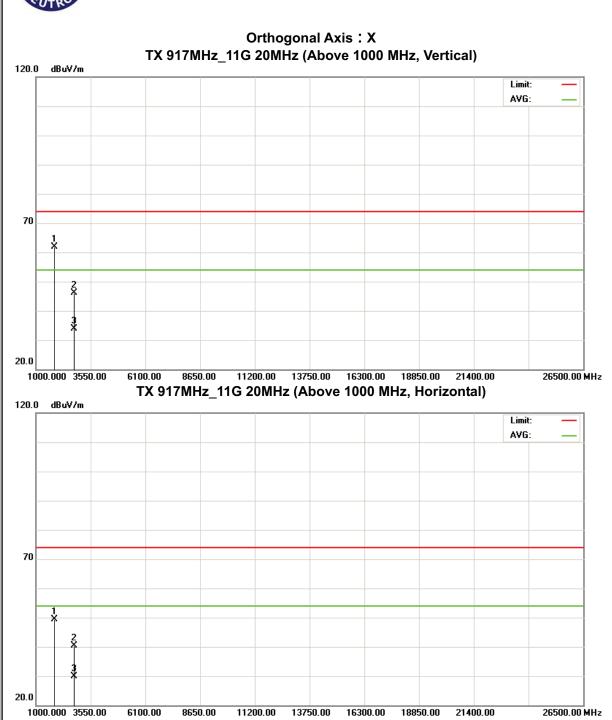




EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage:	AC 120V/60Hz		
Test Mode :	TX 922MHz_11G 5MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1843.44	V	75.31	*	-5.08	70.23	*	74.00	54.00	X/H
2764.68	V	56.88	34.32	-2.53	54.35	31.79	74.00	54.00	X/H
1843.52	Н	58.56	*	-5.08	53.48	*	74.00	54.00	X/H
2764.52	Н	47.92	32.52	-2.23	45.69	30.29	74.00	54.00	X/H


- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission o
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

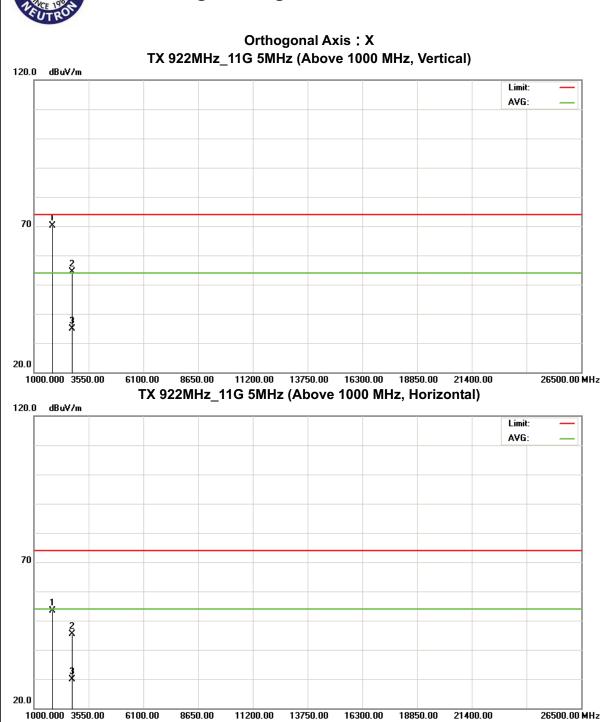

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage :	AC 120V/60Hz		
Test Mode :	TX 922MHz_11G 10MHz		

Freq.	Ant.Pol.	Reading		Ant./CF	Act.		Limit		
		Peak	AV		Peak	AV	Peak	AV	Note
(MHz)	H/V	(dBuV)	(dBuV)	CF(dB)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	
1839.36	V	75.23	*	-5.09	70.14	*	74.00	54.00	X/H
2761.44	V	52.21	35.15	-2.52	49.69	32.63	74.00	54.00	X/H
1837.00	Н	56.18	*	-5.10	51.08	*	74.00	54.00	X/H
2756.88	Н	50.03	32.71	-2.22	47.81	30.49	74.00	54.00	X/H

- (1) Spectrum Setting: 30MHz 1000MHz, RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = Auto
- (2) All readings are Peak unless otherwise stated QP in column of $^{\mathbb{F}}$ Note $_{\mathbb{J}}$. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform $_{\circ}$
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency of Fr denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission \circ
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes:
 - "X" denotes Laid on Table; "Y" denotes Vertical Stand; "Z" denotes Side Stand
- (8) During the measurements above 1GHz it is taken care of that the EUT is always within the 3dB cone of radiation BW of the used antenna.

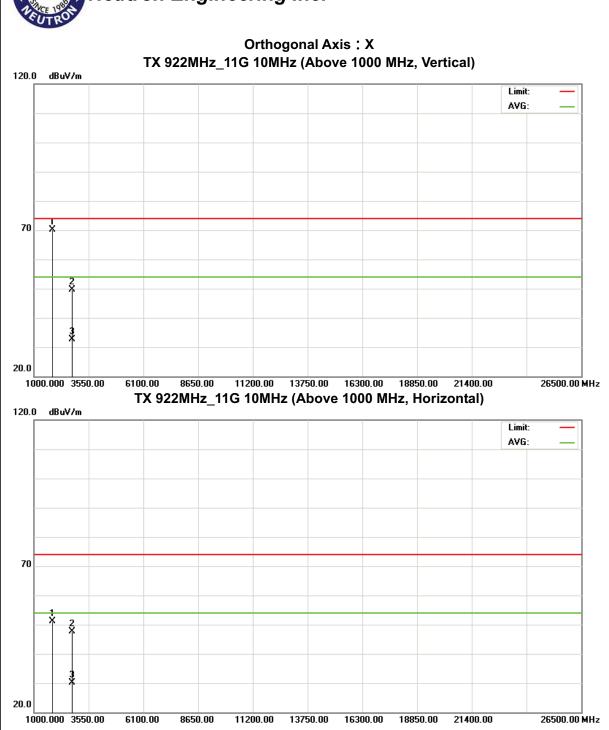



5. BANDWITH TEST

5.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C								
Test Item Limit Frequency Range (MHz) Result								
Bandwidth	>= 500KHz (6dB bandwidth)	2400-2483.5	PASS					

5.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

5.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

5.1.3 DEVIATION FROM STANDARD

No deviation.

5.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

5.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing. Chip antenna measurement result.

Report No.: NEI-FCCP-1-R1011009 Page 46 of 80



5.1.6 TEST RESULTS

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT			
Temperature:	24°C	Relative Humidity:	51%			
Test Voltage:	AC 120V/60Hz	C 120V/60Hz				
Test Mode :	TX 907MHz/912MHz/917MHz/9	X 907MHz/912MHz/917MHz/922MHz				

Configuration (11B 20MHz)					
Frequency Bandwidth 99% Occupied LIMIT (MHz) (MHz) Test Result					
912MHz	12.08	16.04	>=500KHz	Compliant	
917MHz	9.00	14.40	>=500KHz	Compliant	


	Configuration (11G 5MHz)					
Frequency (MHz)	Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	LIMIT (MHz)	Test Result		
907MHz	4.08	4.24	>=500KHz	Compliant		
912MHz	4.16	4.24	>=500KHz	Compliant		
917MHz	4.12	4.20	>=500KHz	Compliant		
922MHz	4.12	4.24	>=500KHz	Compliant		


	Configuration (11G 10MHz)					
Frequency (MHz)	Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	LIMIT (MHz)	Test Result		
907MHz	8.16	8.32	>=500KHz	Compliant		
912MHz	8.24	8.40	>=500KHz	Compliant		
917MHz	8.08	8.20	>=500KHz	Compliant		
922MHz	5.40	8.24	>=500KHz	Compliant		


Configuration (11G 20MHz)					
Frequency Bandwidth 99% Occupied LIMIT (MHz) (MHz) Test Result					
912MHz	16.40	16.60	>=500KHz	Compliant	
917MHz	12.56	16.24	>=500KHz	Compliant	


Report No.: NEI-FCCP-1-R1011009 Page 47 of 80


Configuration (11B 20MHz) 912MHz

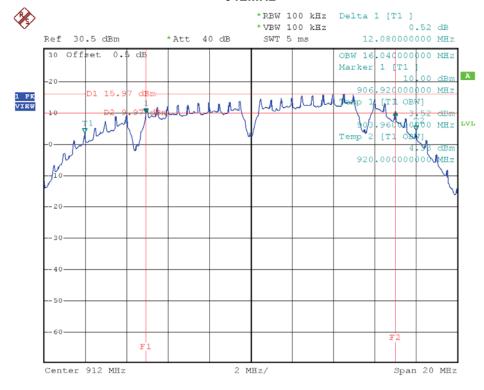

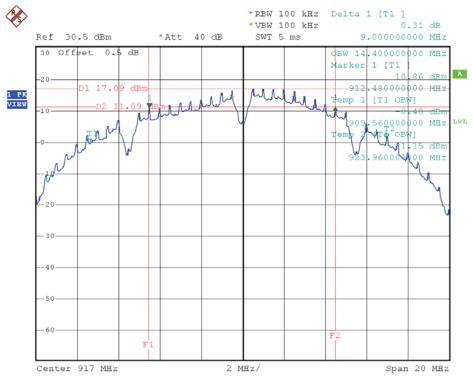





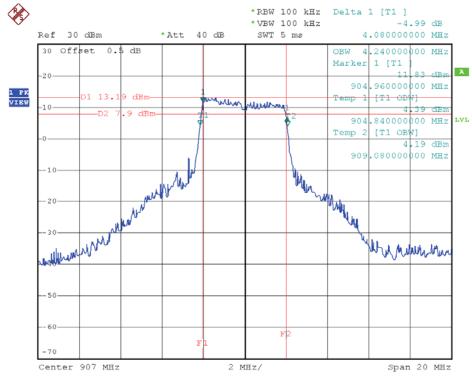

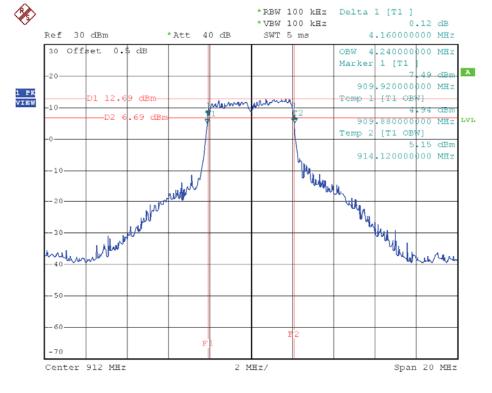

Configuration (11G 5MHz) 917MHz

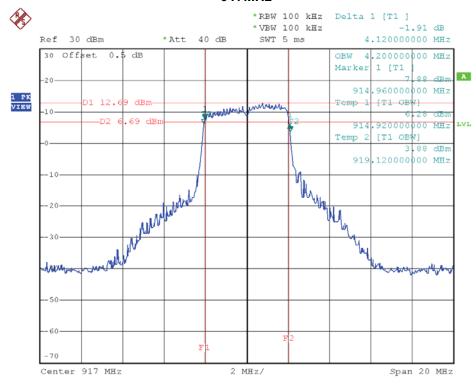

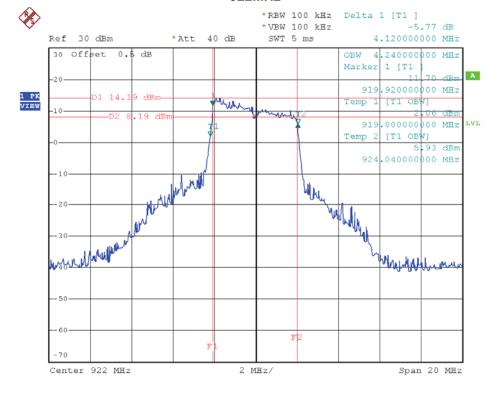



2 MHz/

Center 912 MHz


Span 20 MHz


Configuration (11G 10MHz) 917MHz

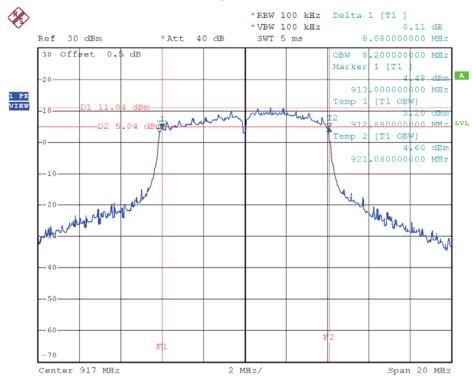

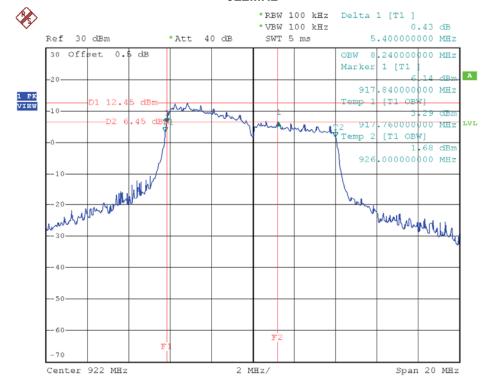

Configuration (11G 20MHz) 912MHz

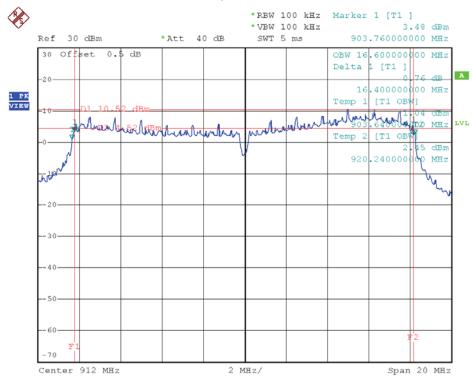

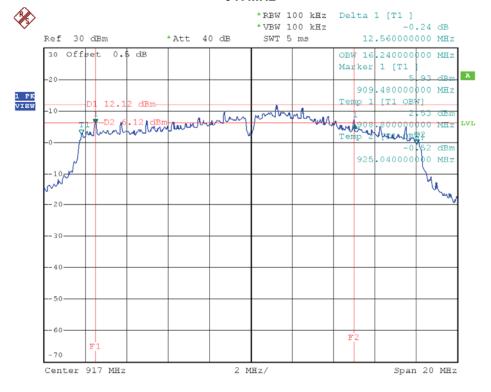



6. PEAK OUTPUT POWER TEST

6.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C				
Test Item Limit Frequency Range (MHz) Result				
Peak Output Power 1 watt or 30dBm		2400-2483.5	PASS	

6.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	Anritsu	ML2487A	6K00004714	Feb. 10, 2011
2	Power Meter Sensor	Anritsu	MA2491A	34138	Feb. 10, 2011

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

6.1.2 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,

6.1.3 DEVIATION FROM STANDARD

No deviation.

6.1.4 TEST SETUP

EUT Power Meter

6.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing. Chip antenna measurement result.

6.1.6 TEST RESULTS

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT		
Temperature:	24°C	Relative Humidity:	51%		
Test Voltage:	AC 120V/60Hz				
Test Mode :	TX 907MHz/912MHz/917MHz/922MHz				

Configuration (11B 20MHz)				
Frequency Peak Output Power LIMIT LIMIT Test Result (MHz) (dBm) (W)				
912MHz	29.14	30	1	Compliant
917MHz	28.26	30	1	Compliant

	Configuration (11G 5MHz)					
Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)	Test Result		
907MHz	28.92	30	1	Compliant		
912MHz	28.89	30	1	Compliant		
917MHz	28.75	30	1	Compliant		
922MHz	28.90	30	1	Compliant		

Configuration (11G 10MHz)					
Frequency (MHz)	Peak Output Power (dBm)	LIMIT (dBm)	LIMIT (W)	Test Result	
907MHz	29.70	30	1	Compliant	
912MHz	29.20	30	1	Compliant	
917MHz	29.01	30	1	Compliant	
922MHz	29.60	30	1	Compliant	

Configuration (11G 20MHz)				
Frequency Peak Output Power LIMIT LIMIT Test Result (MHz) (dBm) (W)				
912MHz	29.31	30	1	Compliant
917MHz	29.35	30	1	Compliant

Remark:

- (1) The test requirement, RF conducted output power shall measure each transmitter chain by using channel power method.
- (2) Total Antenna Gain=5 dBi (Please refer to the Page 9 of 80.).



7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C					
Test Item	Limit	Frequency Range (MHz)	Result		
Antenna conducted Spurious Emission	20dB less than the peak value of fundamental frequency	30-25000	PASS		

7.1.1 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

7.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

7.1.3 DEVIATION FROM STANDARD

No deviation.

7.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

7.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing. Chip antenna measurement result.


Report No.: NEI-FCCP-1-R1011009 Page 56 of 80




7.1.6 TEST RESULTS


EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24 ° C	Relative Humidity:	51%
Test Voltage:	AC 120V/60Hz		
Test Mode :	TX 907MHz/912MHz/917MHz/922MHz		


Configuration (11B 20MHz) 912MHz AVERAGE-LO

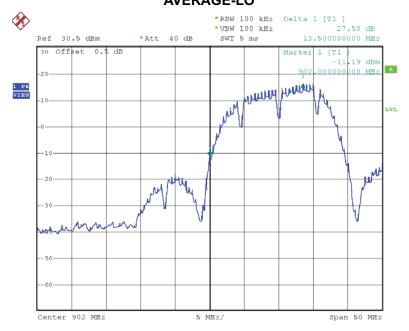

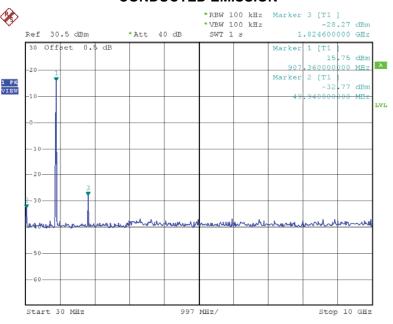



Configuration (11B 20MHz) 917MHz AVERAGE-UP

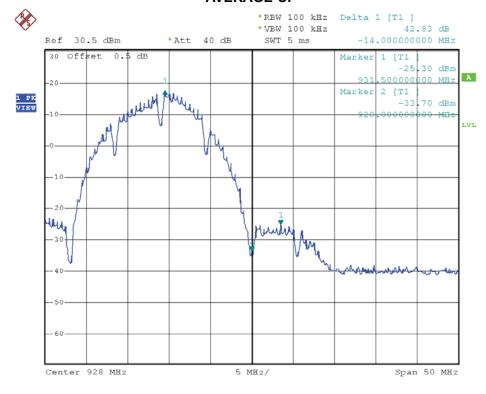

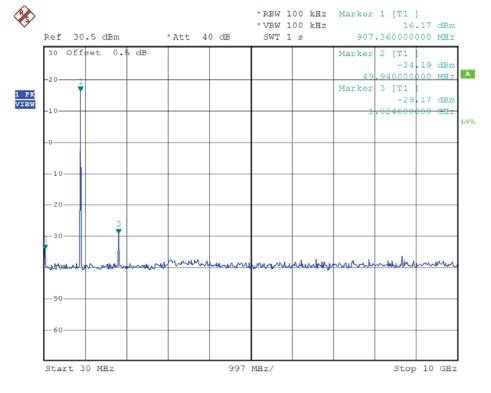



Configuration (11G 5MHz) 907MHz AVERAGE-LO

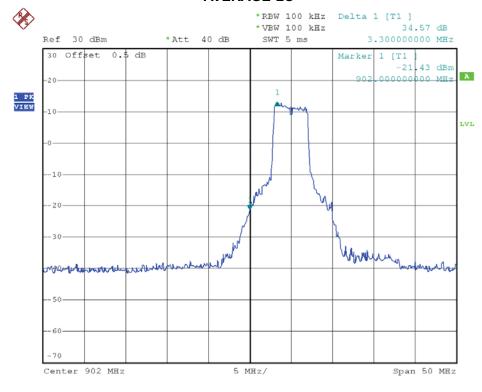

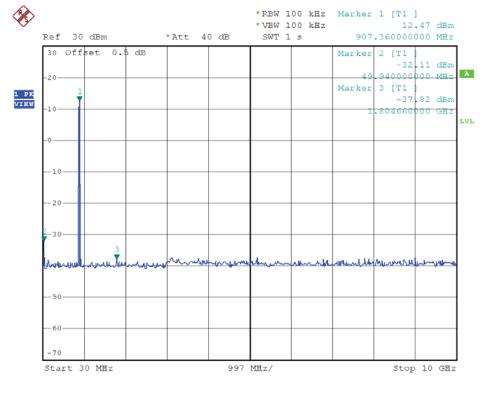



Configuration (11G 5MHz) 912MHz AVERAGE-LO

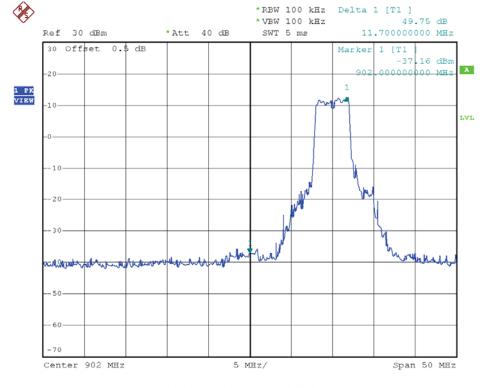

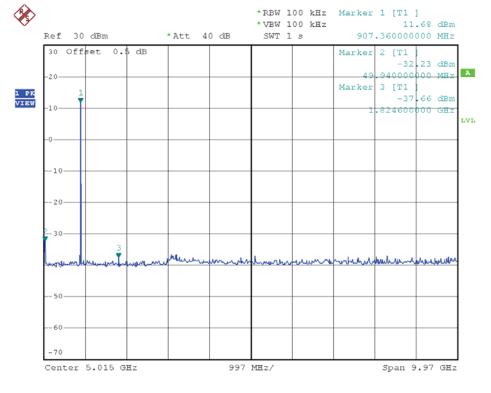



Configuration (11G 5MHz) 917MHz AVERAGE-UP

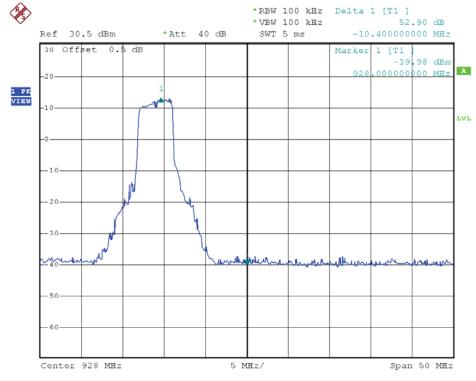

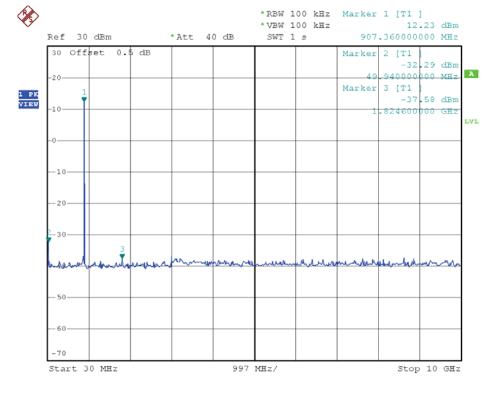



Configuration (11G 5MHz) 922MHz AVERAGE-UP

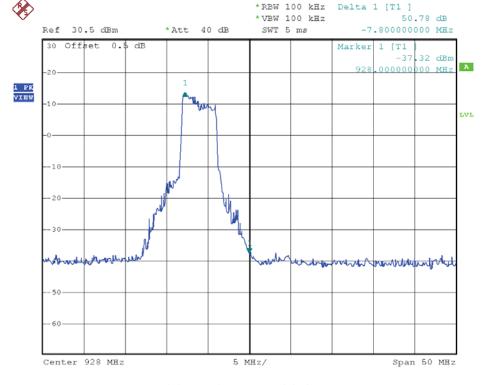

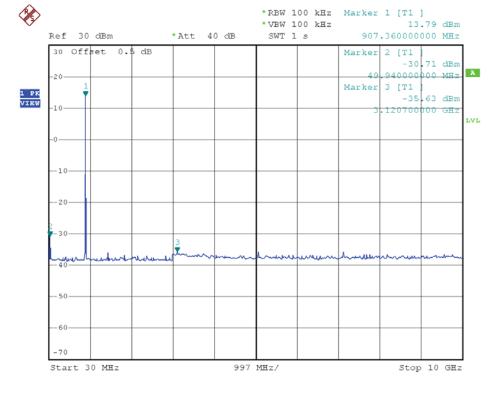



Configuration (11G 10MHz) 907MHz AVERAGE-LO

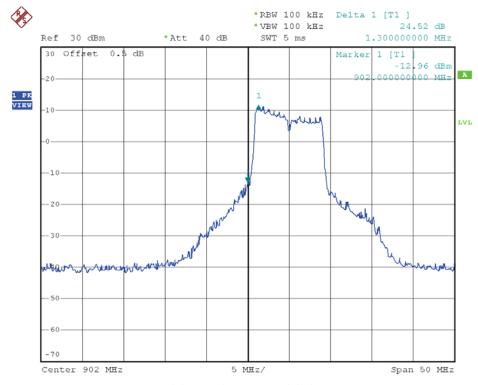

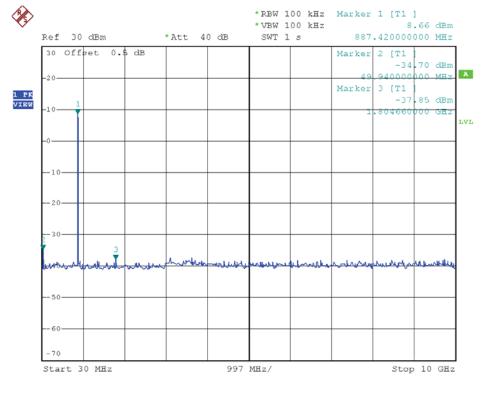



Configuration (11G 10MHz) 912MHz AVERAGE-LO

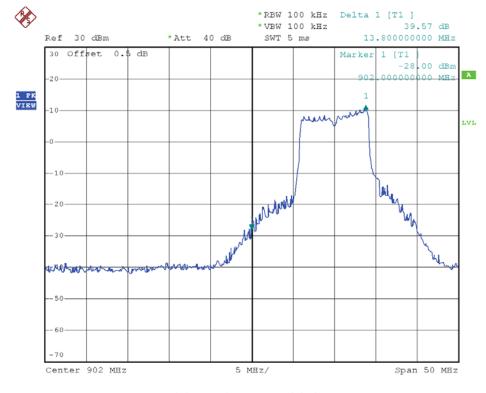

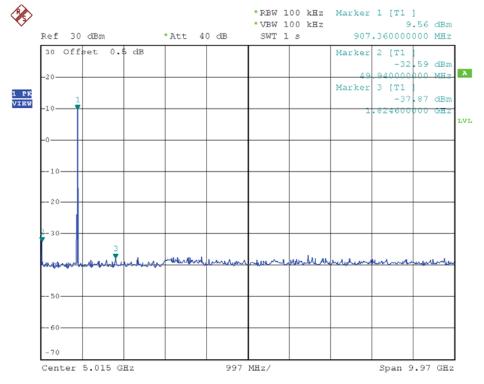



Configuration (11G 10MHz) 917MHz AVERAGE-UP

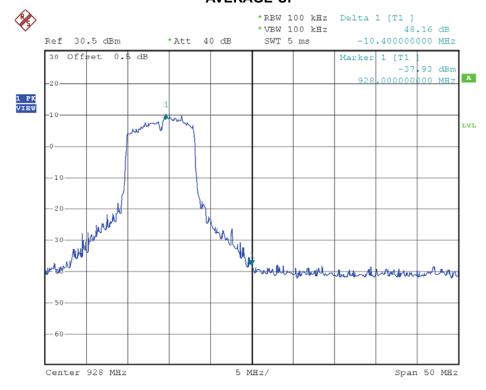

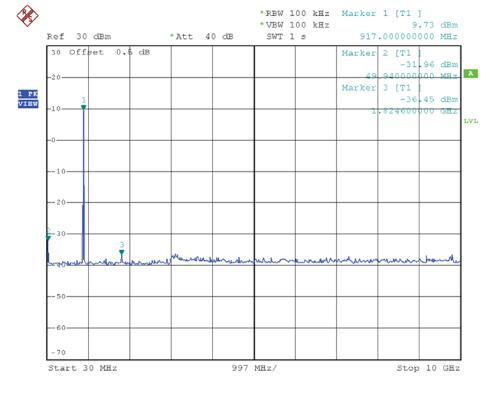



Configuration (11G 10MHz) 922MHz AVERAGE-UP

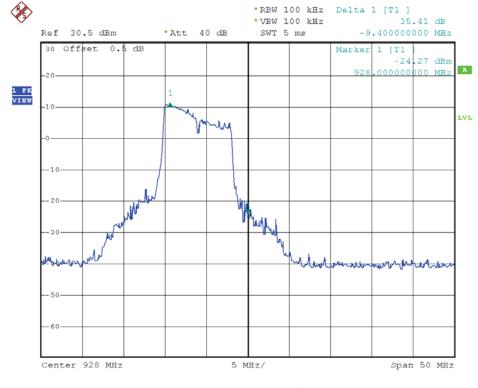

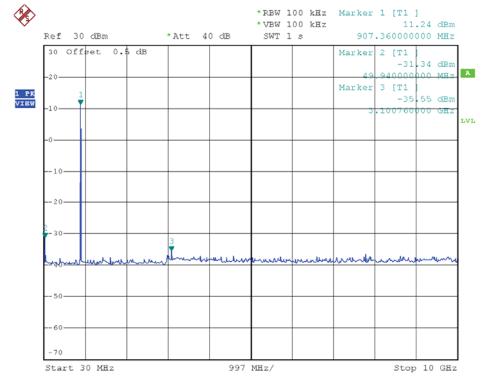



Configuration (11G 20MHz) 912MHz AVERAGE-LO

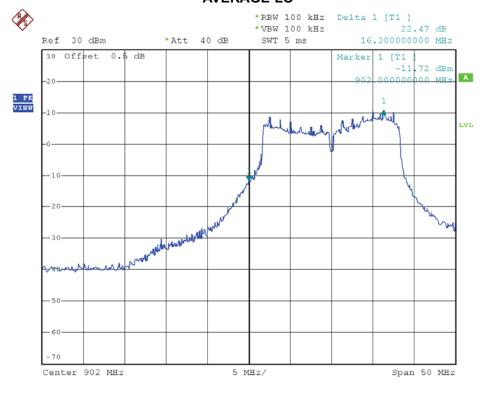

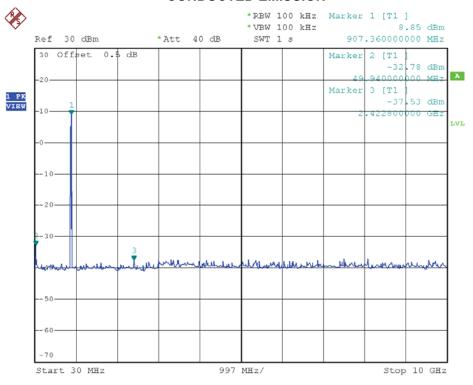

Configuration (11G 20MHz) 917MHz AVERAGE-UP

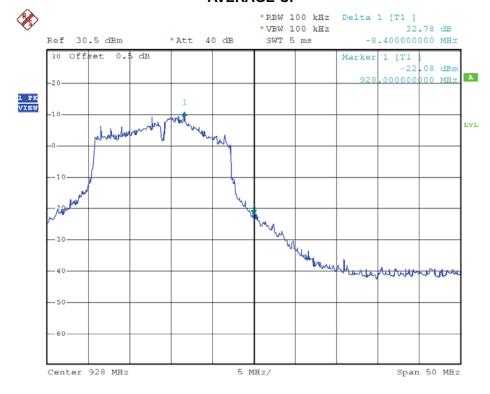

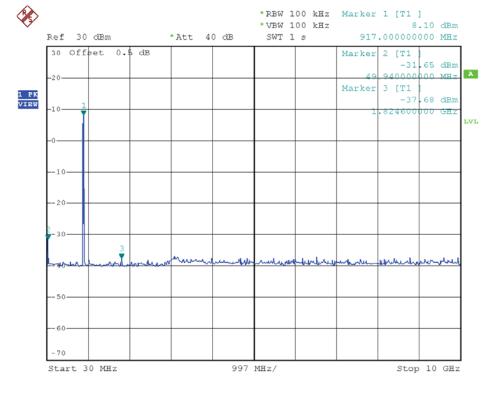



8. POWER SPECTRAL DENSITY TEST

8.1 APPLIED PROCEDURES / LIMIT

FCC Part15, Subpart C			
Test Item	Limit	Frequency Range (MHz)	Result
Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 MEASUREMENT INSTRUMENTS LIST

Iten	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Aug. 31, 2011

Remark: "N/A" denotes No Model Name, Serial No. or No Calibration specified.

8.1.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting: RBW=3KHz, VBW=30KHz, Sweep time = 500s.

8.1.3 DEVIATION FROM STANDARD

No deviation.

8.1.4 TEST SETUP

EUT	SPECTRUM
	ANALYZER

8.1.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.6 Unless otherwise a special operating condition is specified in the follows during the testing. Chip antenna measurement result.

Report No.: NEI-FCCP-1-R1011009 Page 69 of 80

Page 70 of 80



8.1.6 TEST RESULTS

EUT:	mini-PCI radio Module	Model Name :	DLM108-RJT
Temperature:	24°C	Relative Humidity:	51%
Test Voltage:	AC 120V/60Hz		
Test Mode :	TX 907MHz/912MHz/917MHz/922MHz		


Configuration (11B 20MHz)				
Frequency	Power Density	LIMIT	Test Result	
(MHz)	(dBm)	(dBm)	rest result	
912MHz	3.48	8	Compliant	
917MHz	4.78	8	Compliant	


Configuration (11G 5MHz)				
Frequency (MHz)	Power Density (dBm)	LIMIT (dBm)	Test Result	
907MHz	2.19	8	Compliant	
912MHz	1.16	8	Compliant	
917MHz	2.15	8	Compliant	
922MHz	2.45	8	Compliant	

Configuration (11G 10MHz)				
Frequency	Power Density	LIMIT	Test Result	
(MHz)	(dBm)	(dBm)	rest ivesuit	
907MHz	-1.32	8	Compliant	
912MHz	-1.11	8	Compliant	
917MHz	-0.33	8	Compliant	
922MHz	1.95	8	Compliant	


Configuration (11G 20MHz)				
Frequency	Power Density	LIMIT	Test Result	
(MHz)	(dBm)	(dBm)	TOST NOSUIT	
912MHz	-3.06	8	Compliant	
917MHz	-0.97	8	Compliant	


Configuration (11B 20MHz) 912MHz

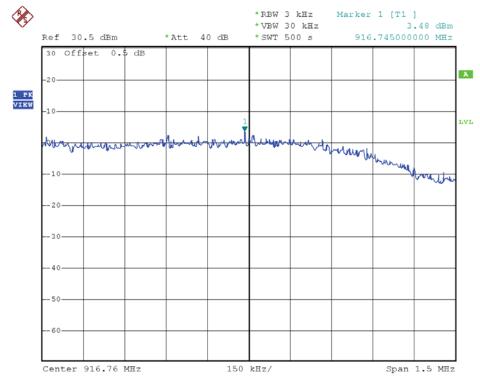

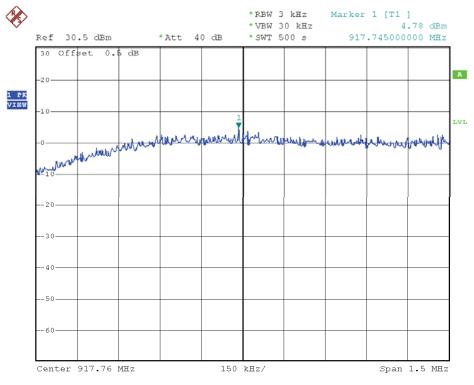


Configuration (5MHz) 907MHz

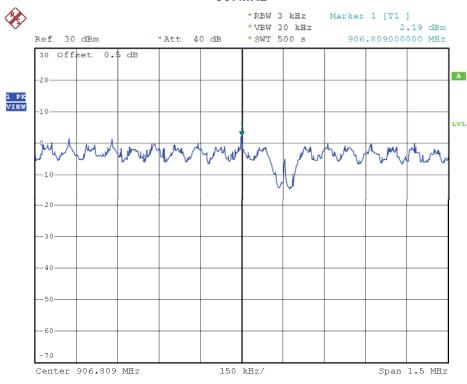


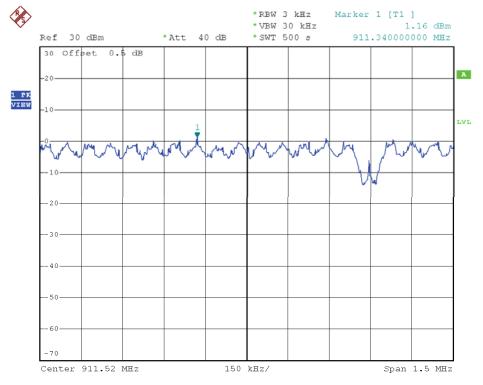




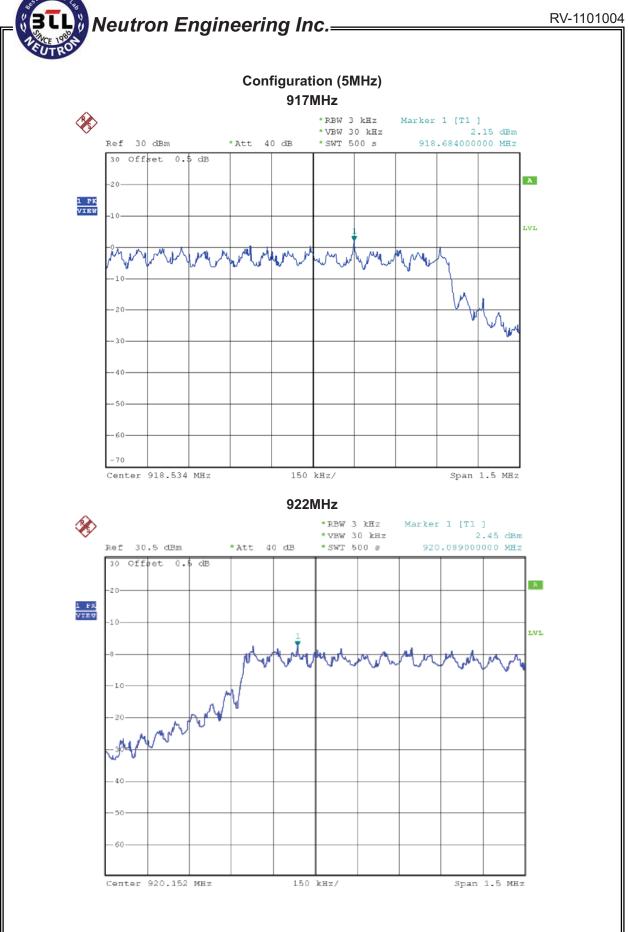



Configuration (11G 10MHz) 907MHz

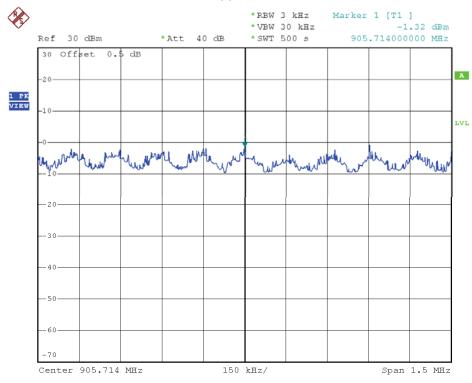

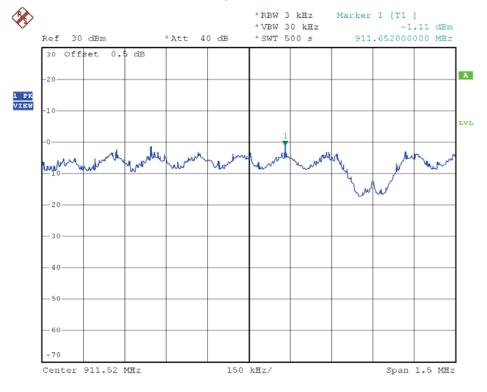

Configuration (11G 10MHz) 917MHz

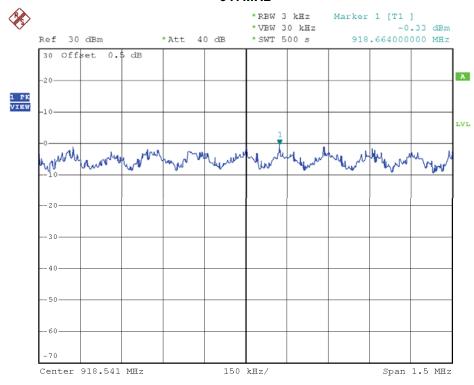

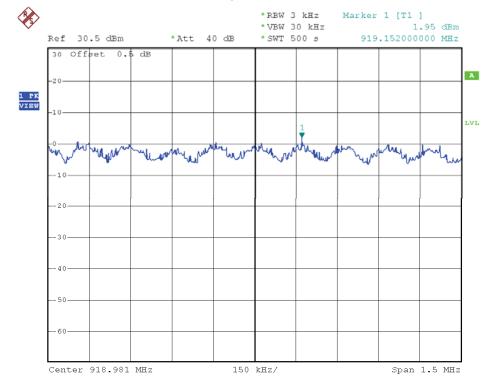

Configuration (11G 20MHz) 912MHz

