



## **MET Laboratories, Inc.** *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

January 31, 2013

Rajant Corporation  
400 E. King Street  
Malvern, PA 19355

Dear Keith Sullivan,

Enclosed is the EMC Wireless test report for compliance testing of the Rajant Corporation, LX4-2450 as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class A Digital Device and FCC Part 15 Subpart C, RSS-210, Issue 8, Dec. 2010 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\Rajant Corporation\EMC36837B-FCC247 Rev. 3)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.

---

## Electromagnetic Compatibility Criteria Test Report

for the

**Rajant Corporation  
LX4-2450**

**Tested under**  
the FCC Certification Rules  
contained in  
Title 47 of the CFR, Parts 15 Subpart B & ICES-003  
for Class A Digital Devices  
&  
15.247 Subpart C & RSS-210, Issue 8, Dec. 2010  
for Intentional Radiators

**MET Report: EMC36837B-FCC247 Rev. 3**

January 31, 2013

**Prepared For:**

**Rajant Corporation  
400 E. King Street  
Malvern, PA 19355**


**Prepared By:**  
**MET Laboratories, Inc.**  
914 W. Patapsco Ave  
Baltimore, MD 21230

## Electromagnetic Compatibility Criteria Test Report

for the

**Rajant Corporation**  
**LX4-2450**

**Tested under**  
the FCC Certification Rules  
contained in  
Title 47 of the CFR, Parts 15 Subpart B & ICES-003  
for Class A Digital Devices  
&  
15.247 Subpart C & RSS-210, Issue 8, Dec. 2010  
for Intentional Radiators

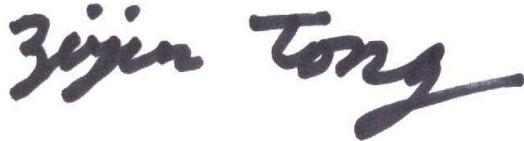

Zijun Tong, Project Engineer  
Electromagnetic Compatibility Lab



Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of the FCC Rules Parts 15B, 15.247 and Industry Canada standards ICES-003, Issue 4 February 2004, RSS-210, Issue 8, Dec. 2010 under normal use and maintenance.



Asad Bajwa,  
Director, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	January 14, 2013	Initial Issue.
1	January 18, 2013	Revised to reflect engineer and customer corrections.
2	January 30, 2013	Revised to reflect engineer corrections.
3	January 31, 2013	Revised to reflect engineer corrections.

## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
	A. Purpose of Test .....	2
	B. Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
	A. Overview.....	4
	B. References.....	5
	C. Test Site .....	5
	D. Description of Test Sample .....	6
	E. Equipment Configuration.....	7
	F. Support Equipment .....	7
	G. Ports and Cabling Information.....	7
	H. Mode of Operation.....	8
	I. Method of Monitoring EUT Operation .....	8
	J. Modifications .....	8
	a) Modifications to EUT .....	8
	b) Modifications to Test Standard.....	8
	K. Disposition of EUT .....	8
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Unintentional Radiators .....</b>	<b>9</b>
	§ 15.107(a) Conducted Emissions Limits.....	10
	§ 15.109(a) Radiated Emissions Limits .....	13
<b>IV.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>18</b>
	§ 15.203 Antenna Requirement .....	19
	§ 15.207(a) Conducted Emissions Limits.....	20
	§ 15.247(a)(a) 6 dB and 99% Bandwidth .....	25
	§ 15.247(b) Peak Power Output .....	32
	§ 15.247(d) Radiated Spurious Emissions Requirements and Band Edge.....	37
	§ 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge.....	79
	§ 15.247(e) Peak Power Spectral Density .....	90
	§ 15.247(i) Maximum Permissible Exposure .....	95
	RSS-GEN Receiver Spurious Emissions .....	96
<b>V.</b>	<b>Test Equipment .....</b>	<b>97</b>
<b>VI.</b>	<b>Certification &amp; User's Manual Information .....</b>	<b>99</b>
	A. Certification Information .....	100
	B. Label and User's Manual Information .....	104
<b>VII.</b>	<b>ICES-003 Procedural &amp; Labeling Requirements .....</b>	<b>106</b>

## List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing .....	2
Table 2. EUT Summary Table.....	4
Table 3. References .....	5
Table 4. Equipment Configuration .....	7
Table 5. Support Equipment.....	7
Table 6. Ports and Cabling Information .....	7
Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a) .....	10
Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz).....	11
Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz) .....	12
Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	13
Table 11. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits .....	14
Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits .....	16
Table 13. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	20
Table 14. Conducted Emissions, 15.207(a), Phase Line, Test Results, 2.4 GHz .....	21
Table 15. Conducted Emissions, 15.207(a), Neutral Line, Test Results, 2.4 GHz .....	22
Table 16. Conducted Emissions, 15.207(a), Phase Line, Test Results, 5.8 GHz .....	23
Table 17. Conducted Emissions, 15.207(a), Neutral Line, Test Results, 5.8 GHz .....	24
Table 18. Output Power Requirements from §15.247(b) .....	32
Table 19. Peak Power Output, Test Results, b Mode, 2.4 GHz.....	33
Table 20. Peak Power Output, Test Results, g Mode, 2.4 GHz.....	33
Table 21. Peak Power Output, Test Results, a Mode, 5.8 GHz .....	33
Table 22. Restricted Bands of Operation.....	37
Table 23. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a) .....	37
Table 24. Radiated Harmonic Emissions, 2.4 GHz .....	39
Table 25. Radiated Harmonic Emissions, 5.8 GHz .....	39
Table 26. Peak Power Spectral Density, Test Results, 802.11b, 2.4 GHz .....	91
Table 27. Peak Power Spectral Density, Test Results, 802.11g, 2.4 GHz.....	91
Table 28. Peak Power Spectral Density, Test Results, 802.11a, 5 GHz .....	91
Table 29. Spurious Emission Limits for Receivers .....	96
Table 30. Test Equipment List .....	98

## List of Plots

Plot 1. Conducted Emission, Phase Line Plot .....	11
Plot 2. Conducted Emission, Neutral Line Plot.....	12
Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits .....	14
Plot 4. Radiated Emissions, 1 GHz – 7 GHz, FCC Limits .....	15
Plot 5. Radiated Emissions, 30 MHz - 1 GHz, ICES-003 Limits .....	16
Plot 6. Radiated Emissions, 1 GHz – 7 GHz, ICES-003 Limits .....	17
Plot 7. Radiated Emissions, 1 GHz – 7 GHz, Average, ICES-003 Limits .....	17
Plot 8. Conducted Emissions, 15.207(a), Phase Line, 2.4 GHz.....	21
Plot 9. Conducted Emissions, 15.207(a), Neutral Line, 2.4 GHz .....	22
Plot 10. Conducted Emissions, 15.207(a), Phase Line, 5.8 GHz.....	23
Plot 11. Conducted Emissions, 15.207(a), Neutral Line, 5.8 GHz .....	24
Plot 12. Occupied Bandwidth, 802.11b, Low Channel, FCC .....	26
Plot 13. Occupied Bandwidth, 802.11b, Mid Channel, FCC .....	26
Plot 14. Occupied Bandwidth, 802.11b, High Channel, FCC .....	26
Plot 15. Occupied Bandwidth, 802.11g, Low Channel, FCC .....	27
Plot 16. Occupied Bandwidth, 802.11g, Mid Channel, FCC.....	27

Plot 17. Occupied Bandwidth, 802.11g, High Channel, FCC .....	27
Plot 18. Occupied Bandwidth, 802.11b, Low Channel, IC .....	28
Plot 19. Occupied Bandwidth, 802.11b, Mid Channel, IC .....	28
Plot 20. Occupied Bandwidth, 802.11b, High Channel, IC .....	28
Plot 21. Occupied Bandwidth, 802.11g, Low Channel, IC .....	29
Plot 22. Occupied Bandwidth, 802.11g, Mid Channel, IC .....	29
Plot 23. Occupied Bandwidth, 802.11g, High Channel, IC .....	29
Plot 24. Occupied Bandwidth, Channel 149, FCC .....	30
Plot 25. Occupied Bandwidth, Channel 157, FCC .....	30
Plot 26. Occupied Bandwidth, Channel 165, FCC .....	30
Plot 27. Occupied Bandwidth, Channel 149, IC .....	31
Plot 28. Occupied Bandwidth, Channel 157, IC .....	31
Plot 29. Occupied Bandwidth, Channel 165, IC .....	31
Plot 30. Peak Power Output, b Mode, Channel 1, 2.4 GHz .....	34
Plot 31. Peak Power Output, b Mode, Channel 6, 2.4 GHz .....	34
Plot 32. Peak Power Output, b Mode, Channel 11, 2.4 GHz .....	34
Plot 33. Peak Power Output, g Mode, Channel 1, 2.4 GHz .....	35
Plot 34. Peak Power Output, g Mode, Channel 6, 2.4 GHz .....	35
Plot 35. Peak Power Output, g Mode, Channel 11, 2.4 GHz .....	35
Plot 36. Peak Power Output, Channel 149, 5.8 GHz .....	36
Plot 37. Peak Power Output, Channel 157, 5.8 GHz .....	36
Plot 38. Peak Power Output, Channel 165, 5.8 GHz .....	36
Plot 39. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, b Mode, 2.4 GHz .....	40
Plot 40. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, b Mode, 2.4 GHz .....	40
Plot 41. Radiated Spurious Emissions, Low Channel, 18 GHz – 25 GHz, b Mode, 2.4 GHz .....	40
Plot 42. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, b Mode, 2.4 GHz .....	41
Plot 43. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, b Mode, 2.4 GHz .....	41
Plot 44. Radiated Spurious Emissions, Mid Channel, 18 GHz – 25 GHz, b Mode, 2.4 GHz .....	41
Plot 45. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, b Mode, 2.4 GHz .....	42
Plot 46. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, b Mode, 2.4 GHz .....	42
Plot 47. Radiated Spurious Emissions, High Channel, 18 GHz – 25 GHz, b Mode, 2.4 GHz .....	42
Plot 48. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, g Mode, 2.4 GHz .....	43
Plot 49. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, g Mode, 2.4 GHz .....	43
Plot 50. Radiated Spurious Emissions, Low Channel, 18 GHz – 25 GHz, g Mode, 2.4 GHz .....	43
Plot 51. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, g Mode, 2.4 GHz .....	44
Plot 52. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, g Mode, 2.4 GHz .....	44
Plot 53. Radiated Spurious Emissions, Mid Channel, 18 GHz – 25 GHz, g Mode, 2.4 GHz .....	44
Plot 54. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, g Mode, 2.4 GHz .....	45
Plot 55. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, g Mode, 2.4 GHz .....	45
Plot 56. Radiated Spurious Emissions, High Channel, 18 GHz – 25 GHz, g Mode, 2.4 GHz .....	45
Plot 57. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, a Mode, 5.8 GHz .....	46
Plot 58. Radiated Spurious Emissions, Low Channel, 1 GHz – 6 GHz, Peak Detector, a Mode, 5.8 GHz .....	46
Plot 59. Radiated Spurious Emissions, Low Channel, 4.5 GHz – 4.8 GHz, Average, a Mode, 5.8 GHz .....	46
Plot 60. Radiated Spurious Emissions, Low Channel, 4.8 GHz – 5.35 GHz, Average, a Mode, 5.8 GHz .....	47
Plot 61. Radiated Spurious Emissions, Low Channel, 5.35 GHz – 5.46 GHz, Average, a Mode, 5.8 GHz .....	47
Plot 62. Radiated Spurious Emissions, Low Channel, 6 GHz – 18 GHz, Peak Detector, a Mode, 5.8 GHz .....	47
Plot 63. Radiated Spurious Emissions, Low Channel, 11.35 GHz – 11.65 GHz, Average, a Mode, 5.8 GHz .....	48
Plot 64. Radiated Spurious Emissions, Low Channel, 13.2 GHz – 13.5 GHz, Average, a Mode, 5.8 GHz .....	48
Plot 65. Radiated Spurious Emissions, Low Channel, 15.6 GHz – 15.9 GHz, Average, a Mode, 5.8 GHz .....	48
Plot 66. Radiated Spurious Emissions, Low Channel, 16.2 GHz – 16.5 GHz, Average, a Mode, 5.8 GHz .....	49
Plot 67. Radiated Spurious Emissions, Low Channel, 17.1 GHz – 17.4 GHz, Average, a Mode, 5.8 GHz .....	49
Plot 68. Radiated Spurious Emissions, Low Channel, 18 GHz – 25 GHz, Peak Detector, a Mode, 5.8 GHz .....	49
Plot 69. Radiated Spurious Emissions, Low Channel, 22.8 GHz – 23.1 GHz, Average, a Mode, 5.8 GHz .....	50

Plot 70. Radiated Spurious Emissions, Low Channel, 25 GHz – 40 GHz, Average, a Mode, 5.8 GHz.....	50
Plot 71. Radiated Spurious Emissions, Low Channel, 25 GHz – 40 GHz, Peak, a Mode, 5.8 GHz .....	50
Plot 72. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, a Mode, 5.8 GHz .....	51
Plot 73. Radiated Spurious Emissions, Mid Channel, 1 GHz – 7 GHz, Average, a Mode, 5.8 GHz .....	51
Plot 74. Radiated Spurious Emissions, Mid Channel, 1 GHz – 7 GHz, Peak, a Mode, 5.8 GHz .....	51
Plot 75. Radiated Spurious Emissions, Mid Channel, 6 GHz – 18 GHz, Peak Detector, a Mode, 5.8 GHz .....	52
Plot 76. Radiated Spurious Emissions, Mid Channel, 11.5 GHz – 11.7 GHz, Average, a Mode, 5.8 GHz .....	52
Plot 77. Radiated Spurious Emissions, Mid Channel, 13.2 GHz – 13.5 GHz, Average, a Mode, 5.8 GHz .....	52
Plot 78. Radiated Spurious Emissions, Mid Channel, 15.6 GHz – 15.9 GHz, Average, a Mode, 5.8 GHz .....	53
Plot 79. Radiated Spurious Emissions, Mid Channel, 16.2 GHz – 16.5 GHz, Average, a Mode, 5.8 GHz .....	53
Plot 80. Radiated Spurious Emissions, Mid Channel, 17.2 GHz – 17.5 GHz, Average, a Mode, 5.8 GHz .....	53
Plot 81. Radiated Spurious Emissions, Mid Channel, 18 GHz – 25 GHz, Peak Detector, a Mode, 5.8 GHz .....	54
Plot 82. Radiated Spurious Emissions, Mid Channel, 25 GHz – 40 GHz, Average, a Mode, 5.8 GHz .....	54
Plot 83. Radiated Spurious Emissions, Mid Channel, 25 GHz – 40 GHz, Peak, a Mode, 5.8 GHz .....	54
Plot 84. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, a Mode, 5.8 GHz.....	55
Plot 85. Radiated Spurious Emissions, High Channel, 1 GHz – 6 GHz, Peak Detector, a Mode, 5.8 GHz .....	55
Plot 86. Radiated Spurious Emissions, High Channel, 4.5 GHz – 4.8 GHz, Average, a Mode, 5.8 GHz .....	55
Plot 87. Radiated Spurious Emissions, High Channel, 4.8 GHz – 5.35 GHz, Average, a Mode, 5.8 GHz .....	56
Plot 88. Radiated Spurious Emissions, High Channel, 5.35 GHz – 5.46 GHz, Average, a Mode, 5.8 GHz .....	56
Plot 89. Radiated Spurious Emissions, High Channel, 6 GHz – 18 GHz, Peak Detector, a Mode, 5.8 GHz .....	56
Plot 90. Radiated Spurious Emissions, High Channel, 11.5 GHz – 11.8 GHz, Average, a Mode, 5.8 GHz .....	57
Plot 91. Radiated Spurious Emissions, High Channel, 13.2 GHz – 13.5 GHz, Average, a Mode, 5.8 GHz .....	57
Plot 92. Radiated Spurious Emissions, High Channel, 15.6 GHz – 15.9 GHz, Average, a Mode, 5.8 GHz .....	57
Plot 93. Radiated Spurious Emissions, High Channel, 16.2 GHz – 16.5 GHz, Average, a Mode, 5.8 GHz .....	58
Plot 94. Radiated Spurious Emissions, High Channel, 17.3 GHz – 17.6 GHz, Average, a Mode, 5.8 GHz .....	58
Plot 95. Radiated Spurious Emissions, High Channel, 18 GHz – 25 GHz, Peak Detector, a Mode, 5.8 GHz .....	58
Plot 96. Radiated Spurious Emissions, High Channel, 23.2 GHz – 23.4 GHz, Average, a Mode, 5.8 GHz .....	59
Plot 97. Radiated Spurious Emissions, High Channel, 25 GHz – 40 GHz, Average, a Mode, 5.8 GHz .....	59
Plot 98. Radiated Spurious Emissions, High Channel, 25 GHz – 40 GHz, Peak, a Mode, 5.8 GHz .....	59
Plot 99. Radiated Restricted Band Edge, b Mode, Channel 1, Average, 2.4 GHz .....	60
Plot 100. Radiated Restricted Band Edge, b Mode, Channel 1, Peak, 2.4 GHz .....	60
Plot 101. Radiated Restricted Band Edge, b Mode, Channel 2, Average, 2.4 GHz .....	61
Plot 102. Radiated Restricted Band Edge, b Mode, Channel 2, Peak, 2.4 GHz .....	61
Plot 103. Radiated Restricted Band Edge, b Mode, Channel 3, Average, 2.4 GHz .....	61
Plot 104. Radiated Restricted Band Edge, b Mode, Channel 3, Peak, 2.4 GHz .....	62
Plot 105. Radiated Restricted Band Edge, b Mode, Channel 4, Average, High End, 2.4 GHz .....	62
Plot 106. Radiated Restricted Band Edge, b Mode, Channel 4, Peak, High End, 2.4 GHz .....	62
Plot 107. Radiated Restricted Band Edge, b Mode, Channel 5, Average, 2.4 GHz .....	63
Plot 108. Radiated Restricted Band Edge, b Mode, Channel 5, Peak, 2.4 GHz .....	63
Plot 109. Radiated Restricted Band Edge, b Mode, Channel 6, Average, 2.4 GHz .....	63
Plot 110. Radiated Restricted Band Edge, b Mode, Channel 6, Peak, 2.4 GHz .....	64
Plot 111. Radiated Restricted Band Edge, b Mode, Channel 7, Average, 2.4 GHz .....	64
Plot 112. Radiated Restricted Band Edge, b Mode, Channel 7, Peak, 2.4 GHz .....	64
Plot 113. Radiated Restricted Band Edge, b Mode, Channel 8, Average, 2.4 GHz .....	65
Plot 114. Radiated Restricted Band Edge, b Mode, Channel 8, Peak, 2.4 GHz .....	65
Plot 115. Radiated Restricted Band Edge, b Mode, Channel 9, Average, 2.4 GHz .....	65
Plot 116. Radiated Restricted Band Edge, b Mode, Channel 9, Peak, 2.4 GHz .....	66
Plot 117. Radiated Restricted Band Edge, b Mode, Channel 10, Average, 2.4 GHz .....	66
Plot 118. Radiated Restricted Band Edge, b Mode, Channel 10, Peak, 2.4 GHz .....	66
Plot 119. Radiated Restricted Band Edge, b Mode, Channel 11, Average, 2.4 GHz .....	67
Plot 120. Radiated Restricted Band Edge, b Mode, Channel 11, Peak, 2.4 GHz .....	67
Plot 121. Radiated Restricted Band Edge, g Mode, Channel 1, Average, 2.4 GHz .....	68
Plot 122. Radiated Restricted Band Edge, g Mode, Channel 1, Peak, 2.4 GHz .....	68

Plot 123. Radiated Restricted Band Edge, g Mode, Channel 2, Average, 2.4 GHz .....	68
Plot 124. Radiated Restricted Band Edge, g Mode, Channel 2, Peak, 2.4 GHz.....	69
Plot 125. Radiated Restricted Band Edge, g Mode, Channel 3, Average, 2.4 GHz .....	69
Plot 126. Radiated Restricted Band Edge, g Mode, Channel 3, Peak, 2.4 GHz .....	69
Plot 127. Radiated Restricted Band Edge, g Mode, Channel 4, Average, High End, 2.4 GHz .....	70
Plot 128. Radiated Restricted Band Edge, g Mode, Channel 4, Peak, High End, 2.4 GHz .....	70
Plot 129. Radiated Restricted Band Edge, g Mode, Channel 5, Average, 2.4 GHz .....	70
Plot 130. Radiated Restricted Band Edge, g Mode, Channel 5, Peak, 2.4 GHz.....	71
Plot 131. Radiated Restricted Band Edge, g Mode, Channel 7, Average, 2.4 GHz .....	71
Plot 132. Radiated Restricted Band Edge, g Mode, Channel 7, Peak, 2.4 GHz .....	71
Plot 133. Radiated Restricted Band Edge, g Mode, Channel 8, Average, 2.4 GHz .....	72
Plot 134. Radiated Restricted Band Edge, g Mode, Channel 8, Peak, 2.4 GHz .....	72
Plot 135. Radiated Restricted Band Edge, g Mode, Channel 9, Average, 2.4 GHz .....	72
Plot 136. Radiated Restricted Band Edge, g Mode, Channel 9, Peak, 2.4 GHz.....	73
Plot 137. Radiated Restricted Band Edge, g Mode, Channel 10, Average, 2.4 GHz .....	73
Plot 138. Radiated Restricted Band Edge, g Mode, Channel 10, Peak, 2.4 GHz .....	73
Plot 139. Radiated Restricted Band Edge, g Mode, Channel 11, Average, 2.4 GHz .....	74
Plot 140. Radiated Restricted Band Edge, g Mode, Channel 11, Peak, 2.4 GHz .....	74
Plot 162. Radiated Restricted Band Edge, Channel 149, 802.11a, 5350 MHz – 5745 MHz, Average, 5 GHz.....	75
Plot 163. Radiated Restricted Band Edge, Channel 149, 802.11a, 5350 MHz – 5745 MHz, Peak, 5 GHz.....	75
Plot 164. Radiated Restricted Band Edge, Channel 152, 802.11a, 5350 MHz – 5760 MHz, Average, 5 GHz.....	75
Plot 165. Radiated Restricted Band Edge, Channel 152, 802.11a, 5350 MHz – 5760 MHz, Peak, 5 GHz.....	76
Plot 166. Radiated Restricted Band Edge, Channel 157, 802.11a, 5350 MHz – 5785 MHz, Average, 5 GHz.....	76
Plot 167. Radiated Restricted Band Edge, Channel 157, 802.11a, 5350 MHz – 5785 MHz, Peak, 5 GHz.....	76
Plot 168. Radiated Restricted Band Edge, Channel 157, 802.11a, 5785 MHz – 7750 MHz, Average, 5 GHz.....	77
Plot 169. Radiated Restricted Band Edge, Channel 157, 802.11a, 5785 MHz – 7750 MHz, Peak, 5 GHz.....	77
Plot 170. Radiated Restricted Band Edge, Channel 160, 802.11a, 5350 MHz – 5800 MHz, Average, 5 GHz.....	77
Plot 171. Radiated Restricted Band Edge, Channel 160, 802.11a, 5350 MHz – 5800 MHz, Peak, 5 GHz.....	78
Plot 172. Radiated Restricted Band Edge, Channel 165, 802.11a, 5825 MHz – 7750 MHz, Average, 5 GHz.....	78
Plot 173. Radiated Restricted Band Edge, Channel 165, 802.11a, 5825 MHz – 7750 MHz, Peak, 5 GHz.....	78
Plot 141. Conducted Spurious Emissions, 802.11b, Low Channel, 30 MHz – 18 GHz, 2.4 GHz .....	80
Plot 142. Conducted Spurious Emissions, 802.11b, Low Channel, 18 GHz – 26.5 GHz, 2.4 GHz .....	80
Plot 143. Conducted Spurious Emissions, 802.11b, Mid Channel, 30 MHz – 18 GHz, 2.4 GHz .....	80
Plot 144. Conducted Spurious Emissions, 802.11b, Mid Channel, 18 GHz – 26.5 GHz, 2.4 GHz .....	81
Plot 145. Conducted Spurious Emissions, 802.11b, High Channel, 30 MHz – 18 GHz, 2.4 GHz .....	81
Plot 146. Conducted Spurious Emissions, 802.11b, High Channel, 18 GHz – 26.5 GHz, 2.4 GHz .....	81
Plot 147. Conducted Spurious Emissions, 802.11g, Low Channel, 30 MHz – 18 GHz, 2.4 GHz .....	82
Plot 148. Conducted Spurious Emissions, 802.11g, Low Channel, 18 GHz – 26.5 GHz, 2.4 GHz .....	82
Plot 149. Conducted Spurious Emissions, 802.11g, Mid Channel, 30 MHz – 18 GHz, 2.4 GHz .....	82
Plot 150. Conducted Spurious Emissions, 802.11g, Mid Channel, 18 GHz – 26.5 GHz, 2.4 GHz .....	83
Plot 151. Conducted Spurious Emissions, 802.11g, High Channel, 30 MHz – 18 GHz, 2.4 GHz .....	83
Plot 152. Conducted Spurious Emissions, 802.11g, High Channel, 18 GHz – 26.5 GHz, 2.4 GHz .....	83
Plot 153. Conducted Spurious Emissions, 802.11a, Low Channel, 30 MHz – 18 GHz, 5 GHz.....	84
Plot 154. Conducted Spurious Emissions, 802.11a, Low Channel, 18 GHz – 26.5 GHz, 5 GHz .....	84
Plot 155. Conducted Spurious Emissions, 802.11a, Low Channel, 26.5 MHz – 40 GHz, 5 GHz.....	84
Plot 156. Conducted Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 18 GHz, 5 GHz .....	85
Plot 157. Conducted Spurious Emissions, 802.11a, Mid Channel, 18 GHz – 26.5 GHz, 5 GHz .....	85
Plot 158. Conducted Spurious Emissions, 802.11a, Mid Channel, 26.5 MHz – 40 GHz, 5 GHz .....	85
Plot 159. Conducted Spurious Emissions, 802.11a, High Channel, 30 MHz – 18 GHz, 5 GHz .....	86
Plot 160. Conducted Spurious Emissions, 802.11a, High Channel, 18 MHz – 26.5 GHz, 5 GHz .....	86
Plot 161. Conducted Spurious Emissions, 802.11a, High Channel, 26.5 MHz – 40 GHz, 5 GHz .....	86
Plot 162. Conducted Band Edge, 802.11b, Low Channel, 2.4 GHz .....	87
Plot 163. Conducted Band Edge, 802.11b, High Channel, 2.4 GHz .....	87

Plot 164. Conducted Band Edge, 802.11g, Low Channel, 2.4 GHz.....	88
Plot 165. Conducted Band Edge, 802.11g, High Channel, 2.4 GHz .....	88
Plot 166. Conducted Band Edge, 802.11a, Low Channel, 5 GHz .....	89
Plot 167. Conducted Band Edge, 802.11a, High Channel, 5 GHz .....	89
Plot 168. Peak Power Spectral Density, 802.11b, Low Channel, 2.4 GHz .....	92
Plot 169. Peak Power Spectral Density, 802.11b, Mid Channel, 2.4 GHz .....	92
Plot 170. Peak Power Spectral Density, 802.11b, High Channel, 2.4 GHz.....	92
Plot 171. Peak Power Spectral Density, 802.11g, Low Channel, 2.4 GHz .....	93
Plot 172. Peak Power Spectral Density, 802.11g, Mid Channel, 2.4 GHz .....	93
Plot 173. Peak Power Spectral Density, 802.11g, High Channel, 2.4 GHz.....	93
Plot 174. Peak Power Spectral Density, 802.11a, Low Channel .....	94
Plot 175. Peak Power Spectral Density, 802.11a, Mid Channel.....	94
Plot 176. Peak Power Spectral Density, 802.11a, High Channel .....	94

## List of Figures

Figure 1. Block Diagram of Test Configuration.....	6
Figure 2. Peak Power Output Test Setup.....	32

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<sub>μ</sub>A</b>	Decibels above one <b>microamp</b>
<b>dB<sub>μ</sub>V</b>	Decibels above one <b>microvolt</b>
<b>dB<sub>μ</sub>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<sub>μ</sub>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b>μH</b>	<b>microhenry</b>
<b>μ</b>	<b>microfarad</b>
<b>μs</b>	<b>microseconds</b>
<b>NEBS</b>	Network Equipment-Building System
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	Volts <b>per meter</b>
<b>VCP</b>	Vertical Coupling Plane

# I. Executive Summary

## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Rajant Corporation LX4-2450, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the LX4-2450. Rajant Corporation should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the LX4-2450, has been **permanently** discontinued.

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Rajant Corporation, purchase order number 2011264. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference 47 CFR Part 15.247:2005	IC Reference RSS-210 Issue 8: 2010; RSS-GEN Issue 3: 2010	Description	Compliance
47 CFR Part 15.107 (a)	ICES-003 Issue 4 February 2004	Conducted Emission Limits for a Class A Digital Device	Compliant
47 CFR Part 15.109 (a)	ICES-003 Issue 4 February 2004	Radiated Emission Limits for a Class A Digital Device	Compliant
Title 47 of the CFR, Part 15 §15.203	N/A	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15 §15.207(a)	RSS-GEN (7.2.4)	Conducted Emission Limits	Compliant
Title 47 of the CFR, Part 15 §15.247(a)(2)	RSS-Gen(4.6)	6dB Occupied Bandwidth 99% Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15 §15.247(b)	RSS-210(A8.4)	Peak Power Output	Compliant
Title 47 of the CFR, Part 15 §15.247(d); §15.209; §15.205	RSS-210(A8.5)	Radiated Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-210(A8.5)	RF Conducted Spurious Emissions Requirements	Compliant
Title 47 of the CFR, Part 15 §15.247(d)	RSS-210(A8.5)	RF Conducted Band Edge	Compliant
Title 47 of the CFR, Part 15; §15.247(e)	RSS-210(A8.2)	Peak Power Spectral Density	Compliant
Title 47 of the CFR, Part 15 §15.247(i)	RSS-Gen(5.6)	Maximum Permissible Exposure (MPE)	Compliant
N/A	RSS-Gen(4.10)	Receiver Spurious Emissions	Compliant

**Table 1. Executive Summary of EMC Part 15.247 Compliance Testing**

## II. Equipment Configuration

## A. Overview

MET Laboratories, Inc. was contracted by Rajant Corporation to perform testing on the LX4-2450, under Rajant Corporation's purchase order number 2011264.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Rajant Corporation, LX4-2450.

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	LX4-2450
<b>Model(s) Covered:</b>	LX4-2450
<b>EUT Specifications:</b>	Primary Power: 120 VAC, 60 Hz
	FCC ID: VJA-LX4-2450
	IC: 7382A-LX42450
	Type of Modulations: DSSS, OFDM
	Equipment Code: DTS
	Peak RF Output Power: 2.4 GHz – 27.65 dBm 5.8 GHz – 29.01 dBm
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.
<b>Environmental Test Conditions:</b>	Temperature: 15-35° C
	Relative Humidity: 30-60%
	Barometric Pressure: 860-1060 mbar
<b>Evaluated by:</b>	Dusmantha Tennakoon
<b>Report Date(s):</b>	January 31, 2013

**Table 2. EUT Summary Table**

## B. References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>CFR 47, Part 15, Subpart B</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>RSS-210, Issue 8, Dec. 2010</b>	Low-power Licence-exempt Radiocommunications Devices (All Frequency Bands): Category I Equipment
<b>RSS-GEN, Issue 3, Dec. 2010</b>	General Requirements and Information for the Certification of Radio Apparatus
<b>ICES-003, Issue 4 February 2004</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ISO/IEC 17025:2005</b>	General Requirements for the Competence of Testing and Calibration Laboratories
<b>ANSI C63.10-2009</b>	American National Standard for Testing Unlicensed Wireless Devices

**Table 3. References**


## C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## D. Description of Test Sample

The Rajant Corporation LX4-2450, Equipment Under Test (EUT), is a portable networking device that supports wired and wireless routing, and 802.11 a/b/g access point / bridging / meshing functionality. The BreadCrumb is powered from a DC power source (48V nominal).

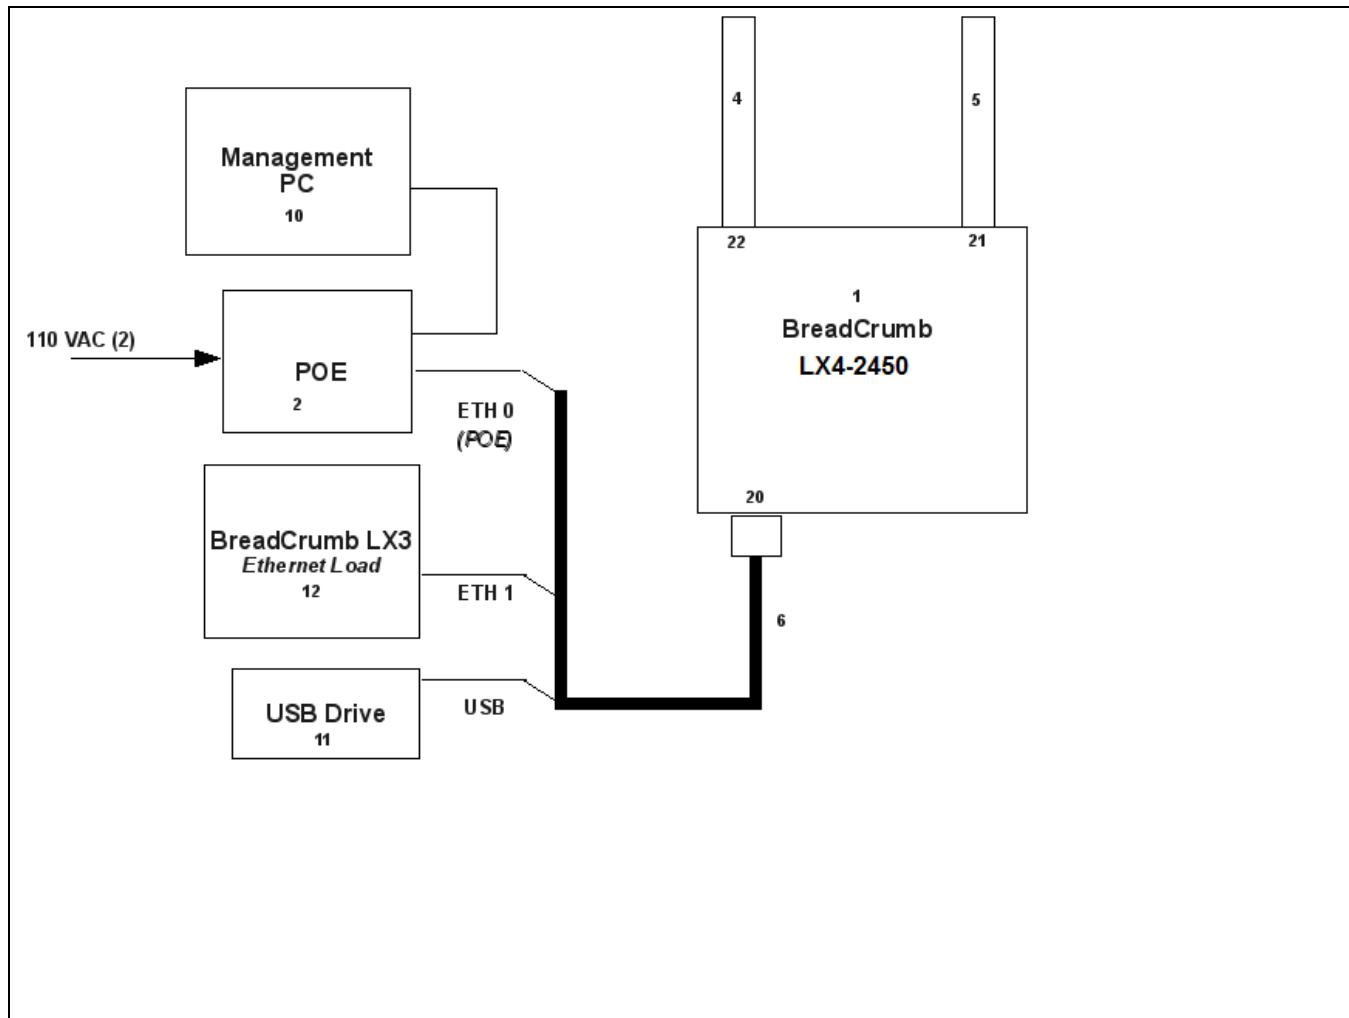

**Figure 1. Block Diagram of Test Configuration**

Note: For ports 21 and 22, the wireless approval for this product is conditional on non-co-location of the antennas. At least one of the antennas must be connected to the product using a 50 ohm co-axial cable to guarantee a minimum separation of 20 cm between the antennas.

## E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Serial Number
1	BreadCrumb LX4-2450	LX4-2450	FCC EUT LX4-2450
2	Cincon PR60A AC/DC POE	PR60A	NA
3	Reserved	--	NA
4	2.4GHz 5dBi Omni Antenna	OD24M-5	NA
5	5.8GHz 6dBi Antenna	T580060O10006	NA
6	LX4 IO Cable	06-100044-001	NA
7	Reserved	--	NA

**Table 4. Equipment Configuration**

## F. Support Equipment

Support equipment necessary for the operation and testing of the EUT is included in the following list.

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
10	Laptop PC	Toshiba	Satellite R10	--
11	USB Key	SanDisk	Cruzer	--
12	BreadCrumb LX3	Rajant	LX3-2209D	FCC DUT 31256

**Table 5. Support Equipment**

## G. Ports and Cabling Information

Ref. ID	Port Name on EUT	Cable Description	Qty.	Length (m)	Shielded (Y/N)	Termination Point
20	ETH0,ETH1,USB	I/O Breakout Cable	1	0.3	Y	--
21	5.8 GHz Antenna	Cable	1	0.1	Y	--
22	2.4 GHz Antenna	Cable	1	0.1	Y	--

**Table 6. Ports and Cabling Information**

## **H. Mode of Operation**

The LX4-2450 test article will be configured with BreadCrumb firmware, and will operate in the worst case condition as required to determine compliance with Part 15B/C requirements. A management PC will monitor the operation of the EUT.

## **I. Method of Monitoring EUT Operation**

Operation of the test article shall be verified in two ways. The operation of the device under test (DUT) will be observed from network management software (BC|Commander) running on a management PC configured for a wired bridge connection to the DUT. The status indicator on the DUT will also be used to verify the operation and mode setting of the DUT.

## **J. Modifications**

### **a) Modifications to EUT**

No modifications were made to the EUT.

### **b) Modifications to Test Standard**

No modifications were made to the test standard.

## **K. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Rajant Corporation upon completion of testing.

### III. Electromagnetic Compatibility Criteria for Unintentional Radiators

## Electromagnetic Compatibility Criteria

### § 15.107 Conducted Emissions Limits

**Test Requirement(s):**

**15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

**15.107 (b)** For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 7. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

Frequency range (MHz)	Class A Conducted Limits (dB $\mu$ V)		*Class B Conducted Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
* 0.15- 0.45	79	66	66 - 56	56 - 46
0.45 - 0.5	79	66	56	46
0.5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.  
 Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.  
 \* -- Limits per Subsection 15.207(a).

**Table 7. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) and 15.207(a)**

**Test Results:**

The EUT was compliant with the Class A requirement(s) of this section.

**Test Engineer(s):**

Len Knight


**Test Date(s):**

07/06/11

### Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
2.803	51.57	0	51.57	73	-21.43	36.53	0	36.53	60	-23.47
7.175	43.55	0.05	43.6	73	-29.4	41.96	0.05	42.01	60	-17.99
10.64	54.49	0.09	54.58	73	-18.42	51.03	0.09	51.12	60	-8.88
10.88	55.11	0.09	55.2	73	-17.8	51.75	0.09	51.84	60	-8.16
17.69	44.87	0.09	44.96	73	-28.04	41.51	0.09	41.6	60	-18.4
18.2	32.66	0.1	32.76	73	-40.24	25.91	0.1	26.01	60	-33.99

Table 8. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

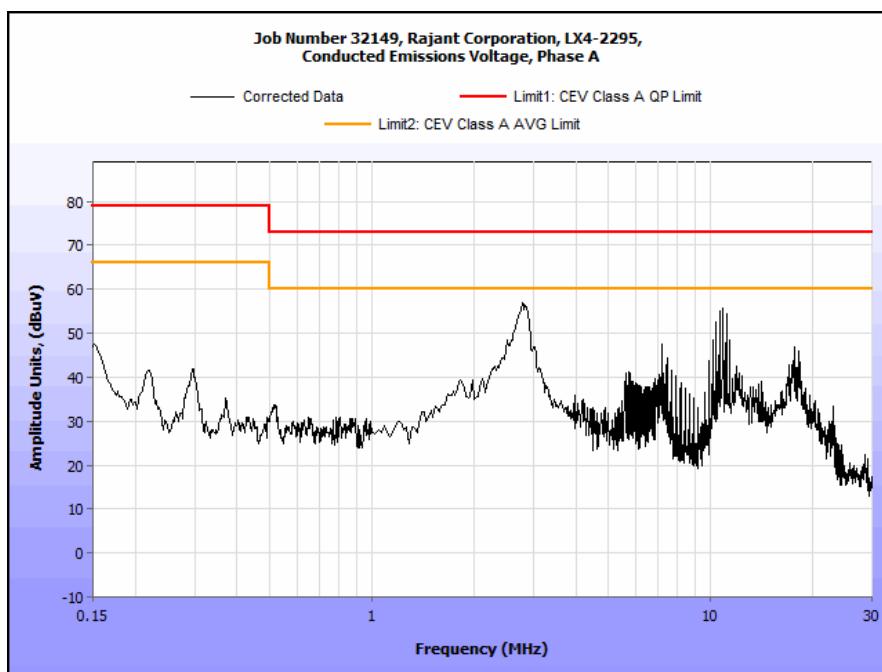


Plot 1. Conducted Emission, Phase Line Plot

### Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
2.848	49.6	0	49.6	73	-23.4	38.17	0	38.17	60	-21.83
5.67	21.46	0.09	21.55	73	-51.45	17.88	0.09	17.97	60	-42.03
7.41	36.02	0.05	36.07	73	-36.93	31.71	0.05	31.76	60	-28.24
10.64	53.92	0.09	54.01	73	-18.99	50.48	0.09	50.57	60	-9.43
17.69	43.82	0.09	43.91	73	-29.09	40.65	0.09	40.74	60	-19.26
18.21	33.42	0.1	33.52	73	-39.48	26.87	0.1	26.97	60	-33.03

Table 9. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)

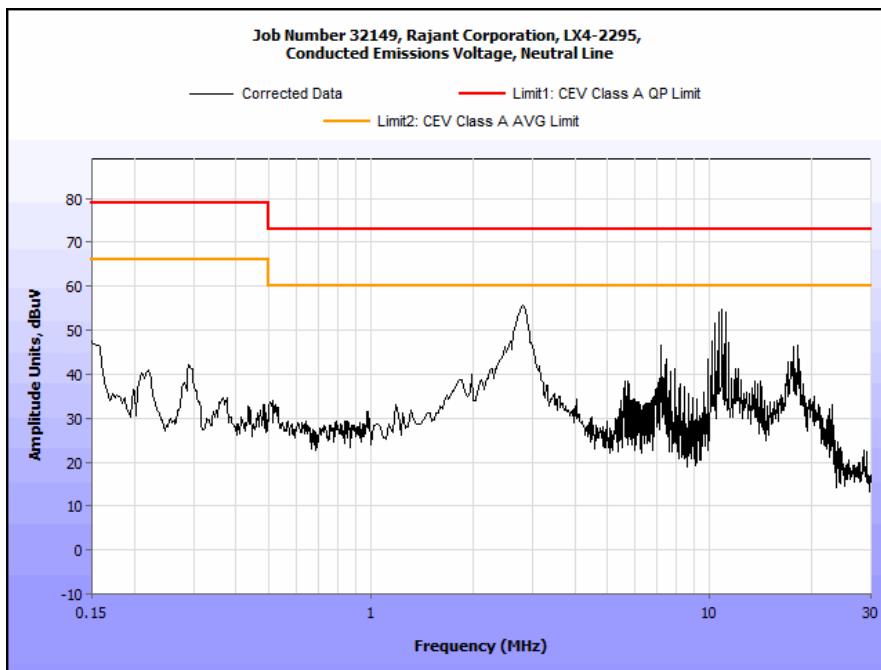

Plot 2. Conducted Emission, Neutral Line Plot

## Radiated Emission Limits

### § 15.109 Radiated Emissions Limits

**Test Requirement(s):**

**15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 10.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 10.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 10. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:**

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:**

The EUT was compliant with the Class A requirement(s) of this section.

**Test Engineer(s):**

Len Knight

**Test Date(s):**


07/06/11

## Radiated Emissions Limits Test Results, Class A


Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (-)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
52.912325	223	H	1.00	14.75	7.90	0.23	10.46	12.42	39.00	-26.58
52.912325	105	V	1.00	38.48	7.90	0.23	10.46	36.15	39.00	-2.85
224.98572	170	H	1.49	33.58	11.50	0.23	10.46	34.85	46.40	-11.55
224.98572	230	V	1.00	35.23	11.50	0.23	10.46	36.50	46.40	-9.90
959.98672	95	H	1.30	20.50	23.10	1.73	10.46	34.87	46.40	-11.53
959.98672	236	V	1.00	22.60	23.10	1.73	10.46	36.97	46.40	-9.43
51.19226	254	H	1.43	8.57	8.22	0.23	10.46	6.56	39.00	-32.44
51.19226	101	V	1.00	33.28	8.22	0.23	10.46	31.27	39.00	-7.73

**Table 11. Radiated Emissions Limits, Test Results, 30 MHz – 1 GHz, FCC Limits**

Note: The EUT was tested at 3 m.

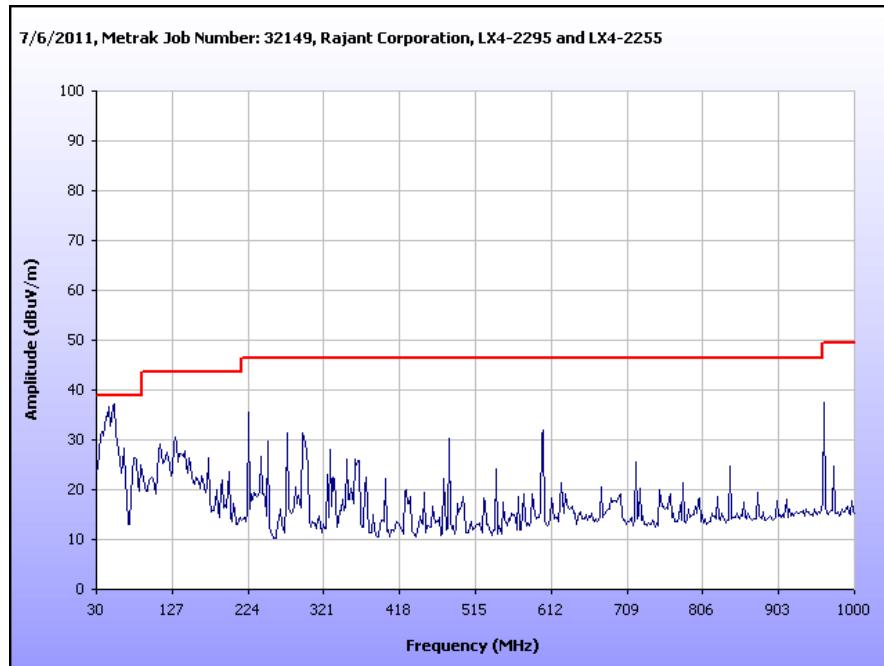

**Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits**

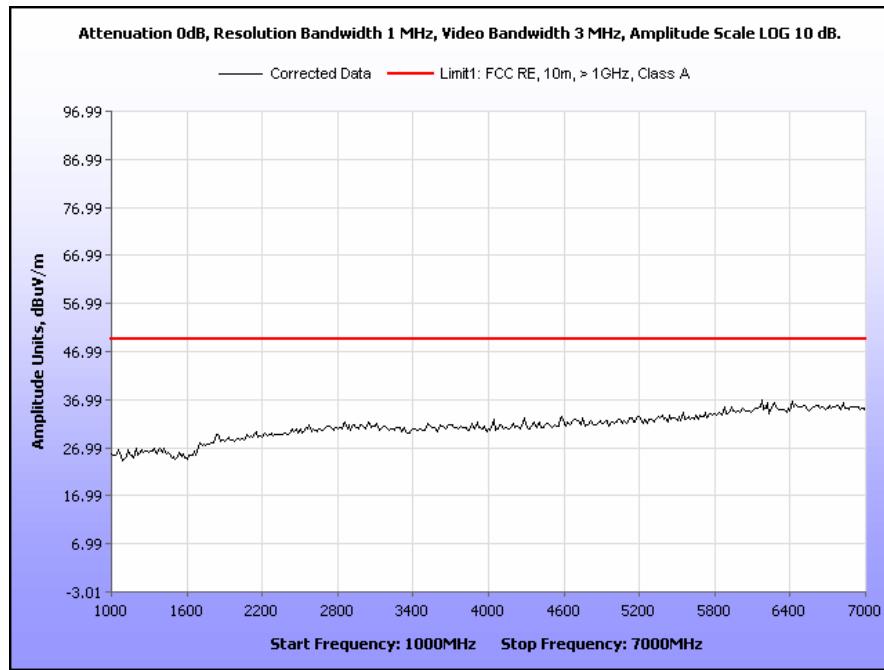


Plot 4. Radiated Emissions, 1 GHz – 7 GHz, FCC Limits

## Radiated Emissions Limits Test Results, Class A


Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dBuV)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (-)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
52.912325	223	H	1.00	14.75	7.90	0.23	10.46	12.42	40.00	-27.58
52.912325	105	V	1.00	38.48	7.90	0.23	10.46	36.15	40.00	-3.85
224.98572	170	H	1.49	33.58	11.50	0.23	10.46	34.85	40.00	-5.15
224.98572	230	V	1.00	35.23	11.50	0.23	10.46	36.50	40.00	-3.50
959.98672	95	H	1.30	20.50	23.10	1.73	10.46	34.87	47.00	-12.13
959.98672	236	V	1.00	22.60	23.10	1.73	10.46	36.97	47.00	-10.03
51.19226	254	H	1.43	8.57	8.22	0.23	10.46	6.56	40.00	-33.44
51.19226	101	V	1.00	33.28	8.22	0.23	10.46	31.27	40.00	-8.73

**Table 12. Radiated Emissions Limits, Test Results, ICES-003 Limits**


Note: The EUT was tested at 3 m.

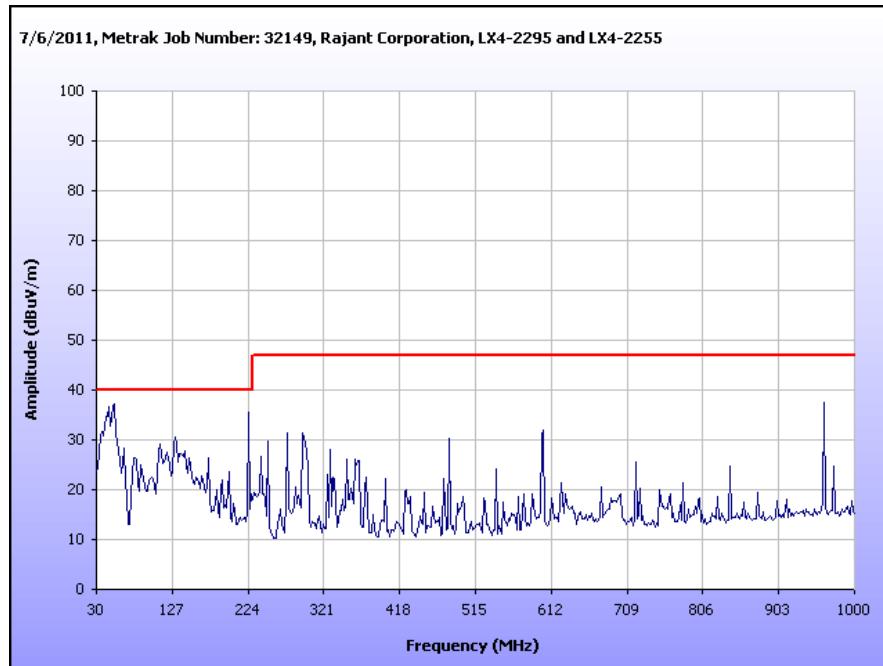

**Plot 5. Radiated Emissions, 30 MHz - 1 GHz, ICES-003 Limits**

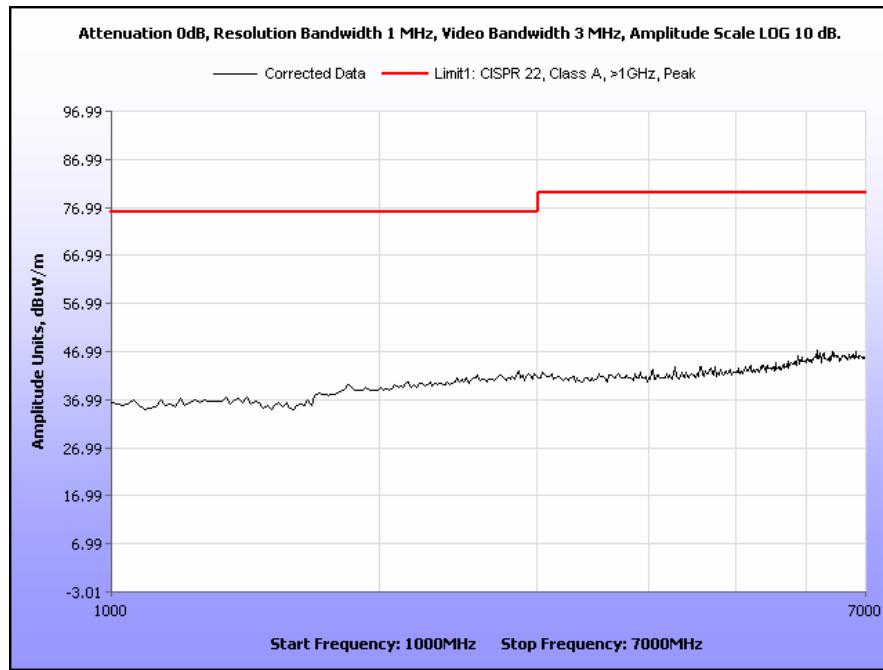

**Plot 6. Radiated Emissions, 1 GHz – 7 GHz, ICES-003 Limits**

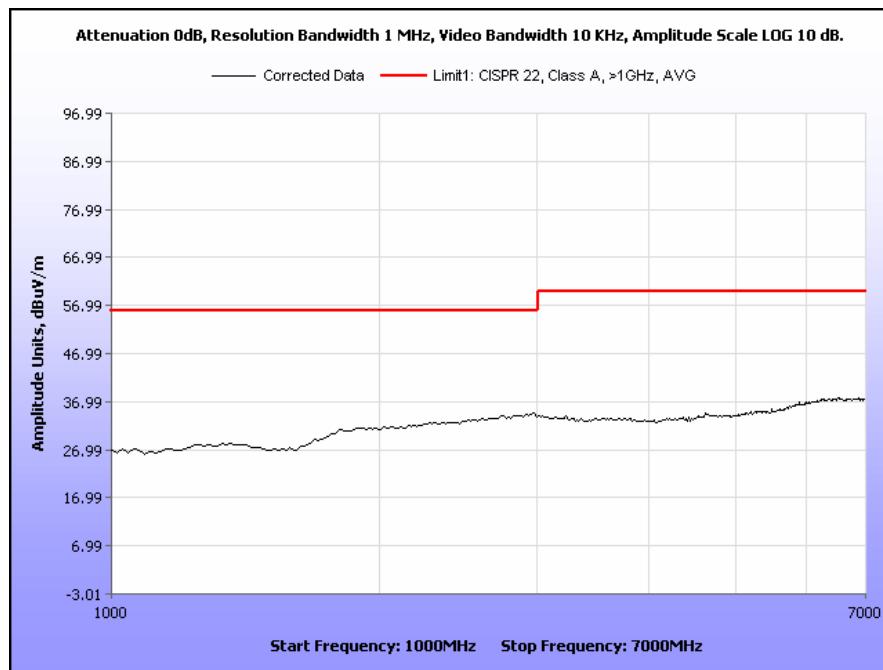

**Plot 7. Radiated Emissions, 1 GHz – 7 GHz, Average, ICES-003 Limits**

## IV. Electromagnetic Compatibility Criteria for Intentional Radiators

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:**

**§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:**

The EUT as tested is compliant the criteria of §15.203.

2.4 GHz – Professionally installed 5 dBi Omni antenna.

5.8 MHz – Professionally installed 6 dBi Omni antenna.

**Test Engineer(s):** Len Knight

**Test Date(s):** 07/06/11

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207(a) Conducted Emissions Limits

**Test Requirement(s):**

**§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 13. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:**

The EUT was placed on a 0.8 m-high wooden table inside a screen room. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with ANSI C63.4-2003 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz". The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter. For the purpose of this testing, the transmitter was turned on. Scans were performed with the transmitter on.

**Test Results:**

The EUT was compliant with this requirement.

**Test Engineer(s):**

Len Knight


**Test Date(s):**

07/06/11

### 15.207(a) Conducted Emissions Test Results, 2.4 GHz

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1544	49.7	0	49.7	65.76	-16.06	24.87	0	24.87	55.76	-30.89
0.5362	32.83	0	32.83	56	-23.17	21.65	0	21.65	46	-24.35
4.66	49.75	0.05	49.8	56	-6.2	45.43	0.05	45.48	46	-0.52
5.809	45.88	0.04	45.92	60	-14.08	42.6	0.04	42.64	50	-7.36
6.926	42.31	0.01	42.32	60	-17.68	37.12	0.01	37.13	50	-12.87
7.029	52.27	0.01	52.28	60	-7.72	46.26	0.01	46.27	50	-3.73

Table 14. Conducted Emissions, 15.207(a), Phase Line, Test Results, 2.4 GHz

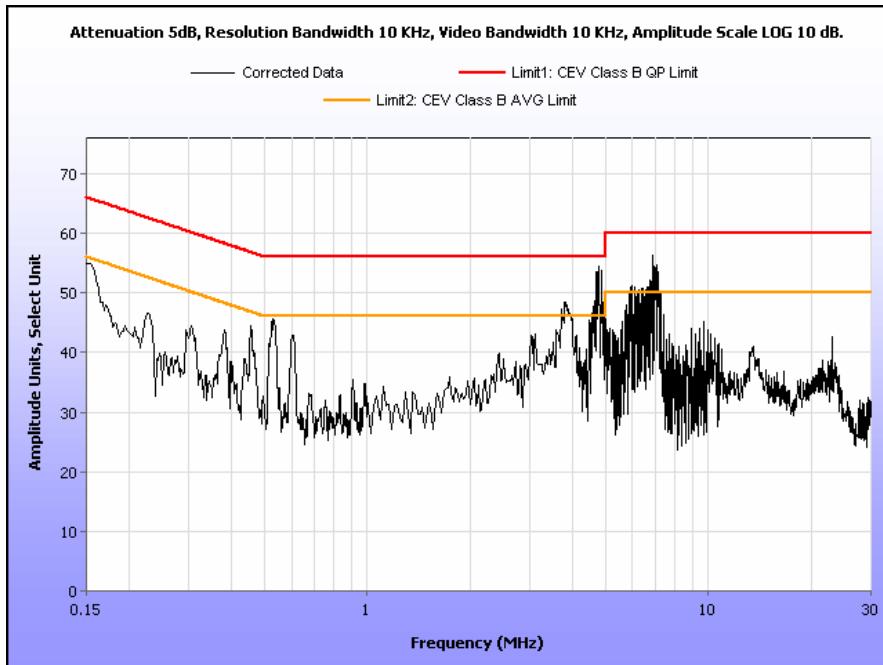


Plot 8. Conducted Emissions, 15.207(a), Phase Line, 2.4 GHz

### 15.207(a) Conducted Emissions Test Results, 2.4 GHz

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1544	49.44	0	49.44	65.76	-16.32	26.11	0	26.11	55.76	-29.65
0.535	32.73	0	32.73	56	-23.27	23.18	0	23.18	46	-22.82
3.805	43.04	0.01	43.05	56	-12.95	36.32	0.01	36.33	46	-9.67
4.713	49.82	0.05	49.87	56	-6.13	44.86	0.05	44.91	46	-1.09
6.099	45.94	0.03	45.97	60	-14.03	42.28	0.03	42.31	50	-7.69
7.14	52.77	0.01	52.78	60	-7.22	47.12	0.01	47.13	50	-2.87

Table 15. Conducted Emissions, 15.207(a), Neutral Line, Test Results, 2.4 GHz

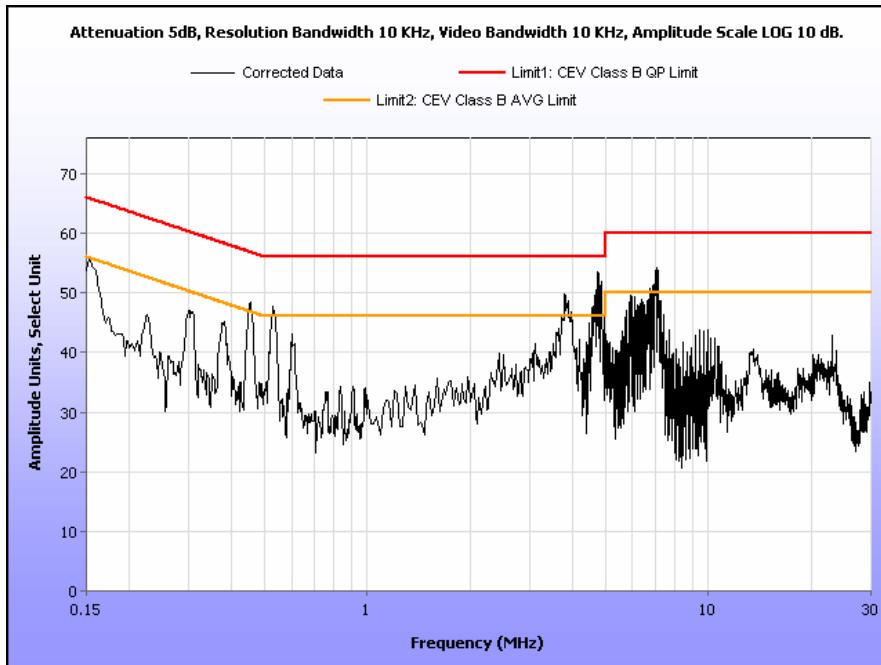


Plot 9. Conducted Emissions, 15.207(a), Neutral Line, 2.4 GHz

### 15.207(a) Conducted Emissions Test Results, 5.8 GHz

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1544	49.7	0	49.7	65.76	-16.06	24.87	0	24.87	55.76	-30.89
0.5362	32.83	0	32.83	56	-23.17	21.65	0	21.65	46	-24.35
4.66	49.75	0.05	49.8	56	-6.2	45.43	0.05	45.48	46	-0.52
5.809	45.88	0.04	45.92	60	-14.08	42.6	0.04	42.64	50	-7.36
6.926	42.31	0.01	42.32	60	-17.68	37.12	0.01	37.13	50	-12.87
7.029	52.27	0.01	52.28	60	-7.72	46.26	0.01	46.27	50	-3.73

Table 16. Conducted Emissions, 15.207(a), Phase Line, Test Results, 5.8 GHz

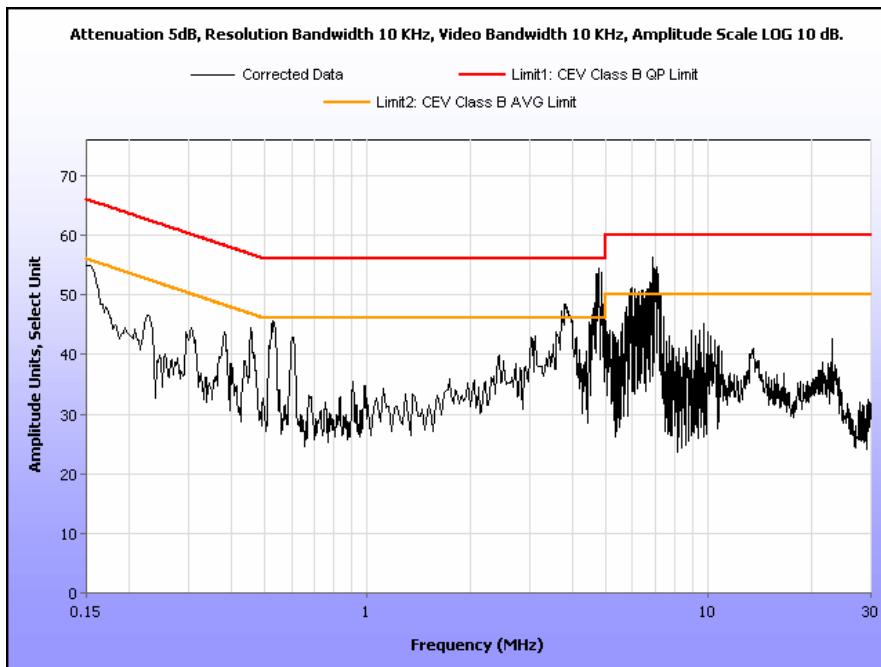


Plot 10. Conducted Emissions, 15.207(a), Phase Line, 5.8 GHz

### 15.207(a) Conducted Emissions Test Results, 5.8 GHz

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.1544	49.44	0	49.44	65.76	-16.32	26.11	0	26.11	55.76	-29.65
0.535	32.73	0	32.73	56	-23.27	23.18	0	23.18	46	-22.82
3.805	43.04	0.01	43.05	56	-12.95	36.32	0.01	36.33	46	-9.67
4.713	49.82	0.05	49.87	56	-6.13	44.86	0.05	44.91	46	-1.09
6.099	45.94	0.03	45.97	60	-14.03	42.28	0.03	42.31	50	-7.69
7.14	52.77	0.01	52.78	60	-7.22	47.12	0.01	47.13	50	-2.87

Table 17. Conducted Emissions, 15.207(a), Neutral Line, Test Results, 5.8 GHz

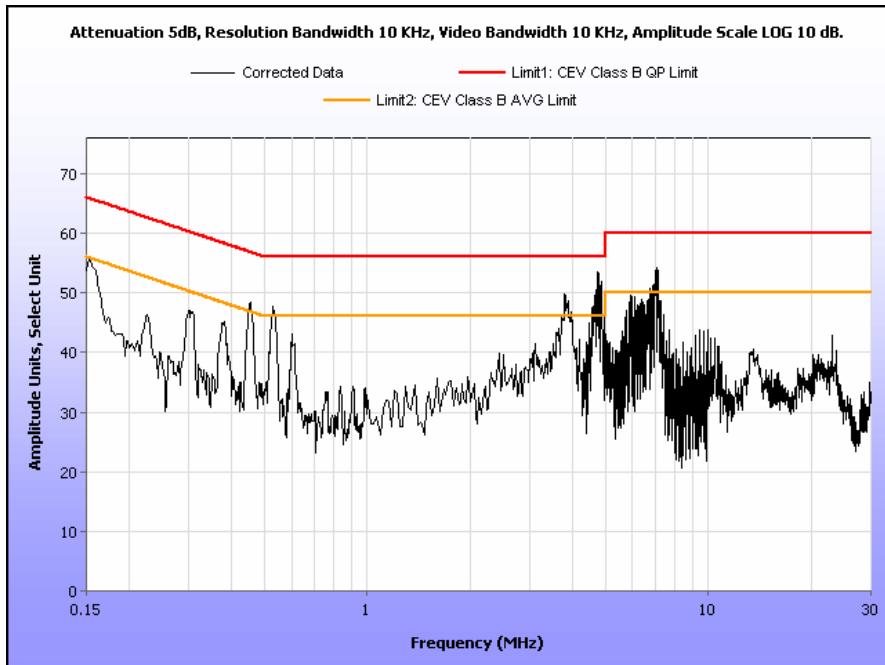

Plot 11. Conducted Emissions, 15.207(a), Neutral Line, 5.8 GHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a)(2) 6 dB and 99% Bandwidth

**Test Requirements:** **§ 15.247(a)(2):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:


For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

**Test Procedure:** The transmitter was set to the mid channel at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW > RBW$ . The 6 dB Bandwidth was measured and recorded. The measurements were repeated at the low and high channels.

**Test Results** Equipment complies with § 15.247 (a). The 6 dB and 99% Bandwidth was determined from the plots on the following pages.


**Test Engineer(s):** Zijun Tong

**Test Date(s):** 01/29/13

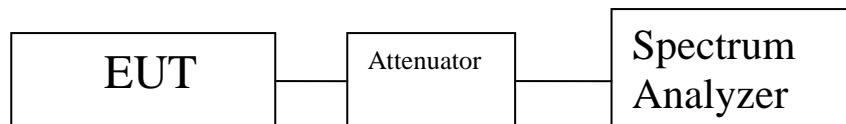


**Block Diagram 1. Occupied Bandwidth Test Setup**


## Electromagnetic Compatibility Criteria for Intentional Radiators

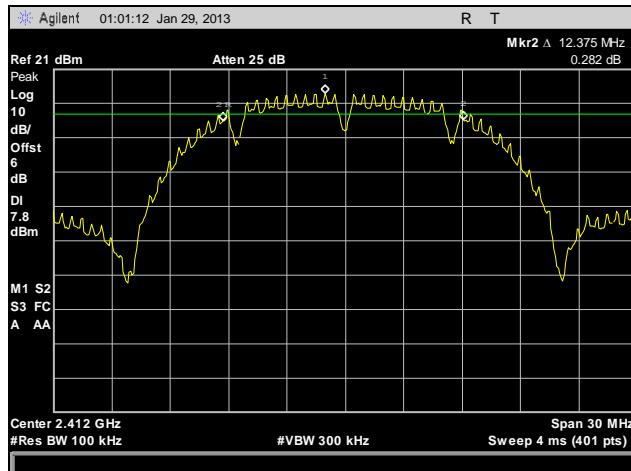


Plot 12. Occupied Bandwidth, 802.11b, Low Channel, FCC

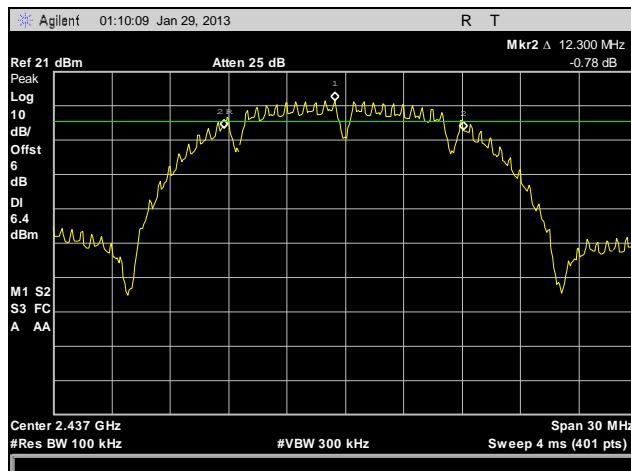


Plot 13. Occupied Bandwidth, 802.11b, Mid Channel, FCC

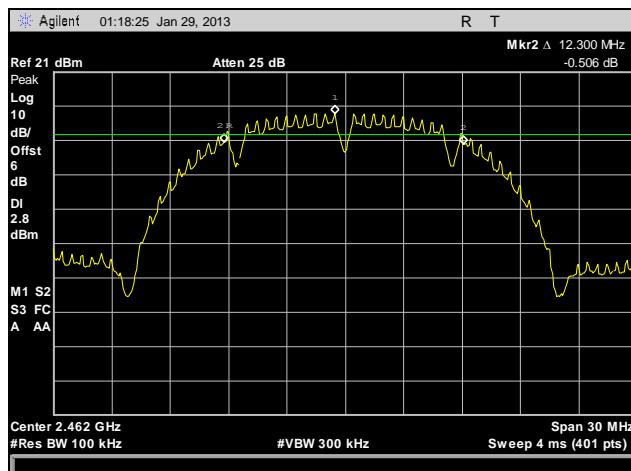


Plot 14. Occupied Bandwidth, 802.11b, High Channel, FCC

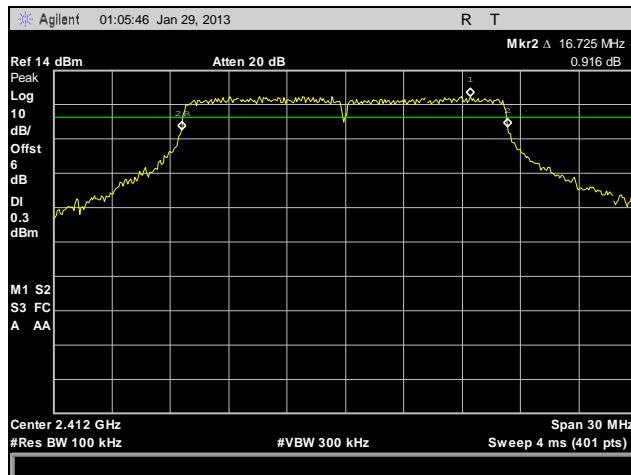

Plot 15. Occupied Bandwidth, 802.11g, Low Channel, FCC

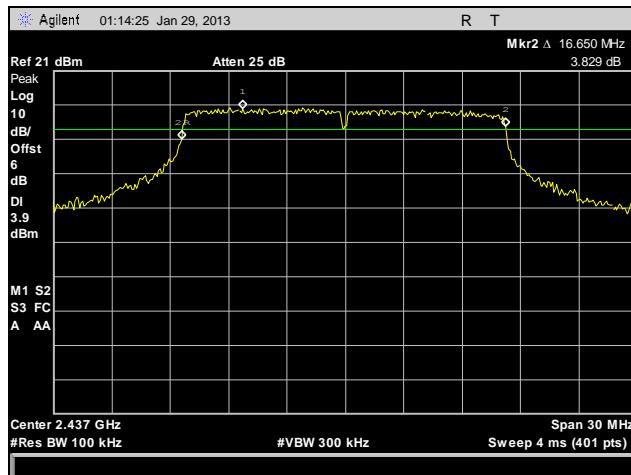


Plot 16. Occupied Bandwidth, 802.11g, Mid Channel, FCC

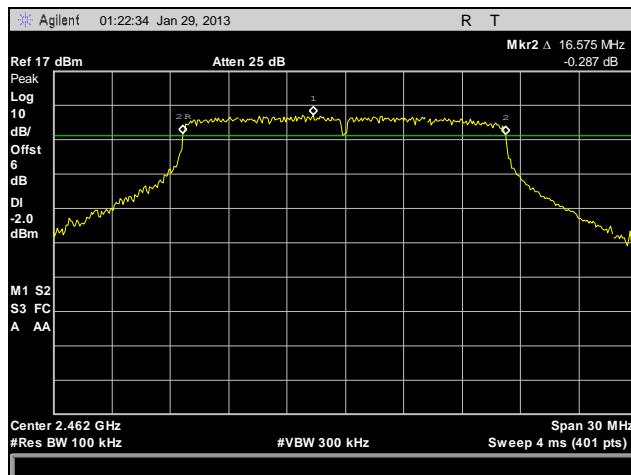


Plot 17. Occupied Bandwidth, 802.11g, High Channel, FCC


## Electromagnetic Compatibility Criteria for Intentional Radiators

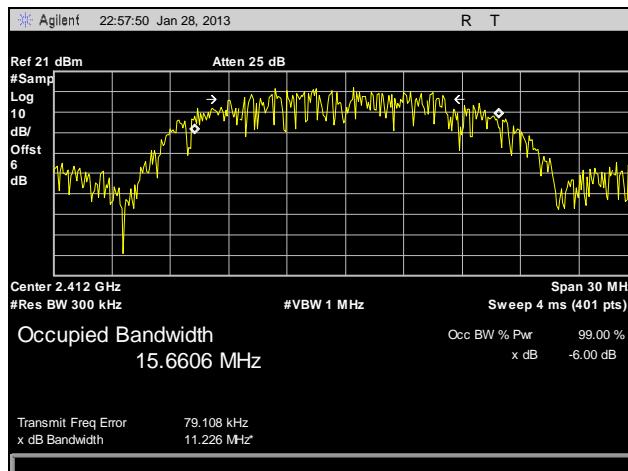


Plot 18. Occupied Bandwidth, 802.11b, Low Channel, IC

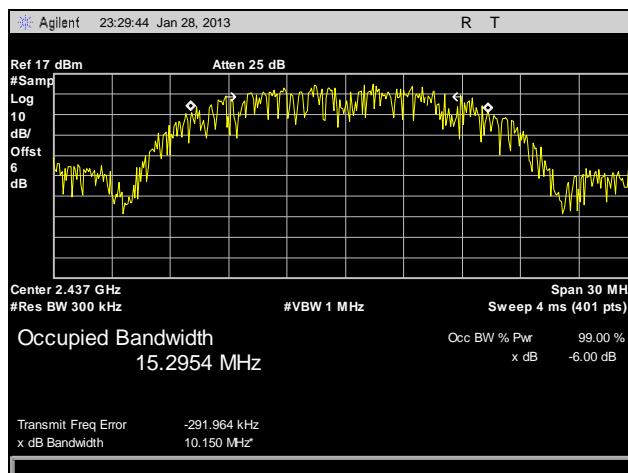


Plot 19. Occupied Bandwidth, 802.11b, Mid Channel, IC

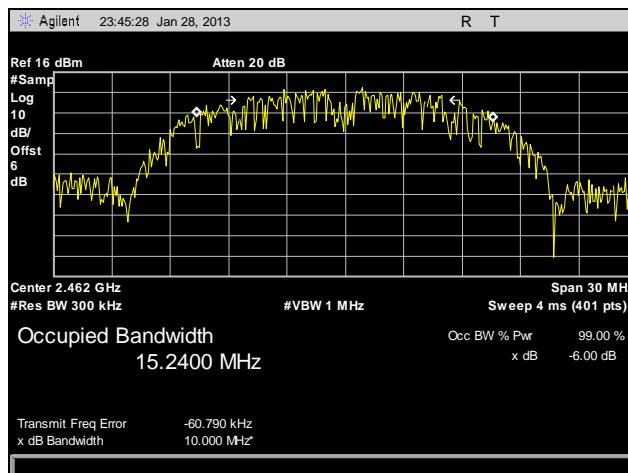


Plot 20. Occupied Bandwidth, 802.11b, High Channel, IC

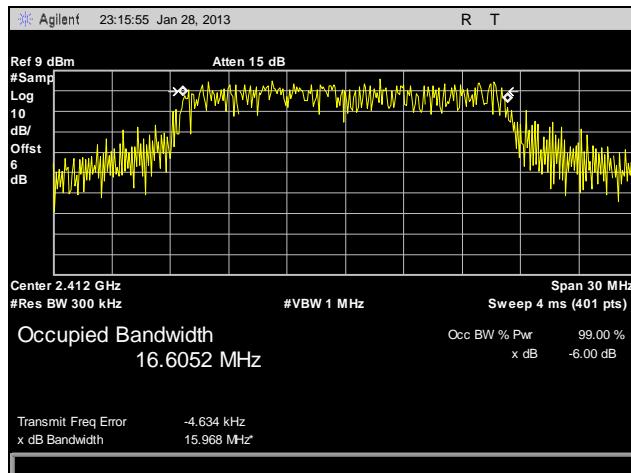

Plot 21. Occupied Bandwidth, 802.11g, Low Channel, IC

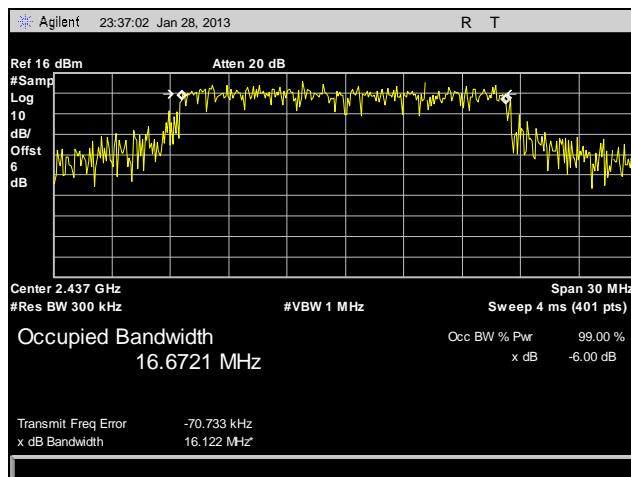


Plot 22. Occupied Bandwidth, 802.11g, Mid Channel, IC

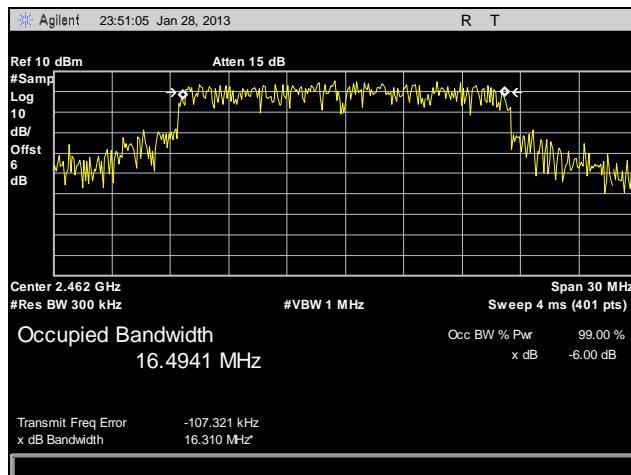


Plot 23. Occupied Bandwidth, 802.11g, High Channel, IC


## Electromagnetic Compatibility Criteria for Intentional Radiators

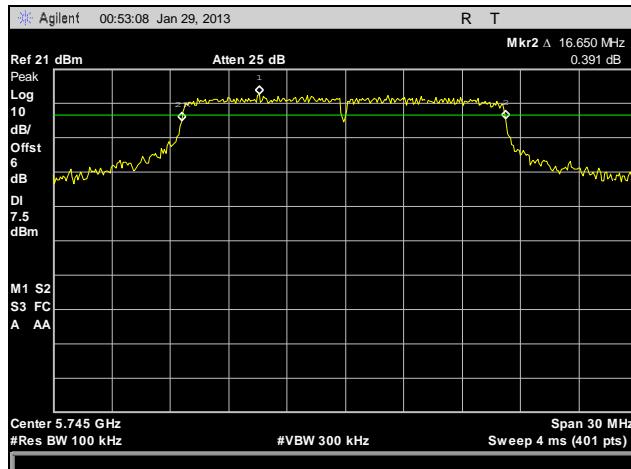


Plot 24. Occupied Bandwidth, Channel 149, FCC

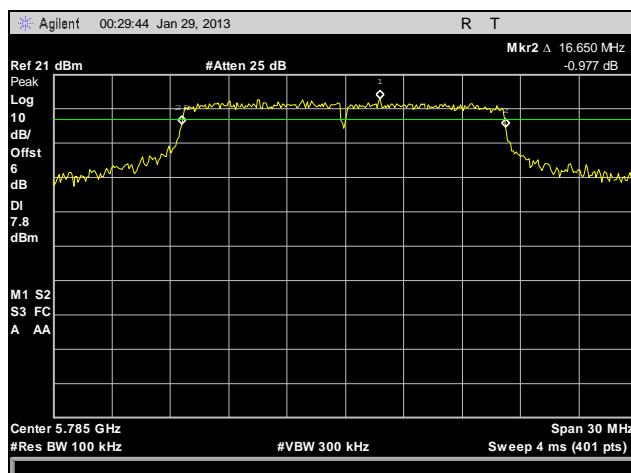


Plot 25. Occupied Bandwidth, Channel 157, FCC

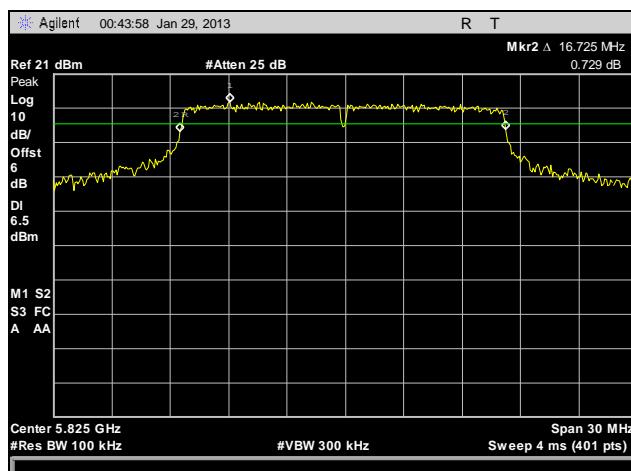


Plot 26. Occupied Bandwidth, Channel 165, FCC

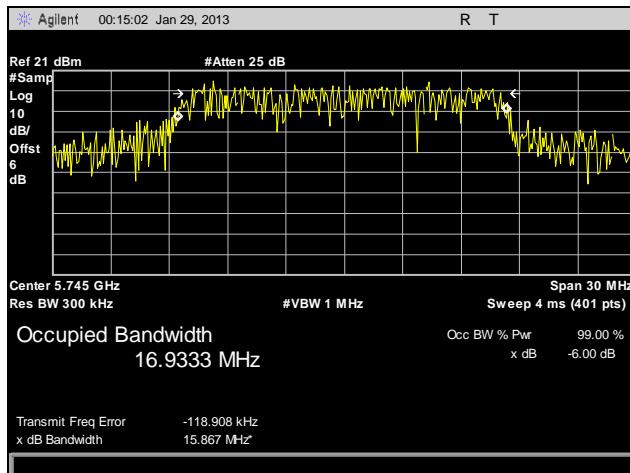

**Plot 27. Occupied Bandwidth, Channel 149, IC**

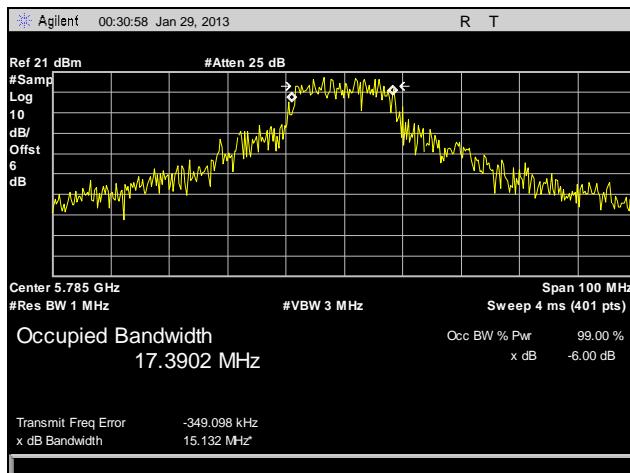

**Plot 28. Occupied Bandwidth, Channel 157, IC**

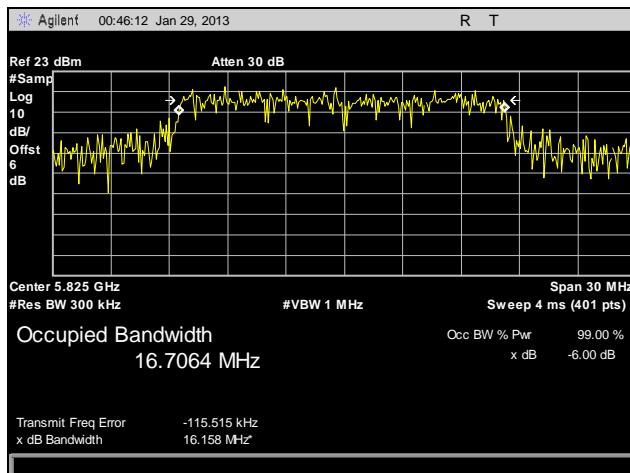

**Plot 29. Occupied Bandwidth, Channel 165, IC**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output

**Test Requirements:** **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725-5850	1.000

**Table 18. Output Power Requirements from §15.247(b)**

**§15.247(c):** if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 18, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band and using a point to point application may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.


Fixed, point-to-point operation excludes the use of point-to-multipoint systems, Omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

**Test Procedure:** The transmitter was connected to a calibrated spectrum analyzer. The EUT was measured at the low, mid and high channels of each band at the maximum power level.

**Test Results:** The EUT was compliant with this requirement.

**Test Engineer(s):** Len Knight

**Test Date(s):** 07/06/11

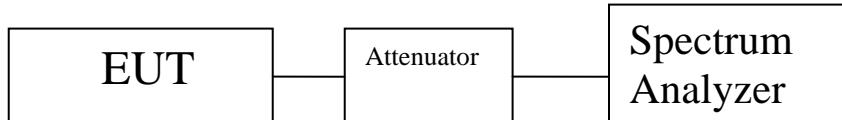

**Figure 2. Peak Power Output Test Setup**

## Peak Power Output Test Results

Peak Conducted Output Power		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	22.87
Mid	2437	25.72
High	2462	20.80

Table 19. Peak Power Output, Test Results, b Mode, 2.4 GHz


Peak Conducted Output Power		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low	2412	25.24
Mid	2437	27.65
High	2462	22.31

Table 20. Peak Power Output, Test Results, g Mode, 2.4 GHz


Peak Conducted Output Power		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power dBm
Low (Ch.149)	5745	27.84
Mid (Ch. 157)	5785	28.14
High (Ch. 165)	5825	29.01

Table 21. Peak Power Output, Test Results, a Mode, 5.8 GHz


## Peak Power Output Test Results, 2.4 GHz

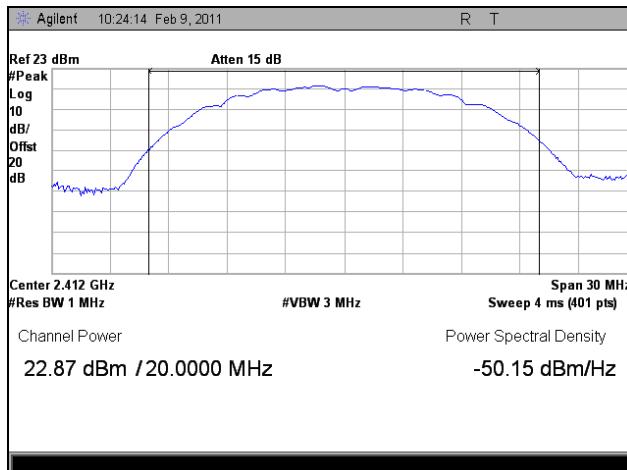


Plot 30. Peak Power Output, b Mode, Channel 1, 2.4 GHz

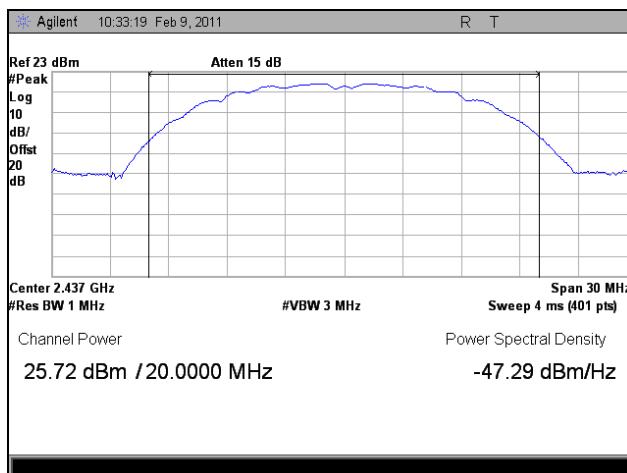


Plot 31. Peak Power Output, b Mode, Channel 6, 2.4 GHz

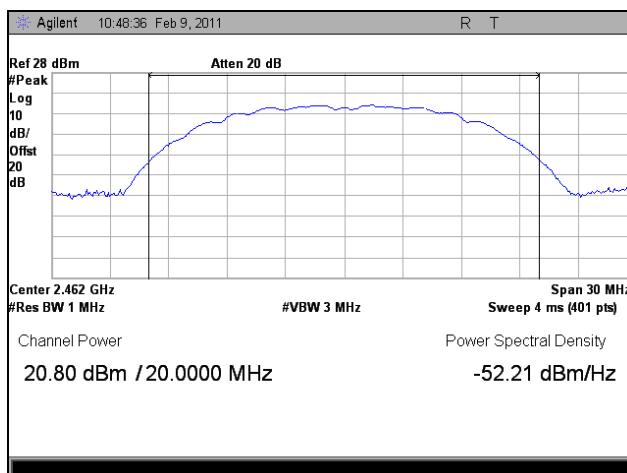


Plot 32. Peak Power Output, b Mode, Channel 11, 2.4 GHz

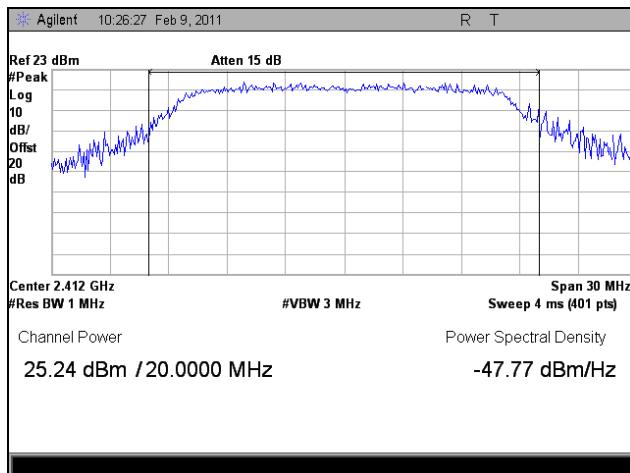

**Plot 33. Peak Power Output, g Mode, Channel 1, 2.4 GHz**

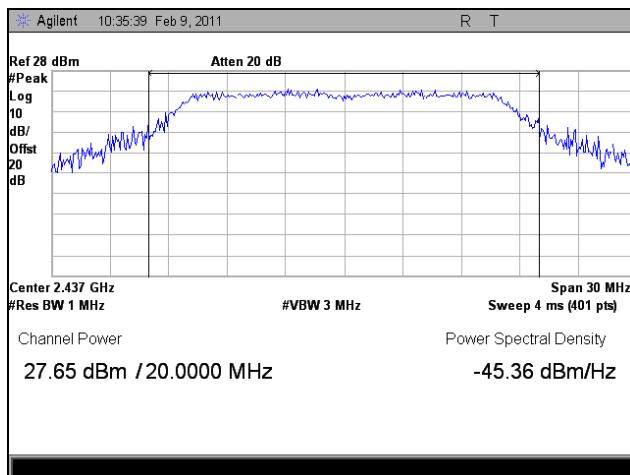


**Plot 34. Peak Power Output, g Mode, Channel 6, 2.4 GHz**

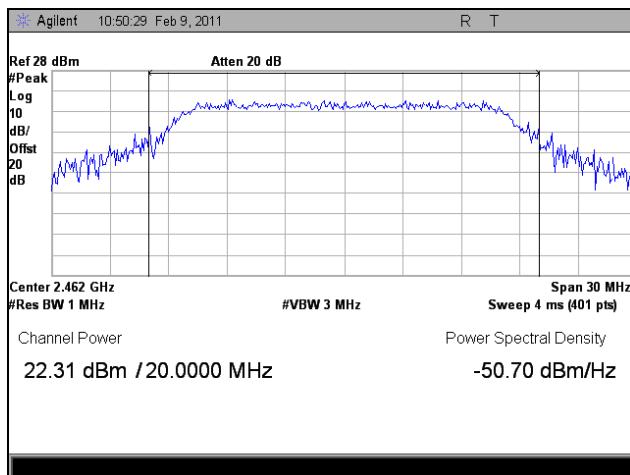


**Plot 35. Peak Power Output, g Mode, Channel 11, 2.4 GHz**


## Peak Power Output Test Results, 5.8 GHz

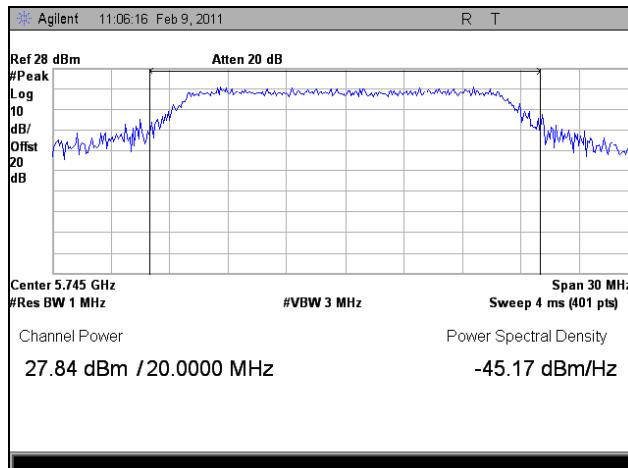

**Plot 36. Peak Power Output, Channel 149, 5.8 GHz**

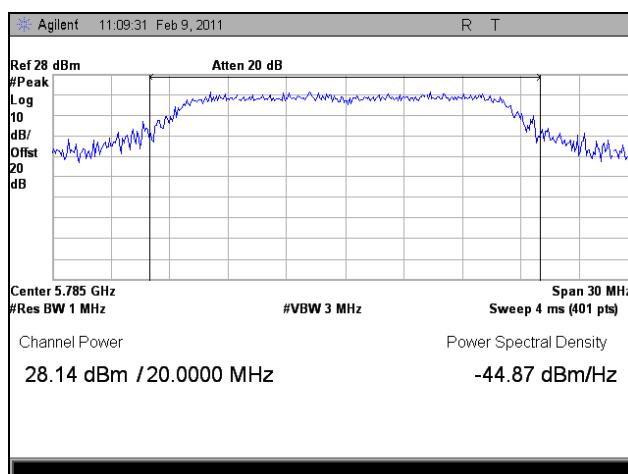

**Plot 37. Peak Power Output, Channel 157, 5.8 GHz**

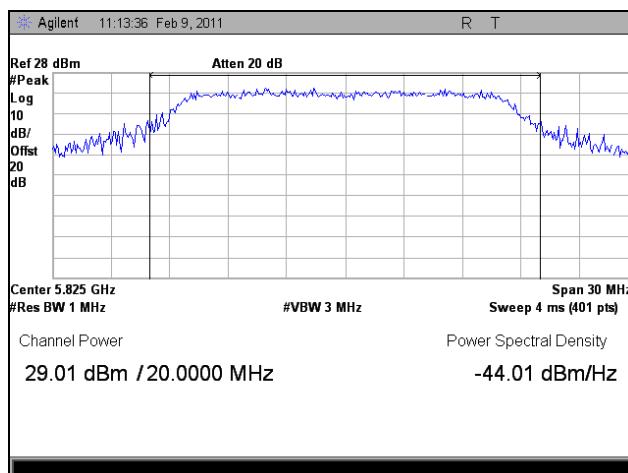

**Plot 38. Peak Power Output, Channel 165, 5.8 GHz**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Radiated Spurious Emissions Requirements and Band Edge

**Test Requirements:** §15.247(d); §15.205: Emissions outside the frequency band.

**§15.247(d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**§15.205(a):** Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	( <sup>2</sup> )

**Table 22. Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6

**Test Requirement(s):** § 15.209 (a): Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in Table 23.

Frequency (MHz)	§ 15.209(a), Radiated Emission Limits (dB $\mu$ V) @ 3m
30 - 88	40.00
88 - 216	43.50
216 - 960	46.00
Above 960	54.00

**Table 23. Radiated Emissions Limits Calculated from FCC Part 15, § 15.209 (a)**

**Test Procedures:** The transmitter was turned on. Measurements were performed of the low, mid and high Channels. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line. Only noise floor was measured above 18 GHz. Emissions below 1 GHz that appear to be failing are from the digital portion and/or do not fall in the restricted band.

**Test Results:** The EUT is compliant with this requirement. Failing emissions below 1 GHz are from digital circuitry and/or do not fall in restricted bands.

**Test Engineer(s):** Len Knight

**Test Date(s):** 07/06/11

## Harmonic Emissions Requirements – Radiated

Mode	Channel 1 (MHz)	Measured Frequency (GHz)	Measured corrected amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
b mode	low	1.637	31.69	54	-22.31	Peak	Peak value below avg. limit
		2.275	44.76	54	-9.24	Peak	Peak value below avg. limit
	mid	1.63	34.08	54	-19.92	Peak	Peak value below avg. limit
		2.24	51.87	54	-2.13	Peak	Peak value below avg. limit
		2.74	42.12	54	-11.88	Peak	Peak value below avg. limit
	high	1.64	32.76	54	-21.24	Peak	Peak value below avg. limit
		2.24	44.36	54	-9.64	Peak	Peak value below avg. limit
		2.76	34.1	54	-19.9	Peak	Peak value below avg. limit
g mode	low	2.27	43.23	54	-10.77	Peak	Peak value below avg. limit
	mid	1.63	31.39	54	-22.61	Peak	Peak value below avg. limit
		2.24	52.98	54	-1.02	Peak	Peak value below avg. limit
		2.74	44.59	54	-9.41	Peak	Peak value below avg. limit
	high	1.64	28.91	54	-25.09	Peak	Peak value below avg. limit
		2.26	45.47	54	-8.53	Peak	Peak value below avg. limit
		2.76	34.14	54	-19.86	Peak	Peak value below avg. limit

**Table 24. Radiated Harmonic Emissions, 2.4 GHz**

Note: All other emissions were measured at the noise floor of the spectrum analyzer.

Mode	Channel	Measured Frequency (GHz)	Measured corrected amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
a mode	149	11.51	45.3	54	-8.7	Peak	Peak value below avg limit
		17.257	42.74	54	-11.26	Avg	Pass
		17.257	59.97	74	-14.03	Peak	Pass
		22.987	49.71	54	-4.29	Peak	Peak value below avg limit
	157	11.592	50.96	54	-3.04	Peak	Peak value below avg limit
		17.367	41.48	54	-12.52	Avg	Pass
		17.367	59.75	74	-14.25	Peak	Pass
	165	11.675	46.6	54	-7.4	Avg	Pass
		11.675	54.82	74	-19.18	Peak	Pass
		17.477	45.33	54	-8.67	Avg	Pass
		17.477	59.23	74	-14.77	Peak	Pass


**Table 25. Radiated Harmonic Emissions, 5.8 GHz**

Note: All other emissions were measured at the noise floor of the spectrum analyzer.


## Radiated Spurious Emissions Test Results, 2.4 GHz




Plot 39. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, b Mode, 2.4 GHz

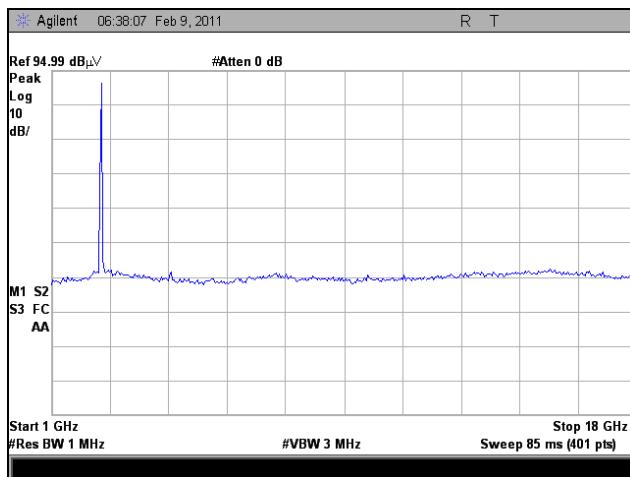


Plot 40. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, b Mode, 2.4 GHz

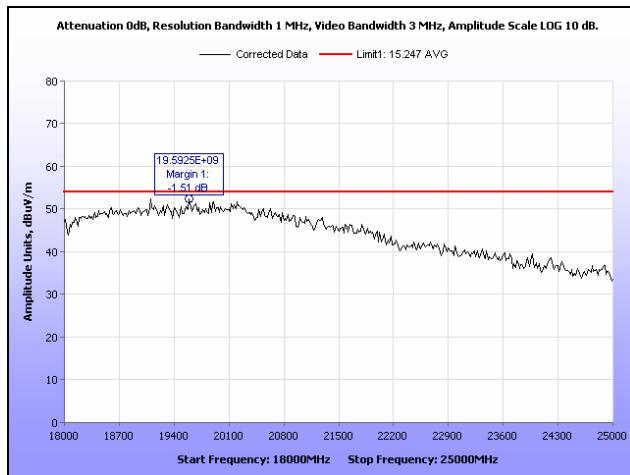


Plot 41. Radiated Spurious Emissions, Low Channel, 18 GHz – 25 GHz, b Mode, 2.4 GHz

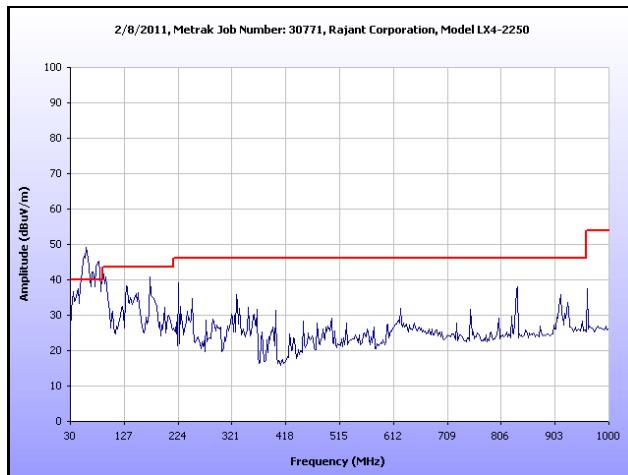


Plot 42. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, b Mode, 2.4 GHz

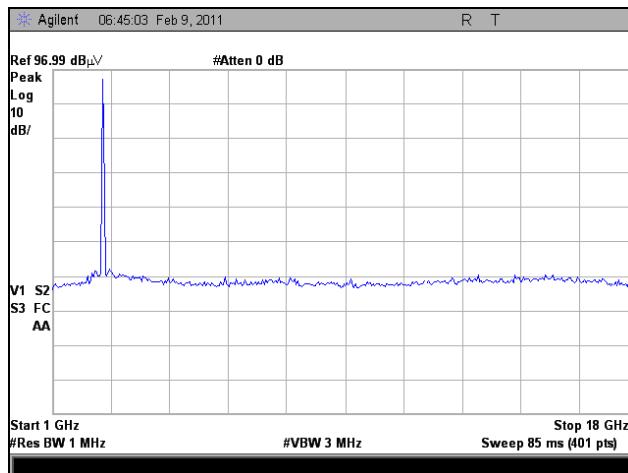


Plot 43. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, b Mode, 2.4 GHz

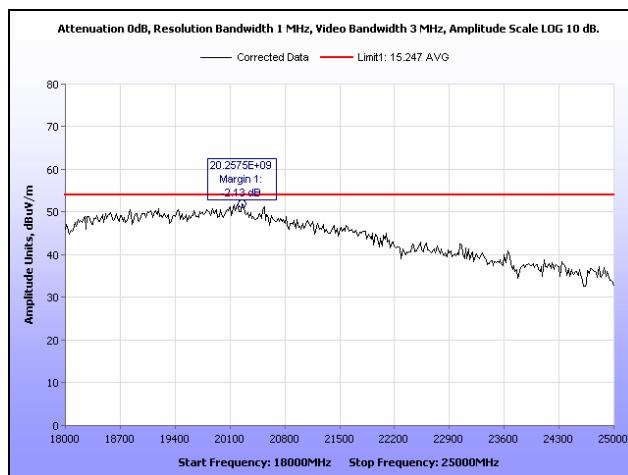


Plot 44. Radiated Spurious Emissions, Mid Channel, 18 GHz – 25 GHz, b Mode, 2.4 GHz

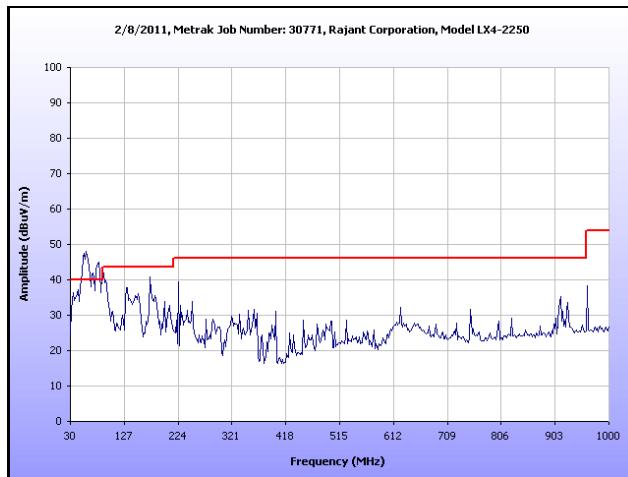


**Plot 45. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, b Mode, 2.4 GHz**

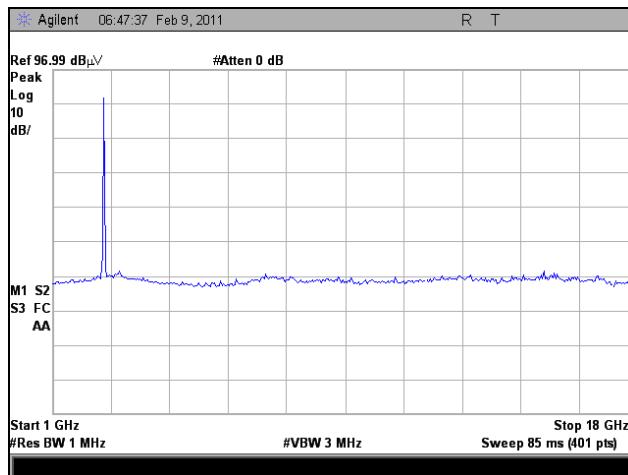


**Plot 46. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, b Mode, 2.4 GHz**

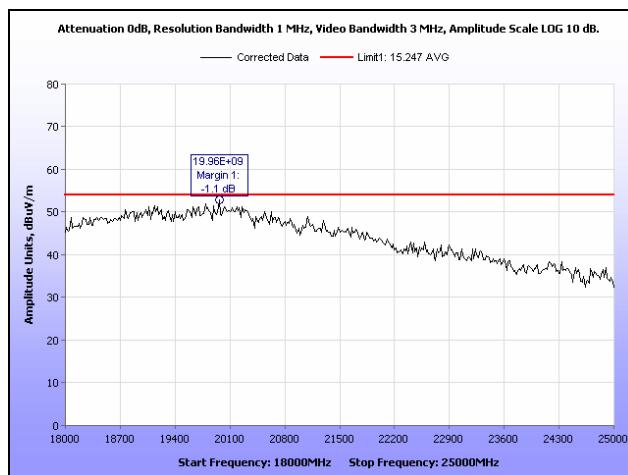


**Plot 47. Radiated Spurious Emissions, High Channel, 18 GHz – 25 GHz, b Mode, 2.4 GHz**

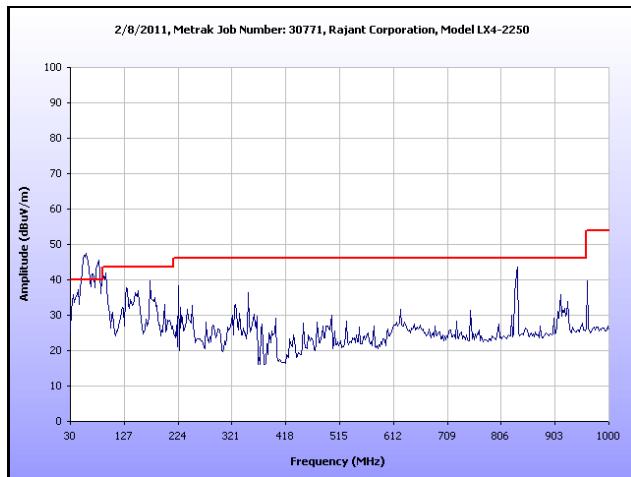


**Plot 48. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, g Mode, 2.4 GHz**

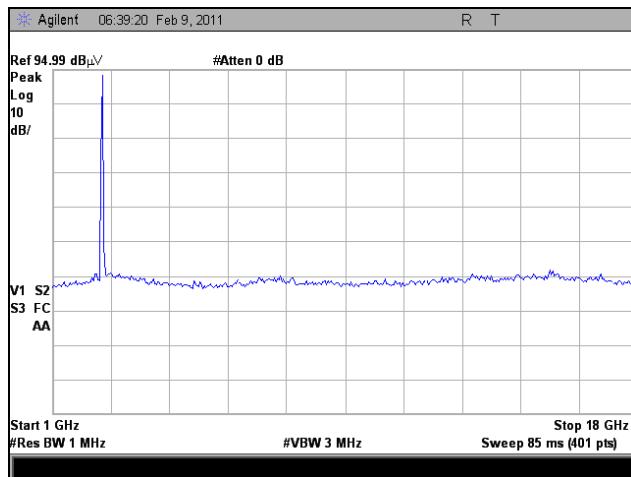


**Plot 49. Radiated Spurious Emissions, Low Channel, 1 GHz – 18 GHz, g Mode, 2.4 GHz**

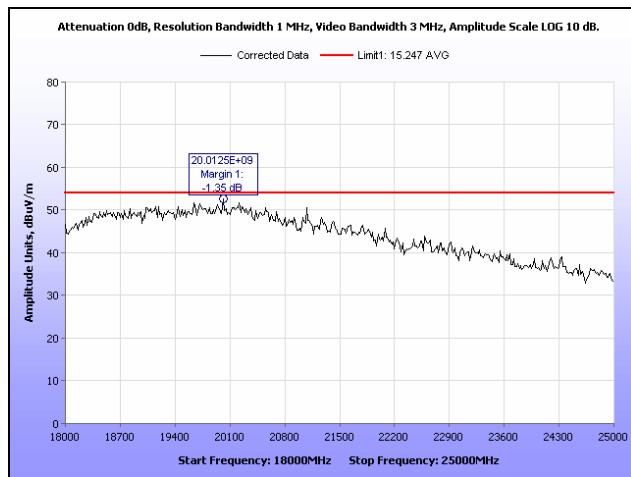


**Plot 50. Radiated Spurious Emissions, Low Channel, 18 GHz – 25 GHz, g Mode, 2.4 GHz**

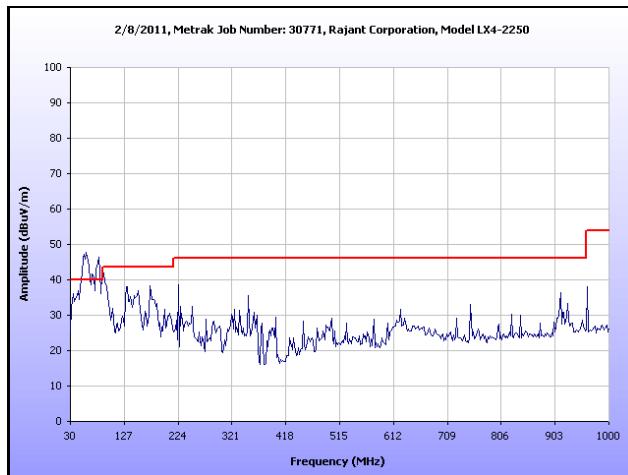


**Plot 51. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, g Mode, 2.4 GHz**

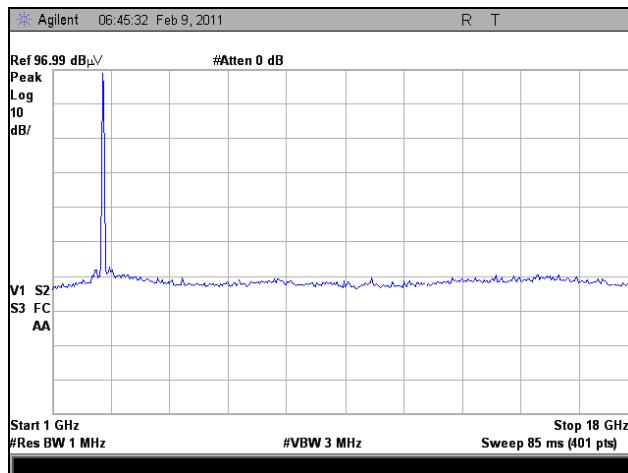


**Plot 52. Radiated Spurious Emissions, Mid Channel, 1 GHz – 18 GHz, g Mode, 2.4 GHz**

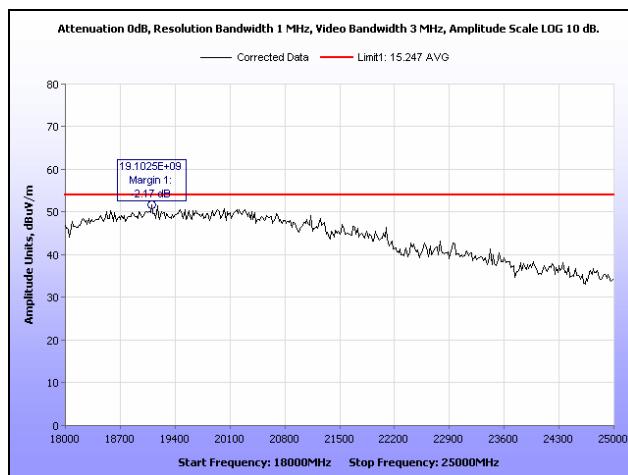


**Plot 53. Radiated Spurious Emissions, Mid Channel, 18 GHz – 25 GHz, g Mode, 2.4 GHz**

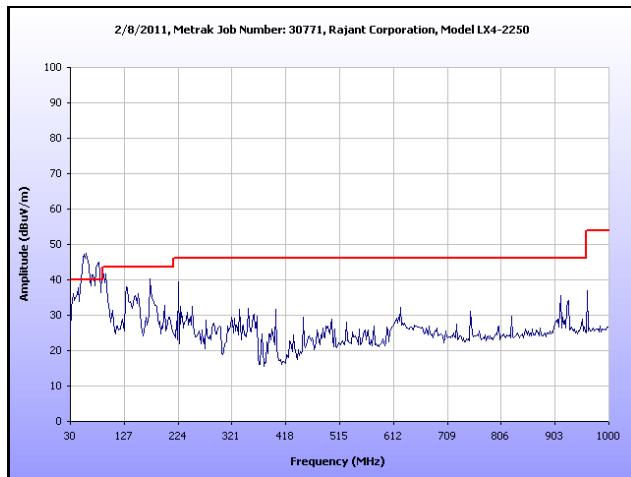

**Plot 54. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, g Mode, 2.4 GHz**

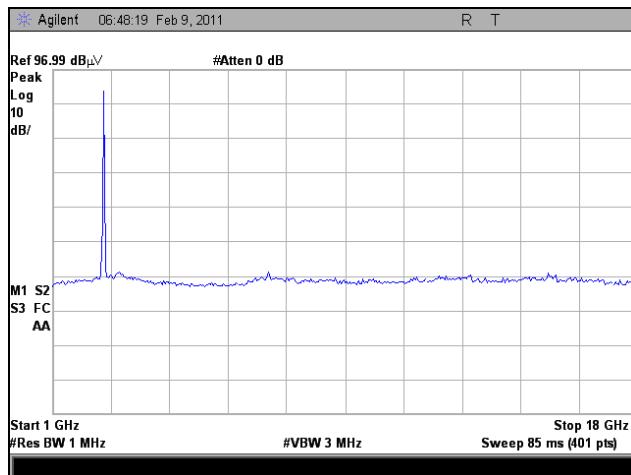


**Plot 55. Radiated Spurious Emissions, High Channel, 1 GHz – 18 GHz, g Mode, 2.4 GHz**

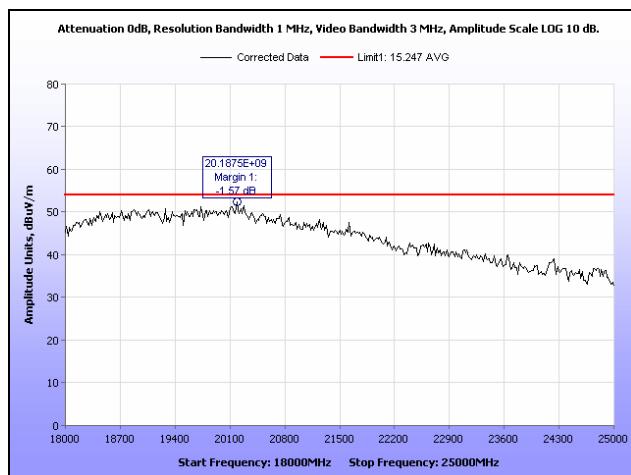

**Plot 56. Radiated Spurious Emissions, High Channel, 18 GHz – 25 GHz, g Mode, 2.4 GHz**


## Radiated Spurious Emissions Test Results, 5.8 GHz

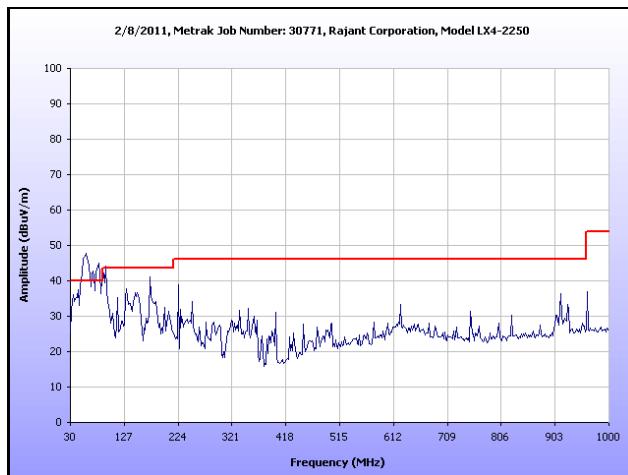


**Plot 57. Radiated Spurious Emissions, Low Channel, 30 MHz – 1 GHz, a Mode, 5.8 GHz**




**Plot 58. Radiated Spurious Emissions, Low Channel, 1 GHz – 6 GHz, Peak Detector, a Mode, 5.8 GHz**

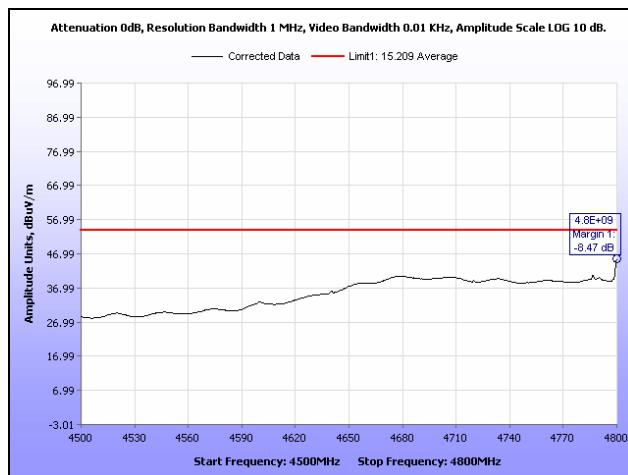


**Plot 59. Radiated Spurious Emissions, Low Channel, 4.5 GHz – 4.8 GHz, Average, a Mode, 5.8 GHz**

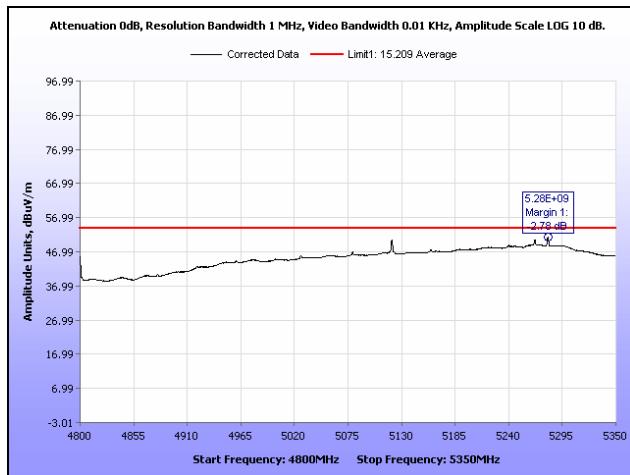


**Plot 60. Radiated Spurious Emissions, Low Channel, 4.8 GHz – 5.35 GHz, Average, a Mode, 5.8 GHz**

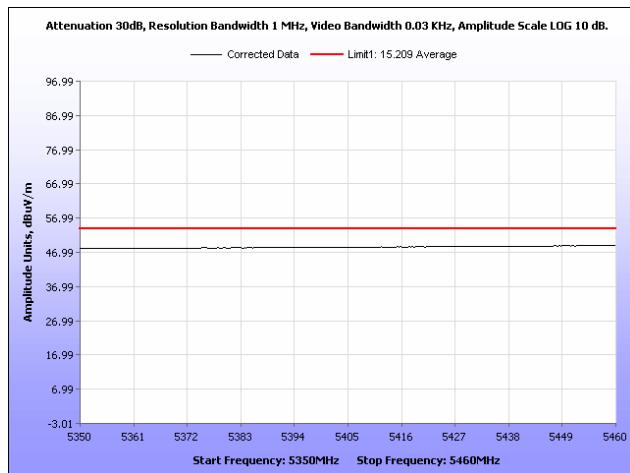


**Plot 61. Radiated Spurious Emissions, Low Channel, 5.35 GHz – 5.46 GHz, Average, a Mode, 5.8 GHz**

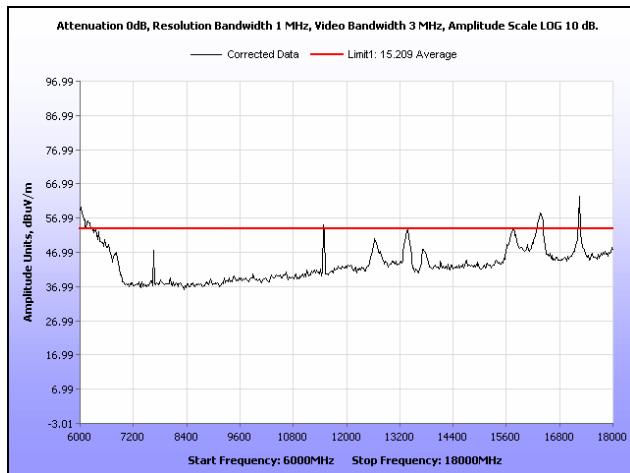


**Plot 62. Radiated Spurious Emissions, Low Channel, 6 GHz – 18 GHz, Peak Detector, a Mode, 5.8 GHz**

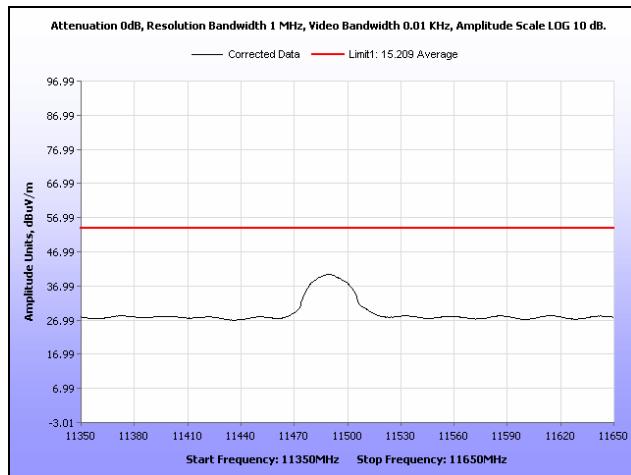


**Plot 63. Radiated Spurious Emissions, Low Channel, 11.35 GHz – 11.65 GHz, Average, a Mode, 5.8 GHz**

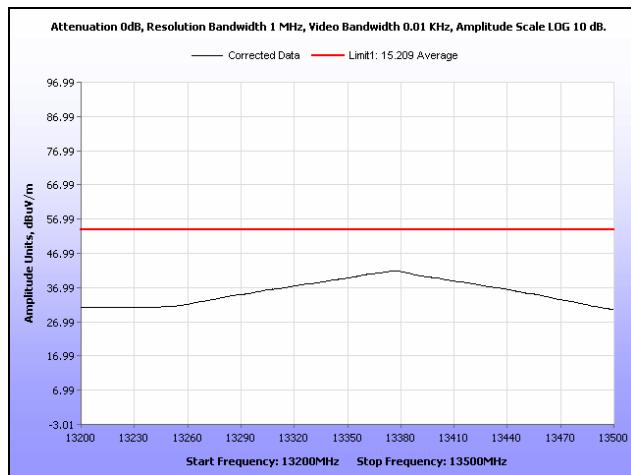


**Plot 64. Radiated Spurious Emissions, Low Channel, 13.2 GHz – 13.5 GHz, Average, a Mode, 5.8 GHz**

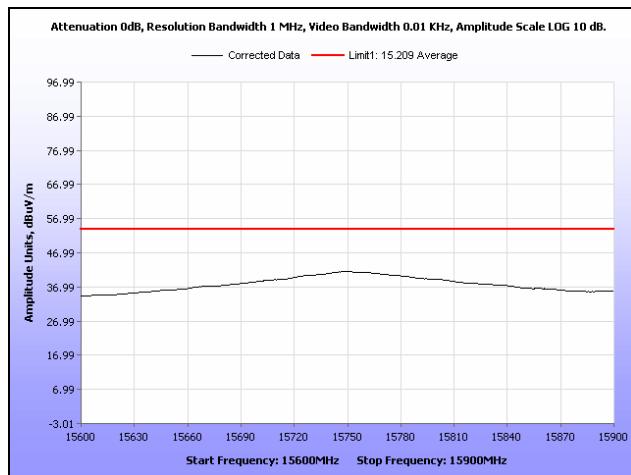


**Plot 65. Radiated Spurious Emissions, Low Channel, 15.6 GHz – 15.9 GHz, Average, a Mode, 5.8 GHz**

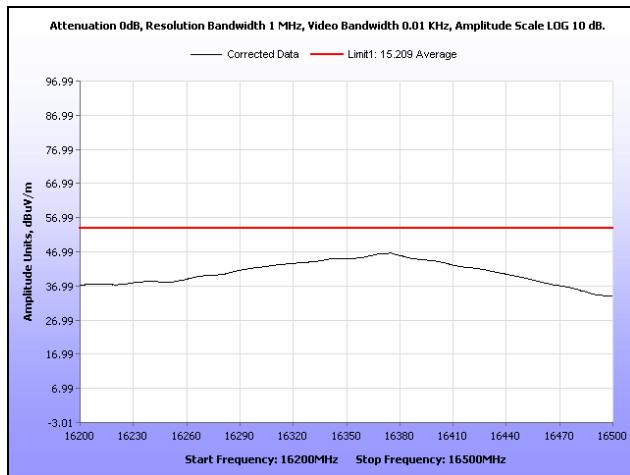


**Plot 66. Radiated Spurious Emissions, Low Channel, 16.2 GHz – 16.5 GHz, Average, a Mode, 5.8 GHz**

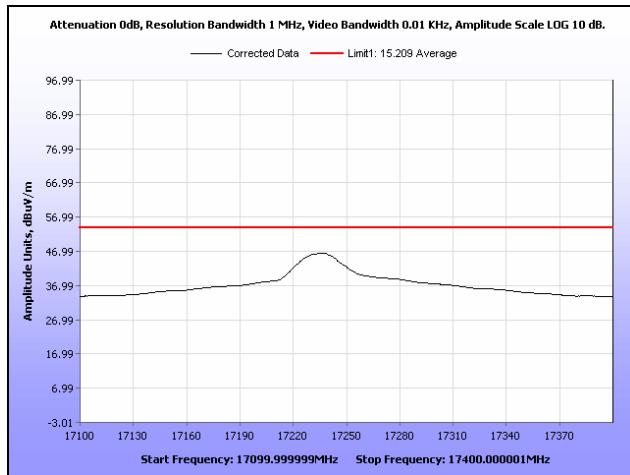


**Plot 67. Radiated Spurious Emissions, Low Channel, 17.1 GHz – 17.4 GHz, Average, a Mode, 5.8 GHz**

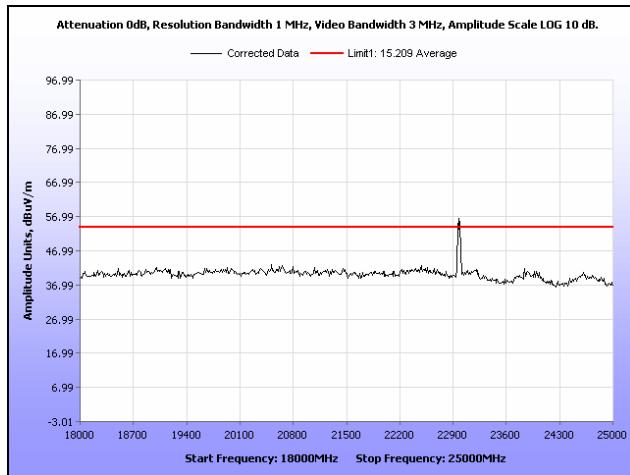


**Plot 68. Radiated Spurious Emissions, Low Channel, 18 GHz – 25 GHz, Peak Detector, a Mode, 5.8 GHz**

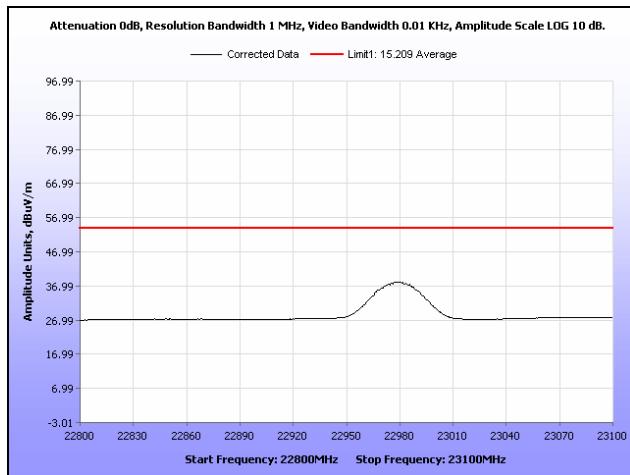


**Plot 69. Radiated Spurious Emissions, Low Channel, 22.8 GHz – 23.1 GHz, Average, a Mode, 5.8 GHz**

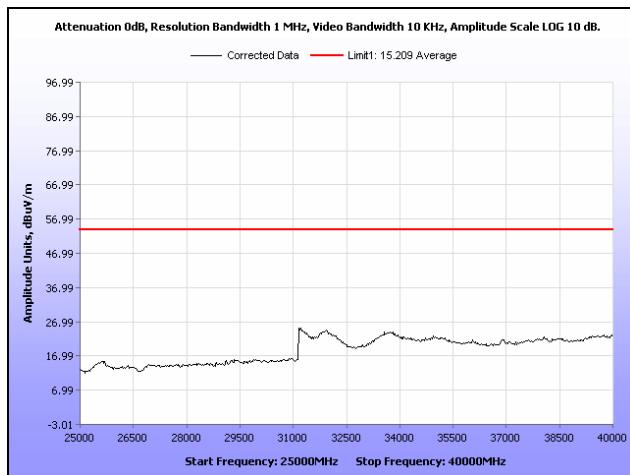


**Plot 70. Radiated Spurious Emissions, Low Channel, 25 GHz – 40 GHz, Average, a Mode, 5.8 GHz**

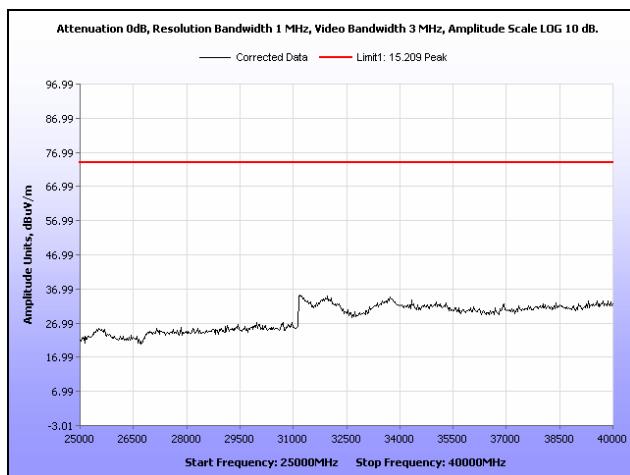


**Plot 71. Radiated Spurious Emissions, Low Channel, 25 GHz – 40 GHz, Peak, a Mode, 5.8 GHz**

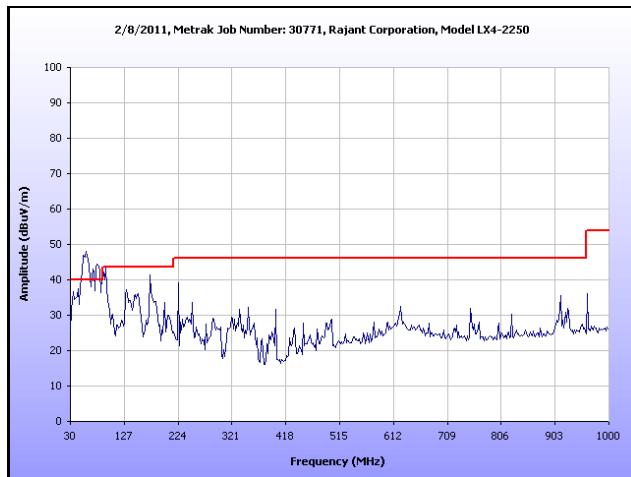


**Plot 72. Radiated Spurious Emissions, Mid Channel, 30 MHz – 1 GHz, a Mode, 5.8 GHz**

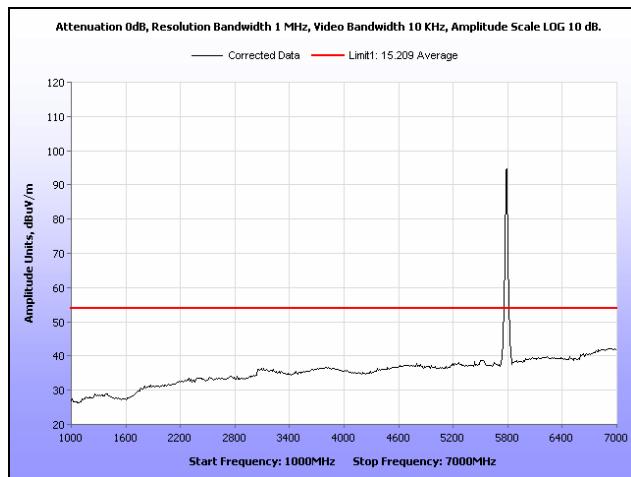


**Plot 73. Radiated Spurious Emissions, Mid Channel, 1 GHz – 7 GHz, Average, a Mode, 5.8 GHz**

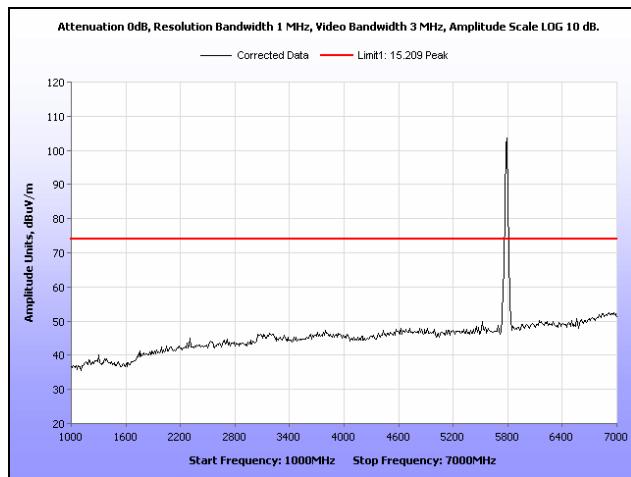


**Plot 74. Radiated Spurious Emissions, Mid Channel, 1 GHz – 7 GHz, Peak, a Mode, 5.8 GHz**

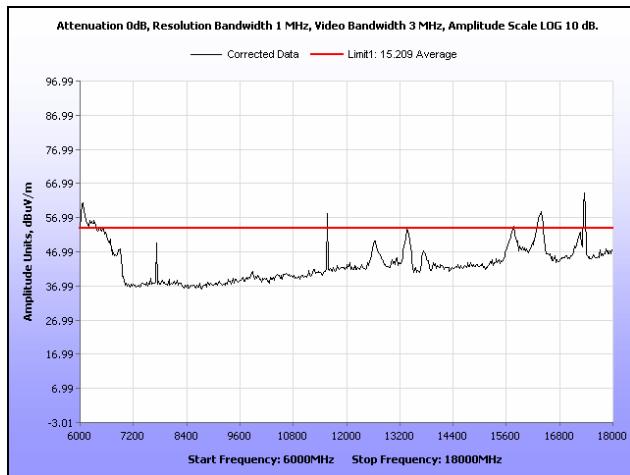


**Plot 75. Radiated Spurious Emissions, Mid Channel, 6 GHz – 18 GHz, Peak Detector, a Mode, 5.8 GHz**

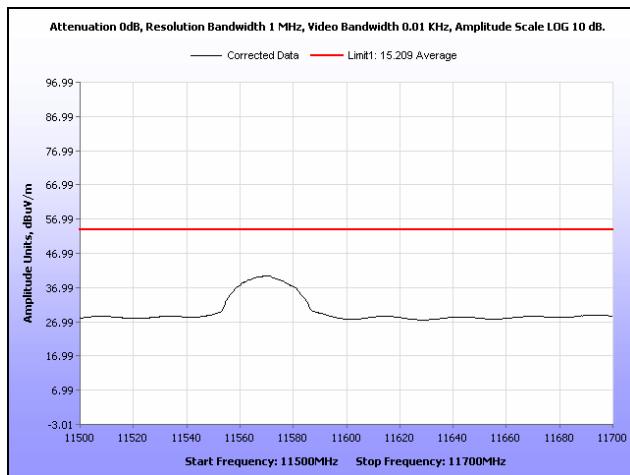


**Plot 76. Radiated Spurious Emissions, Mid Channel, 11.5 GHz – 11.7 GHz, Average, a Mode, 5.8 GHz**

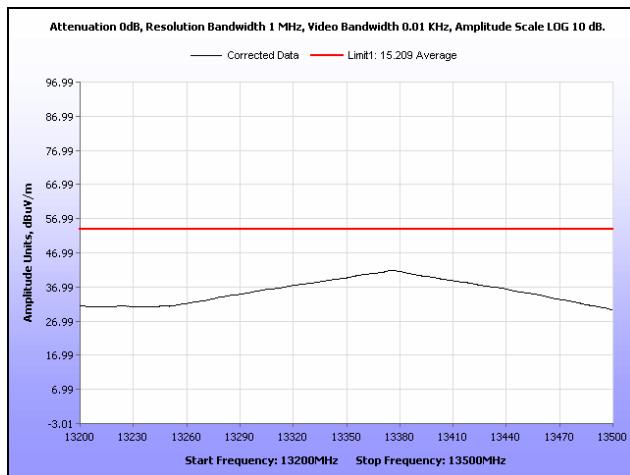


**Plot 77. Radiated Spurious Emissions, Mid Channel, 13.2 GHz – 13.5 GHz, Average, a Mode, 5.8 GHz**

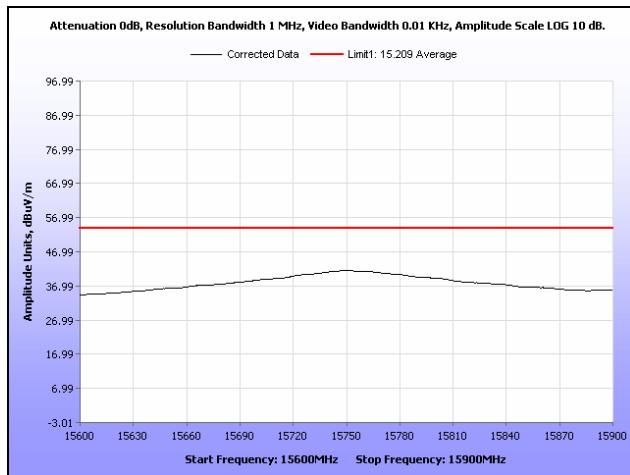


**Plot 78. Radiated Spurious Emissions, Mid Channel, 15.6 GHz – 15.9 GHz, Average, a Mode, 5.8 GHz**

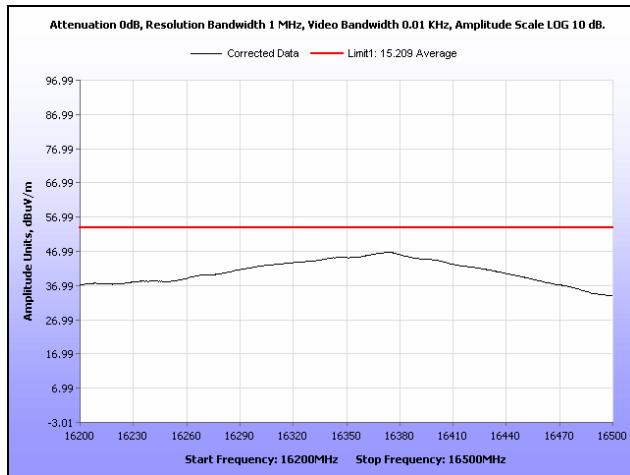


**Plot 79. Radiated Spurious Emissions, Mid Channel, 16.2 GHz – 16.5 GHz, Average, a Mode, 5.8 GHz**

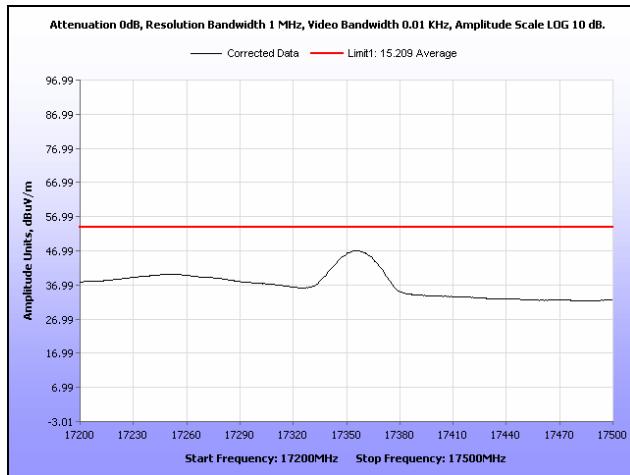


**Plot 80. Radiated Spurious Emissions, Mid Channel, 17.2 GHz – 17.5 GHz, Average, a Mode, 5.8 GHz**

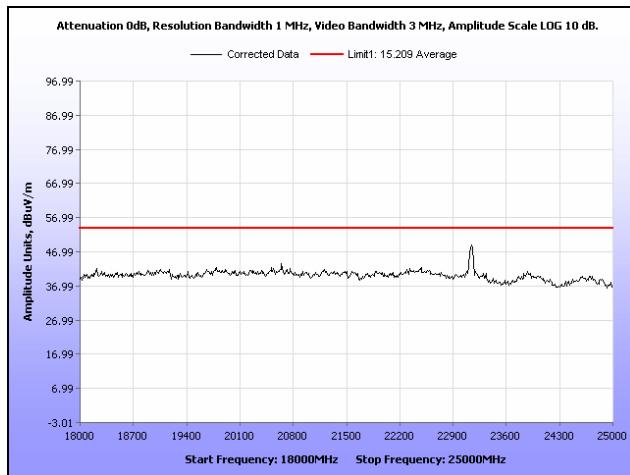


**Plot 81. Radiated Spurious Emissions, Mid Channel, 18 GHz – 25 GHz, Peak Detector, a Mode, 5.8 GHz**

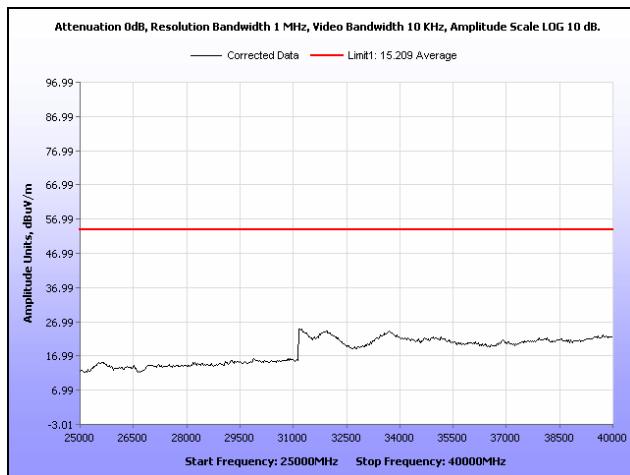


**Plot 82. Radiated Spurious Emissions, Mid Channel, 25 GHz – 40 GHz, Average, a Mode, 5.8 GHz**

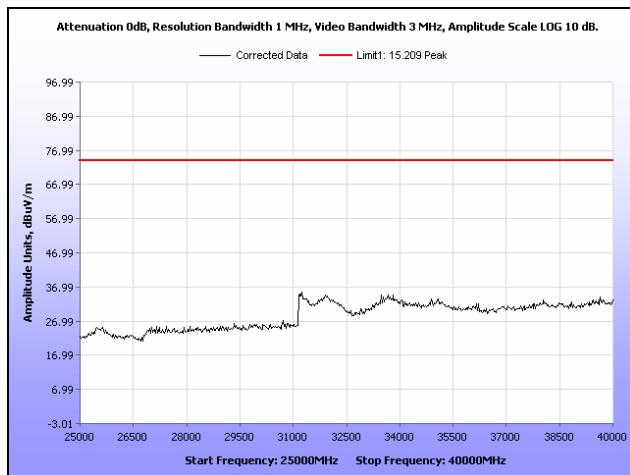


**Plot 83. Radiated Spurious Emissions, Mid Channel, 25 GHz – 40 GHz, Peak, a Mode, 5.8 GHz**

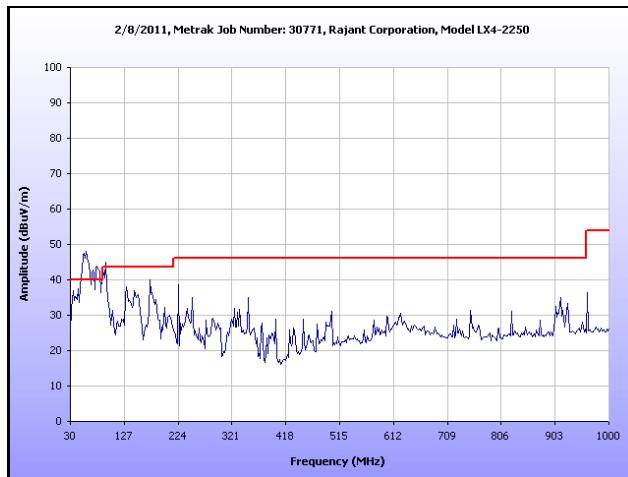


**Plot 84. Radiated Spurious Emissions, High Channel, 30 MHz – 1 GHz, a Mode, 5.8 GHz**

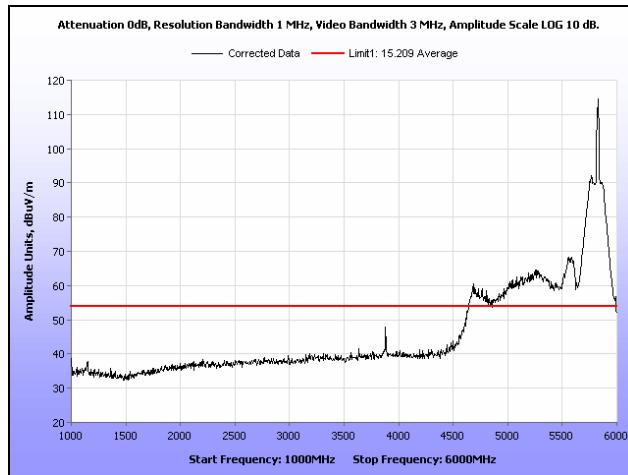


**Plot 85. Radiated Spurious Emissions, High Channel, 1 GHz – 6 GHz, Peak Detector, a Mode, 5.8 GHz**

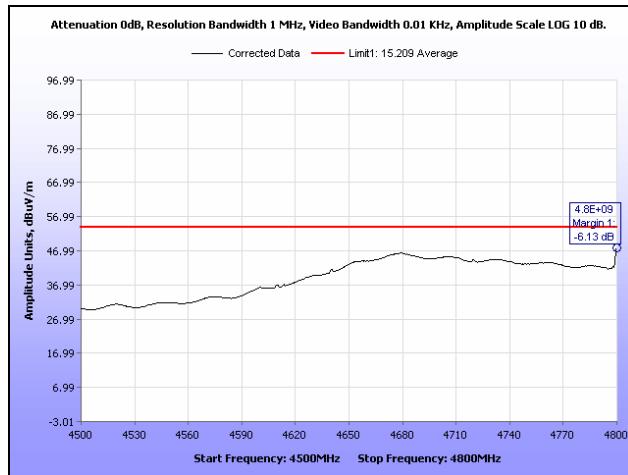


**Plot 86. Radiated Spurious Emissions, High Channel, 4.5 GHz – 4.8 GHz, Average, a Mode, 5.8 GHz**

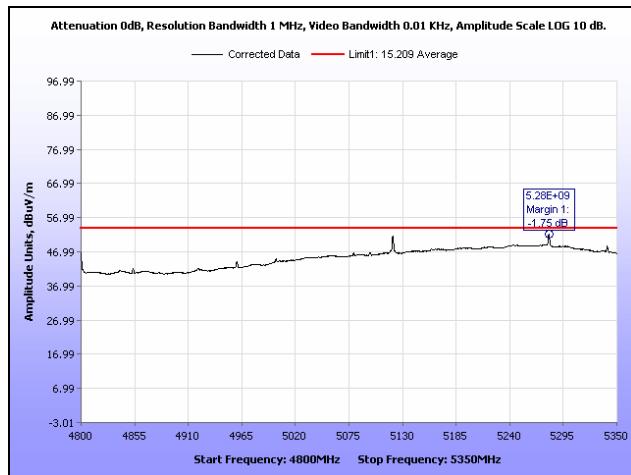


**Plot 87. Radiated Spurious Emissions, High Channel, 4.8 GHz – 5.35 GHz, Average, a Mode, 5.8 GHz**

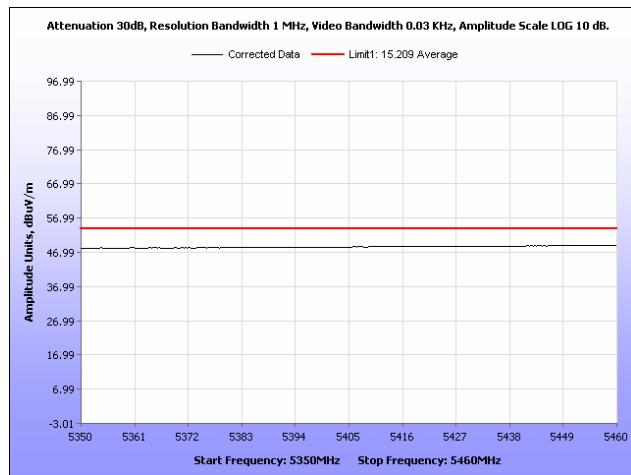


**Plot 88. Radiated Spurious Emissions, High Channel, 5.35 GHz – 5.46 GHz, Average, a Mode, 5.8 GHz**

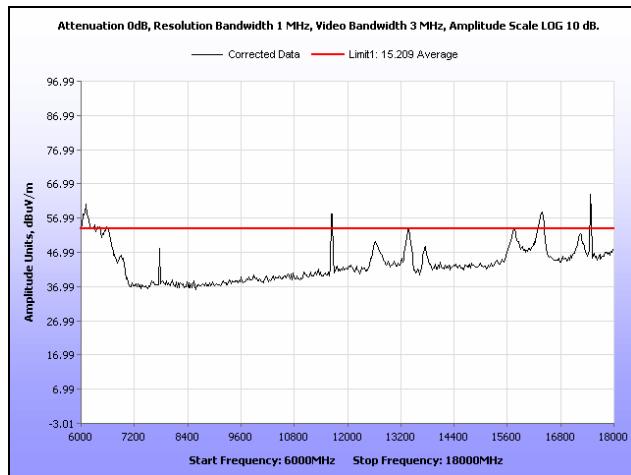


**Plot 89. Radiated Spurious Emissions, High Channel, 6 GHz – 18 GHz, Peak Detector, a Mode, 5.8 GHz**

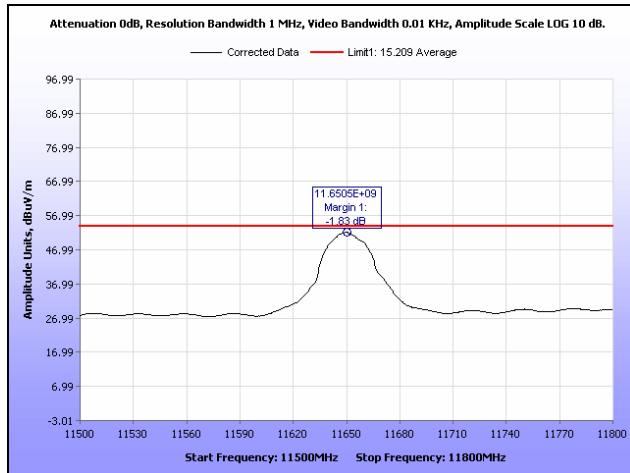


**Plot 90. Radiated Spurious Emissions, High Channel, 11.5 GHz – 11.8 GHz, Average, a Mode, 5.8 GHz**

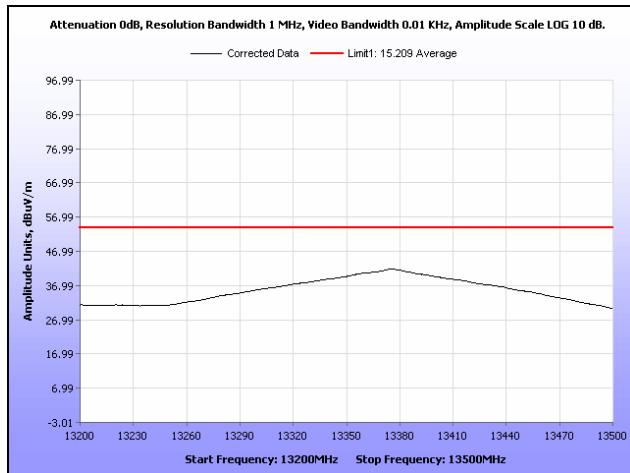


**Plot 91. Radiated Spurious Emissions, High Channel, 13.2 GHz – 13.5 GHz, Average, a Mode, 5.8 GHz**

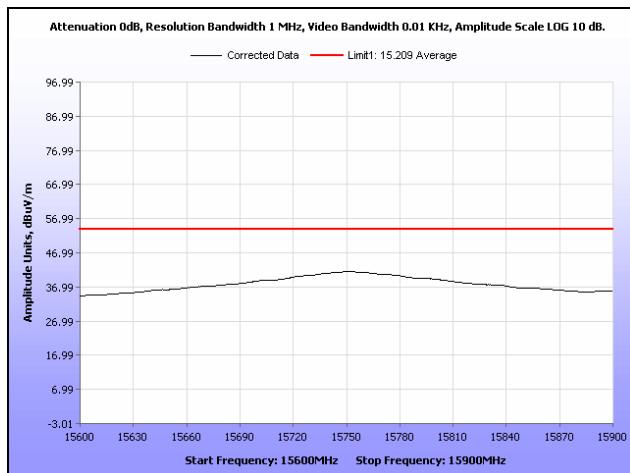


**Plot 92. Radiated Spurious Emissions, High Channel, 15.6 GHz – 15.9 GHz, Average, a Mode, 5.8 GHz**

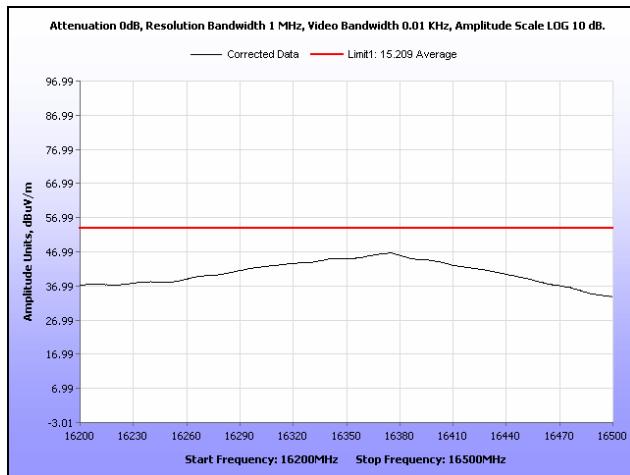


**Plot 93. Radiated Spurious Emissions, High Channel, 16.2 GHz – 16.5 GHz, Average, a Mode, 5.8 GHz**

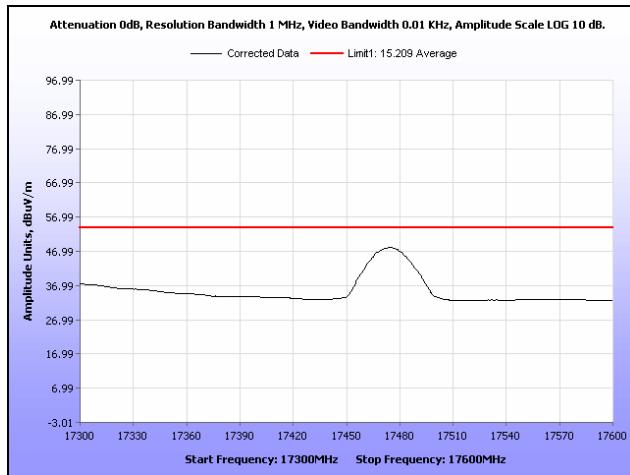


**Plot 94. Radiated Spurious Emissions, High Channel, 17.3 GHz – 17.6 GHz, Average, a Mode, 5.8 GHz**

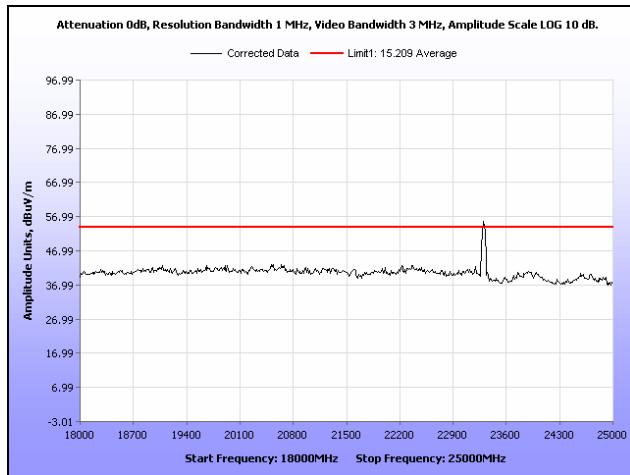


**Plot 95. Radiated Spurious Emissions, High Channel, 18 GHz – 25 GHz, Peak Detector, a Mode, 5.8 GHz**

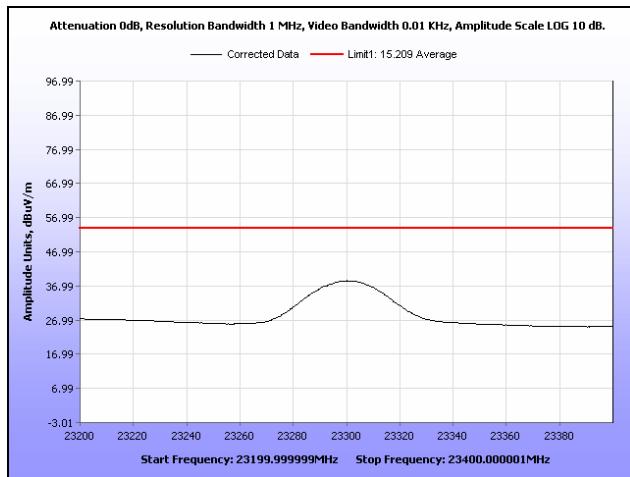

**Plot 96. Radiated Spurious Emissions, High Channel, 23.2 GHz – 23.4 GHz, Average, a Mode, 5.8 GHz**

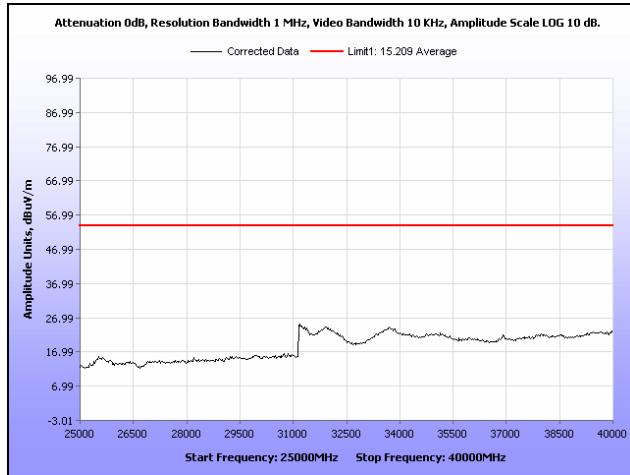

**Plot 97. Radiated Spurious Emissions, High Channel, 25 GHz – 40 GHz, Average, a Mode, 5.8 GHz**

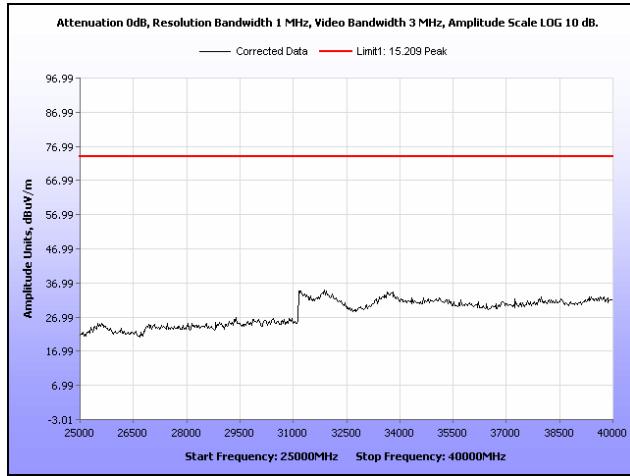


**Plot 98. Radiated Spurious Emissions, High Channel, 25 GHz – 40 GHz, Peak, a Mode, 5.8 GHz**


## Radiated Band Edge Measurements

### Test Procedures:


The transmitter was turned on. The EUT was rotated orthogonally through all three axes. Plots shown are corrected for both antenna correction factor and distance and compared to a 3 m limit line.

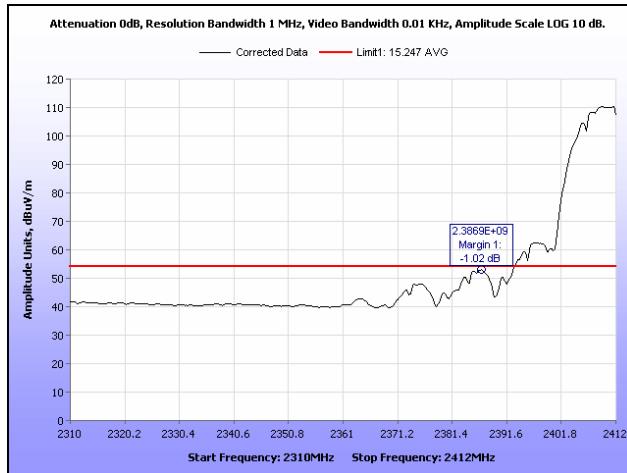


**Plot 99. Radiated Restricted Band Edge, b Mode, Channel 1, Average, 2.4 GHz**

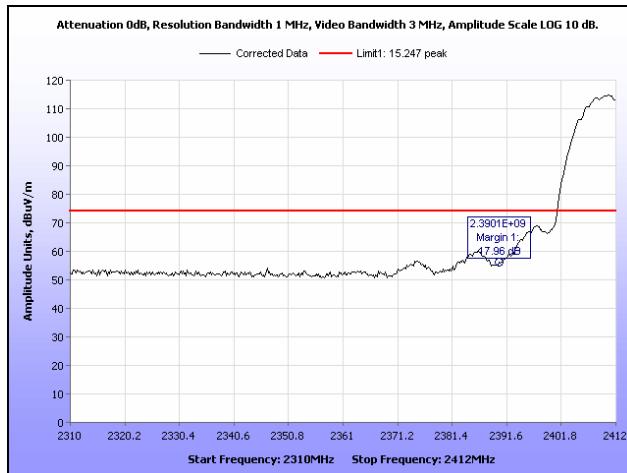


**Plot 100. Radiated Restricted Band Edge, b Mode, Channel 1, Peak, 2.4 GHz**

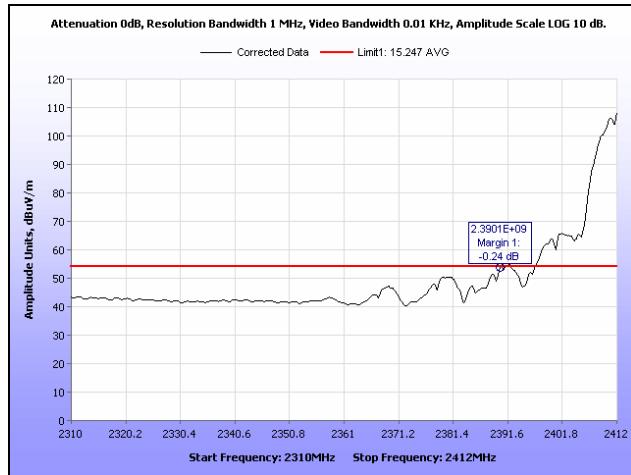


**Plot 101. Radiated Restricted Band Edge, b Mode, Channel 2, Average, 2.4 GHz**

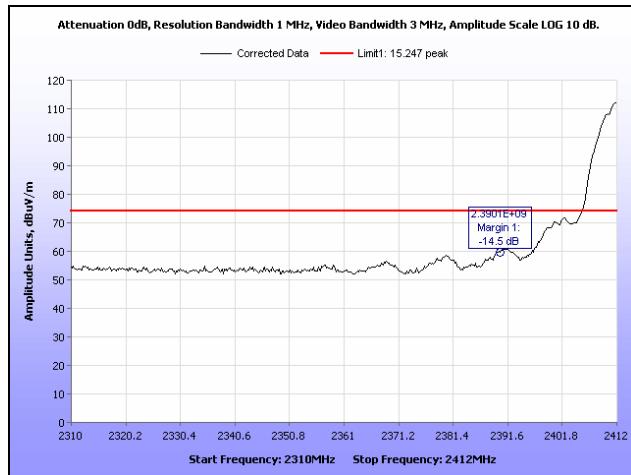


**Plot 102. Radiated Restricted Band Edge, b Mode, Channel 2, Peak, 2.4 GHz**

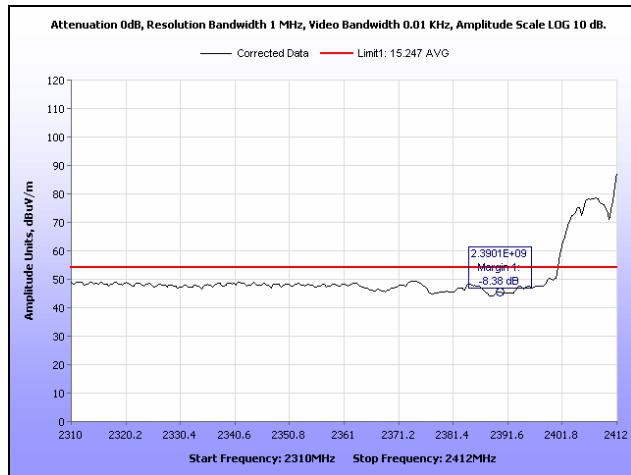


**Plot 103. Radiated Restricted Band Edge, b Mode, Channel 3, Average, 2.4 GHz**

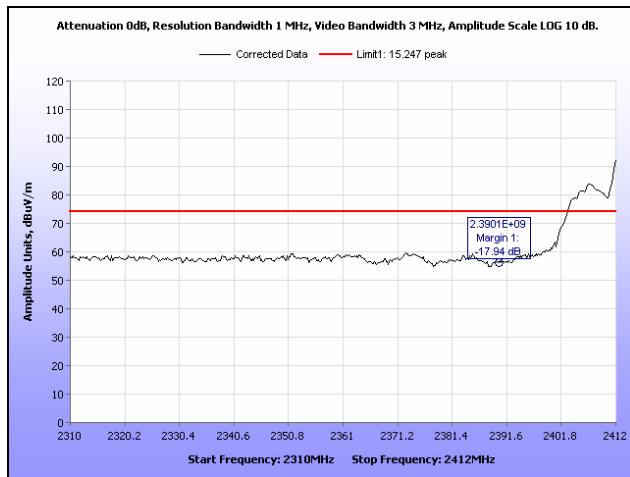


**Plot 104. Radiated Restricted Band Edge, b Mode, Channel 3, Peak, 2.4 GHz**

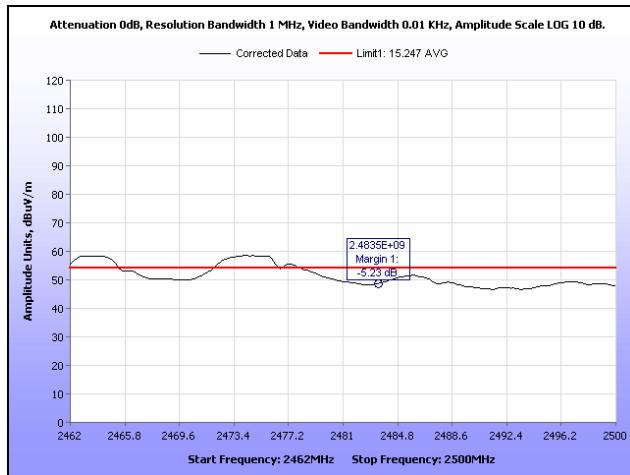


**Plot 105. Radiated Restricted Band Edge, b Mode, Channel 4, Average, High End, 2.4 GHz**

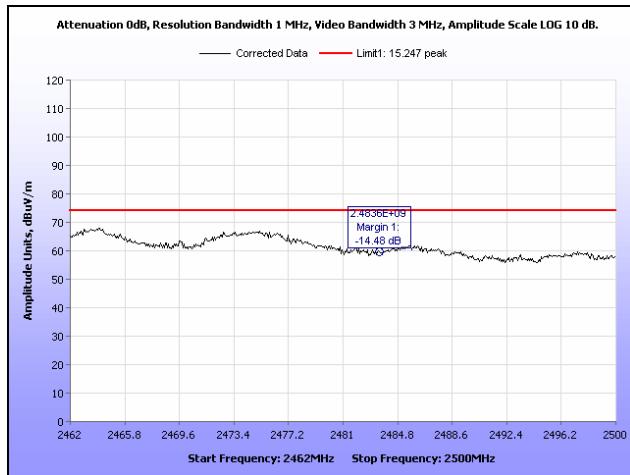


**Plot 106. Radiated Restricted Band Edge, b Mode, Channel 4, Peak, High End, 2.4 GHz**

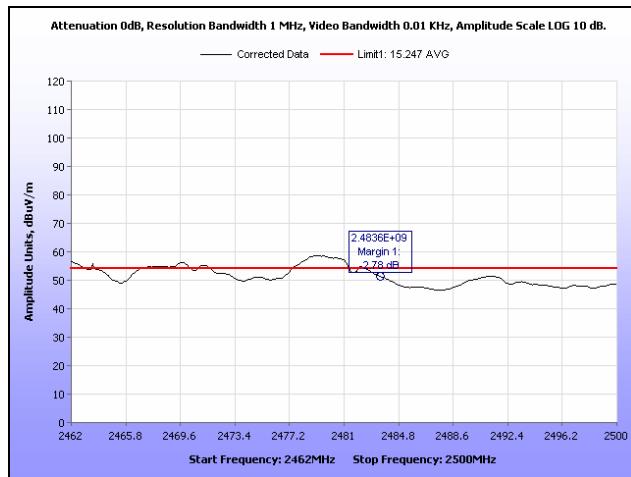


**Plot 107. Radiated Restricted Band Edge, b Mode, Channel 5, Average, 2.4 GHz**

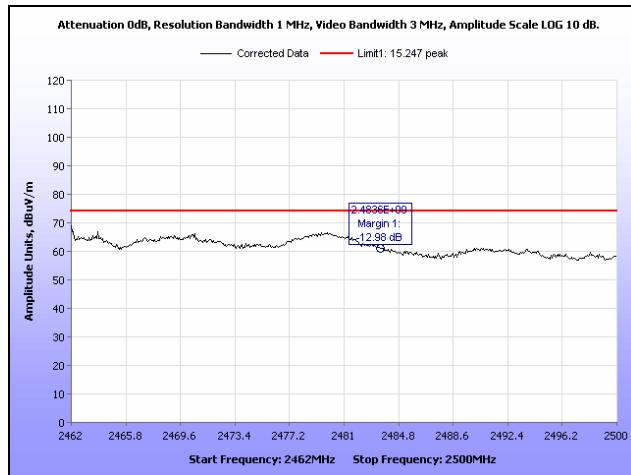


**Plot 108. Radiated Restricted Band Edge, b Mode, Channel 5, Peak, 2.4 GHz**

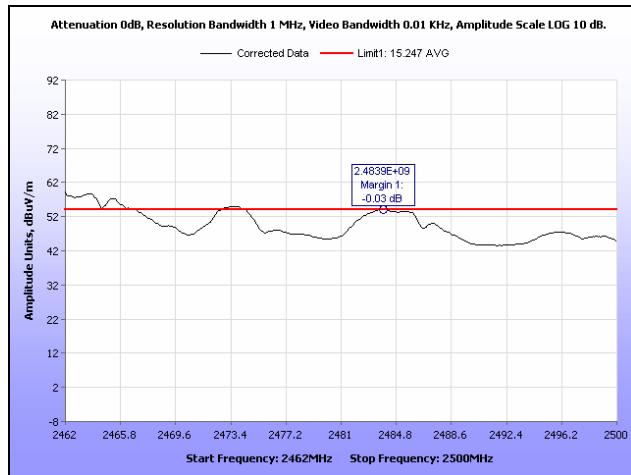


**Plot 109. Radiated Restricted Band Edge, b Mode, Channel 6, Average, 2.4 GHz**

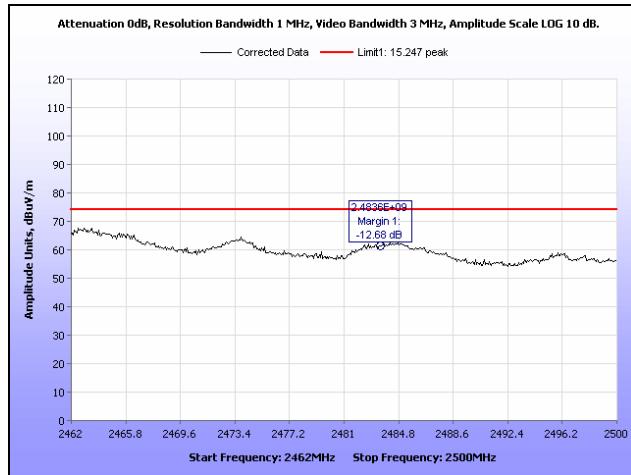


**Plot 110. Radiated Restricted Band Edge, b Mode, Channel 6, Peak, 2.4 GHz**

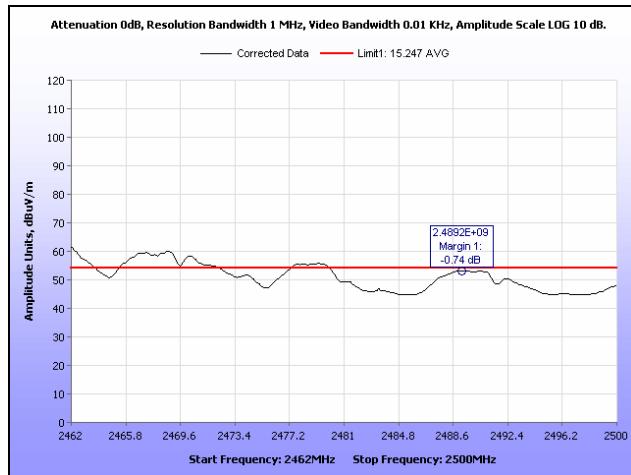


**Plot 111. Radiated Restricted Band Edge, b Mode, Channel 7, Average, 2.4 GHz**

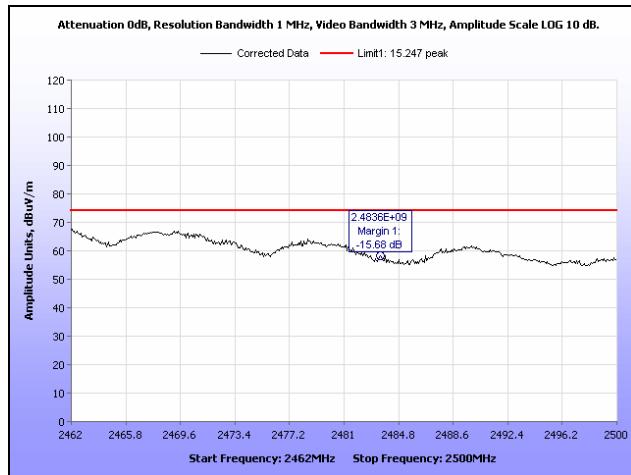


**Plot 112. Radiated Restricted Band Edge, b Mode, Channel 7, Peak, 2.4 GHz**

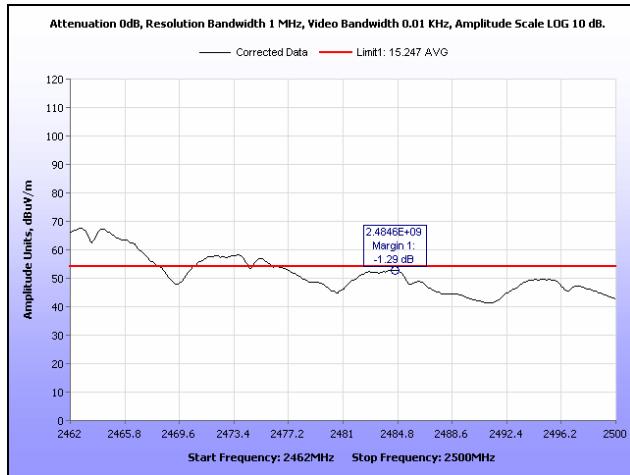


**Plot 113. Radiated Restricted Band Edge, b Mode, Channel 8, Average, 2.4 GHz**

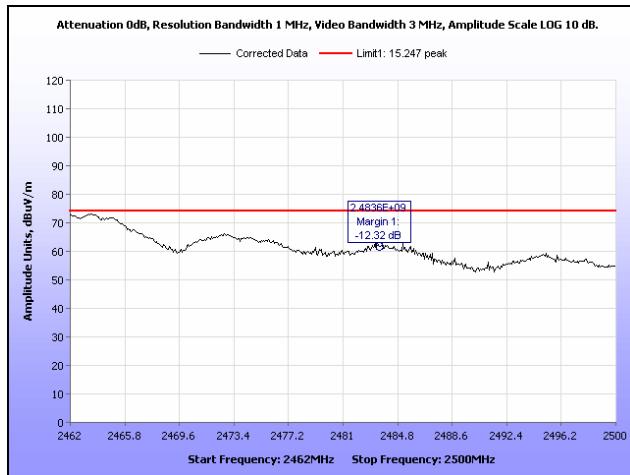


**Plot 114. Radiated Restricted Band Edge, b Mode, Channel 8, Peak, 2.4 GHz**

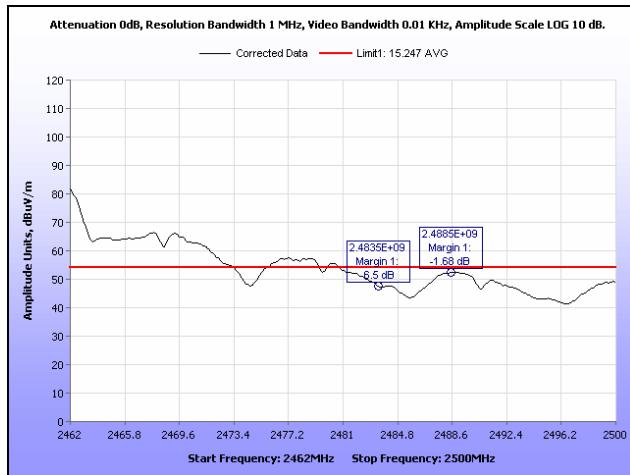


**Plot 115. Radiated Restricted Band Edge, b Mode, Channel 9, Average, 2.4 GHz**

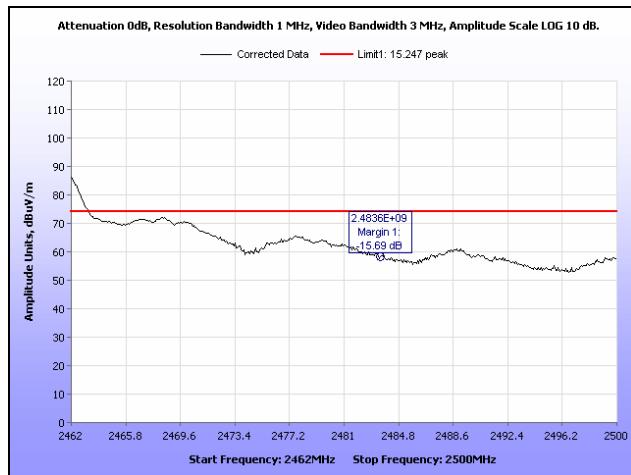


**Plot 116. Radiated Restricted Band Edge, b Mode, Channel 9, Peak, 2.4 GHz**

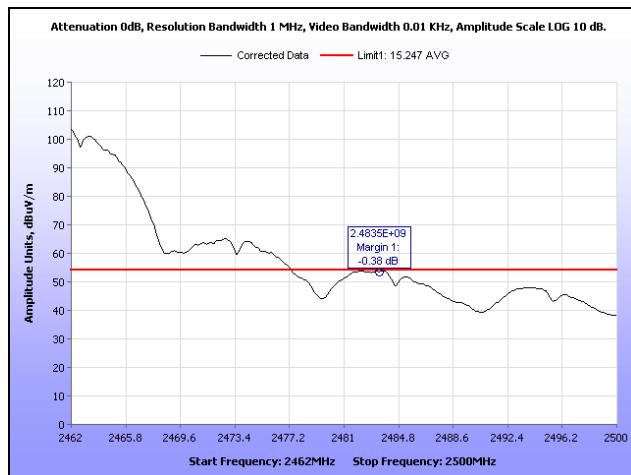


**Plot 117. Radiated Restricted Band Edge, b Mode, Channel 10, Average, 2.4 GHz**

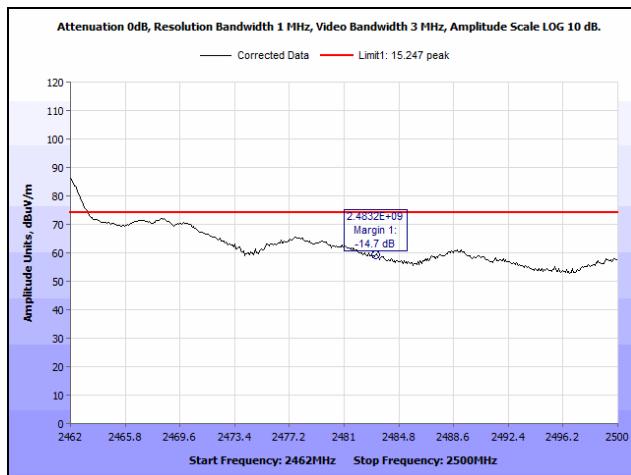


**Plot 118. Radiated Restricted Band Edge, b Mode, Channel 10, Peak, 2.4 GHz**

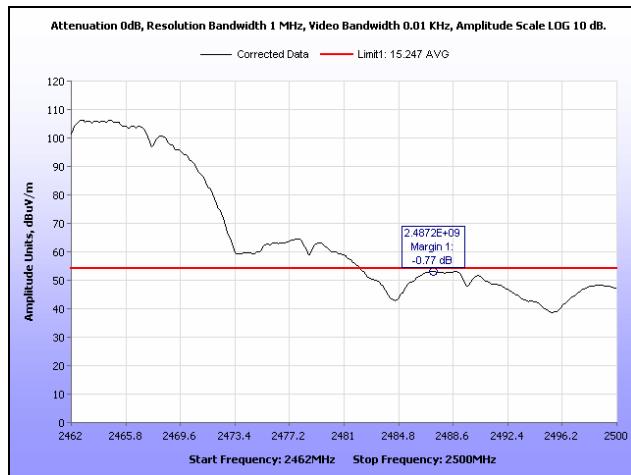


**Plot 119. Radiated Restricted Band Edge, b Mode, Channel 11, Average, 2.4 GHz**

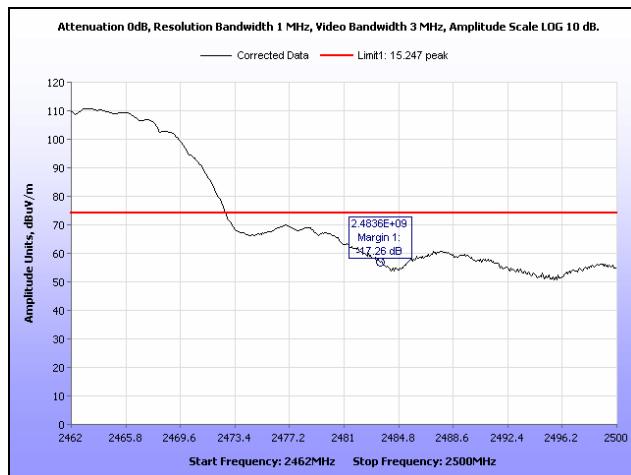


**Plot 120. Radiated Restricted Band Edge, b Mode, Channel 11, Peak, 2.4 GHz**

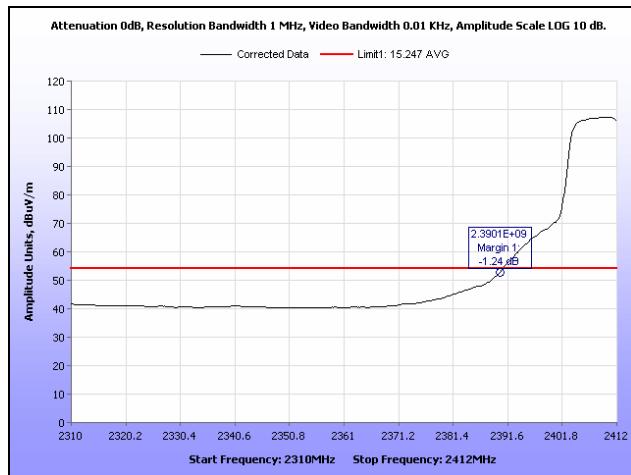


**Plot 121. Radiated Restricted Band Edge, g Mode, Channel 1, Average, 2.4 GHz**

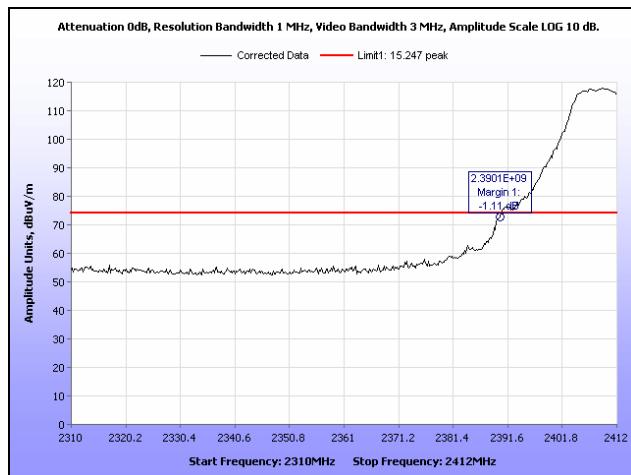


**Plot 122. Radiated Restricted Band Edge, g Mode, Channel 1, Peak, 2.4 GHz**

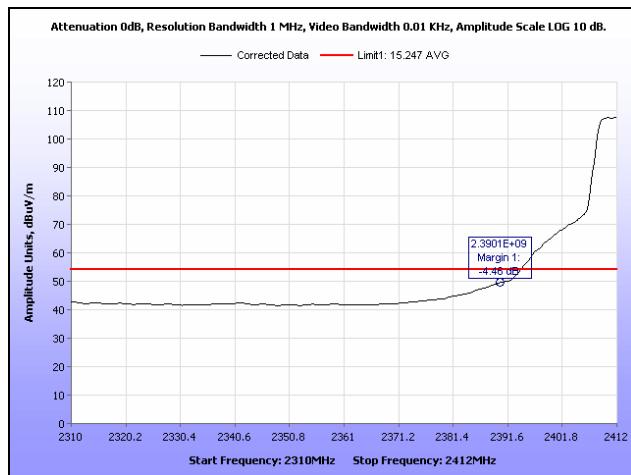


**Plot 123. Radiated Restricted Band Edge, g Mode, Channel 2, Average, 2.4 GHz**

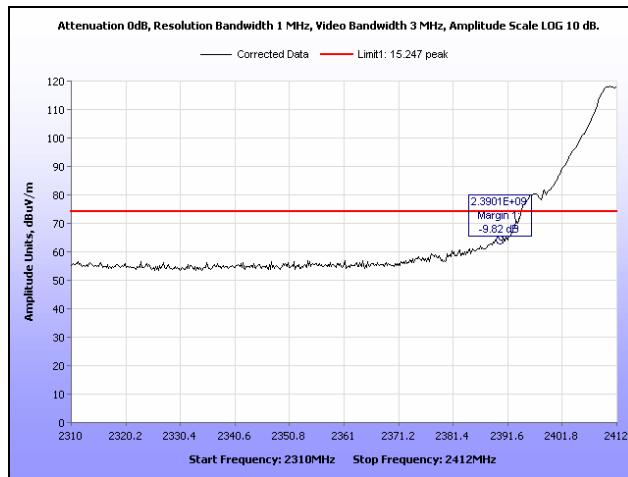


**Plot 124. Radiated Restricted Band Edge, g Mode, Channel 2, Peak, 2.4 GHz**

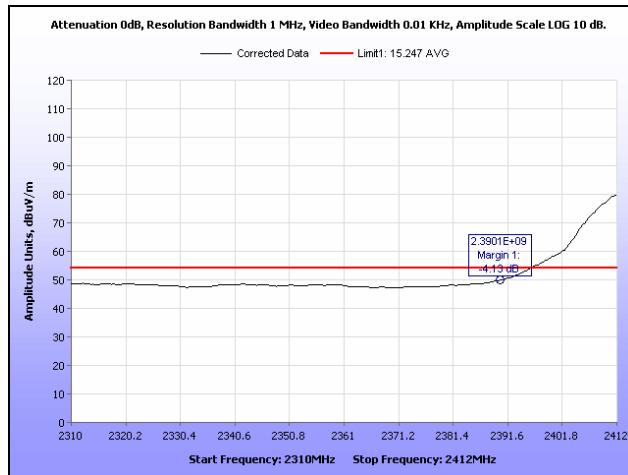


**Plot 125. Radiated Restricted Band Edge, g Mode, Channel 3, Average, 2.4 GHz**

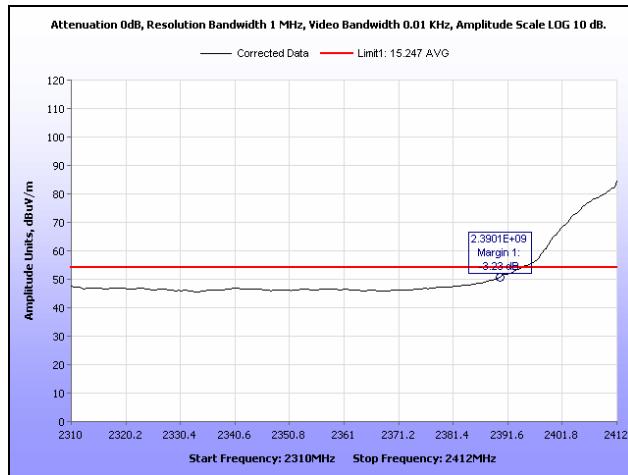


**Plot 126. Radiated Restricted Band Edge, g Mode, Channel 3, Peak, 2.4 GHz**

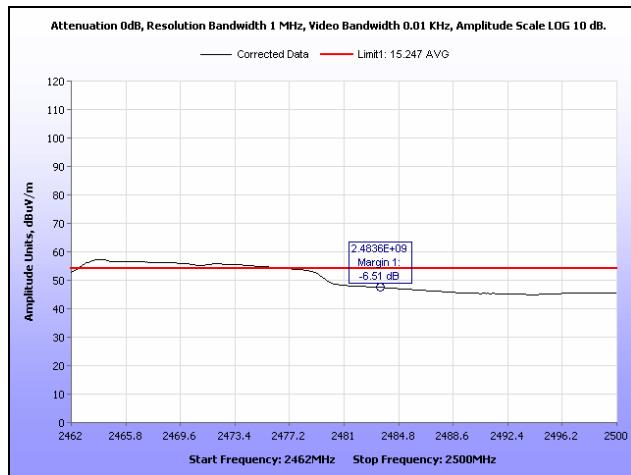


**Plot 127. Radiated Restricted Band Edge, g Mode, Channel 4, Average, High End, 2.4 GHz**

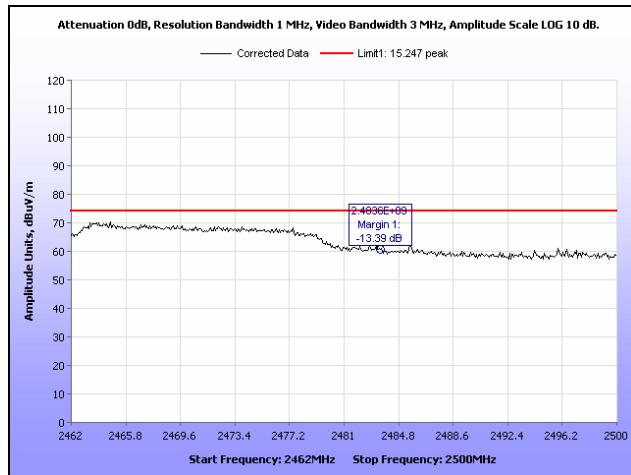


**Plot 128. Radiated Restricted Band Edge, g Mode, Channel 4, Peak, High End, 2.4 GHz**

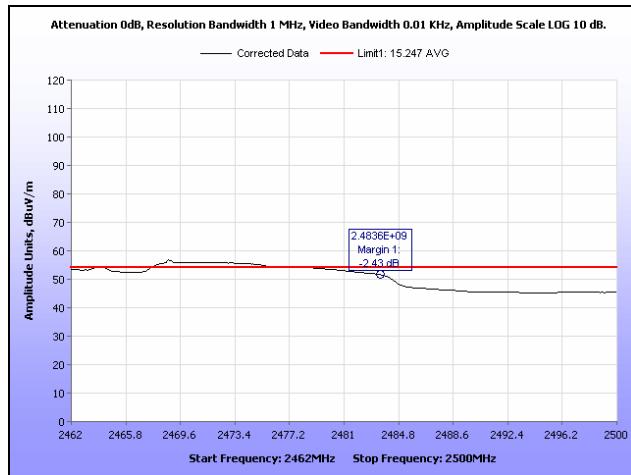


**Plot 129. Radiated Restricted Band Edge, g Mode, Channel 5, Average, 2.4 GHz**

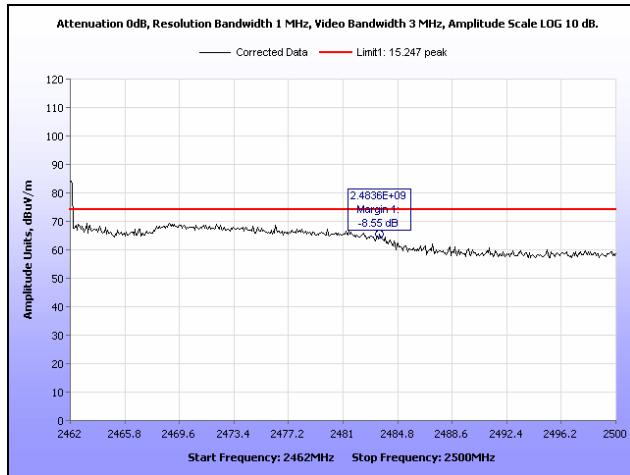


**Plot 130. Radiated Restricted Band Edge, g Mode, Channel 5, Peak, 2.4 GHz**

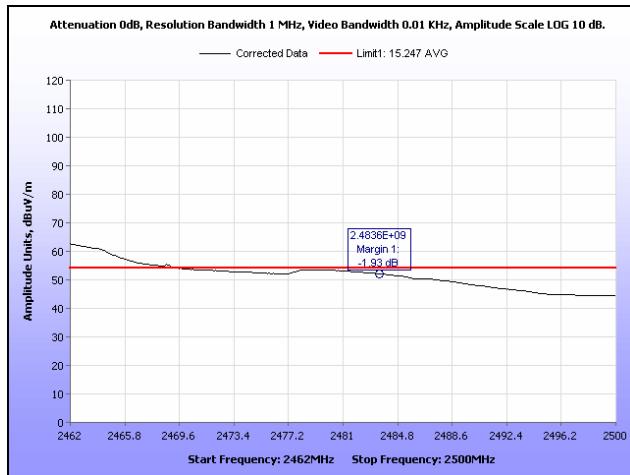


**Plot 131. Radiated Restricted Band Edge, g Mode, Channel 7, Average, 2.4 GHz**

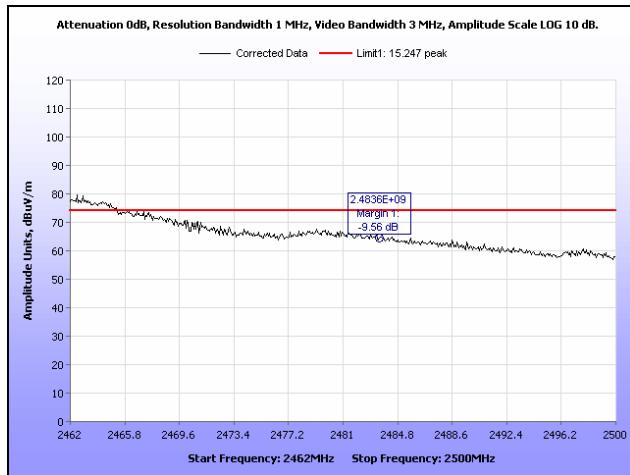


**Plot 132. Radiated Restricted Band Edge, g Mode, Channel 7, Peak, 2.4 GHz**

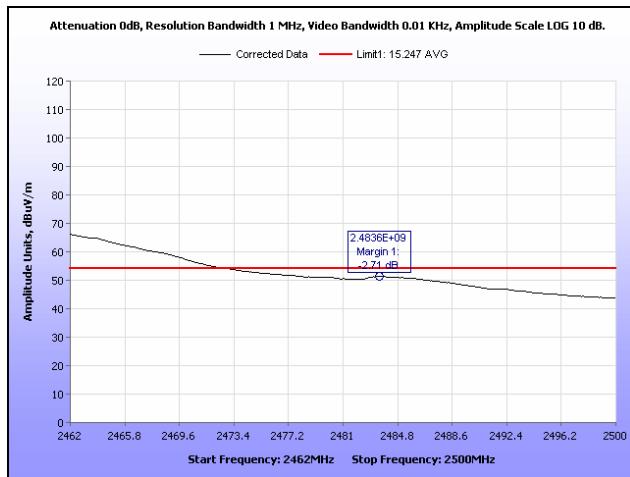


**Plot 133. Radiated Restricted Band Edge, g Mode, Channel 8, Average, 2.4 GHz**

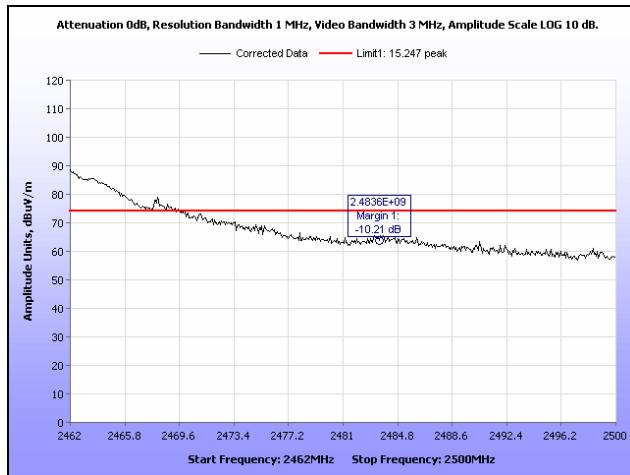


**Plot 134. Radiated Restricted Band Edge, g Mode, Channel 8, Peak, 2.4 GHz**

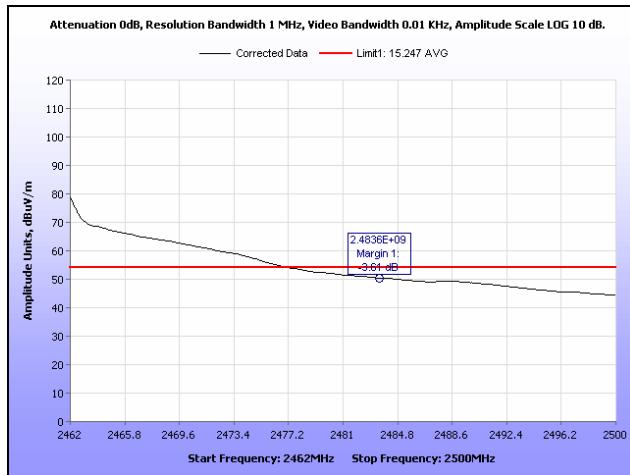


**Plot 135. Radiated Restricted Band Edge, g Mode, Channel 9, Average, 2.4 GHz**

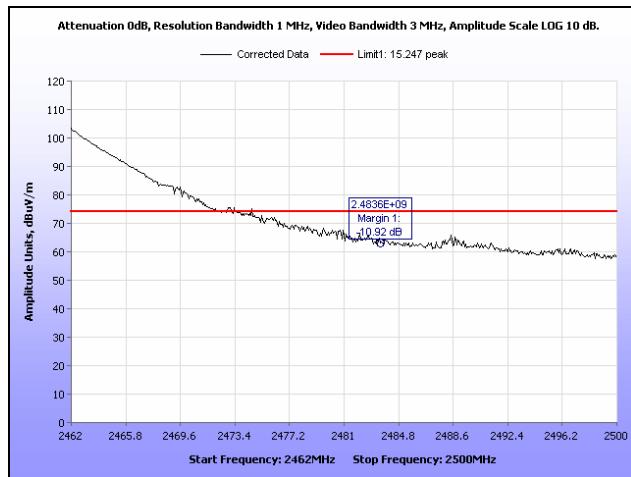


**Plot 136. Radiated Restricted Band Edge, g Mode, Channel 9, Peak, 2.4 GHz**

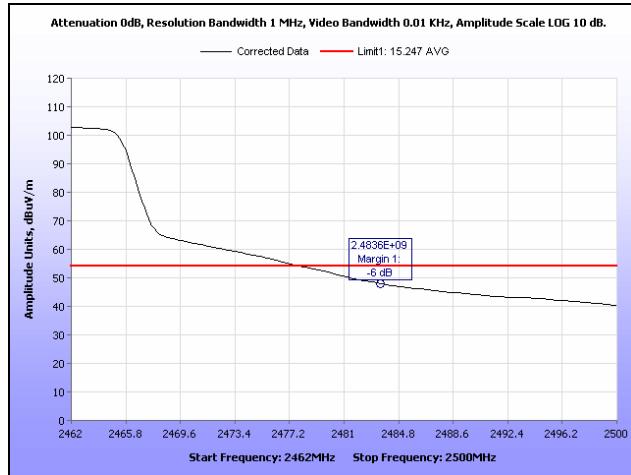


**Plot 137. Radiated Restricted Band Edge, g Mode, Channel 10, Average, 2.4 GHz**

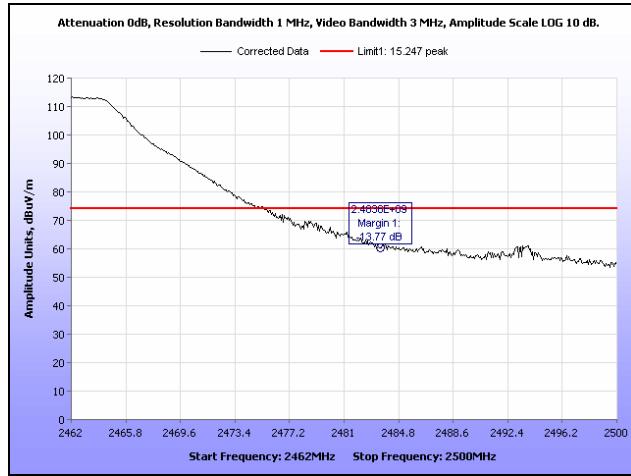


**Plot 138. Radiated Restricted Band Edge, g Mode, Channel 10, Peak, 2.4 GHz**

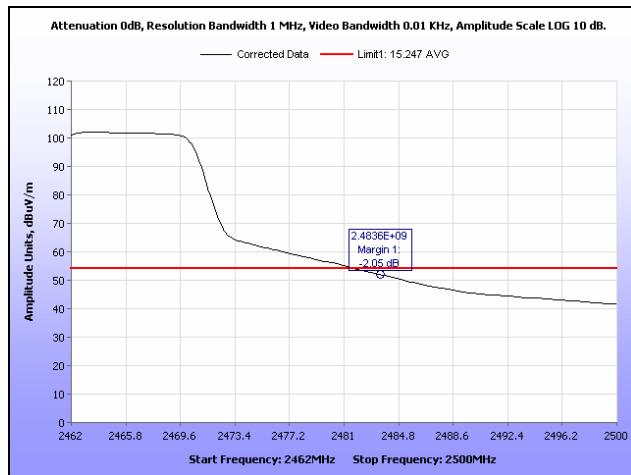


**Plot 139. Radiated Restricted Band Edge, g Mode, Channel 11, Average, 2.4 GHz**

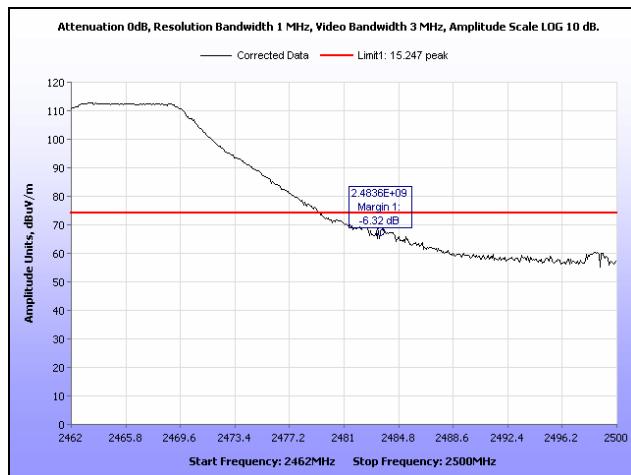


**Plot 140. Radiated Restricted Band Edge, g Mode, Channel 11, Peak, 2.4 GHz**

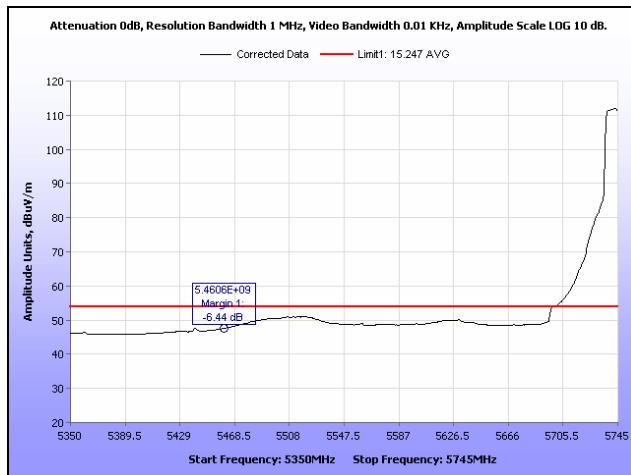


**Plot 141. Radiated Restricted Band Edge, Channel 149, 802.11a, 5350 MHz – 5745 MHz, Average, 5 GHz**

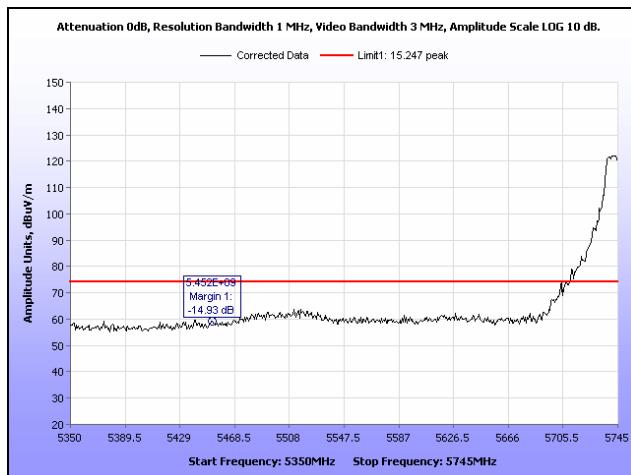


**Plot 142. Radiated Restricted Band Edge, Channel 149, 802.11a, 5350 MHz – 5745 MHz, Peak, 5 GHz**

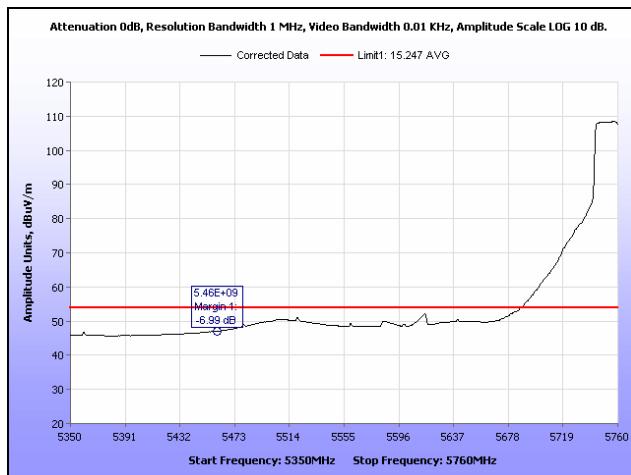


**Plot 143. Radiated Restricted Band Edge, Channel 152, 802.11a, 5350 MHz – 5760 MHz, Average, 5 GHz**

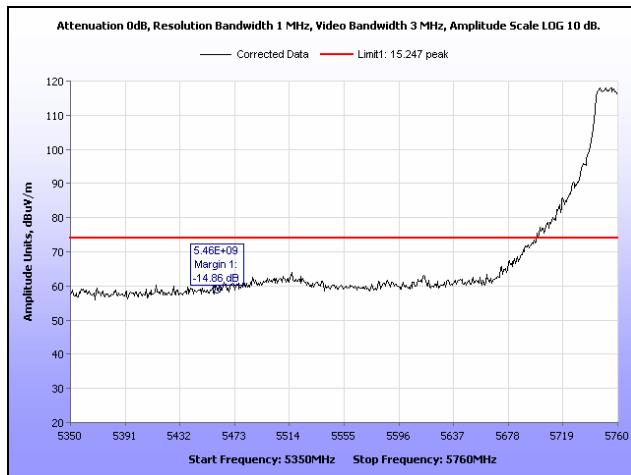


**Plot 144. Radiated Restricted Band Edge, Channel 152, 802.11a, 5350 MHz – 5760 MHz, Peak, 5 GHz**

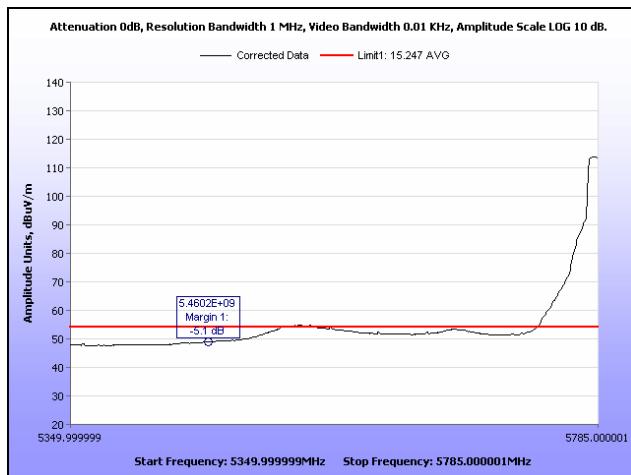


**Plot 145. Radiated Restricted Band Edge, Channel 157, 802.11a, 5350 MHz – 5785 MHz, Average, 5 GHz**

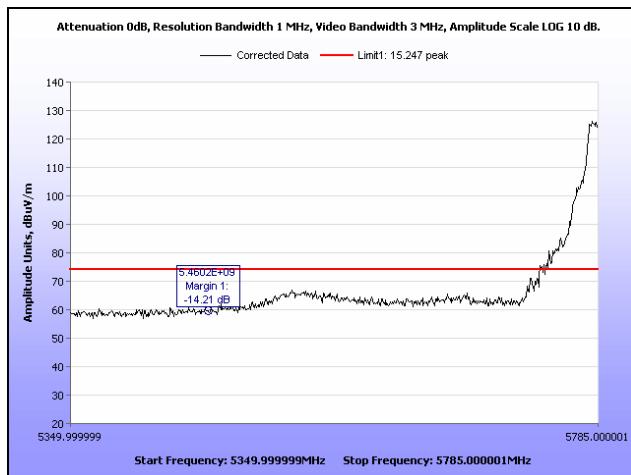


**Plot 146. Radiated Restricted Band Edge, Channel 157, 802.11a, 5350 MHz – 5785 MHz, Peak, 5 GHz**

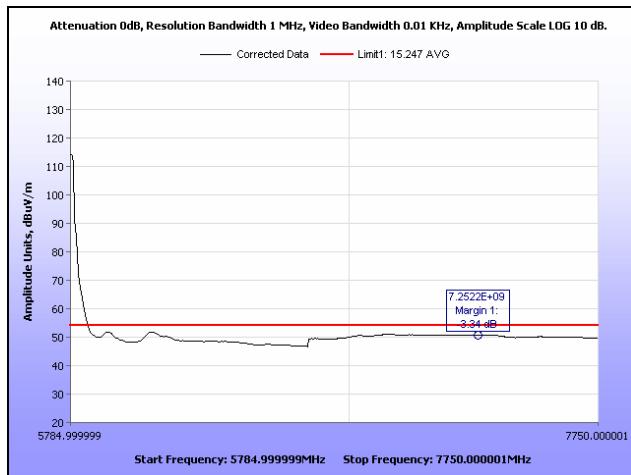


**Plot 147. Radiated Restricted Band Edge, Channel 157, 802.11a, 5785 MHz – 7750 MHz, Average, 5 GHz**

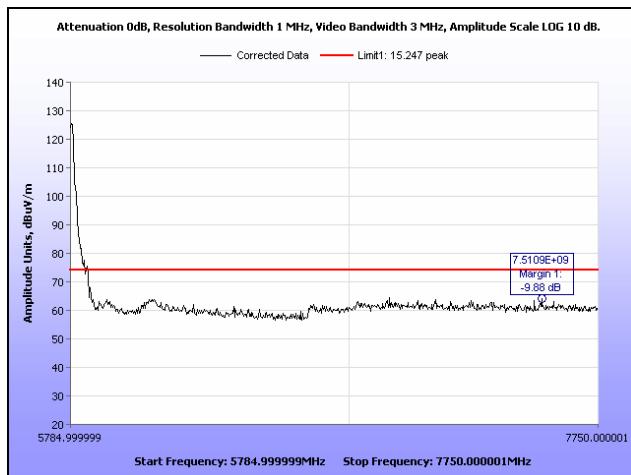


**Plot 148. Radiated Restricted Band Edge, Channel 157, 802.11a, 5785 MHz – 7750 MHz, Peak, 5 GHz**

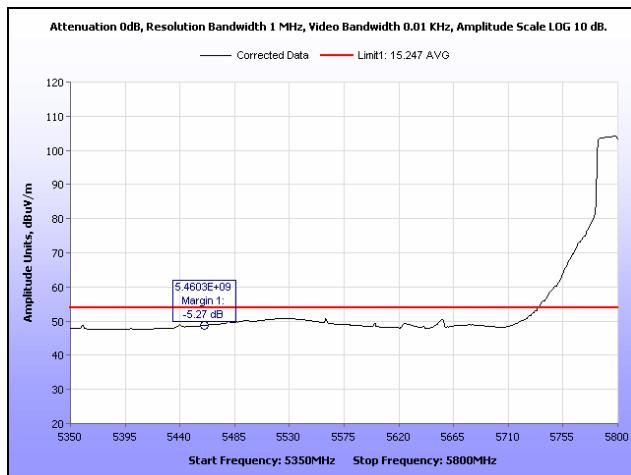


**Plot 149. Radiated Restricted Band Edge, Channel 160, 802.11a, 5350 MHz – 5800 MHz, Average, 5 GHz**

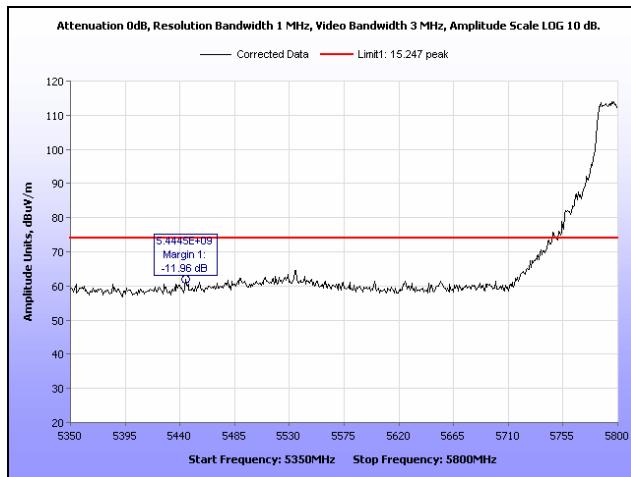

**Plot 150. Radiated Restricted Band Edge, Channel 160, 802.11a, 5350 MHz – 5800 MHz, Peak, 5 GHz**

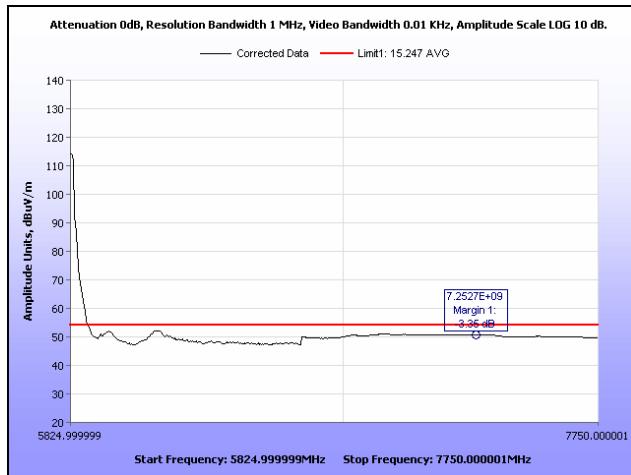

**Plot 151. Radiated Restricted Band Edge, Channel 165, 802.11a, 5825 MHz – 7750 MHz, Average, 5 GHz**

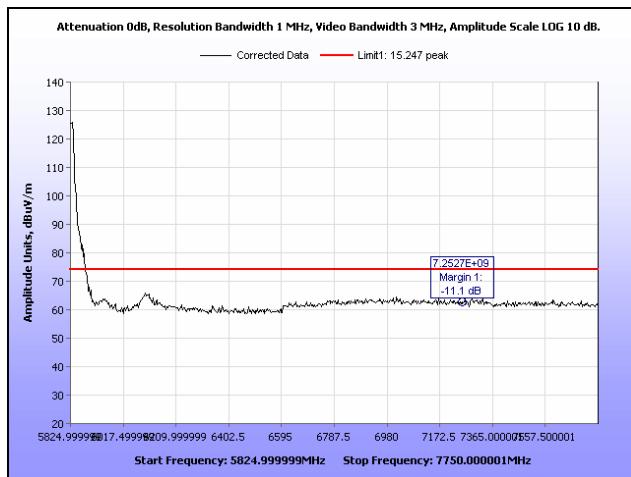

**Plot 152. Radiated Restricted Band Edge, Channel 165, 802.11a, 5825 MHz – 7750 MHz, Peak, 5 GHz**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) RF Conducted Spurious Emissions Requirements and Band Edge

**Test Requirement:** **15.247(d)** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


**Test Procedure:** For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

For frequencies 1-18GHz, measurements were made at coupler port of a 20dB directional coupler. The output of the coupler was terminated by a 50Ω load. For frequencies 18-40GHz a HP11970A and HP11970K harmonic mixer was used. Each harmonic mixer was fed with a SMA to wave guide adapter.




**Test Results:** Equipment complies with the Spurious Emissions Requirements – Radiated and RF Conducted limits of **§ 15.247 (c)**. For Radiated Emissions result, refer to section “§15.209: Radiated Emission Limits”. See following pages for detailed test results with RF Conducted Spurious Emissions and §15.205.




**Test Approved By:** Dusmantha Tennakoon


**Test Date(s):** 10/27/06




**Block Diagram 2. Spurious Conducted Emissions Test Setup**

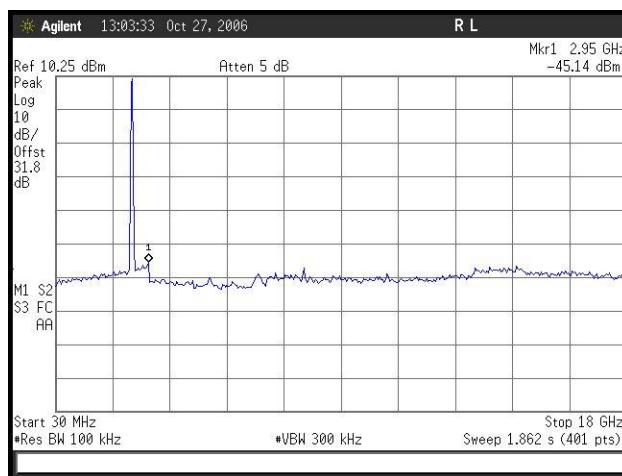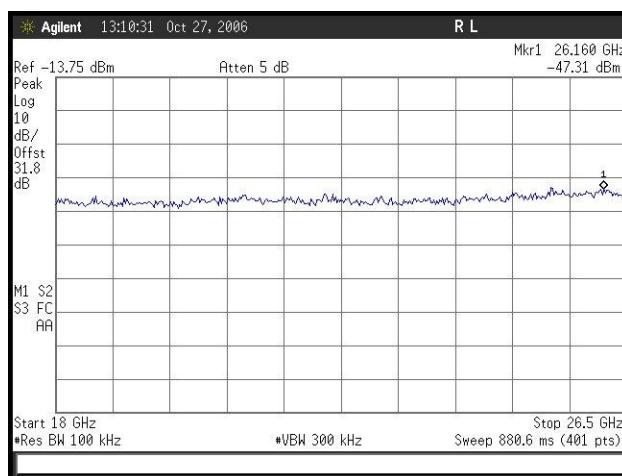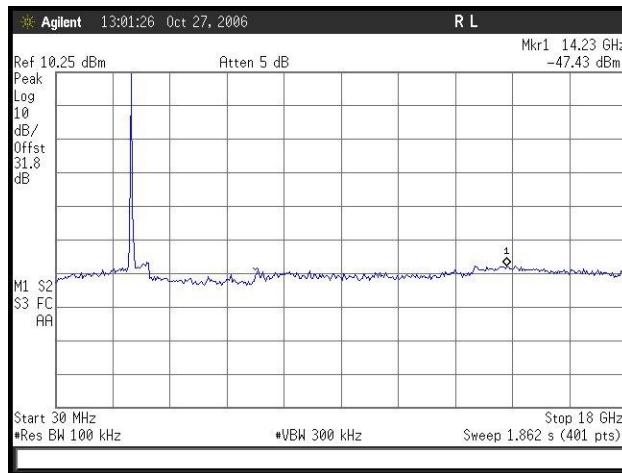

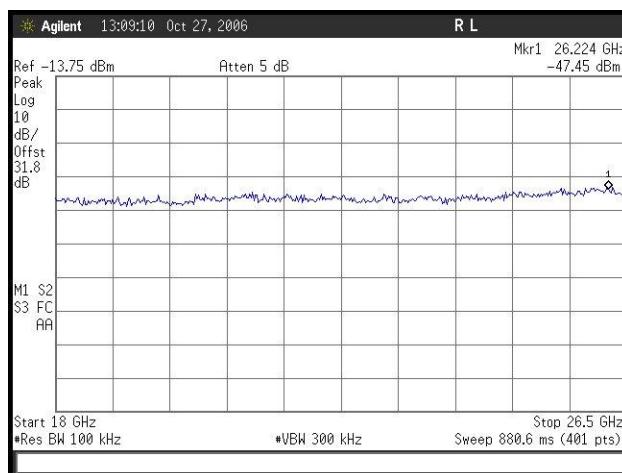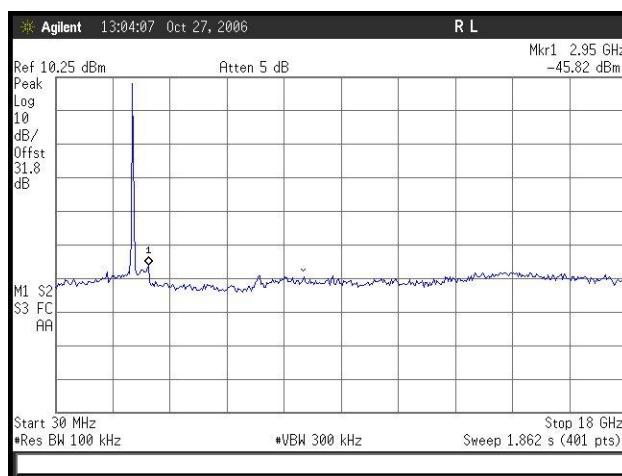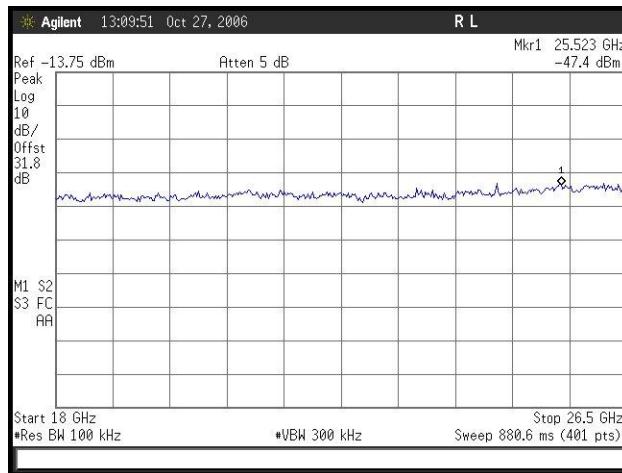


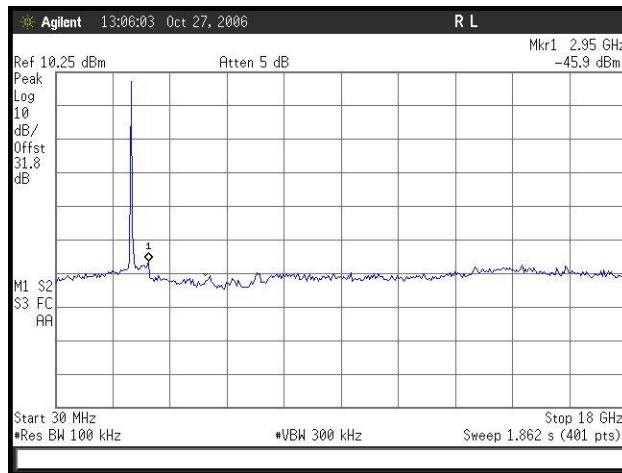


**Plot 159. Conducted Spurious Emissions, 802.11g, Low Channel, 30 MHz – 18 GHz, 2.4 GHz**

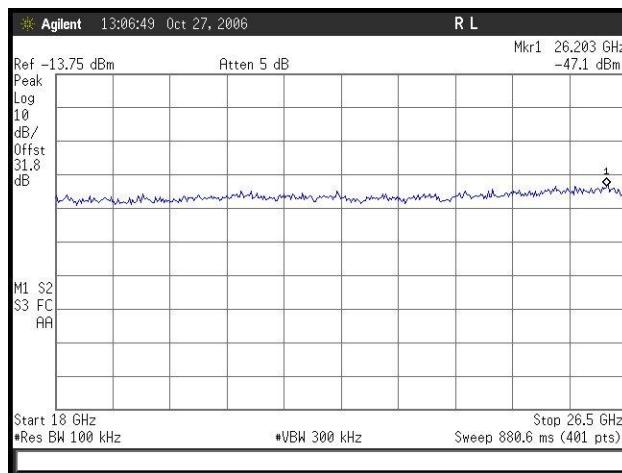


**Plot 160. Conducted Spurious Emissions, 802.11g, Low Channel, 18 GHz – 26.5 GHz, 2.4 GHz**

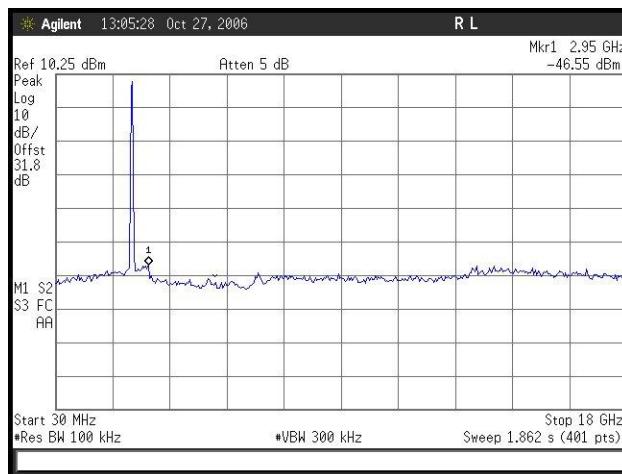


**Plot 161. Conducted Spurious Emissions, 802.11g, Mid Channel, 30 MHz – 18 GHz, 2.4 GHz**

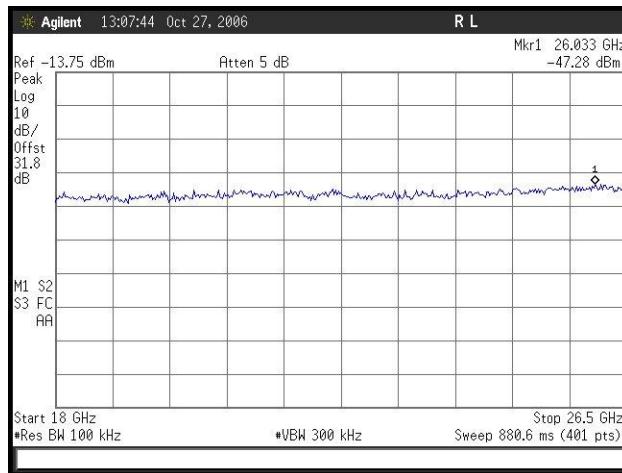


**Plot 162. Conducted Spurious Emissions, 802.11g, Mid Channel, 18 GHz – 26.5 GHz, 2.4 GHz**

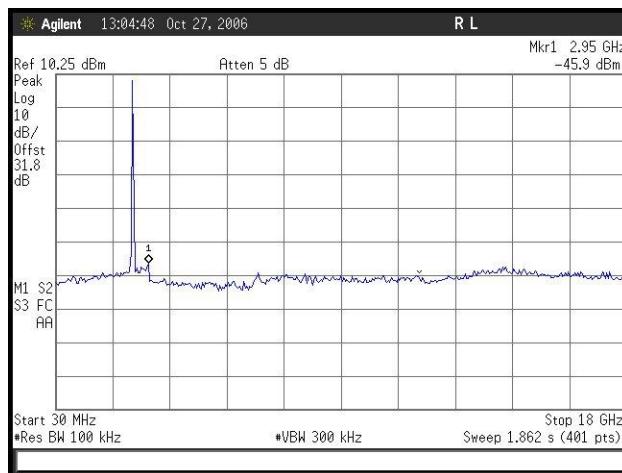


**Plot 163. Conducted Spurious Emissions, 802.11g, High Channel, 30 MHz – 18 GHz, 2.4 GHz**

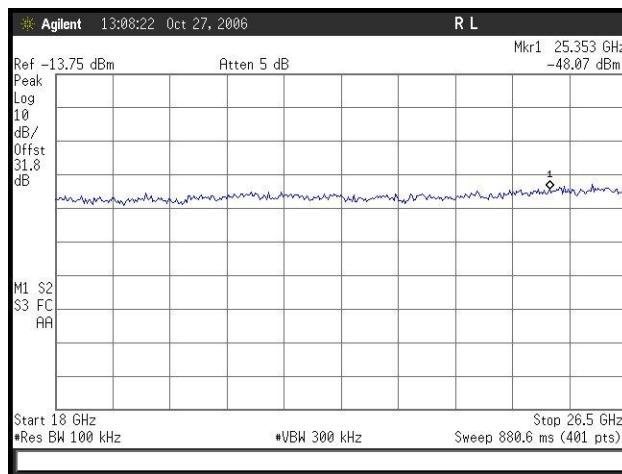


**Plot 164. Conducted Spurious Emissions, 802.11g, High Channel, 18 GHz – 26.5 GHz, 2.4 GHz**

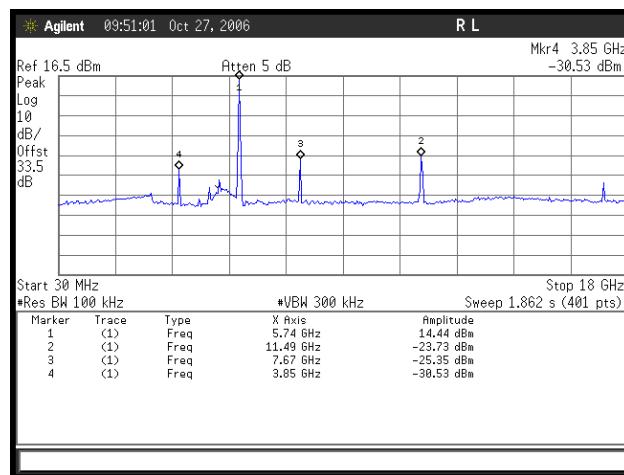


**Plot 165. Conducted Spurious Emissions, 802.11a, Low Channel, 30 MHz – 18 GHz, 5 GHz**

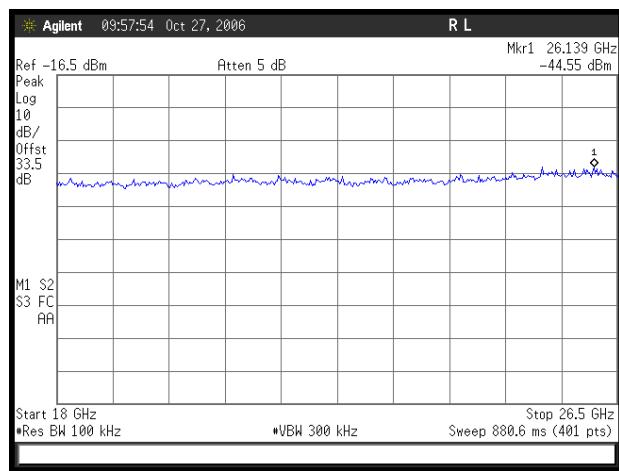


**Plot 166. Conducted Spurious Emissions, 802.11a, Low Channel, 18 GHz – 26.5 GHz, 5 GHz**

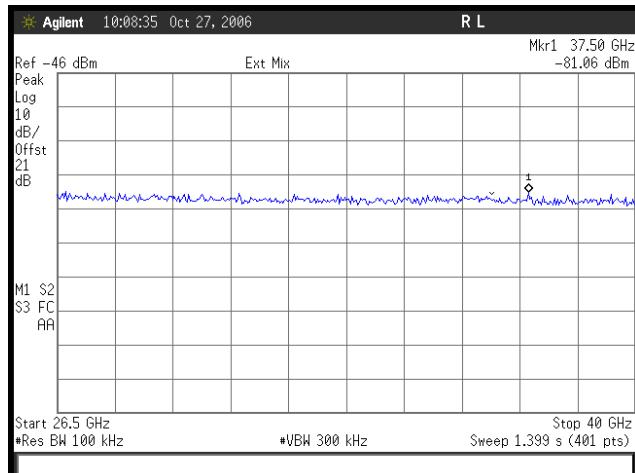


**Plot 167. Conducted Spurious Emissions, 802.11a, Low Channel, 26.5 MHz – 40 GHz, 5 GHz**

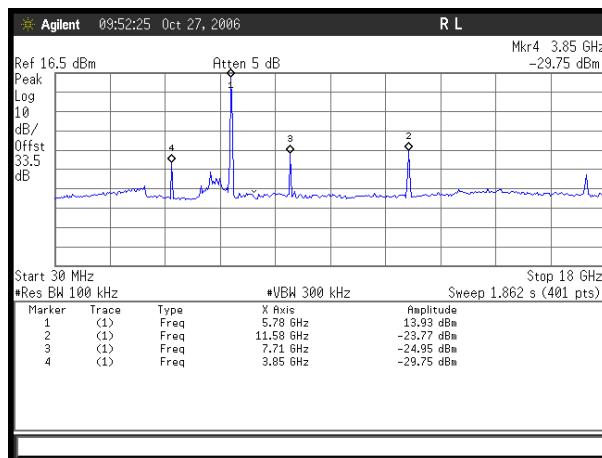


**Plot 168. Conducted Spurious Emissions, 802.11a, Mid Channel, 30 MHz – 18 GHz, 5 GHz**

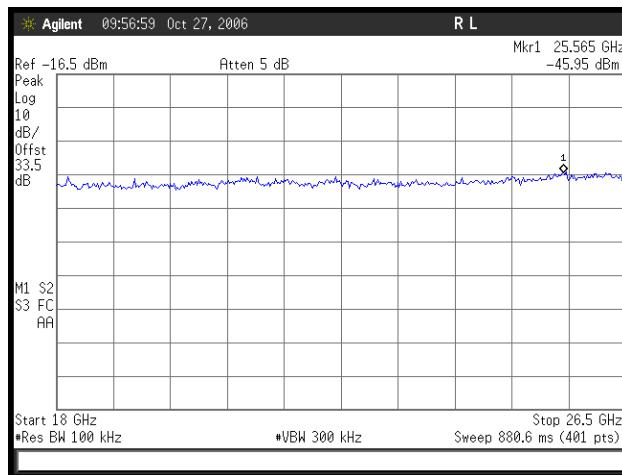


**Plot 169. Conducted Spurious Emissions, 802.11a, Mid Channel, 18 GHz – 26.5 GHz, 5 GHz**

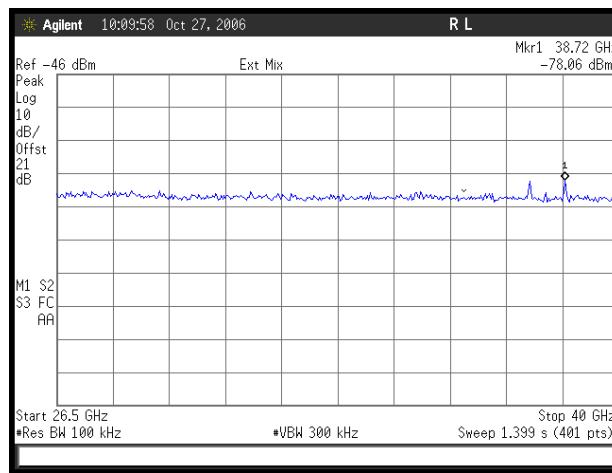


**Plot 170. Conducted Spurious Emissions, 802.11a, Mid Channel, 26.5 MHz – 40 GHz, 5 GHz**

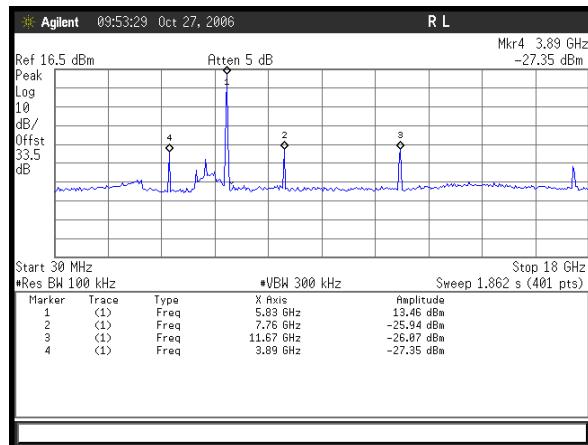

**Plot 171. Conducted Spurious Emissions, 802.11a, High Channel, 30 MHz – 18 GHz, 5 GHz**

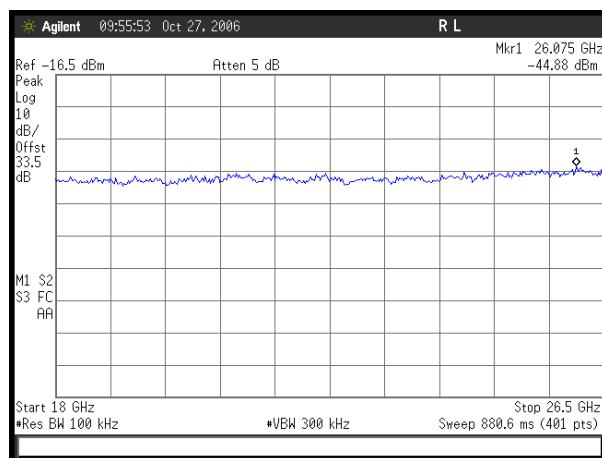


**Plot 172. Conducted Spurious Emissions, 802.11a, High Channel, 18 MHz – 26.5 GHz, 5 GHz**

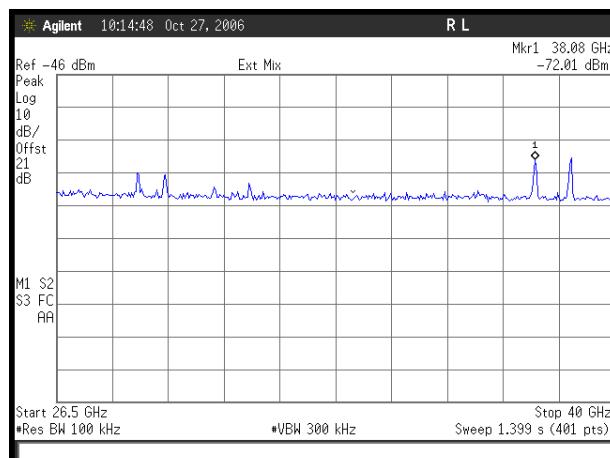


**Plot 173. Conducted Spurious Emissions, 802.11a, High Channel, 26.5 MHz – 40 GHz, 5 GHz**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.205 Spurious Emissions Requirements –Band Edge (Conducted)

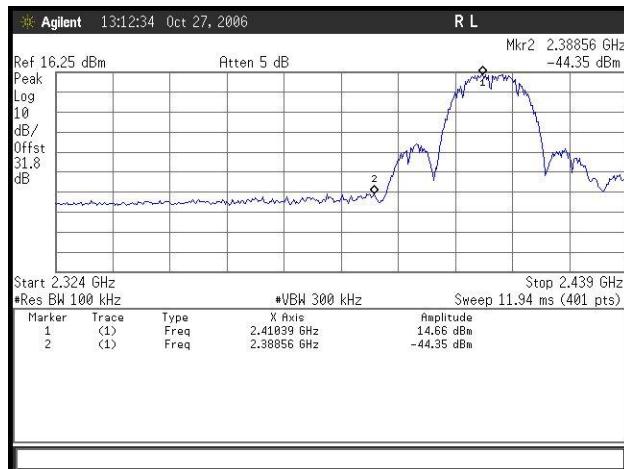


Plot 174. Conducted Band Edge, 802.11b, Low Channel, 2.4 GHz

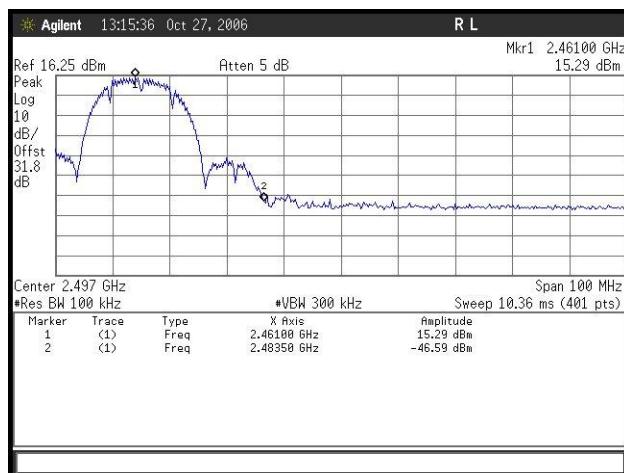


Plot 175. Conducted Band Edge, 802.11b, High Channel, 2.4 GHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.205 Spurious Emissions Requirements –Band Edge (Conducted)

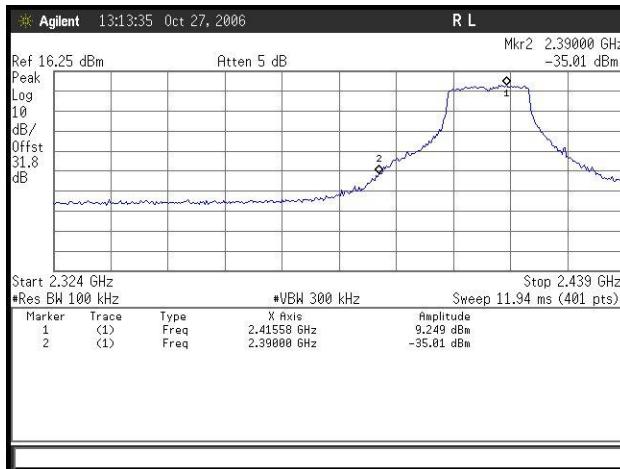


Plot 176. Conducted Band Edge, 802.11g, Low Channel, 2.4 GHz

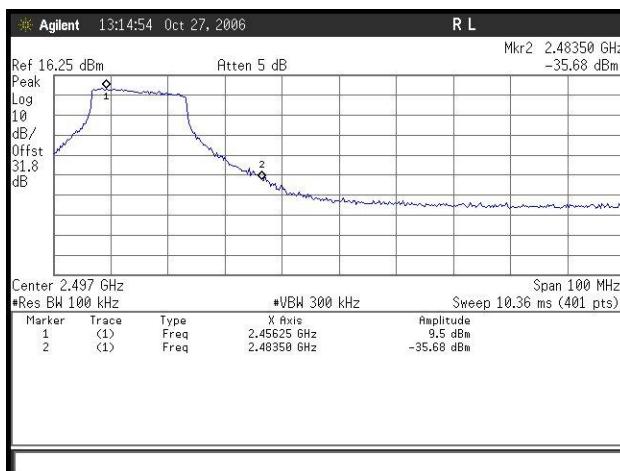


Plot 177. Conducted Band Edge, 802.11g, High Channel, 2.4 GHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.205 Spurious Emissions Requirements –Band Edge (Conducted)

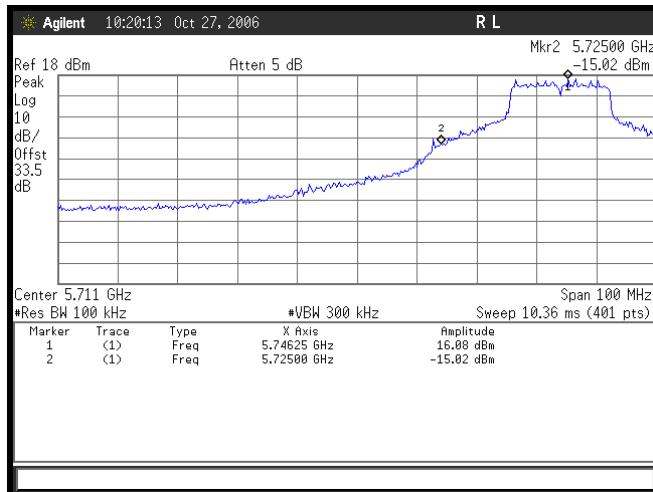

Plot 178. Conducted Band Edge, 802.11a, Low Channel, 5 GHz

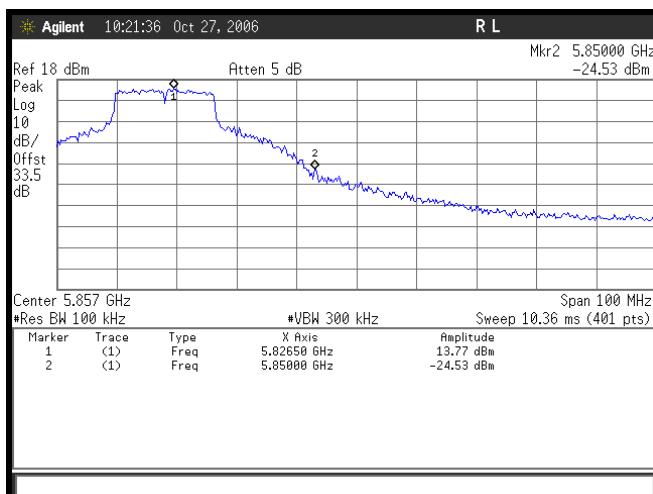

Plot 179. Conducted Band Edge, 802.11a, High Channel, 5 GHz

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(e) Peak Power Spectral Density

**Test Requirements:** **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

**Test Procedure:** The transmitter was connected directly to a Spectrum Analyzer through a directional couple. The power was monitored at the coupler port with a Peak Power Meter. The power level was set to the maximum level. The RBW and VBW were set to 3 kHz and a SPAN of 3.0 MHz with a 100 second sweep to the Spectrum Analyzer. Measurements were carried out at the low, mid and high channels.

**Test Results:** Equipment complies with the peak power spectral density limits of **§ 15.247 (e)**. The peak power spectral density was determined from plots on the following page(s).

**Test Approved By:** Dusmantha Tennakoon

**Test Date:** 10/27/06

802.11b				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	1.135	8	6.865
Mid	2437	1.643	8	6.357
High	2462	1.678	8	6.322

Table 26. Peak Power Spectral Density, Test Results, 802.11b, 2.4 GHz

802.11g				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	4.368	8	3.632
Mid	2437	-1.181	8	9.181
High	2462	-0.323	8	8.323


Table 27. Peak Power Spectral Density, Test Results, 802.11g, 2.4 GHz

802.11a				
Carrier Channel	Frequency (MHz)	Measured PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5745	2.129	8	5.871
Mid	5785	1.598	8	6.402
High	5825	1.764	8	6.236


Table 28. Peak Power Spectral Density, Test Results, 802.11a, 5 GHz




Block Diagram 3. Peak Power Spectral Density Test Setup

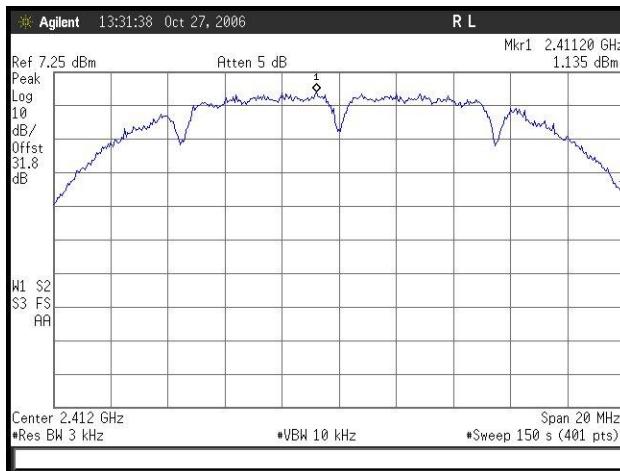


**Plot 180. Peak Power Spectral Density, 802.11b, Low Channel, 2.4 GHz**

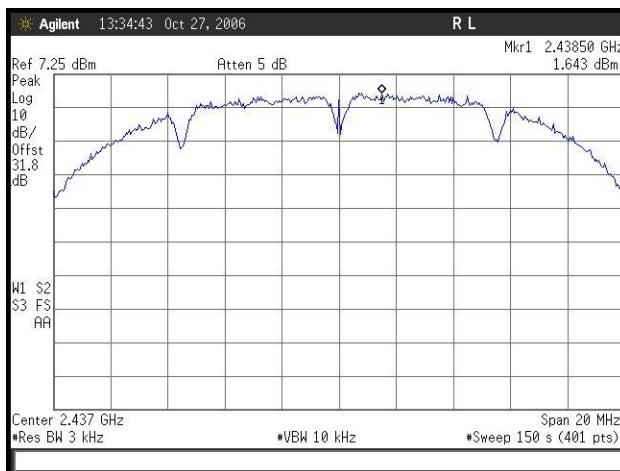


**Plot 181. Peak Power Spectral Density, 802.11b, Mid Channel, 2.4 GHz**

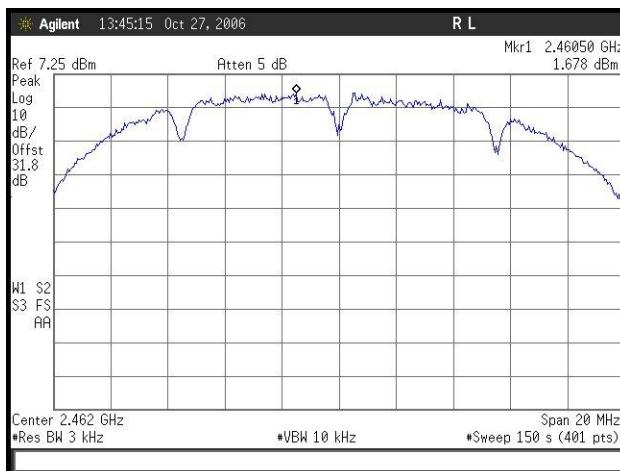


**Plot 182. Peak Power Spectral Density, 802.11b, High Channel, 2.4 GHz**

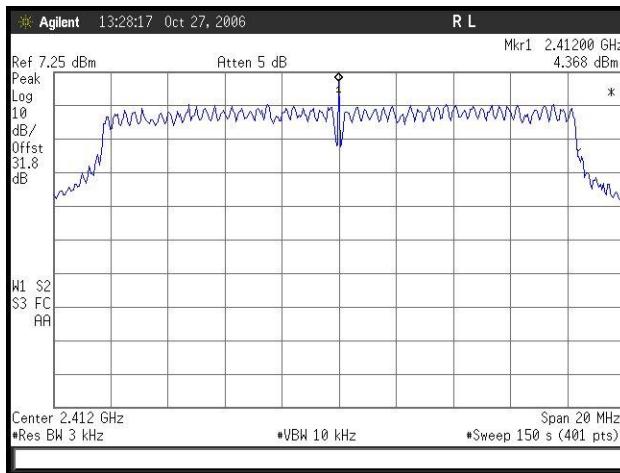


**Plot 183. Peak Power Spectral Density, 802.11g, Low Channel, 2.4 GHz**

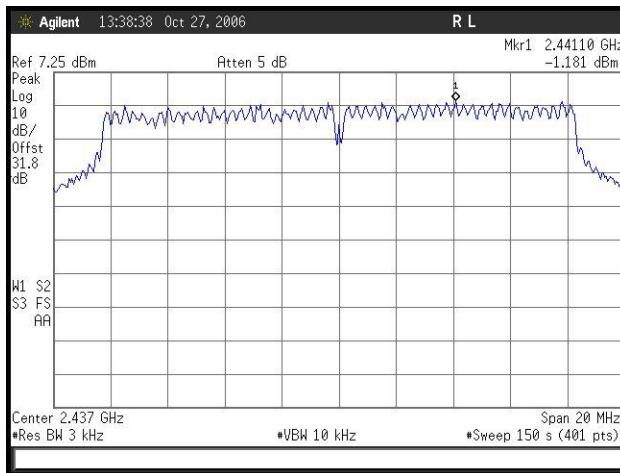


**Plot 184. Peak Power Spectral Density, 802.11g, Mid Channel, 2.4 GHz**

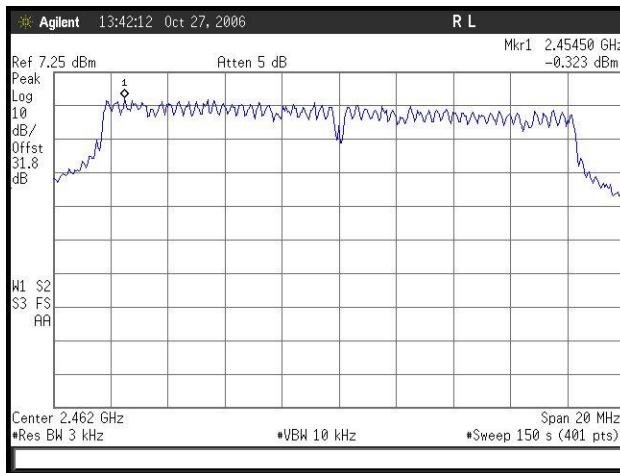


**Plot 185. Peak Power Spectral Density, 802.11g, High Channel, 2.4 GHz**

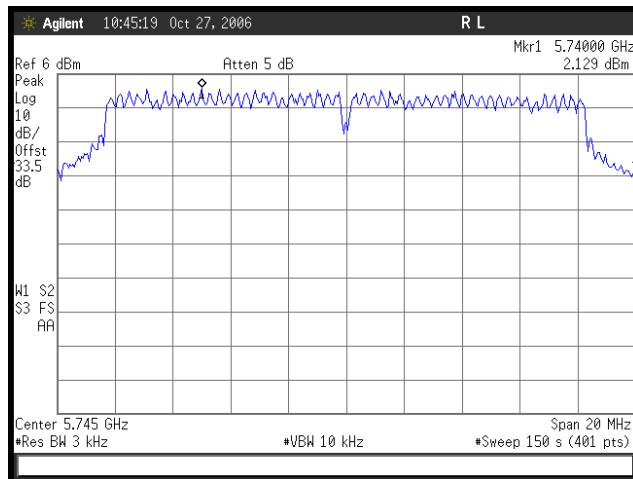

**Plot 186. Peak Power Spectral Density, 802.11a, Low Channel**

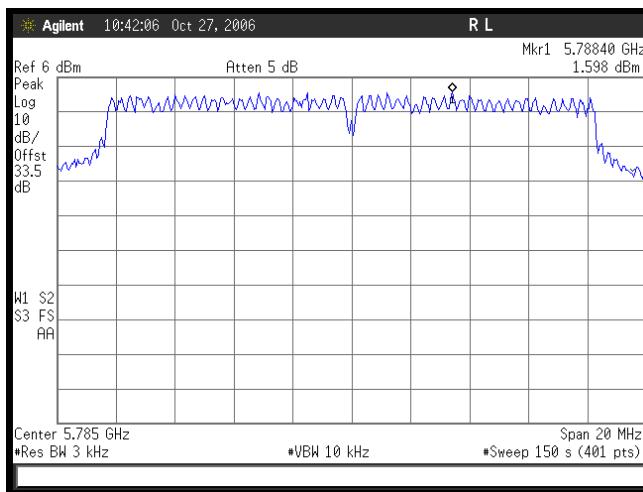

**Plot 187. Peak Power Spectral Density, 802.11a, Mid Channel**

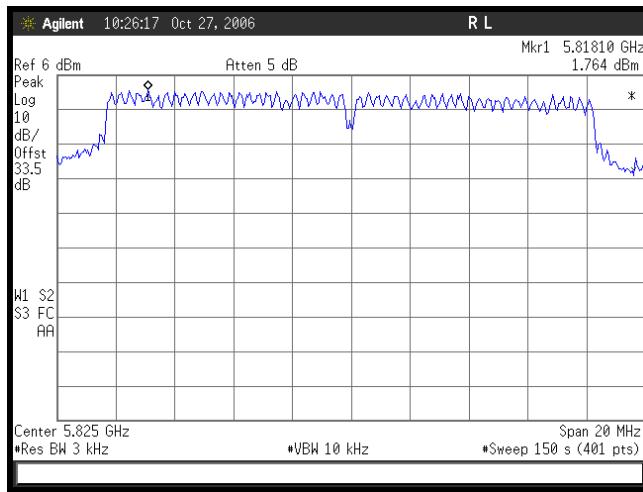

**Plot 188. Peak Power Spectral Density, 802.11a, High Channel**

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(i) Maximum Permissible Exposure

**RF Exposure Requirements:** **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

**Test Results:** The EUT was compliant with the requirements of this section.

#### 2.4 GHz Band

$$S = PG/4\pi R^2$$

$$\frac{(582.1 \text{ mW})(3.16)}{4\pi(20)^2}$$

$$S1 = 0.366 \text{ mW/cm}^2$$

#### 5.8 GHz

$$S = PG/4\pi R^2$$

$$\frac{(796 \text{ mW})(3.98)}{4\pi(20)^2}$$

$$S2 = 0.630 \text{ mW/cm}^2$$

S	Power density (mW/cm <sup>2</sup> )	General Population Limit (mW/cm <sup>2</sup> )	S as a fraction of the limit (%)
S1	0.366	1	36.6
S2	0.630	1	63.0

The total percentages do not exceed 100 % per OET 65 requirements when the spectral power density is calculated at least 20cm away from the unit.

Therefore, the EUTs meet the Uncontrolled Exposure limit.

**Test Engineer(s):** Dusmantha Tennakoon

## Electromagnetic Compatibility Criteria for Intentional Radiators

### RSS-GEN      Receiver Spurious Emissions Requirements

**Test Requirements:** The following receiver spurious emission limits shall be complied with:

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 29.

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 metres)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

**Table 29. Spurious Emission Limits for Receivers**

(b) If a conducted measurement is made, no spurious output signals appearing at the antenna terminals shall exceed 2 nanowatts per any 4 kHz spurious frequency in the band 30-1000 MHz, or 5 nanowatts above 1 GHz.

**Test Results:** The EUT was compliant with this requirement. Measurements were made radiated. The highest recorded receiver spurs is 45.93 dBuV/m @ 3m.

## IV. Test Equipment

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4502	COMB GENERATOR	COM-POWER	CGC-255	10/06/2010	10/06/2011
1T4503	SHIELDED ROOM	UNIVERSAL SHIELDING CORP	N/A	SEE NOTE	
1T4565	LISN (24 AMP)	SOLAR ELECTRONICS	9252-50-R-24-BNC	10/28/2010	10/28/2011
1T4621	ESA-E SERIES SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4402B	05/31/2011	05/31/2012
1T4563	LISN (10 AMP)	SOLAR ELECTRONICS	9322-50-R-10-BNC	10/28/2010	10/28/2011
1T4758	THERMO-HYGROMETER	CONTROL COMPANY	4040	05/21/2010	05/21/2012
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	06/14/2011	06/14/2012
1T4300	SEMI-ANECHOIC CHAMBER # 1	EMC TEST SYSTEMS	NONE	08/23/2010	08/23/2013
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	11/03/2010	11/03/2011
1T4633	THERMO/HYGRO/BAROMETER	CONTROL COMPANY	02-401	03/11/2010	03/11/2012
1T4394	ISOLATION TRANSFORMER	TOPAZ	0111T335	SEE NOTE	
1T4568	RADIATING NOISE SOURCE	MET LABORATORIES	N/A	SEE NOTE	

**Table 30. Test Equipment List**

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## V. Certification & User's Manual Information

## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### **§ 2.801 Radio-frequency device defined.**

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### **§ 2.803 Marketing of radio frequency devices prior to equipment authorization.**

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

(a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.

(1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.

(i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*

(ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.

(2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## Certification & User's Manual Information

### 1. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

### Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.

Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

### Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class <sup>[2]</sup> digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe <sup>[1]</sup> est conforme à la norme NMB-003 du Canada.

<sup>2</sup> Insert either A or B but not both as appropriate for the equipment requirements.

## End of Report