



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

October 30, 2007

Rajant Corporation
400 E. King Street
Malvern, PA 19355

Dear Brian Hassick,

Enclosed is the EMC test report for compliance testing of the Rajant Corporation, ME as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-03 ed.), Part 15, Subpart C.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\Rajant Corporation\EMC22693B-FCC247 Rev. 1)

DOC EMC702 9/13/2007

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo, the Standards Council of Canada Logo, or the Nationally Recognized Testing Laboratory (NRTL) Letters in this report reflects MET Accreditation under these programs, these letters, logo, or statements do not claim product endorsement by NVLAP or any Agency of the U.S. Government. This letter of transmittal is not a part of the attached report.



Baltimore Certificate
0591-01

The Nation's First Licensed Nationally Recognized Testing Laboratory

NVLAP
BALTIMORE
LAB CODE
100273-0



Rajant Corporation
ME

CFR Title 47, Part 15, Subpart C

Electromagnetic Compatibility Test Report

for the

**Rajant Corporation
ME**

Verified under
the FCC Certification Rules
contained in
Title 47 of the CFR, Part 15.247, Subpart C
for Intentional Radiators

MET Report: EMC22693B-FCC247 Rev. 1

October 30, 2007

Prepared For:

**Rajant Corporation
400 E. King Street
Malvern, PA 19355**

Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Avenue
Baltimore, Maryland 21230



Rajant Corporation
ME

CFR Title 47, Part 15, Subpart C

Electromagnetic Compatibility Test Report

for the

Rajant Corporation
ME

Tested Under

the FCC Certification Rules
contained in
Title 47 of the CFR, Part 15.247, Subpart C
for Intentional Radiators

Dusmantha Tennakoon
Project Engineer, Electromagnetic Compatibility Lab

Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15.407, of the FCC Rules under normal use and maintenance.

Shawn McMillen,
Wireless Coordinator, Electromagnetic Compatibility Lab



Rajant Corporation
ME

CFR Title 47, Part 15, Subpart C

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	October 30, 2007	Initial Issue.
1	October 30, 2007	Various Technical Corrections.



Table of Contents

I.	Executive Summary	1
1.1	Purpose of Test	2
1.2	Executive Summary	2
II.	Equipment Configuration.....	3
2.1	Overview.....	4
2.2	References.....	5
2.3	Test Site	5
2.4	Description of Test Sample.....	5
2.5	Equipment Configuration.....	7
2.6	Support Equipment	8
2.7	Ports and Cabling Information	8
2.8	Mode of Operation	8
2.9	Modifications	9
a)	Modifications to EUT	9
b)	Modifications to Test Standard.....	9
2.10	Disposition of EUT	9
III.	Electromagnetic Compatibility Criteria for Intentional Radiators	10
§ 15.203	Antenna Requirement.....	11
§ 15.205	Band Edge Emissions	12
§ 15.207(a)	Conducted Emissions Limits.....	18
§ 15.209(a)	Radiated Emissions –Spurious.....	20
§ 15.247(a) 6	dB Bandwidth	31
§ 15.247(b)	Peak Power Output	35
§ 15.247(d)	Spurious Emissions Requirements – RF Conducted.....	40
§ 15.247(e)	Peak Power Spectral Density	44
IV.	Appendix A	46
V.	Appendix B: Test Equipment	
VI.	Appendix C: Certification & User's Manual Information	
5.1	Certification Information	
5.2	Label and User's Manual Information	



List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing	2
Table 2. Equipment Configuration	7
Table 3. Support Equipment	8
Table 4. Ports and Cabling Information.....	8
Table 5. Restricted Bands of Operation from FCC Part 15, § 15.205	12
Table 6. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a).....	18
Table 7. Conducted Emissions - Voltage, Phase (120 VAC, 60 Hz).....	19
Table 8. Conducted Emissions - Voltage, Neutral (120 VAC, 60 Hz)	19
Table 9. Restricted Bands of Operation from FCC Part 15, § 15.205	20
Table 10. Radiated Emissions Limits from § 15.209 (a)	21
Table 11. 6 dB Bandwidth Test Results	32
Table 12. Output Power Requirements from §15.247	35
Table 13. Peak Output Power	36
Table 14. Limits for Maximum Permissible Exposure	37
Table 15. Peak Power Spectral Density Test Results	44

List of Figures

Figure 1. Block Diagram of Test Configuration, AC Power	6
Figure 2. Block Diagram of Test Configuration, Lithium Battery Power	6
Figure 3. Block Diagram of Test Configuration, Vehicle Power	7

List of Photographs

Photograph 1. Band Edge Emissions, Test Setup	17
Photograph 2. Spurious Radiated Emissions, Test Setup	30
Photograph 3. 6 dB Bandwidth Test Setup.....	34
Photograph 4. Peak Power Output, Test Setup	36



List of Graphs

Graph 1. 6 dB Bandwidth, Channel 1	32
Graph 2. 6 dB Bandwidth, Channel 11	33
Graph 3. RF Conducted Spurious Emissions, Channel 1, 1 GHz to 3 GHz	40
Graph 4. RF Conducted Spurious Emissions, Channel 1, 3 GHz to 10 GHz	41
Graph 5. RF Conducted Spurious Emissions, Channel 1, 10 GHz to 24 GHz	41
Graph 6. RF Conducted Spurious Emissions, Channel 11, 1 GHz to 3 GHz	42
Graph 7. RF Conducted Spurious Emissions, Channel 11, 3 GHz to 10 GHz	42
Graph 8. RF Conducted Spurious Emissions, Channel 11, 10 GHz to 24 GHz.....	43
Graph 9. Peak Power Spectral Density, Channel 1.....	44
Graph 10. Peak Power Spectral Density, Channel 11.....	45



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dBμA	Decibels above one microamp
dBμV	Decibels above one microvolt
dBμA/m	Decibels above one microamp per meter
dBμV/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μH	microhenry
μ	microfarad
μs	microseconds
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane



Rajant Corporation
ME

Executive Summary
CFR Title 47, Part 15, Subpart C

I. Executive Summary



1.1 Purpose of Test

An EMC evaluation was performed to determine compliance of the Rajant Corporation, ME, with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the ME. Rajant Corporation should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the ME, has been **permanently** discontinued.

1.2 Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Rajant Corporation, purchase order number 2007183. All tests were conducted using measurement procedure ANSI C63.4-2003.

Reference	Description	Results
Title 47 of the CFR, Part 15, Subpart C, §15.207	AC Power Line Conducted Emissions	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.203/15.247(b)(c)	Antenna Requirement	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.205(d)	Band Edge Emissions	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.247(a)(2)	6dB Occupied Bandwidth	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.247(b)(3)	Maximum Peak Conducted Output Power	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.247(d)	Spurious Radiated Emissions	Compliant
Title 47 of the CFR, Part 15, Subpart C, §15.247(e)	Peak Power Spectral Density	Compliant

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing

II. Equipment Configuration



Rajant Corporation
ME

Electromagnetic Compatibility
Equipment Configuration
CFR Title 47, Part 15, Subpart C

2.1 Overview

MET Laboratories, Inc. was contracted by Rajant Corporation to perform testing on the ME, under Rajant Corporation's purchase order number 2007183.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Rajant Corporation, ME.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	ME
Model(s) Covered:	ME
EUT Specifications:	Primary Power: 120 VAC
	FCC ID: VJA-ME
	Type of Modulations: DSSS, BPSK, QPSK, CCK
	Equipment Code: DTS
	Peak RF Conducted Output Power: 23.91 dBm
	EUT TX Frequency Ranges: 2412 MHz – 2462 MHz
Analysis:	The results obtained relate only to the item(s) tested.
Evaluated by:	Len Knight and Dusmantha Tennakoon
Date(s):	October 24, 2007

Note: The Rajant internal power setting as tested was:

Channel 1 = -92

Channel 11 = -78



2.2 References

CFR 47, Part 15, Subpart C	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
CFR 47, Part 15, Subpart B	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI/NCSL Z540-1-1994	Calibration Laboratories and Measuring and Test Equipment - General Requirements
ANSI/ISO/IEC 17025:2000	General Requirements for the Competence of Testing and Calibration Laboratories

2.3 Test Site

All testing was performed at MET Laboratories, Inc., 914 West Patapsco Avenue, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber. In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by the National Voluntary Laboratory Accreditation Program (Lab Code: 100273-0).

2.4 Description of Test Sample

The ME, Equipment Under Test (EUT), is a portable networking device that supports wired and wireless routing, and 802.11b access point/bridging/meshing functionality. Only channels 1 and 11 can be activated on this device.

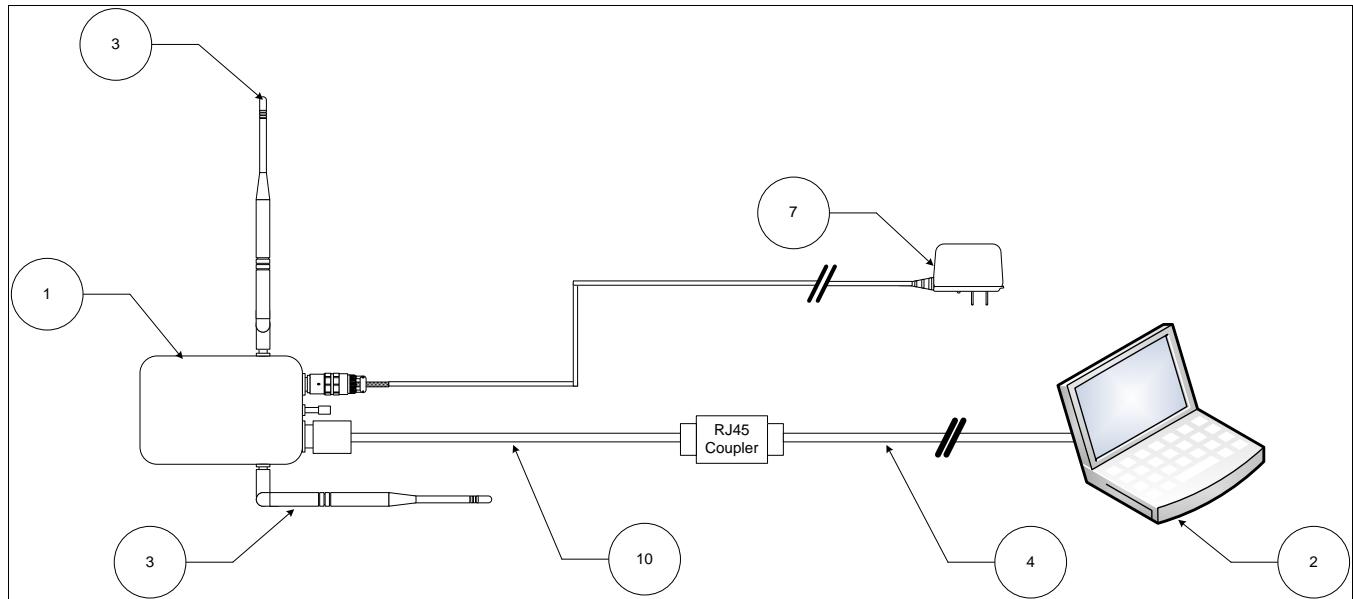


Figure 1. Block Diagram of Test Configuration, AC Power

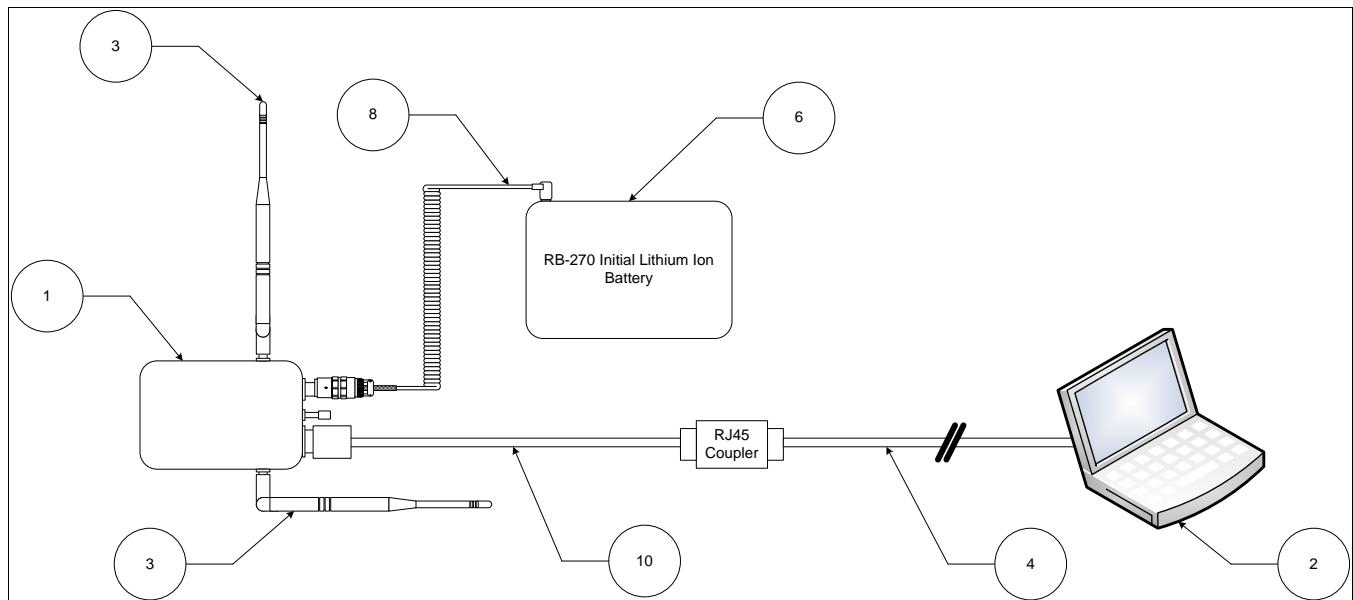


Figure 2. Block Diagram of Test Configuration, Lithium Battery Power

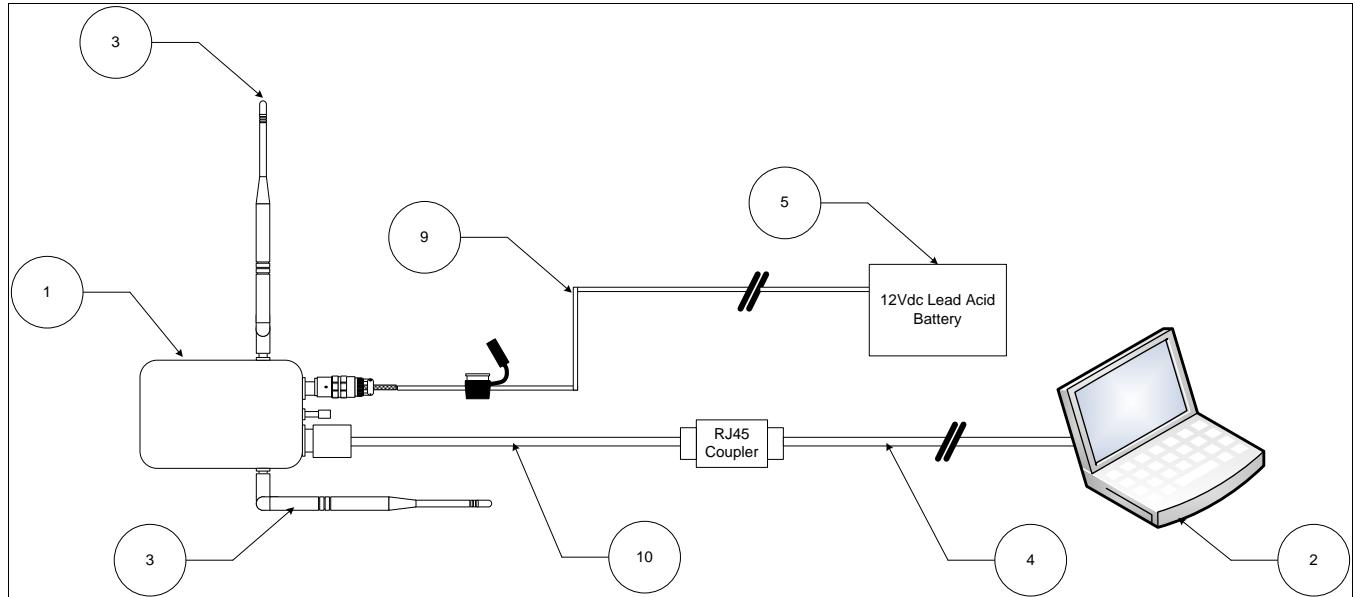


Figure 3. Block Diagram of Test Configuration, Vehicle Power

2.5 Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number
1	ME unit	ME

Table 2. Equipment Configuration



2.6 Support Equipment

Rajant Corporation supplied support equipment necessary for the operation and testing of the ME. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number	Serial Number
2	Laptop	IBM	Thinkpad	N/A
3	5dBi Antenna, SMA	Pacific Wireless	IN24-5RD	N/A
4	Cat5e Ethernet Cable	N/A	N/A	N/A
5	Lead Acid Battery	N/A	N/A	N/A
6	Initial RB-270 Li-Ion Battery	Initial DVD	RB-270	N/A

Table 3. Support Equipment

2.7 Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded? (Y/N)	Termination Box ID & Port ID
7	Power Connector	ME/SE AC/DC Power Supply	1	~6.0ft	N	110 AC Mains
8	Power Connector	ME Battery Cable	1	~16.0in	N	RB-270 Battery (6)
9	Power Connector	2pin Vehicle Cable	1	~12.0ft	N	Lead Acid Battery (5)
10	Ethernet Port	Ethernet Dongle Cable	1	~8.0in	N	Cat5e Cable (4) and Laptop (2)
11	RF Ports	SMA Connector to Antenna	2	7.75in	N	5dBi Omnidirectional Antenna (3)

Table 4. Ports and Cabling Information

2.8 Mode of Operation

The unit simulated a network packing routing operation internally and fully exercised the radio transceiver cards by forcing them into a mode where they would continuously transmit. The ME only operates on Channels 1 and 11 (2412 and 2462 MHz). The EUT has two antennas. One antenna is dedicated to Channel 1 and the other to Channel 11.

2.9 Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

2.10 Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Rajant Corporation upon completion of testing.

III. Electromagnetic Compatibility Criteria for Intentional Radiators

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.203 Antenna Requirement

Test Requirement:

§ 15.203: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

Results:

The antenna will be professionally installed. The EUT is therefore compliant with §15.203. The following antennas will be used for this product. All antennas have been tested. The testing for 6, 9, and 12 dBi antennas are shown in Appendix A.

Antenna Type	Gain (dBi)	Manufacturer
Omni	5 dBi	Pacific Wireless
Omni	6 dBi	WiFi-Plus, Inc.
120 Sector	9 dBi	Pacific Wireless
Omni	12 dBi	Pacific Wireless

Test Engineer(s): Dusmantha Tennakoon

Test Date(s): July 26, 2007

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.205 Band Edge Emissions

Test Requirement(s): **§ 15.205 (a):** Except as shown in paragraph (d) of **15.205 Restricted bands of operation**, only spurious emissions are permitted in any of the frequency bands specified in Table 5:

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Note
13.36–13.41.			
Note : Above 38.6			


Table 5. Restricted Bands of Operation from FCC Part 15, § 15.205

Test Procedure: The EUT was set up at maximum power. Channel 1 and channel 11 were active when making measurements. All corrections have been incorporated into plot.


Test Results: The EUT was compliant with the requirements of this section.

Test Engineer(s): Dusmantha Tennakoon


Test Date(s): October 15, 2007

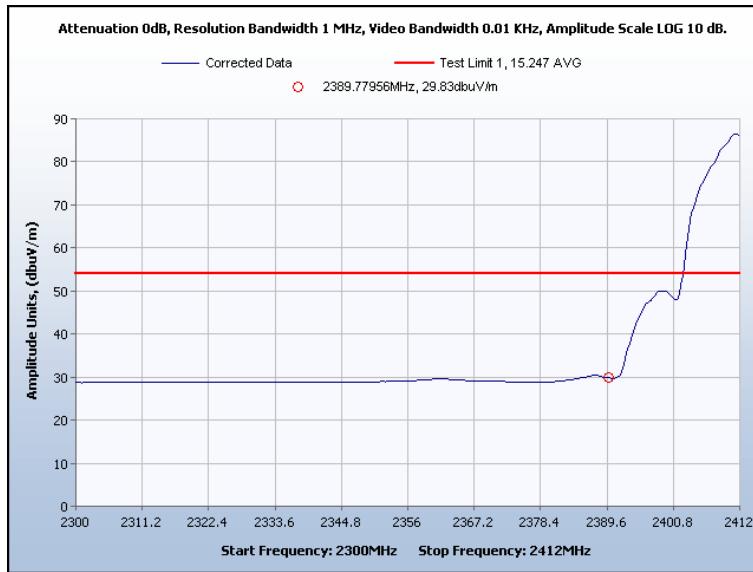


Plot 1. Band Edge Emissions, Channel 1, Horizontal, Average, 2300 MHz to 2412 MHz

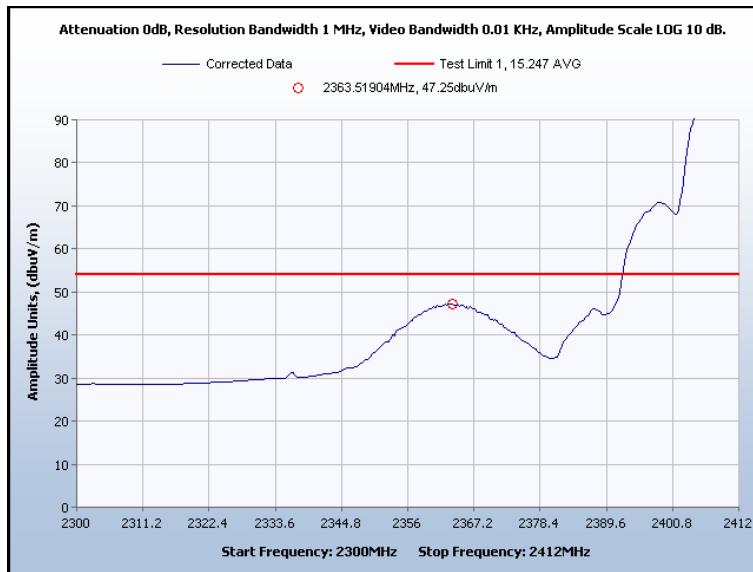


Plot 2. Band Edge Emissions, Channel 1, Vertical, Average, 2300 MHz to 2412 MHz

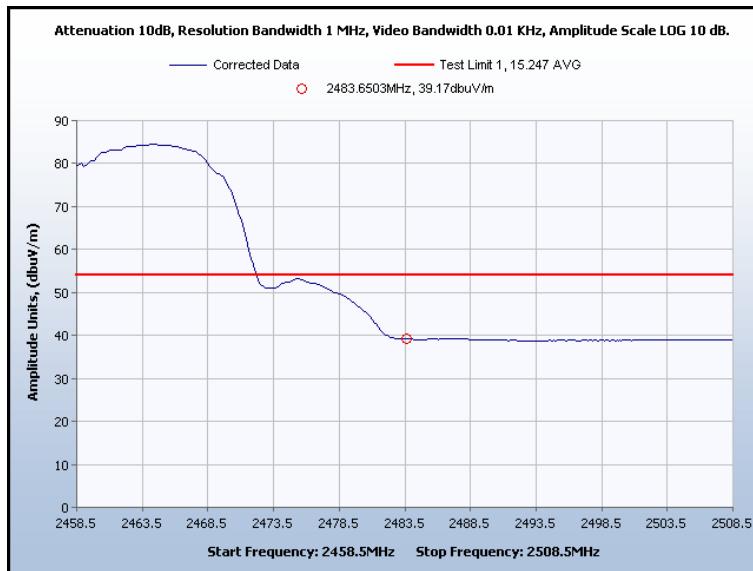


Plot 3. Band Edge Emissions, Channel 11, Horizontal, Average, 2458.5 MHz to 2508.5 MHz

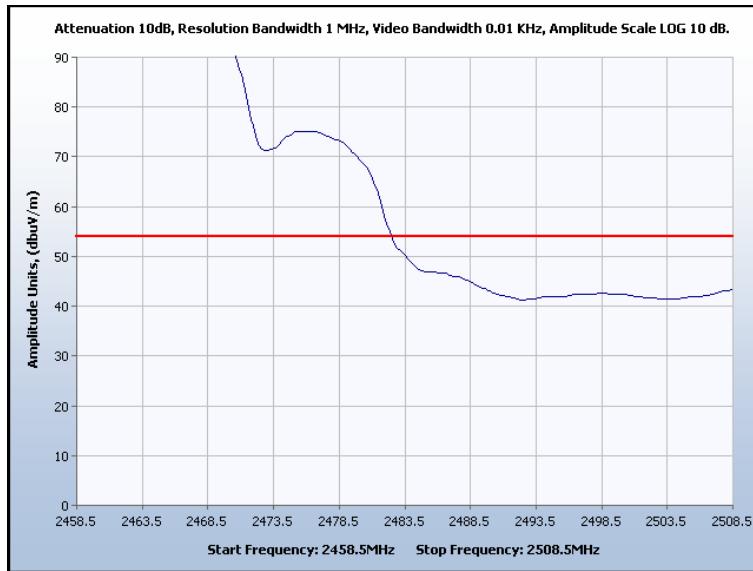


Plot 4. Band Edge Emissions, Channel 11, Vertical, Average, 2458.5 MHz to 2508.5 MHz

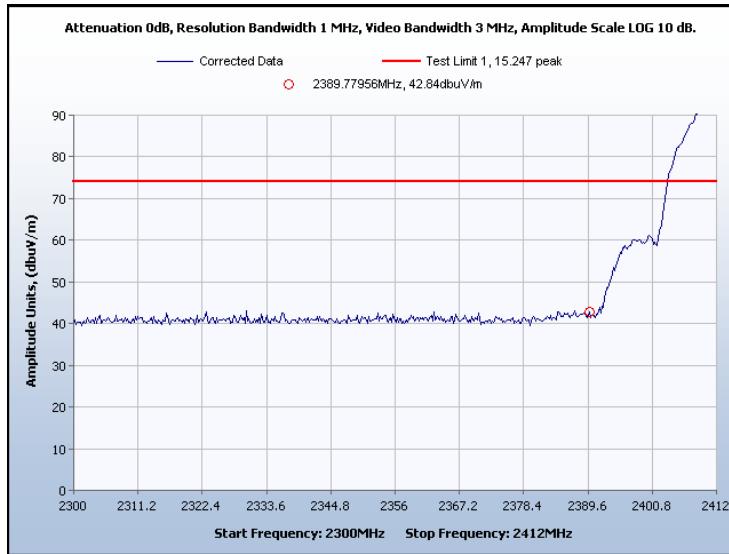


Plot 5. Band Edge Emissions, Channel 1, Horizontal, Peak, 2300 MHz to 2412 MHz

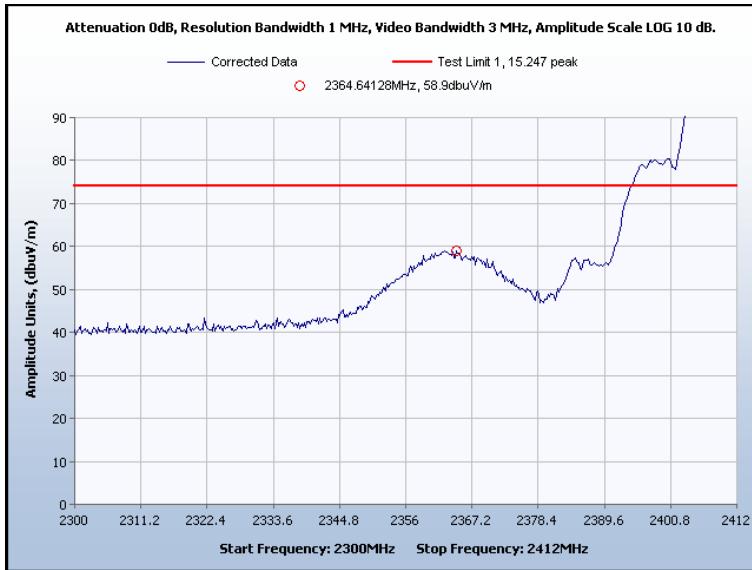

Plot 6. Band Edge Emissions, Channel 1, Vertical, Peak, 2300 MHz to 2412 MHz

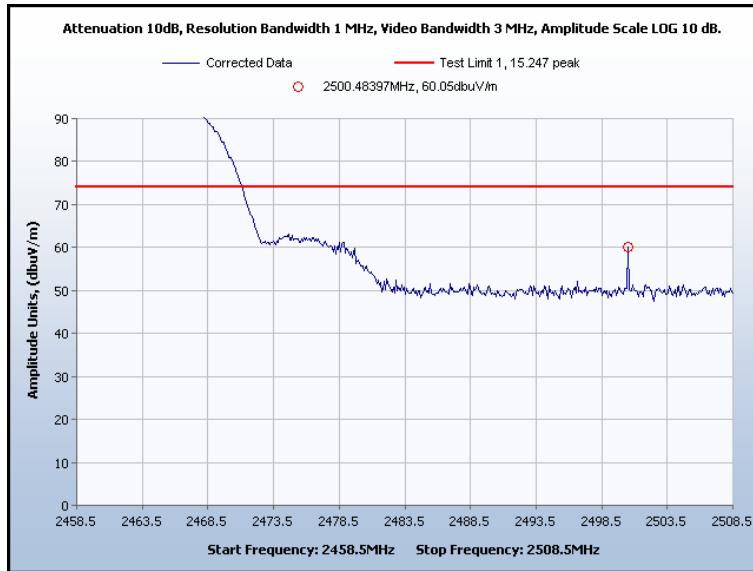

Plot 7. Band Edge Emissions, Channel 11, Horizontal, Peak, 2458.5 MHz to 2508.5 MHz

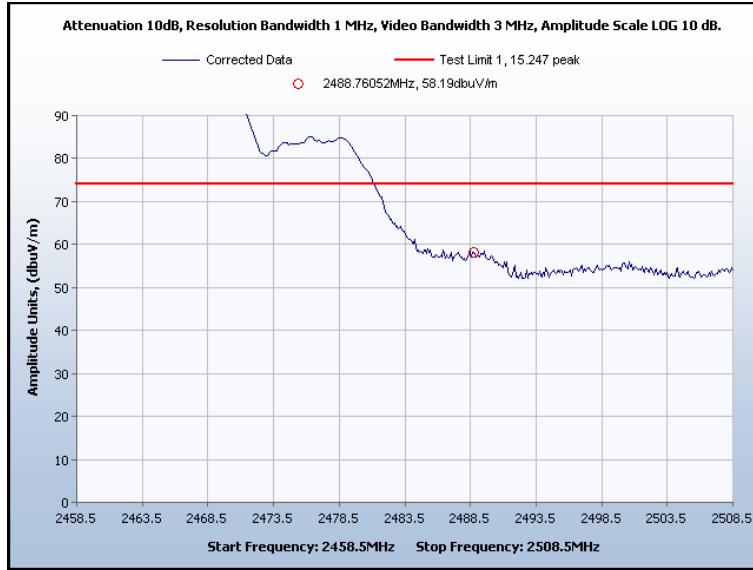

Plot 8. Band Edge Emissions, Channel 11, Vertical, Peak, 2458.5 MHz to 2508.5 MHz



Photograph 1. Band Edge Emissions, Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Test Requirement(s):

§ 15.207 (a): For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB μ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

Table 6. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)

Test Procedure:

The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50 Ω /50 μ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50 Ω /50 μ H LISN as the input transducer to an EMC/field intensity meter. The tests were conducted in a RF-shielded enclosure.

The EUT was operated in its normal mode of operation.

Test Results:

The EUT was compliant with the Conducted Emission limits of **§15.207(a)** for Intentional Radiators. See following pages for detailed test results.

Test Engineer(s):

Dusmantha Tennakoon

Test Date(s):

July 23, 2007

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.207 Conducted Emissions Limits

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.368663	54.2	0.17	54.37	58.53	-4.33	43.7	0.17	43.87	48.53	-4.66
0.370544	52.66	0.17	52.77	58.49	-5.89	42.2	0.17	42.37	48.49	-6.12
0.180625	51.4	0.1370625	51.5370625	64.46	-13.06	47.2	0.1370625	47.3370625	54.46	-7.12294
0.41425	49.7	0.17	49.87	57.56	-7.86	39.4	0.17	39.57	47.56	-7.99
0.833385	45	0.17	45.17	56	-11	33.2	0.17	33.37	46	-12.63
0.60193	44.8	0.17	44.97	56	-11.2	33.5	0.7	33.67	46	-12.33
0.600203	45.1	0.17	45.27	56	-10.9	32.4	0.17	32.57	46	-13.43
3.622014	41.9	0.17	42.07	56	-14.1	30	0.17	30.17	46	-15.83

Table 7. Conducted Emissions - Voltage, Phase (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dBuV) QP	Cable Loss (dB)	Corrected Measurement (dBuV) QP	Limit (dBuV) QP	Margin (dB) QP	Uncorrected Meter Reading (dBuV) Avg.	Cable Loss (dB)	Corrected Measurement (dBuV) AVG	Limit (dBuV) AVG	Margin (dB) AVG
0.37225	54.7	0.17	54.87	58.45	-3.75	42.9	0.17	43.07	48.45	-5.38
0.369581	54.7	0.17	54.87	58.51	-3.81	41.9	0.17	42.07	48.51	-6.44
0.369669	54	0.17	54.17	58.51	-4.51	41.9	0.17	42.08	48.51	-6.44
0.41705	49.1	0.17	49.27	57.51	-8.41	35.5	0.17	35.67	47.51	-11.84
0.648768	44.2	0.17	44.37	56	-11.8	30.3	0.17	30.47	46	-15.53
0.877863	42.6	0.17	42.77	56	-13.4	26.5	0.17	26.67	46	-19.33
0.883619	41.7	0.17	41.87	56	-14.3	25.2	0.17	25.37	46	-20.63
1.766724	40.3	0.17	40.47	56	-15.7	21.9	0.17	22.07	46	-23.93

Table 8. Conducted Emissions - Voltage, Neutral (120 VAC, 60 Hz)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.209 Radiated Emissions –Spurious

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Note
13.36–13.41.			
Note: Above 38.6			

Table 9. Restricted Bands of Operation from FCC Part 15, § 15.205

§ 15.205 (b): (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§ 15.35 (b): ...When average radiated emission measurements are specified in this part, including emission measurements below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules...

Frequency (MHz)	Field Strength (Microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Table 10. Radiated Emissions Limits from § 15.209 (a)

Test Procedure: For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

In accordance with §15.35 (b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.


For radiated Spurious emissions, the EUT was scanned from 1 GHz to 18 GHz, excluding the band 2.3 GHz to 2.5 GHz, which was covered under Band Edge Emissions. In order to demonstrate compliance, measurements were taken in the form of peak plots shown with a peak and an average limit line. The plots were made at a 3m measurement distance and corrected for cable loss, and antenna correction factors, by the capture software. At each channel of interest, the EUT was rotated about all three of its orthogonal axes.

Peak measurements, which exceeded the average limit line were re-measured using video averaging and plotted against an average limit line. Channels 1 and 11 were active during testing.


Test Results: The EUT was compliant with the requirements of this section.

Test Engineer(s): Dusmantha Tennakoon


Test Date(s): October 15, 2007

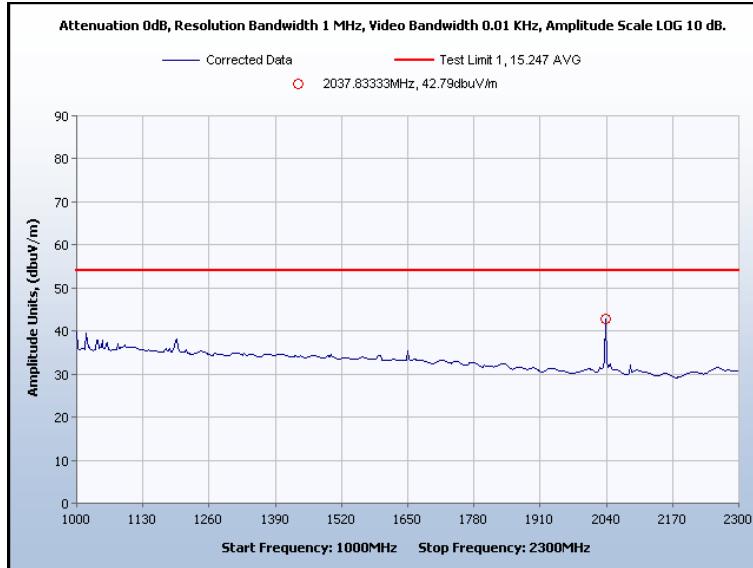


Plot 9. Spurious Radiated Emissions, Horizontal, Average, 1 GHz to 2.3 GHz

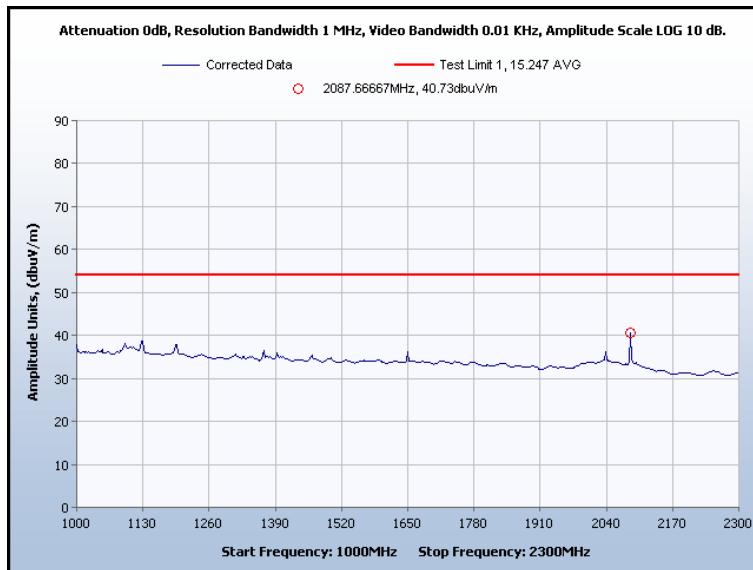


Plot 10. Spurious Radiated Emissions, Vertical, Average, 1 GHz to 2.3 GHz

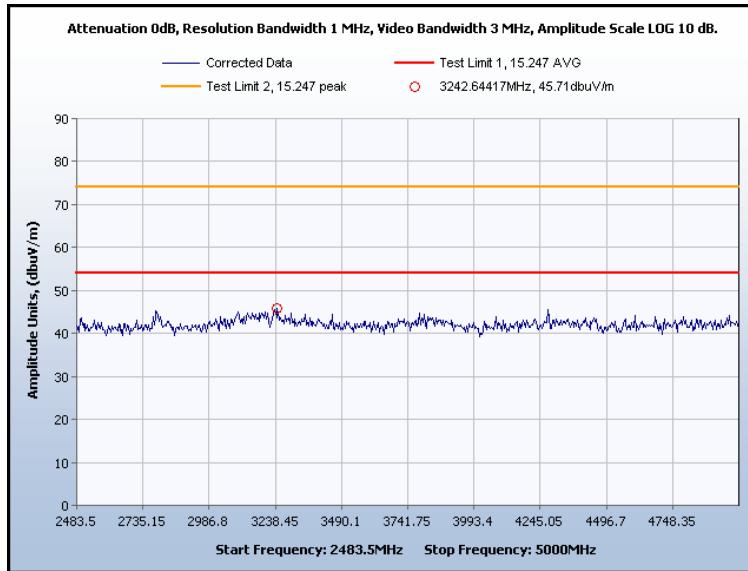


Plot 11. Spurious Radiated Emissions, Horizontal, Average, 2.48 GHz to 5GHz

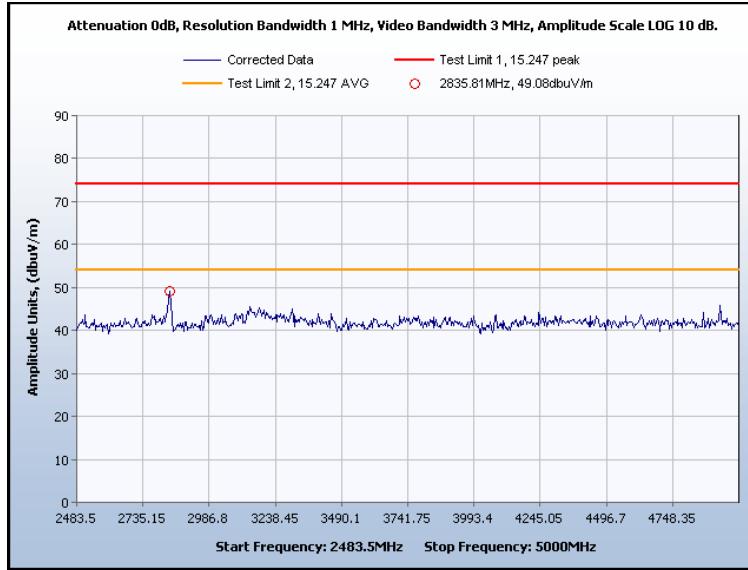


Plot 12. Spurious Radiated Emissions, Vertical, Average, 2.48 GHz to 5GHz

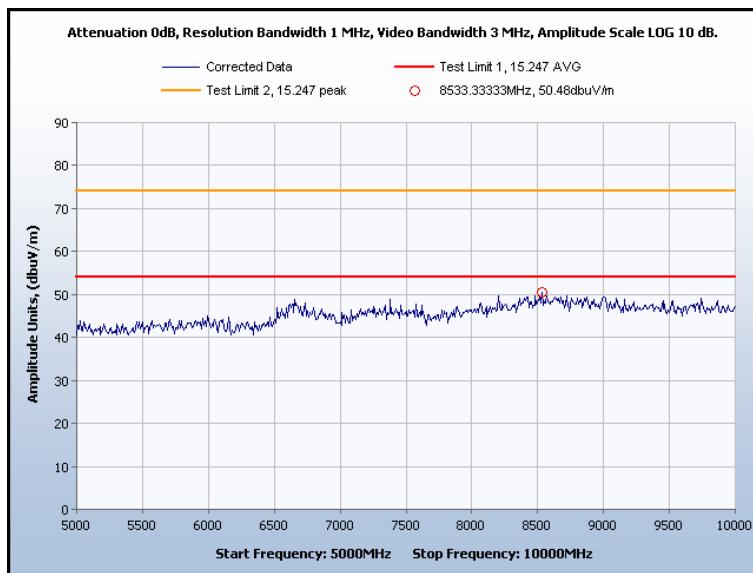


Plot 13. Spurious Radiated Emissions, Horizontal, Average, 5 GHz to 10 GHz

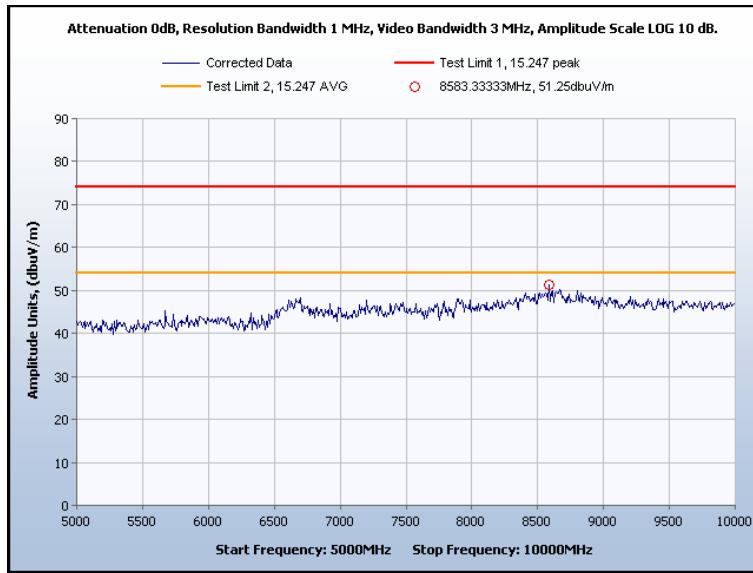


Plot 14. Spurious Radiated Emissions, Vertical, Average, 5 GHz to 10 GHz

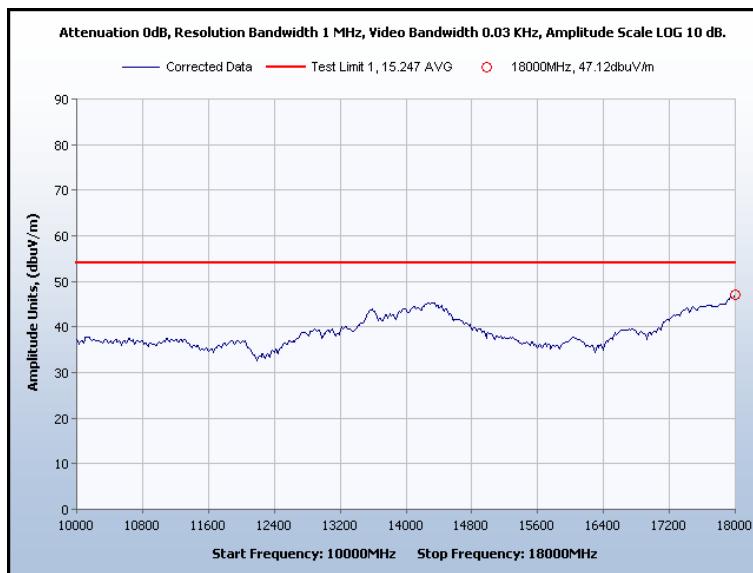


Plot 15. Spurious Radiated Emissions, Horizontal, Average, 10 GHz to 18 GHz

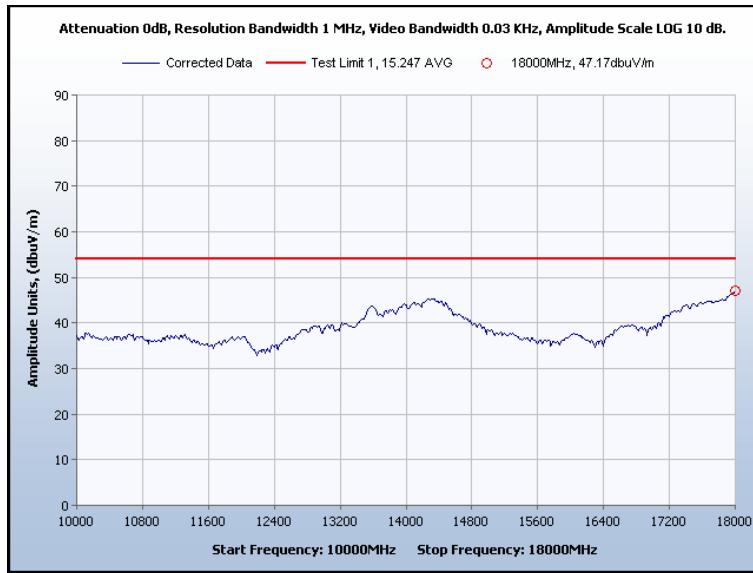


Plot 16. Spurious Radiated Emissions, Vertical, Average, 10 GHz to 18 GHz

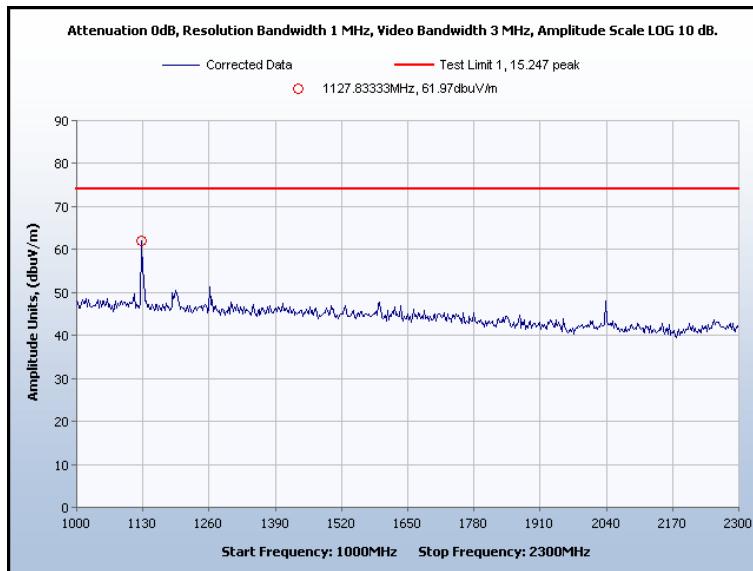


Plot 17. Spurious Radiated Emissions, Horizontal, Peak, 1 GHz to 2.3 GHz

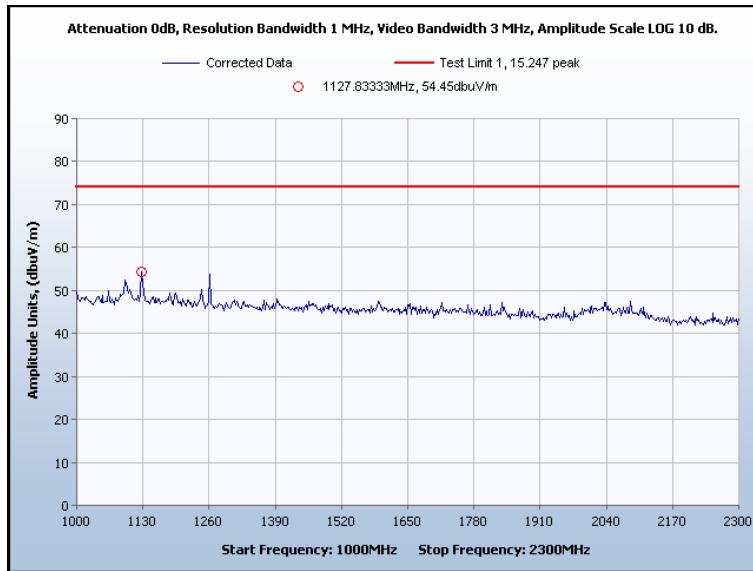


Plot 18. Spurious Radiated Emissions, Vertical, Peak, 1 GHz to 2.3 GHz

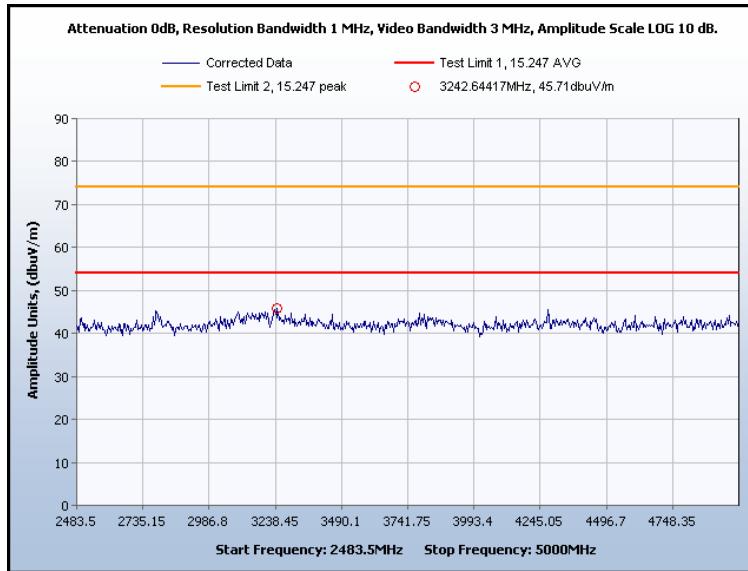


Plot 19. Spurious Radiated Emissions, Horizontal, Peak, 2.48 GHz to 5GHz

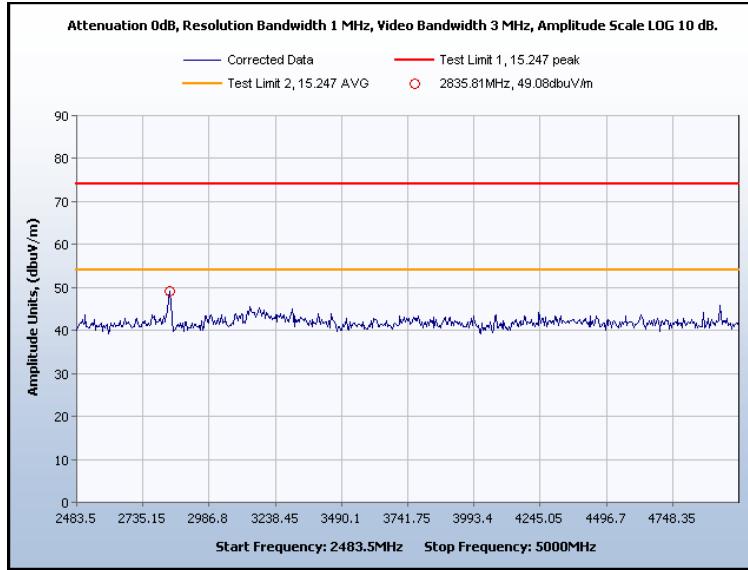


Plot 20. Spurious Radiated Emissions, Vertical, Peak, 2.48 GHz to 5GHz

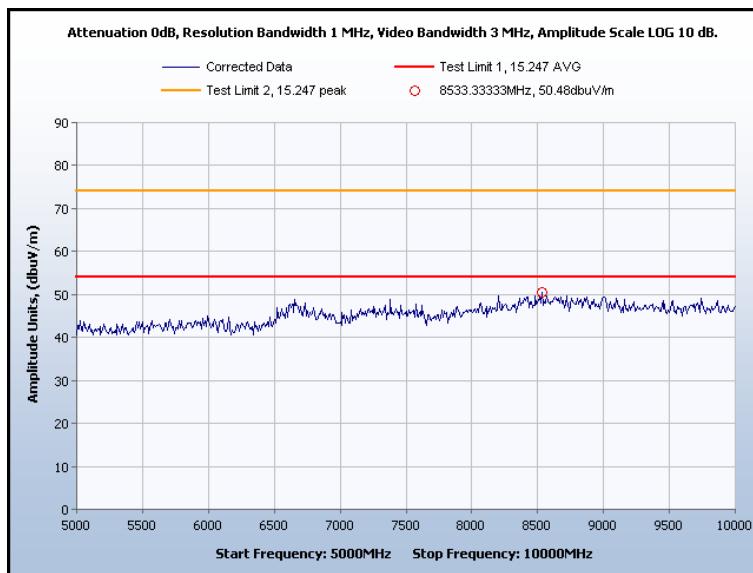


Plot 21. Spurious Radiated Emissions, Horizontal, Peak, 5 GHz to 10 GHz

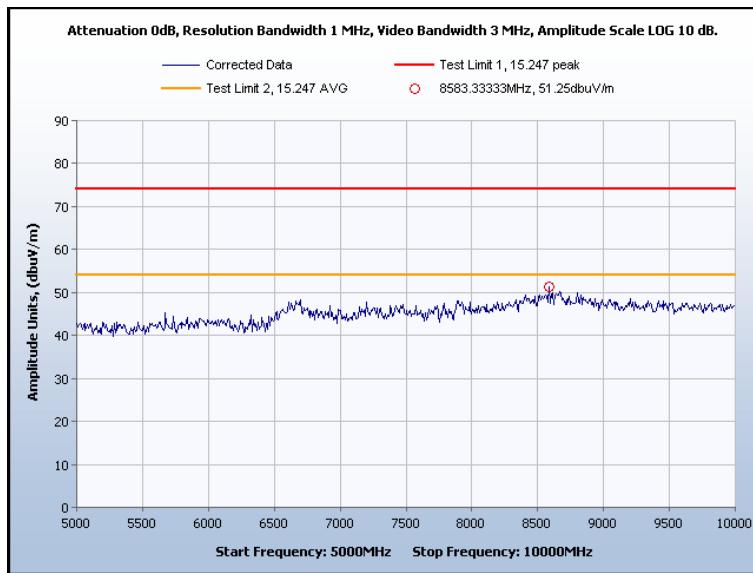

Plot 22. Spurious Radiated Emissions, Vertical, Peak, 5 GHz to 10 GHz

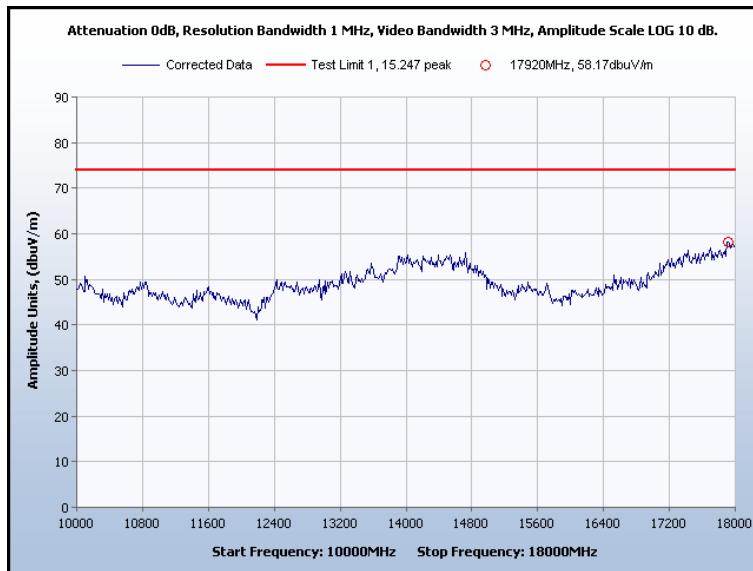

Plot 23. Spurious Radiated Emissions, Horizontal, Peak, 10 GHz to 18 GHz

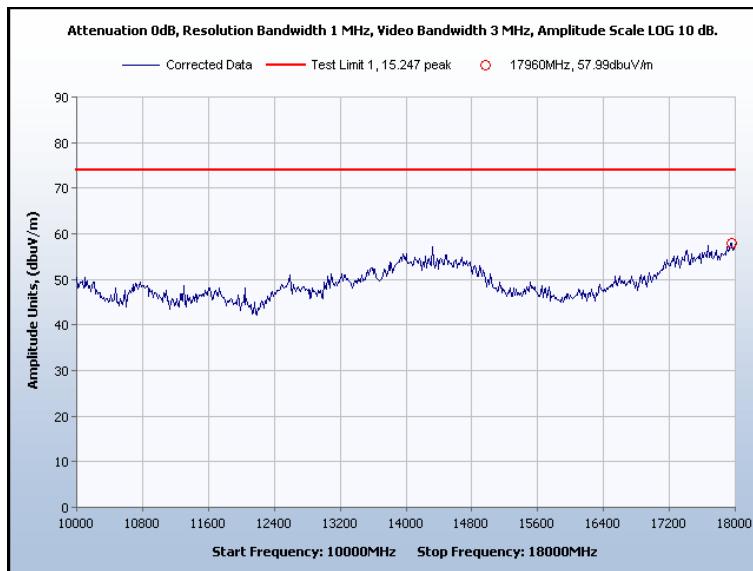

Plot 24. Spurious Radiated Emissions, Vertical, Peak, 10 GHz to 18 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.109; § 15.209 Radiated Emissions Limits



Photograph 2. Spurious Radiated Emissions, Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB a Bandwidth

Test Requirements:

§ 15.247(a): Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

§ 15.247(a)(2): For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Procedure:

The transmitter was set to the channels 1 and 11 at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW of 100 kHz, VBW > RBW. The 6 dB Bandwidth was measured and recorded.

Test Results:

Equipment complies with § 15.247 (a). The 6 dB Bandwidth was determined from the plots on the following pages.

Test Engineer(s): Len Knight


Test Date(s): July 25, 2007

Electromagnetic Compatibility Criteria for Intentional Radiators


§ 15.247(a) 6 dB Bandwidth

Channel	Measured 6 dB Bandwidth	Test Limit (kHz)
1	10.13 MHz	500
11	9.31 MHz	500

Table 11. 6 dB Bandwidth Test Results

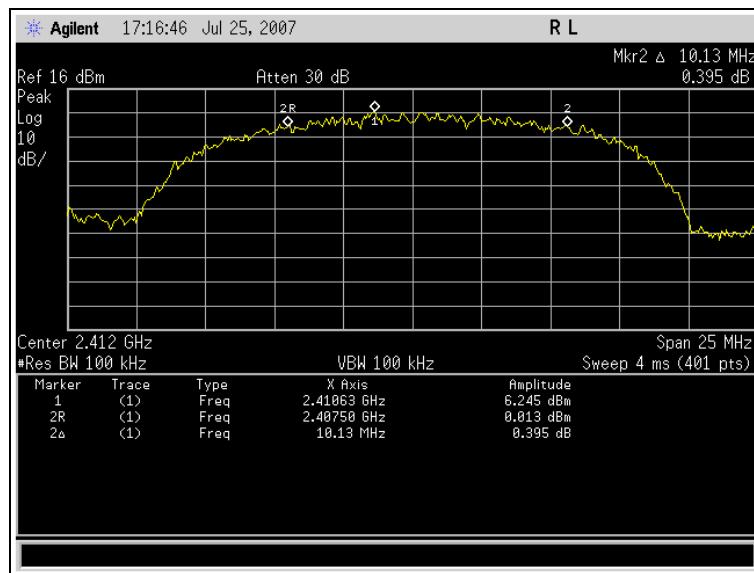

Graph 1. 6 dB Bandwidth, Channel 1

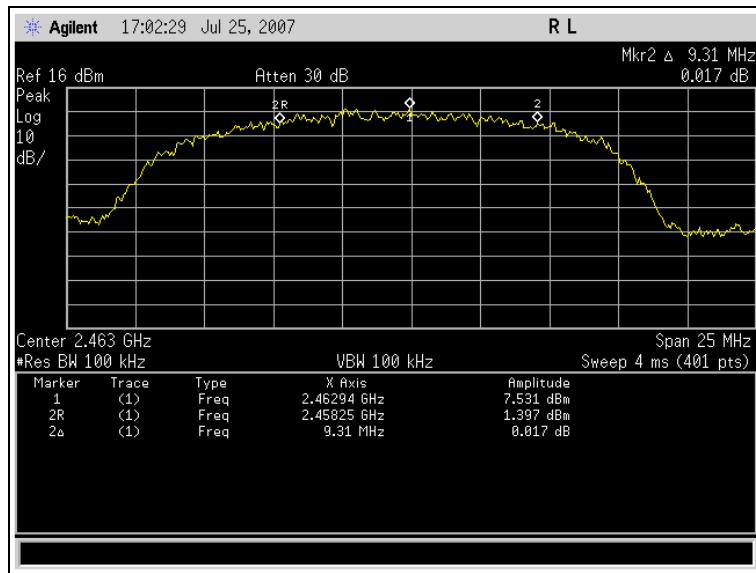

Graph 2. 6 dB Bandwidth, Channel 11

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(a) 6 dB Bandwidth



Photograph 3. 6 dB Bandwidth Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output

Test Requirements:

§15.247(b): The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

Table 12. Output Power Requirements from §15.247

§15.247(c): if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 12, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omni-directional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) Peak Power Output

Test Procedure: The transmitter was connected to a calibrated PSA Spectrum Analyzer. The EUT was measured at each channel.


Test Results: Equipment complies with the Peak Power Output limits of § 15.247(b).

Channel #	Measured Output Power (dBm)
1	23.35
11	23.91

Table 13. Peak Output Power

Test Engineer(s): Dusmantha Tennakoon

Test Date(s): October 15, 2007

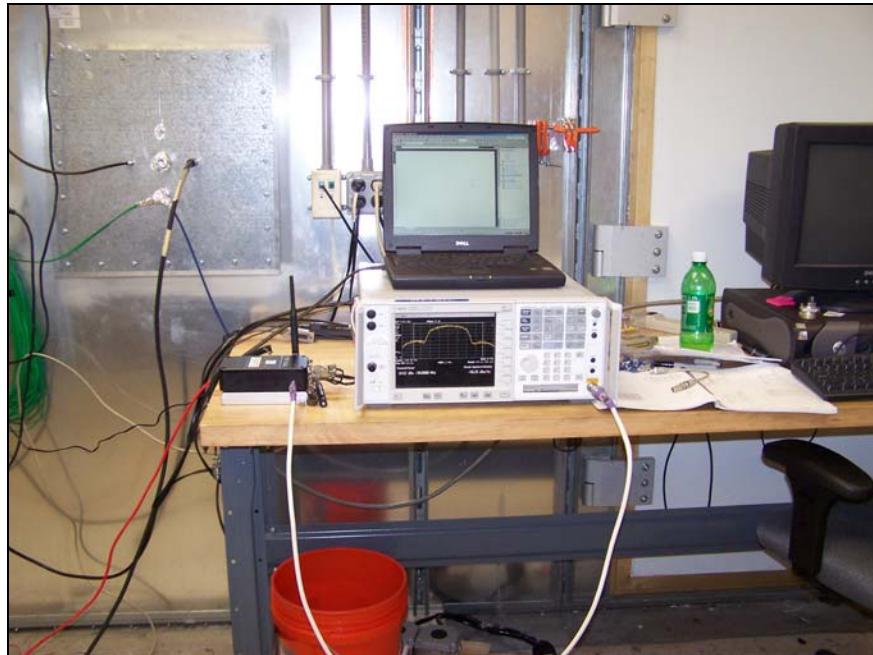

Photograph 4. Peak Power Output, Test Setup

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) RF Exposure

RF Exposure Requirements: **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

RF Radiation Exposure Limit: **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
(A) Limits for Occupational/Control Exposures				
30-300	61.4	0.163	1.0	6
300-1,500	--	--	F/300	6
1,500-100,000	--	--	5	6
(B) Limits for General Population/Uncontrolled Exposure				
30-300	27.5	0.073	0.2	30
300-1,500	--	--	F/1,500	30
1,500-100,000	--	--	1.0	30

Table 14. Limits for Maximum Permissible Exposure

Note: F=Frequency in MHz

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2$$

where, S = Power Density mW/m²
 P = Power Input to antenna mili Watts
 G = Numeric Antenna Gain
 R = Distance to the center of radiation of the antenna (20 cm for Mobile minimum distance)

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(b) RF Exposure

Test Procedures: Antenna substitution was used, in order to find the maximum EIRP. The methods of TIA/EIA 603 were used. From the EIRP, the power density was calculated.

Test Results: MPE Limit Calculation: EUT's operating frequencies @ 2412 and 2462 MHz; only channel 1 and 11 are active on this unit. There are two transmitter modules and each one has its own antenna. The antennas are identical. Highest conducted power on channel 1 = 23.35 dBm (peak) and highest conducted power on channel 11 = 23.91 dBm. Therefore, **Limit for Uncontrolled exposure: 1 mW/cm²**.

The 5 dBi antenna will be placed less than 20 cm apart. The calculation below shows that contributions from both 5 dBi antennas do not exceed the 1 mW/cm².

EUT maximum antenna gain = 5 dBi.

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2$$

where, S = Power Density mW/m²

P = Power Input to antenna mili Watts

G = Numeric Antenna Gain

R = Distance to the center of radiation of the antenna (20 cm for Mobile minimum distance)

Channel 1:

Antenna Numeric Gain = 10 ^{dB_i/10}

Power at antenna port = 217 mW

Antenna Gain = 5 dBi

Numeric antenna gain = $10^{5/10} = 3.16$

$$S = (217)(3.16) / 4(3.1416)(20)^2$$

$$S = 0.136 \text{ mW/cm}^2$$

Channel 11:
Antenna Numeric Gain = $10^{\text{dBi}/10}$

Power at antenna port = 247 mW

Antenna Gain = 5 dBi

Numeric antenna gain = $10^{5/10} = 3.16$

$$S = (247)(3.16) / 4(3.1416)(20)^2$$

$$S = 0.155 \text{ mW/cm}^2$$

Therefore, total power density = $0.136 + 0.155 = 0.291 \text{ mW/cm}^2$

Therefore, EUT with 5 dBi antennas meet the Uncontrolled Exposure limit.

The rest of the antennas will be placed more than 20 cm apart by means of external cables. The following calculations showed that the highest gain antenna (12 dBi) also meets the 1 mW/cm² limit.

Channel 1:

Power at antenna port = 217 mW

Antenna Gain = 12 dBi

Numeric antenna gain = $10^{12/10} = 15.8$

$$S = (217)(15.8)/4(3.1416)(20)^2 = 0.682 \text{ mW/cm}^2$$

Channel 11:

Power at antenna port = 247 mW

Antenna gain = 12 dBi

Numeric antenna gain = 15.8

$$S = (217)(15.8)/4(3.1416)(20)^2 = 0.776 \text{ mW/cm}^2$$

Therefore, both channels meet the uncontrolled exposure limit.

Test Engineer(s): Dusmantha Tennakoon

Test Date(s): October 15, 2007

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(d) Spurious Emissions – RF Conducted

Test Requirements:

§15.247(d): In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

Test Procedure:

The EUT was configured with the control software to transmit at maximum power. The transmit output was connected to the analyzer through an attenuator. RBW = 100 kHz, VBW \geq RBW. Testing was performed for channels 1 and 11.

Test Results:


The EUT was compliant with the requirements of this section.

Test Engineer(s):

Dusmantha Tennakoon

Test Date(s):

October 15, 2007

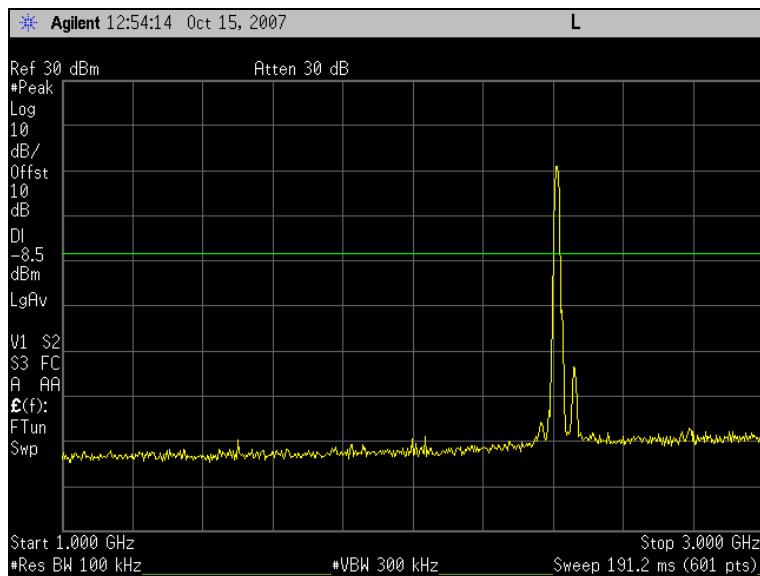


Graph 3. RF Conducted Spurious Emissions, Channel 1, 1 GHz to 3 GHz




Graph 4. RF Conducted Spurious Emissions, Channel 1, 3 GHz to 10 GHz




Graph 5. RF Conducted Spurious Emissions, Channel 1, 10 GHz to 24 GHz

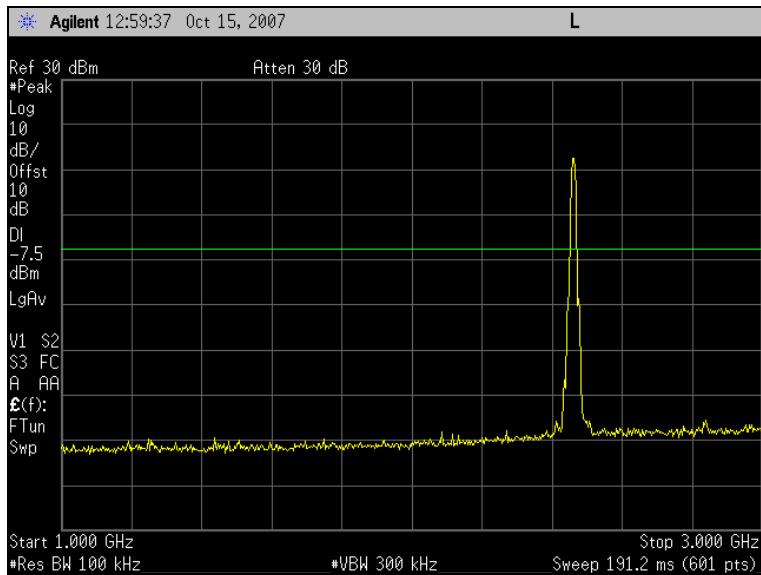

Graph 6. RF Conducted Spurious Emissions, Channel 11, 1 GHz to 3 GHz

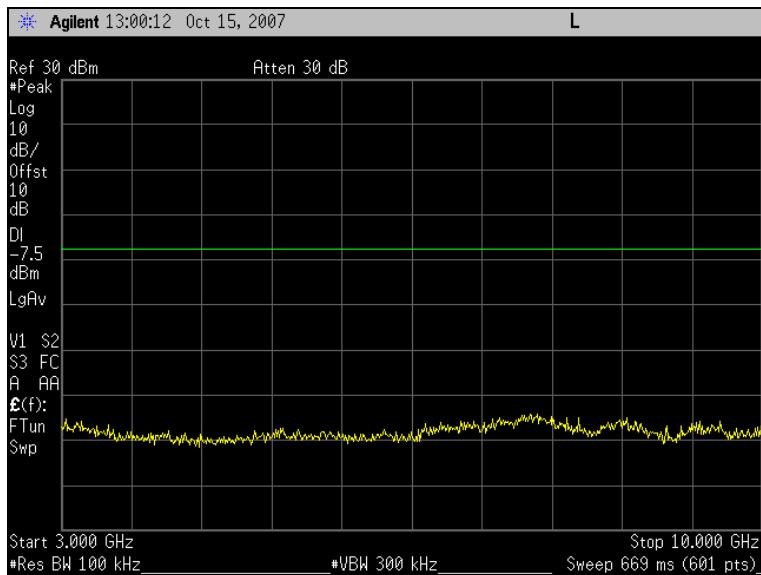

Graph 7. RF Conducted Spurious Emissions, Channel 11, 3 GHz to 10 GHz

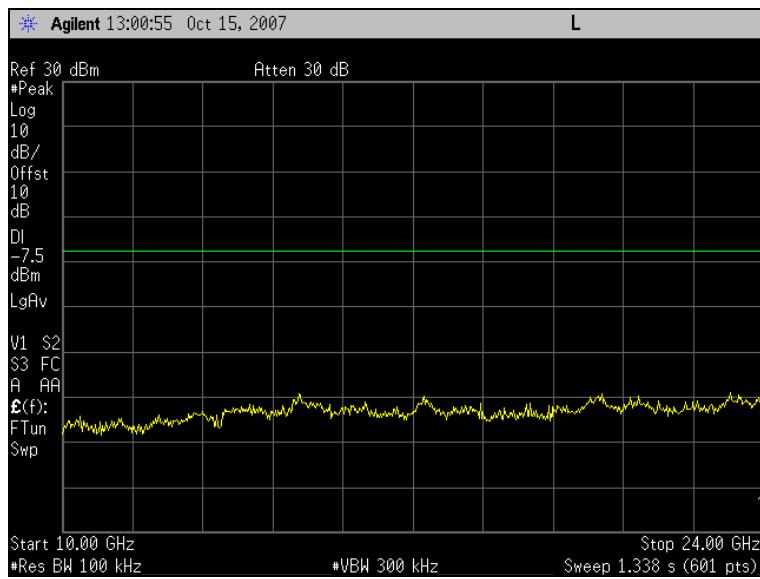

Graph 8. RF Conducted Spurious Emissions, Channel 11, 10 GHz to 24 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.247(e) Peak Power Spectral Density

Test Requirements: **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

Test Procedure: The transmitter was connected directly to a Spectrum Analyzer. The power level was set to the maximum level.
 RBW = 3 kHz, VBW>RBW
 Sweep = Span/ 3 kHz


Test Results: Equipment complies with the peak power spectral density limits of **§ 15.247 (e)**. The peak power spectral density was determined from plots on the following page(s).

Test Engineer(s): Dusmantha Tennakoon


Test Date(s): October 15, 2007

Channel	Measured PPSD (dBm)	Test Limit (dBm)
1	-3.73	8
11	-3.52	8

Table 15. Peak Power Spectral Density Test Results

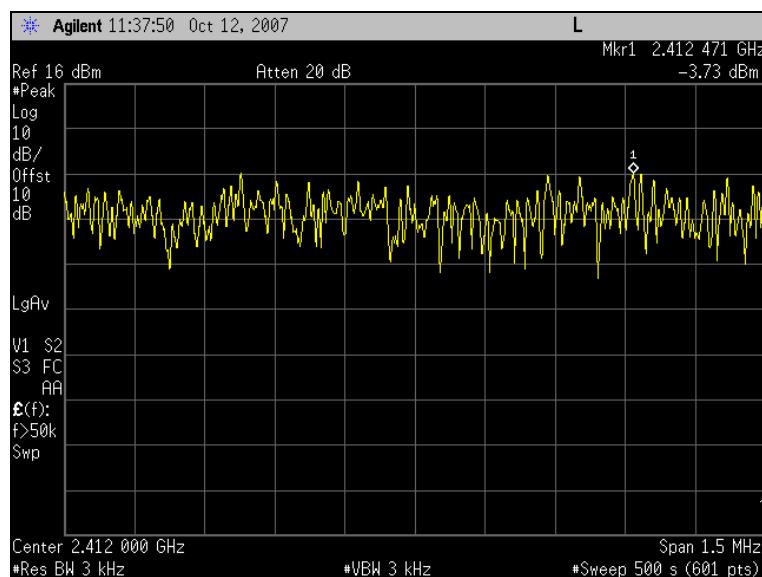

Graph 9. Peak Power Spectral Density, Channel 1

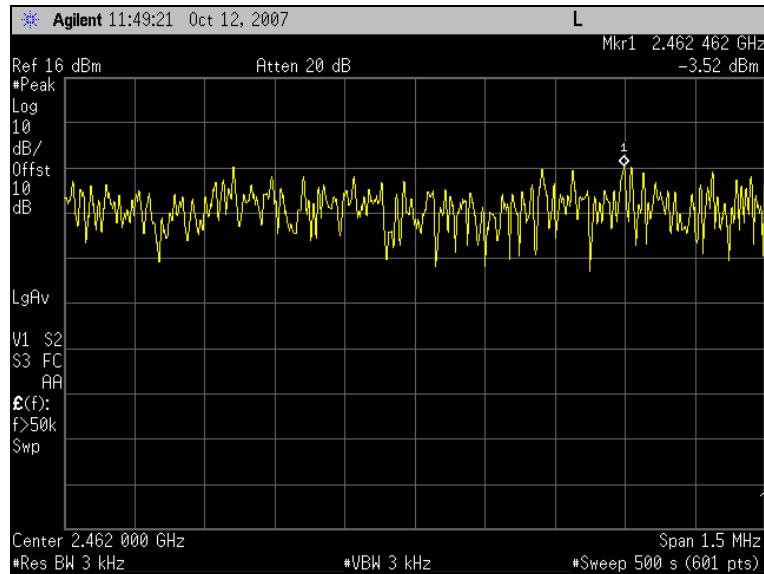

Graph 10. Peak Power Spectral Density, Channel 11



Rajant Corporation
ME

Appendix A

IV. Appendix A



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.205 Band Edge Emissions

Test Requirement(s): **§ 15.205 (a):** Except as shown in paragraph (d) of **15.205 Restricted bands of operation**, only spurious emissions are permitted in any of the frequency bands specified in Table 5:

MHz	MHz	MHz	GHz
0.090–0.110	16.42–16.423	399.9–410	4.5–5.15
0.495–0.505	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225	123–138	2200–2300	14.47–14.5
8.291–8.294	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025	240–285	3345.8–3358	36.43–36.5
12.57675–12.57725	322–335.4	3600–4400	Note
13.36–13.41.			
Note : Above 38.6			


Table 1. Restricted Bands of Operation from FCC Part 15, § 15.205

Test Procedure: The EUT was set up at maximum power. The operating on channel 1 and channel 11 simultaneously while testing was in progress. It was verified that the channels tested were within the band 2400-2480 MHz and not infringing upon the restricted bands. The following plots have been corrected for cable loss and antenna correction factors. The measurement was made at 3m.


Test Results: The EUT was compliant with the requirements of this section.

Test Engineer(s): Dusmantha Tennakoon


Test Date(s): August 28, 2007

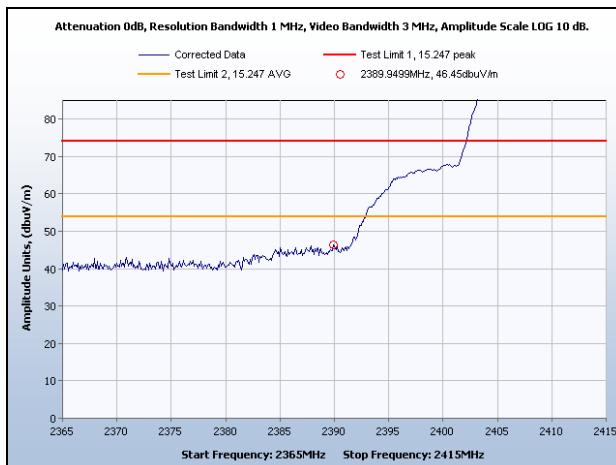


Band Edge Emissions, Channel 1, Vertical, Peak,
6 dBi omni (cup cake) Antenna

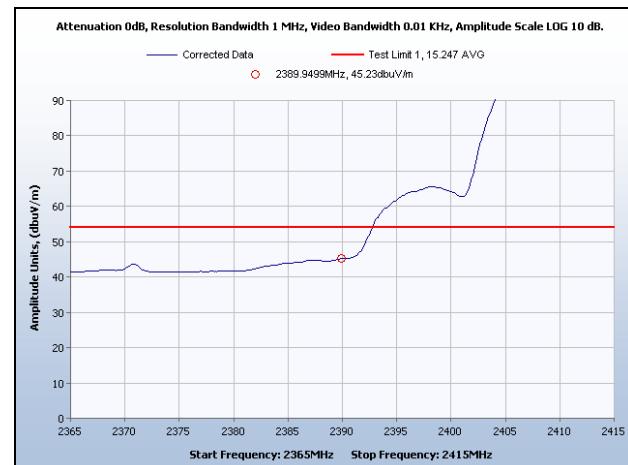

Band Edge Emissions, Channel 1, Vertical, Average,
6 dBi omni (cup cake) Antenna

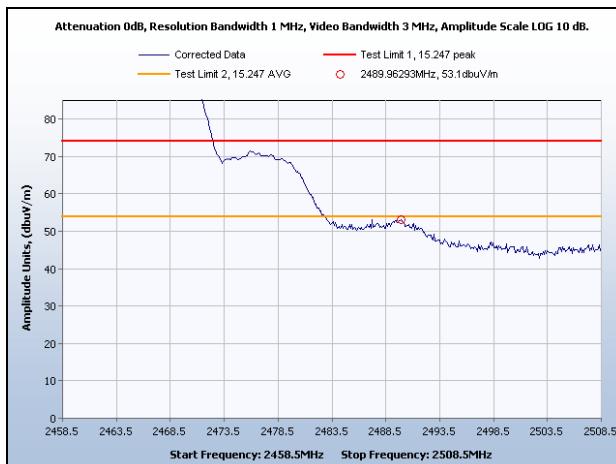

Band Edge Emissions, Channel 11, Vertical, Peak,
6 dBi omni (cup cake) Antenna

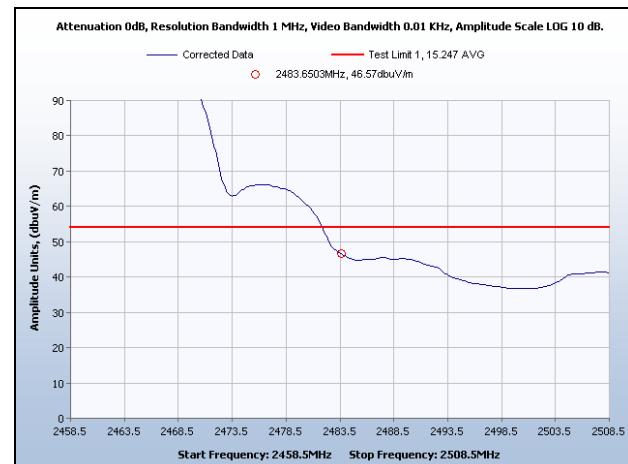

Band Edge Emissions, Channel 11, Vertical, Average,
6 dBi omni (cup cake) Antenna




Rajant Corporation
ME


Appendix A




Photograph 1. Band Edge Emissions, Test Setup

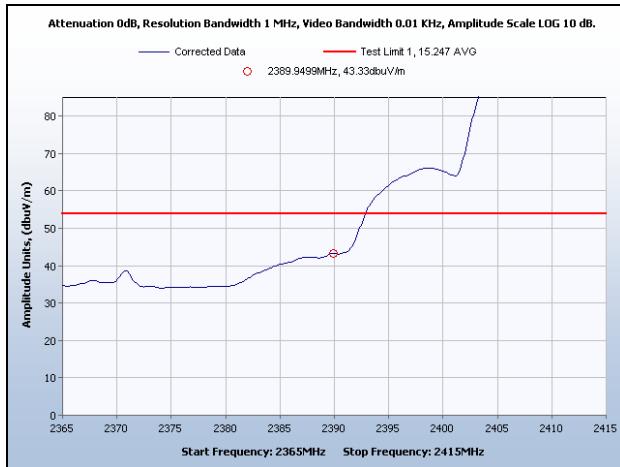


Band Edge Emissions, Channel 1, Average, Vertical,
120 deg 9 dBi sector Antenna

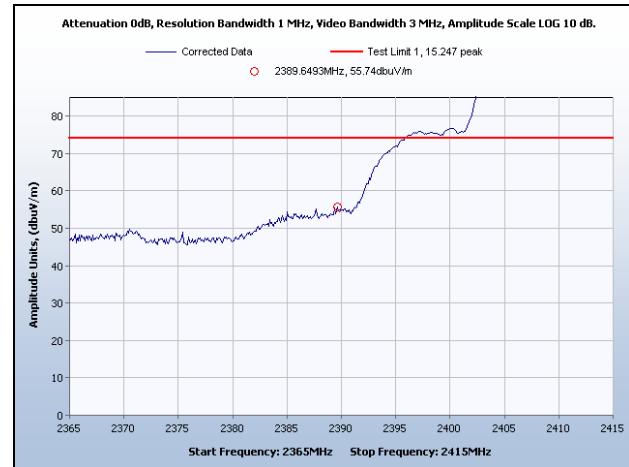


Band Edge Emissions, Channel 1, Peak, Vertical,
120 deg 9 dBi sector Antenna

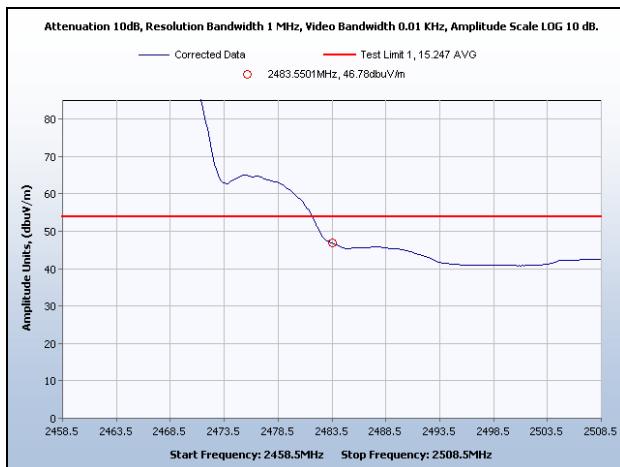


Band Edge Emissions, Channel 11, Average, Vertical,
120 deg 9 dBi sector Antenna

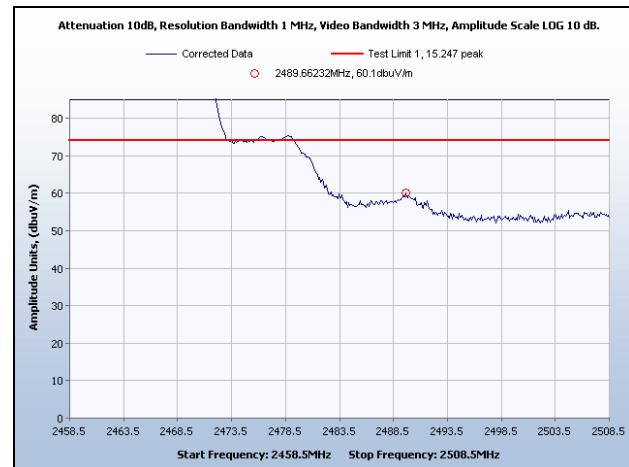


Band Edge Emissions, Channel 11, Peak, Vertical,
120 deg 9 dBi sector Antenna

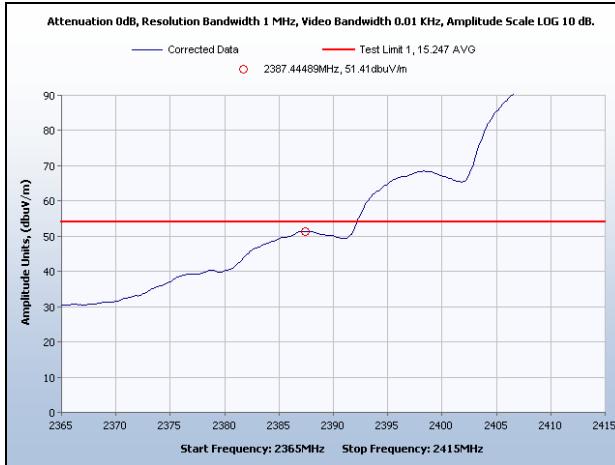


Band Edge Emissions, Channel 1, Average, Vertical,
12 dBi Omni Antenna

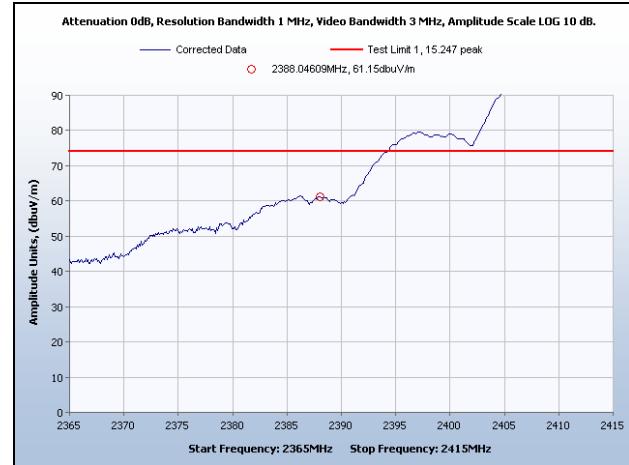


Band Edge Emissions, Channel 1, Peak, Vertical,
12 dBi Omni Antenna

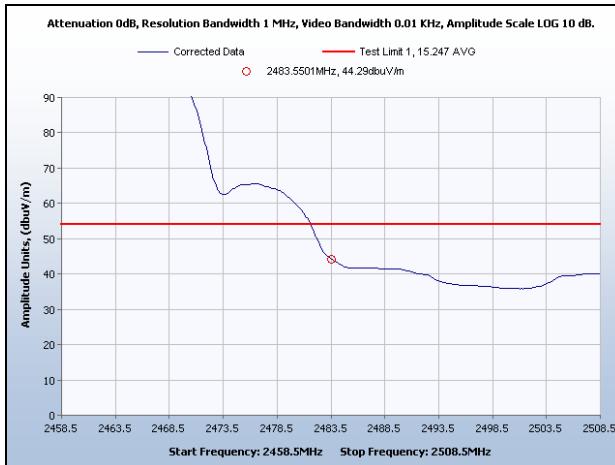

Band Edge Emissions, Channel 11, Average, Vertical,
12 dBi Omni Antenna

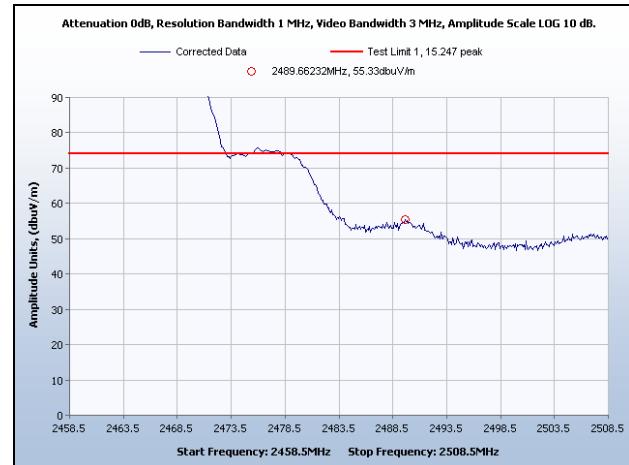

Band Edge Emissions, Channel 11, Peak, Vertical,
12 dBi Omni Antenna

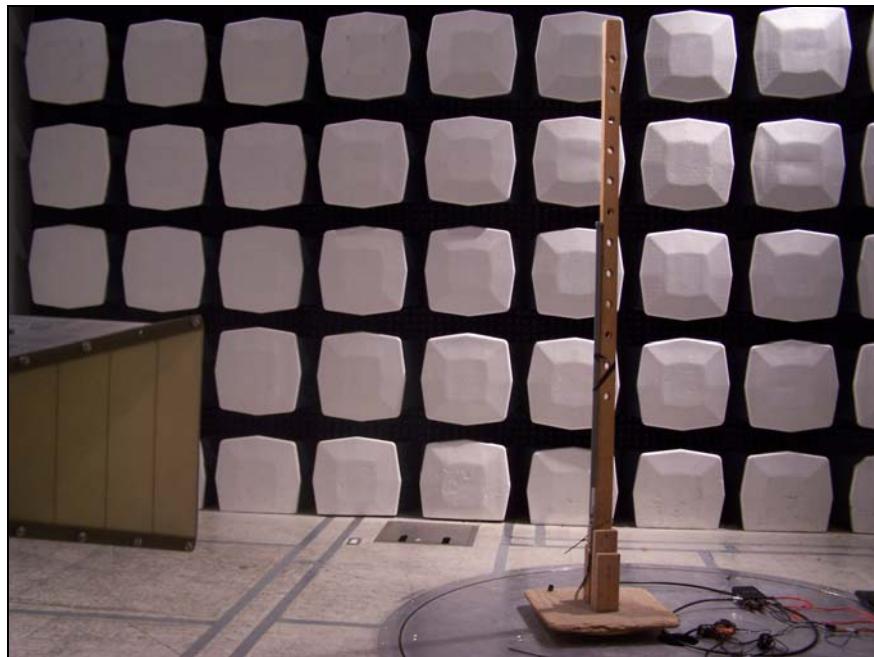

Photograph 2. Band Edge Emissions, Test Setup, 12 dBi Omni Antenna



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 15.209 Radiated Emissions – Unintentional Digital and Spurious

§ 15.205 (b): (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§ 15.35 (b): ...When average radiated emission measurements are specified in this part, including emission measurements below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules...

Frequency (MHz)	Field Strength (Microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F (kHz)	300
0.490 – 1.705	24000/F (kHz)	30
1.705 – 30.0	30	30
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

Table 2. Radiated Emissions Limits from § 15.209 (a)

Test Procedure:

For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

In accordance with §15.35 (b) the limit on the radio frequency emissions as measured using instrumentation with a peak detector function shall be 20 dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.

For radiated Spurious emissions, the EUT was scanned from 1 GHz to 16 GHz, excluding the band 2.3 GHz to 2.5 GHz, which was covered under Band Edge Emissions. In order to demonstrate compliance, measurements were taken in the form of peak plots shown with a peak and an average limit line. The plots were made at a 1m measurement distance and corrected for cable loss, distance correction, and antenna correction factors, by the capture software. At each channel of interest, the EUT was rotated about all three of its orthogonal axes.

Peak measurements, which exceeded the average limit line were remeasured using video averaging and plotted against an average limit line.

Test Results:


The EUT was compliant with the requirements of this section.

Test Engineer(s):


Dusmantha Tennakoon

Test Date(s):


August 28, 2007

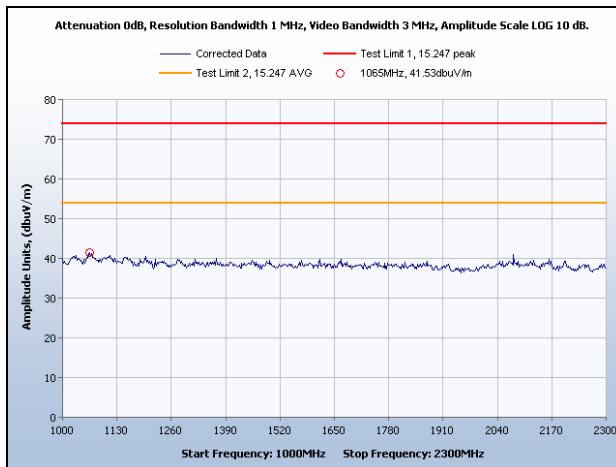


Spurious Radiated Emissions, Channel 1, Horizontal,
 1 MHz to 2300 MHz, 6 dBi omni (cup cake) Antenna

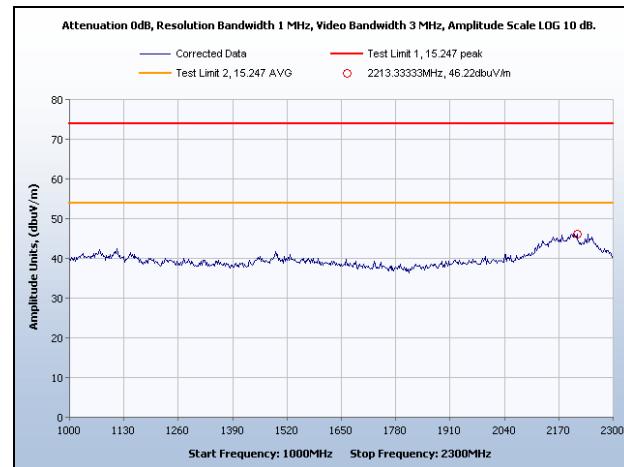


Spurious Radiated Emissions, Channel 1, Vertical,
 1 MHz to 2300 MHz, 6 dBi omni (cup cake) Antenna

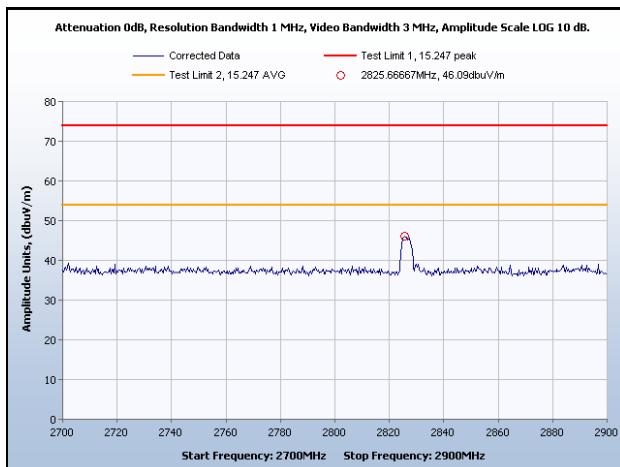


Spurious Radiated Emissions, Channel 1, Horizontal,
2700 MHz to 2900 MHz, 6 dBi omni (cup cake) Antenna

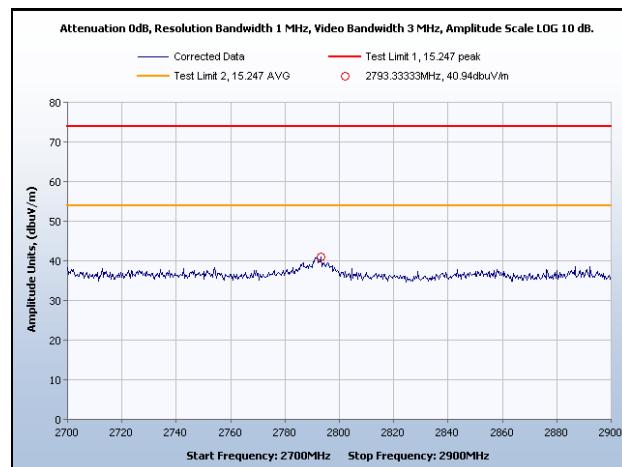


Spurious Radiated Emissions, Channel 1, Vertical,
2700 MHz to 2900 MHz, 6 dBi omni (cup cake) Antenna

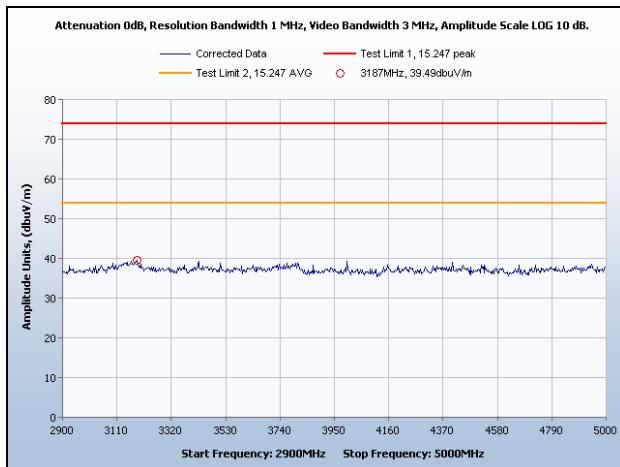


Spurious Radiated Emissions, Channel 1, Horizontal,
2900 MHz to 5000 MHz, 6 dBi omni (cup cake) Antenna

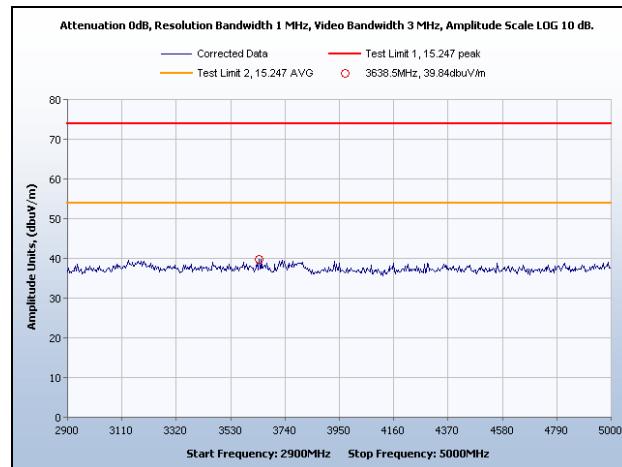


Spurious Radiated Emissions, Channel 1, Vertical,
2900 MHz to 5000 MHz, 6 dBi omni (cup cake) Antenna

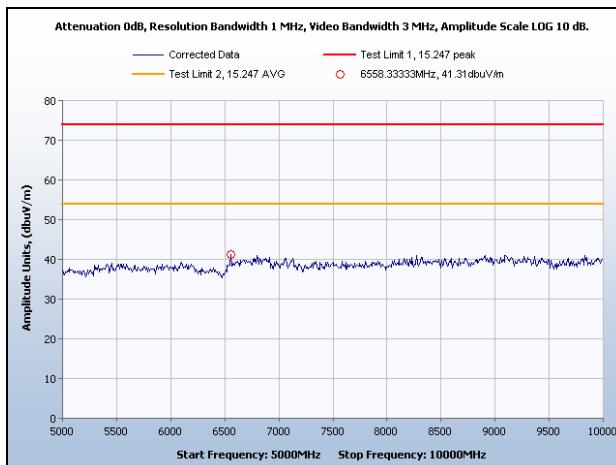


Spurious Radiated Emissions, Channel 1, Horizontal,
5000 MHz to 10000 MHz, 6 dBi omni (cup cake) Antenna

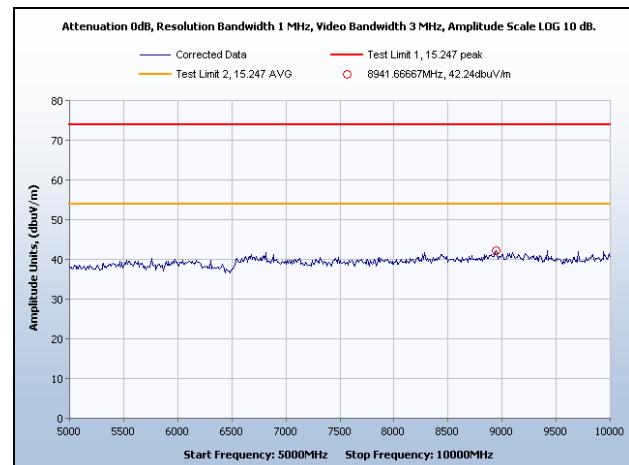


Spurious Radiated Emissions, Channel 1, Vertical,
5000 MHz to 10000 MHz, 6 dBi omni (cup cake) Antenna

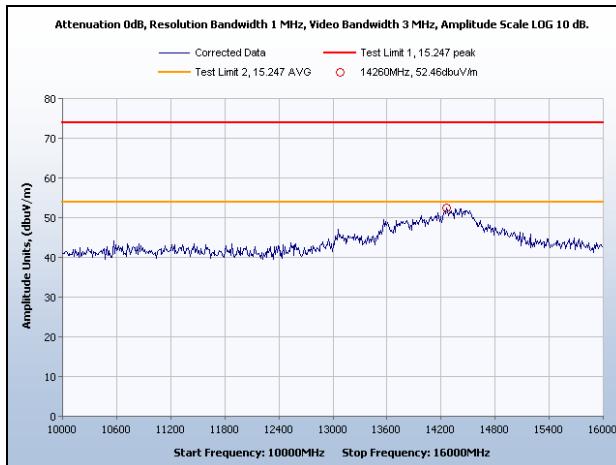


Spurious Radiated Emissions, Channel 1, Horizontal,
10000 MHz to 16000 MHz, 6 dBi omni (cup cake) Antenna

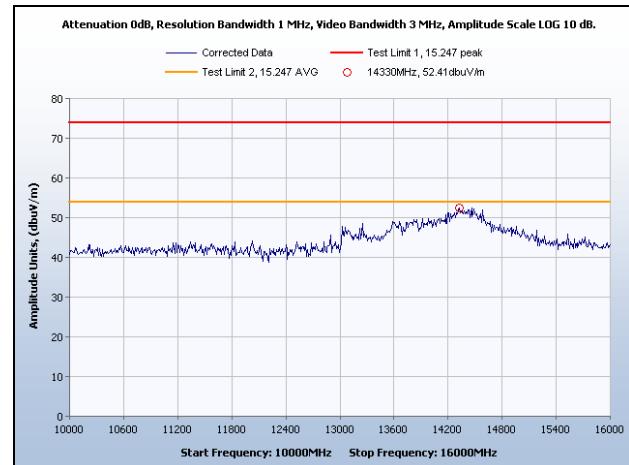


Spurious Radiated Emissions, Channel 1, Vertical,
10000 MHz to 16000 MHz, 6 dBi omni (cup cake) Antenna

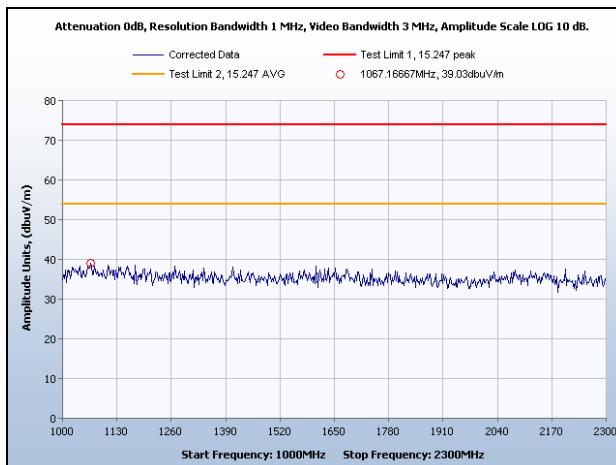


Spurious Radiated Emissions, Channel 11, Horizontal,
1000 MHz to 2300 MHz, 6 dBi omni (cup cake) Antenna

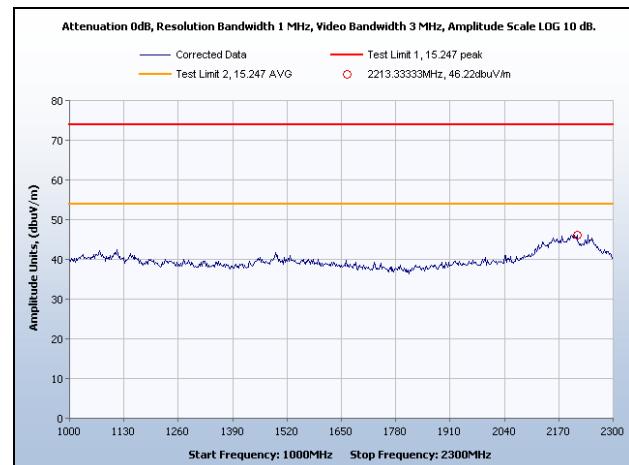


Spurious Radiated Emissions, Channel 11, Vertical,
1000 MHz to 2300 MHz, 6 dBi omni (cup cake) Antenna

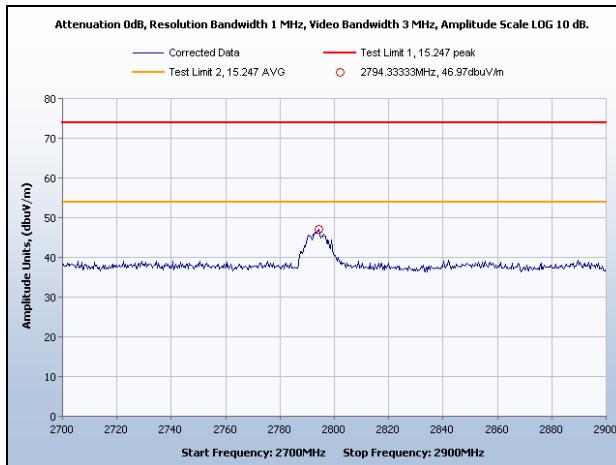


Spurious Radiated Emissions, Channel 11, Horizontal,
2700 MHz to 2900 MHz, 6 dBi omni (cup cake) Antenna

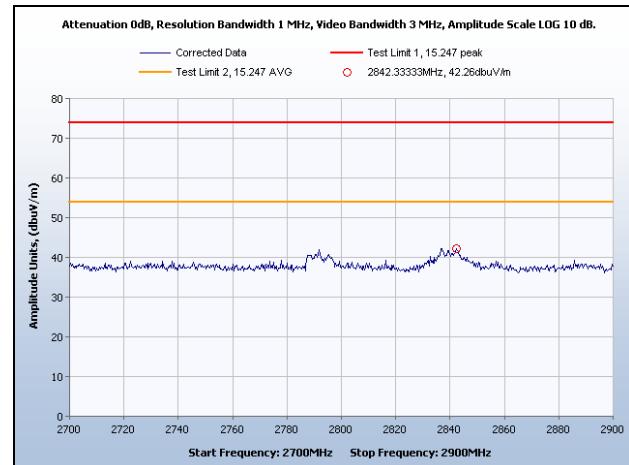


Spurious Radiated Emissions, Channel 11, Vertical,
2700 MHz to 2900 MHz, 6 dBi omni (cup cake) Antenna

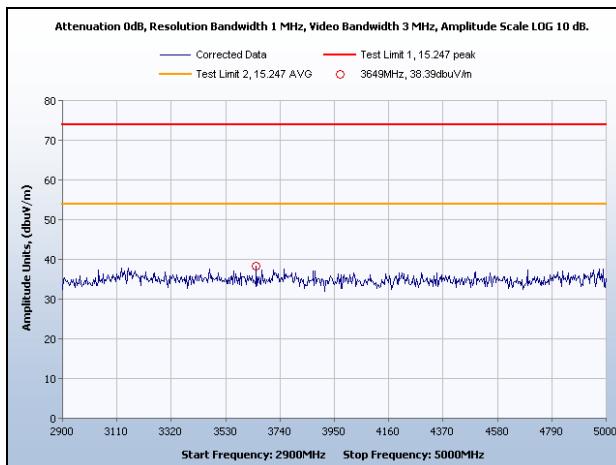


Spurious Radiated Emissions, Channel 11, Horizontal,
2900 MHz to 5000 MHz, 6 dBi omni (cup cake) Antenna

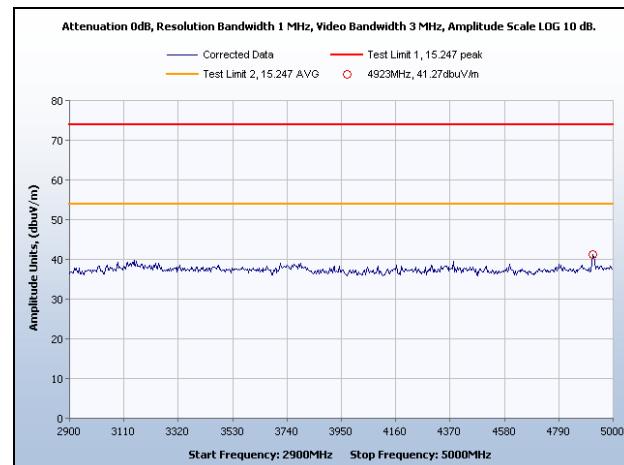


Spurious Radiated Emissions, Channel 11, Vertical,
2900 MHz to 5000 MHz, 6 dBi omni (cup cake) Antenna

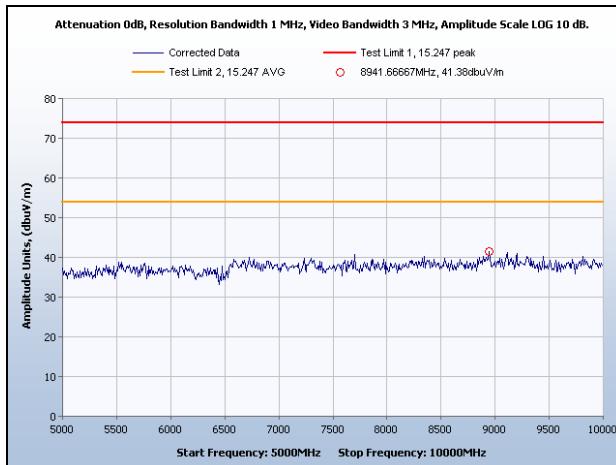


Spurious Radiated Emissions, Channel 11, Horizontal,
5000 MHz to 10000 MHz, 6 dBi omni (cup cake) Antenna

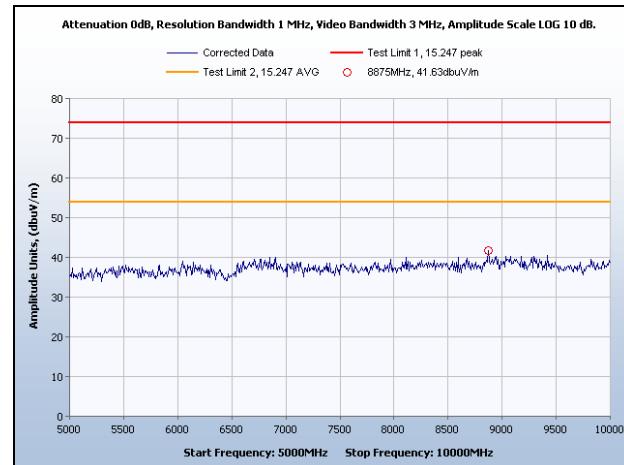


Spurious Radiated Emissions, Channel 11, Vertical,
5000 MHz to 10000 MHz, 6 dBi omni (cup cake) Antenna

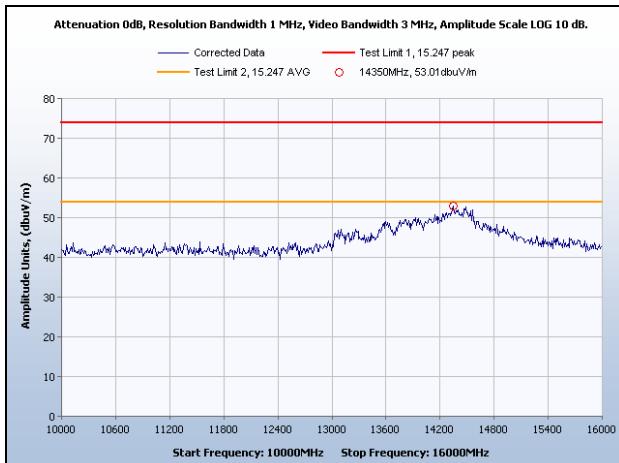


Spurious Radiated Emissions, Channel 11, Horizontal,
10000 MHz to 16000 MHz, 6 dBi omni (cup cake) Antenna

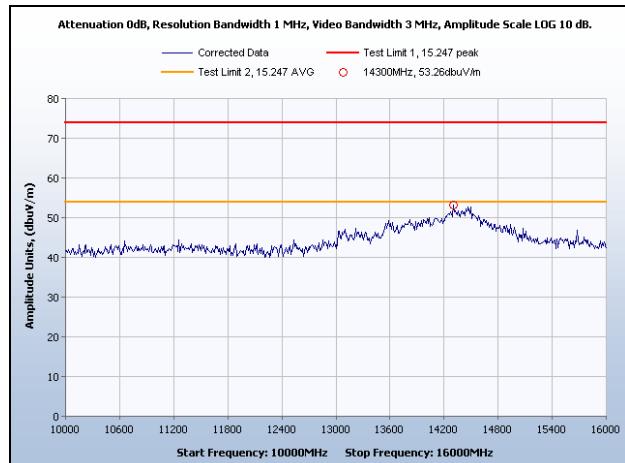


Spurious Radiated Emissions, Channel 11, Vertical,
10000 MHz to 16000 MHz, 6 dBi omni (cup cake) Antenna

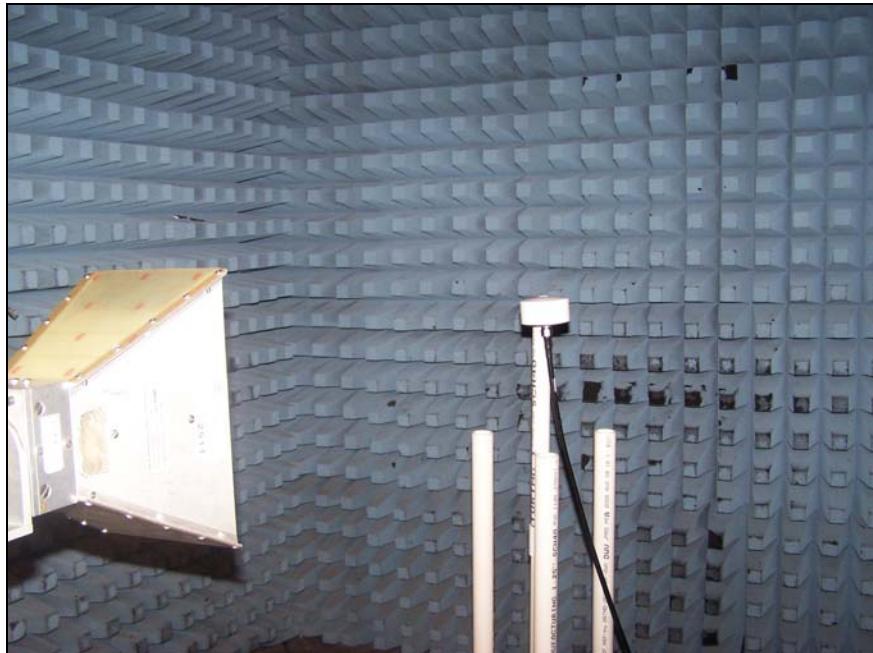


Photograph 3. Spurious Radiated Emissions, Channel 1, 6 dBi omni (cup cake) Antenna, Test Setup

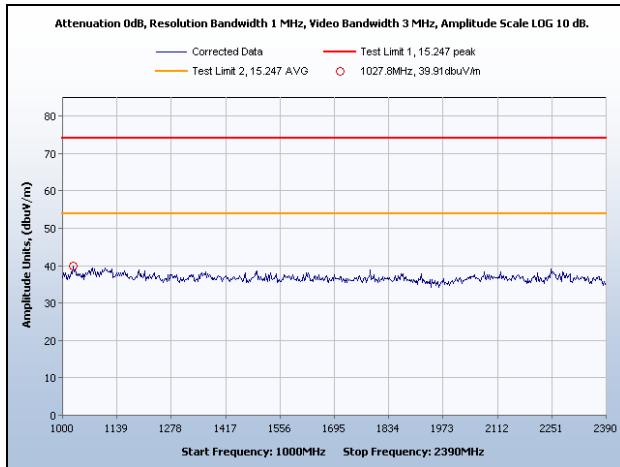


Spurious Radiated Emissions, Channel 1, Vertical,
1000 MHz to 2390 MHz, 120 deg 9 dBi sector Antenna

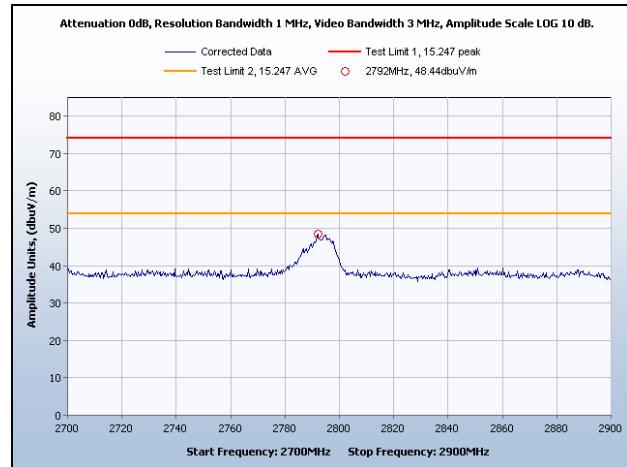


Spurious Radiated Emissions, Channel 1, Vertical,
2700 MHz to 2900 MHz, 120 deg 9 dBi sector Antenna

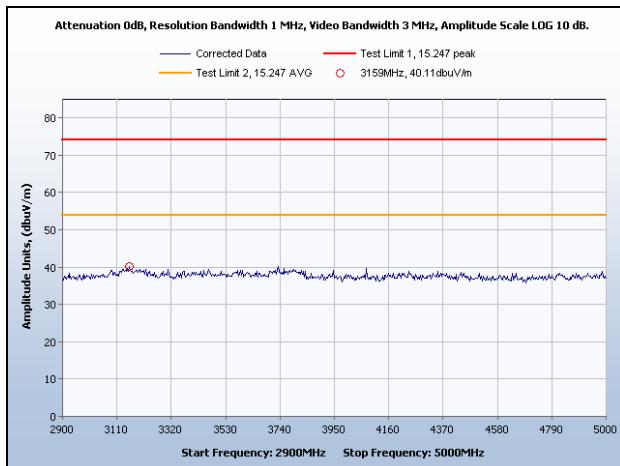


Spurious Radiated Emissions, Channel 1, Vertical,
2900 MHz to 5000 MHz, 120 deg 9 dBi sector Antenna

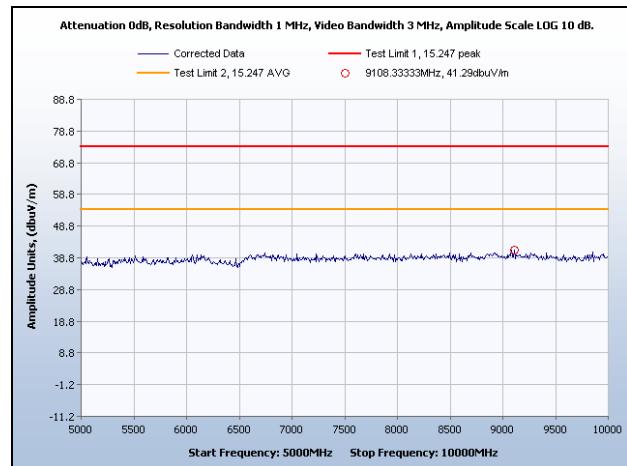


Spurious Radiated Emissions, Channel 1, Vertical,
5000 MHz to 10000 MHz, 120 deg 9 dBi sector Antenna

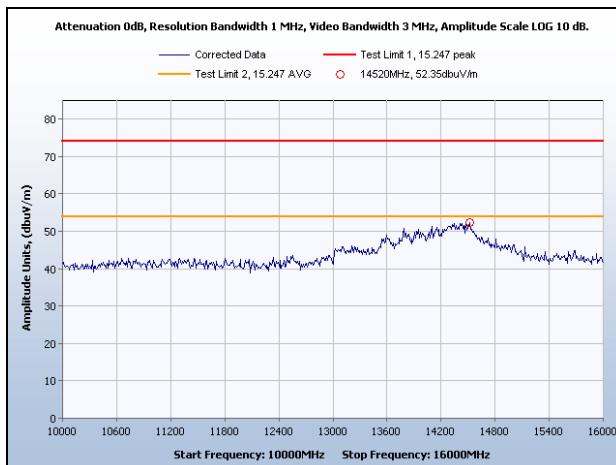


Spurious Radiated Emissions, Channel 1, Vertical,
10000 MHz to 16000 MHz, 120 deg 9 dBi sector Antenna

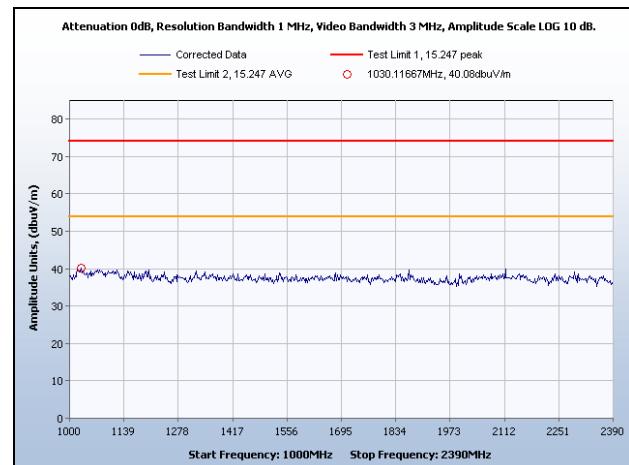


Spurious Radiated Emissions, Channel 11, Vertical,
1000 MHz to 2390 MHz, 120 deg 9 dBi sector Antenna

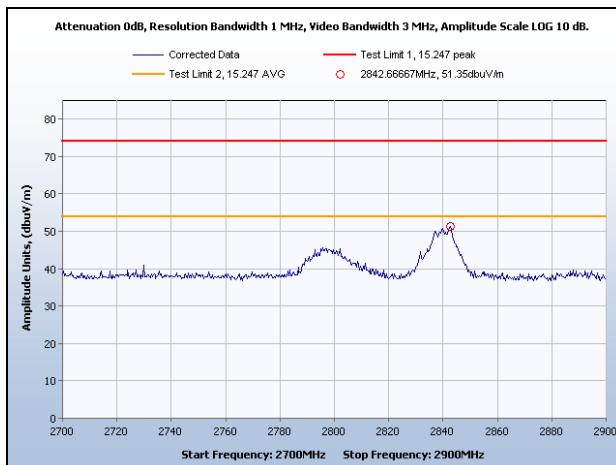


Spurious Radiated Emissions, Channel 11, Vertical,
2700 MHz to 2900 MHz, 120 deg 9 dBi sector Antenna

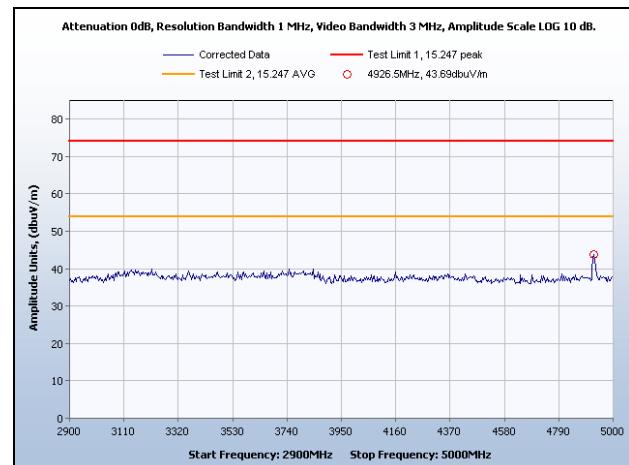


Spurious Radiated Emissions, Channel 11, Vertical,
2900 MHz to 5000 MHz, 120 deg 9 dBi sector Antenna

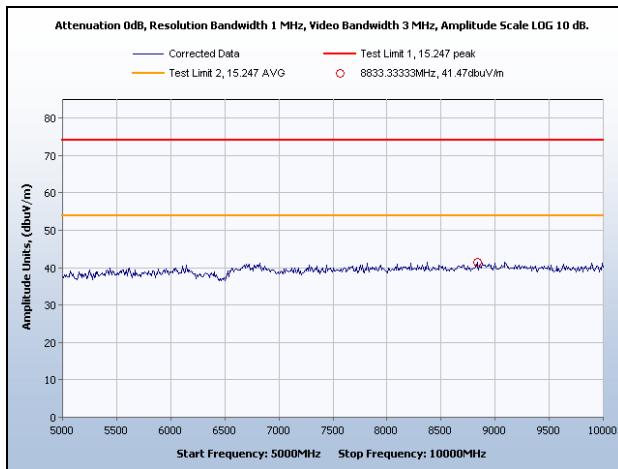


Spurious Radiated Emissions, Channel 11, Vertical,
5000 MHz to 10000 MHz, 120 deg 9 dBi sector Antenna

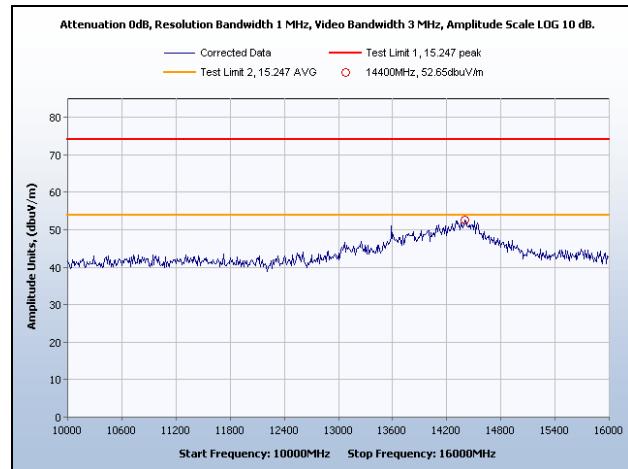


Spurious Radiated Emissions, Channel 11, Vertical,
10000 MHz to 16000 MHz, 120 deg 9 dBi sector Antenna

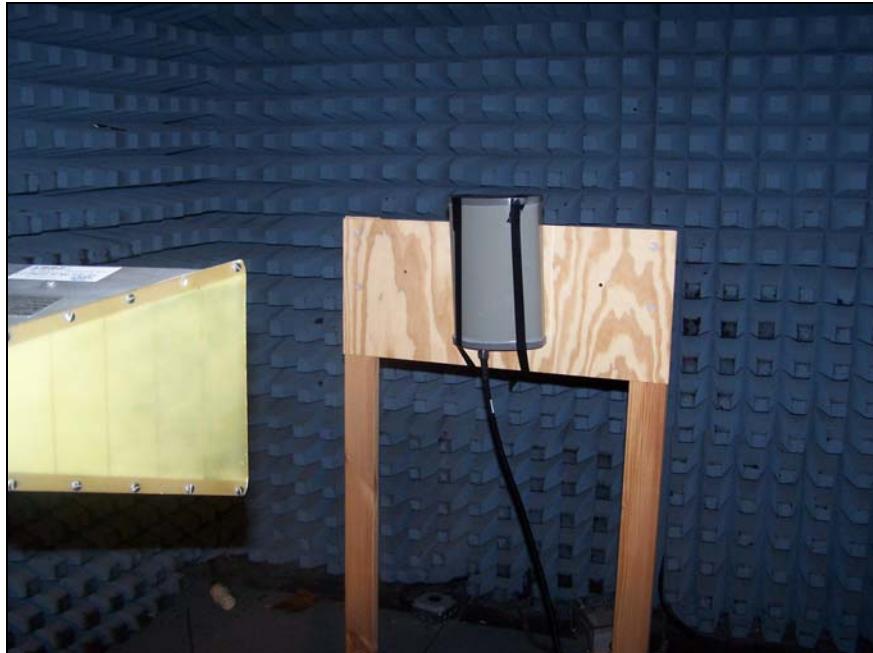


Photograph 4. Spurious Radiated Emissions, Test Setup, 120 deg 9 dBi sector Antenna

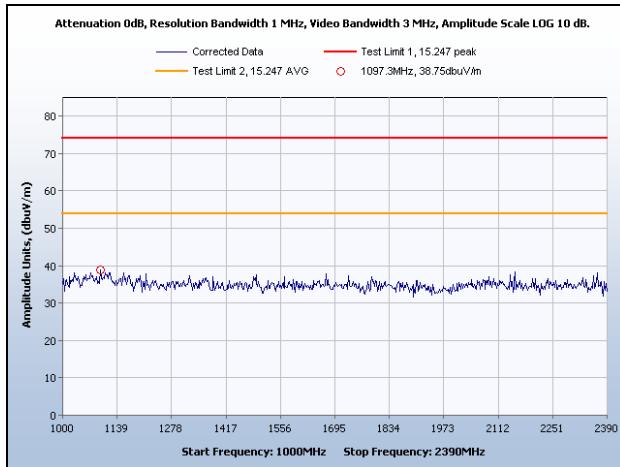


Spurious Radiated Emissions, Channel 1, Vertical,
1000 MHz to 2390 MHz, 12 dBi Omni Antenna

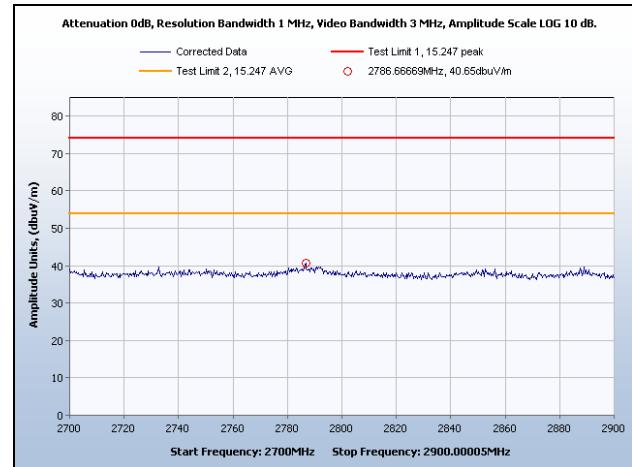

Spurious Radiated Emissions, Channel 1, Vertical,
2700 MHz to 2900 MHz, 12 dBi Omni Antenna

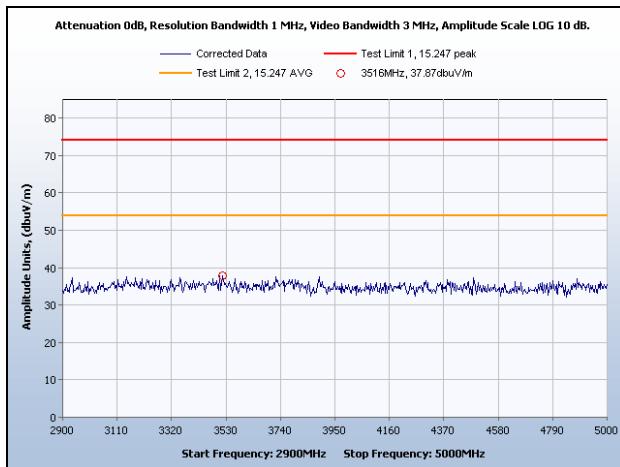

Spurious Radiated Emissions, Channel 1, Vertical,
2900 MHz to 5000 MHz, 12 dBi Omni Antenna

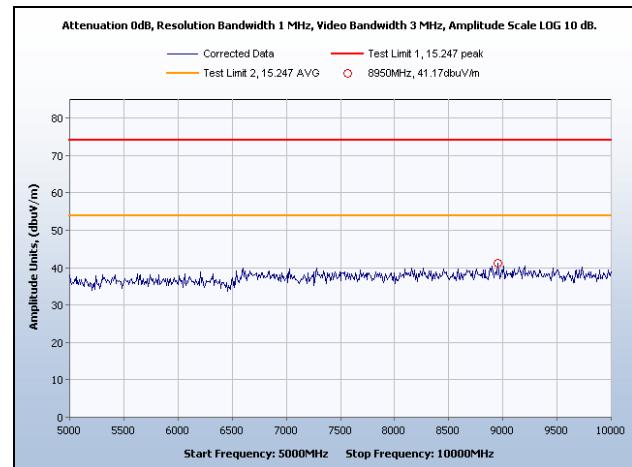


Spurious Radiated Emissions, Channel 1, Vertical,
5000 MHz to 10000 MHz, 12 dBi Omni Antenna




Rajant Corporation
ME


Appendix A

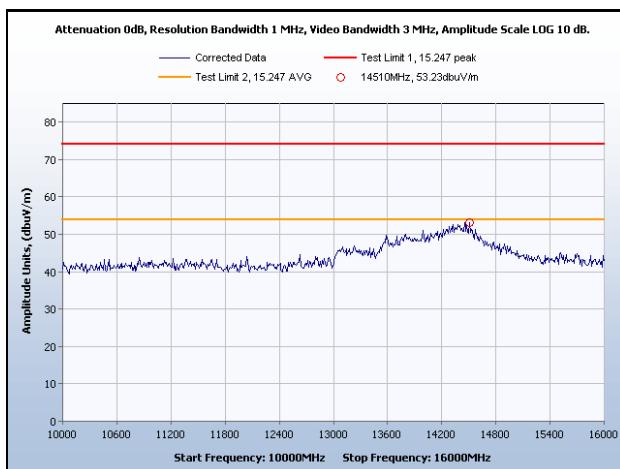


Spurious Radiated Emissions, Channel 1, Vertical,
10000 MHz to 16000 MHz, 12 dBi Omni Antenna

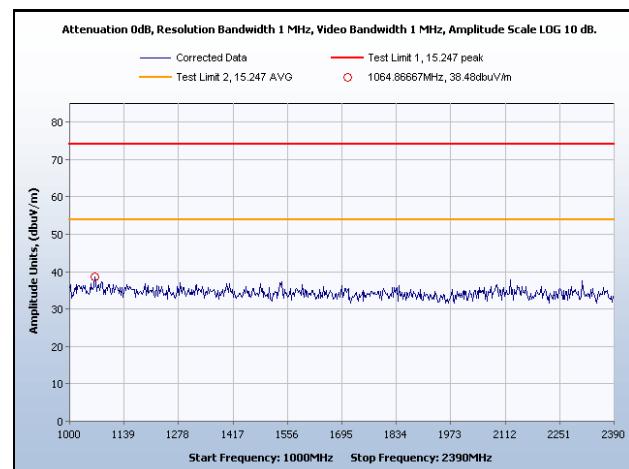


Spurious Radiated Emissions, Channel 11, Vertical,
1000 MHz to 2390 MHz, 12 dBi Omni Antenna

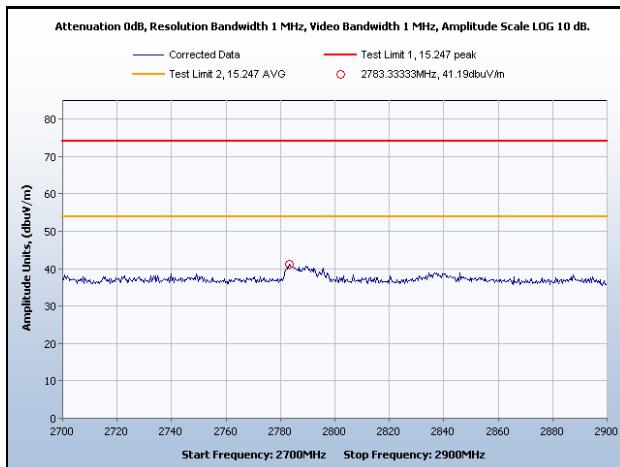


Spurious Radiated Emissions, Channel 11, Vertical,
2700 MHz to 2900 MHz, 12 dBi Omni Antenna

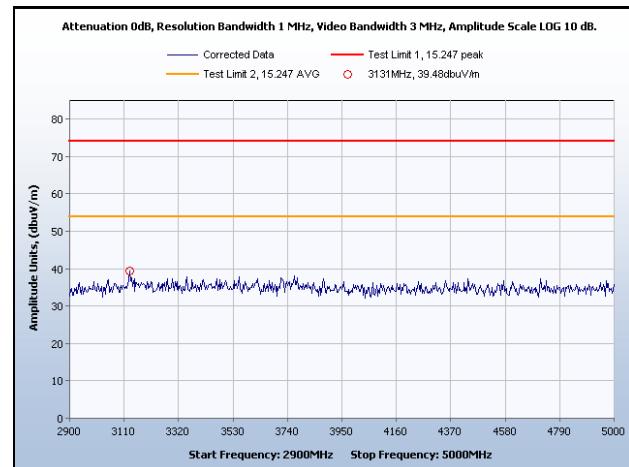


Spurious Radiated Emissions, Channel 11, Vertical,
2900 MHz to 5000 MHz, 12 dBi Omni Antenna

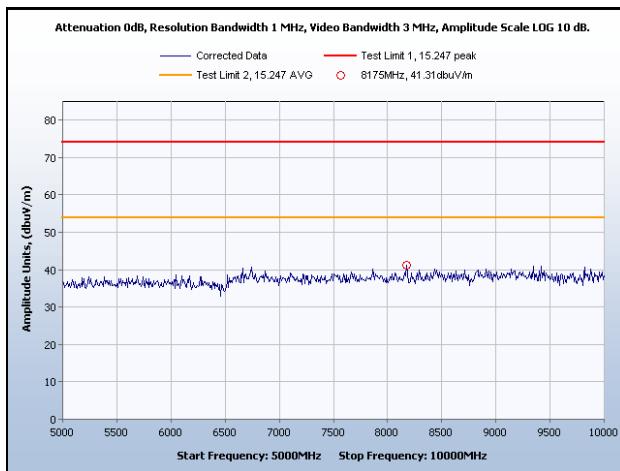

Spurious Radiated Emissions, Channel 11, Vertical,
5000 MHz to 10000 MHz, 12 dBi Omni Antenna

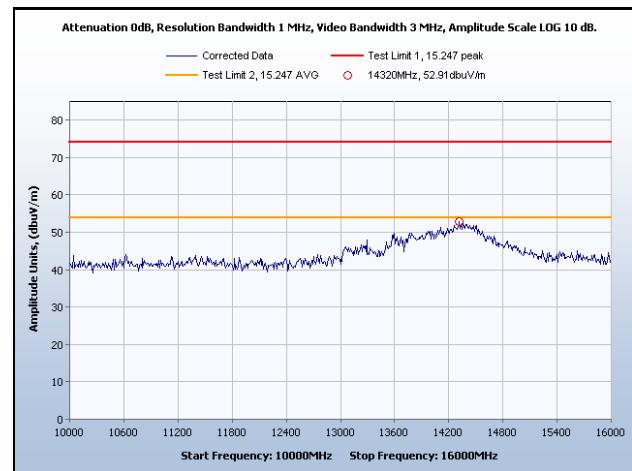

Spurious Radiated Emissions, Channel 11, Vertical,
10000 MHz to 16000 MHz, 12 dBi Omni Antenna

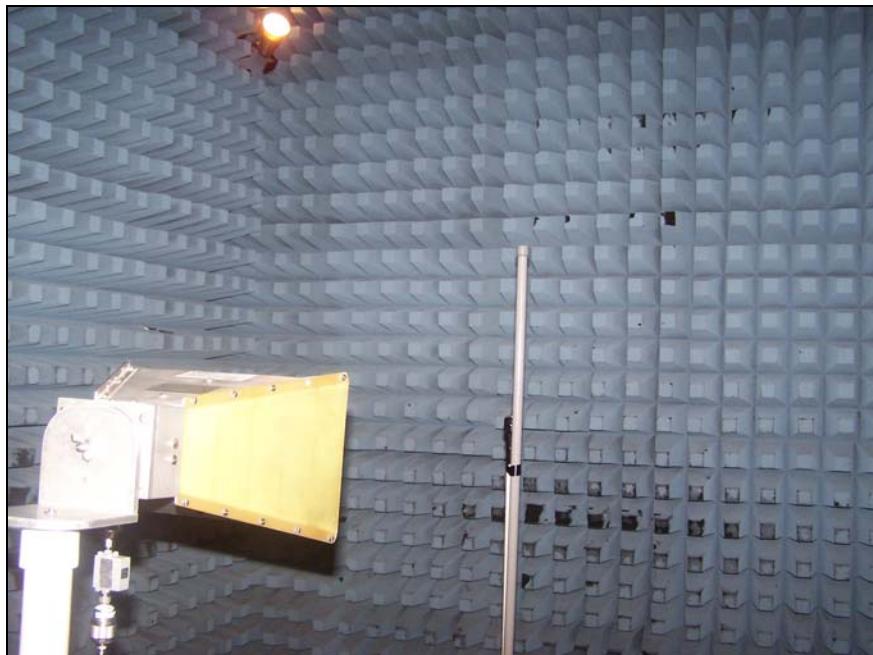

Photograph 5. Spurious Radiated Emissions, Test Setup, 12 dBi Omni Antenna



Rajant Corporation
ME

Appendix B
Test Equipment

V. Appendix B: Test Equipment



Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

Test Name: Conducted Emissions					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4156	SPECTRUM ANALYZER; EMC	HEWLETT PACKARD	8594EM	10/06/2006	10/06/2007
1T4502	COMB GENERATOR	COM-POWER	CGC-255	08/22/2006	08/22/2007
1T4079	LISN; SWITCH	SOLAR	8012-50-R-24-BNC	04/02/2007	04/02/2008
1T4405	EMC TEST ROOM 2	MET	N/A	SEE NOTE	
1T4554	THERMO-HYGROMETER	CONTROL COMPANY	56-627-9	04/11/2006	04/11/2008
1T4564	LISN (24 AMP)	SOLAR ELECTRONICS	9252-50-R-24-BNC	09/01/2006	09/01/2007
Test Name: Radiated Emissions					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4303	ANTENNA; BILOG	SCHAFNER – CHASE EMC	CBL6140A	06/29/2007	06/29/2008
1T4300	SEMI-ANECHOIC CHAMBER #1	EMC TEST SYSTEMS	NONE	02/17/2006	01/17/2009
1T4578	THERMO/HYGROMETER	CONTROL COMPANY	S6-627-9	09/24/2006	09/24/2008
1T4409	EMI RECEIVER	ROHDE & SCHWARTZ	ESIB7	04/24/2007	04/24/2008
Test Name: Conducted Measurements					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
S/N: US42070103	PSA	AGILENT	E448A	02/20/2007	02/20/2008
1T4583	10 DB ATTENUATOR	IMNET	18N10W-10	SEE NOTE	
Test Name: Spurious Radiated Emissions					
MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T2665	ANTENNA; HORN	EMCO	3115	04/17/2007	04/17/2008
1T4300	SEMI-ANECHOIC CHAMBER #1	EMC TEST SYSTEMS	NONE	02/17/2006	01/17/2009
1T4414	MICROWAVE PRE-AMP	AH SYSTEMS	PAM-0118	SEE NOTE	
S/N: US42070103	PSA	AGILENT	E448A	02/20/2007	02/20/2008

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Rajant Corporation
ME

Appendix C
Certification & User's Manual Information

VI. Appendix C: Certification & User's Manual Information



Certification & User's Manual Information

5.1 Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

§ 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

§ 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
 - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
 - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production stages; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

§ 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.¹ *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

§ 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

¹ In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



Certification & User's Manual Information

§ 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
 - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
 - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
 - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
 - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



Certification & User's Manual Information

5.2 Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

§ 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

§ 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

§ 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.