



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

33439 WESTERN AVENUE ! UNION CITY, CALIFORNIA 94587 ! PHONE (510) 489-6300 ! FAX (510) 489-6372

October 4, 2007

Verint Systems Canada Inc.  
1800 Berlier, 2nd Floor  
Laval, H7L-4S4, Canada

Dear Sylvain Cote,

Enclosed is the Class II Permissive Change test report for compliance testing of the Verint Systems Canada Inc., S4100, S4200 and S4300 Wireless Devices Family as tested to the requirements of Title 47 of the CFR, Ch. 1 (10-1-06 ed.), Part 15, Subpart B, ICES-003, Issue 4 February 2004 for a Class B Digital Device and FCC Part 15, Subpart C, RSS-210, Issue 7, June 2007 for Intentional Radiators.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Sanchez  
Documentation Department

Reference: (\Verint Systems Canada Inc.\EMCS22622-FCC247)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc. While use of the National Voluntary Laboratory Accreditation Program (NVLAP) letters or the NVLAP Logo, the Standards Council of Canada Logo, or the Nationally Recognized Testing Laboratory (NRTL) Letters in this report reflects MET Accreditation under these programs, these letters, logo, or statements do not claim product endorsement by NVLAP or any Agency of the U.S. Government. This letter of transmittal is not a part of the attached report.



Union City Certificate  
# 0591-02

*The Nation's First Licensed Nationally Recognized Testing Laboratory*



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Cover Page  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## **Electromagnetic Compatibility Criteria Class II Permissive Change Test Report**

for the

**Verint Systems Canada Inc.  
Model S4100, S4200 and S4300 Wireless Devices Family**

Tested under  
the FCC Certification Rules  
contained in  
Title 47 of the CFR, Parts 15 Subpart B & ICES-003  
for Class B Digital Devices

Title 47 of the CFR, Part 15.247, Subpart C & RSS-210, Issue 7, June 2007  
for Intentional Radiators

**MET Report: EMCS22622-FCC247**

October 4, 2007

### **Prepared For:**

**Verint Systems Canada Inc.  
1800 Berlier, 2nd Floor  
Laval, H7L-4S4, Canada**

**Prepared By:**  
**MET Laboratories, Inc.**  
4855 Patrick Henry Dr., Building 6  
Santa Clara, CA 95054



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Cover Page  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## Electromagnetic Compatibility Criteria Class II Permissive Change Test Report

for the

**Verint Systems Canada Inc.  
Model S4100, S4200 and S4300 Wireless Devices Family**

### Tested Under

the FCC Certification Rules  
contained in  
Title 47 of the CFR, Parts 15 Subpart B & ICES-003  
for Class B Digital Devices  
&  
Title 47 of the CFR, Part 15.247, Subpart C & RSS-210, Issue 7, June 2007  
for Intentional Radiators

  
Shawn McMillen, Project Engineer  
Electromagnetic Compatibility Lab

  
Jennifer Sanchez  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15.247, of the FCC Rules under normal use and maintenance.

  
Tony Permsombut, Manager  
Electromagnetic Compatibility Lab



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Report Status  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	October 4, 2007	Initial Issue.



## Table of Contents

<b>I.</b>	<b>Executive Summary .....</b>	<b>1</b>
A.	Purpose of Test .....	2
B.	Executive Summary .....	2
<b>II.</b>	<b>Equipment Configuration .....</b>	<b>3</b>
A.	Overview.....	4
B.	References.....	4
C.	Test Site .....	4
D.	Description of Test Sample.....	4
E.	Equipment Configuration.....	4
F.	Support Equipment .....	4
G.	Ports and Cabling Information.....	4
H.	Mode of Operation.....	4
I.	Method of Monitoring EUT Operation.....	4
J.	Modifications .....	4
a)	Modifications to EUT.....	4
b)	Modifications to Test Standard.....	4
K.	Disposition of EUT .....	4
<b>III.</b>	<b>Electromagnetic Compatibility Criteria for Unintentional Radiators .....</b>	<b>4</b>
§ 15.107(a)	Conducted Emissions Limits.....	4
§ 15.109(a)	Radiated Emission Limits .....	4
§ 15.09(a)	Radiated Emissions Limits .....	4
<b>IV.</b>	<b>Electromagnetic Compatibility Criteria for Intentional Radiators.....</b>	<b>4</b>
§ 15.203	Antenna Requirement.....	4
§ 15.207(a)	Conducted Emissions Limits.....	4
§ 15.247(a)	6 dB and 99% Bandwidth.....	4
§ 15.247(b)	Peak Power Output and RF Exposure .....	4
§ 15.247(d)	Spurious Emissions Requirements – Radiated and RF Conducted .....	4
§ 15.247(e)	Peak Power Spectral Density .....	4
<b>V.</b>	<b>Test Equipment .....</b>	<b>4</b>
<b>VI.</b>	<b>Certification &amp; User's Manual Information.....</b>	<b>4</b>
A.	Certification Information .....	4
B.	Label and User's Manual Information .....	4
<b>VII.</b>	<b>ICES-003 Procedural &amp; Labeling Requirements.....</b>	<b>4</b>



## List of Tables

Table 1. Executive Summary of EMC Part 15.247 Compliance Testing .....	2
Table 2. EUT Specifications .....	4
Table 3. Frequency Allocation for 802.11a/b/g.....	4
Table 4. Test References .....	4
Table 5. Equipment Configuration (S4100) .....	4
Table 6. Equipment Configuration (S4200) .....	4
Table 7. Equipment Configuration (S4300) .....	4
Table 8. Support Equipment (S4100).....	4
Table 9. Support Equipment (S4200).....	4
Table 10. Support Equipment (S4300).....	4
Table 11. Ports and Cabling Information (S4100).....	4
Table 12. Ports and Cabling Information (S4200).....	4
Table 13. Ports and Cabling Information (S4300).....	4
Table 14. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b) .....	4
Table 15. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz) – S4100.....	4
Table 16. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz) – S4100.....	4
Table 17. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz) – S4200.....	4
Table 18. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz) – S4200.....	4
Table 19. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz) – S4300.....	4
Table 20. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz) – S4300.....	4
Table 21. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	4
Table 22. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz – S4100.....	4
Table 23. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz – S4200.....	4
Table 24. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz – S4300.....	4
<b>Table 25. Radiated Emissions from 1 GHz to 2 GHz – S4100 .....</b>	4
<b>Table 26. Radiated Emissions from 1 GHz to 5GHz – S4200 .....</b>	4
<b>Table 27. Radiated Emissions from 1 GHz to 2 GHz – S4300 .....</b>	4
Table 28. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a) .....	4
Table 29. Conducted Emissions - Phase Line – S4100 .....	4
Table 30. Conducted Emissions - Neutral Line– S4100.....	4
Table 31. Conducted Emissions - Phase Line – S4200 .....	4
Table 32. Conducted Emissions - Neutral Line– S4200.....	4
Table 33. Conducted Emissions - Phase Line – S4300 .....	4
Table 34. Conducted Emissions - Neutral Line– S4300.....	4
Table 35. Output Power Requirements from §15.247 .....	4
Table 36. Peak Power Output Test Results – 802.11g .....	4
Table 37. Peak Power Output Test Results – 802.11a.....	4
Table 38. Restricted Bands of Operation.....	4

## List of Figures

Figure 1. Block Diagram of Test Configuration (S4100).....	4
Figure 2. Block Diagram of Test Configuration (S4200).....	4
Figure 3. Block Diagram of Test Configuration (S4300).....	4

## List of Photographs



---

Photograph 1. Verint Systems Canada Inc. S4100, S4200 and S4300 Wireless Devices Family .....	4
Photograph 2. Conducted Emissions Test Setup .....	4
Photograph 3. Radiated Emission Test Setup 30 MHz - 1 GHz.....	4
Photograph 4. Radiated Emission Limits Test Setup 1 - 5GHz.....	4
Photograph 5. Test Equipment and setup for various Radiated Measurements (Integrated Antenna) .....	4
Photograph 6. Test Equipment and setup for various Radiated Measurements (Panel Antenna).....	4
Photograph 7. Test Equipment and setup for various Radiated Measurements (Sector Antenna) .....	4



## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<sub>μ</sub>A</b>	Decibels above one <b>microamp</b>
<b>dB<sub>μ</sub>V</b>	Decibels above one <b>microvolt</b>
<b>dB<sub>μ</sub>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<sub>μ</sub>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current $\mu$
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GR-1089-CORE</b>	( <b>GR</b> ) General Requirement(s) imposed by the NEBS standard, ( <b>CORE</b> ) Central Office Recovery Express (AT&T), ( <b>1089</b> ) specifies various parts of the General Requirements under Bellcore Technical Standard, Requirements for Electromagnetic Compatibility and Electrical Safety - Generic Criteria for Network Telecommunications Equipment
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b>μH</b>	<b>microhenry</b>
$\mu$	<b>microfarad</b>
$\mu$ s	<b>microseconds</b>
<b>NEBS</b>	Network Equipment-Building System
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	<b>Volts per meter</b>
<b>VCP</b>	Vertical Coupling Plane



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Executive Summary  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## I. Executive Summary



## A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Verint Systems Canada Inc. S4100, S4200 and S4300 Wireless Devices Family , with the requirements of Part 15, §15.247. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the S4100, S4200 and S4300 Wireless Devices Family . Verint Systems Canada Inc. should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the S4100, S4200 and S4300 Wireless Devices Family , has been **permanently** discontinued

## B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, §15.247, in accordance with Verint Systems Canada Inc., purchase order number 6460. All tests were conducted using measurement procedure ANSI C63.4-2003.

FCC Reference	RSS-210 and RSS-GEN	Description	Results
<b>Transmitter Mode (TX)</b>			
§15.207	6.6	AC Power Line Conducted Emissions	Compliant
§15.203/15.247(c)	A8.4	Antenna Requirement	Compliant
§15.247(a)(3)	A8.2	6dB Occupied Bandwidth	Compliant
§15.247(b)(3)	A8.4	Maximum Peak Conducted Output Power	Compliant
§15.247(d), §15.205, §15.209	A8.5	Spurious Radiated and Conducted Emissions	Compliant
§15.247(e)	A8.2/RSS-102	Peak Power Spectral Density and RF Exposure	Compliant
<b>Receiver Mode (RX)</b>			
15.107	7.4	AC Power Line Conducted Emissions	Compliant
15.109	7.3	Radiated Spurious Emissions	Compliant

**Table 1 Executive Summary of EMC Part 15.247 Compliance Testing**



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## II. Equipment Configuration



## A. Overview

MET Laboratories, Inc. was contracted by Verint Systems Canada Inc. to perform testing on the S4100, S4200 and S4300 Wireless Devices Family, under Verint Systems Canada Inc.'s purchase order number 6460.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Verint Systems Canada Inc., S4100, S4200 and S4300 Wireless Devices Family .

The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	S4100-R, S4200, S4300-POE		
	<b>S4100 Series</b>	<b>S4200 Series</b>	<b>S4300 Series</b>
<b>Model(s) Covered:</b>	S4100-RX S4100-RX-2V S4100-RX-49 S4100-RX-2V-49 S4100-TX S4100-TX-2V S4100-TX-49 S4100-T-2V-49	S4200-AS S4200-AS-2V S4200-AS-LS S4200-AS-2V-LS S4200-AS-49 S4200-AS-2V-49 S4200-AS-LS-49 S4200-AS-2V-LS-49 S4200 S4200-2V S4200-49 S4200-2V-49	S4300-BR S4300-RP S4300-BR-49 S4300-RP-49 S4300-PoE S4300-PoE-BR S4300-PoE-49 S4300-PoE-BR-49
<b>EUT Specifications:</b>	Primary Power: 24VAC		
	FCC ID: VKHS4X00DCMA82		
	Type of Modulations:	OFDM	
	Equipment Code:	DTS	
	Peak RF Output Power:	802.11g:	0.075W
		802.11a:	0.38W
<b>Environmental Test Conditions:</b>	EUT Frequency Ranges: 2412 – 2462MHz		
	5745 – 5825MHz		
<b>Analysis:</b>	The results obtained relate only to the item(s) tested.		
<b>Environmental Test Conditions:</b>	Temperature (15-35° C)		
	Relative Humidity (30-60%)		
	Barometric Pressure (860-1060 mbar)		
<b>Evaluated by:</b>	Shawn McMillen		
<b>Date(s):</b>	October 4, 2007		

**Table 2. EUT Specifications**



Channel Number	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462
149	5745
153	5765
157	5785
161	5805
165	5825

Table 3. Frequency Allocation for 802.11a/b/g

## B. References

<b>CFR 47, Part 15, Subpart C</b>	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 15: General Rules and Regulations, Allocation, Assignment, and Use of Radio Frequencies
<b>RSS-210, Issue 7, June 2007</b>	Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
<b>CFR 47, Part 15, Subpart B</b>	Electromagnetic Compatibility: Criteria for Radio Frequency Devices
<b>ICES-003, Issue 4 February 2004</b>	Spectrum Management and Telecommunications Policy, Interference-Causing Equipment Standard, Digital Apparatus
<b>ANSI C63.4:2003</b>	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
<b>ANSI/NCSL Z540-1-1994</b>	Calibration Laboratories and Measuring and Test Equipment - General Requirements
<b>ANSI/ISO/IEC 17025:2000</b>	General Requirements for the Competence of Testing and Calibration Laboratories

Table 4. Test References

### C. Test Site

All testing was performed at MET Laboratories, Inc., 4855 Patrick Henry Dr., Building 6, Santa Clara, CA 95054. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories. In accordance with §2.948(d), MET Laboratories has been accredited by A2LA (Certificate Number 591.02).

### D. Description of Test Sample

The Verint Systems Canada Inc S4100, S4200 and S4300 family are wireless video security devices using standard 802.11a/g PHY radio module.



**Photograph 1. Verint Systems Canada Inc. S4100, S4200 and S4300 Wireless Devices Family**

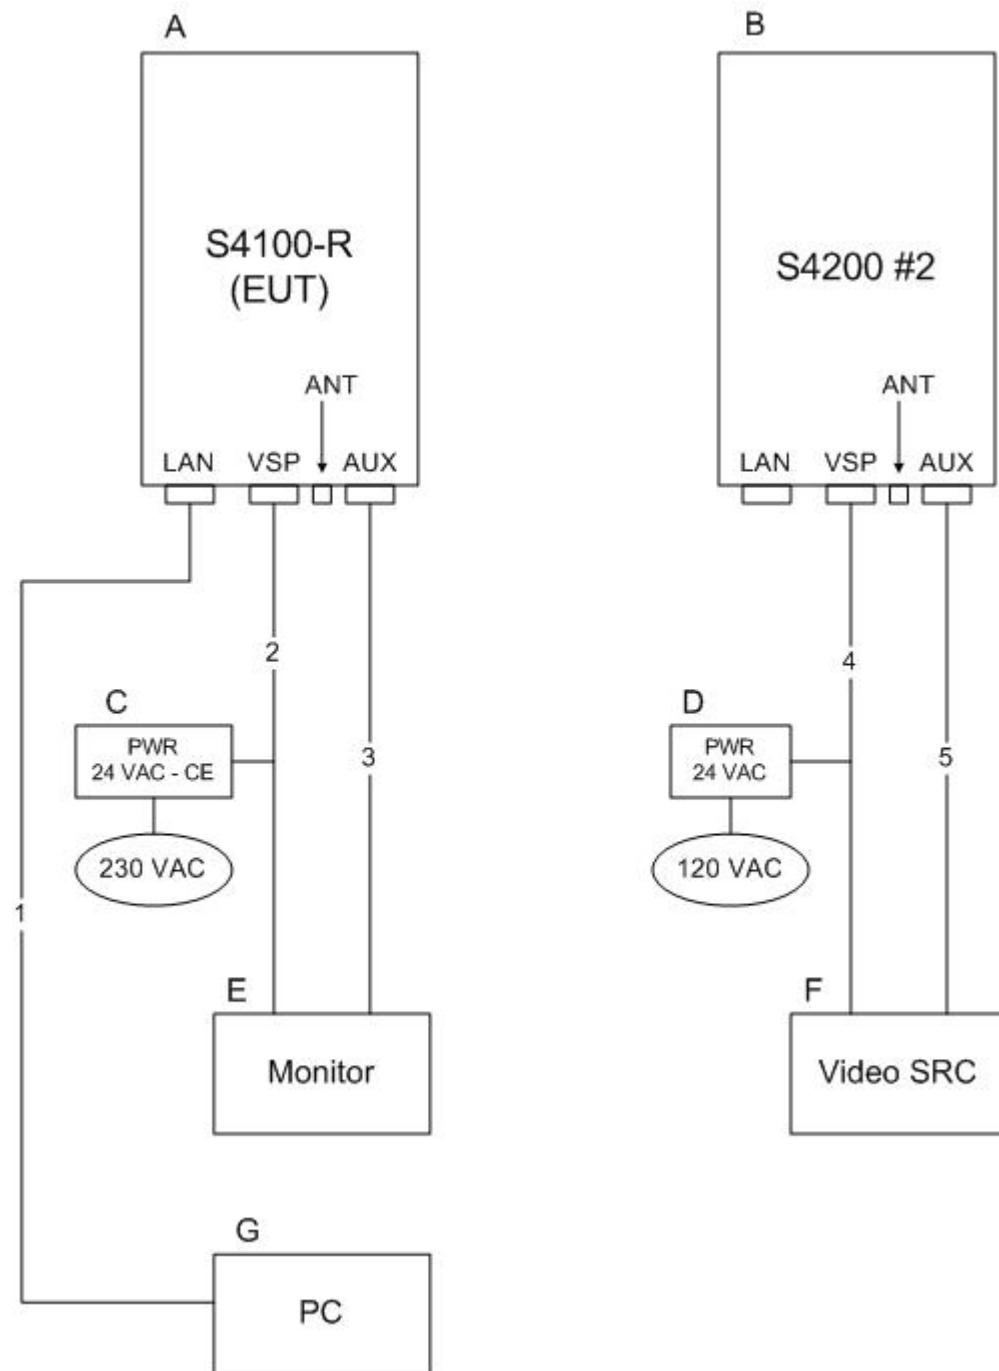


Figure 1. Block Diagram of Test Configuration (S4100)

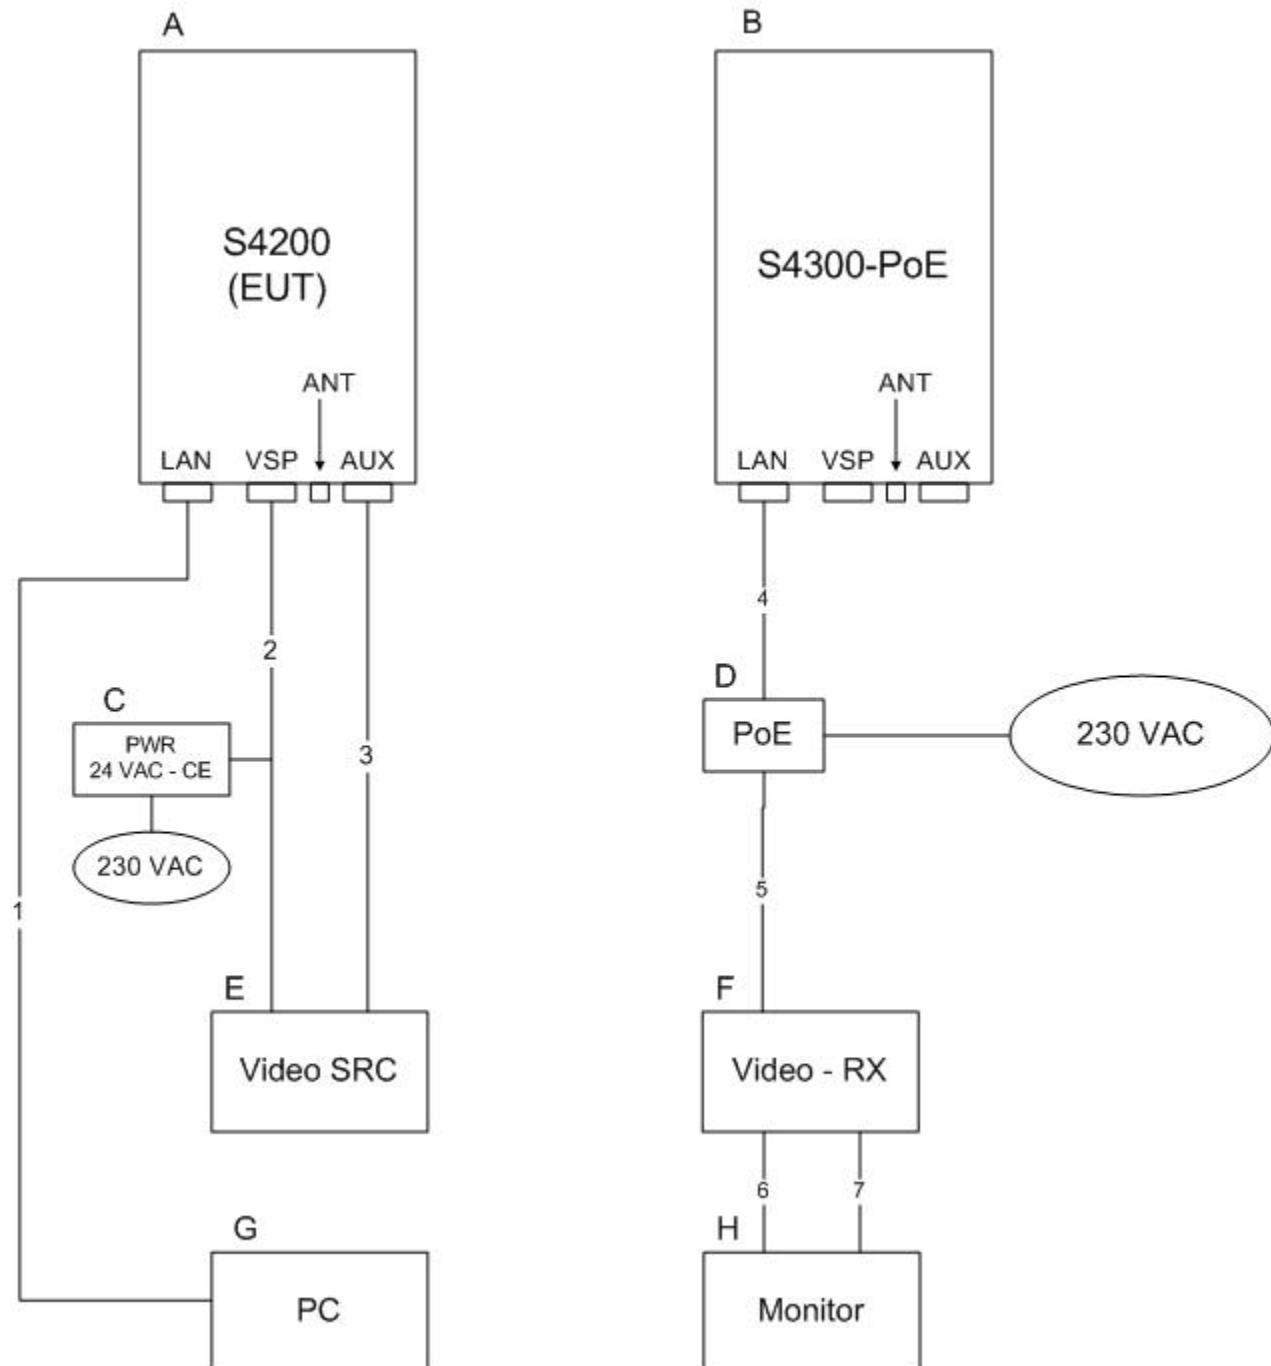


Figure 2. Block Diagram of Test Configuration (S4200)

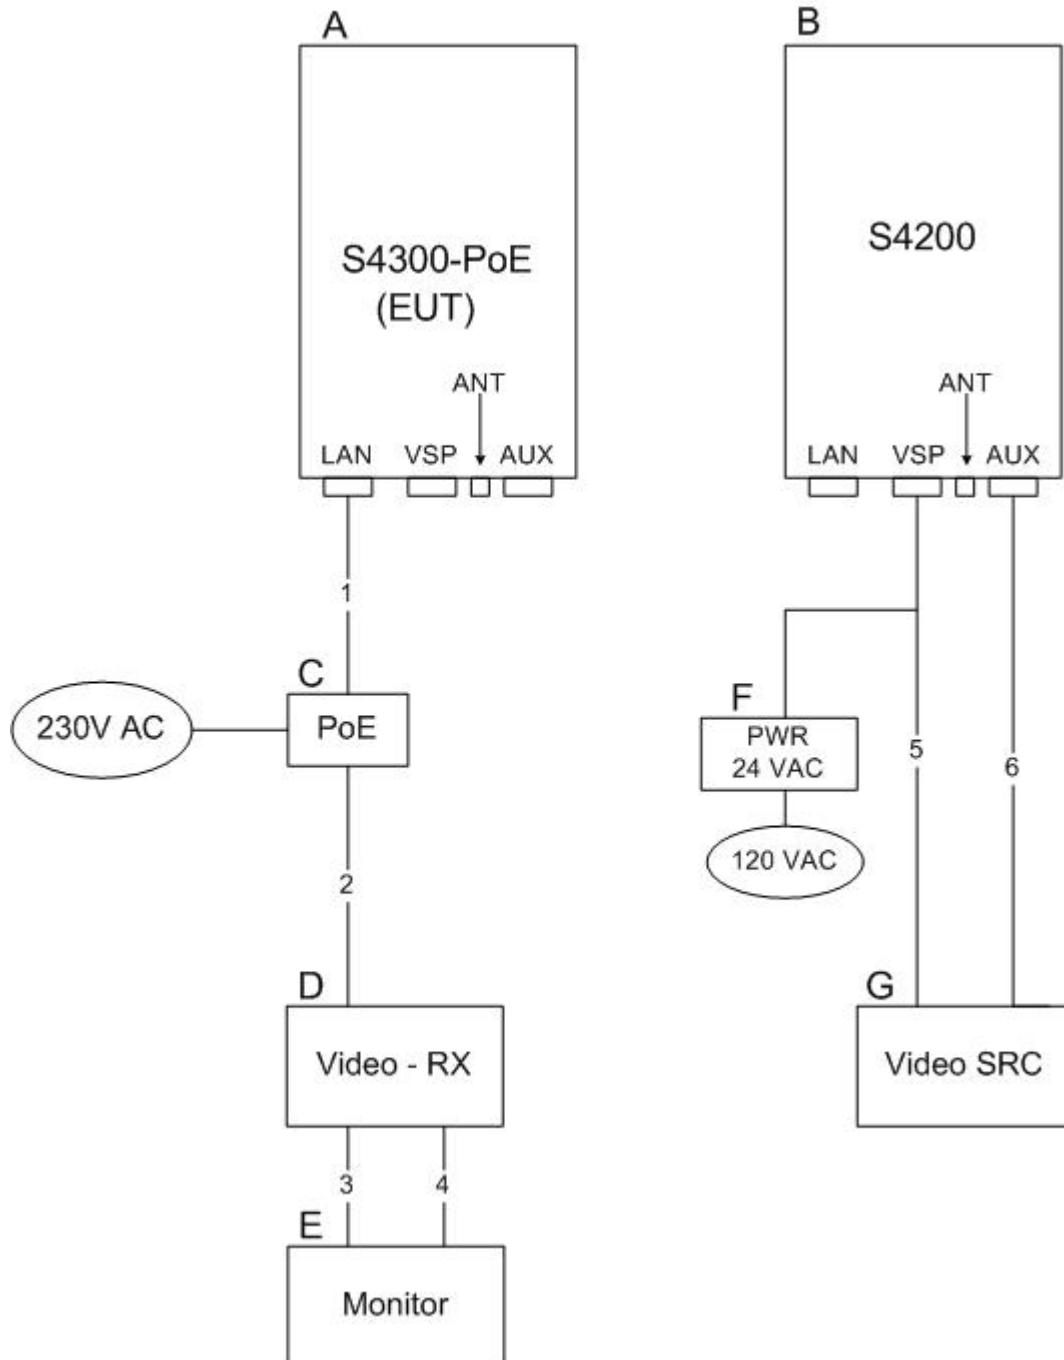


Figure 3. Block Diagram of Test Configuration (S4300)



## E. Equipment Configuration

The EUT was set up as outlined in Figure 1, Block Diagram of Test Setup. All cards, racks, etc., incorporated as part of the EUT is included in the following list.

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Rev. #
A	S4100-R	S4100-TX-AS-A	21-640-4082	79A700043	-

**Table 5. Equipment Configuration (S4100)**

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Rev. #
A	S4200	S4200-TX-AS-A	21-640-4088	79A700040	-

**Table 6. Equipment Configuration (S4200)**

Ref. ID	Name / Description	Model Number	Part Number	Serial Number	Rev. #
A	S4300 Wireless access point	S4300-PoE	21-640-4106	79A700053	-

**Table 7. Equipment Configuration (S4300)**



## F. Support Equipment

Verint Systems Canada Inc. supplied support equipment necessary for the operation and testing of the S4100, S4200 and S4300 Wireless Devices Family. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
B	S4200 #2	Verint Powering Actionable	S4200-TX-AS-A	-
C	PWR 24VAC-CE	AQualities	MTA572415	-
D	PWR 24VAC	AQualities	MTA572416	-
E	Monitor	Elmo	ECM-1402	-
F	Video Source	AEVisio	XD614	-
G	PC	Dell	Inspiron-630m	-

**Table 8. Support Equipment (S4100)**

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
B	S4300-PoE	Verint	S4300-PoE	-
C	PWR 24 VAC-CE	AQualities	MTA572415	-
D	PoE	N/A	N/A	-
E	Video Source	AEVisio	XD614	-
F	Video-RX	Verint	S1504e-T	-
G	PC	Dell	Inspiron-630m	-
H	Monitor	Elmo	ECM-1402	-

**Table 9. Support Equipment (S4200)**

Ref. ID	Name / Description	Manufacturer	Model Number	*Customer Supplied Calibration Data
B	S4200	Verint	S4200-TX-AS-A	-
C	PoE	N/A	N/A	-
D	VIDEO-RX	Verint	S1504e-T	-
E	Monitor	Elmo	ECM-1402	-
F	PWR 24 VAC	AQualities	MTA572416	-
G	Video Source	AEVisio	XD614	-

**Table 10. Support Equipment (S4300)**

\* The 'Customer Supplied Calibration Data' column will be marked as either not applicable, not available, or will contain the calibration date supplied by the customer.

\*\* The AC/DC Adapter was used to power the EUT for testing purpose only, will not be sold with radio.



## G. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port ID
1	A, LAN 10/100	Ethernet 25 #1	1	25	N	G, PC
2	A, VSP	Video/Serial/Power (Video/PW #1)	1	2.7	N	C, PWR and E, Monitor
3	A, AUX	Video 2#1	1	2.7	N	E, Monitor
4	B, VSP	Video/Serial/Power (Video/PW #2)	1	2.7	N	D, PWR and F, Video SRC
5	B, AUX	Video 2#2	1	2.7	N	F, Video SRC

Table 11. Ports and Cabling Information (S4100)

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port ID
1	A, LAN	Ethernet 25#1	1	25	N	G, PC
2	A, VSP	Video/Power (VIDEO/PW#1)	1	2.7	1. No	E, Video SRC
3	A, AUX	Video 2#1	1	2.7	1. No	E, Video SRC
4	B, LAN	Ethernet 3#1	1	25	No	D, PoE
5	D, PoE	Ethernet 10#1	1	10	No	F, Video-RX
6	F, Video-RX	BNC 3#1	1	1. 5	Yes	H, Monitor
7	F, Video-RX	BNC 3#2	1	1. 5	Yes	H, Monitor

Table 12. Ports and Cabling Information (S4200)

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length (m)	Shielded (Y/N)	Termination Box ID & Port ID
1	A, LAN	Ethernet 25#1	1	25	N	C, PoE
2	C, PoE	Ethernet 10#1	1	10	N	D, Video-RX
3	D, Video-RX	BNC 10#1	1	1. 5	Yes	E, Monitor
4	D, Video-RX	BNC 10#2	1	1. 5	Yes	E, Monitor
5	B, VSP	Video/Power (VIDEO/PW#2)	1	2.7	N	F, PWR and G, Video Source
6	B, AUX	Video2#2	1	2.7	N	G, Video Source

Table 13. Ports and Cabling Information (S4300)



## **H. Mode of Operation**

Unit provided for FCC wireless testing will be a S4300-12VDC/24AC. This unit will have the DCMA-82 High Powered radio module inside.

There is a special mode available for wireless certification. This mode permits to transmit continuously a modulated signal.

## **I. Method of Monitoring EUT Operation**

A Spectrum Analyzer and a Power Meter was use to monitor the EUT's transmitter channel and power output.

## **J. Modifications**

### **a) Modifications to EUT**

No modifications were made to the EUT.

### **b) Modifications to Test Standard**

No modifications were made to the test standard.

## **K. Disposition of EUT**

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Verint Systems Canada Inc. upon completion of testing.



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Unintentional Radiators  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

### **III. Electromagnetic Compatibility Criteria for Unintentional Radiators**



## Electromagnetic Compatibility Criteria for Unintentional Radiators

### § 15.107 Conducted Emissions Limits

**Test Requirement(s):**

**15.107 (a)** “Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 14. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.”

**15.107 (b)** “For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 14. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.”

Frequency range (MHz)	15.107(b), Class A Limits (dB $\mu$ V)		15.107(a), Class B Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15- 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.

**Table 14. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Section 15.107(a) (b)**

**Test Procedures:**

The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50 $\Omega$ /50 $\mu$ H LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were measured using a quasi-peak and/or average detector as appropriate.

**Test Results:**

The EUT was found compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):**

Ram Shrestha & Randy Hoopai

**Test Date(s):**

September 12 and 13, 2007



### Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz) – Model S4100

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
2.684	44.7	56	PASS	-11.3	25.9	46	PASS	-20.1
2.91	41.33	56	PASS	-14.67	21.29	46	PASS	-24.71
0.35	34.7	58.96	PASS	-24.26	26.6	48.96	PASS	-22.36


Table 15. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz) – S4100

### Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.351	32.67	58.94	PASS	-26.27	23.6	48.94	PASS	-25.34
2.448	42.1	56	PASS	-13.9	23.85	46	PASS	-22.15
2.686	45.2	56	PASS	-10.8	26.55	46	PASS	-19.45

Table 16. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz) – S4100

**Conducted Emissions - Voltage, Worst Case Emissions, AC Power, (110 VAC, 60 Hz) – Model S4100**

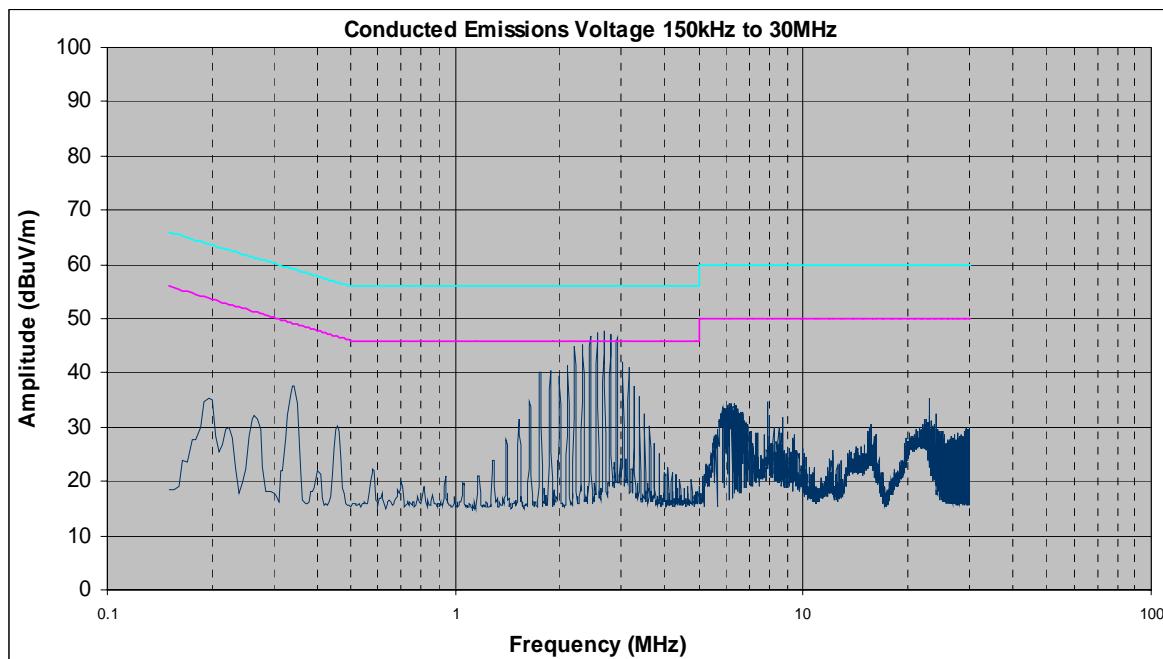

Conducted Emission, Phase Line Plots

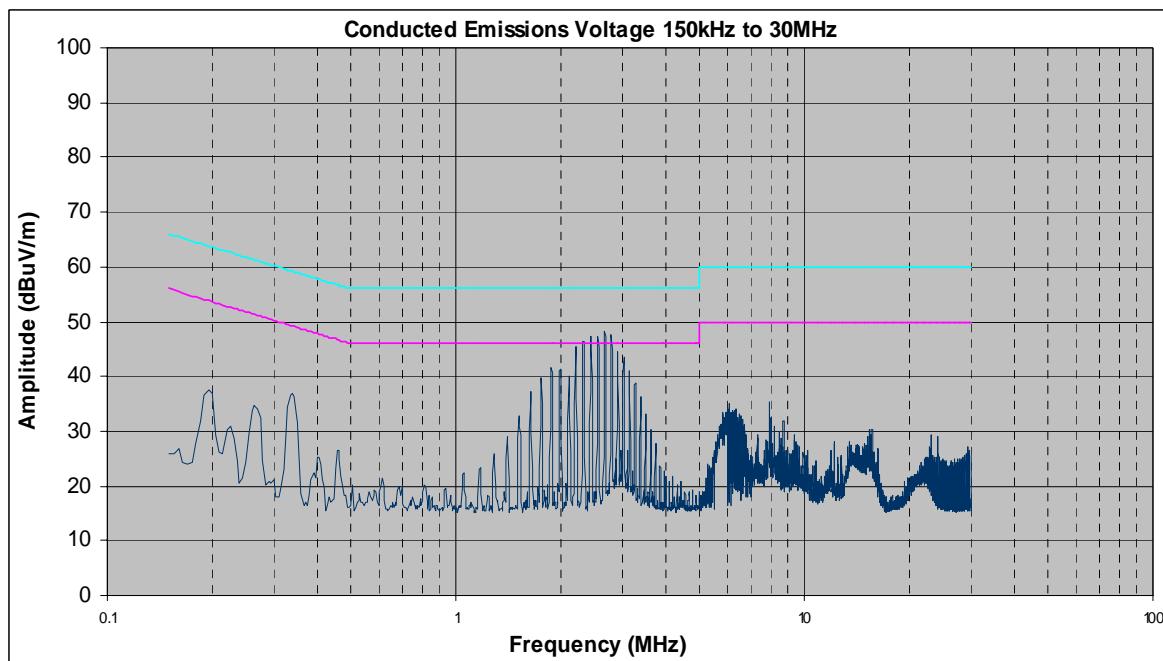

Conducted Emission, Neutral Line Plots



### Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz) – Model S4200

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.347	34.76	59.03	PASS	-24.27	25.76	49.03	PASS	-23.27
2.9	46.02	56	PASS	-9.98	29.1	46	PASS	-16.9
3.01	46.05	56	PASS	-9.95	28.52	46	PASS	-17.48


Table 17. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz) – S4200

### Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.351	35.4	58.94	PASS	-23.54	26.87	48.94	PASS	-22.07
2.55	39.28	56	PASS	-16.72	23.1	46	PASS	-22.9
3.01	45.6	56	PASS	-10.4	27.6	46	PASS	-18.4

Table 18. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz) – S4200

**Conducted Emissions - Voltage, Worst Case Emissions, AC Power, (110 VAC, 60 Hz) – Model S4200**

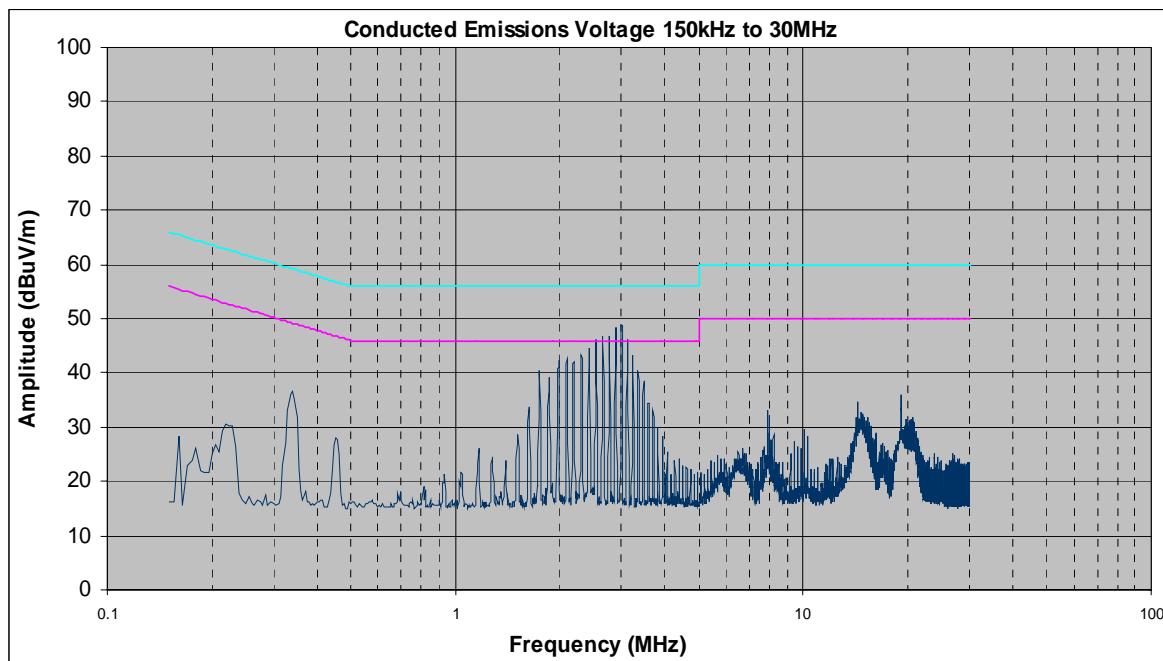

Conducted Emission, Phase Line Plots

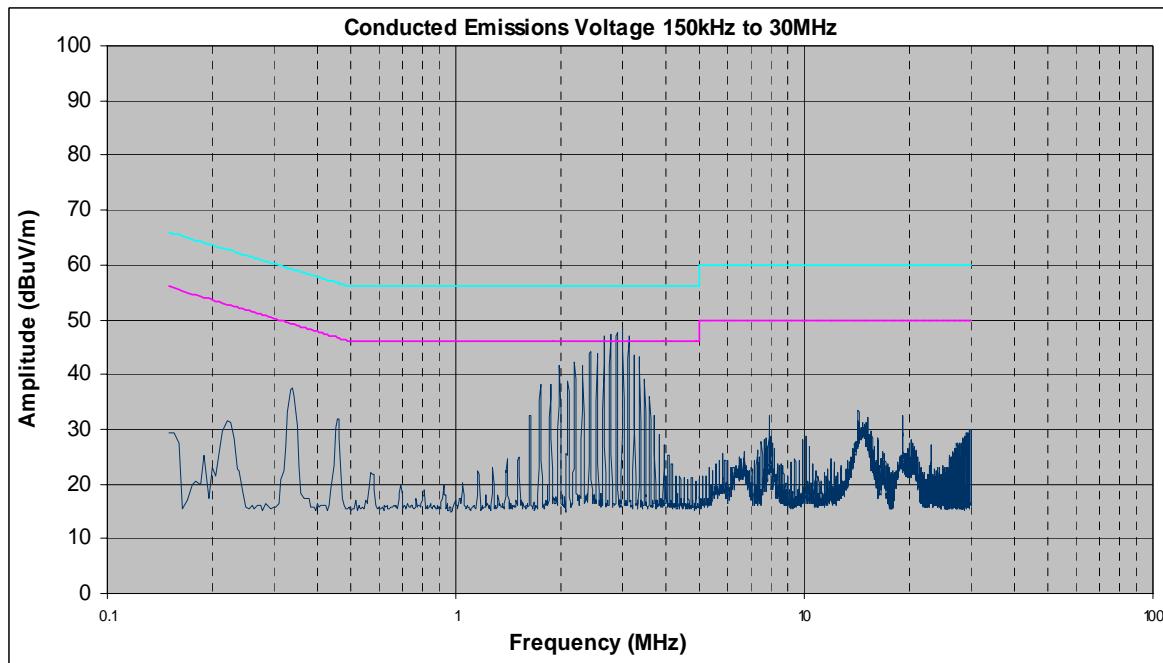

Conducted Emission, Neutral Line Plots



### Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz) – Model S4300

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.158	36.12	65.57	PASS	-29.45	36.12	55.57	PASS	-19.45
0.2	31.43	63.61	PASS	-32.18	21.35	53.61	PASS	-32.26
16.22	42.44	60	PASS	-17.56	40.89	50	PASS	-9.11


Table 19. Conducted Emissions - Voltage, AC Power, Phase Line (110 VAC, 60 Hz) – S4300

### Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz)


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.183	33.23	64.35	PASS	-31.12	8.87	54.35	PASS	-45.48
16.22	41.85	60	PASS	-18.15	40.83	50	PASS	-9.17
20.38	41.32	60	PASS	-18.68	39.05	50	PASS	-10.95

Table 20. Conducted Emissions - Voltage, AC Power, Neutral Line (110 VAC, 60 Hz) – S4300

**Conducted Emissions - Voltage, Worst Case Emissions, AC Power, (110 VAC, 60 Hz) – Model S4300**

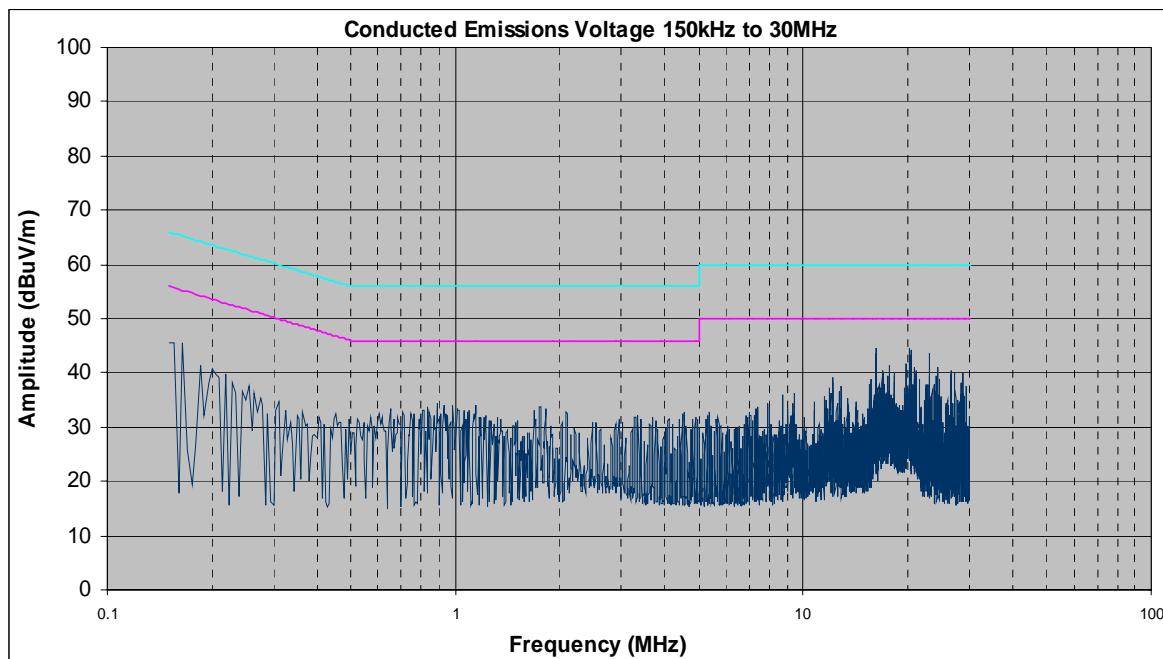


**Conducted Emission, Phase Line Plots**

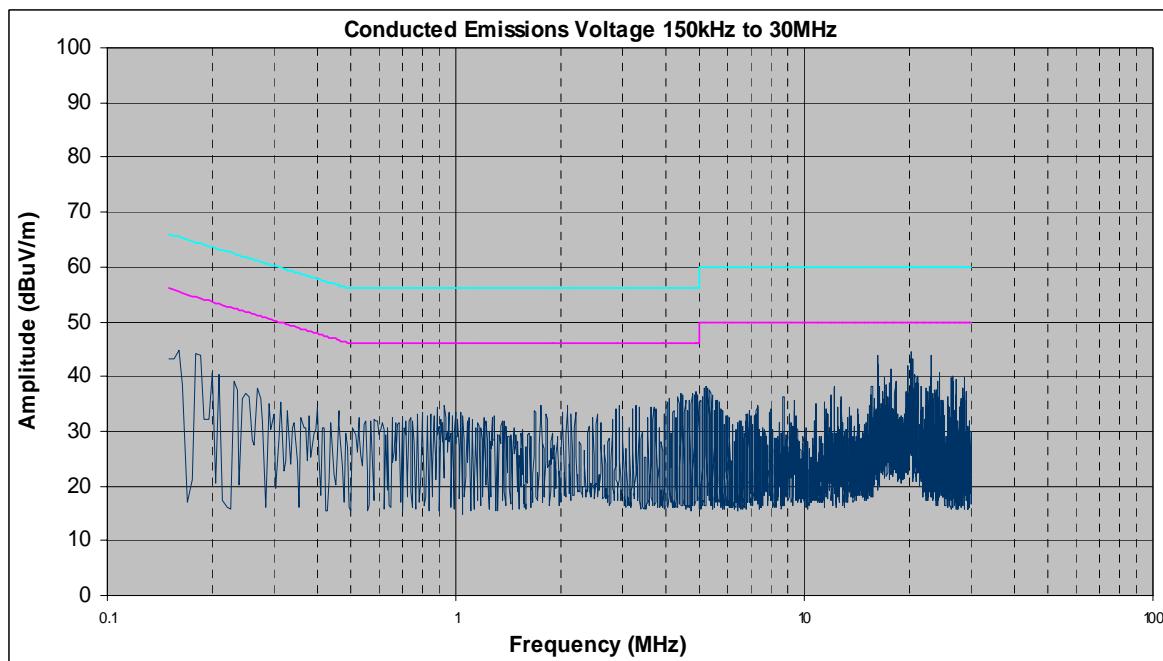

**Conducted Emission, Neutral Line Plots**

## Conducted Emission Limits Test Setup

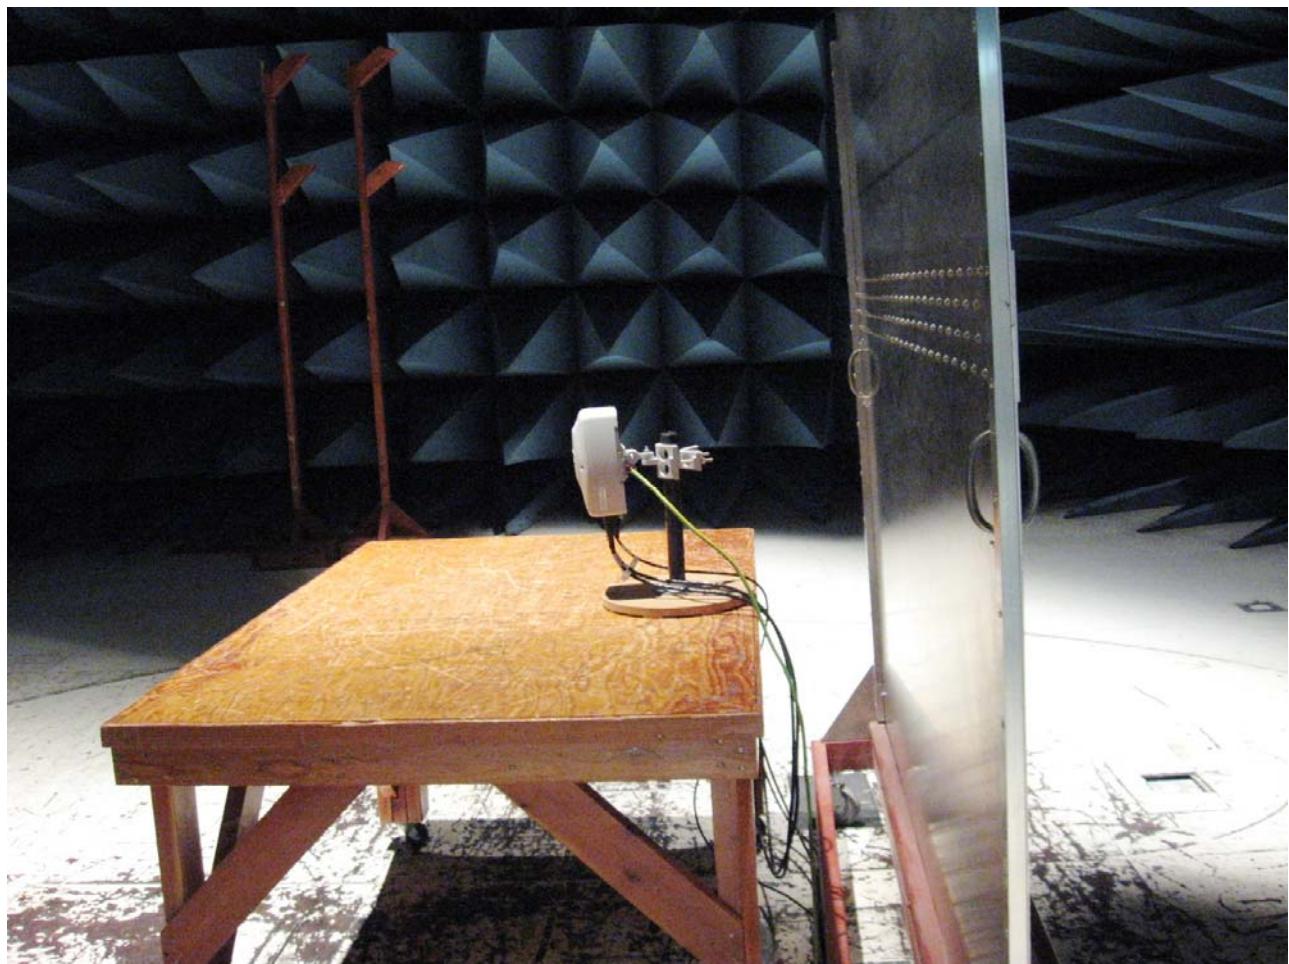

Photograph 2. Conducted Emissions Test Setup



## Radiated Emission Limits

### § 15.109 Radiated Emissions Limits

**Test Requirement(s):** **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 21.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 21.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 21. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:** The EUT was placed on a 0.8m-high wooden table inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 10 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:** The EUT was found Compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits

**Test Engineer(s):** Ram Shrestha, Randy Hoopai & Minh Ly


**Test Date(s):** September 13, 2007

## Radiated Emissions Limits Test Results, Class B – Model S4100

Frequency (MHz)	Antenna Polarity (H/V)	EUT Azimuth (Degrees)	Antenna Height (m)	Uncorrected Amplitude QP Detector (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
<b>38.2*</b>	<b>V</b>	<b>180</b>	<b>1</b>	<b>24.42</b>	<b>13.12</b>	<b>1.00</b>	<b>-10.46</b>	<b>28.08</b>	<b>30.00</b>	<b>-1.92</b>
38.96	H	203	2.49	12.92	14.62	1.01	-10.46	18.09	30.00	-11.91
399.6	V	57	1.24	19.70	16.09	3.50	-10.46	28.83	37.00	-8.17
599.4	H	152	1	18.26	19.60	4.59	-10.46	31.99	37.00	-5.01
799.2	V	334	1	12.20	20.42	5.45	-10.46	27.60	37.00	-9.40
799.2	H	143	1.42	13.52	21.27	5.45	-10.46	29.77	37.00	-7.23

**Table 22. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz – S4100**

\*Note - At this frequency, the measured electric-field strength exhibits a margin of compliance that is less than 3 dB below the specification limit. We recommend that every emission measured, have at least a 3 dB margin to allow for deviations in the emission characteristics that may occur during the production process.

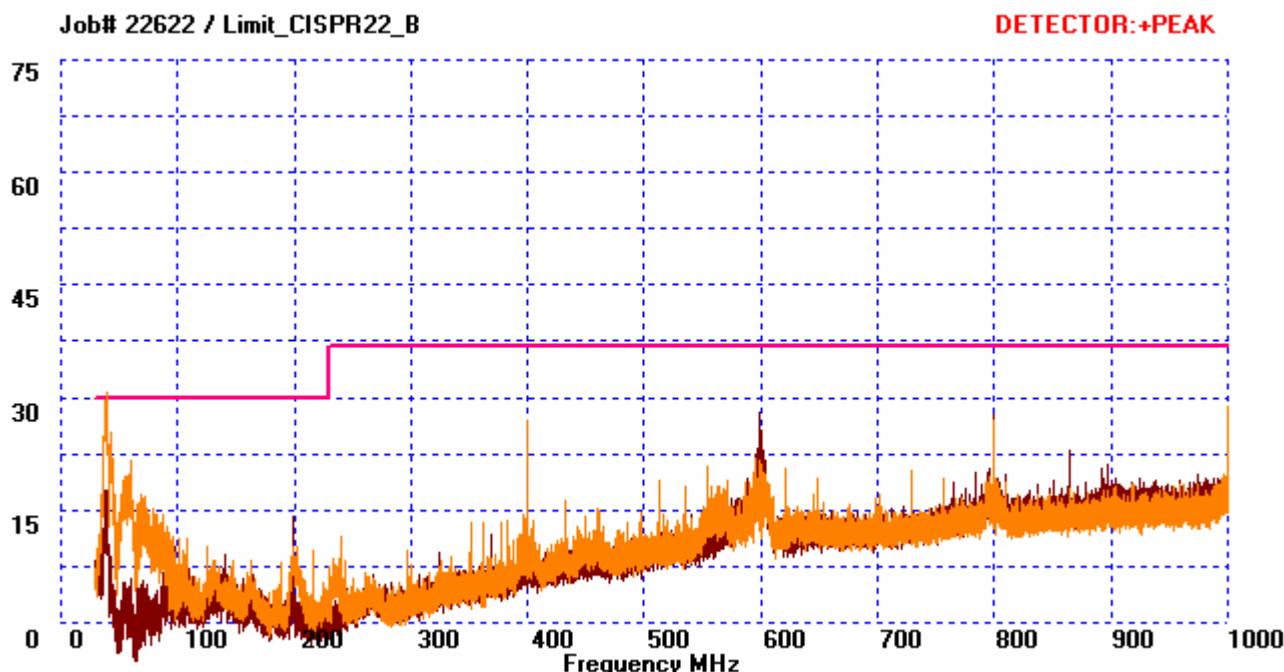


Radiated Emissions Limits Test Results, 30 MHz – 1 GHz, Class B

## Radiated Emissions Limits Test Results, Class B – Model S4200

Frequency (MHz)	Antenna Polarity (H/V)	EUT Azimuth (Degrees)	Antenna Height (m)	Uncorrected Amplitude QP Detector (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
39.6	V	66	1	18.50	12.44	1.02	-10.46	21.50	30.00	-8.50
399.6	V	152	1	17.58	16.09	3.50	-10.46	26.71	37.00	-10.29
599.36	H	128	1.12	12.60	19.60	4.59	-10.46	26.33	37.00	-10.67
599.4	V	307	1	16.58	19.40	4.59	-10.46	30.11	37.00	-6.89
800	V	218	1	10.83	20.40	5.45	-10.46	26.22	37.00	-10.78
810	H	155	1	10.50	21.40	5.50	-10.46	26.94	37.00	-10.06

Table 23. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz – S4200

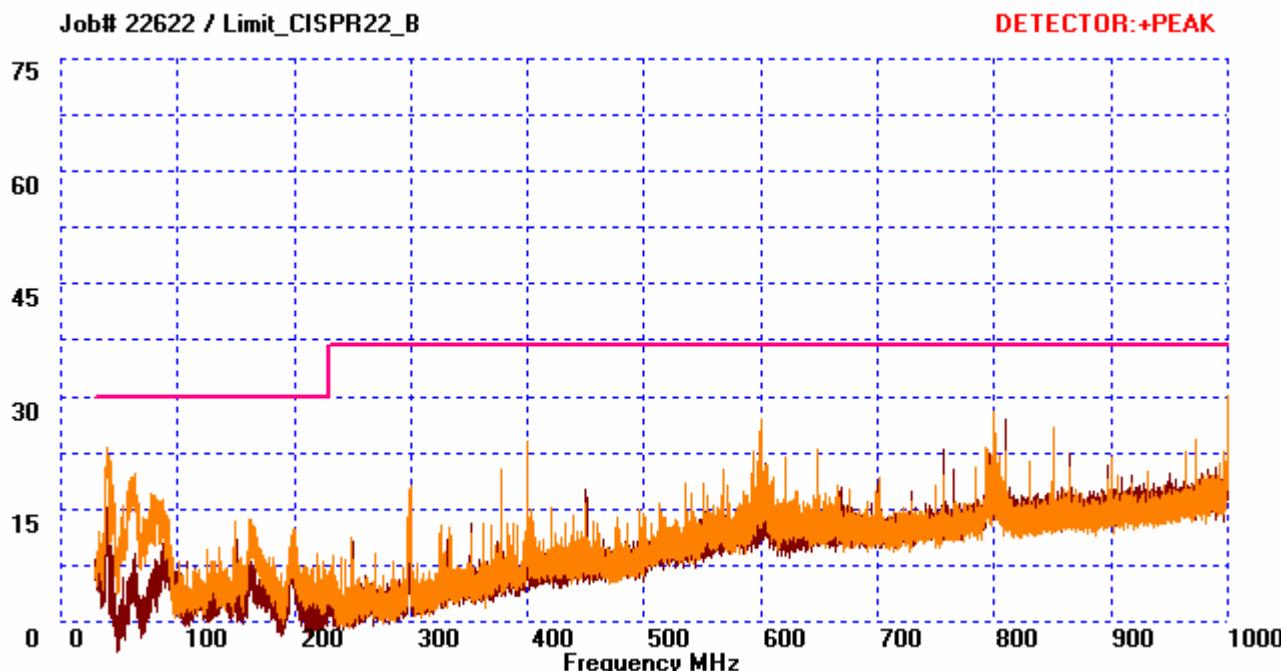


Radiated Emissions Limits Test Results, 30 MHz – 1 GHz, Class B

## Radiated Emissions Limits Test Results, Class B – Model S4300


Frequency (MHz)	Antenna Polarity (H/V)	EUT Azimuth (Degrees)	Antenna Height (m)	Uncorrected Amplitude QP Detector (dBuV)	Antenna Correction Factor (dB/m) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB)	Corrected Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
40.32	V	235	1.12	13.43	11.87	1.02	0.00	26.33	30.00	-3.67
77.2	V	212	1.92	17.80	6.68	1.45	0.00	25.94	30.00	-4.06
98.44	H	266	4	5.44	10.12	1.71	0.00	17.27	30.00	-12.73
98.48	V	288	1	12.40	10.70	1.71	0.00	24.81	30.00	-5.19
412.6	V	29	1	5.58	16.30	3.56	0.00	25.44	37.00	-11.56
799.2	V	0	1.21	4.93	20.17	5.45	0.00	30.54	37.00	-6.46

Table 24. Radiated Emissions Limits Test Results, 30 MHz – 1 GHz – S4300

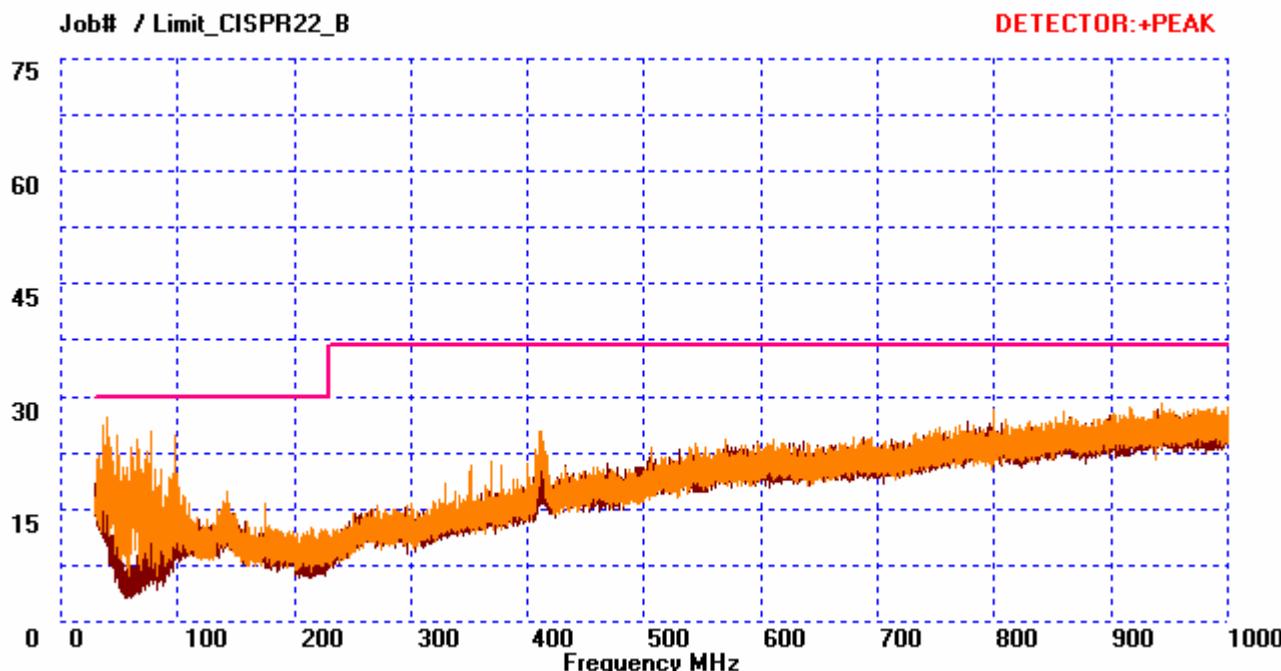

Radiated Emissions Limits Test Results, 30 MHz – 1 GHz, Class B

## Radiated Emission Limits Test Setup

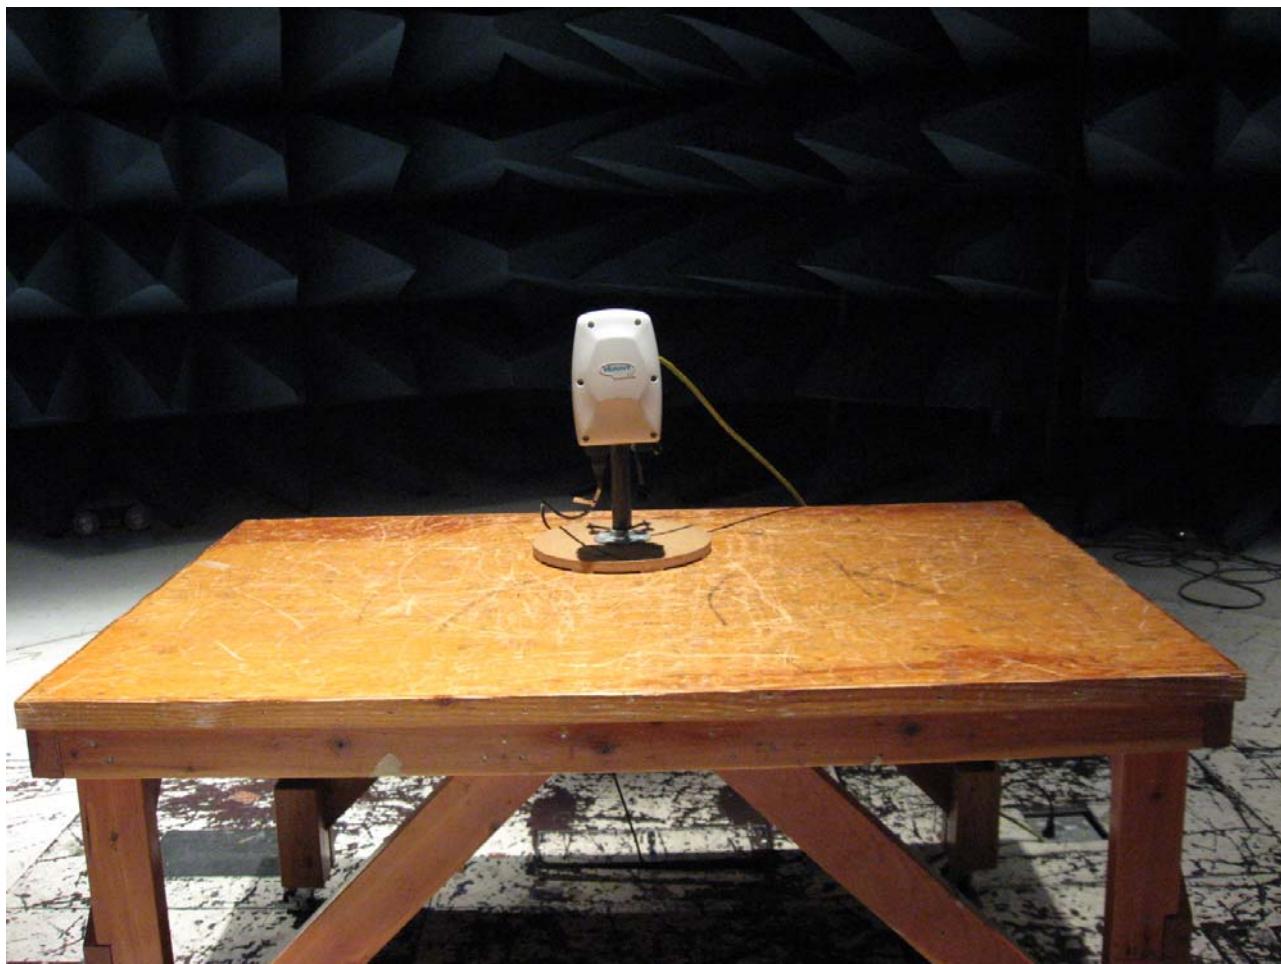

Photograph 3. Radiated Emission Test Setup 30 MHz - 1 GHz



## Radiated Emissions Limits Test Results, Class B – Model S4100

Freq. (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 3 m (Avg)	P. Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit per FCC pt.15 @ 3 m (dBuV/m)	Delta (dB)
1	129	H	1.04	47.2	36.15	24.00	2.14	37.19	54	-16.81
1	186	V	1	45.69	36.15	23.80	2.14	35.48	54	-18.52
1.198	181	H	1	45.34	35.69	24.38	2.27	36.30	54	-17.70
1.2	148	V	1.21	46.32	35.68	24.29	2.27	37.19	54	-16.81
1.398	247	H	1	41.5	35.30	24.89	2.44	33.54	54	-20.46
1.398	172	V	1.2	41.39	35.30	24.87	2.44	33.40	54	-20.60
1.798	230	H	1.06	45.1	34.86	26.40	2.97	39.60	54	-14.40
1.798	191	V	1.07	49.1	34.86	26.42	2.97	43.63	54	-10.37

Table 25. Radiated Emissions from 1 GHz to 2 GHz – S4100

**Note:** When transmit mode or receive mode were activated, there are no differences to emissions. For above 1 GHz measurement up to 5<sup>th</sup> harmonic of the highest operating frequency, emissions are noise floor during receive mode.



## Radiated Emissions Limits Test Results, Class B – Model S4200

Freq. (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 3 m (Avg)	P. Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit per FCC pt.15 @ 3 m (dBuV/m)	Delta (dB)
1.05	77	V	1	44.6	36.03	23.91	2.17	34.65	54	-19.35
1.1	211	H	1.6	43.91	35.91	24.18	2.20	34.38	54	-19.62
1.15	62	V	1	35.8	35.79	24.16	2.23	26.40	54	-27.60
1.2	120	H	1	45.86	35.68	24.38	2.27	36.83	54	-17.17
1.2	282	V	1	50.5	35.68	24.29	2.27	41.37	54	-12.63
1.25	279	V	1	35.3	35.58	24.43	2.31	26.45	54	-27.55
1.8	276	H	1	37.4	34.86	26.40	2.98	31.92	54	-22.08

**Table 26. Radiated Emissions from 1 GHz to 5GHz – S4200**

**Note:** When transmit mode or receive mode were activated, there are no differences to emissions. For above 1 GHz measurement up to 5<sup>th</sup> harmonic of the highest operating frequency, emissions are noise floor during receive mode.




### Radiated Emissions Limits Test Results, Class B – Model S4300

Freq. (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	Raw Amp. @ 3 m (Avg)	P. Amp (dB)	Ant. Cor. Factor (dB/m)	Cable Loss (dB)	EUT Field Strength Final Amp. (dBuV/m)	Limit per FCC pt.15 @ 3 m (dBuV/m)	Delta (dB)
1.062	26	H	1.4	36.4	36.00	24.11	2.18	26.68	54	-27.32
1.194	140	H	1.18	38.5	35.70	24.37	2.26	29.44	54	-24.56
1.194	130	V	1	37.04	35.70	24.27	2.26	27.88	54	-26.12
1.26	155	V	1	34.5	35.56	24.45	2.32	25.71	54	-28.29
1.3	0	H	1.29	34.8	35.48	24.62	2.35	26.30	54	-27.70
1.326	195	V	1	33.6	35.43	24.64	2.37	25.19	54	-28.81
1.41	360	H	1.76	37.9	35.28	24.92	2.45	30.00	54	-24.00

Table 27. Radiated Emissions from 1 GHz to 2 GHz – S4300

**Note:** When transmit mode or receive mode were activated, there are no differences to emissions. For above 1 GHz measurement up to 5<sup>th</sup> harmonic of the highest operating frequency, emissions are noise floor during receive mode.

## Radiated Emission Limits Test Setup

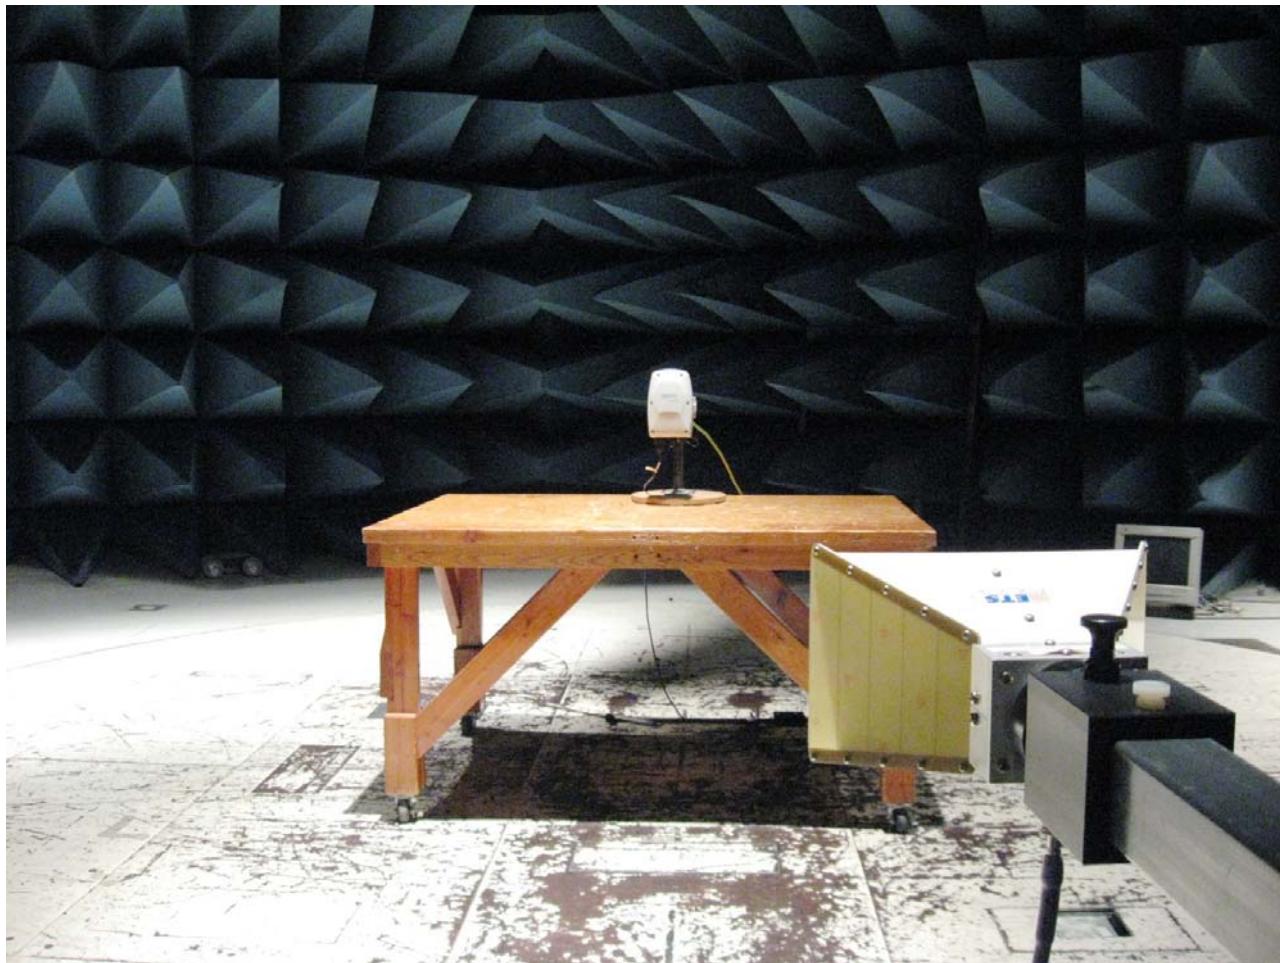

Photograph 4. Radiated Emission Limits Test Setup 1 - 5GHz



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## IV. Electromagnetic Compatibility Criteria for Intentional Radiators



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.203 Antenna Requirement

**Test Requirement:** **§ 15.203:** An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

The structure and application of the EUT were analyzed to determine compliance with Section 15.203 of the Rules. Section 15.203 states that the subject device must meet at least one of the following criteria:

- a.) Antenna must be permanently attached to the unit.
- b.) Antenna must use a unique type of connector to attach to the EUT.
- c.) Unit must be professionally installed. Installer shall be responsible for verifying that the correct antenna is employed with the unit.

**Results:** The EUT as tested meets the criteria of this rule by virtue of having professionally installed. The EUT is therefore compliant with §15.203.

Frequency Range	Antenna Gain (dBi)	Model Number	Antenna Type	Manufacturer
5.15 – 5.85GHz	24	FP1-5-24	Flat Panel	Radio Waves
5.15 – 5.85GHz	18	FP.5-5-18	Flat Panel	Radio Waves
5.25 – 5.85GHz	16	Sector 55V-90-16	Sector	Radio Waves
2.3 – 2.5GHz	8.5	Z3114	Integrated	MaxRad
4.94 – 5.85GHz	12	Z3114	Integrated	MaxRad
2.4 – 2.5GHz	15.5	MT-30081/A	Panel	Wireless Edge, Ltd.
5.15 – 5.875GHz	19	MT-485001	Panel	Wireless Edge, Ltd.
5.15 – 5.875GHz	23	MT-485002	Panel	Wireless Edge, Ltd.



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.207 Conducted Emissions Limits

**Test Requirement(s):**

**§ 15.207 (a):** For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50  $\Omega$  line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency range (MHz)	§ 15.207(a), Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
* 0.15- 0.45	66 - 56	56 - 46
0.45 - 0.5	56	46
0.5 - 30	60	50

**Table 28. Conducted Limits for Intentional Radiators from FCC Part 15 § 15.207(a)**

**Test Procedure:**

The EUT was placed on a 0.8 m-high wooden table inside a semi-anechoic chamber. The EUT was situated such that the back of the EUT was 0.4 m from one wall of the vertical ground plane, and the remaining sides of the EUT were no closer than 0.8 m from any other conductive surface. The EUT was powered from a 50  $\Omega$ /50  $\mu$ H Line Impedance Stabilization Network (LISN). The EMC receiver scanned the frequency range from 150 kHz to 30 MHz. Conducted Emissions measurements were made in accordance with *ANSI C63.4-1992 "Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40 GHz"*. The measurements were performed over the frequency range of 0.15 MHz to 30 MHz using a 50  $\Omega$ /50  $\mu$ H LISN as the input transducer to an EMC/field intensity meter. The tests were conducted in a RF-shielded enclosure.

**Test Results:**

The EUT was found compliant with the requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):**

Ram Shrestha & Randy Hoopai

**Test Date(s):**

September 12 and 13, 2007



### § 15.207 Conducted Emissions - Phase Line – Model S4100

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
2.795	45.6	56	PASS	-10.4	26.11	46	PASS	-19.89
2.561	44.6	56	PASS	-11.4	27.3	46	PASS	-18.7
0.35	32.9	58.96	PASS	-26.06	23.97	48.96	PASS	-24.99


Table 29. Conducted Emissions - Phase Line – S4100

### § 15.207 Conducted Emissions - Neutral Line


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
2.679	44.98	56	PASS	-11.02	26.8	46	PASS	-19.2
3.02	42.2	56	PASS	-13.8	22.7	46	PASS	-23.3
0.346	36.5	59.06	PASS	-22.56	28.1	49.06	PASS	-20.96

Table 30. Conducted Emissions - Neutral Line– S4100

## § 15.207 Conducted Emissions - AC Power – Model S4100

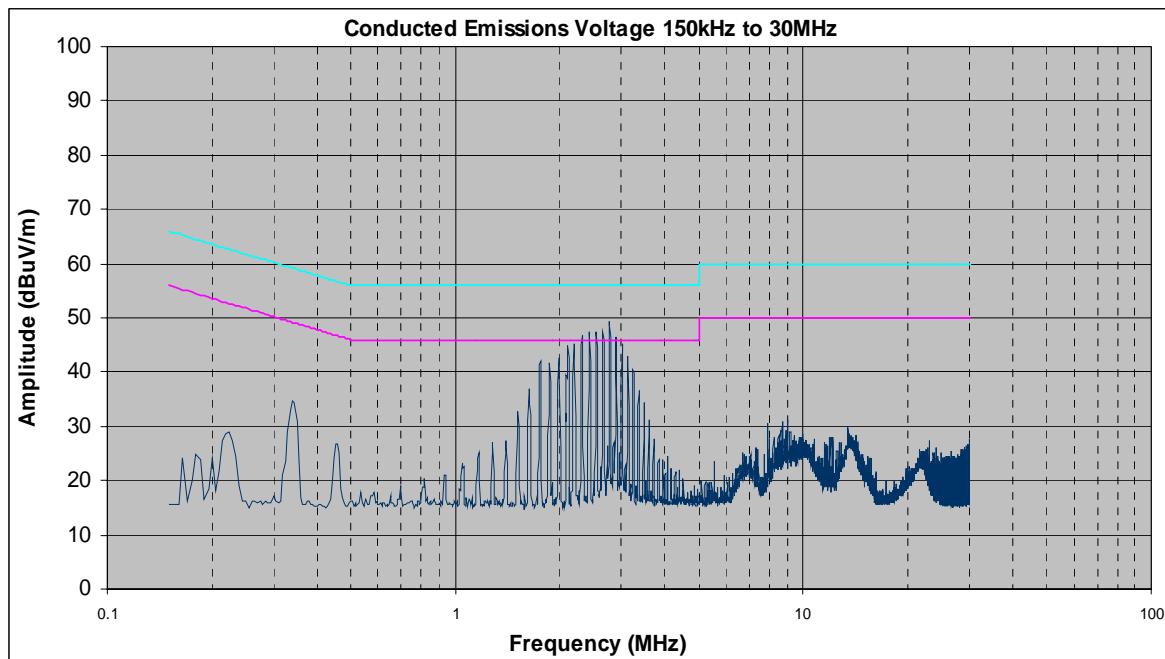

Conducted Emission, Phase Line Plots

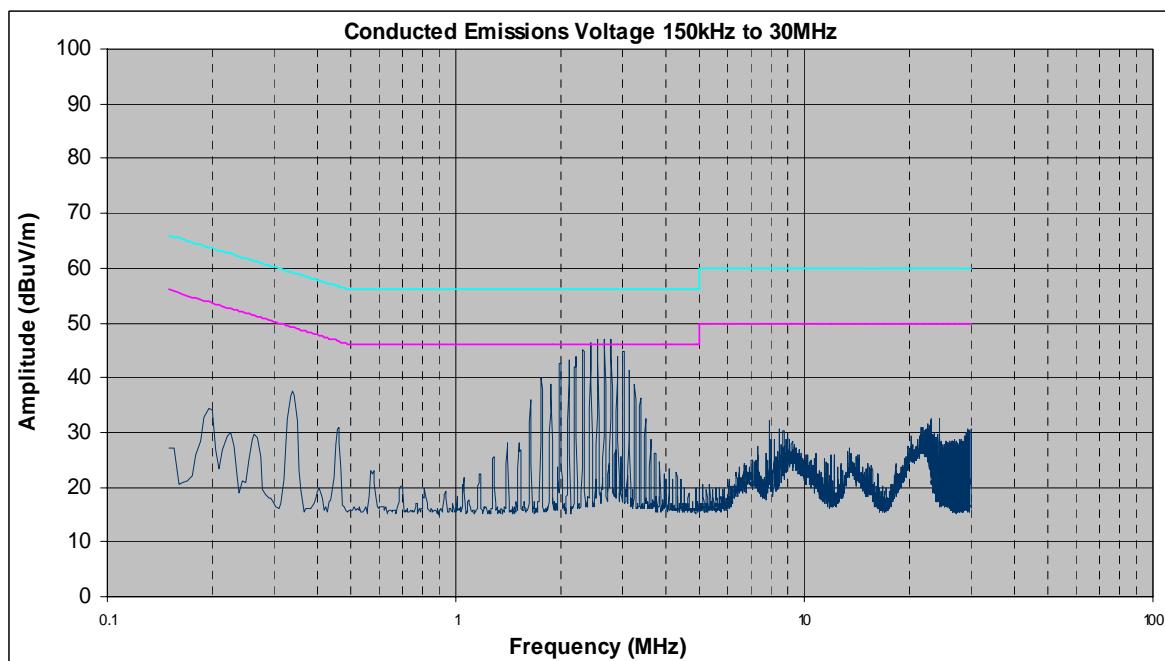

Conducted Emission, Neutral Line Plots



### § 15.207 Conducted Emissions - Phase Line – Model S4200

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.35	37	58.96	PASS	-21.96	26.6	48.96	PASS	-22.36
3.02	44.4	56	PASS	-11.6	26.5	46	PASS	-19.5
3.37	40.7	56	PASS	-15.3	21.3	46	PASS	-24.7


Table 31. Conducted Emissions - Phase Line – S4200

### § 15.207 Conducted Emissions - Neutral Line


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.351	26.9	58.94	PASS	-32.04	26.2	48.94	PASS	-22.74
3.02	42.4	56	PASS	-13.6	25.26	46	PASS	-20.74
3.145	43.8	56	PASS	-12.2	24.4	46	PASS	-21.6

Table 32. Conducted Emissions - Neutral Line– S4200

## § 15.207 Conducted Emissions - AC Power – Model S4200

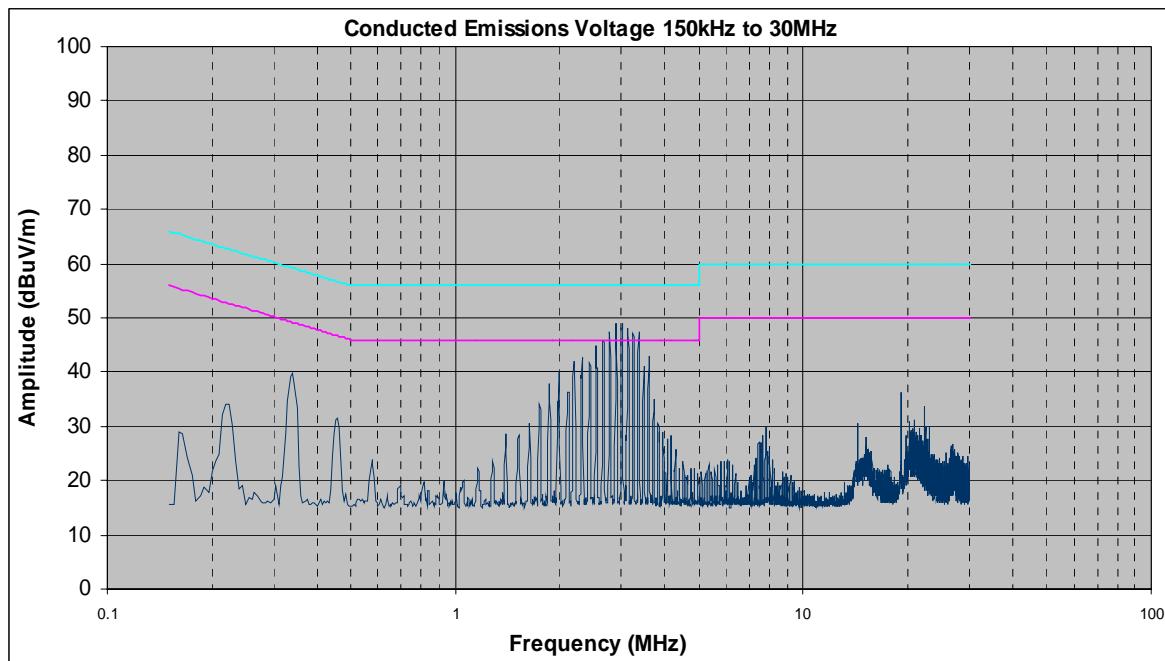

Conducted Emission, Phase Line Plots

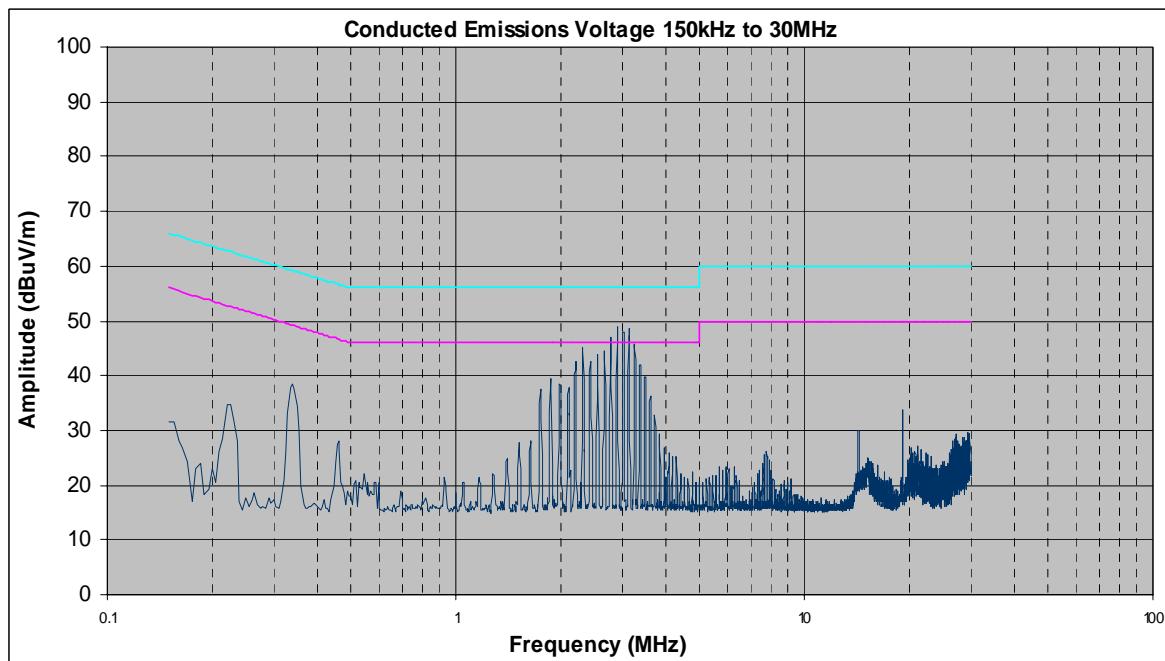

Conducted Emission, Neutral Line Plots



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

### § 15.207 Conducted Emissions - Phase Line – Model S4300

FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
16.22	45.22	60	PASS	-14.78	43.22	50	PASS	-6.78
20.25	43.02	60	PASS	-16.98	40.7	50	PASS	-9.3
23.12	44.1	60	PASS	-15.9	43.12	50	PASS	-6.88


Table 33. Conducted Emissions - Phase Line – S4300

### § 15.207 Conducted Emissions - Neutral Line


FREQ. (MHz)	Corrected Amplitude (dBuV) QP	Limit (dBuV) QP	Results QP	Margin (dB) QP	Corrected Amplitude (dBuV) AVG	Limit (dBuV) AVG	Results AVG	Margin (dB) AVG
0.18	35.42	64.49	PASS	-29.07	10.44	54.49	PASS	-44.05
16.22	41.62	60	PASS	-18.38	39.8	50	PASS	-10.2
20.25	41.75	60	PASS	-18.25	39.94	50	PASS	-10.06

Table 34. Conducted Emissions - Neutral Line– S4300

## § 15.207 Conducted Emissions - AC Power – Model S4300

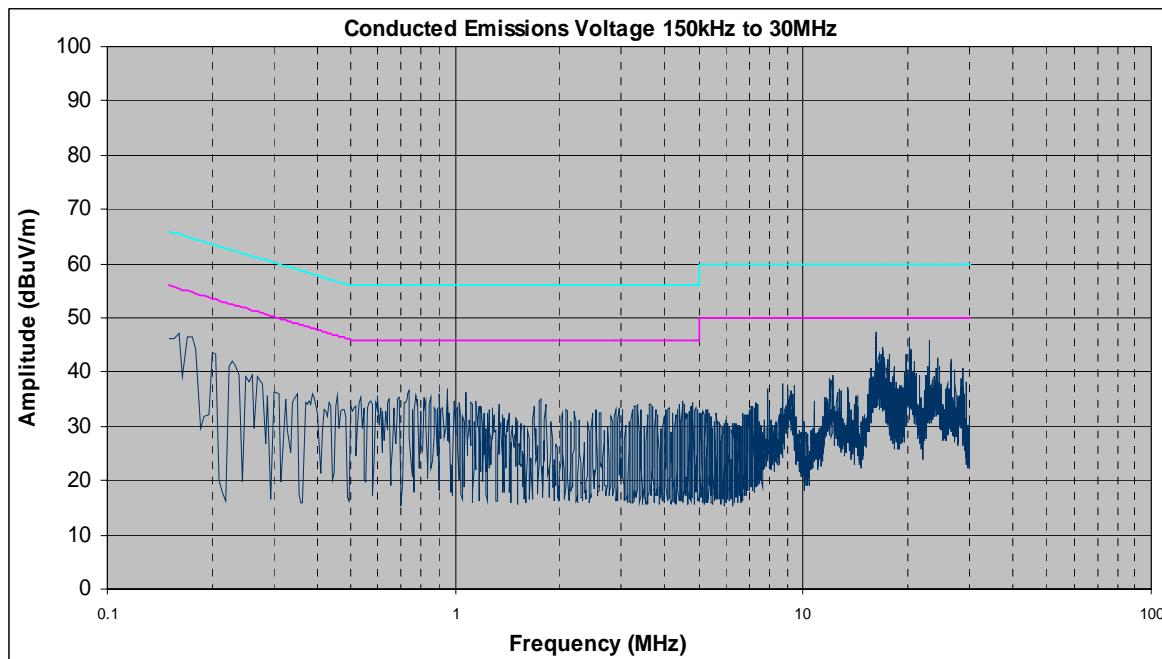

Conducted Emission, Phase Line Plots

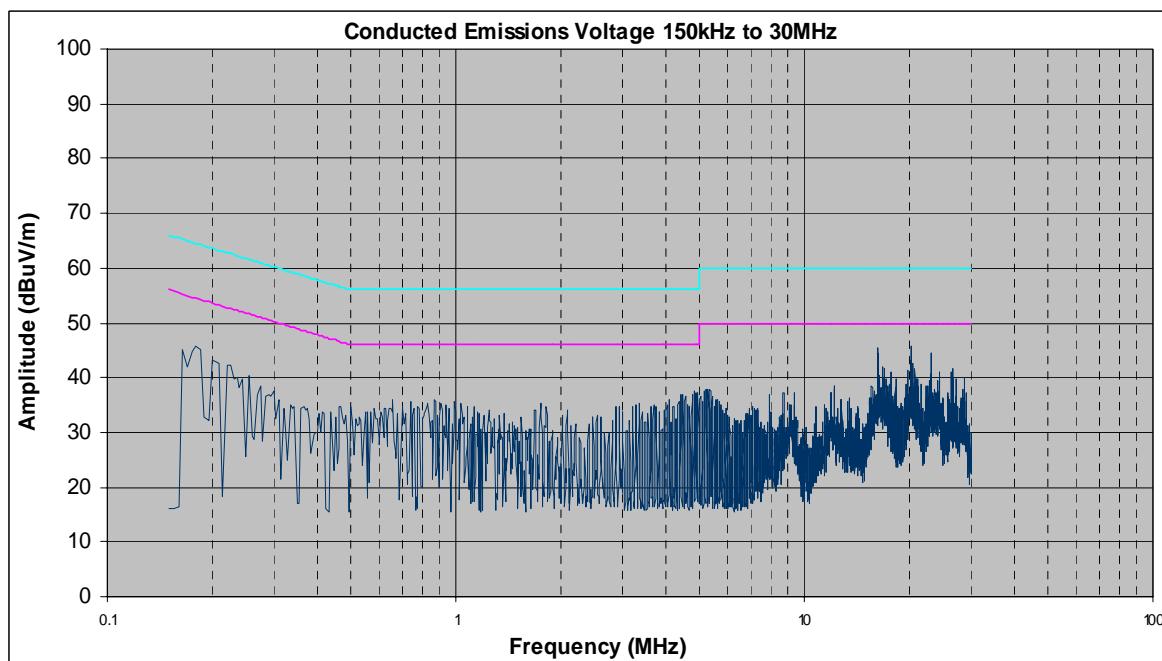

Conducted Emission, Neutral Line Plots



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(a) 6 dB and 99% Bandwidth

**Test Requirements:** **§ 15.247(a):** Operation under the provisions of this section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

For systems using digital modulation techniques, the EUT may operate in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

**Test Procedure:** The transmitter was set to the mid channel at the highest output power and connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using a RBW approximately equal to 1% of the total emission bandwidth,  $VBW > RBW$ . The 6 dB Bandwidth was measured and recorded. The measurements were repeated at the low and high channels.

**Test Results** Not Applicable. Please refer to original grant for FCC ID: VKHS4X00DCMA82.



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output and RF Exposure

**Test Requirements:** **§15.247(b):** The maximum peak output power of the intentional radiator shall not exceed the following:

Digital Transmission Systems (MHz)	Output Limit (Watts)
902-928	1.000
2400-2483.5	1.000
5725- 5850	1.000

**Table 35. Output Power Requirements from §15.247**

**§15.247(c):** if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in the Table 35, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Fixed, point-to-point operation excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

**Test Procedure:** The transmitter was connected to a calibrated Peak Power Meter. The EUT was measured at the low, mid and high channels of each band at a data rate which gave the maximum power level.

**Test Results:** Equipment complies with the Peak Power Output limits of § 15.247(b).

802.11g		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)
Low	2412	17.10
Mid	2437	17.9
High	2462	18.8

**Table 36. Peak Power Output Test Results – 802.11g**


802.11a		
Carrier Channel	Frequency (MHz)	Measured Peak Output Power (dBm)
Low	5745	25.6*
Mid	5785	25.2*
High	5825	25.6*

**Table 37. Peak Power Output Test Results – 802.11a**

\*Note – Refer FCC ID: VKHS4X00DCMA82 for measurement of Peak Output Power for 802.11a

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** October 2, 2007



**Block Diagram 1. Peak Power Output Test Setup**



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(b) Peak Power Output and RF Exposure

**RF Exposure Requirements:** **§1.1307(b)(1) and §1.1307(b)(2):** Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

**RF Radiation Exposure Limit:** **§1.1310:** As specified in this section, the Maximum Permissible Exposure (MPE) Limit shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in Sec. 1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of Sec. 2.1093 of this chapter.

MPE Limit Calculation: EUT's operating frequencies @ 2412-2462 MHz; highest conducted power = 18.8dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

EUT maximum antenna gain = **15.5 dBi – Panel Antenna**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm<sup>2</sup>)  
P = Power Input to antenna (75.8mW)  
G = Antenna Gain (35.5 numeric)

$$S = (75.8 * 35.5 / 4 * 3.14 * 20^2) = (2690.9 / 5024) = \mathbf{0.54 \text{ mW/cm}^2 \text{ @ 20cm}}$$

EUT maximum antenna gain = **8.5dBi – Integrated Antenna**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm<sup>2</sup>)  
P = Power Input to antenna (75.8mW)  
G = Antenna Gain (7.1 numeric)

$$S = (75.8 * 7.1 / 4 * 3.14 * 20^2) = (536.62 / 5024) = \mathbf{0.10 \text{ mW/cm}^2 \text{ @ 20cm}}$$



MPE Limit Calculation: EUT's operating frequencies @ 5725 - 5850 MHz; highest conducted power = 25.6dBm (peak) therefore, **Limit for Uncontrolled exposure: 1 mW/cm<sup>2</sup> or 10 W/m<sup>2</sup>**

**EUT maximum antenna gain = 24 dBi – Panel Antenna**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm<sup>2</sup>)  
P = Power Input to antenna (363.0mW)  
G = Antenna Gain (251.1 numeric)

$R = (363.9 * 251.1 / 4 * 3.14 * 1.0)^{1/2} = (91149.3 / 12.56)^{1/2} = 85.1\text{cm separation required in order to meet 1 mW/cm}^2 \text{ exposure limit.}$

**EUT maximum antenna gain = 16 dBi – Sector Antenna**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm<sup>2</sup>)  
P = Power Input to antenna (363.0mW)  
G = Antenna Gain (39.8 numeric)

$S = (363.9 * 39.8 / 4 * 3.14 * 20^2) = (2543.22 / 5024) = 0.50\text{mW/cm}^2 @ 20\text{cm}$

**EUT maximum antenna gain = 12 dBi – Integrated Antenna**

Equation from page 18 of OET 65, Edition 97-01

$$S = PG / 4\pi R^2 \quad \text{or} \quad R = \sqrt{PG / 4\pi S}$$

where, S = Power Density (1 mW/cm<sup>2</sup>)  
P = Power Input to antenna (363.0mW)  
G = Antenna Gain (15.8 numeric)

$R = (363.9 * 15.8 / 4 * 3.14 * 1.0)^{1/2} = (5749.62 / 12.56)^{1/2} = 21.4\text{cm separation required in order to meet 1 mW/cm}^2 \text{ exposure limit.}$



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Harmonic Emissions – Radiated and Conducted

**Test Requirements:** §15.247(d); §15.205, §15.209: Emissions outside the frequency band.

**§15.247(d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a).

**§15.205(a):** Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090–0.110-----	16.42–16.423	399.9–410	4.5–5.15
<sup>1</sup> 0.495–0.505-----	16.69475–16.69525	608–614	5.35–5.46
2.1735–2.1905-----	16.80425–16.80475	960–1240	7.25–7.75
4.125–4.128-----	25.5–25.67	1300–1427	8.025–8.5
4.17725–4.17775-----	37.5–38.25	1435–1626.5	9.0–9.2
4.20725–4.20775-----	73–74.6	1645.5–1646.5	9.3–9.5
6.215–6.218-----	74.8–75.2	1660–1710	10.6–12.7
6.26775–6.26825-----	108–121.94	1718.8–1722.2	13.25–13.4
6.31175–6.31225-----	123–138	2200–2300	14.47–14.5
8.291–8.294-----	149.9–150.05	2310–2390	15.35–16.2
8.362–8.366-----	156.52475–156.52525	2483.5–2500	17.7–21.4
8.37625–8.38675-----	156.7–156.9	2655–2900	22.01–23.12
8.41425–8.41475-----	162.0125–167.17	3260–3267	23.6–24.0
12.29–12.293-----	167.72–173.2	3332–3339	31.2–31.8
12.51975–12.52025-----	240–285	3345.8–3358.36.	43–36.5
12.57675–12.57725-----	322–335.4	3600–4400	( <sup>2</sup> )

**Table 38. Restricted Bands of Operation**

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490 – 0.510 MHz.

<sup>2</sup> Above 38.6



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g) – Integrated Antenna

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
4824	V	42.18	35.1	33.5	5.2	45.8	74	28.2	pk
4824	V	32.8	35.1	33.5	5.2	36.4	54	17.6	avg
7236	V	39.81	35.1	37.0	6.5	48.2	74	25.8	pk
7236	V	33.41	35.1	37.0	6.5	41.8	54	12.2	avg
9648	V	41.68	35.6	38.5	7.8	52.4	74	21.6	pk


#### Low Channel 2412MHz

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
4874	V	43.65	35.1	33.5	5.2	47.3	74	26.7	pk
4874	V	33.14	35.1	33.5	5.2	36.7	54	17.3	avg
7311	V	40	35.1	37.0	6.5	48.4	74	25.6	pk
7311	V	33.21	35.1	37.0	6.5	41.6	54	12.4	avg
9748	V	40.72	35.6	38.5	7.8	51.4	74	22.6	pk


#### Mid Channel 2437

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
4924	V	45.93	35.1	33.5	5.2	49.5	74	24.5	pk
4924	V	33.15	35.1	33.5	5.2	36.8	54	17.2	avg
7386	V	44.32	35.1	37.0	6.5	52.7	74	21.3	pk
7386	V	37.31	35.1	37.0	6.5	45.7	54	8.3	avg
9848	V	45.53	35.6	38.5	7.8	56.2	74	17.8	pk


#### High Channel 2462MHz

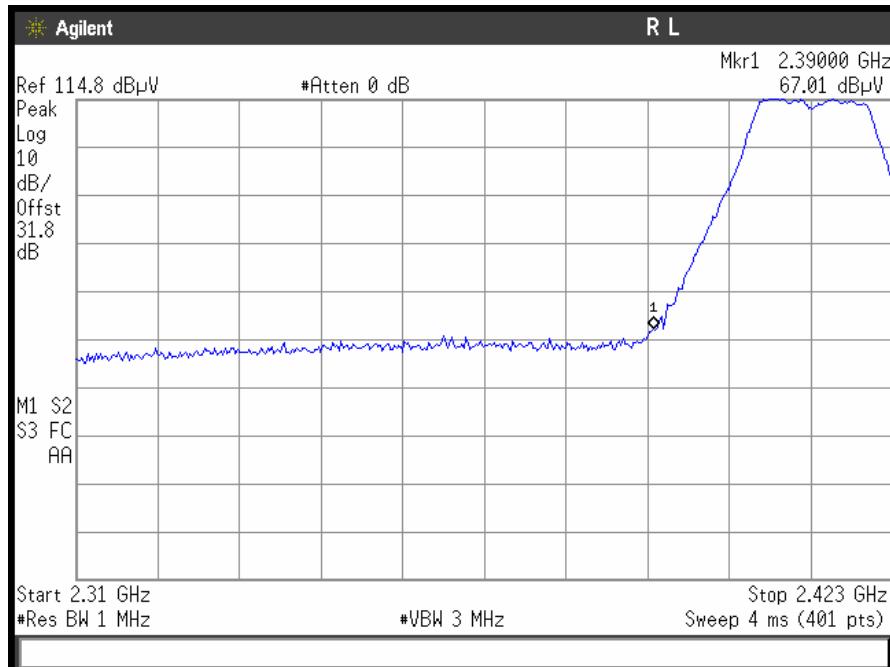


802.11/g radiated restricted band 2310- 2390 MHz Peak

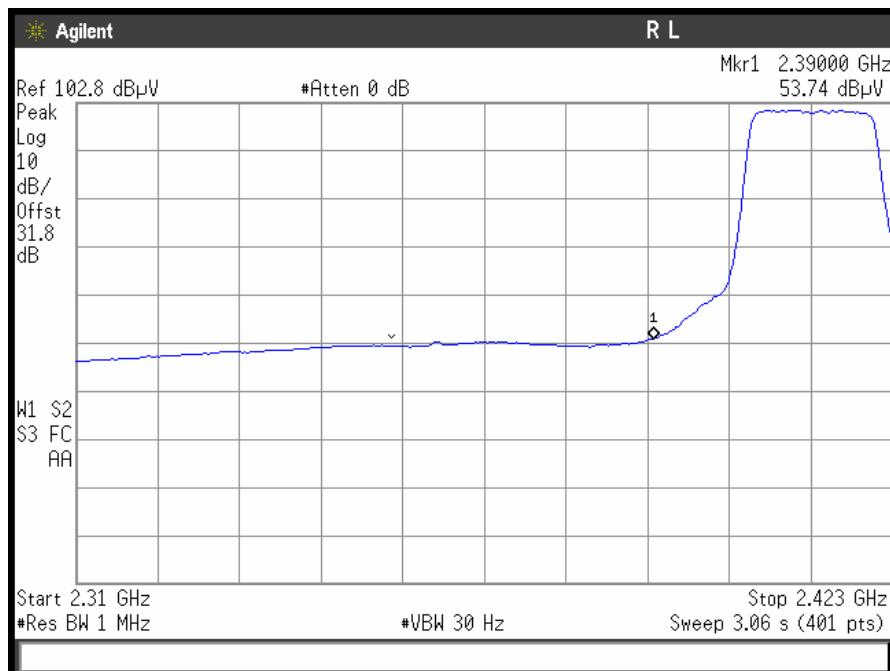

802.11/g radiated restricted band 2310- 2390 MHz Avg

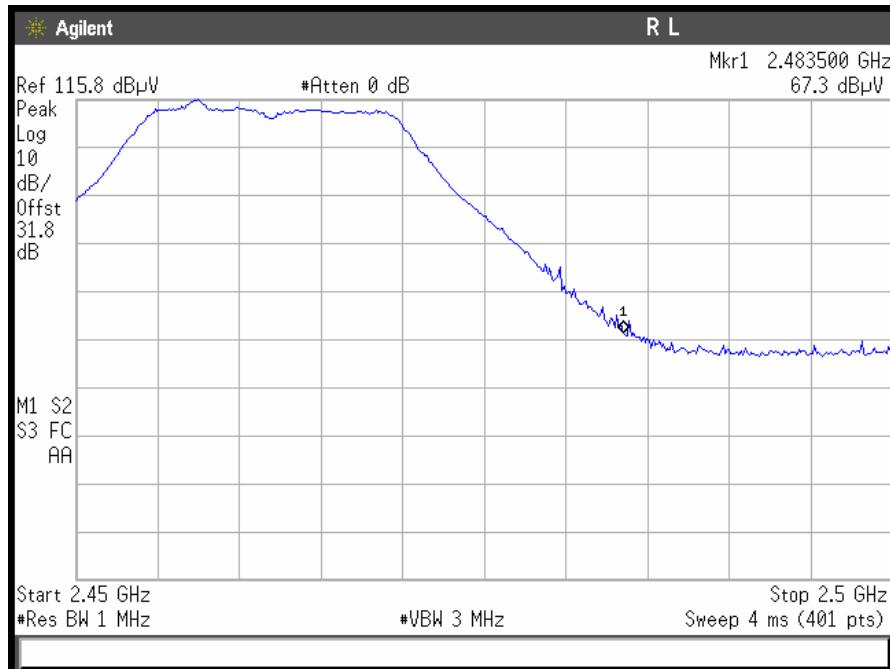

802.11/g radiated restricted band 2483.5 – 2500MHz Peak

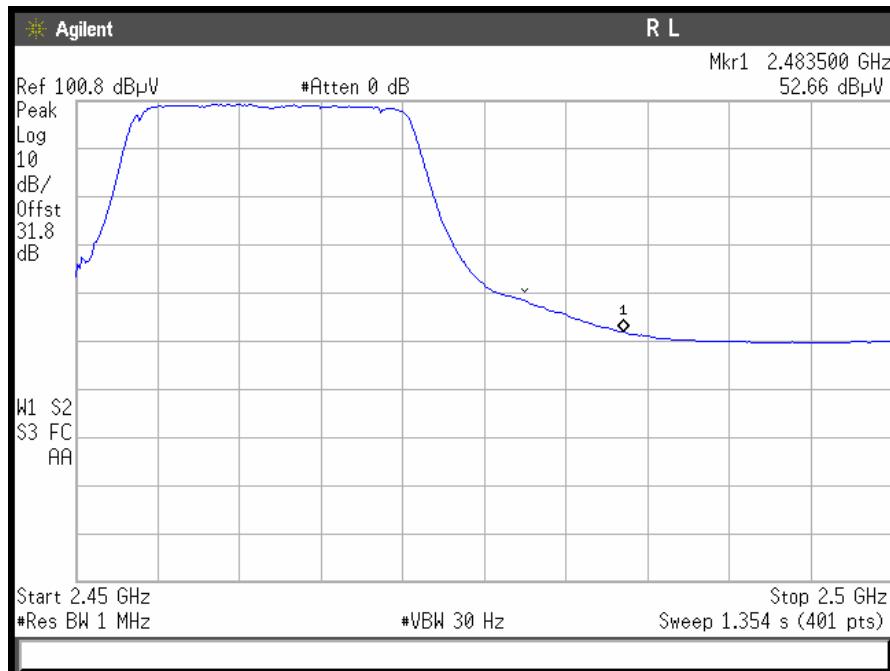

802.11/g radiated restricted band 2483.5 – 2500MHz Avg




Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210


## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Harmonic Emissions Requirements – Radiated (802.11g) – Panel Antenna


Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
4824	V	49.33	35.1	33.5	5.2	52.9	74	21.1	pk
4824	V	37.02	35.1	33.5	5.2	40.6	54	13.4	avg
7236	V	42.57	35.1	37.0	6.5	51.0	74	23	pk
7236	V	33.77	35.1	37.0	6.5	42.2	54	11.8	avg
9648	V	43.61	35.6	38.5	7.8	54.3	74	19.7	pk
<b>Low Channel 2412MHz</b>									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
4874	V	48.34	35.1	33.5	5.2	51.9	74	22.1	pk
4874	V	32.87	35.1	33.5	5.2	36.5	54	17.5	avg
7311	V	41.08	35.1	37.0	6.5	49.5	74	24.5	pk
7311	V	33.33	35.1	37.0	6.5	41.7	54	12.3	avg
9748	V	44.3	35.6	38.5	7.8	55.0	74	19	pk
<b>Mid Channel 2437</b>									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
4924	V	43.41	35.1	33.5	5.2	47.0	74	27	pk
4924	V	34.16	35.1	33.5	5.2	37.8	54	16.2	avg
7386	V	41.65	35.1	37.0	6.5	50.1	74	23.9	pk
7386	V	33.52	35.1	37.0	6.5	41.9	54	12.1	avg
9848	V	41.97	35.6	38.5	7.8	52.7	74	21.3	pk
<b>High Channel 2462MHz</b>									

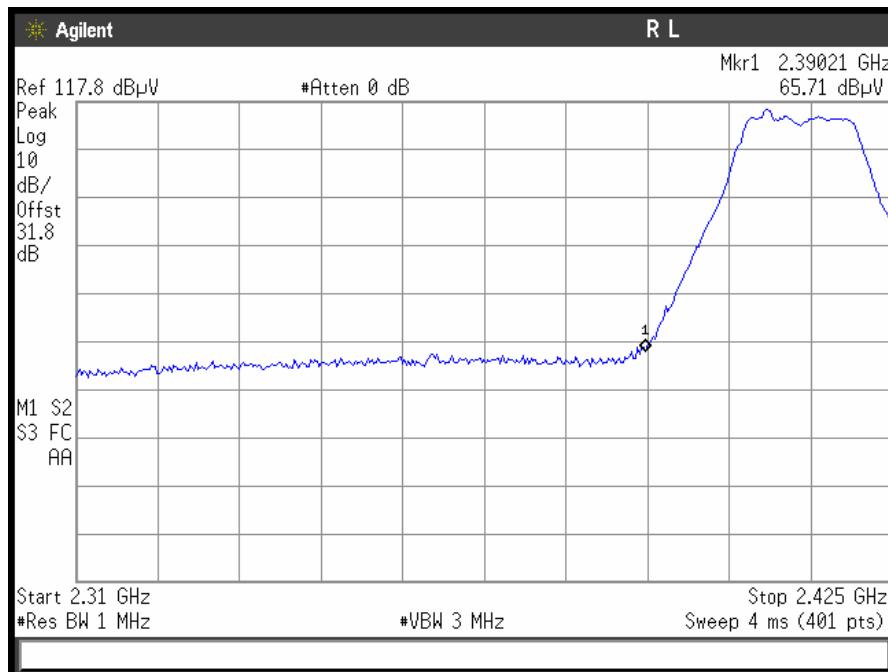


802.11/g radiated restricted band 2310- 2390 MHz Peak

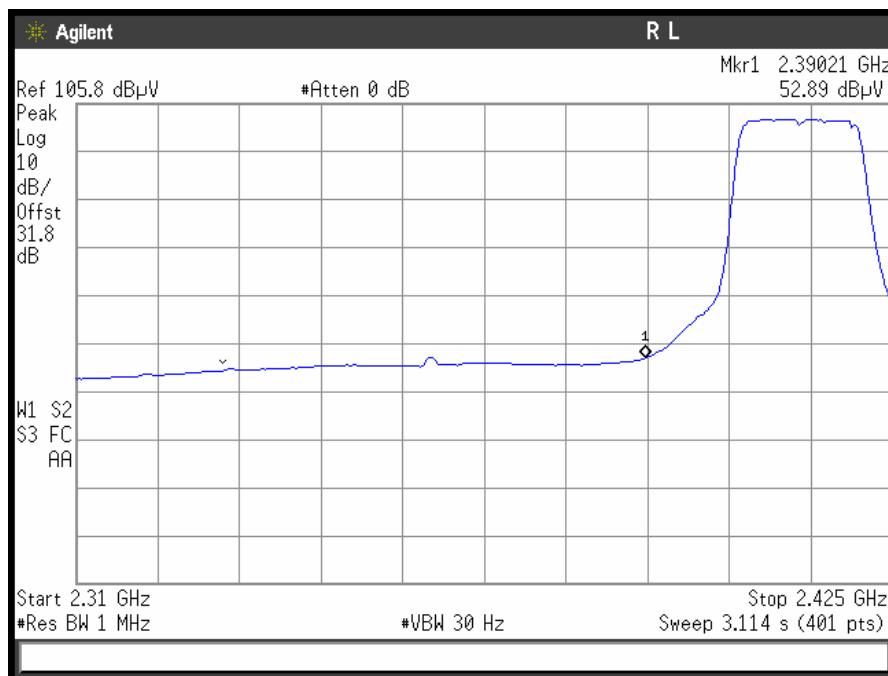

802.11/g radiated restricted band 2310- 2390 MHz Avg

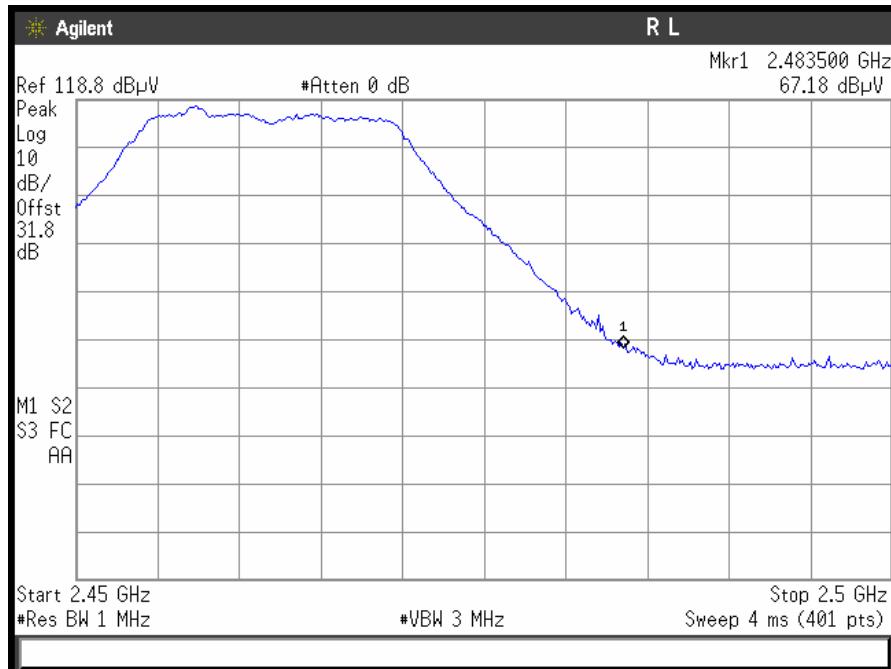

802.11/g radiated restricted band 2483.5 – 2500MHz Peak

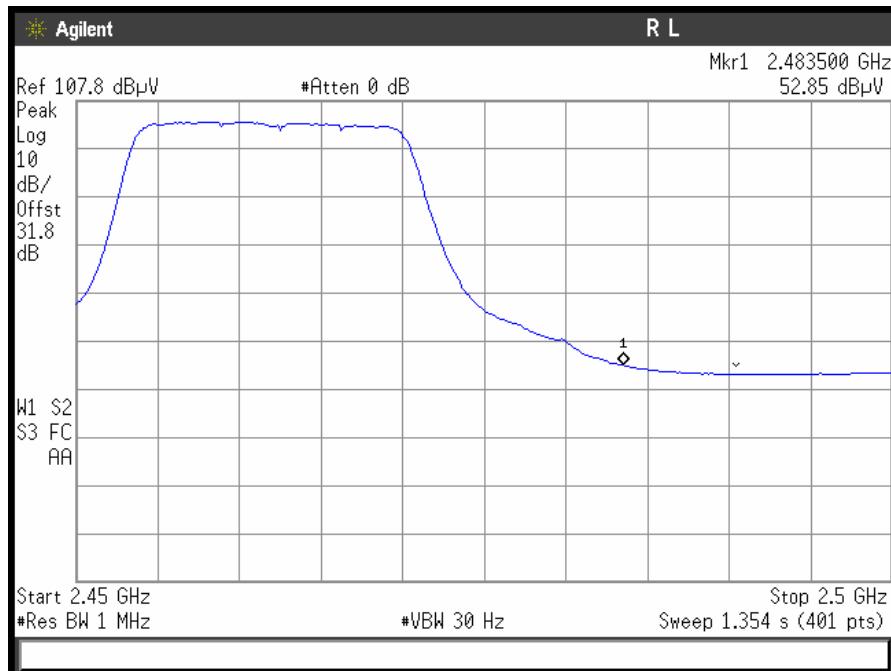

802.11/g radiated restricted band 2483.5 – 2500MHz Avg



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Harmonic Emissions Requirements – Radiated (802.11a) – Integrated Antenna

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
11490	V	44.0	34.7	39.7	9.4	58.4	74	-15.6	pk
11490	V	32.9	34.7	39.7	9.4	47.3	54	-6.7	avg
17235	V	45.0	33.0	44.5	11.8	68.3	74	-5.7	pk
<b>Low Channel 5745MHz</b>									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
11570	V	44.1	34.7	39.7	9.4	58.5	74	-15.6	pk
11570	V	33.0	34.7	39.7	9.4	47.4	54	-6.6	avg
17355	V	44.9	33.0	44.5	11.8	68.2	74	-5.8	pk
<b>Mid Channel 5785MHz</b>									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
11650	V	44.3	34.7	39.7	9.4	58.7	74	-15.3	pk
11650	V	33.2	34.7	39.7	9.4	47.6	54	-6.4	avg
17475	V	44.7	33.0	44.5	11.8	68.0	74	-6.0	pk
<b>High Channel 5825MHz</b>									

Note: All other emissions were measured at the noise floor of the spectrum analyzer



## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Harmonic Emissions Requirements – Radiated (802.11a) – Panel Antenna

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
11490	V	46.2	34.7	39.7	9.4	60.6	74	-13.4	pk
11490	V	32.3	34.7	39.7	9.4	46.7	54	-7.3	avg
17235	V	44.9	33.0	44.5	11.8	68.2	74	-5.8	pk
<b>Low Channel 5745MHz</b>									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
11570	V	45.5	34.7	39.7	9.4	59.9	74	-14.1	pk
11570	V	32.1	34.7	39.7	9.4	46.5	54	-7.5	avg
17355	V	44.5	33.0	44.5	11.8	67.8	74	-6.2	pk
<b>Mid Channel 5785MHz</b>									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
11650	V	44.3	34.7	39.7	9.4	58.7	74	-15.3	pk
11650	V	31.8	34.7	39.7	9.4	46.2	54	-7.8	avg
17475	V	44.0	33.0	44.5	11.8	67.3	74	-6.7	pk
<b>High Channel 5825MHz</b>									

Note: All other emissions were measured at the noise floor of the spectrum analyzer




## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Harmonic Emissions Requirements – Radiated (802.11a) – Sector Antenna

Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
11490	V	45.0	34.7	39.7	9.4	59.4	74	-14.7	pk
11490	V	31.2	34.7	39.7	9.4	55.6	54	-8.4	avg
17235	V	45.8	33.0	44.5	11.8	69.1	74	-5.0	pk
<b>Low Channel 5745MHz</b>									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
11570	V	44.7	34.7	39.7	9.4	59.1	74	-14.9	pk
11570	V	33.2	34.7	39.7	9.4	47.6	54	-6.4	avg
17355	V	44.3	33.0	44.5	11.8	67.6	74	-6.4	pk
<b>Mid Channel 5785MHz</b>									
Frequency (MHz)	Receive Antenna Polarity (H/V)	Uncorrected Field strength (dB $\mu$ V)@ 3m	Preamp (dB)	Antenna Factor (dB)	Cable Loss (dB)	Corrected Field Strength @ 3m (dB $\mu$ V)	Limit @ 3m (dB $\mu$ V)	Margin (dB)	Measurement Type
11650	V	45.0	34.7	39.7	9.4	59.4	74	-14.6	pk
11650	V	33.7	34.7	39.7	9.4	48.1	54	-5.9	avg
17475	V	44.4	33.0	44.5	11.8	67.7	74	-6.3	pk
<b>High Channel 5825MHz</b>									

Note: All other emissions were measured at the noise floor of the spectrum analyzer

## Radiated Harmonics Limits Test Setup

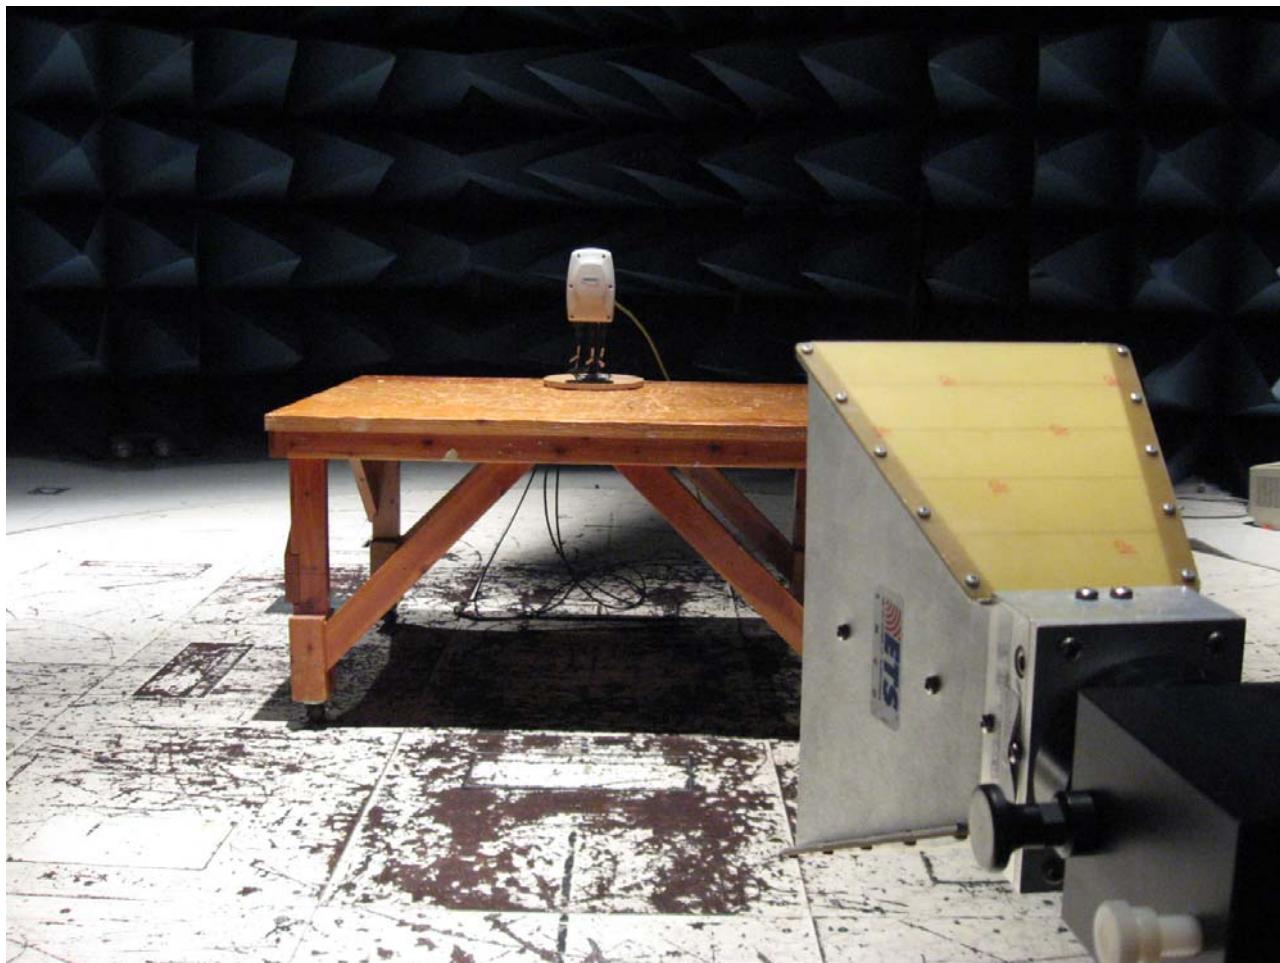

**Photograph 5. Test Equipment and setup for various Radiated Measurements (Integrated Antenna)**



Photograph 6. Test Equipment and setup for various Radiated Measurements (Panel Antenna)



**Photograph 7. Test Equipment and setup for various Radiated Measurements (Sector Antenna)**


## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(d) Spurious Emissions Requirements –RF Conducted

**Test Procedure:** For intentional radiators with a digital device portion which operates below 10 GHz, the spectrum was investigated as per §15.33(a)(1) and §15.33(a)(4); i.e., the lowest RF signal generated or used in the device up to the 10<sup>th</sup> harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

For frequencies 1-18GHz, measurements were made at coupler port of a 20dB directional coupler. The output of the coupler was terminated by a 50Ω load. For frequencies 18-40GHz a HP11970A and HP11970K harmonic mixer was used. Each harmonic mixer was fed with a SMA to wave guide adapter.

**Test Results:** Equipment complies with the Spurious Emissions Requirements – Radiated and RF Conducted limits of **§ 15.247 (c)**. For Radiated Emissions result, refer to section “§15.209: Radiated Emission Limits”. Please refer to original grant for FCC ID: VKHS4X00DCMA82



Block Diagram 2. Spurious Conducted Emissions Test Setup


## Electromagnetic Compatibility Criteria for Intentional Radiators

### § 15.247(e) Peak Power Spectral Density

**Test Requirements:** **§15.247(e):** For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

**Test Procedure:** The transmitter was connected directly to a Spectrum Analyzer through a directional couple. The power was monitored at the coupler port with a Peak Power Meter. The power level was set to the maximum level. The RBW and VBW were set to 3 kHz and a SPAN of 3.0 MHz with a 100 second sweep to the Spectrum Analyzer. Measurements were carried out at the low, mid and high channels.

**Test Results:** Equipment complies with the peak power spectral density limits of § 15.247 (e). Please refer to original grant for FCC ID: VKHS4X00DCMA82



**Block Diagram 3. Peak Power Spectral Density Test Setup**



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Test Equipment  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## IV. Test Equipment



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Test Equipment  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ANSI/NCSL Z540-1-1994 and ANSI/ISO/IEC 17025:2000.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1S2421	EMI RECEIVER	ROHDE&SCHWARZ	ESIB 7	03/27/2007	03/27/2008
1S2184	BILOG ANTENNA	CHASE	CBL6112A	01/03/2007	01/03/2008
1S2121	PRE-AMPLIFIER	HEWLETT PACKARD	8449B	11/28/2006	11/28/2007
1S2198	ANTENNA, HORN	EMCO	3115	08/31/2007	08/31/2008
1S2202	ANTENNA, HORN, 1 METER	EMCO	3116	04/10/2007	04/10/2010
N/A	HIGH PASS FILTER	MICRO-TRONICS	HPM13146	SEE NOTE	
1S2263	CHAMBER, 10 METER	RANTEC	N2-14	09/24/2007	09/24/2008
1S2041	COUPLER, BI DIRECTIONALCOAXIAL	NARDA	N/A	SEE NOTE	
1S2460	Analyzer, Spectrum 9 kHz-40GHz	Agilent	E4407B	07/06/2005	07/06/2008
1S2430	WIDEBAND POWER METER	ANRITSU COMPANY	ML2488A	03/12/2007	03/12/2008
1S2432	WIDEBAND POWER SENSOR	ANRITSU COMPANY	MA2491A	03/12/2007	03/12/2008
1S2034	COUPLER, DIRECTIONAL 1-20 GHz	KRYTAR	101020020	SEE NOTE	
1S2041	COUPLER, BI DIRECTIONALCOAXIAL	NARDA	N/A	SEE NOTE	
1S2128	Harmonic Mixer	Hewlett Packard	11970A	10/26/2006	10/26/2008
1S2129	Harmonic Mixer	Hewlett Packard	11970K	10/26/2006	10/26/2008

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
Certification & User Manual Information  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## V. Certification & User's Manual Information



## Certification & User's Manual Information

### A. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### § 2.801 Radio-frequency device defined.

As used in this part, a radio-frequency device is any device which in its operation is capable of emitting radio-frequency energy by radiation, conduction, or other means. Radio-frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### § 2.803 Marketing of radio frequency devices prior to equipment authorization.

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.



(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a proviso that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.



## Certification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart J — Equipment Authorization Procedures:

### § 2.901 Basis and Purpose

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant.

### § 2.907 Certification.

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.



## Certification & User's Manual Information

### § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.



## Certification & User's Manual Information

### Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

#### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

#### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



## Verification & User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class A digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at own expense.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



## ICES-003 Procedural & Labeling Requirements

From the Industry Canada Electromagnetic Compatibility Advisory Bulletin entitled, "Implementation and Interpretation of the Interference-Causing Equipment Standard for Digital Apparatus, ICES-003" (EMCAB-3, Issue 2, July 1995):

"At present, CISPR 22: 2002 and ICES technical requirements are essentially equivalent. Therefore, if you have CISPR 22: 2002 approval by meeting CISPR Publication 22, the only additional requirements are: to attach a note to the report of the test results for compliance, indicating that these results are deemed satisfactory evidence of compliance with ICES-003 of the Canadian Interference-Causing Equipment Regulations; to maintain these records on file for the requisite five year period; and to provide the device with a notice of compliance in accordance with ICES-003."

### Procedural Requirements:

According to Industry Canada's Interference Causing Equipment Standard for Digital Apparatus ICES-003 Issue 4, February 2004:

Section 6.1: A record of the measurements and results, showing the date that the measurements were completed, shall be retained by the manufacturer or importer for a period of at least five years from the date shown in the record and made available for examination on the request of the Minister.

Section 6.2: A written notice indicating compliance must accompany each unit of digital apparatus to the end user. The notice shall be in the form of a label that is affixed to the apparatus. Where because of insufficient space or other constraints it is not feasible to affix a label to the apparatus, the notice may be in the form of a statement in the user's manual.

### Labeling Requirements:

The suggested text for the notice, in English and in French, is provided below, from the Annex of ICES-003:

This Class [<sup>2</sup>] digital apparatus complies with Canadian ICES-003.

Cet appareil numérique de la classe [<sup>1</sup>] est conforme à la norme NMB-003 du Canada.

<sup>2</sup> Insert either A or B but not both as appropriate for the equipment requirements.



Verint Systems Canada Inc.  
S4100, S4200 and S4300 Wireless Devices Family

Electromagnetic Compatibility  
End of Report  
CFR Title 47, Part 15, Subpart B & C; ICES-003 & RSS-210

## End of Report