

### global solutions : local support™

#### 4900-5875 MHz direct mount 8 dBi vertically polarized omni

The wide band S4906WB is one in a series of omni antennas that have been optimized for direct chassis mount to outdoor radios or NEMA enclosures. These antennas come standard with an integrated N male connector directly mounted to the base of the antenna. The rugged directly mounted connector is perfect for outdoor MESH applications that often require the antenna to be directly mounted to the radio or enclosure. The antenna is enclosed in a UV stable, water resistant housing and the antenna will provide years of trouble free service. Applications include any 802.11a indoor or outdoor omni-directional coverage. The antenna series includes antennas of various gains all with integrated N male connector. There is a mast mount hardware kit available for applications that require the antenna to be remotely mounted from the radio enclosure.

#### Features and Benefits:

- Vertically polarized omni-directional
- Rugged, lightweight and water resistant
- 4900-5874 MHz, full 802.11a wide band performance
- Integrated type N male connector facilitates direct to radio mounting

#### Applications:

- 5 GHz Broad band wireless LAN
- College campus
- Airports, hospitals
- Ideal for direct chassis mount for radios or NEMA enclosures in MESH applications


#### For sales information:

Telephone 800-258-3860  
E-Mail [comsales@cushcraft.com](mailto:comsales@cushcraft.com)


or visit: [www.cushcraft.com](http://www.cushcraft.com)

Parameter	Specification
Antenna Part Number	S4906WB
Frequency Range	4900 - 5875 MHz
Gain	8 dBi
Maximum VSWR	2.0:1
3 dB Beamwidth – Elevation	16 °
3 dB Beamwidth – Azimuth	Omnidirectional
Polarization	Vertical Linear
Maximum Input Power	10 watts
Input Impedance	50 Ohm
Mechanical Size	11.5" x 1.0"
Weight	0.37 lbs
Wind Survival Rating	Operational 100mph / Survival 136mph
Antenna Connection	Type N male
Radome	White UV Polycarbonate
Mount Style	Direct mount
Temperature	Operational -30 °C to +65 °C Storage -40 °C to +80 °C

All specifications subject to change without notice

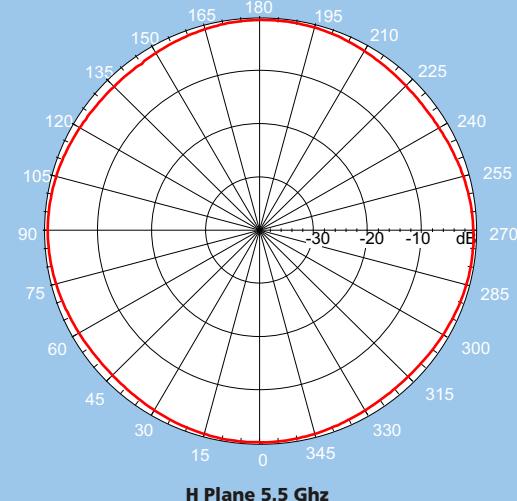

H Plane 5.5 Ghz

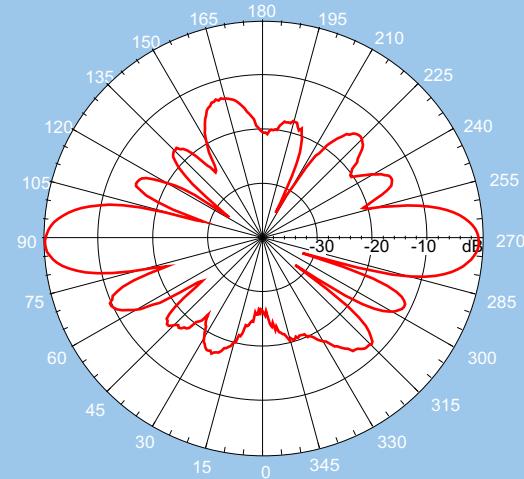

E Plane 5.5 GHz



ISO 9001-2000

Any information furnished by Laird Technologies and its agents is believed to be accurate and reliable. Responsibility for the use and application of Laird Technologies materials rests with the end user since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability, or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies domestic terms and conditions of sale in effect from time to time, a copy of which will be furnished upon request.

global solutions :  
local support™