


OPERATION ILLUSTRATE

1. Fully extend the antenna of the controller.
2. Turn on the power switch of the controller and car.
3. Operate the car by the two control sticks of the controller.



MADE IN CHINA

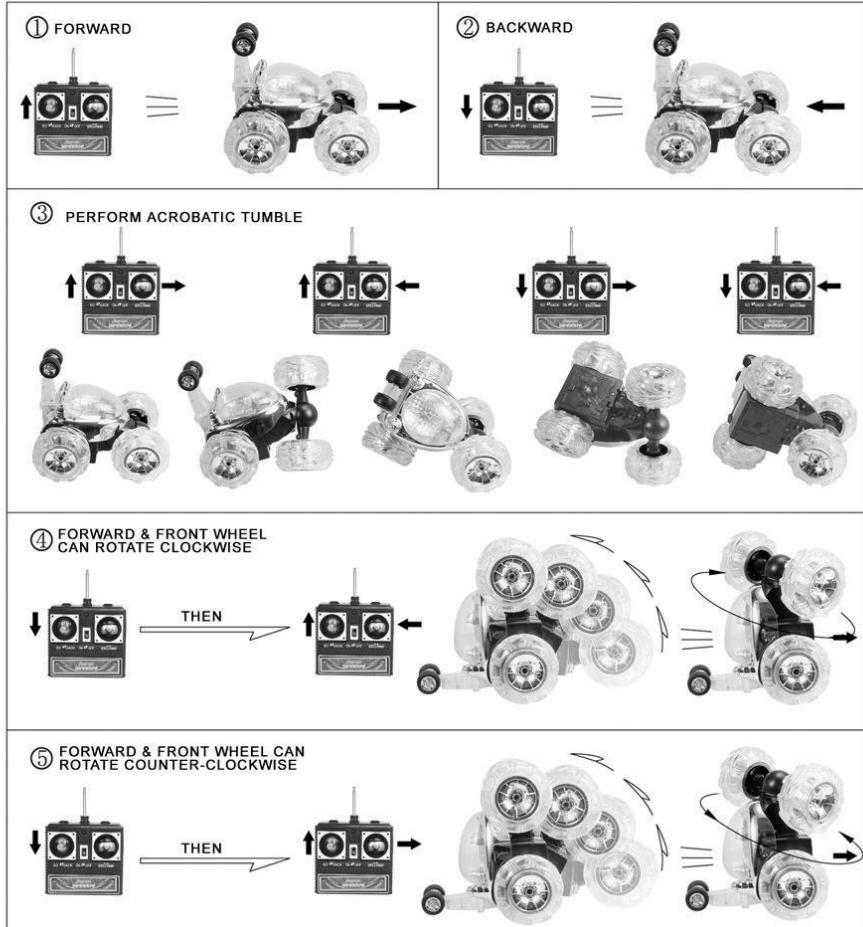

CERTIFICATION

Product name: remote control car
 Model No:9028
 Main material: plastic, electronic components
 Applicable age: 5 years old and above
 Operation: Please see the operation illustrate on the left
 Implementing standards: GB 6675-2003 GB 19865-2006 GB 5296.5
 Maintenance: This product contains electronic components, do not play under water or damp environment. Wipe off the dust by piece of dry and soft cloth.



O 000010

BATTERY USAGE REGULATION

- 1.1 x 9 V battery for the controller. one set of 4.8V Ni-cd battery or 4V lead-acid battery for the CAR.
2. Pay attention to the correct polarity direction when install or replace the battery.
3. Recharge for the rechargeable battery should be done under the supervision of adult.
4. Non-rechargeable battery can not be recharged.
5. Take out the rechargeable battery from the article before charging.
6. Do not mix the new and old batteries or different types of batteries.
7. Take off the spent battery from the article.
8. The supply terminals are not be short circuited.

WARNING:

CHOKING HAZARD-Small parts. Not for children under 5 years old. Please play under the supervision of adult. This article contains electronic components. Please do not play under water or damp environment. Please do not break off the antenna in case of any injury.

Changes or modifications not expressly approved by the party responsible for compliance could void the use's authority to operate the equipment.

THE FIRST BATTERY DEVICES:



Attention

1. If the speed of the car gets slowly, and can not stand up with rotation, that means it is not enough power and the battery should be recharged.
2. Must turn off the power switch of the car and controller while stop use. Otherwise, the power of the battery will use up soon.

Battery of Controller install method



Charging:

1. Insert the charger to a 220/110V AC power outlet, indoor.
2. Insert the output plug of the charger into the socket of the rechargeable battery.
3. Batteries contain heavy metals lead, sulfuric acid, do not be demolished.
4. 4.8V Ni-cd battery recharge time is about 6-9 hours.
5. If the battery were not use for a long time, it should be recharge at least one time per six months.
6. For the first time charge for the battery, the charge time should be 7 hours or above 7 hours.

THE SECOND BATTERY DEVICES:

