

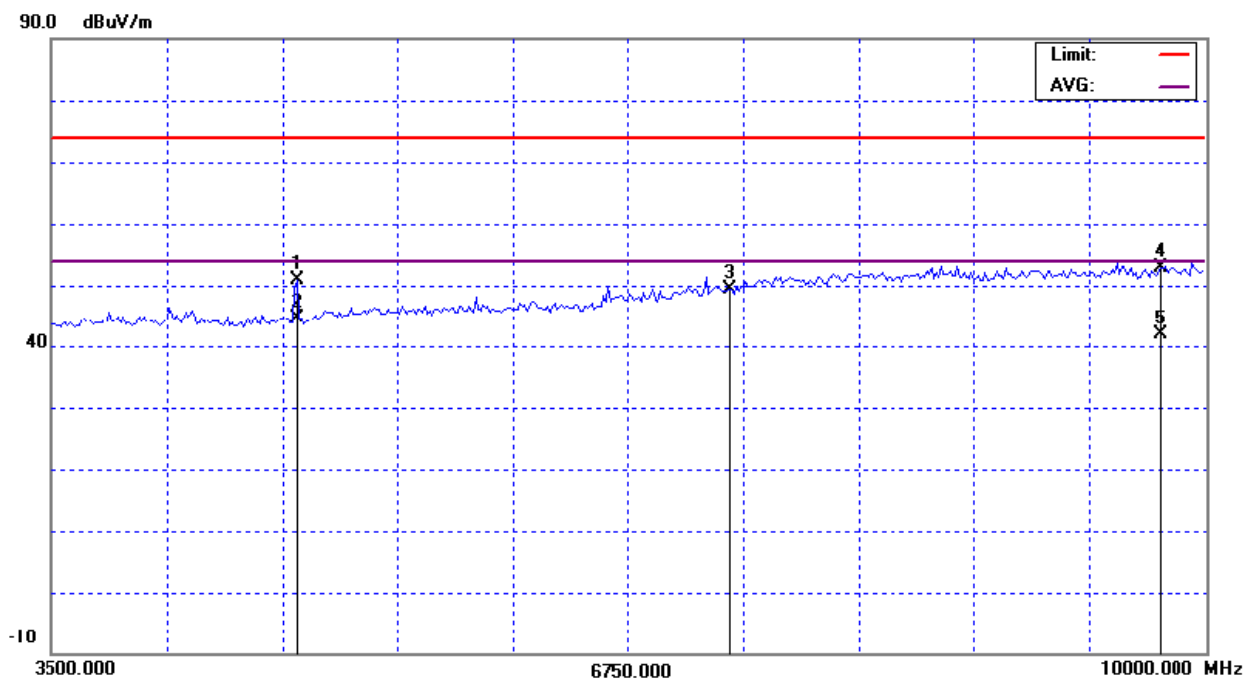


Orthogonal Axes : X
802.11b/CH06(Above 1000 MHz, Vertical)

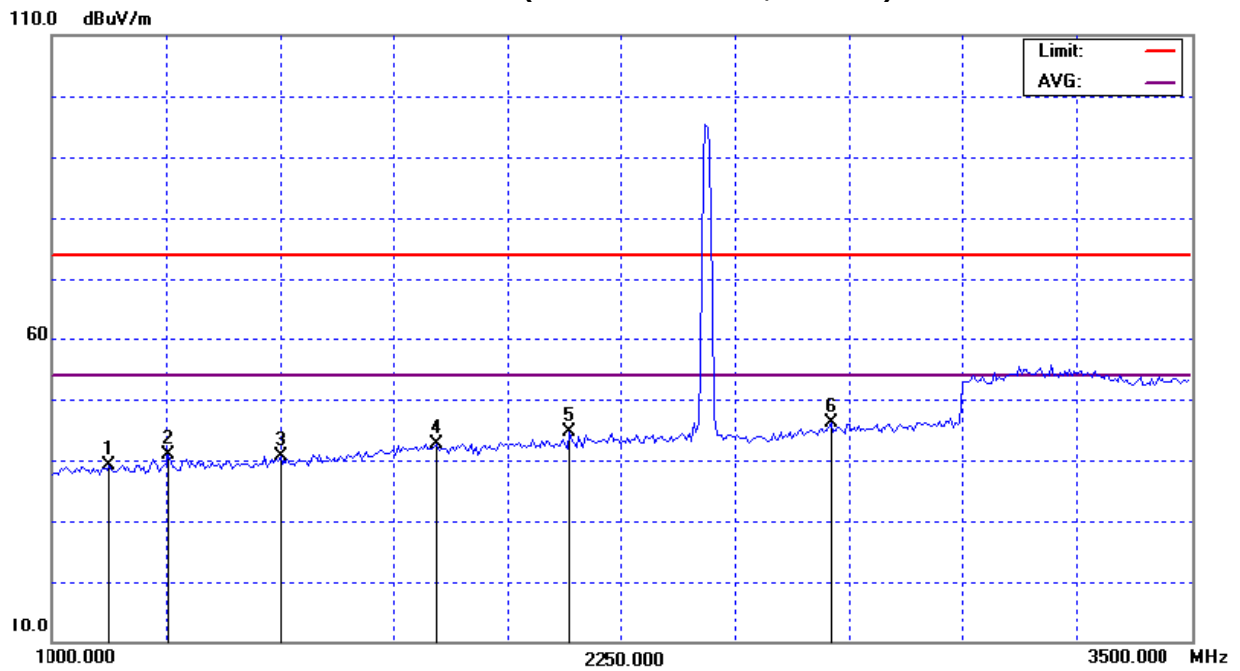

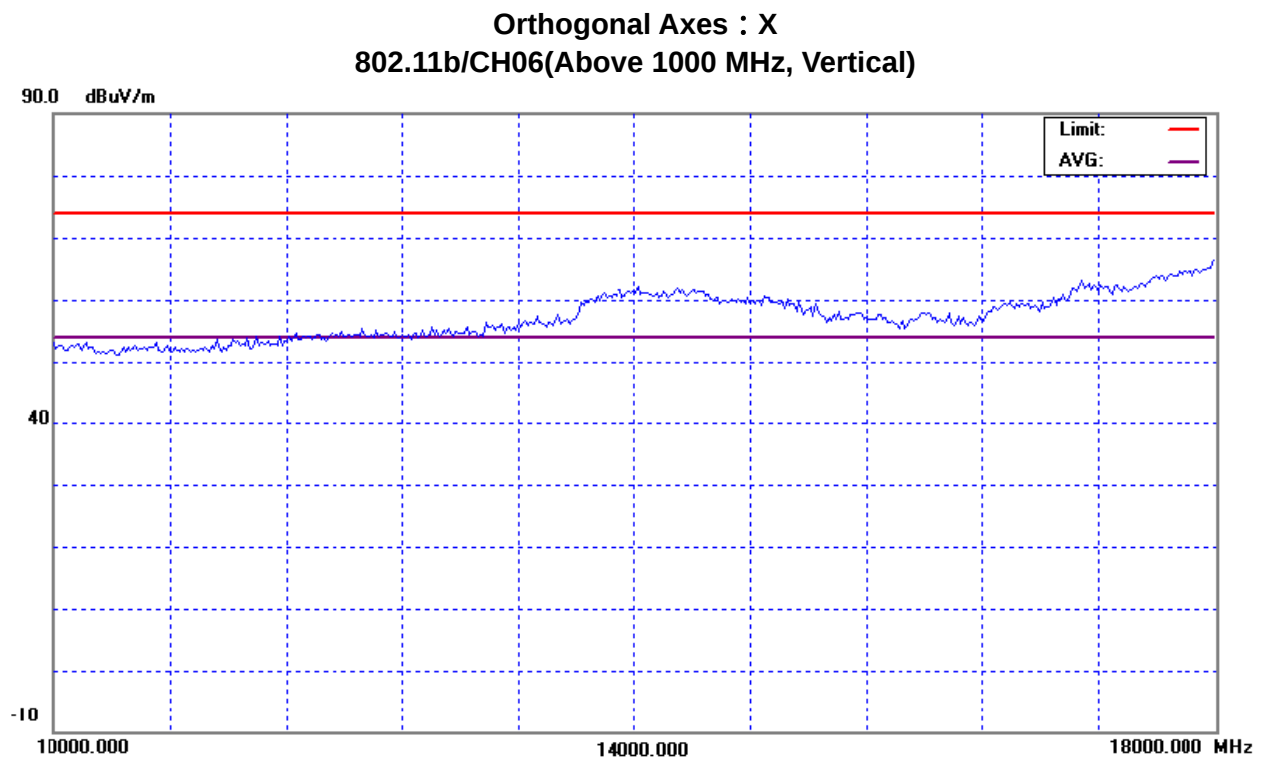



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH06		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1030.00	H	49.34	*	-8.90	40.44	*	74.00	54.00	X/H
1385.00	H	47.91	*	-7.28	40.63	*	74.00	54.00	X/H
1760.00	H	47.39	*	-5.31	42.08	*	74.00	54.00	X/H
1815.00	H	47.79	*	-5.01	42.78	*	74.00	54.00	X/H
2115.00	H	47.09	*	-3.69	43.40	*	74.00	54.00	X/H
2845.00	H	48.35	*	-1.35	47.00	*	74.00	54.00	X/H
4878.00	H	45.33	40.27	3.25	48.58	43.52	74.00	54.00	X/H
7311.00	H	42.89	*	7.80	50.69	*	74.00	54.00	X/H
9748.00	H	41.39	*	10.05	51.44	*	74.00	54.00	X/H


Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : X
802.11b/CH06(Above 1000 MHz, Horizontal)

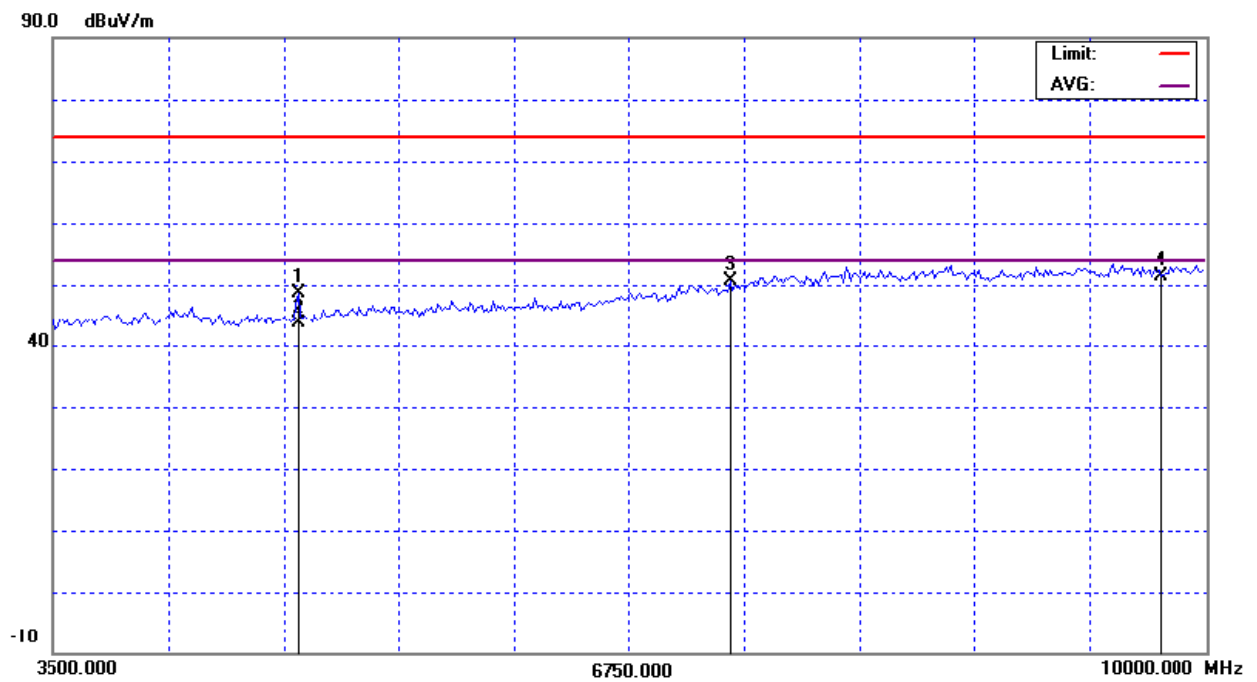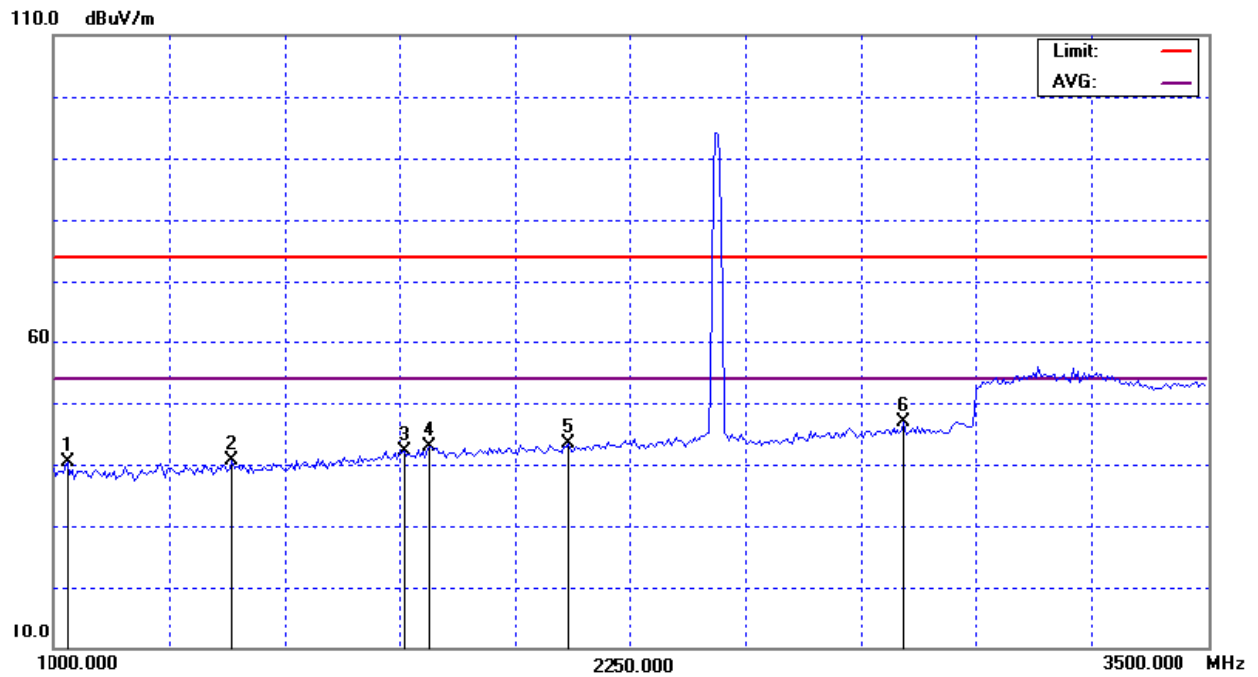

Orthogonal Axes : X
802.11b/CH06(Above 1000 MHz, Horizontal)

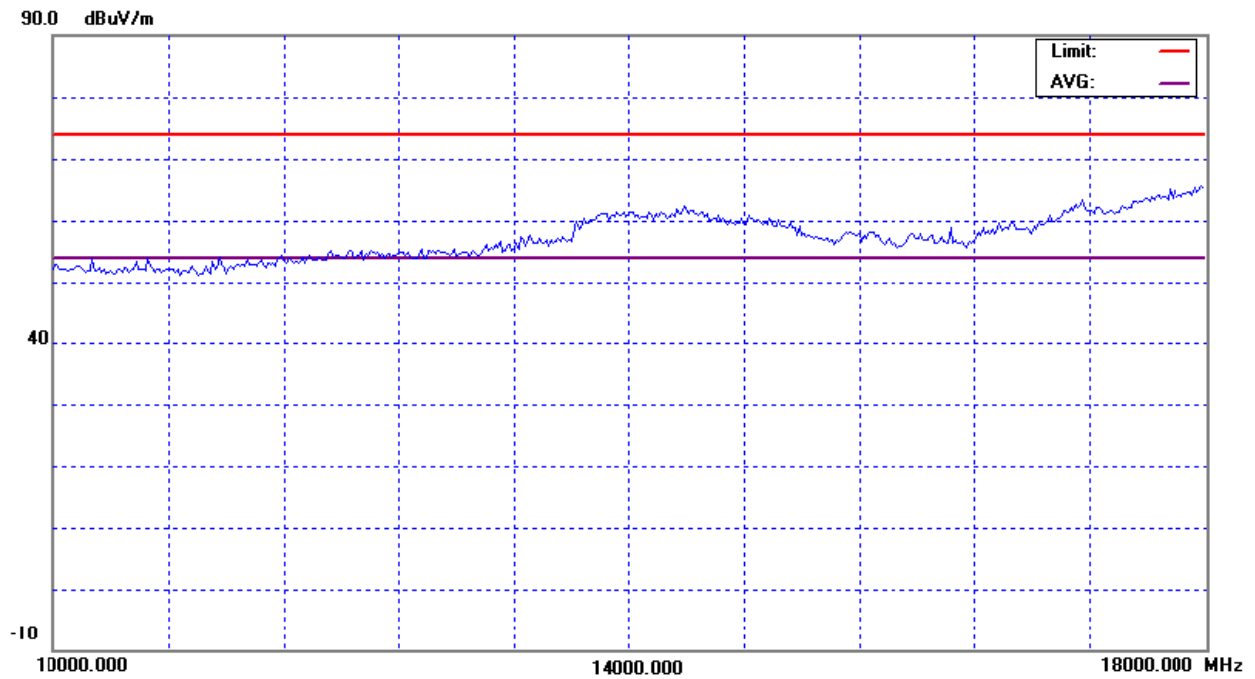



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH06		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1090.00	V	48.64	*	-8.63	40.01	*	74.00	54.00	Y/H
1355.00	V	47.68	*	-7.42	40.26	*	74.00	54.00	Y/H
1510.00	V	48.07	*	-6.70	41.37	*	74.00	54.00	Y/H
1985.00	V	47.25	*	-4.06	43.19	*	74.00	54.00	Y/H
2250.00	V	47.63	*	-3.35	44.28	*	74.00	54.00	Y/H
2765.00	V	47.99	*	-1.67	46.32	*	74.00	54.00	Y/H
4878.00	V	46.09	40.85	3.25	49.34	44.10	74.00	54.00	Y/H
7311.00	V	41.80	*	7.80	49.60	*	74.00	54.00	Y/H
9748.00	V	42.30	30.14	10.05	52.35	40.19	74.00	54.00	Y/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Y
802.11b/CH06(Above 1000 MHz, Vertical)

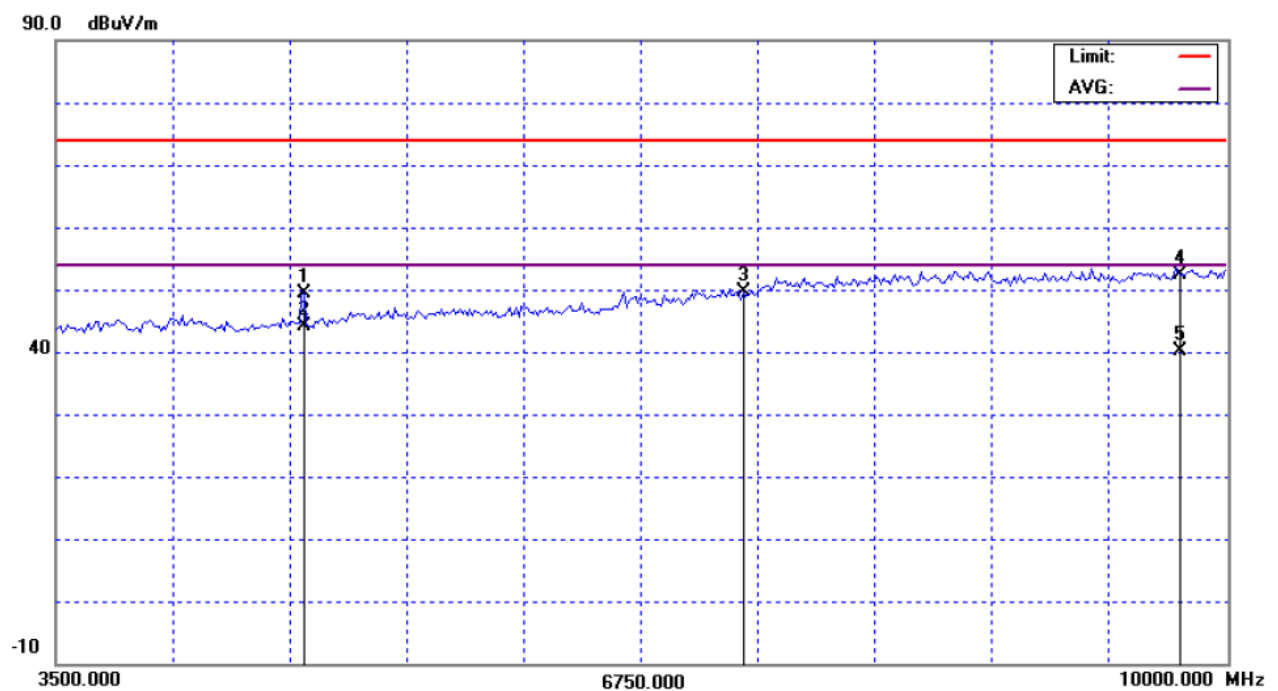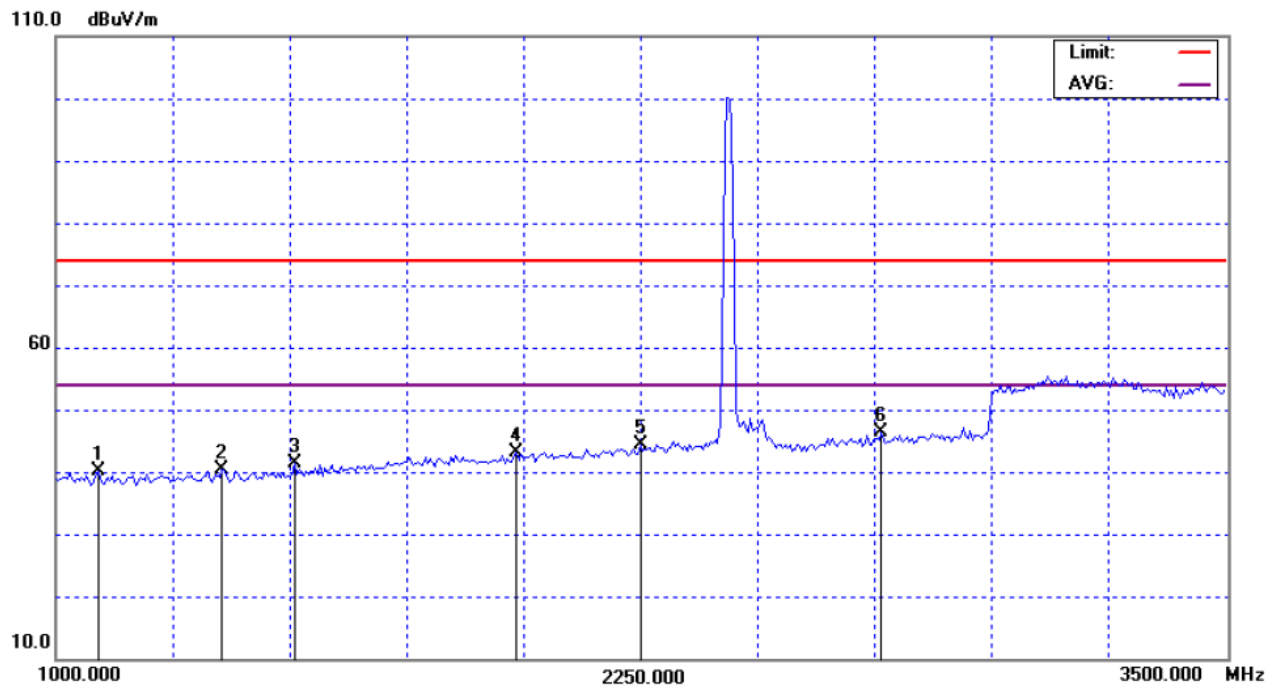

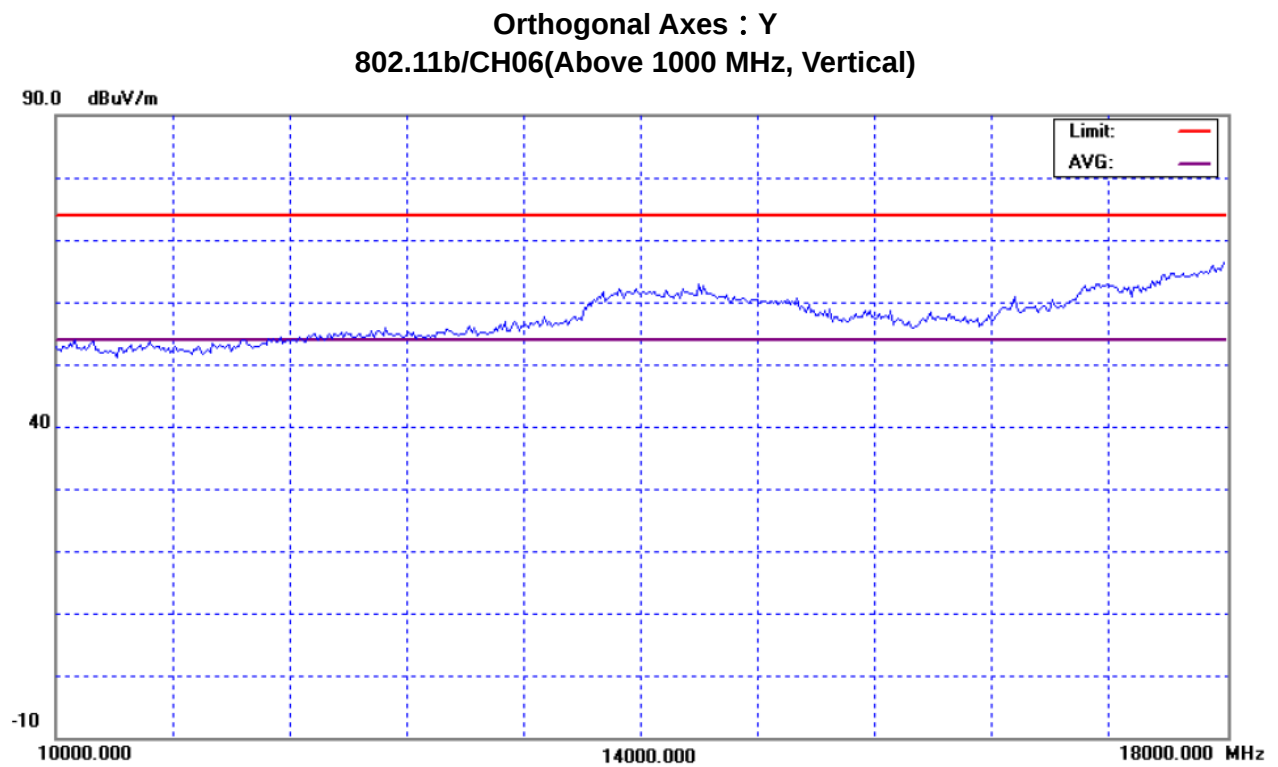



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH06		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1230.00	H	47.47	*	-7.99	39.48	*	74.00	54.00	Y/H
1475.00	H	47.58	*	-6.87	40.71	*	74.00	54.00	Y/H
1880.00	H	47.48	*	-4.65	42.83	*	74.00	54.00	Y/H
2150.00	H	47.42	*	-3.60	43.82	*	74.00	54.00	Y/H
2610.00	H	48.06	*	-2.28	45.78	*	74.00	54.00	Y/H
2840.00	H	47.22	*	-1.37	45.85	*	74.00	54.00	Y/H
4865.00	H	53.65	48.35	3.22	56.87	51.57	74.00	54.00	Y/H
7311.00	H	41.70	*	7.80	49.50	*	74.00	54.00	Y/H
9748.00	H	42.70	29.79	10.05	52.75	39.84	74.00	54.00	Y/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Y
802.11b/CH06(Above 1000 MHz, Horizontal)

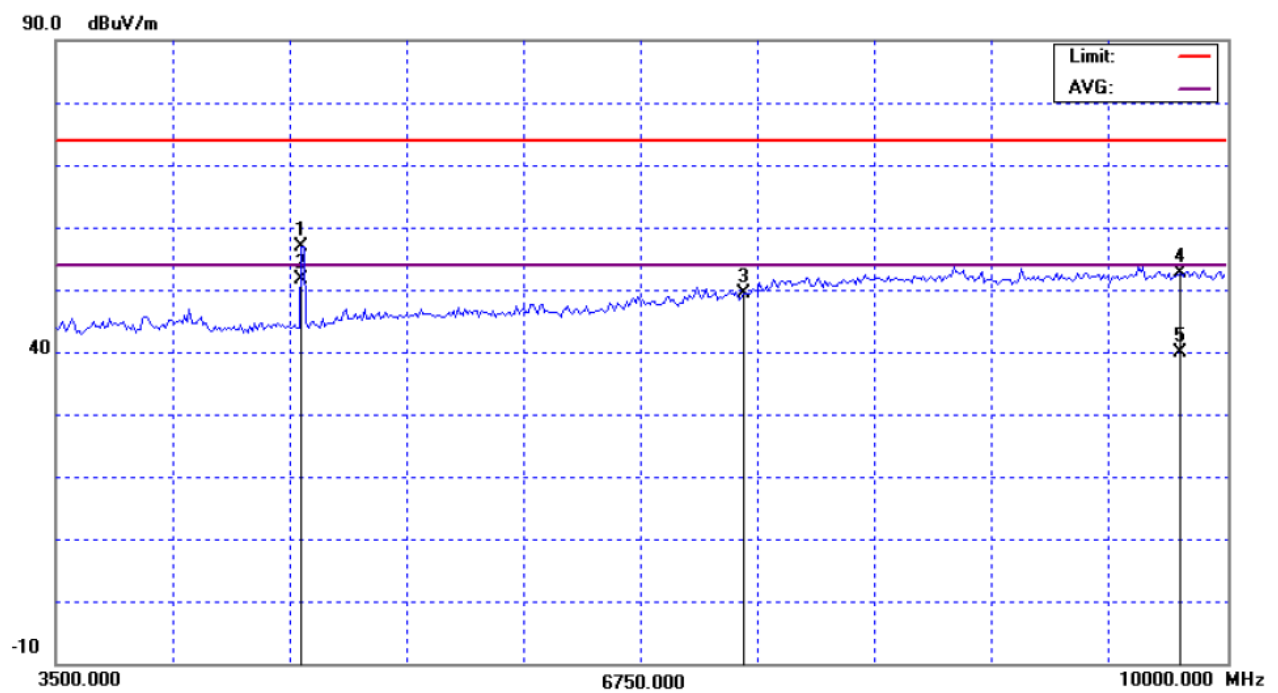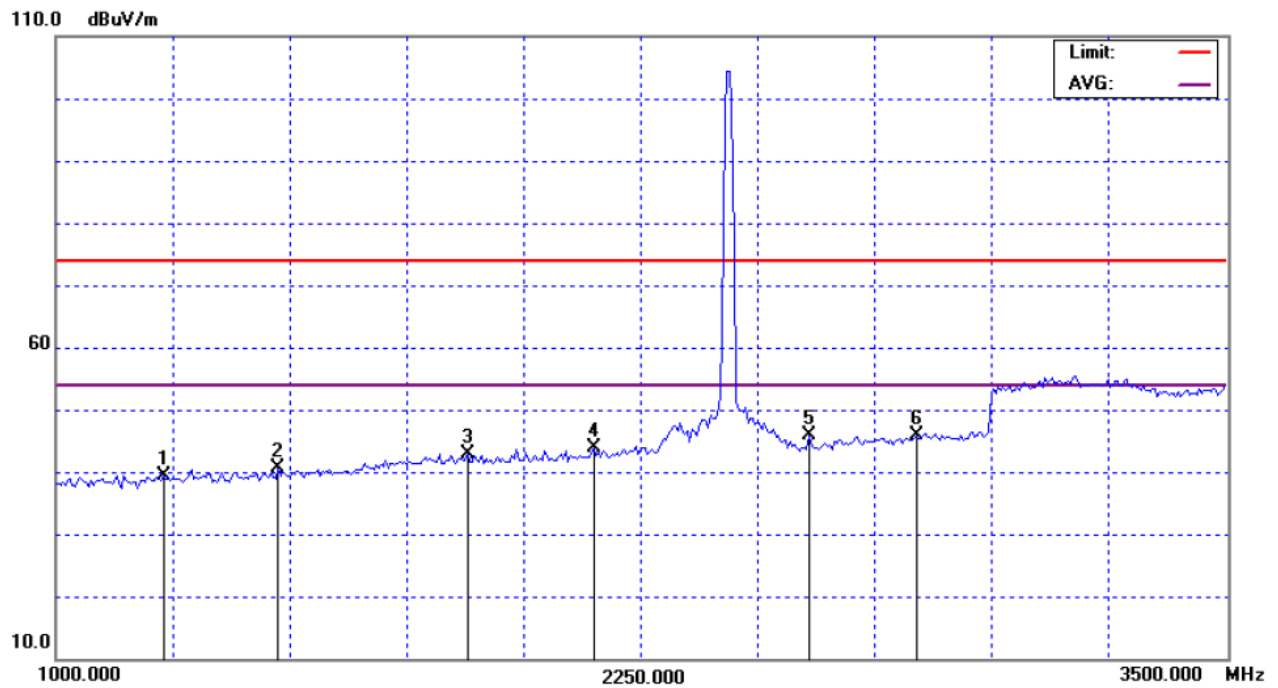

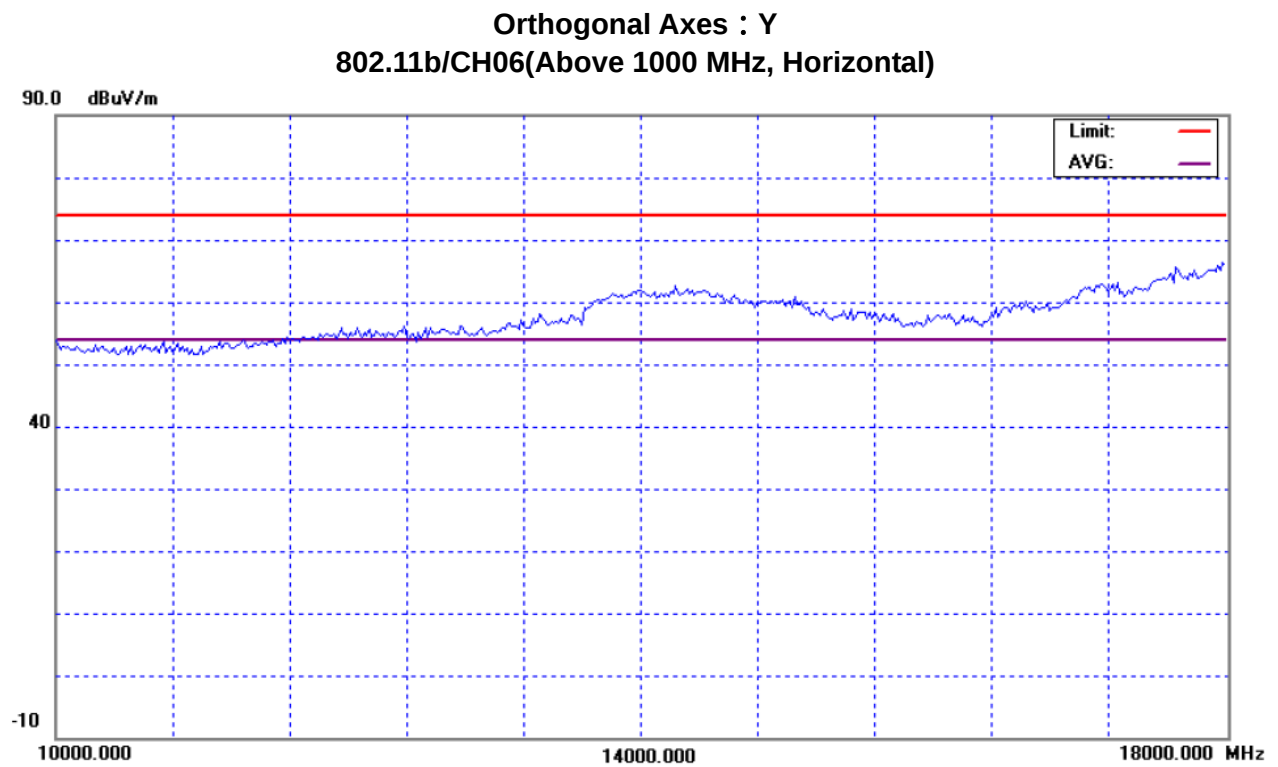



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH06		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1090.00	V	48.13	*	-8.63	39.50	*	74.00	54.00	Z/H
1325.00	V	48.22	*	-7.56	40.66	*	74.00	54.00	Z/H
1525.00	V	47.62	*	-6.62	41.00	*	74.00	54.00	Z/H
2035.00	V	47.35	*	-3.89	43.46	*	74.00	54.00	Z/H
2185.00	V	48.00	*	-3.51	44.49	*	74.00	54.00	Z/H
2910.00	V	48.10	*	-1.10	47.00	*	74.00	54.00	Z/H
4878.00	V	47.53	41.37	3.25	50.78	44.62	74.00	54.00	Z/H
7311.00	V	41.05	*	7.80	48.85	*	74.00	54.00	Z/H
9748.00	V	42.25	29.76	10.05	52.30	39.81	74.00	54.00	Z/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Z
802.11b/CH06(Above 1000 MHz, Vertical)

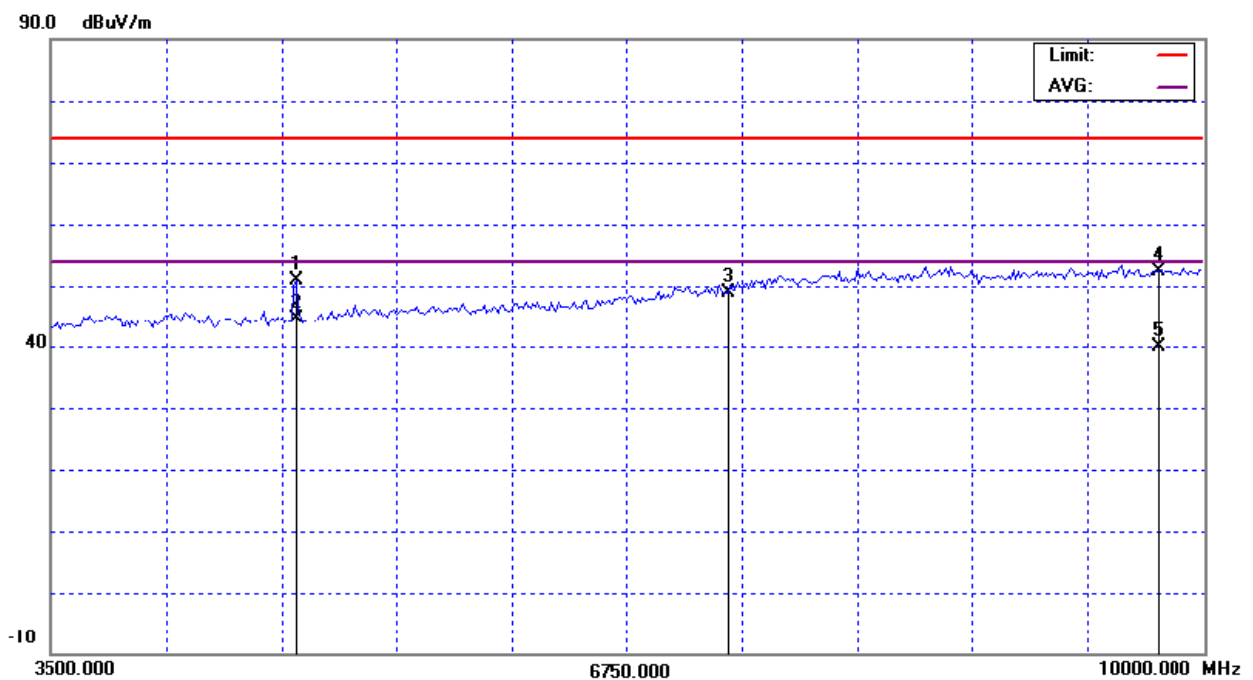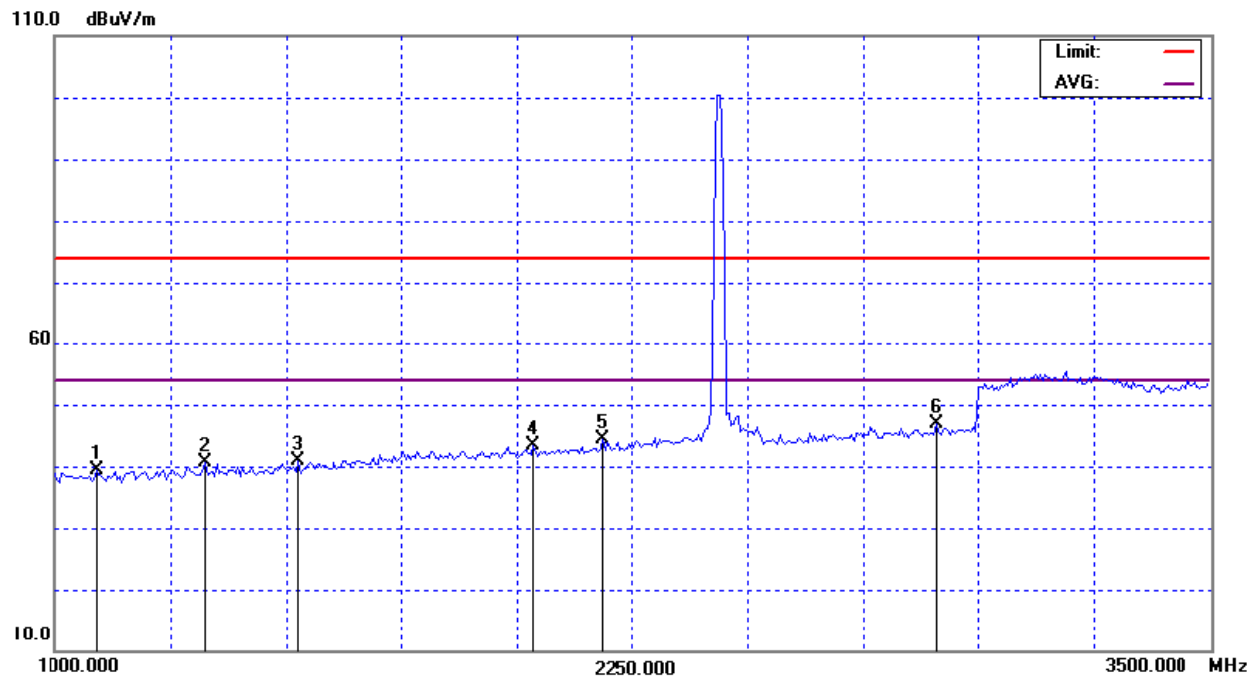

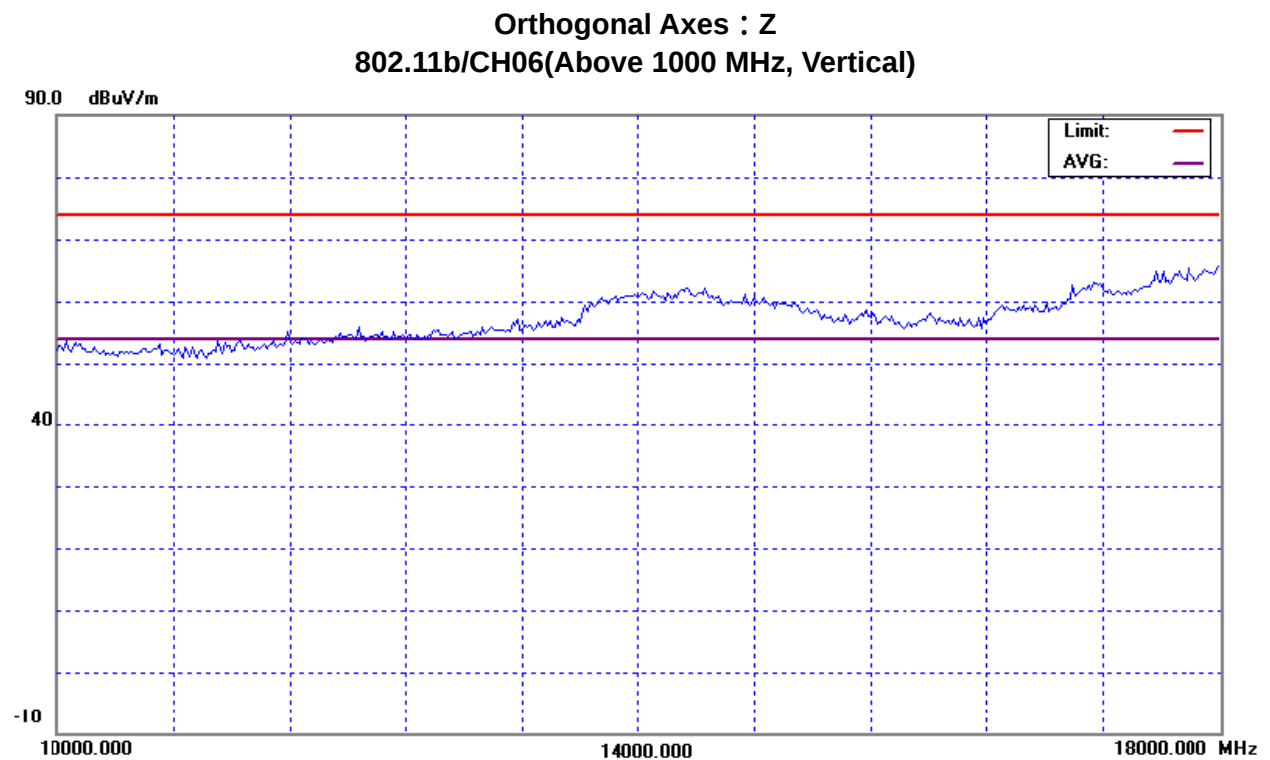



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH06		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1030.00	H	48.43	*	-8.90	39.53	*	74.00	54.00	Z/H
1320.00	H	48.38	*	-7.58	40.80	*	74.00	54.00	Z/H
1530.00	H	47.65	*	-6.59	41.06	*	74.00	54.00	Z/H
1775.00	H	48.38	*	-5.23	43.15	*	74.00	54.00	Z/H
2060.00	H	47.31	*	-3.83	43.48	*	74.00	54.00	Z/H
2810.00	H	47.70	*	-1.49	46.21	*	74.00	54.00	Z/H
4878.00	H	45.94	40.20	3.25	49.19	43.45	74.00	54.00	Z/H
7311.00	H	42.10	*	7.80	49.90	*	74.00	54.00	Z/H
9748.00	H	41.48	*	10.05	51.53	*	74.00	54.00	Z/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Z
802.11b/CH06(Above 1000 MHz, Horizontal)

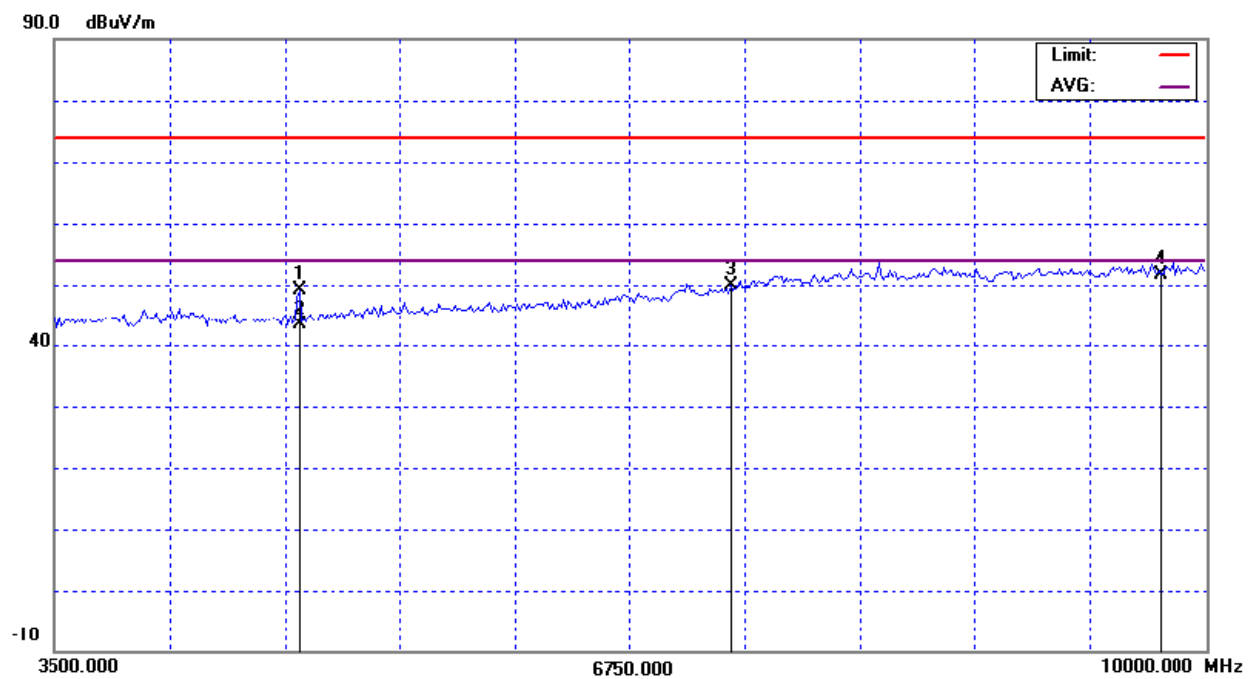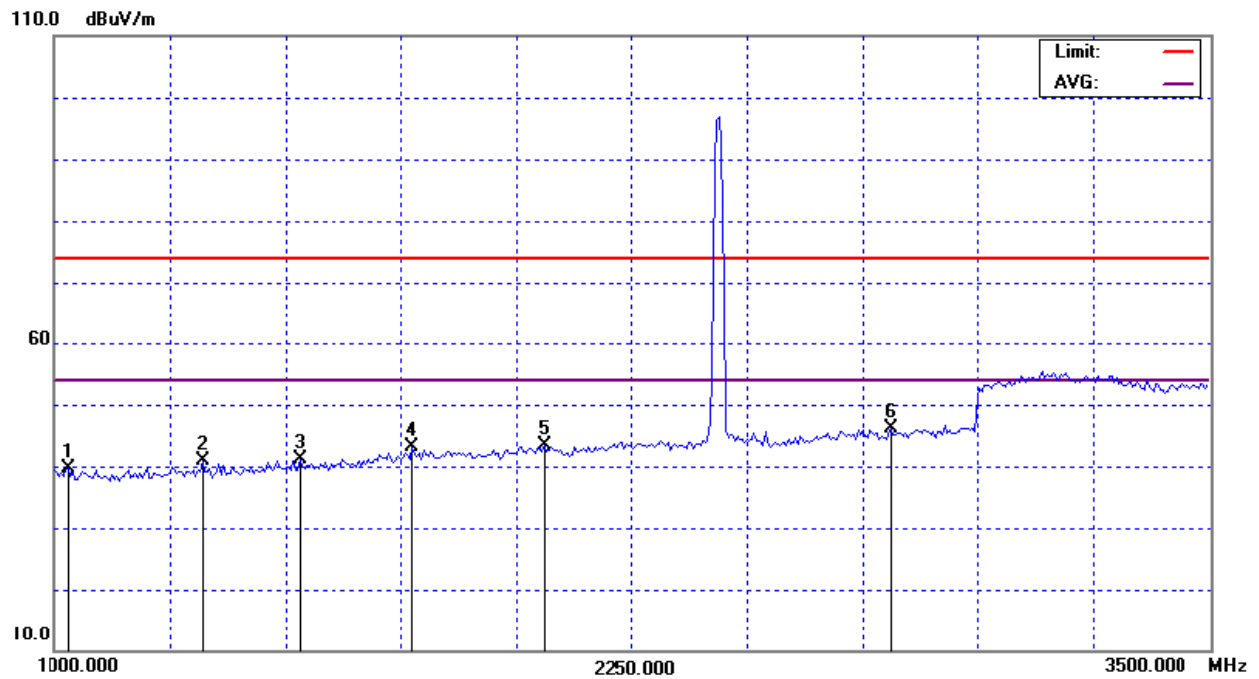

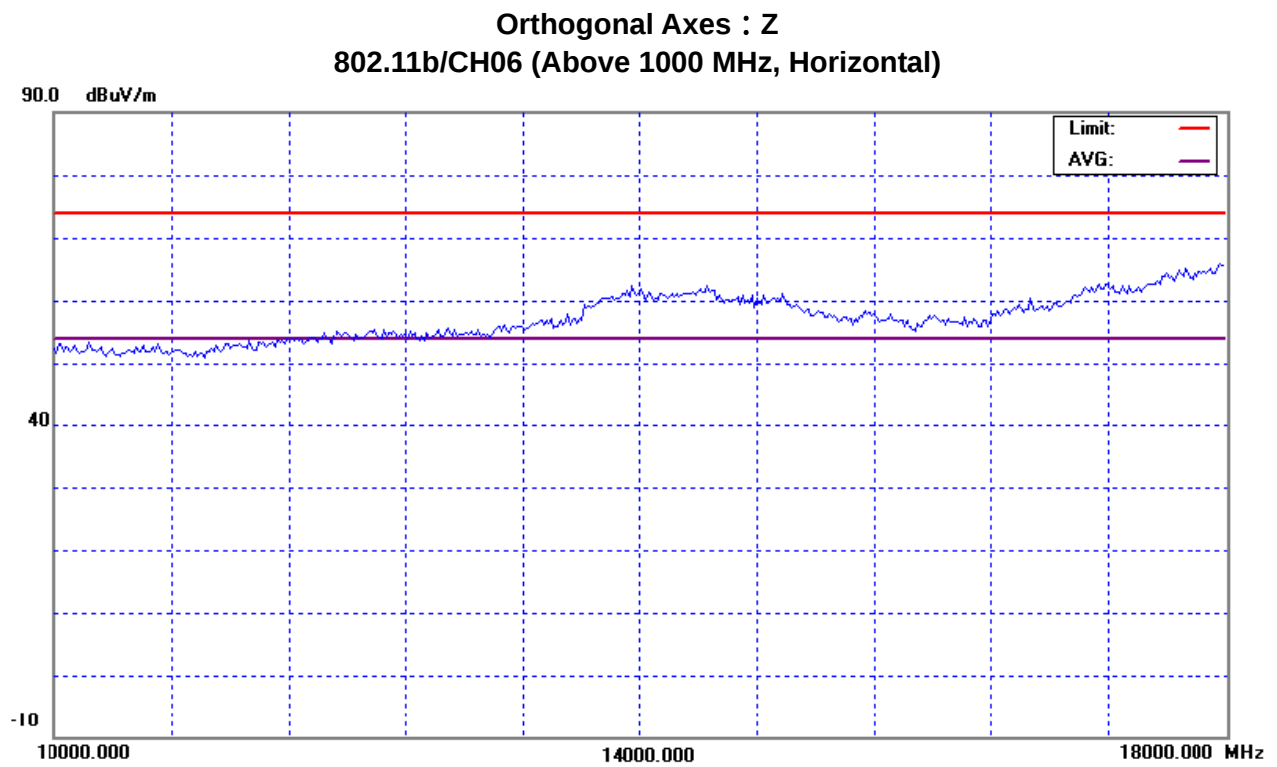



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH11		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1085.00	V	48.27	*	-8.65	39.62	*	74.00	54.00	X/H
1160.00	V	47.91	*	-8.31	39.60	*	74.00	54.00	X/H
1380.00	V	48.16	*	-7.31	40.85	*	74.00	54.00	X/H
1555.00	V	48.44	*	-6.45	41.99	*	74.00	54.00	X/H
1860.00	V	47.77	*	-4.76	43.01	*	74.00	54.00	X/H
2260.00	V	47.64	*	-3.32	44.32	*	74.00	54.00	X/H
4930.00	V	46.76	40.55	3.38	50.14	43.93	74.00	54.00	X/H
7386.00	V	41.08	*	8.13	49.21	*	74.00	54.00	X/H
9848.00	V	41.78	*	10.13	51.91	*	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

Orthogonal Axes : X
802.11b/CH11(Above 1000 MHz, Vertical)

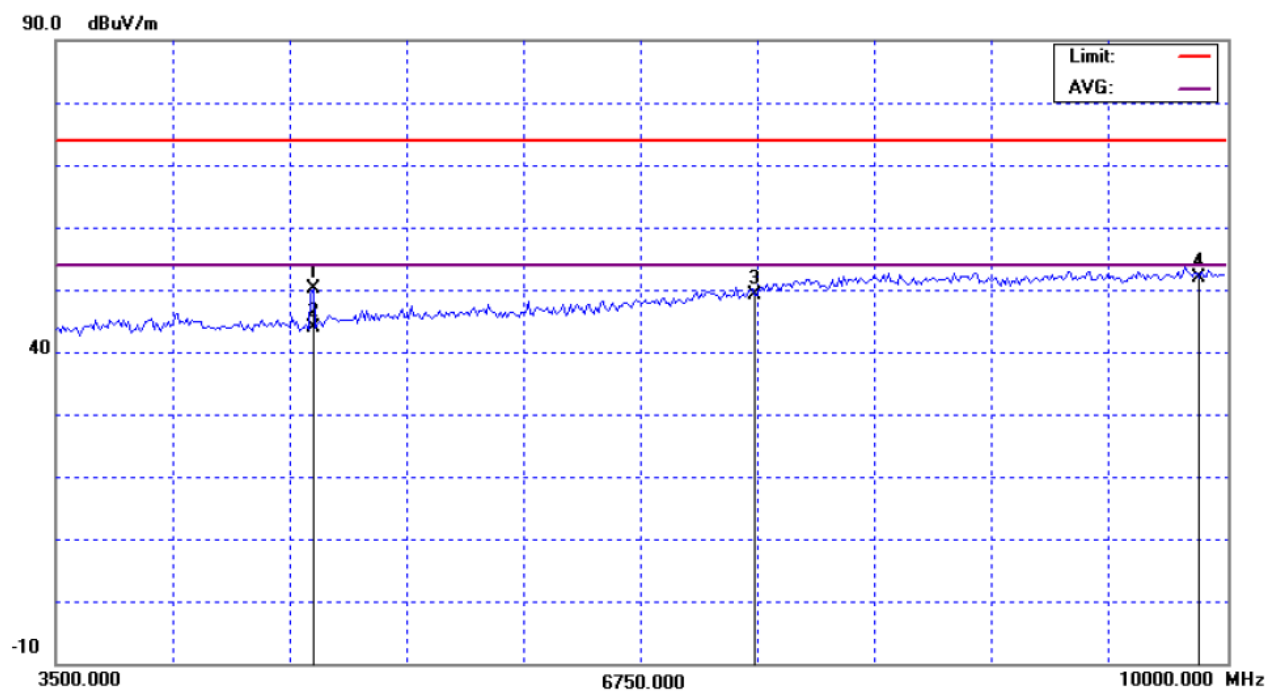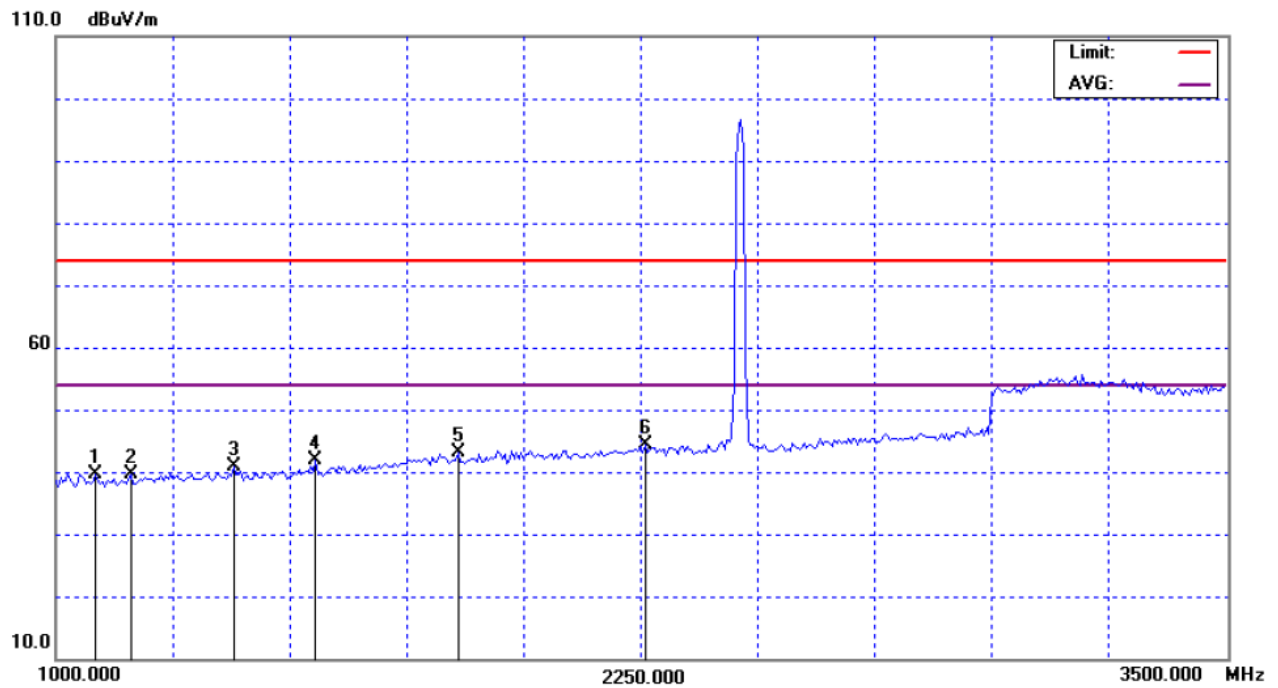

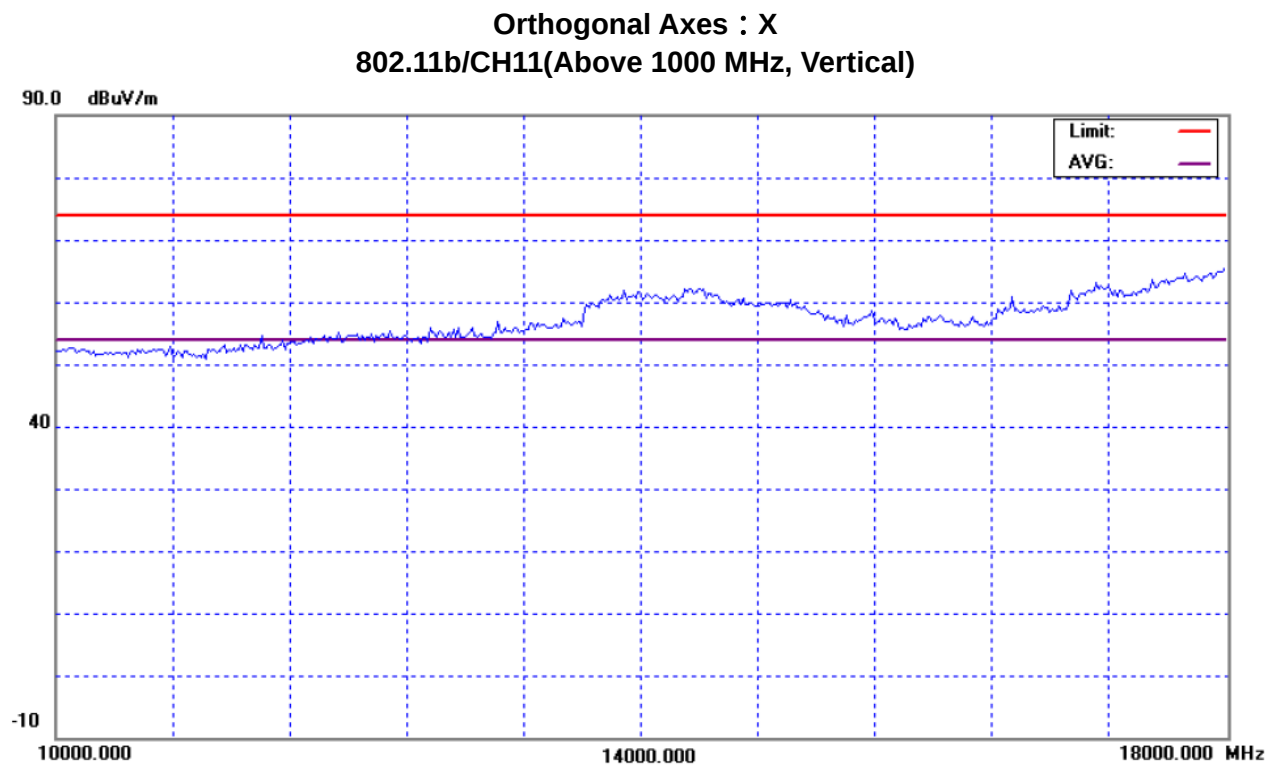



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH11		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1070.00	H	48.02	*	-8.72	39.30	*	74.00	54.00	X/H
1160.00	H	48.13	*	-8.31	39.82	*	74.00	54.00	X/H
1455.00	H	46.95	*	-6.97	39.98	*	74.00	54.00	X/H
1820.00	H	48.58	*	-4.98	43.60	*	74.00	54.00	X/H
2090.00	H	47.36	*	-3.75	43.61	*	74.00	54.00	X/H
2695.00	H	47.50	*	-1.95	45.55	*	74.00	54.00	X/H
4930.00	H	43.47	38.12	3.38	46.85	41.50	74.00	54.00	X/H
7386.00	H	42.17	*	8.13	50.30	*	74.00	54.00	X/H
9848.00	H	41.73	*	10.13	51.86	*	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : X
802.11b/CH11(Above 1000 MHz, Horizontal)

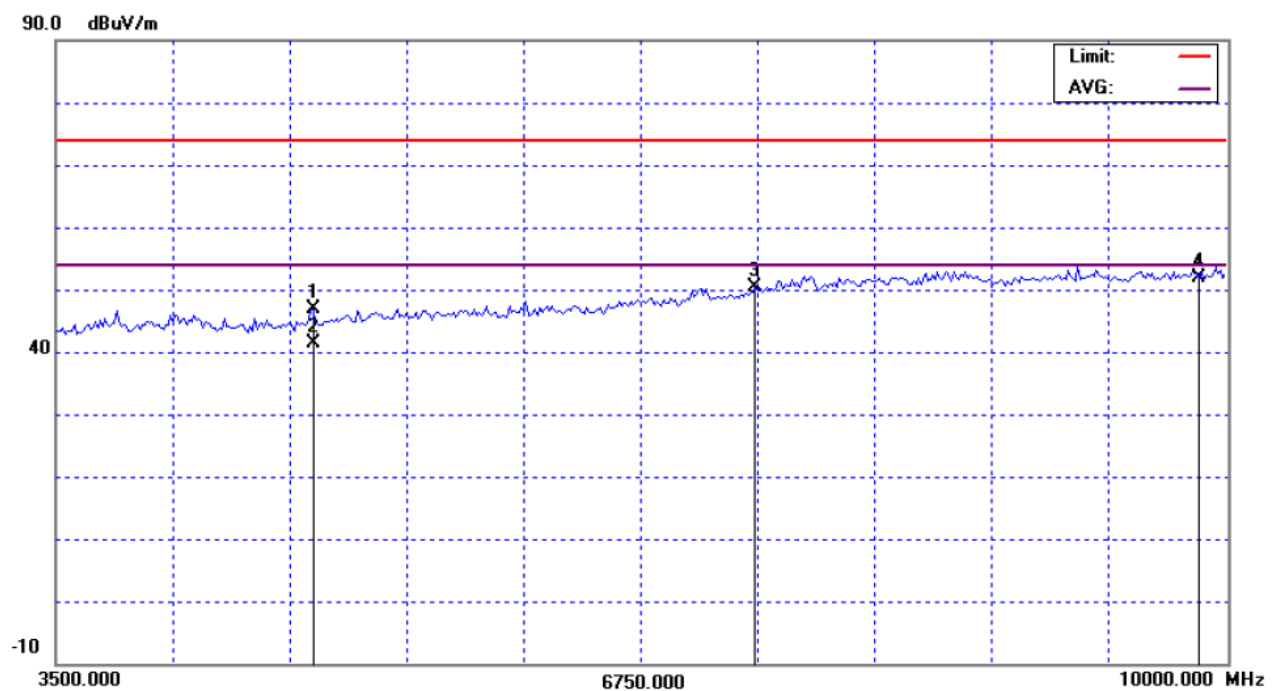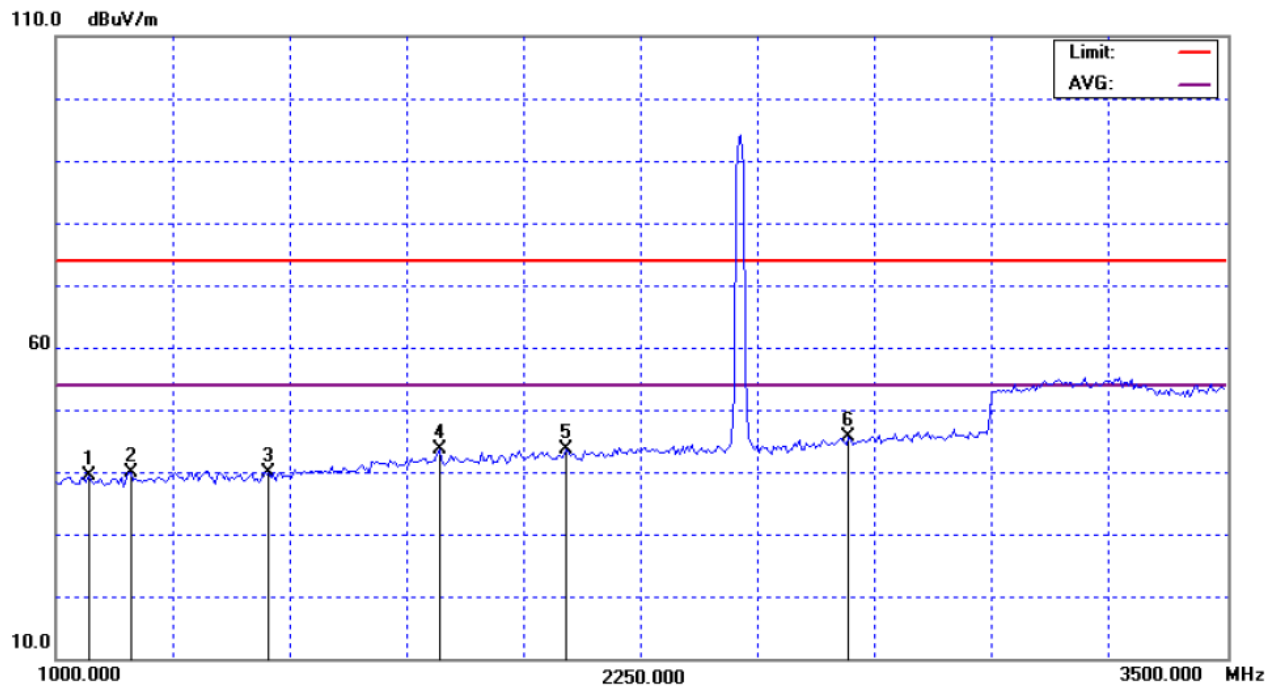

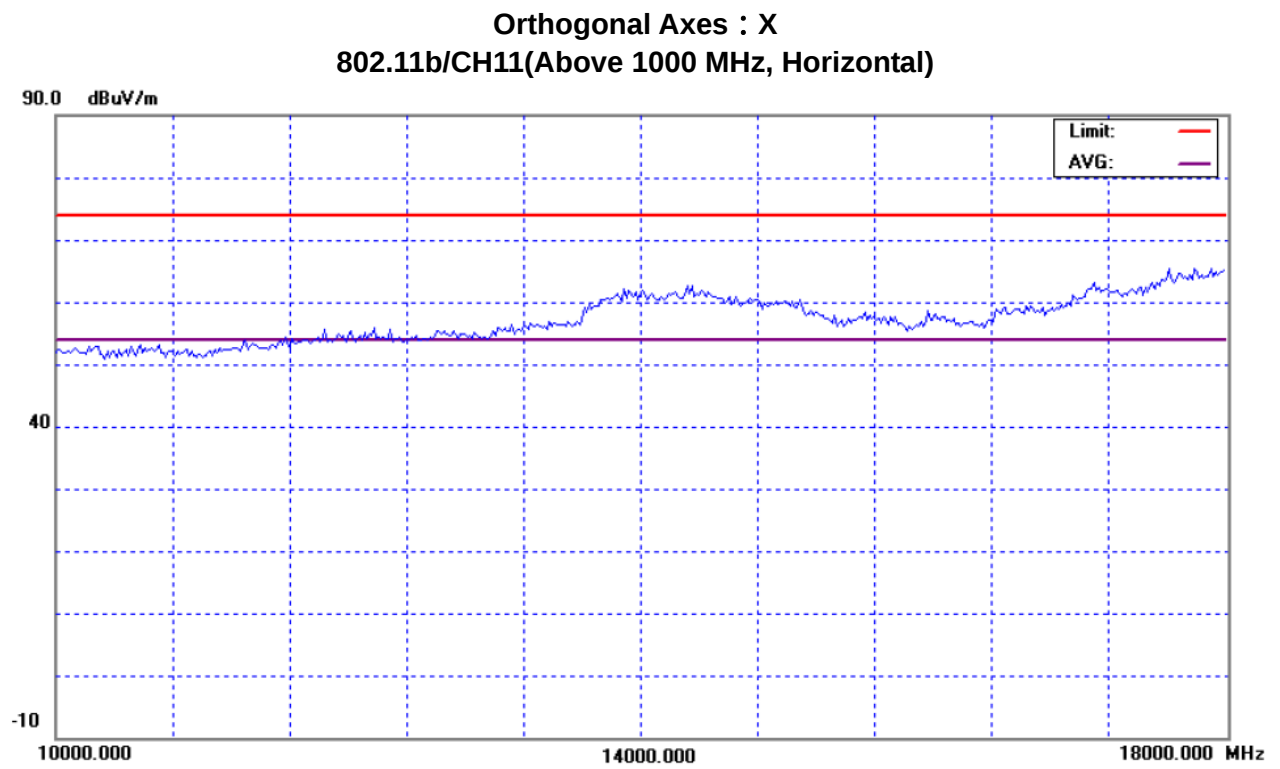



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH11		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1095.00	V	48.87	*	-8.61	40.26	*	74.00	54.00	Y/H
1275.00	V	48.18	*	-7.79	40.39	*	74.00	54.00	Y/H
1395.00	V	47.91	*	-7.24	40.67	*	74.00	54.00	Y/H
1650.00	V	47.49	*	-5.93	41.56	*	74.00	54.00	Y/H
1770.00	V	48.24	*	-5.26	42.98	*	74.00	54.00	Y/H
2225.00	V	48.14	*	-3.41	44.73	*	74.00	54.00	Y/H
4930.00	V	49.16	44.00	3.38	52.54	47.38	74.00	54.00	Y/H
7386.00	V	41.23	*	8.13	49.36	*	74.00	54.00	Y/H
9848.00	V	42.53	29.80	10.13	52.66	39.93	74.00	54.00	Y/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Y
802.11b/CH11(Above 1000 MHz, Vertical)

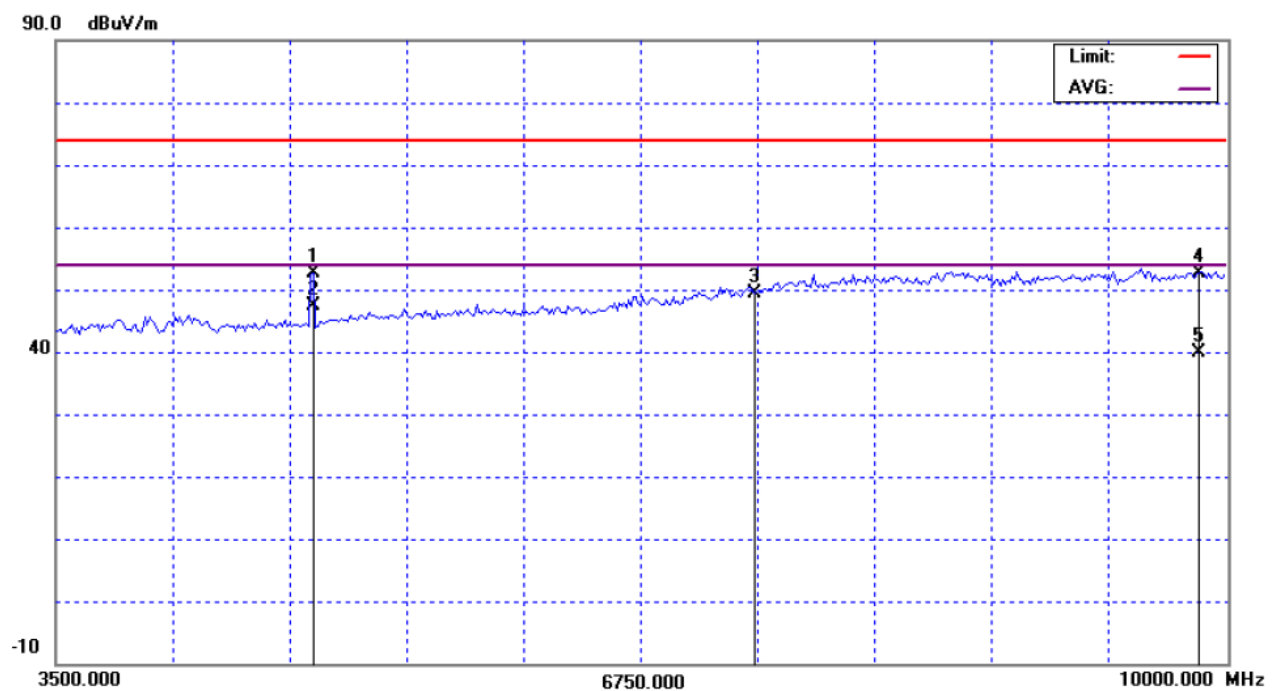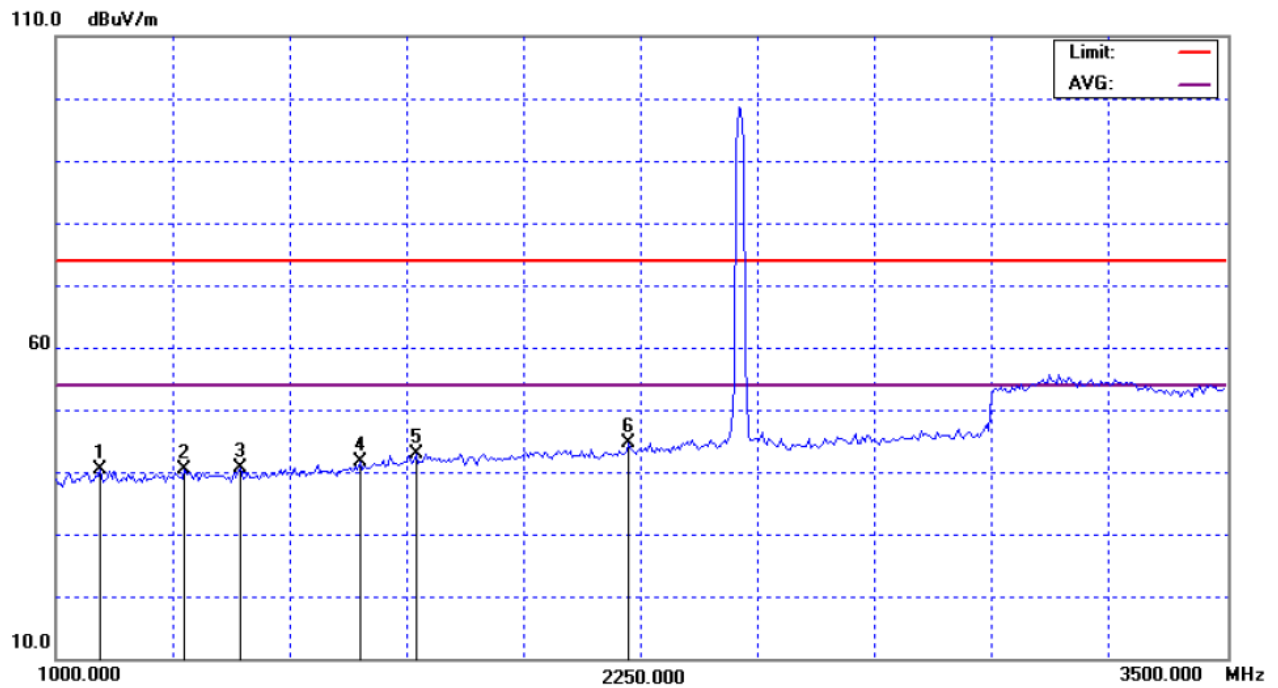

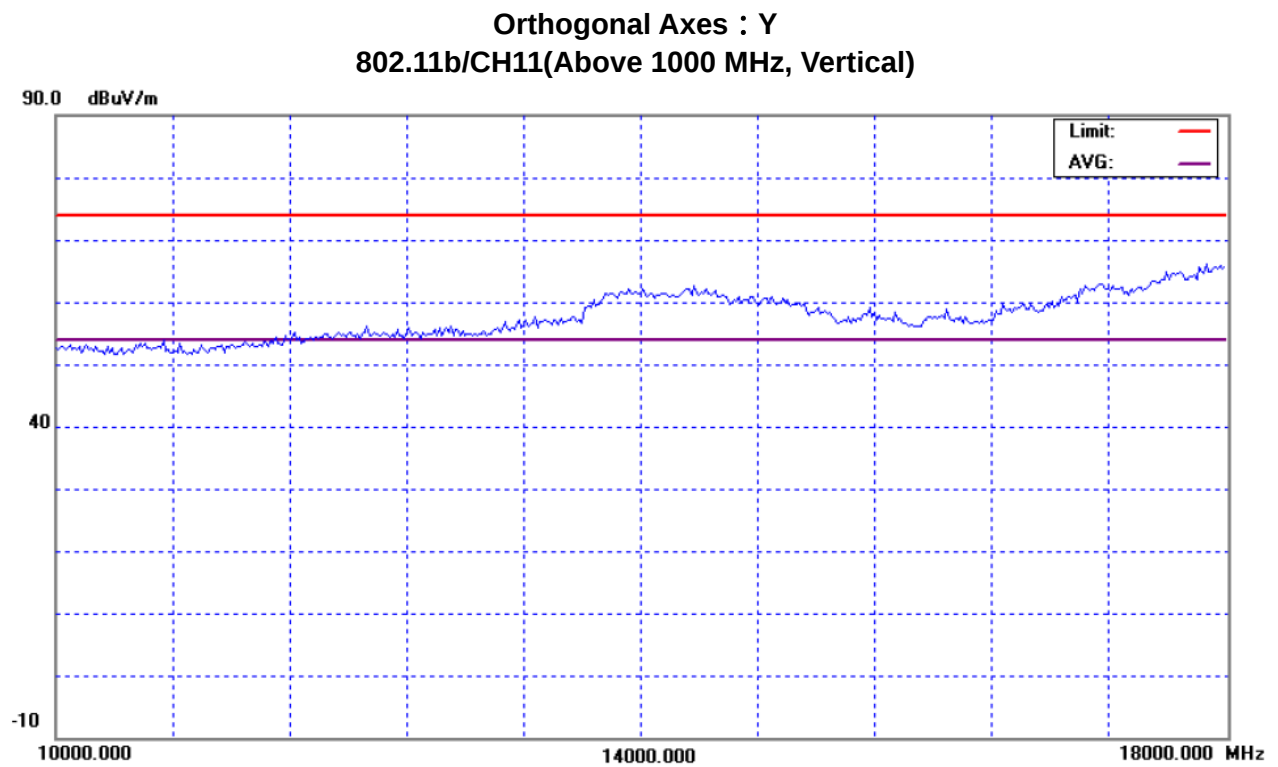



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH11		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1020.00	H	48.61	*	-8.95	39.66	*	74.00	54.00	Y/H
1215.00	H	47.74	*	-8.06	39.68	*	74.00	54.00	Y/H
1385.00	H	47.68	*	-7.28	40.40	*	74.00	54.00	Y/H
1575.00	H	47.86	*	-6.34	41.52	*	74.00	54.00	Y/H
1875.00	H	47.62	*	-4.67	42.95	*	74.00	54.00	Y/H
2030.00	H	47.36	*	-3.90	43.46	*	74.00	54.00	Y/H
4930.00	H	52.93	47.36	3.38	56.31	50.74	74.00	54.00	Y/H
7386.00	H	40.94	*	8.13	49.07	*	74.00	54.00	Y/H
9848.00	H	42.34	29.45	10.13	52.47	39.58	74.00	54.00	Y/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Y
802.11b/CH11(Above 1000 MHz, Horizontal)

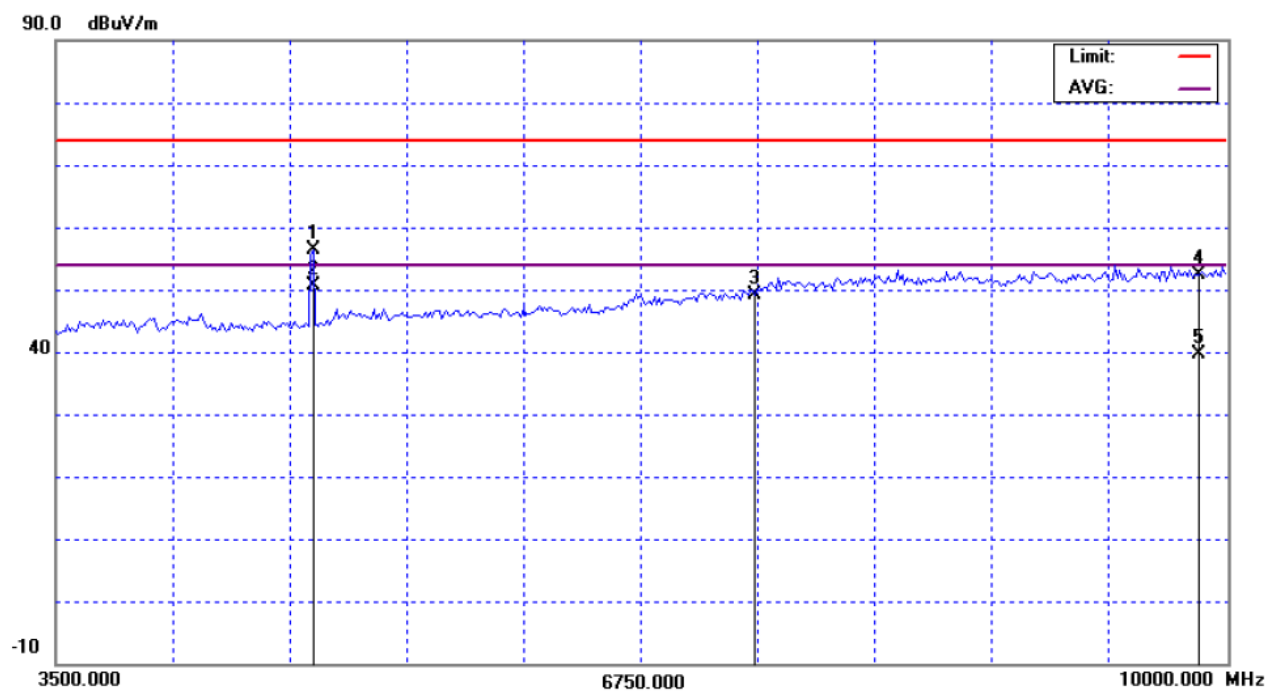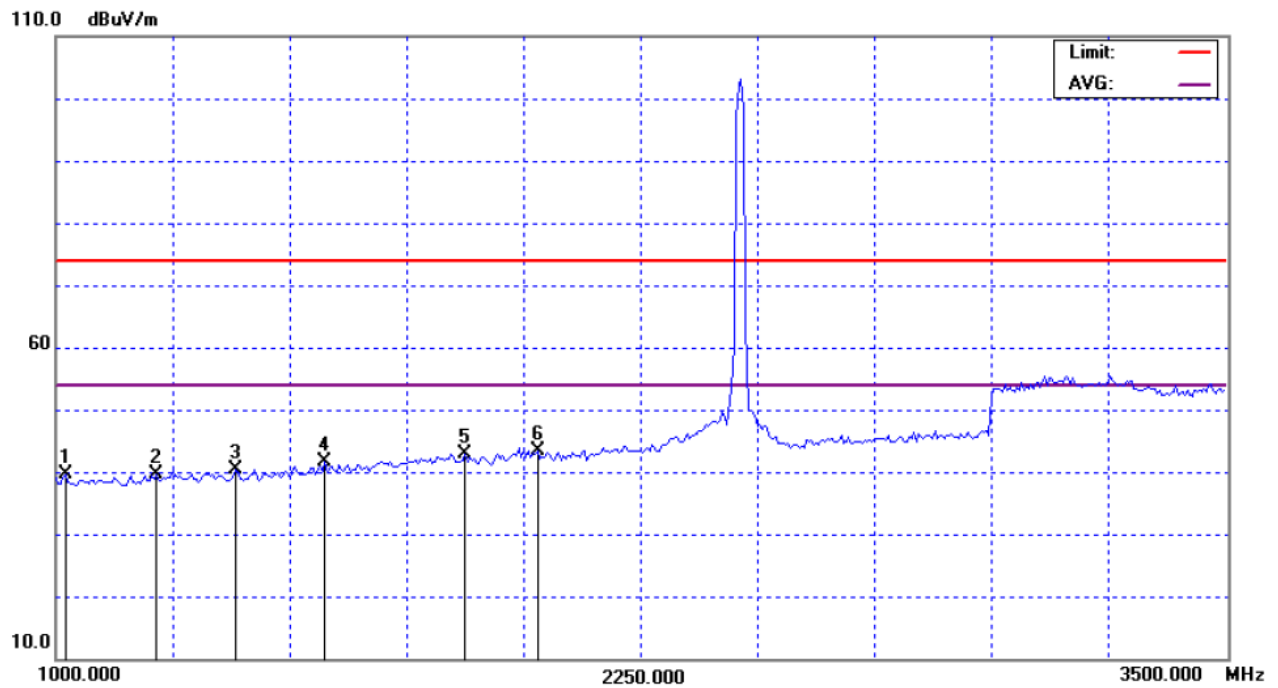

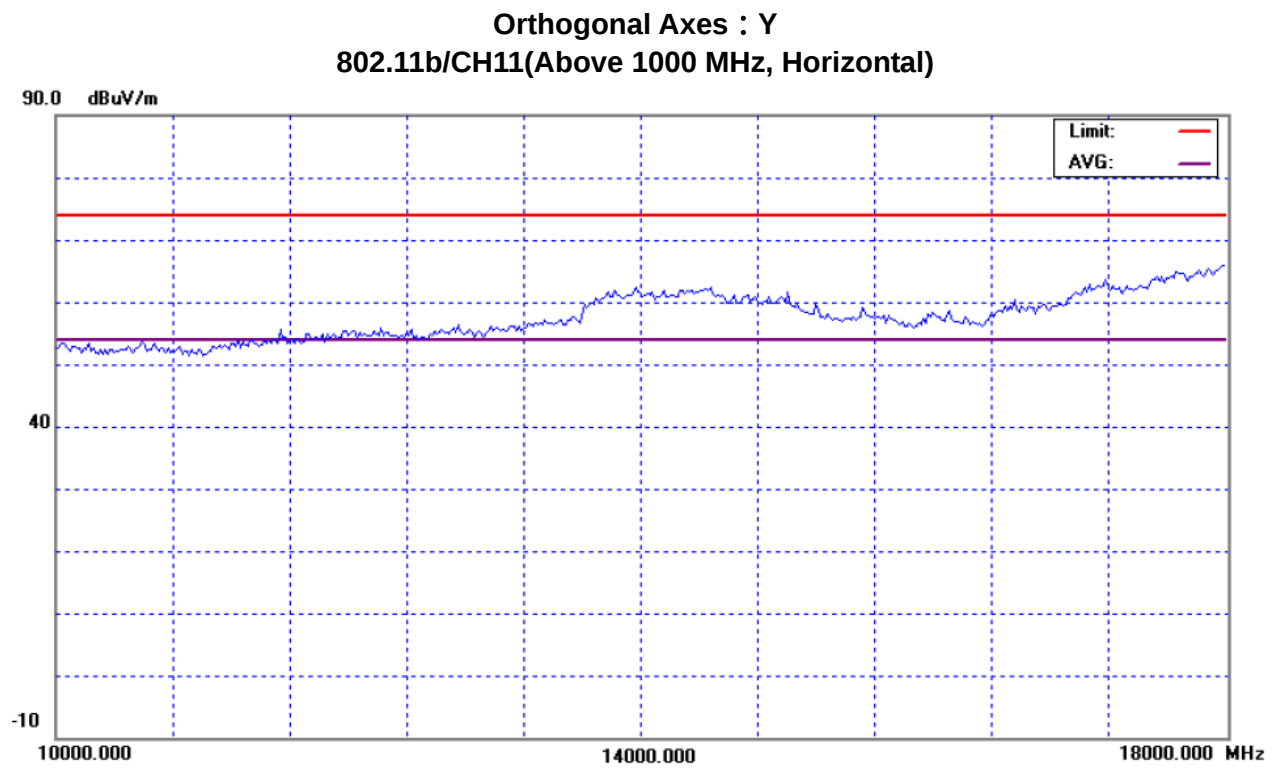



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH11		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1000.00	V	48.52	*	-9.04	39.48	*	74.00	54.00	Z/H
1265.00	V	47.95	*	-7.83	40.12	*	74.00	54.00	Z/H
1645.00	V	47.26	*	-5.95	41.31	*	74.00	54.00	Z/H
1770.00	V	48.18	*	-5.26	42.92	*	74.00	54.00	Z/H
2075.00	V	47.66	*	-3.79	43.87	*	74.00	54.00	Z/H
2720.00	V	47.68	*	-1.85	45.83	*	74.00	54.00	Z/H
4930.00	V	48.15	43.25	3.38	51.53	46.63	74.00	54.00	Z/H
7386.00	V	41.48	*	8.13	49.61	*	74.00	54.00	Z/H
9848.00	V	41.88	29.44	10.13	52.01	39.57	74.00	54.00	Z/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Z
802.11b/CH11(Above 1000 MHz, Vertical)

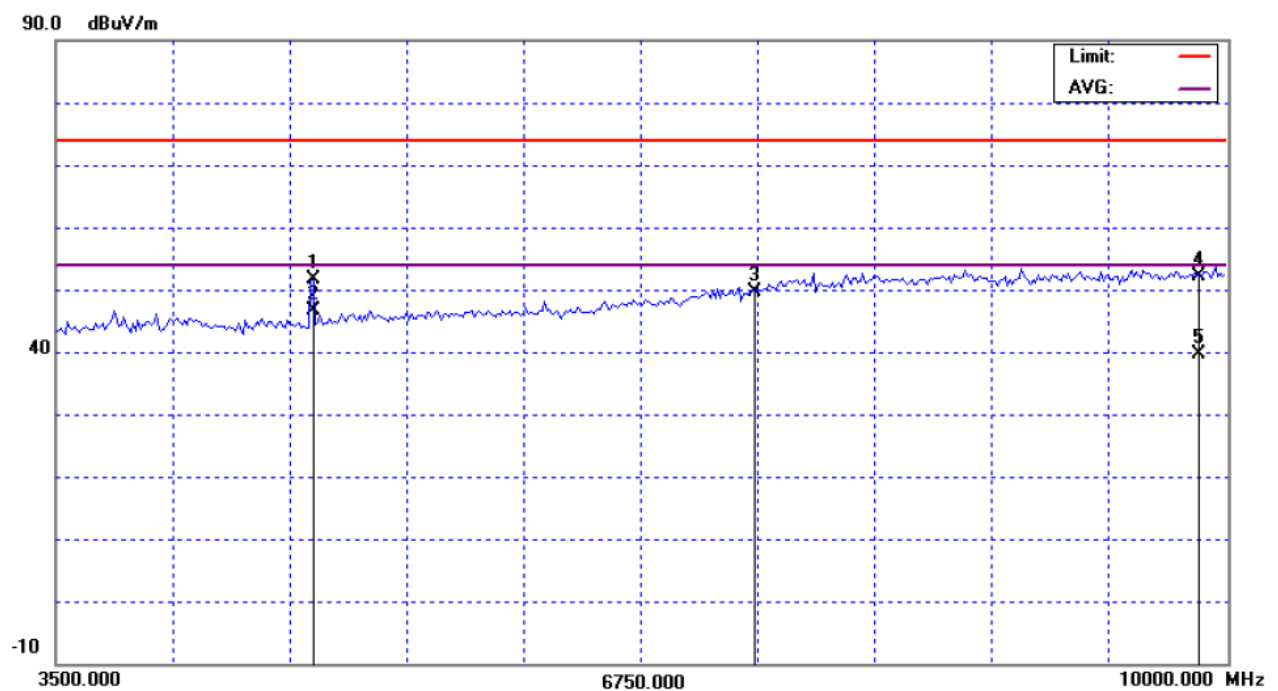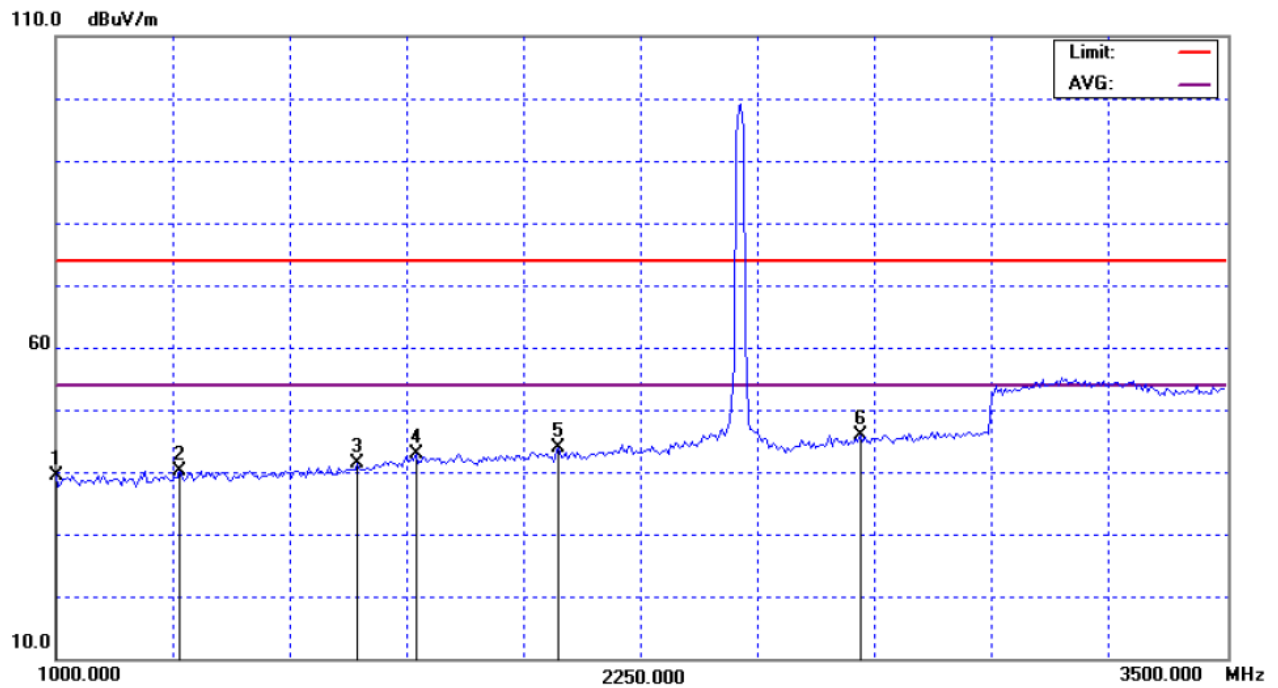

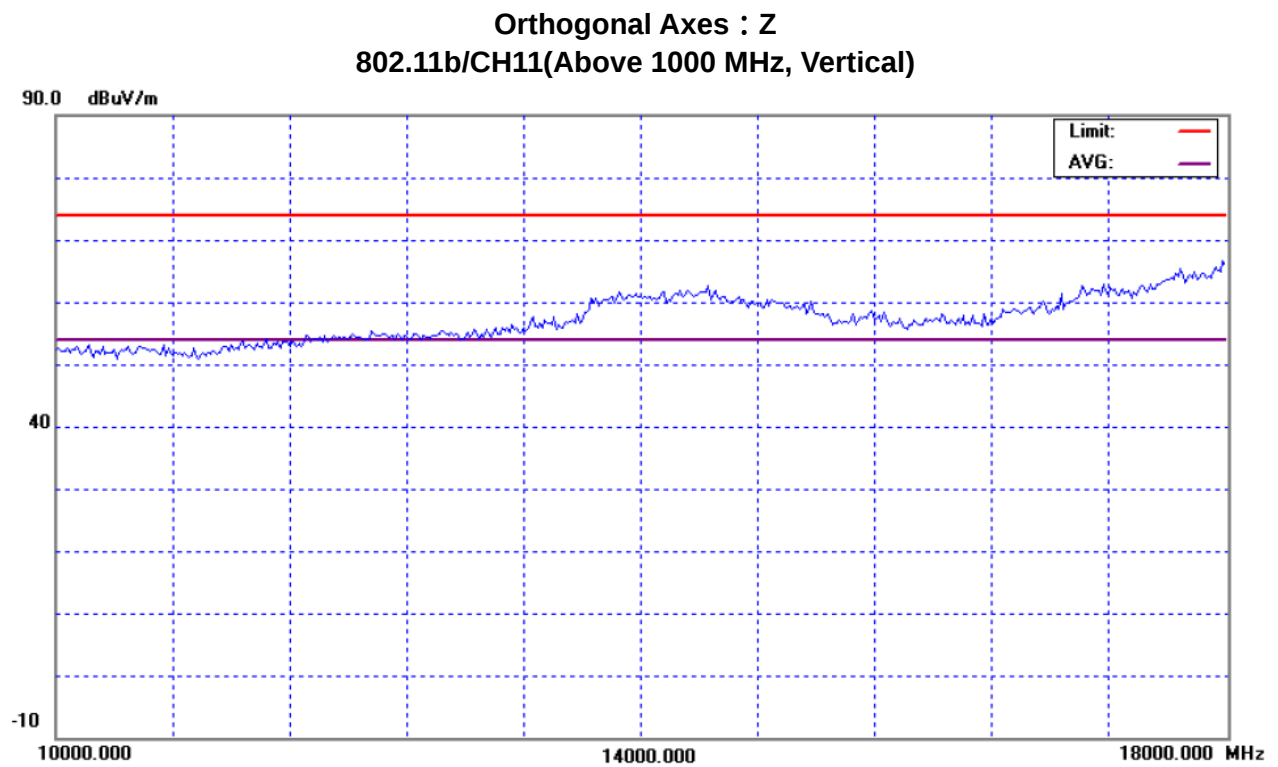



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11b/CH11		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1025.00	H	48.86	*	-8.93	39.93	*	74.00	54.00	Z/H
1290.00	H	47.84	*	-7.72	40.12	*	74.00	54.00	Z/H
1665.00	H	46.88	*	-5.84	41.04	*	74.00	54.00	Z/H
1795.00	H	47.95	*	-5.12	42.83	*	74.00	54.00	Z/H
2155.00	H	47.56	*	-3.59	43.97	*	74.00	54.00	Z/H
2840.00	H	47.59	*	-1.37	46.22	*	74.00	54.00	Z/H
4917.00	H	46.58	41.35	3.35	49.93	44.70	74.00	54.00	Z/H
7386.00	H	41.85	*	8.13	49.98	*	74.00	54.00	Z/H
9848.00	H	41.98	28.99	10.13	52.11	39.12	74.00	54.00	Z/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Z
802.11b/CH11(Above 1000 MHz, Horizontal)

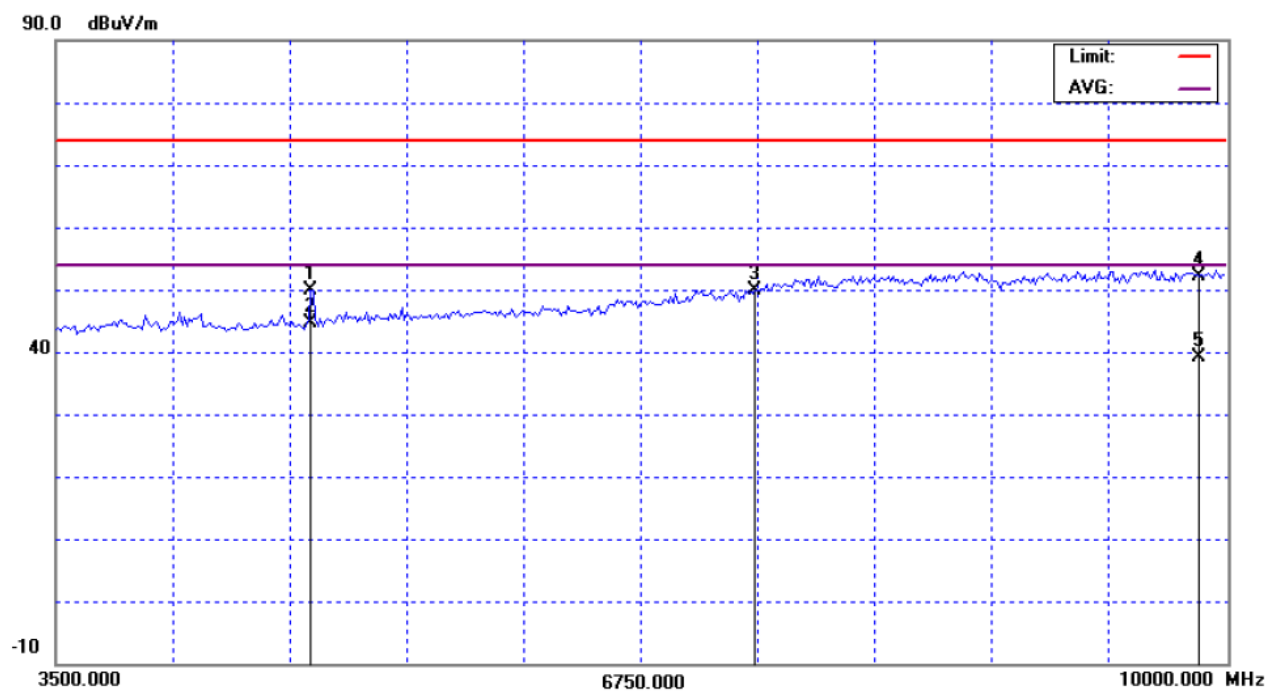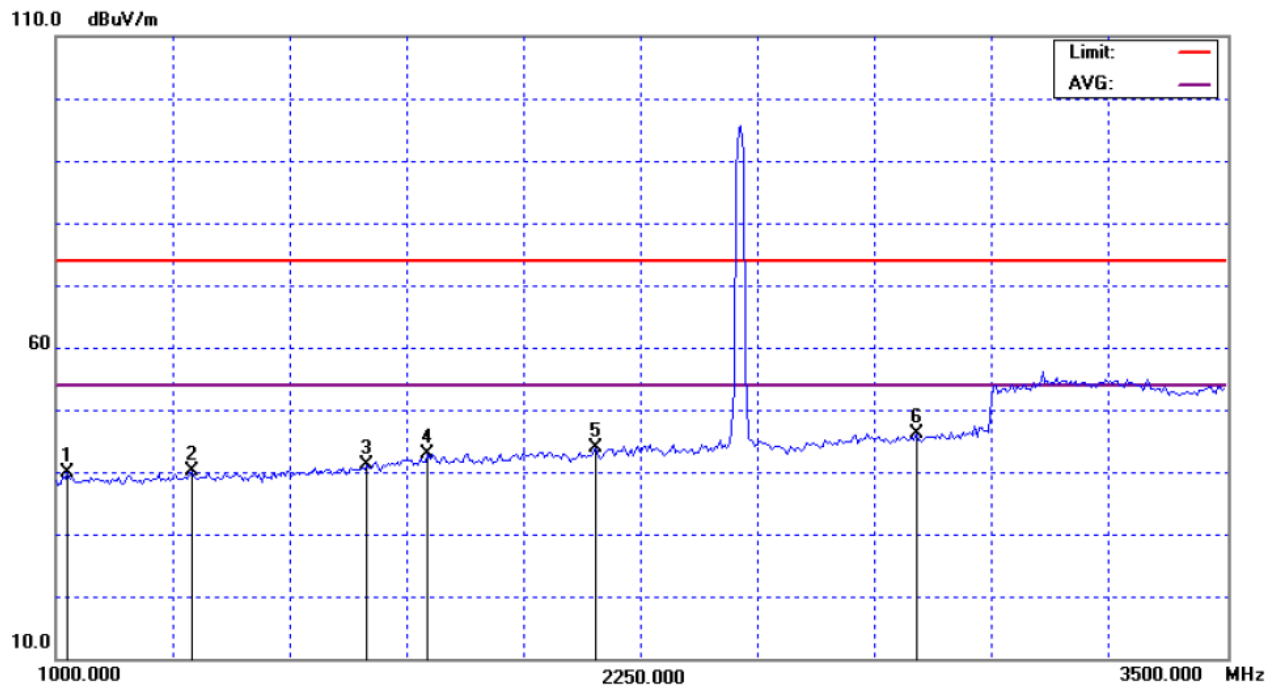

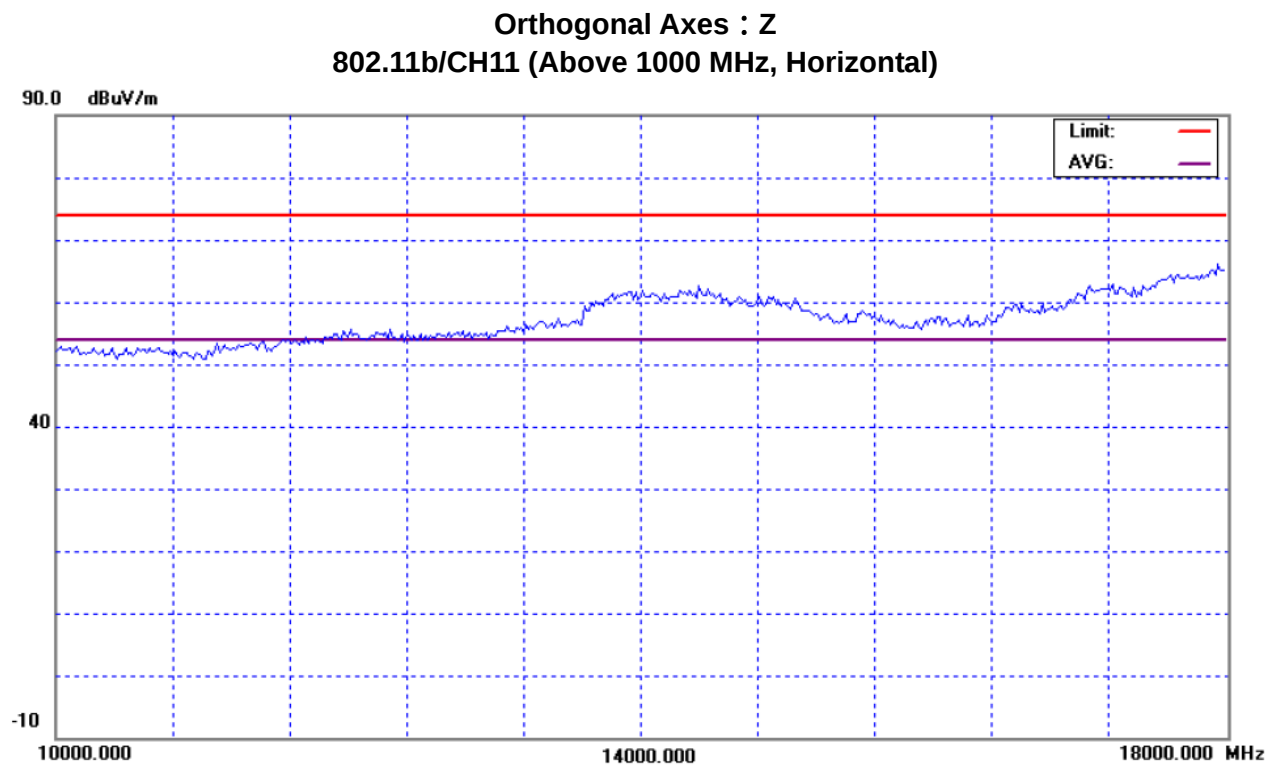



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01		


Freq. (MHz)	Ant. Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1070.00	V	48.06	*	-8.72	39.34	*	74.00	54.00	X/H
1270.00	V	48.41	*	-7.81	40.60	*	74.00	54.00	X/H
1665.00	V	47.13	*	-5.84	41.29	*	74.00	54.00	X/H
1750.00	V	48.38	*	-5.37	43.01	*	74.00	54.00	X/H
2110.00	V	47.38	*	-3.70	43.68	*	74.00	54.00	X/H
2670.00	V	47.59	*	-2.04	45.55	*	74.00	54.00	X/H
4826.00	V	45.36	35.15	3.13	48.49	38.28	74.00	54.00	X/H
7236.00	V	41.42	*	7.47	48.89	*	74.00	54.00	X/H
9648.00	V	42.17	29.10	9.97	52.14	39.07	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

Orthogonal Axes : X
802.11g/CH01(Above 1000 MHz, Vertical)

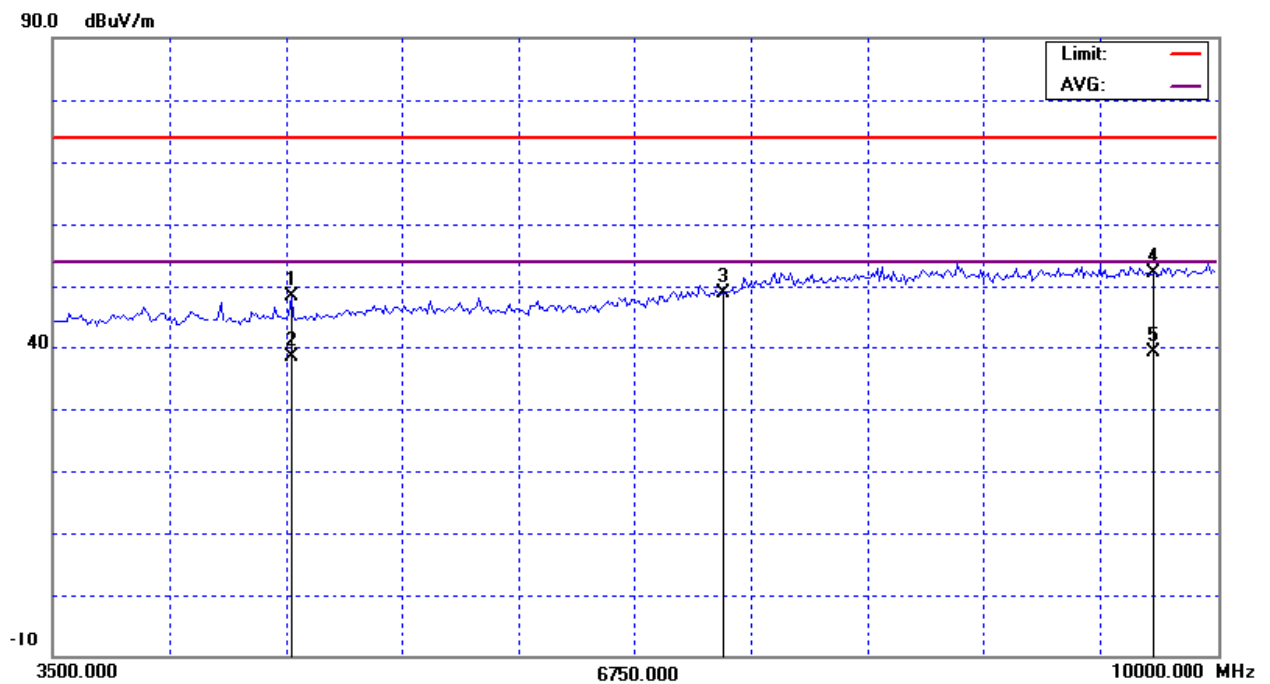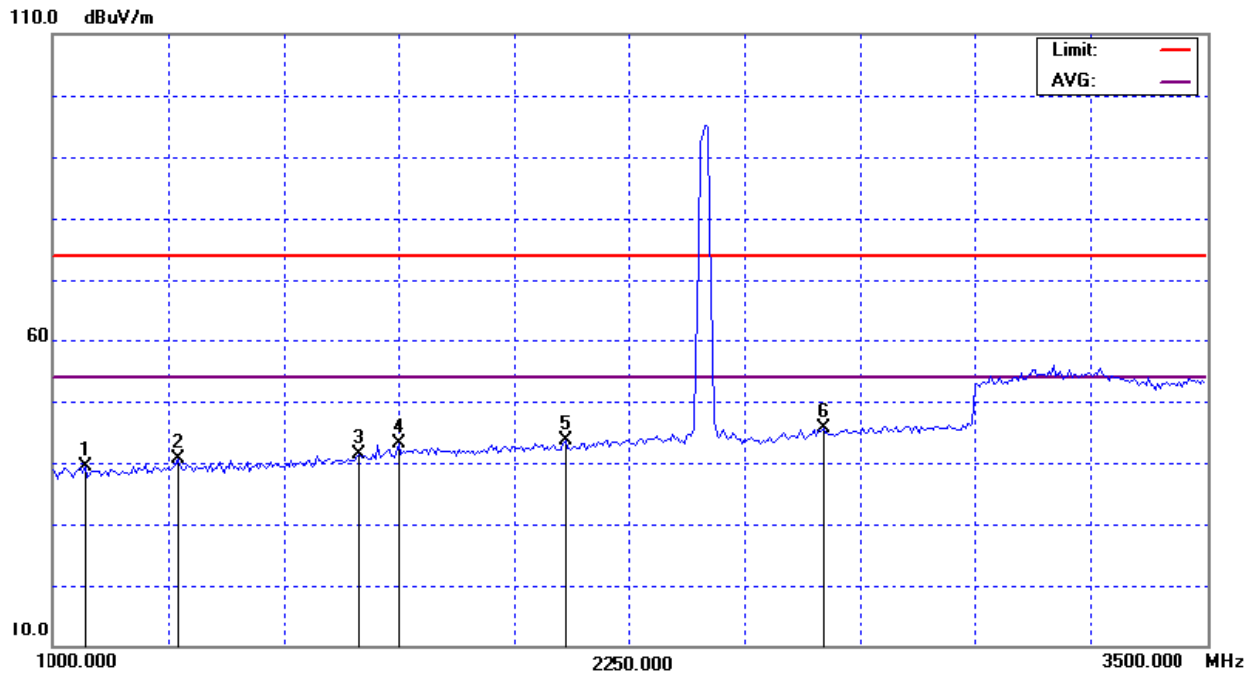

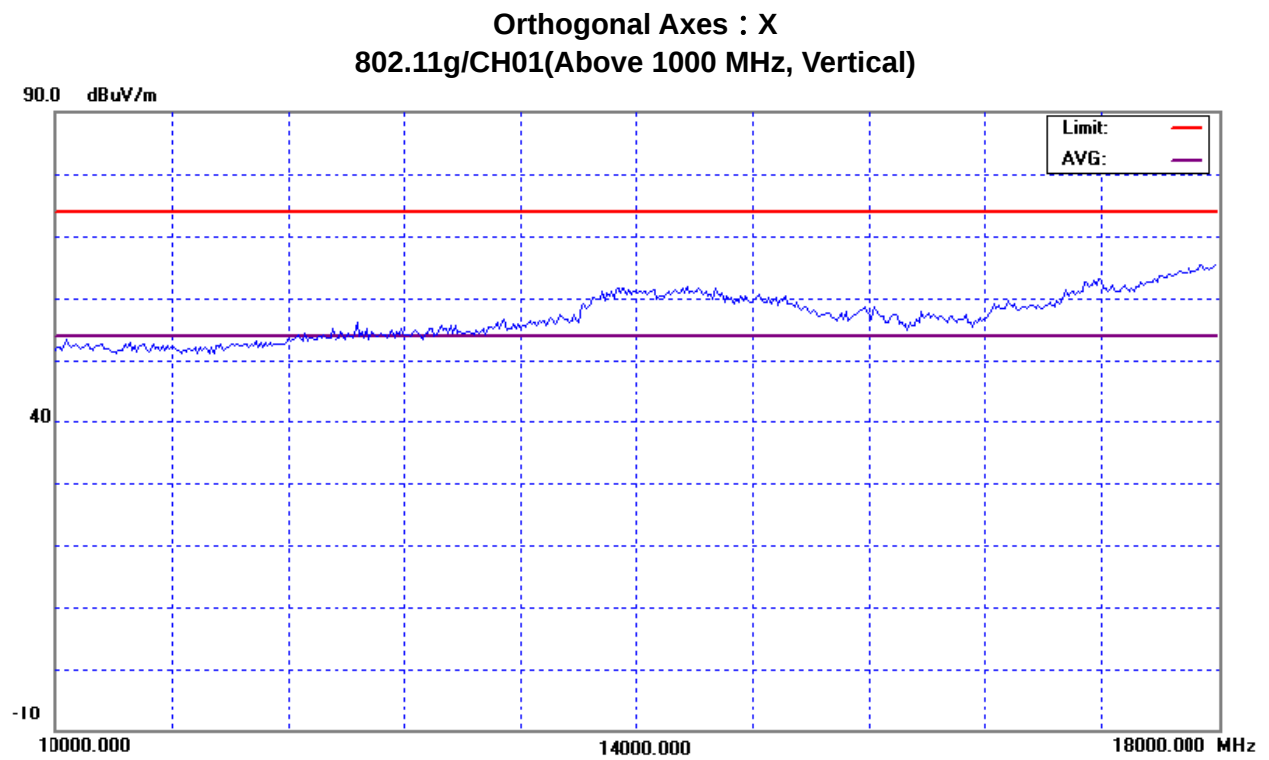



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1065.00	H	48.46	*	-8.74	39.72	*	74.00	54.00	X/H
1165.00	H	48.24	*	-8.29	39.95	*	74.00	54.00	X/H
1555.00	H	46.85	*	-6.45	40.40	*	74.00	54.00	X/H
1850.00	H	47.63	*	-4.81	42.82	*	74.00	54.00	X/H
1985.00	H	48.02	*	-4.06	43.96	*	74.00	54.00	X/H
2650.00	H	48.03	*	-2.12	45.91	*	74.00	54.00	X/H
4813.00	H	44.32	34.12	3.09	47.41	37.21	74.00	54.00	X/H
7236.00	H	41.48	*	7.47	48.95	*	74.00	54.00	X/H
9648.00	H	41.57	*	9.97	51.54	*	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : X
802.11g/CH01(Above 1000 MHz, Horizontal)

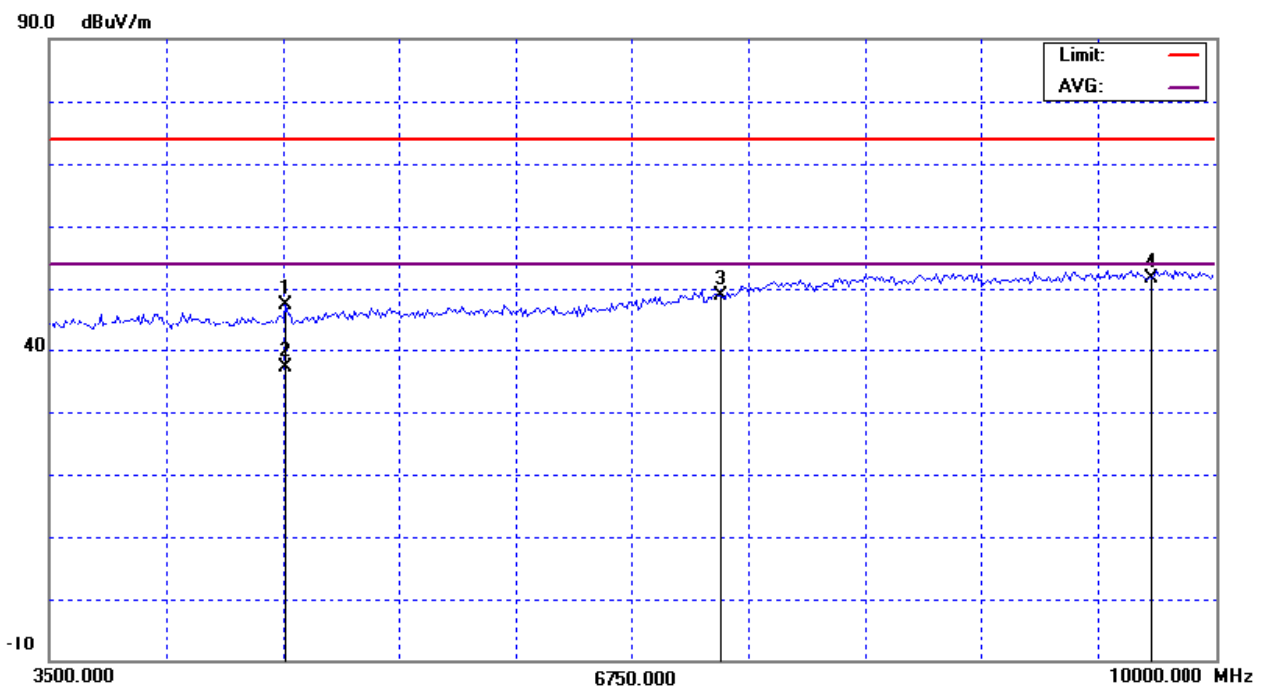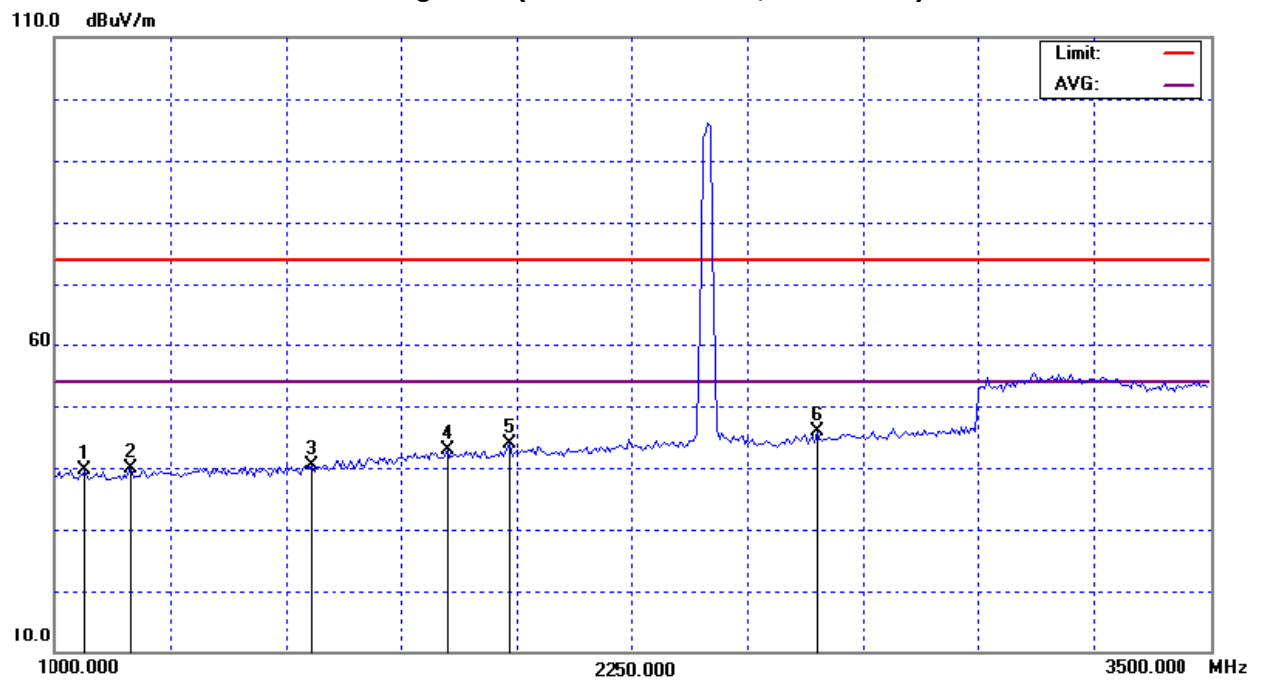

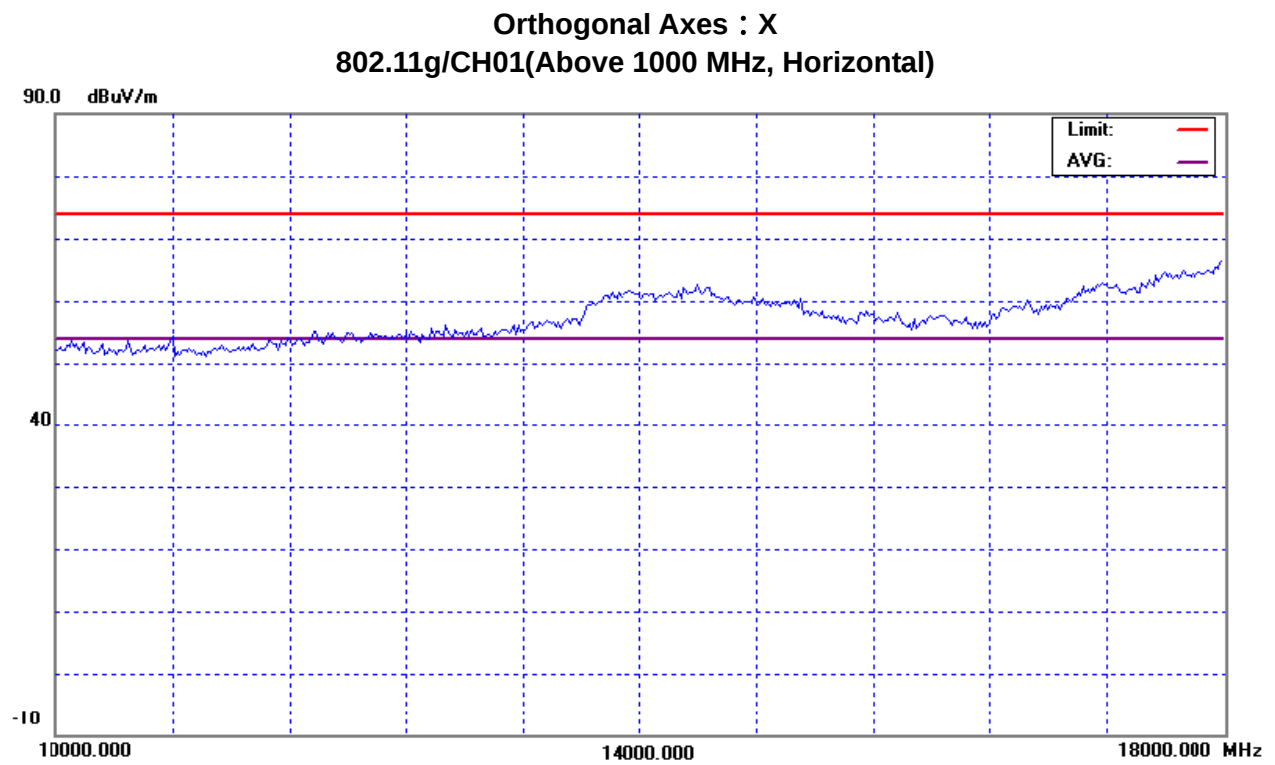



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1085.00	V	50.53	*	-8.65	41.88	*	74.00	54.00	Y/H
1310.00	V	47.37	*	-7.63	39.74	*	74.00	54.00	Y/H
1485.00	V	47.28	*	-6.83	40.45	*	74.00	54.00	Y/H
1890.00	V	47.35	*	-4.59	42.76	*	74.00	54.00	Y/H
2335.00	V	49.20	*	-3.13	46.07	*	74.00	54.00	Y/H
2780.00	V	47.98	*	-1.61	46.37	*	74.00	54.00	Y/H
4826.00	V	43.14	31.86	3.13	46.27	34.99	74.00	54.00	Y/H
7236.00	V	41.52	*	7.47	48.99	*	74.00	54.00	Y/H
9648.00	V	42.14	29.06	9.97	52.11	39.03	74.00	54.00	Y/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Y
802.11g/CH01(Above 1000 MHz, Vertical)

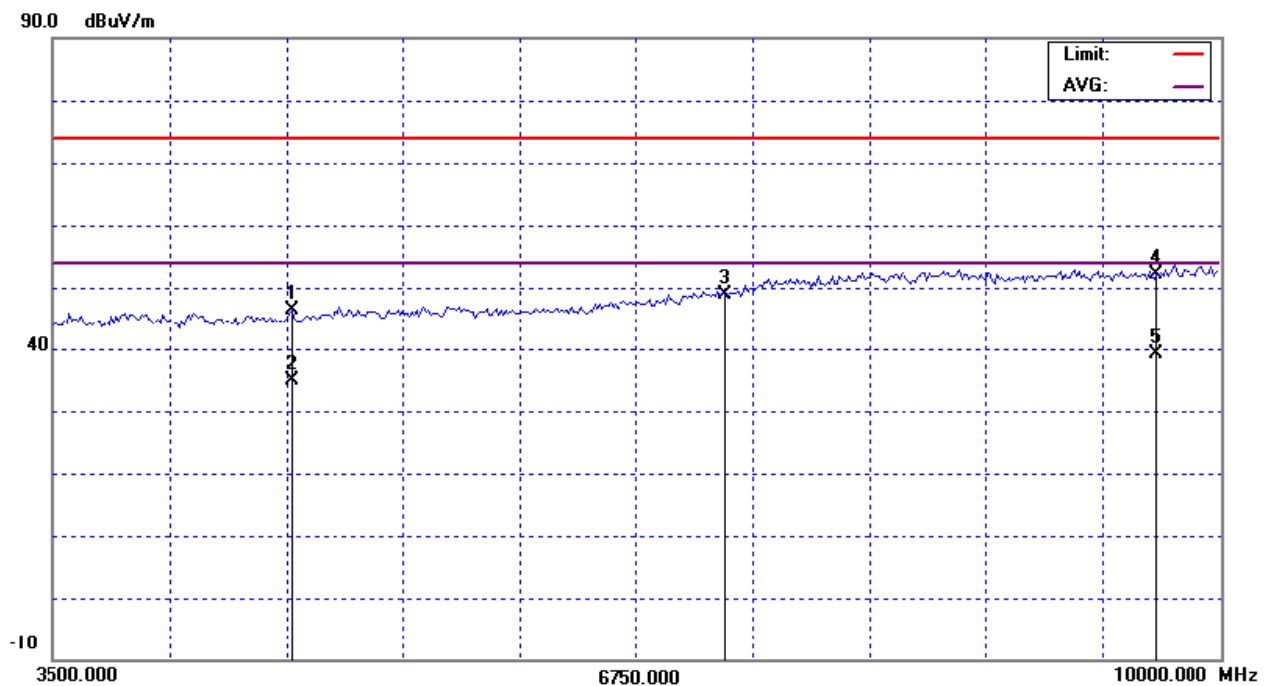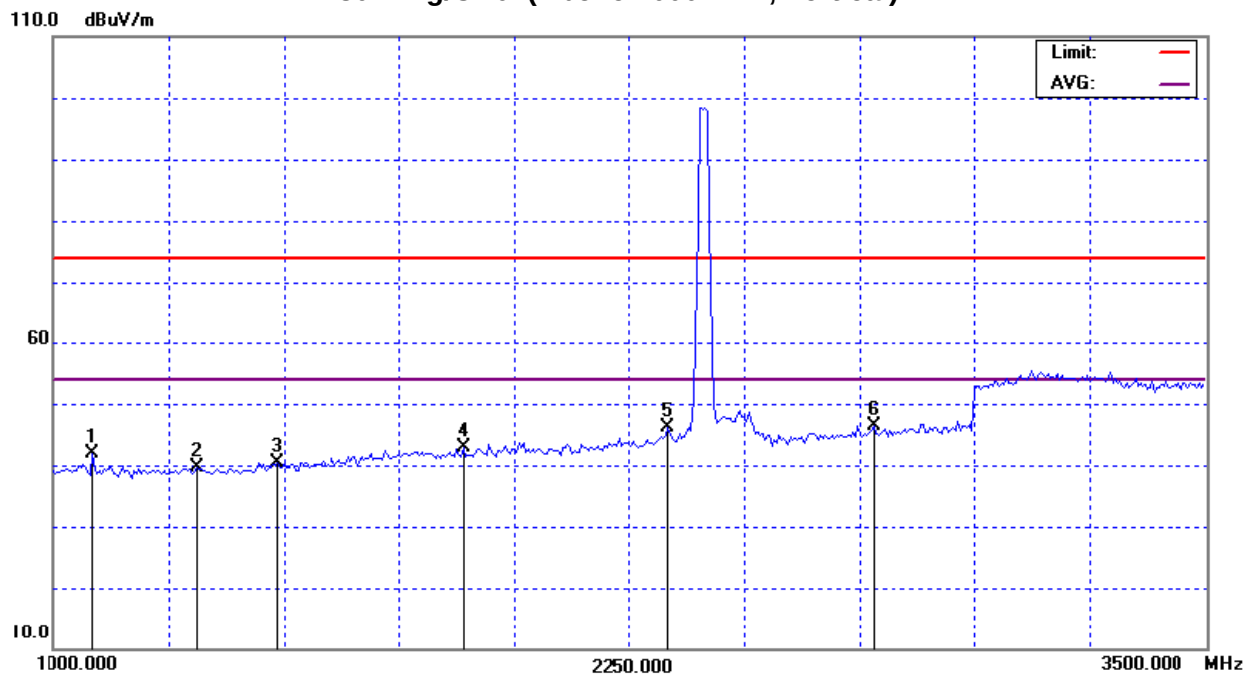

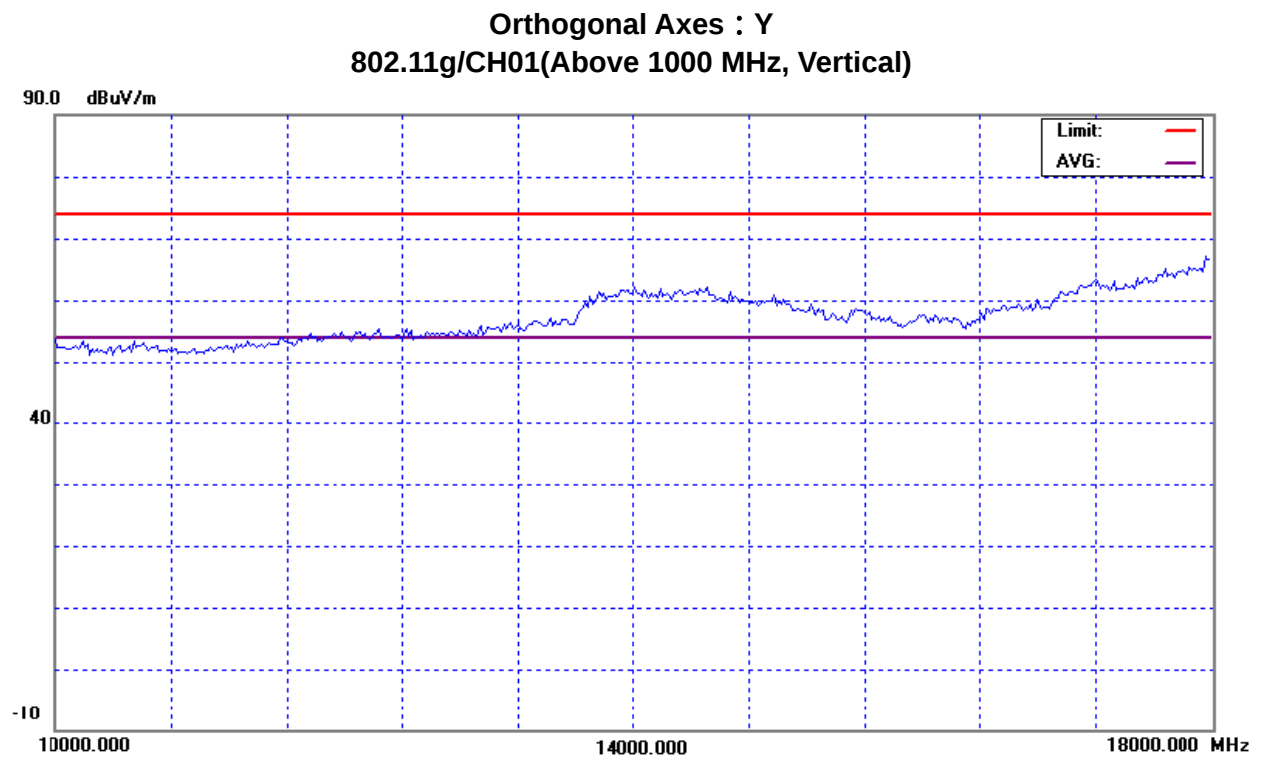



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1125.00	H	47.61	*	-8.47	39.14	*	74.00	54.00	Y/H
1380.00	H	47.37	*	-7.31	40.06	*	74.00	54.00	Y/H
1675.00	H	47.62	*	-5.79	41.83	*	74.00	54.00	Y/H
1990.00	H	48.01	*	-4.04	43.97	*	74.00	54.00	Y/H
2150.00	H	48.06	*	-3.60	44.46	*	74.00	54.00	Y/H
2840.00	H	48.13	*	-1.37	46.76	*	74.00	54.00	Y/H
4826.00	H	52.89	40.11	3.13	56.02	43.24	74.00	54.00	Y/H
7236.00	H	41.25	*	7.47	48.72	*	74.00	54.00	Y/H
9648.00	H	42.06	28.98	9.97	52.03	38.95	74.00	54.00	Y/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Y
802.11g/CH01(Above 1000 MHz, Horizontal)

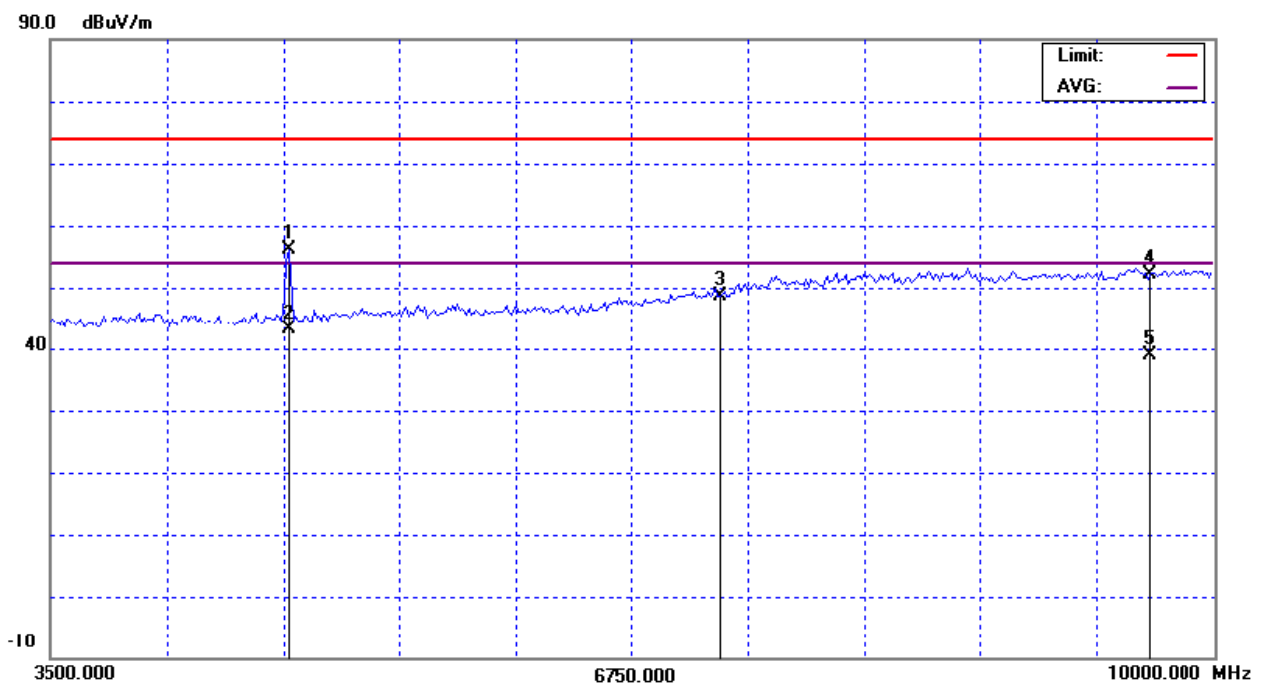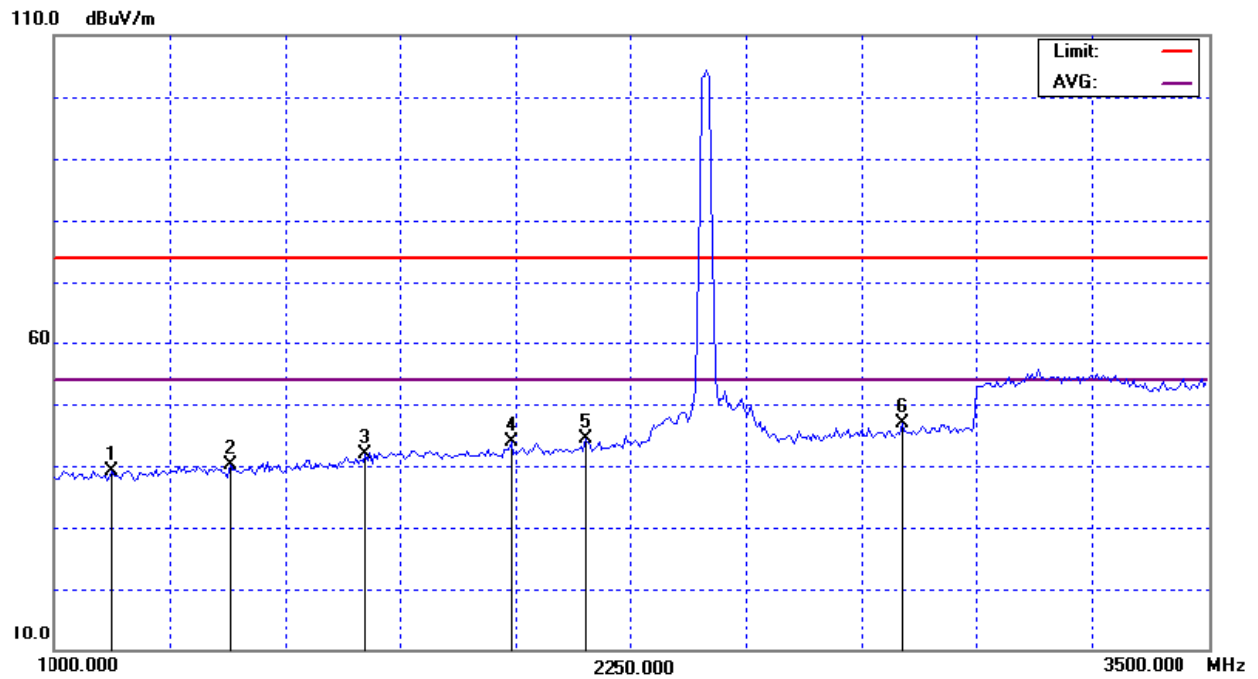

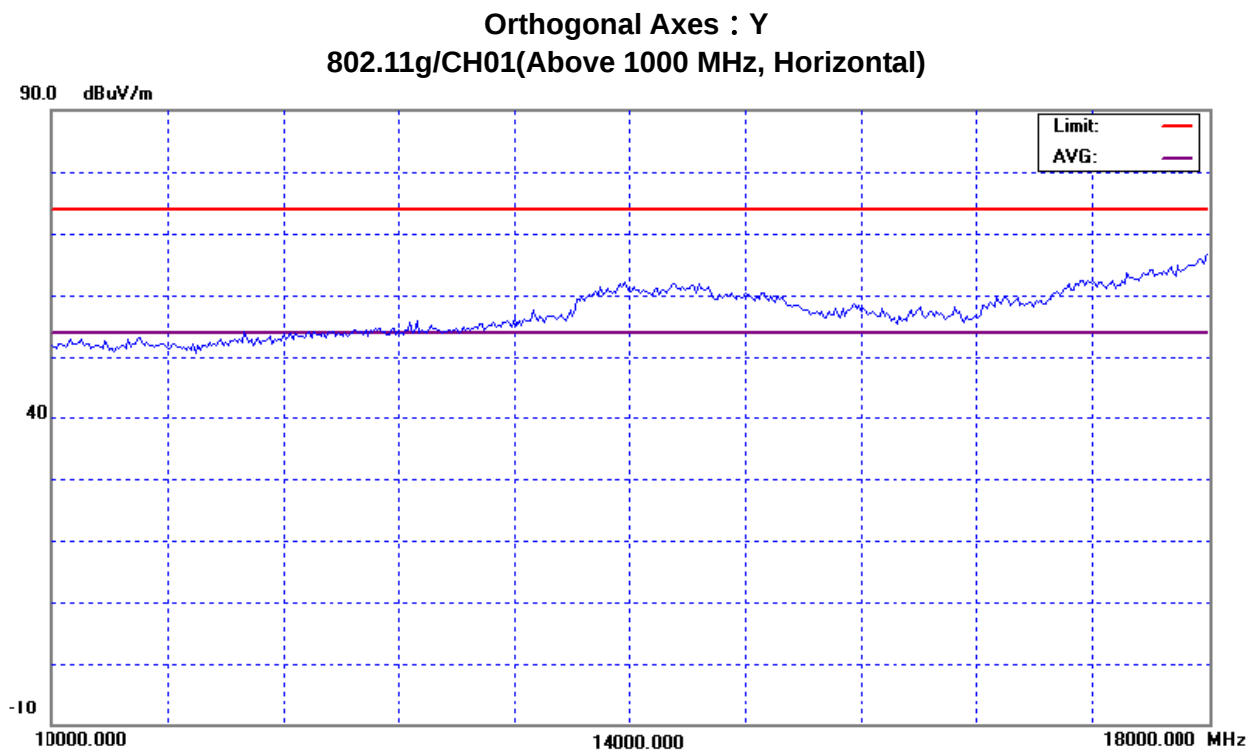



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1085.00	V	48.69	*	-8.65	40.04	*	74.00	54.00	Z/H
1255.00	V	47.85	*	-7.88	39.97	*	74.00	54.00	Z/H
1695.00	V	47.91	*	-5.68	42.23	*	74.00	54.00	Z/H
1830.00	V	47.82	*	-4.93	42.89	*	74.00	54.00	Z/H
2315.00	V	49.38	*	-3.18	46.20	*	74.00	54.00	Z/H
2795.00	V	48.32	*	-1.55	46.77	*	74.00	54.00	Z/H
4826.00	V	48.89	*	3.13	52.02	*	74.00	54.00	Z/H
4826.00	V	37.96	41.72	3.13	41.09	44.85	74.00	54.00	Z/H
9648.00	V	42.47	28.94	9.97	52.44	38.91	74.00	54.00	Z/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Z
802.11g/CH01(Above 1000 MHz, Vertical)

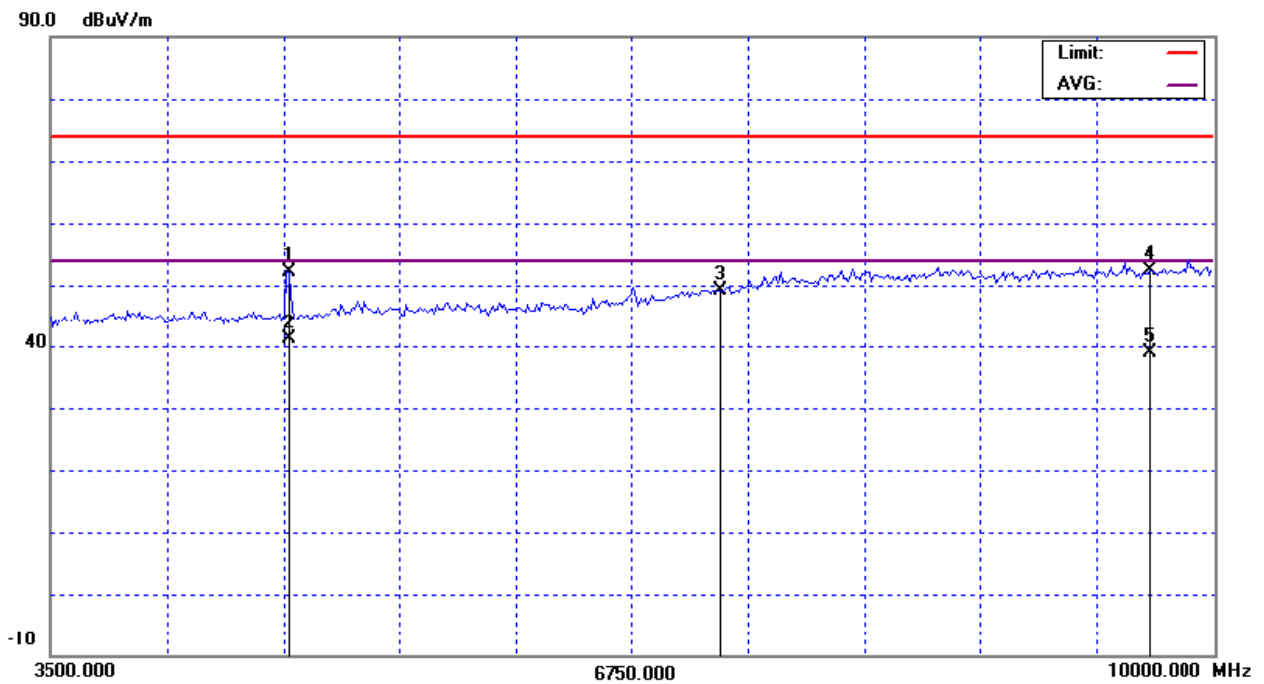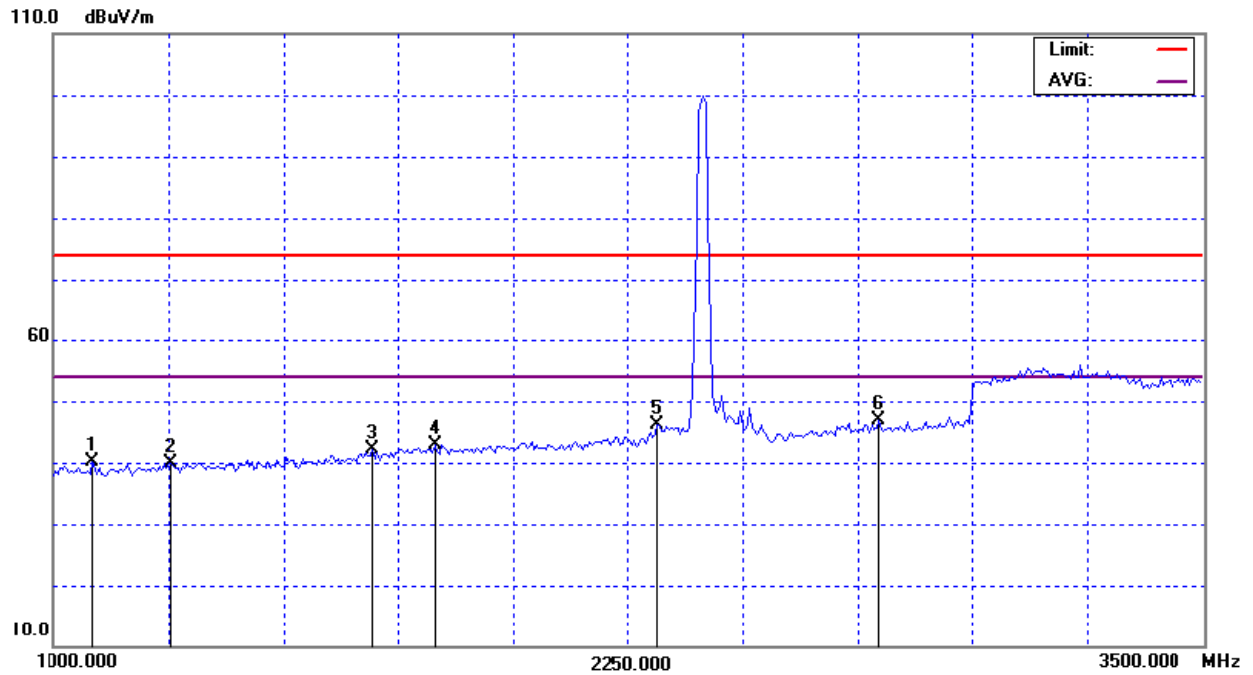

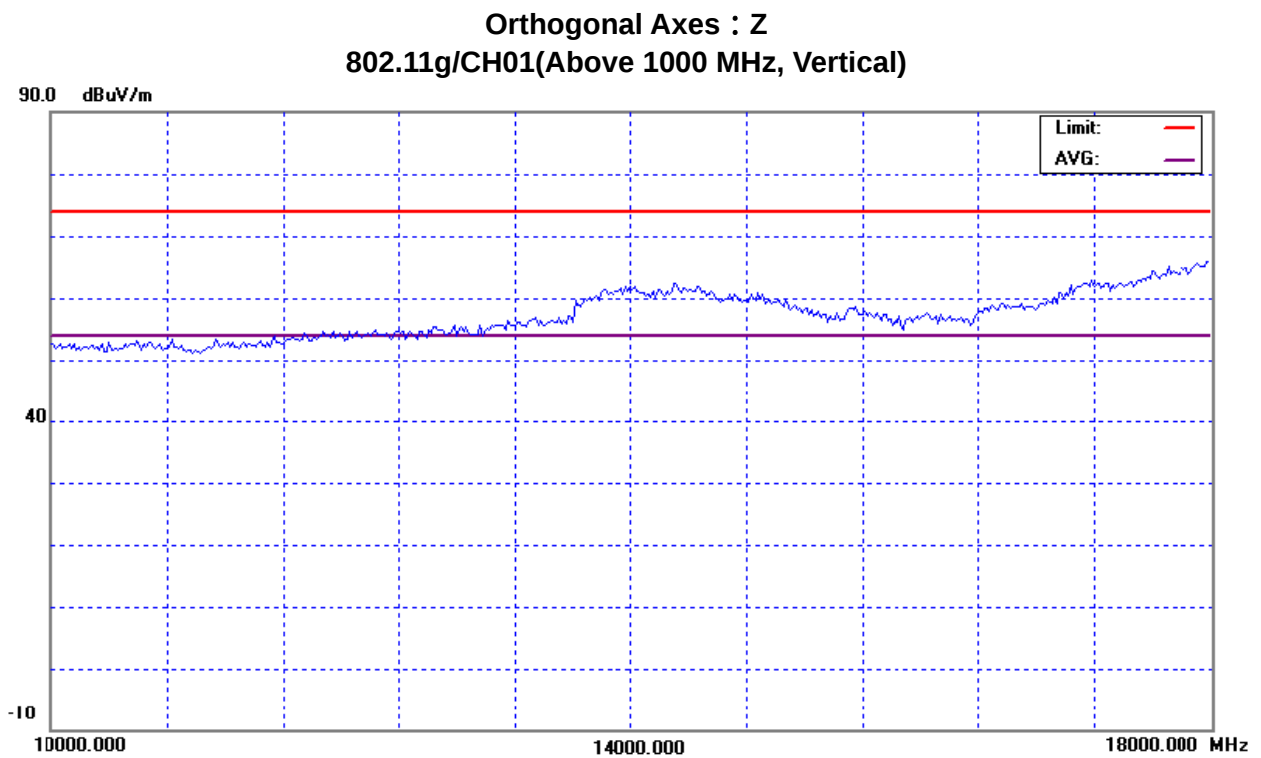



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH01		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1060.00	H	48.23	*	-8.77	39.46	*	74.00	54.00	Z/H
1350.00	H	48.31	*	-7.44	40.87	*	74.00	54.00	Z/H
1465.00	H	47.76	*	-6.92	40.84	*	74.00	54.00	Z/H
1760.00	H	47.77	*	-5.31	42.46	*	74.00	54.00	Z/H
2025.00	H	47.13	*	-3.92	43.21	*	74.00	54.00	Z/H
2765.00	H	47.86	*	-1.67	46.19	*	74.00	54.00	Z/H
4826.00	H	46.44	35.15	3.13	49.57	38.28	74.00	54.00	Z/H
7236.00	H	41.33	*	7.47	48.80	*	74.00	54.00	Z/H
9648.00	H	42.44	28.89	9.97	52.41	38.86	74.00	54.00	Z/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Z
802.11g/CH01(Above 1000 MHz, Horizontal)

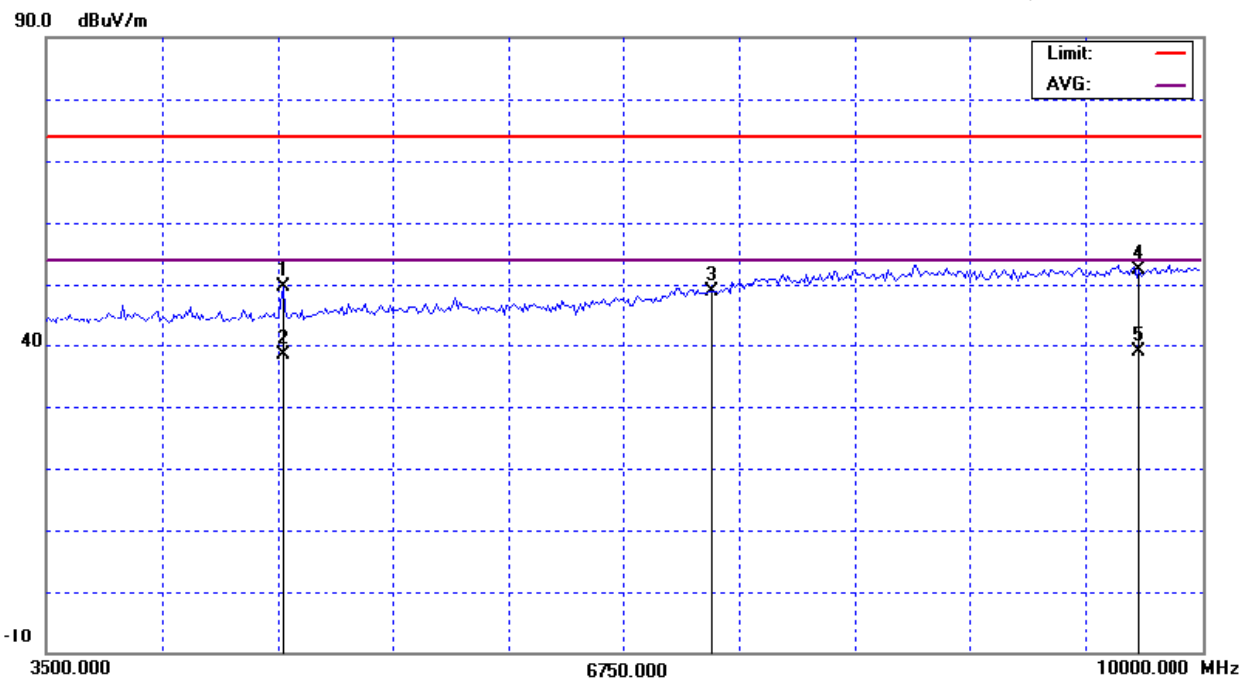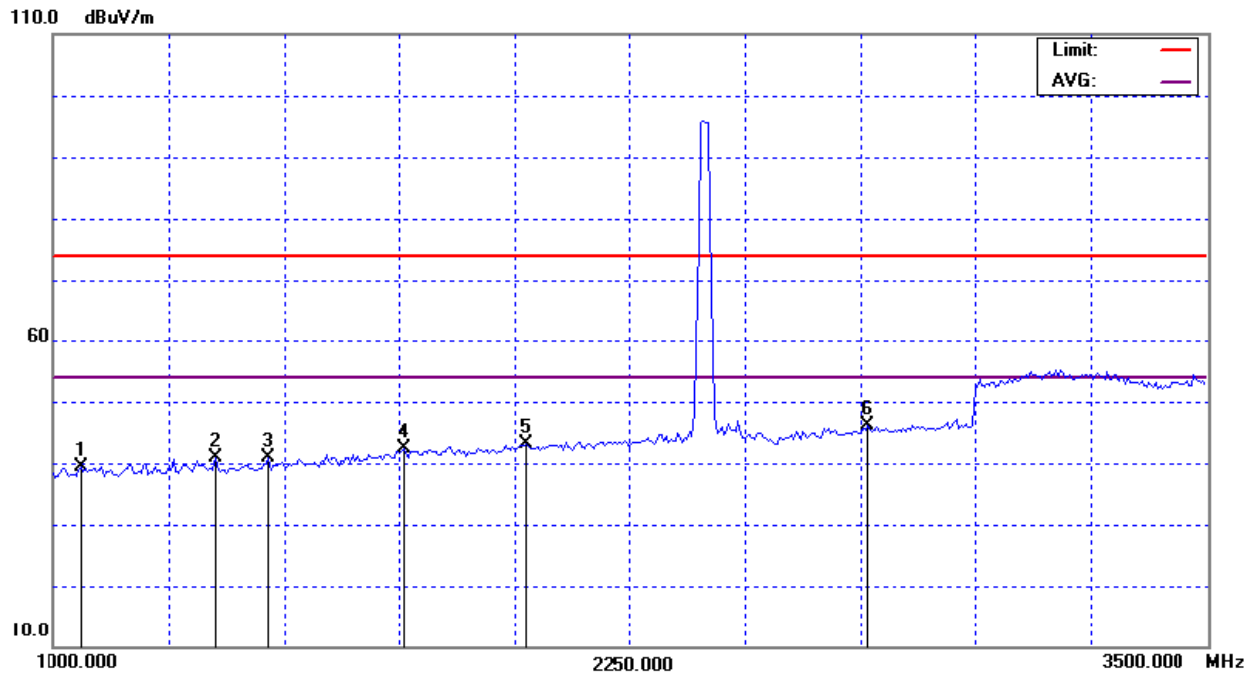

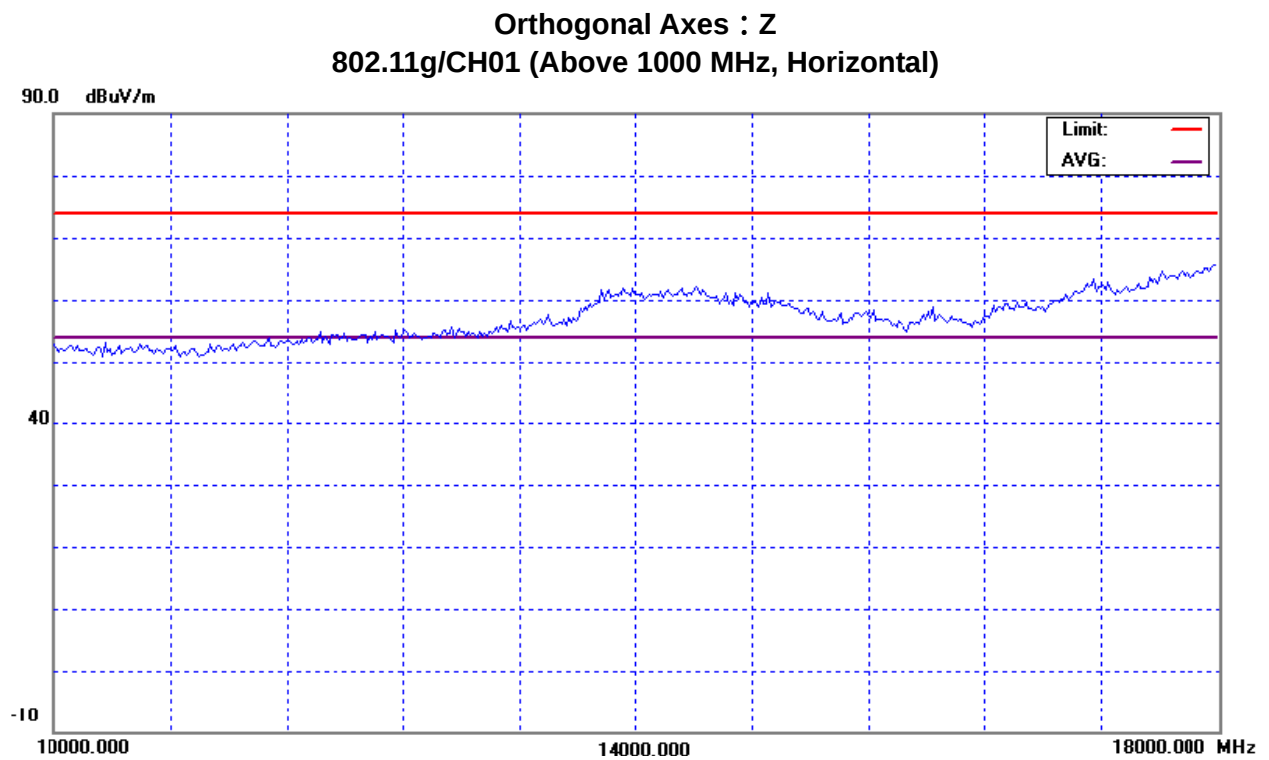



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH06		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1135.00	V	49.18	*	-8.42	40.76	*	74.00	54.00	X/H
1400.00	V	47.44	*	-7.22	40.22	*	74.00	54.00	X/H
1700.00	V	47.70	*	-5.65	42.05	*	74.00	54.00	X/H
1995.00	V	47.70	*	-4.01	43.69	*	74.00	54.00	X/H
2115.00	V	47.52	*	-3.69	43.83	*	74.00	54.00	X/H
2825.00	V	48.07	*	-1.43	46.64	*	74.00	54.00	X/H
4878.00	V	47.18	37.15	3.25	50.43	40.40	74.00	54.00	X/H
7311.00	V	41.36	*	7.80	49.16	*	74.00	54.00	X/H
9748.00	V	42.76	29.16	10.05	52.81	39.21	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown “ * ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
“X” - denotes Laid on Table ; “Y” - denotes Vertical Stand ; “Z” - denotes Side Stand

Orthogonal Axes : X
802.11g/CH06(Above 1000 MHz, Vertical)

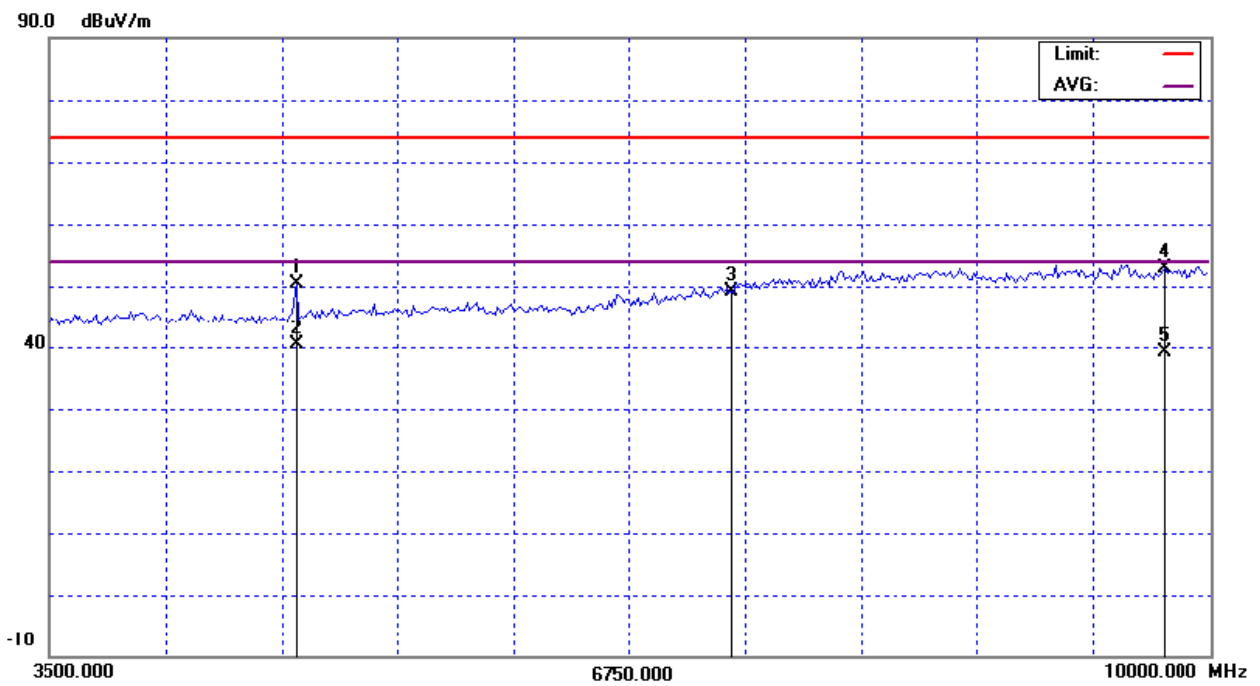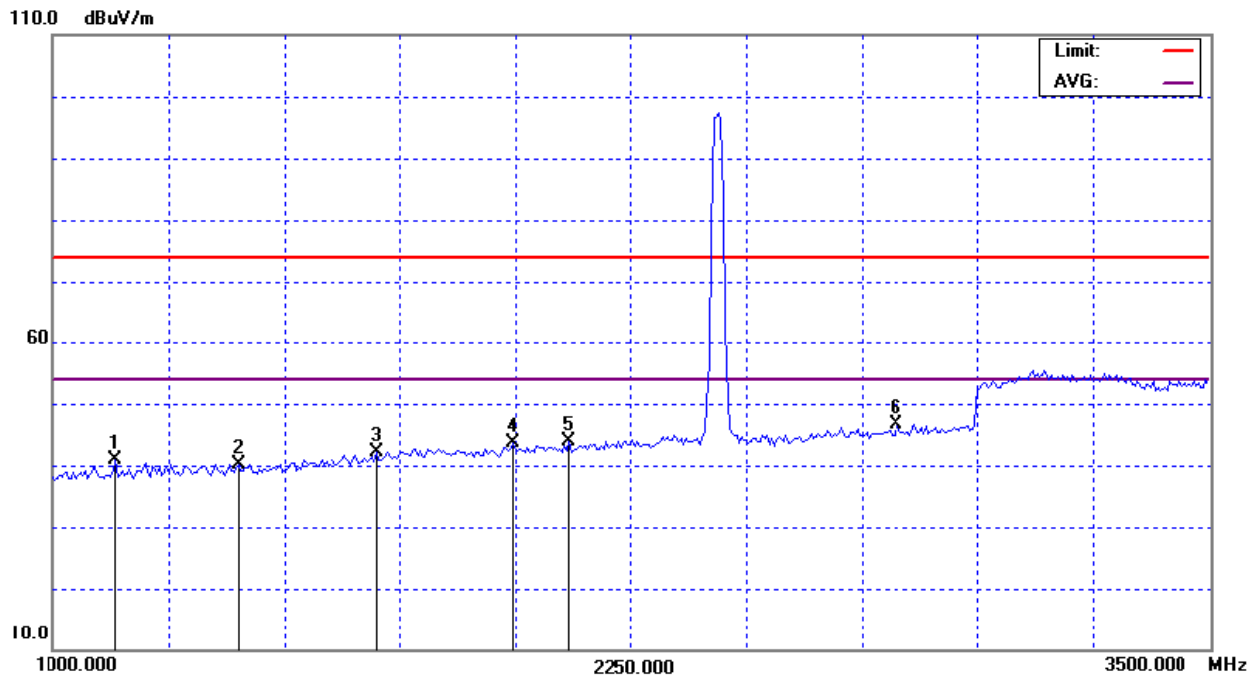

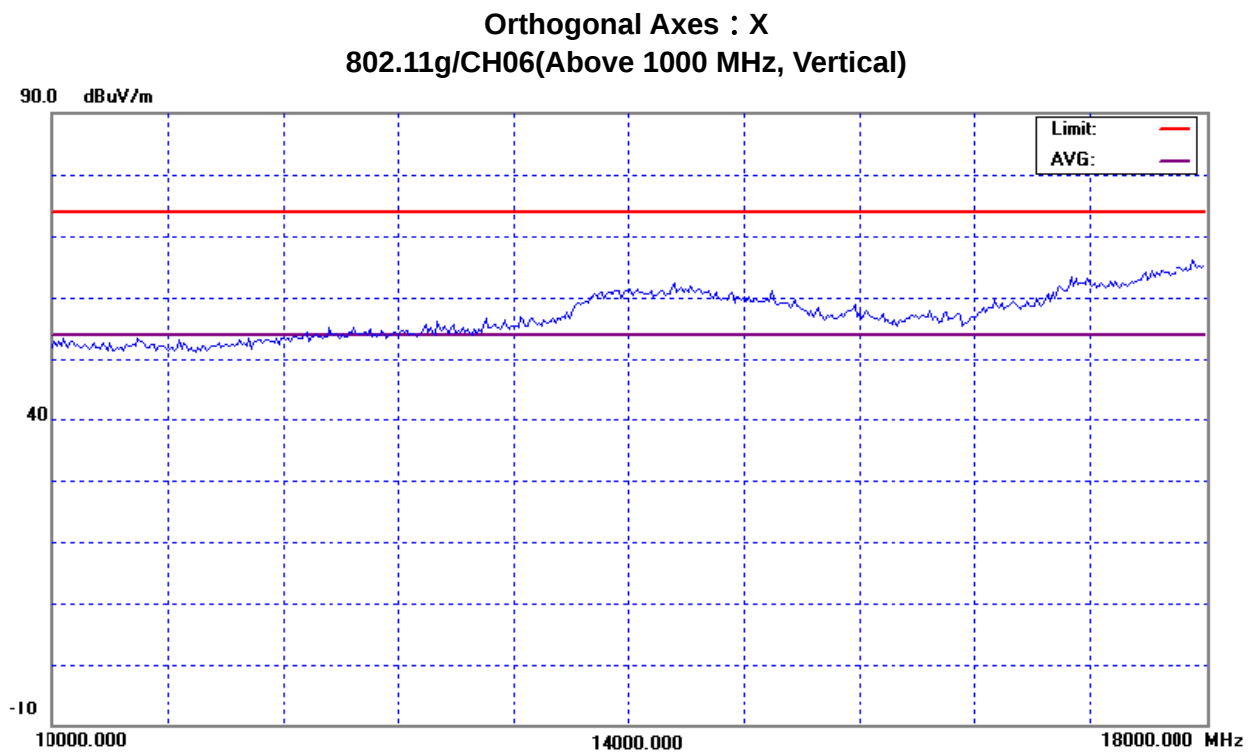



EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH06		


Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1155.00	H	48.24	*	-8.33	39.91	*	74.00	54.00	X/H
1450.00	H	47.54	*	-6.99	40.55	*	74.00	54.00	X/H
1685.00	H	48.12	*	-5.73	42.39	*	74.00	54.00	X/H
1950.00	H	47.63	*	-4.26	43.37	*	74.00	54.00	X/H
2330.00	H	47.39	*	-3.14	44.25	*	74.00	54.00	X/H
2890.00	H	47.87	*	-1.18	46.69	*	74.00	54.00	X/H
4878.00	H	44.34	33.12	3.25	47.59	36.37	74.00	54.00	X/H
7311.00	H	41.03	*	7.80	48.83	*	74.00	54.00	X/H
9748.00	H	42.36	29.00	10.05	52.41	39.05	74.00	54.00	X/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : X
802.11g/CH06(Above 1000 MHz, Horizontal)

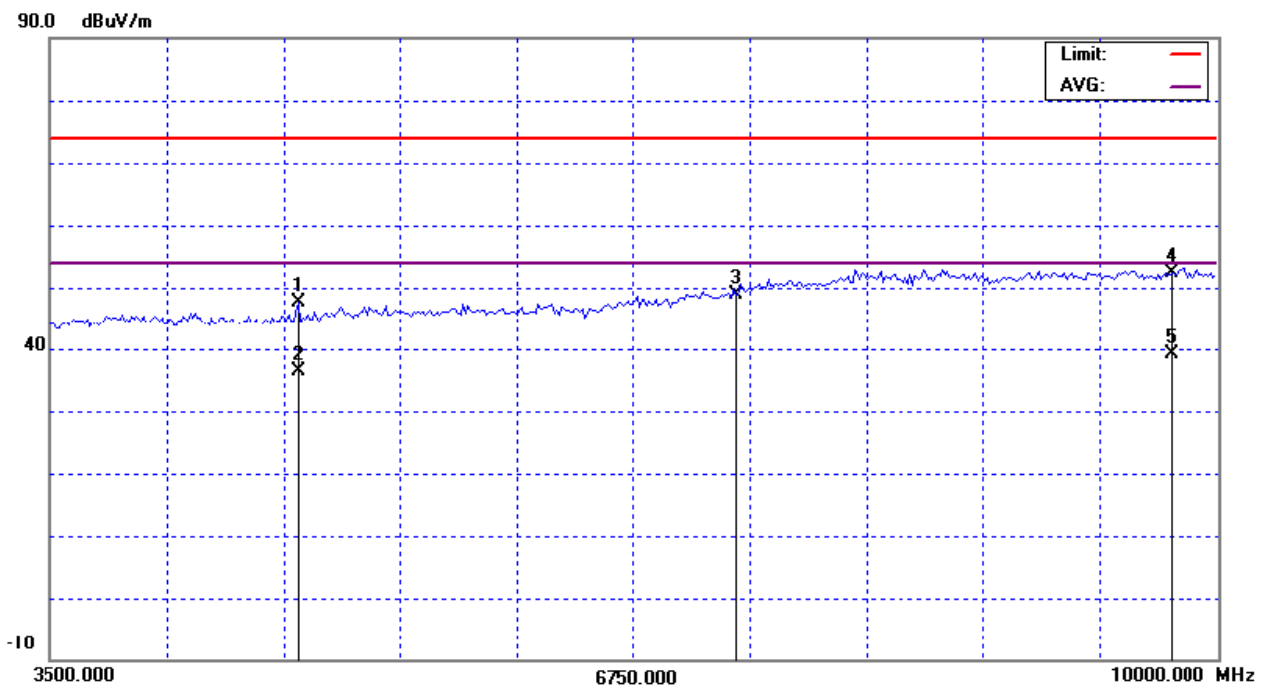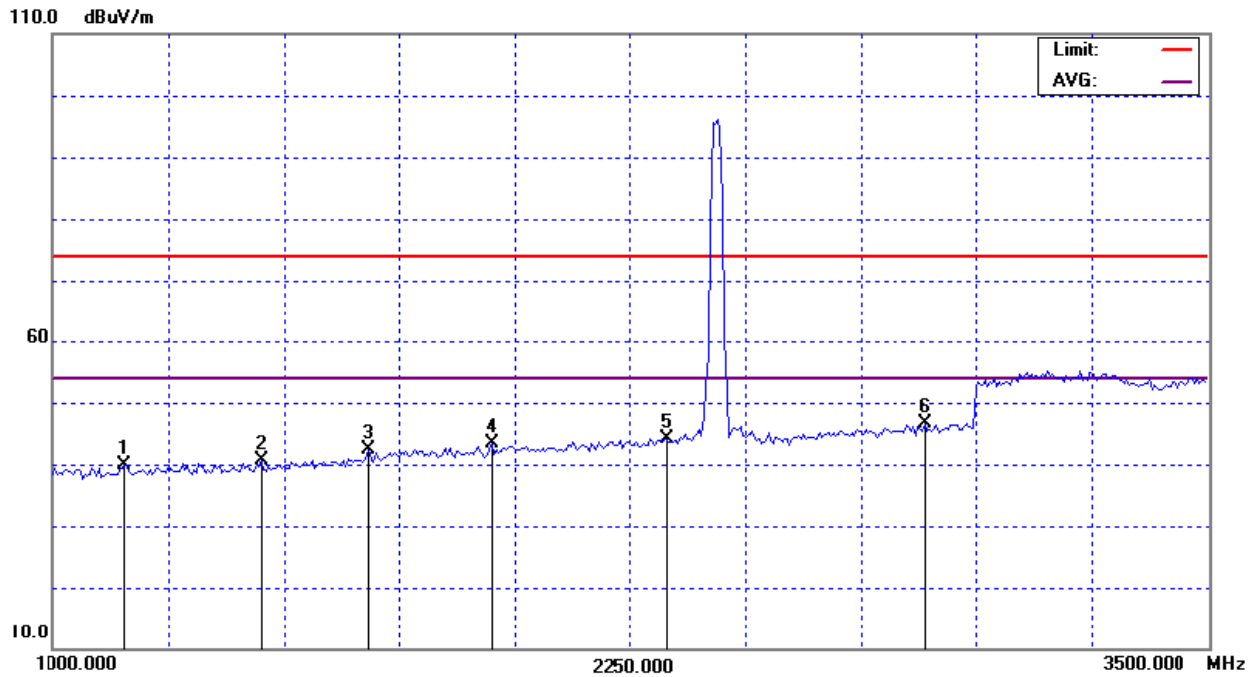

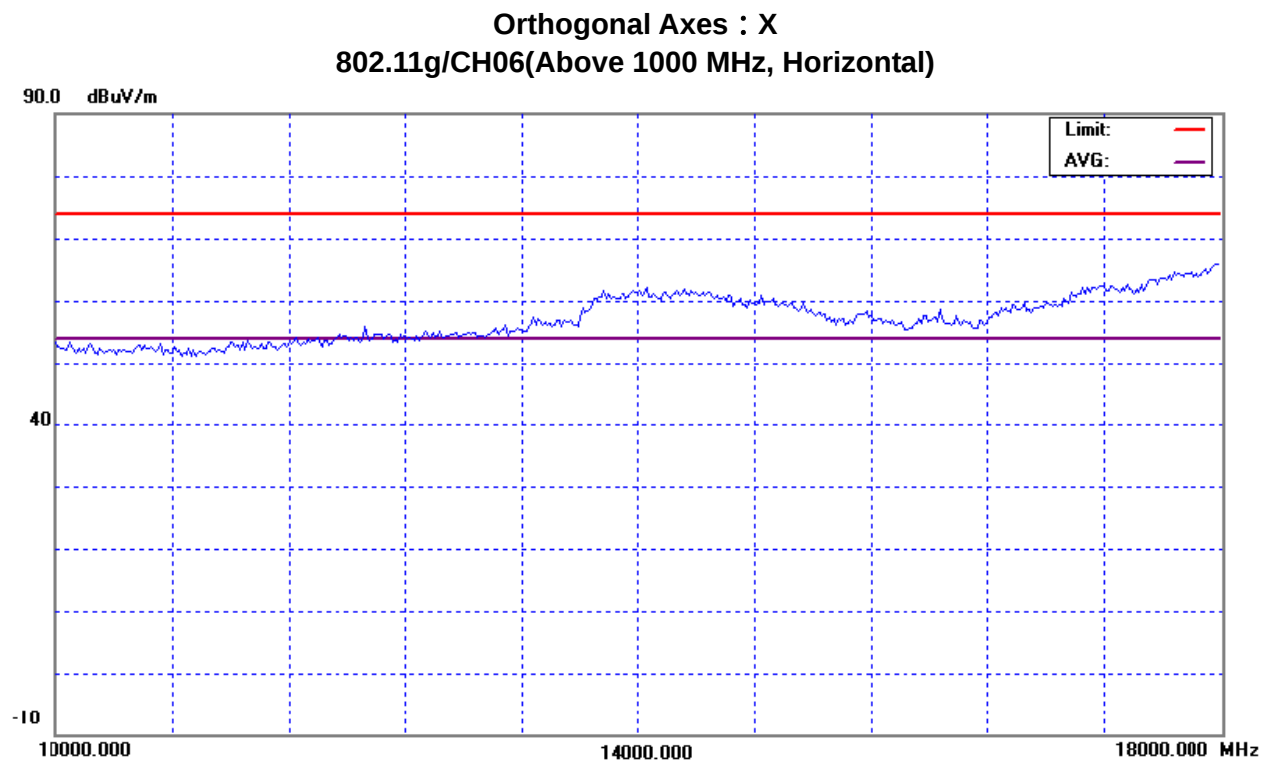

EUT :	@pod (Wireless IP Multimedia Phone)	Model No. :	E800
Temperature :	25 °C	Relative Humidity :	60 %
Pressure :	1009 hPa	Test Power :	AC 120V/60Hz
Test Mode :	802.11g/CH06		

Freq. (MHz)	Ant.Pol. H/V	Reading		Ant./CF CF(dB)	Act.		Limit		Note
		Peak (dBuV)	AV (dBuV)		Peak (dBuV/m)	AV (dBuV/m)	Peak (dBuV/m)	AV (dBuV/m)	
1080.00	V	48.79	*	-8.68	40.11	*	74.00	54.00	Y/H
1225.00	V	49.05	*	-8.01	41.04	*	74.00	54.00	Y/H
1445.00	V	47.22	*	-7.01	40.21	*	74.00	54.00	Y/H
1720.00	V	47.97	*	-5.54	42.43	*	74.00	54.00	Y/H
2075.00	V	47.09	*	-3.79	43.30	*	74.00	54.00	Y/H
2860.00	V	48.34	*	-1.30	47.04	*	74.00	54.00	Y/H
4878.00	V	48.03	37.41	3.25	51.28	40.66	74.00	54.00	Y/H
7311.00	V	41.17	*	7.80	48.97	*	74.00	54.00	Y/H
9748.00	V	41.78	*	10.05	51.83	*	74.00	54.00	Y/H

Remark :

- (1) Spectrum Setting : 30MHz – 1000MHz , RBW= 100KHz, VBW=100KHz, Sweep time = 200 ms. 1GHz- 25GHz, RBW= 1MHz, VBW= 1MHz, Sweep time = 200 ms
- (2) All readings are Peak unless otherwise stated QP in column of 『Note』 . Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform ◦
- (3) Measuring frequency range from 30MHz to 1000MHz or the 10th harmonic of highest fundamental frequency ◦ "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency. (This judgment method includes the Band Edge Requirement.)
- (4) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission ◦
- (5) Data of measurement within this frequency range shown " * " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (6) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (7) EUT Orthogonal Axes :
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand

Orthogonal Axes : Y
802.11g/CH06(Above 1000 MHz, Vertical)

