

# SUBMITTAL APPLICATION REPORT

# FOR GRANT OF CERTIFICATION

**FOR** 

MODEL: F50 5740-5825 MHz Broadband Wireless Data Transmitter

**FOR** 

# **DBII NETWORKS LIMITED**

201 Oak Ave, #D Carlsbad, CA 92008

Test Report Number: 090908

Authorized Signatory: Scot DRogers

Scot D. Rogers

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 1 of 36





# ROGERS LABS, INC.

4405 West 259<sup>th</sup> Terrace Louisburg, KS 66053 Phone / Fax (913) 837-3214

# ENGINEERING TEST REPORT For APPLICATION of GRANT of CERTIFICATION

FOR
CFR 47, PART 15C - INTENTIONAL RADIATORS
CFR47 Paragraph 15.247
License Exempt Intentional Radiator

For

## **DBII NETWORKS LIMITED**

201 Oak Ave, #D Carlsbad, CA 92008

#### BROADBAND WIRELESS DATA TRANSMITTER

Model: F50 Frequency Range 5740-5825 MHz FCC ID#: VKVF50

Test Date: September 8, 2009

Certifying Engineer: Scot DRogers

Scot D. Rogers Rogers Labs, Inc. 4405 West 259<sup>th</sup> Tei

4405 West 259<sup>th</sup> Terrace Louisburg, KS 66053

Telephone / Facsimile: (913) 837-3214

This report shall not be reproduced except in full, without the written approval of the laboratory. This report must not be used by the client to claim product endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fay: (913) 837-3214

Phone/Fax: (913) 837-3214 Revision 1 DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt

SN: ENG1 Page 2 of 36

Date: December 18, 2009

FCC ID#: VKVF50



# **Table Of Contents**

TABLE OF CONTENTS	3
FORWARD	5
OPINION / INTERPRETATION OF RESULTS	5
ENVIRONMENTAL CONDITIONS	5
EQUIPMENT TESTED	5
2.1033(B) APPLICATION FOR CERTIFICATION	6
APPLICABLE STANDARDS & TEST PROCEDURES	6
EQUIPMENT FUNCTION AND TESTING PROCEDURES	7
EQUIPMENT AND CABLE CONFIGURATIONS	7
AC Line Conducted Emission Test Procedure	7
Radiated Emission Test Procedure	8
UNITS OF MEASUREMENTS	8
TEST SITE LOCATIONS	8
LIST OF TEST EQUIPMENT	9
SUBPART B – UNINTENTIONAL RADIATORS	10
AC Line Conducted EMI	10
Figure 1 AC Line Conducted Emissions Line 1	11 11
Radiated EMI	12
Figure three General Radiated Emissions taken at 1 meter in screen room.  Figure four General Radiated Emissions taken at 1 meter in screen room.  Figure five General Radiated Emissions taken at 1 meter in screen room.  Figure six General Radiated Emissions taken at 1 meter in screen room.  Figure seven General Radiated Emissions taken at 1 meter in screen room.  Figure eight General Radiated Emissions taken at 1 meter in screen room.  AC Line Conducted Emissions Data (7 Highest Emissions).  General Radiated Emissions Data from EUT (Highest Emissions).	
Summary of Results for AC Line Conducted Emissions	
Summary of Results for General Radiated Emissions	
Statement of Modifications and Deviations	
SUBPART C - INTENTIONAL RADIATORS	17

Rogers Labs, Inc.

4405 W. 259th Terrace
Louisburg, KS 66053
Phone/Fax: (913) 837-3214

DBii Networks Limited
Model: F50
Test #: 090908
Test to: FCC (15.247) Revision 1

File: DBii F50 15c TestRpt

SN: ENG1 Page 3 of 36

Date: December 18, 2009

FCC ID#: VKVF50



15.203 Antenna Requirements	17
15.205 Restricted Bands of Operation	17
Radiated Emissions in Restricted Bands Data (worst-case)	18
Summary of Results for Radiated Emissions in Restricted Bands	19
Statement of Modifications and Deviations	19
15.209 Radiated Emissions Limits; General Requirements	19
General Radiated Emissions from EUT Data (Highest Emissions)	20
Summary of Results for General Radiated Emissions	
15.247 Operation in the Band 5725-5850 MHz	21
Figure 9 Operations at three frequencies in band	
Figure 10 Maximum output power at three frequencies in band	
Figure 11 6dB Band width Requirement plot taken in screen room	22
Figure 12 6dB Band width Requirement plot taken in screen room	
Figure 13 6dB Band width Requirement plot taken in screen room	
Figure 14 Power Spectral Density plot taken in screen room	
Figure 15 Power Spectral Density plot taken in screen room	
Figure 16 Power Spectral Density plot taken in screen room	
Figure 18 Antenna Conducted Emission plot taken in screen room	
Figure 19 Antenna Conducted Emission plot taken in screen room	
Figure 20 Antenna Conducted Emission plot taken in screen room	
Figure 21 Antenna Conducted Emission plot taken in screen room	
Transmitter Information and Data	
Radiated Emissions from EUT Data (23 dBi Panel)	28
Radiated Emissions from EUT Data (27 dBi Grid)	
Radiated Emissions from EUT Data (32.5 dBi Dish)	
Summary of Results for Radiated Emissions of Intentional Radiator	30
Statement of Modifications and Deviations	30
ANNEX	31
Annex A Measurement Uncertainty Calculations	_
Annex B Test Equipment List For Rogers Labs, Inc	
Annex C Qualifications	
Anney D FCC Site Registration Letter	36

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214 Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt

SN: ENG1

FCC ID#: VKVF50

Page 4 of 36 Date: December 18, 2009



#### **Forward**

The following information is submitted for consideration in obtaining a Grant of Certification for a License Exempt Intentional Radiator operating under CFR47 Paragraph 15.247.

Name of Applicant: DBII NETWORKS LIMITED 201 Oak Ave, #D Carlsbad, CA 92008

Model: F50

FCC I.D.: VKVF50 FRN: 0016 81 8056

Frequency Range: 5740-5825 MHz

Operating Power: 524 mW conducted power (Restricted to channels between 5740-5825).

**Opinion / Interpretation of Results** 

Tests Performed	Results
Emissions Tests	
Emissions as per CFR47 paragraphs 2 and 15.205	Complies
Emissions as per CFR47 paragraphs 2 and 15.209	Complies
Emissions as per CFR47 paragraphs 2 and 15.247	Complies

#### **Environmental Conditions**

Ambient Temperature 23.1° C

Relative Humidity 48%

Atmospheric Pressure 1015.3 mb

**Equipment Tested** 

 Equipment
 Model
 FCC I.D.#

 EUT
 F50
 VKVF50

Interface support board DBii N/A

Rogers Labs, Inc. DBii Networks Limited FCC ID#: VKVF50

4405 W. 259th Terrace Model: F50

Louisburg, KS 66053 Test #: 090908 SN: ENG1 Phone/Fax: (913) 837-3214 Test to: FCC (15.247) Page 5 of 36

Revision 1 File: DBii F50 15c TestRpt Date: December 18, 2009



# 2.1033(b) Application for Certification

**(1)** Manufacturer: **DBII NETWORKS LIMITED** 

> 201 Oak Ave, #D Carlsbad, CA 92008

Model: F50 Identification: (2)

FCC I.D.: VKVF50

(3) Instruction Book:

Refer to Exhibit for Instruction Manual.

**(4) Description of Circuit Functions:** Refer to Exhibit of Operational Description.

(5) Block Diagram with Frequencies: Refer to Exhibit of Operational Description.

(6) Report of Measurements: Report of measurements follows in this Report.

- **(7)** Photographs: Construction, Component Placement, etc.: Refer to Exhibit for photographs of equipment.
- (8) No Peripheral Equipment was Necessary for operation. A laptop computer was used for testing purposes.
- (9) Transition Provisions of 15.37 are not being requested.
- (10)Not Applicable. The unit is not a scanning receiver.
- Not Applicable. The EUT does not operate in the 59-64 GHz frequency band. (11)

# **Applicable Standards & Test Procedures**

In accordance with the Federal Communications Code of Federal Regulations, dated October 1, 2008, Part 2, Subpart J, Paragraphs 2.907, 2.911, 2.913, 2.925, 2.926, 2.1031 through 2.1057, and applicable parts of paragraph 15, Part 15C Paragraph 15.247 the following information is submitted.

Test procedures used are the established Methods of Measurement of Radio-Noise Emissions as described in the ANSI 63.4-2003 Document FCC, documents DA00-1407 and DA00-705 and/or

TIA/EIA 603-1. Testing for the line-conducted emissions were performed as defined in sections

Rogers Labs, Inc. DBii Networks Limited 4405 W. 259th Terrace Model: F50 Louisburg, KS 66053

Test #: 090908 Test to: FCC (15.247)

SN: ENG1 Page 6 of 36

FCC ID#: VKVF50

Phone/Fax: (913) 837-3214 Revision 1

File: DBii F50 15c TestRpt Date: December 18, 2009



8 and 13.1.3, testing of the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4. Testing of the intentional radiated emissions was performed as defined in section 13 of ANSI C63.4.

# **Equipment Function and Testing Procedures**

The EUT is a 5740-5825 MHz radio mini PCI interface transmitter module used to transmit data in applications offering broadband wireless connectivity. The unit is marketed for use to incorporate a wireless link to exchange data information from one point to another. For testing purposes the F50 transceiver was placed in an interface support board allowing for operating power and communications over the network interface between the EUT and supporting computer system. The support interface board receives power from a Power Over Ethernet (POE) AC adapter. The F50 receives power form the support interface board and offers no provision to connect to utility power systems. The F50 design incorporates modulation limiting, power regulation, shielding, and a MMCX antenna connection point. No other interfacing options are provided on the design. For testing purposes F50 and support interface board was powered from the POE AC power adapter supply and set to transmit in all maximum data modes available. The device is marketed for professionally installed use and the antenna connection complies with the unique antenna connection requirements.

# **Equipment and Cable Configurations**

#### AC Line Conducted Emission Test Procedure

The F50 operates from DC power only and must be installed in an interface support board offering DC power and interface capability. The interface support board with the F50 installed was operated using the manufacturer supplied AC/DC POE power supply. For testing purposes, the manufacturer supplied AC/DC POE power supply was used to power the system. Testing for the AC line-conducted emissions testing was performed as defined in sections 8 and 13.1.3 of ANSI C63.4. The test setup including the EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench, 0.8 meters high located in a screen room. The power lines of the system were isolated from the power source using a standard LISN with a 50  $\mu$ Hy choke. EMI was coupled to the spectrum analyzer through a 0.1  $\mu$ F capacitor

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt

SN: ENG1 Page 7 of 36

FCC ID#: VKVF50

NVLAP Lab Code 200087-0

internal to the LISN. The LISN was positioned on the floor beneath the wooden bench supporting the EUT. The power lines and cables were draped over the back edge of the table.

#### Radiated Emission Test Procedure

The EUT was placed on a rotating 1 x 1.5-meter wooden platform, 0.8 meters above the ground plane at a distance of 3 meters from the FSM antenna. Testing for the radiated emissions was performed as defined in sections 8 and 13.1.4 of ANSI C63.4. EMI energy was maximized by equipment placement, raising and lowering the FSM antenna, changing the antenna polarization, and by rotating the turntable. Each emission was maximized before data was taken using a spectrum analyzer. Refer to photographs in the test setup exhibits for EUT placement during testing.

#### **Units of Measurements**

Conducted EMI Data is in dBµV; dB referenced to one microvolt.

Radiated EMI Data is in dBµV/m; dB/m referenced to one microvolt per meter.

#### **Test Site Locations**

Conducted EMI The AC power line conducted emissions testing performed in a shielded

screen room located at Rogers Labs, Inc., 4405 W. 259th Terrace,

Louisburg, KS.

Radiated EMI The radiated emissions tests were performed at the 3 meters, Open Area

Test Site (OATS) located at Rogers Labs, Inc., 4405 W. 259<sup>th</sup> Terrace,

Louisburg, KS.

Site Approval Refer to Annex for Site Registration Letter

Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247)

File: DBii F50 15c TestRpt

FCC ID#: VKVF50

SN: ENG1 Page 8 of 36



# **List of Test Equipment**

A Hewlett Packard 8591EM Spectrum Analyzer was used as the measuring device for the emissions testing of frequencies below 1 GHz. A Hewlett Packard 8562A Spectrum Analyzer was used as the measuring device for testing the emissions at frequencies above 1 GHz. The analyzer settings used are described in the following table. Refer to the annex for a complete list of test equipment.

HP 8591 EM ANALYZER SETTINGS							
CONDUCTED EMISSIONS							
RBW	AVG. BW	DETECTOR FUNCTION					
9 kHz	30 kHz	Peak / Quasi Peak					
	RADIATED EMISSIONS						
RBW	RBW AVG. BW DETECTOR F						
120 kHz	300 kHz	Peak / Quasi Peak					
НР	8562A ANALYZER SETTIN	GS					
RBW	VIDEO BW	DETECTOR FUNCTION					
100 kHz	100 kHz	PEAK					
1 MHz	1 MHz Peak / Average						

Equipment	Mfg.	Model	Cal. Date	Due.
LISN	Comp. Design	FCC-LISN-2-MOD.CD	10/08	10/09
LISN	Comp. Design	1762	2/09	2/10
Antenna	ARA	BCD-235-B	10/08	10/09
Antenna	EMCO	3147	10/08	10/09
Antenna	EMCO	3143	5/09	5/10
Analyzer	HP	8591EM	5/09	5/10
Analyzer	HP	8562A	5/09	5/10

Rogers Labs, Inc. 4405 W. 259th Terrace wisburg, KS 66053

Revision 1

DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 9 of 36



# Subpart B - Unintentional Radiators

#### AC Line Conducted EMI

The EUT was arranged in a typical equipment configuration and placed on a 1 x 1.5-meter wooden bench 80 cm above the conducting ground plane, floor of a screen room. The bench was positioned 40 cm away from the wall of the screen room. The LISN was positioned on the floor of the screen room 80-cm from the rear of the EUT. The manufacturer supplied AC power adapter for the EUT was connected to the LISN. A second LISN was positioned on the floor of the screen room 80-cm from the rear of the supporting equipment of the EUT. All power cords except the EUT were then powered from the second LISN. EMI was coupled to the spectrum analyzer through a 0.1 µF capacitor, internal to the LISN. Power line conducted emissions testing were carried out individually for each current carrying conductor of the EUT. The excess length of lead between the system and the LISN receptacle was folded back and forth to form a bundle not exceeding 40 cm in length. The screen room, conducting ground plane, analyzer, and LISN were bonded together to the protective earth ground. Preliminary testing was performed to identify the frequency of each radio frequency emission displaying the highest amplitude. The cables were repositioned to obtain maximum amplitude of measured EMI level. Once the worstcase configuration was identified, plots were made of the EMI from 0.15 MHz to 30 MHz then the data was recorded with maximum conducted emissions levels. Refer to figures one and two for plots of the AC Line conducted emissions.

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247)

File: DBii F50 15c TestRpt

SN: ENG1 Page 10 of 36

FCC ID#: VKVF50



MARKER 200 kHz 59.83 dBµV ACTV DET: PEAK

MEAS DET: PEAK QP AVG
MKR 200 kHz

59.83 dBuV

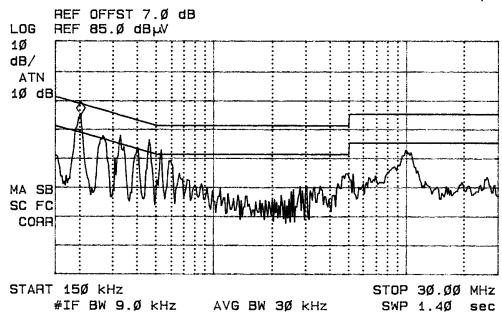


Figure 1 AC Line Conducted Emissions Line 1

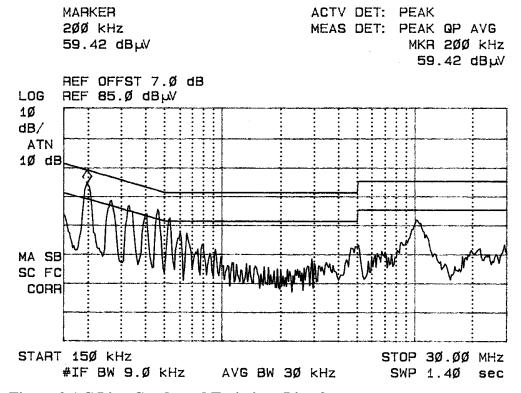


Figure 2 AC Line Conducted Emissions Line 2

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 11 of 36

NVLAP Lab Code 200087-0

#### Radiated EMI

The EUT was arranged in a typical equipment configuration and operated through all available modes with worst-case data recorded. The antenna port was connected to a 50-ohm load and operated through all available modes for general radiated emissions testing. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Plots were made of the radiated frequency spectrum from 30 MHz to 22,000 MHz for the preliminary testing. Refer to figures three through eight for plots of the general radiated emissions spectrum taken in a screen room. The highest radiated emission was then remaximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the OATS at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 22,000 MHz was searched for general radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna position between horizontal and vertical polarization. Antennas used were Broadband Biconical from 30 to 200 MHz, Biconilog from 30 to 1000 MHz, Log Periodic from 200 MHz to 5 GHz and or, pyramidal horns and mixers from 4 GHz to 40 GHz, notch filters and appropriate amplifiers were utilized.

Sample Calculations:

RFS = Radiated Field Strength  $dB\mu V/m$  @  $3m = dB\mu V + A.F.$  - Amplifier Gain  $dB\mu V/m$  @ 3m = 39.7 + 7.8 - 30 = 17.5

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Prione/Fax: (913) 837-321 Revision 1 DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247)

File: DBii F50 15c TestRpt

FCC ID#: VKVF50

SN: ENG1 Page 12 of 36



MARKER 75.5 MHz 35.39 dBµV

ACTV DET: PEAK MEAS DET: PEAK QP

> MKR 75.5 MHz 35.39 dBµV

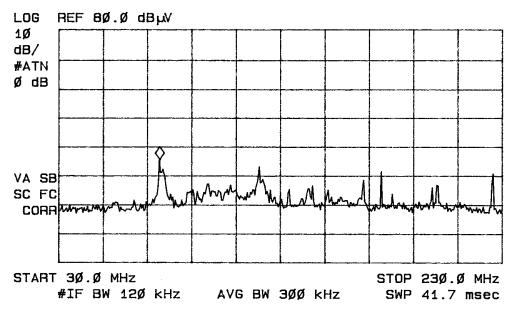


Figure three General Radiated Emissions taken at 1 meter in screen room.

MARKER 3Ø3 MHz 32.19 dB W

ACTV DET: PEAK MEAS DET: PEAK QP

MKR 3Ø3 MHz 32.19 dB W

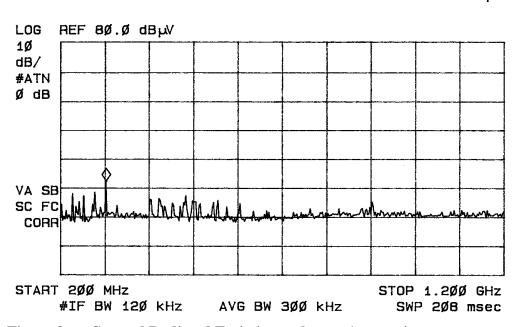


Figure four General Radiated Emissions taken at 1 meter in screen room.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 1

DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 13 of 36



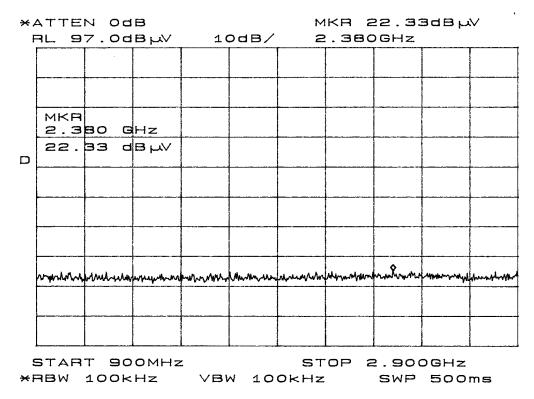


Figure five General Radiated Emissions taken at 1 meter in screen room.

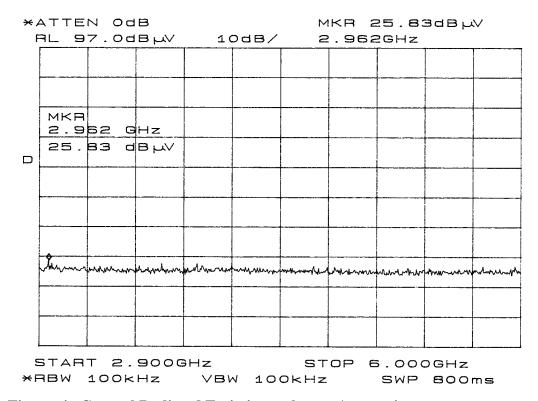


Figure six General Radiated Emissions taken at 1 meter in screen room.

Phone/Fax: (913) 837-3214 Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 14 of 36



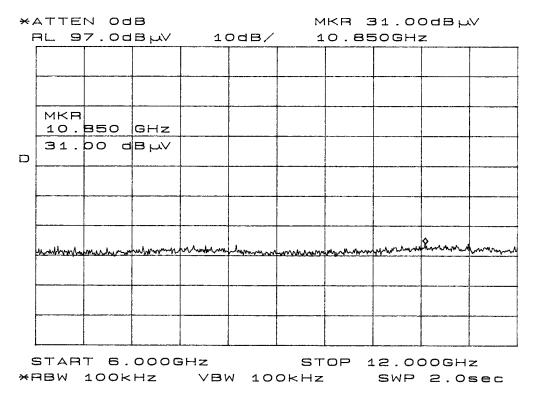


Figure seven General Radiated Emissions taken at 1 meter in screen room.

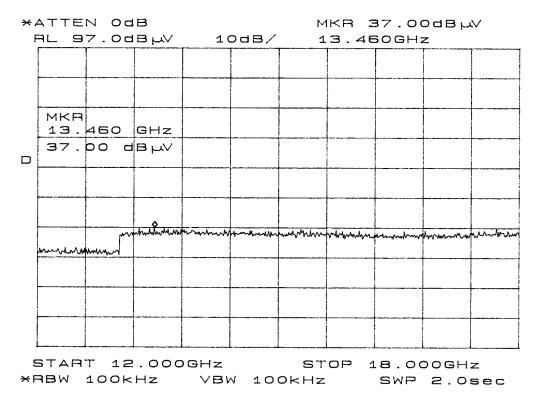


Figure eight General Radiated Emissions taken at 1 meter in screen room.

Phone/Fax: (913) 837-3214 Revision 1

DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 15 of 36



#### **AC Line Conducted Emissions Data (7 Highest Emissions)**

Frequency band	L1				CISPR 22 Limit Q.P.		
(MHz)	Peak	Q.P.	AVE	Peak	Q.P.	AVE	Ave(dBμV)
0.15 - 0.5	59.8	54.5	43.5	59.4	54.5	42.8	65 / 55
0.5 - 5	47.5	44.1	40.1	49.8	47.6	41.8	56 / 46
5 – 10	47.7	45.0	33.4	46.6	43.0	33.0	60 / 50
10 – 15	47.4	43.1	30.9	46.5	43.9	33.0	60 / 50
15 – 20	35.8	30.6	19.3	32.8	28.8	19.5	60 / 50
20 – 25	34.6	29.9	19.6	36.2	29.1	20.7	60 / 50
25 – 30	36.3	30.3	22.8	32.8	27.8	19.7	60 / 50

Other emissions present had amplitudes at least 10 dB below the limit.

# **General Radiated Emissions Data from EUT (Highest Emissions)**

Frequency in MHz	FSM Horz. (dBµV)	FSM Vert. (dBµV)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	FCC Class B Limit @ 3m (dBµV/m)
75.0	39.7	43.0	7.8	30	17.5	20.8	40.0
116.7	55.5	49.8	8.7	30	34.2	28.5	43.5
120.0	49.2	53.2	7.1	30	26.3	30.3	43.5
133.4	52.8	52.2	8.5	30	31.3	30.7	43.5
142.4	39.2	49.6	12.1	30	21.3	31.7	43.5
144.0	39.4	51.4	12.1	30	21.5	33.5	43.5
175.0	48.0	37.2	9.0	30	27.0	16.2	43.5
200.0	54.1	45.0	10.4	30	34.5	25.4	43.5
225.0	48.7	41.6	11.2	30	29.9	22.8	46.0
250.0	49.3	51.1	12.3	30	31.6	33.4	46.0
275.0	47.3	43.8	12.7	30	30.0	26.5	46.0
300.0	45.7	50.9	14.0	30	29.7	34.9	46.0
400.0	42.2	40.1	16.6	30	28.8	26.7	46.0
420.0	44.3	34.4	16.9	30	31.2	21.3	46.0
480.0	48.3	49.1	17.9	30	17.5	20.8	40.0

Other emissions present had amplitudes at least 15 dB below the limit.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-32

Phone/Fax: (913) 837-3214 Revision 1 DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247)

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 16 of 36



### Summary of Results for AC Line Conducted Emissions

The conducted emissions for the EUT meet the requirements for CISPR 22 and FCC Part 15B CLASS B Digital Devices. The EUT had an 8.4 dB minimum margin below the Quasi-Peak limit, and a 4.2 dB minimum margin below the CISPR average limit. Measurements were taken using the peak, quasi peak, and average, measurement function for each emissions amplitude and were below the limits stated in the specification. Other emissions were present with recorded data representing worst-case amplitudes.

### Summary of Results for General Radiated Emissions

The general radiated emissions for the EUT meet the requirements for CISPR 22 and FCC Part 15B CLASS B Digital Devices. The EUT had a 9.0 dB minimum margin below the quasi-peak limit. Other emissions were present with amplitudes at least 20 dB below the limit.

#### Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to meet the CISPR 22 or FCC Part 15B CLASS B emissions standards. There were no deviations or exceptions to the specifications.

# **Subpart C - Intentional Radiators**

As per CFR47, Subpart C, paragraph 15.247 the following information is submitted.

# 15.203 Antenna Requirements

The design utilizes a unique surface mount connector offering a connection for a coaxial cable. The EUT must be placed on a supporting digital interface daughter board offering power and communications connections to a network. The end product is marketed and sold for professional installation only. The antenna connection point complies with the unique antenna connection requirements. The requirements of 15.203 are fulfilled and there are no deviations or exceptions to the specification.

# 15.205 Restricted Bands of Operation

Spurious emissions falling in the restricted frequency bands of operation were measured at a distance of three meters at the OATS. The EUT utilizes frequency, determining circuitry, which generates harmonics falling in the restricted bands. Emissions were checked at the OATS, using appropriate antennas or pyramidal horns, amplification stages, and a spectrum analyzer. No other significant emission was observed which fell into the restricted bands of operation.

Rogers Labs, Inc. DBii Networks Limited FCC ID#: VKVF50

Model: F50

4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214 Test #: 090908 SN: ENG1 Test to: FCC (15.247) Page 17 of 36

Revision 1 File: DBii F50 15c TestRpt Date: December 18, 2009



# Sample Calculations:

RFS (dB
$$\mu$$
V/m @ 3m) = FSM(dB $\mu$ V) + A.F.(dB) - Gain(dB)  
= 39.7 + 7.8 - 30  
= 17.5

#### **Radiated Emissions in Restricted Bands Data (worst-case)**

Frequency in MHz	FSM Horz. (dBµV)	FSM Vert. (dBµV)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	FCC Class B Limit @ 3m (dBµV/m)
75.0	39.7	43.0	7.8	30	17.5	20.8	40.0
116.7	55.5	49.8	8.7	30	34.2	28.5	43.5
120.0	49.2	53.2	7.1	30	26.3	30.3	43.5
133.4	52.8	52.2	8.5	30	31.3	30.7	43.5
250.0	49.3	51.1	12.3	30	31.6	33.4	46.0
275.0	47.3	43.8	12.7	30	30.0	26.5	46.0
400.0	42.2	40.1	16.6	30	28.8	26.7	46.0
11480.0	29.0	27.2	39.9	30	38.9	37.1	54.0
11480.0	27.0	29.5	39.9	30	39.0	38.4	54.0
11570.0	29.1	28.5	39.9	30	37.4	37.9	54.0
11570.0	29.3	28.8	39.9	30	36.9	39.4	54.0
11570.0	26.5	23.5	39.9	30	39.2	38.7	54.0
11650.0	27.5	28.0	39.9	30	38.0	38.9	54.0
11650.0	28.1	29.0	39.9	30	36.4	33.4	54.0
11650.0	23.0	23.6	39.9	30	32.9	33.5	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Phone/Fax: (913) 837-321 Revision 1 DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 18 of 36



#### Summary of Results for Radiated Emissions in Restricted Bands

The radiated emissions for the EUT meet the requirements for FCC Part 15C Intentional Radiators. The EUT had a 9.3 dB minimum margin below the limits. Peak, Quasi-peak, and average amplitudes were checked for compliance with the regulations. No other emissions where found in the restricted frequency bands. Other emissions were present with amplitudes at least 20 dB below the FCC Limits.

#### Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to meet the FCC Part 15C paragraph 15.205 emissions requirements. There were no deviations or exceptions to the specifications.

#### 15.209 Radiated Emissions Limits; General Requirements

The EUT was arranged in a typical equipment configuration and operated through all of its various modes. Preliminary testing was performed in a screen room with the EUT positioned 1 meter from the FSM. Radiated emissions measurements were performed to identify the frequencies, which produced the highest emissions. Radiated emissions were observed in the screen room from 30 to 18,000 MHz and plots were made of the radiated emissions frequency spectrum from 30 MHz to 18,000 MHz for the preliminary testing. The highest radiated emission was then re-maximized at the OATS location before final radiated emissions measurements were performed. Final data was taken with the EUT located at the open area test site at a distance of 3 meters between the EUT and the receiving antenna. The frequency spectrum from 30 MHz to 25,000 MHz was searched for radiated emissions. Measured emission levels were maximized by EUT placement on the table, rotating the turntable through 360 degrees, varying the antenna height between 1 and 4 meters above the ground plane and changing antenna polarization between horizontal and vertical. Antennas used were Broadband Biconical from 30 MHz to 200 MHz, Biconilog from 30 MHz to 1000 MHz, Log Periodic from 200 MHz to 5 GHz, and/or Pyramidal Horns from 4 GHz to 40 GHz.

Sample Calculations:

RFS = Radiated Field Strength  $dB\mu V/m$  @  $3m = dB\mu V + A.F.$  - Amplifier Gain  $dB\mu V/m$  @ 3m = 39.7 + 7.8 - 30 = 17.5

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt

SN: ENG1 Page 19 of 36

FCC ID#: VKVF50



#### **General Radiated Emissions from EUT Data (Highest Emissions)**

Frequency in MHz	FSM Horz. (dBµV)	FSM Vert. (dBµV)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	FCC Class B Limit @ 3m (dBµV/m)
75.0	39.7	43.0	7.8	30	17.5	20.8	40.0
116.7	55.5	49.8	8.7	30	34.2	28.5	43.5
120.0	49.2	53.2	7.1	30	26.3	30.3	43.5
133.4	52.8	52.2	8.5	30	31.3	30.7	43.5
142.4	39.2	49.6	12.1	30	21.3	31.7	43.5
144.0	39.4	51.4	12.1	30	21.5	33.5	43.5
175.0	48.0	37.2	9.0	30	27.0	16.2	43.5
200.0	54.1	45.0	10.4	30	34.5	25.4	43.5
225.0	48.7	41.6	11.2	30	29.9	22.8	46.0
250.0	49.3	51.1	12.3	30	31.6	33.4	46.0
275.0	47.3	43.8	12.7	30	30.0	26.5	46.0
300.0	45.7	50.9	14.0	30	29.7	34.9	46.0
400.0	42.2	40.1	16.6	30	28.8	26.7	46.0
420.0	44.3	34.4	16.9	30	31.2	21.3	46.0
480.0	48.3	49.1	17.9	30	17.5	20.8	40.0

Other emissions present had amplitudes at least 20 dB below the limit.

### Summary of Results for General Radiated Emissions

The radiated emissions for the EUT meet the requirements for FCC Part 15C paragraph 15.209 Intentional Radiators. The EUT had a 9.0 dB minimum margin below the limits. Other emissions were present with amplitudes at least 20 dB below the FCC Limits.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Prione/Fax: (913) 83/-3 Revision 1 DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247)

File: DBii F50 15c TestRpt

FCC ID#: VKVF50

SN: ENG1 Page 20 of 36



### 15.247 Operation in the Band 5725-5850 MHz

The power output was measured both at the antenna connection and at the open area test site at a three-meter distance. Three antenna configurations were offered and tested for certification. The panel offers gain of 23 dBi, the Grid offers gain of 27 dBi, and the dish offers gain of 32.5 dBi. Data was taken per Paragraph 2.1046(a) and 15.247. Figures nine and ten demonstrate compliance with maximum output power requirements of 15.247(a)(2) across the band. Figures eleven through thirteen demonstrate compliance with the minimum 6 db bandwidth requirements of 15.247(A)(2). Figures fourteen through sixteen demonstrate compliance to power spectral density per 15.247(d). Figures seventeen through twenty-one demonstrate antenna conducted emissions and compliance with the requirements of 15.247(c) for emission limitations. Compliance to band edge requirements per 15.209 and 15.247 are demonstrated in radiated emissions tables for each antenna configuration. Antenna option configurations tested for compliance ranged in gain from 23 dBi to 32.5 dBi with worst case emissions presented in this document.

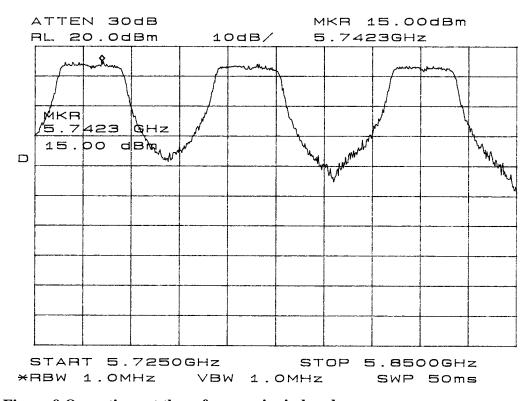


Figure 9 Operations at three frequencies in band

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053

Phone/Fax: (913) 837-3214 Revision 1

DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 21 of 36



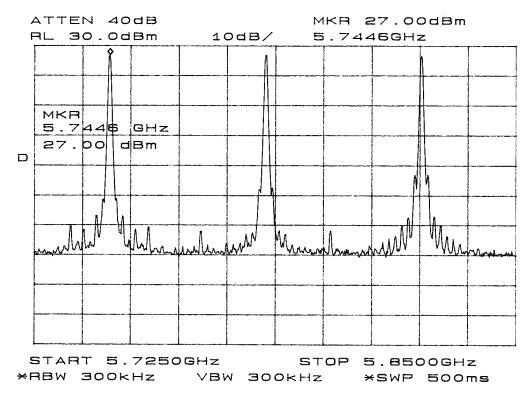


Figure 10 Maximum output power at three frequencies in band

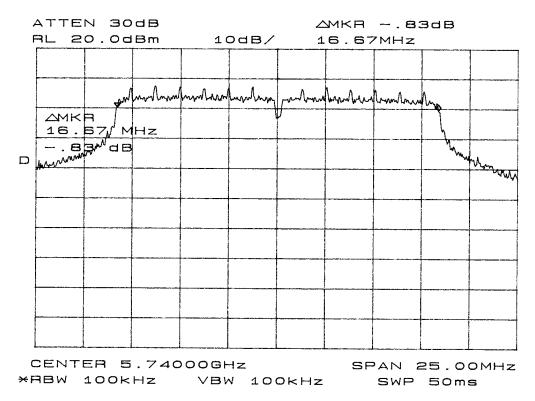


Figure 11 6dB Band width Requirement plot taken in screen room

Phone/Fax: (913) 837-3214 Revision 1

DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 22 of 36



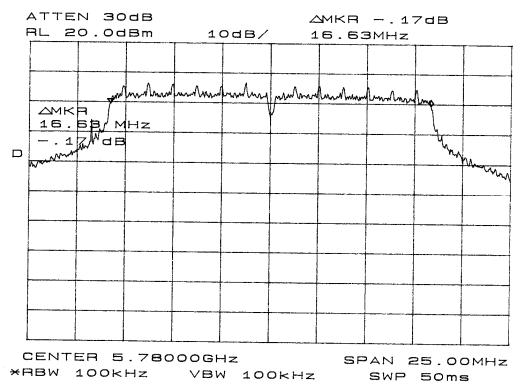


Figure 12 6dB Band width Requirement plot taken in screen room

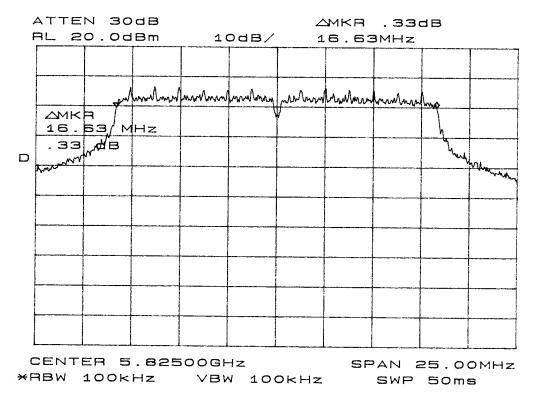


Figure 13 6dB Band width Requirement plot taken in screen room

Phone/Fax: (913) 837-3214 Revision 1

DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 23 of 36



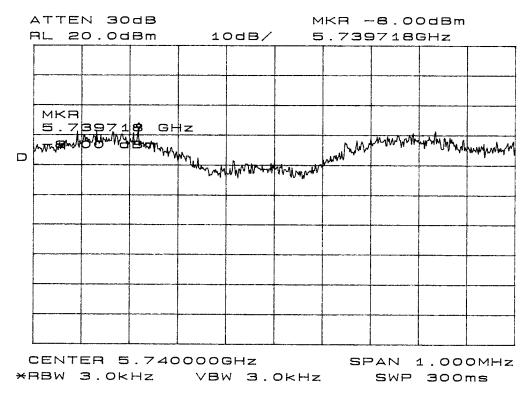


Figure 14 Power Spectral Density plot taken in screen room

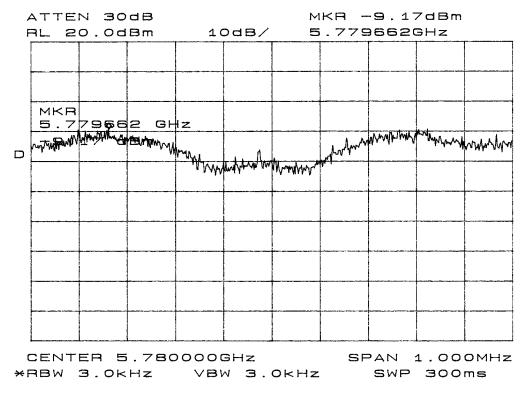


Figure 15 Power Spectral Density plot taken in screen room

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 1

Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt

DBii Networks Limited FCC ID#: VKVF50 Model: F50

SN: ENG1 Page 24 of 36



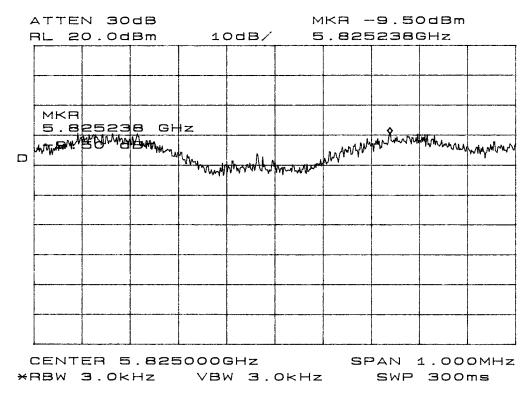


Figure 16 Power Spectral Density plot taken in screen room

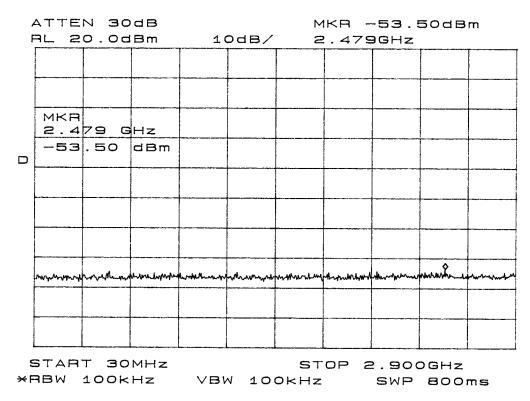


Figure 17 Antenna Conducted Emission plot taken in screen room

Phone/Fax: (913) 837-3214 Revision 1

DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 25 of 36



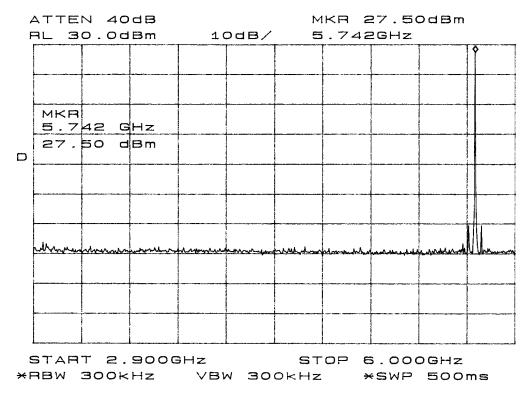


Figure 18 Antenna Conducted Emission plot taken in screen room

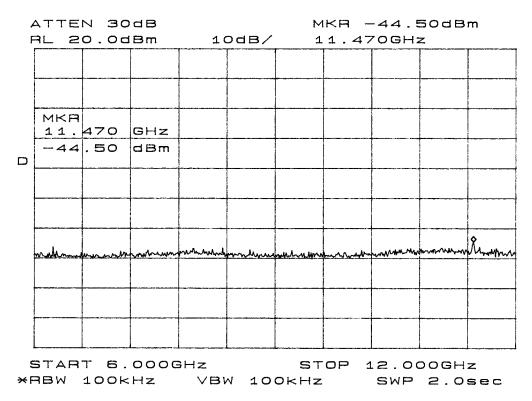


Figure 19 Antenna Conducted Emission plot taken in screen room

Phone/Fax: (913) 837-3214 Revision 1

DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 26 of 36



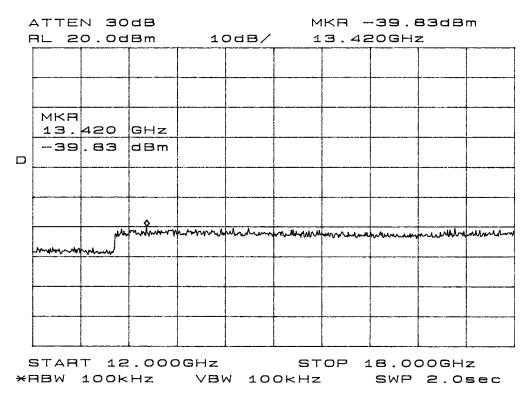


Figure 20 Antenna Conducted Emission plot taken in screen room

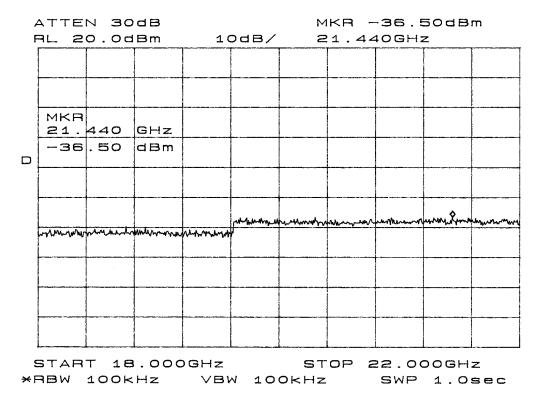


Figure 21 Antenna Conducted Emission plot taken in screen room

Phone/Fax: (913) 837-3214 Revision 1

DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 27 of 36



#### Transmitter Information and Data

The antenna conducted output power, power spectral density, and 20-dB bandwidth were measured at three frequencies in the band of operation. The data reported below represents the worst-case operational conditions.

Frequency MHz	Antenna Conducted Output Power dBm (mW)	Modulated Output Power dBm	Occupied Bandwidth MHz	Power Spectral Density dBm
5740.0	27.2 (524.8 mW)	17.0	16.67	-8.00
5785.0	27.0 (501.2 mW)	16.5	16.63	-9.17
5825.0	27.0 (501.2 mW)	16.6	16.63	-9.50

#### Radiated Emissions from EUT Data (23 dBi Panel)

Frequency in MHz	FSM Horz. (dBµV)	FSM Vert. (dBµV)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	Limit @ 3m (dBµV/m)
5740.0	80.8	92.0	43.1	0	123.9	135.1	
11480.0	29.0	27.2	39.9	30	38.9	37.1	54.0
17220.0	31.8	30.2	43.6	30	45.4	43.8	54.0
22960.0	30.0	28.3	43.6	30	43.6	41.9	54.0
5785.0	77.8	89.0	43.1	0	120.9	132.1	-1
11570.0	29.1	28.5	39.9	30	39.0	38.4	54.0
17355.0	30.5	33.6	45.6	30	46.1	49.2	54.0
23140.0	30.6	32.0	48.7	30	49.3	50.7	54.0
5825.0	79.0	89.7	43.1	0	122.1	132.8	-
11650.0	27.5	28.0	39.9	30	37.4	37.9	54.0
17475.0	32.1	31.3	43.6	30	45.7	44.9	54.0
23300.0	31.5	31.7	43.6	30	45.1	45.3	54.0
			Band Ed	ge Com	pliance		
5725.0	28.0	30.3	43.1	30	41.1	43.4	54.0
5850.0	28.3	28.3	43.1	30	41.4	41.4	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Rogers Labs, Inc. Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 1

DBii Networks Limited Model: F50

Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 28 of 36



#### Radiated Emissions from EUT Data (27 dBi Grid)

Frequency in MHz	FSM Horz. (dBµV)	FSM Vert. (dBµV)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	Limit @ 3m (dBµV/m)
5740.0	69.0	96.3	43.1	0	112.1	139.4	
11480.0	27.0	29.5	39.9	30	36.9	39.4	54.0
17220.0	30.3	30.1	43.6	30	43.9	43.7	54.0
22960.0	29.8	31.6	43.6	30	43.4	45.2	54.0
5785.0	67.3	95.5	43.1	0	110.4	138.6	
11570.0	29.3	28.8	39.9	30	39.2	38.7	54.0
17355.0	30.8	30.8	45.6	30	46.4	46.4	54.0
23140.0	31.8	32.0	48.7	30	50.5	50.7	54.0
5825.0	69.3	95.6	43.1	0	112.4	138.7	
11650.0	28.1	29.0	39.9	30	38.0	38.9	54.0
17475.0	29.0	30.5	43.6	30	42.6	44.1	54.0
23300.0	28.7	29.8	43.6	30	42.3	43.4	54.0
	Band Edge Compliance						
5725.0	28.5	31.3	43.1	30	41.6	44.4	54.0
5850.0	29.2	28.1	43.1	30	42.3	41.2	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

#### Radiated Emissions from EUT Data (32.5 dBi Dish)

Frequency in MHz	FSM Horz. (dBµV)	FSM Vert. (dBµV)	A.F. (dB/m)	Amp. Gain (dB)	RFS Horz. @ 3m (dBµV/m)	RFS Vert. @ 3m (dBµV/m)	Limit @ 3m (dBµV/m)
5740.0	80.5	101.5	43.1	0	123.6	144.6	
11480.0	23.0	23.6	39.9	30	32.9	33.5	54.0
17220.0	29.1	28.1	43.6	30	42.7	41.7	54.0
22960.0	29.1	28.1	43.6	30	42.7	41.7	54.0
5785.0	78.7	98.8	43.1	0	121.8	141.9	
11570.0	26.5	23.5	39.9	30	36.4	33.4	54.0
17355.0	30.8	29.6	45.6	30	46.4	45.2	54.0
23140.0	30.1	29.3	48.7	30	48.8	48.0	54.0
5825.0	80.5	101.2	43.1	0	123.6	144.3	1
11650.0	23.0	23.6	39.9	30	32.9	33.5	54.0
17475.0	29.1	28.1	43.6	30	42.7	41.7	54.0
23300.0	29.1	28.1	43.6	30	42.7	41.7	54.0
Band Edge Compliance							
5725.0	30.8	31.5	43.1	30	43.9	44.6	54.0
5850.0	29.8	28.0	43.1	30	42.9	41.1	54.0

Other emissions present had amplitudes at least 20 dB below the limit.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fay: (913) 837-321

Phone/Fax: (913) 837-3214 Revision 1 DBii Networks Limited

Model: F50 Test #: 090908 Test to: FCC (15.247)

File: DBii F50 15c TestRpt

FCC ID#: VKVF50

SN: ENG1 Page 29 of 36



### Summary of Results for Radiated Emissions of Intentional Radiator

The EUT had the highest radiated emission of 144.6 dBµV/m at 3 meters at the fundamental frequency of operation utilizing the dish antenna. The EUT had a worst-case of 3.3 (Peak amplitude) dB margin below the limit for the harmonic emissions. The radiated emissions for the EUT meet the requirements for FCC Part 15.247 Intentional Radiators. There are no measurable emissions in the restricted bands other than those recorded in this report. Other emissions were present with amplitudes at least 20 dB below the FCC Limits. The specifications of 15.247 were met; there are no deviations or exceptions to the requirements.

#### Statement of Modifications and Deviations

No modifications to the EUT were required for the unit to meet the FCC Part 15C emissions standards. There were no deviations to the specifications.

Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt

SN: ENG1 Page 30 of 36

FCC ID#: VKVF50



# **Annex**

- Annex A Measurement Uncertainty Calculations
- Annex B Test Equipment List.
- Annex C Rogers Qualifications.
- Annex D FCC Site Registration Letter.

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 31 of 36



### Annex A Measurement Uncertainty Calculations

Radiated Emissions Measurement Uncertainty Calculation

Measurement of vertically polarized radiated field strength over the frequency range 30 MHz to 1 GHz on an open area test site at 3m and 10m includes following uncertainty:

	Probability	Uncertainty
Contribution	Distribution	(dB)
Antenna factor calibration	normal(k = 2)	±0.58
Cable loss calibration	normal $(k = 2)$	±0.2
Receiver specification	rectangular	±1.0
Antenna directivity	rectangular	$\pm 0.1$
Antenna factor variation with height	rectangular	±2.0
Antenna factor frequency interpolation	rectangular	$\pm 0.1$
Measurement distance variation	rectangular	$\pm 0.2$
Site Imperfections	rectangular	±1.5

Combined standard uncertainty  $u_c(y)$  is

$$U_c(y) = \pm \sqrt{\left[\frac{1.0}{2}\right]^2 + \left[\frac{0.2}{2}\right]^2 + \left[1.0^2 + 0.1^2 + 2.0^2 + 0.1^2 + 0.2^2 + 1.5^2\right]}$$

$$U_{c}(y) = \pm 1.6 \text{ dB}$$

It is probable that  $u_c(y) / s(q_k) > 3$ , where  $s(q_k)$  is estimated standard deviation from a sample of n readings unless the repeatability of the EUT is particularly poor, and a coverage factor of k = 2will ensure that the level of confidence will be approximately 95%, therefore:

$$s(q_k) = \sqrt{\frac{1}{(n-1)} \sum_{k=1}^{n} (q_k - \bar{q})^2}$$

$$U = 2 U_c(y) = 2 x \pm 1.6 dB = \pm 3.2 dB$$

#### Notes:

- 1.1 Uncertainties for the antenna and cable were estimated, based on a normal probability distribution with k = 2.
- 1.2 The receiver uncertainty was obtained from the manufacturer's specification for which a rectangular distribution was assumed.
- 1.3 The antenna factor uncertainty does not take account of antenna directivity.
- 14 The antenna factor varies with height and since the height was not always the same in use as when the antenna was calibrated an additional uncertainty is added.
- 1.5 The uncertainty in the measurement distance is relatively small but has some effect on the received signal strength. The increase in measurement distance as the antenna height is increased is an inevitable consequence of the test method and is therefore not considered a contribution to uncertainty.
- 1.6 Site imperfections are difficult to quantify but may include the following contributions:
  - -Unwanted reflections from adjacent objects.
  - -Ground plane imperfections: reflection coefficient, flatness, and edge effects.
  - -Losses or reflections from "transparent" cabins for the EUT or site coverings.
  - -Earth currents in antenna cable (mainly effect biconical antennas).

The specified limits for the difference between measured site attenuation and the theoretical value (± 4 dB) were not included in total since the measurement of site attenuation includes uncertainty contributions already allowed for in this budget, such as antenna factor.

Rogers Labs, Inc. DBii Networks Limited FCC ID#: VKVF50 Model: F50

4405 W. 259th Terrace

Test #: 090908 Louisburg, KS 66053 SN: ENG1 Phone/Fax: (913) 837-3214 Test to: FCC (15.247) Page 32 of 36

Revision 1 File: DBii F50 15c TestRpt Date: December 18, 2009



#### Conducted Measurements Uncertainty Calculation

Measurement of conducted emissions over the frequency range 9 kHz to 30 MHz includes following uncertainty:

	Probability	Uncertainty
Contribution	Distribution	(dB)
Receiver specification	rectangular	±1.5
LISN coupling specification	rectangular	±1.5
Cable and input attenuator calibration	normal (k=2)	±0.5

Combined standard uncertainty  $u_{\mathbb{C}}(y)$  is

$$U_c(y) = \pm \sqrt{\left[\frac{0.5}{2}\right]^2 + \frac{1.5^2 + 1.5^2}{3}}$$

$$U_c(y) = \pm 1.2 \text{ dB}$$

As with radiated field strength uncertainty, it is probable that  $u_c(y) / s(q_k) > 3$  and a coverage factor of k = 2 will suffice, therefore:

$$U = 2 U_c(y) = 2 x \pm 1.2 dB = \pm 2.4 dB$$

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fax: (913) 837-3214

Revision 1

DBii Networks Limited Model: F50 Test #: 090908 Test to: FCC (15.247) File: DBii F50 15c TestRpt

SN: ENG1 Page 33 of 36

FCC ID#: VKVF50



# Annex B Test Equipment List For Rogers Labs, Inc.

The test equipment used is maintained in calibration and good operating condition. Use of this calibrated equipment ensures measurements are traceable to national standards.

List of Test Equipment	Calibration Date
Oscilloscope Scope: Tektronix 2230	2/09
Wattmeter: Bird 43 with Load Bird 8085	2/09
Power Supplies: Sorensen SRL 20-25, SRL 40-25, DCR 150, DCR 140	2/09
H/V Power Supply: Fluke Model: 408B (SN: 573)	2/09
R.F. Generator: HP 606A	2/09
R.F. Generator: HP 8614A	2/09
R.F. Generator: HP 8640B	2/09
Spectrum Analyzer: HP 8562A,	5/09
Mixers: 11517A, 11970A, 11970K, 11970U, 11970V, 11970W	
HP Adapters: 11518, 11519, 11520	
Spectrum Analyzer: HP 8591EM	5/09
Frequency Counter: Leader LDC825	2/09
Antenna: EMCO Biconilog Model: 3143	5/09
Antenna: EMCO Log Periodic Model: 3147	10/08
Antenna: Antenna Research Biconical Model: BCD 235	10/08
Antenna: EMCO Dipole Set 3121C	2/09
Antenna: C.D. B-101	2/09
Antenna: Solar 9229-1 & 9230-1	2/09
Antenna: EMCO 6509	2/09
Audio Oscillator: H.P. 201CD	2/09
R.F. Power Amp 65W Model: 470-A-1010	2/09
R.F. Power Amp 50W M185- 10-501	2/09
R.F. PreAmp CPPA-102	2/09
LISN 50 μHy/50 ohm/0.1 μf	10/08
LISN Compliance Eng. 240/20	2/09
LISN Fischer Custom Communications FCC-LISN-50-16-2-08	2/09
Peavey Power Amp Model: IPS 801	2/09
Power Amp A.R. Model: 10W 1010M7	2/09
Power Amp EIN Model: A301	2/09
ELGAR Model: 1751	2/09
ELGAR Model: TG 704A-3D	2/09
ESD Test Set 2010i	2/09
Fast Transient Burst Generator Model: EFT/B-101	2/09
Current Probe: Singer CP-105	2/09
Current Probe: Solar 9108-1N	2/09
Field Intensity Meter: EFM-018	2/09
KEYTEK Ecat Surge Generator	2/09

Rogers Labs, Inc. DBii Networks Limited FCC ID#: VKVF50

4405 W. 259th Terrace Model: F50 Louisburg, KS 66053 Test #: 0909

 Louisburg, KS 66053
 Test #: 090908
 SN: ENG1

 Phone/Fax: (913) 837-3214
 Test to: FCC (15.247)
 Page 34 of 36

 Revision 1
 File: DBii F50 15c TestRpt
 Date: December 18, 2009



# Annex C Qualifications

#### SCOT D. ROGERS, ENGINEER

#### ROGERS LABS, INC.

Mr. Rogers has approximately 17 years experience in the field of electronics. Six years working in the automated controls industry and 6 years working with the design, development and testing of radio communications and electronic equipment.

#### POSITIONS HELD:

Systems Engineer: A/C Controls Mfg. Co., Inc. 6 Years

Electrical Engineer: Rogers Consulting Labs, Inc. 5 Years

Electrical Engineer: Rogers Labs, Inc. Current

#### EDUCATIONAL BACKGROUND:

- 1) Bachelor of Science Degree in Electrical Engineering from Kansas State University.
- 2) Bachelor of Science Degree in Business Administration Kansas State University.
- 3) Several Specialized Training courses and seminars pertaining to Microprocessors and Software programming.

Scot D. Rogers

Scot D Rogers

File: DBii F50 15c TestRpt

Page 35 01 36

SN: ENG1 Page 35 of 36

FCC ID#: VKVF50



### Annex D FCC Site Registration Letter

#### FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division 7435 Oakland Mills Road Columbia, MD 21046

June 18, 2008

Registration Number: 90910

Rogers Labs, Inc. 4405 West 259th Terrace, Louisburg, KS 66053

Attention:

Scot Rogers

Re:

Measurement facility located at Louisburg

3 & 10 meter site

Date of Renewal: June 18, 2008

#### Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website <a href="www.fcc.gov">www.fcc.gov</a> under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely

Industry Analyst

Rogers Labs, Inc. 4405 W. 259th Terrace Louisburg, KS 66053 Phone/Fay: (913) 837-321

Phone/Fax: (913) 837-3214 Revision 1 DBii Networks Limited Model: F50 Test #: 090908

Test to: FCC (15.247) File: DBii F50 15c TestRpt FCC ID#: VKVF50

SN: ENG1 Page 36 of 36