

# FCC Test Report

## Part 15 subpart E

### Client Information:

Applicant: Plastoform Industries Ltd.  
Applicant add.: Rm. 902-4 Seapower Center 73 Lei Muk Road, Kwai Chung

### Product Information:

Product Name: Big Blue Party Chrome  
Model No.: AR106A4BK  
Derivative model No.: --  
Brand Name: BROOKSTONE  
FCC ID: VL5-AR106A4BK  
FCC Classification: Unlicensed National Information Infrastructure (UNII)

Standards: CFR 47 FCC PART 15 SUBPART E:2016 section 15.407

### Prepared By:

#### **Dongguan Yaxu (AiT) Technology Limited**

Add. : No.22, Jinqianling Third Street, Jitigang, Huangjiang, Dongguan, Guangdong, China

Date of Receipt: Sep. 23, 2016

Date of Test: Sep. 23~ Oct. 25, 2016

Date of Issue: Oct. 26, 2016

Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

\*This test report must not be used by the client to claim product endorsement by any agency of the U.S. government.

Reviewed by:

*Seal-Chen*

Approved by:

*Jm*

# 1 Contents

|   | Page      |
|---|-----------|
| <b>COVER PAGE</b>                             |           |
| <b>1 CONTENTS</b>                             | <b>2</b>  |
| <b>2 TEST SUMMARY</b>                         | <b>4</b>  |
| 2.1 COMPLIANCE WITH FCC PART 15 SUBPART E     | 4         |
| 2.2 MEASUREMENT UNCERTAINTY                   | 4         |
| <b>3 TEST FACILITY</b>                        | <b>5</b>  |
| 3.1 DEVIATION FROM STANDARD                   | 5         |
| 3.2 ABNORMALITIES FROM STANDARD CONDITIONS    | 5         |
| <b>4 GENERAL INFORMATION</b>                  | <b>6</b>  |
| 4.1 GENERAL DESCRIPTION OF EUT                | 6         |
| 4.2 DESCRIPTION OF TEST CONDITIONS            | 8         |
| 4.3 EUT PERIPHERAL LIST                       | 10        |
| 4.4 TEST PERIPHERAL LIST                      | 10        |
| <b>5 EQUIPMENTS LIST FOR ALL TEST ITEMS</b>   | <b>11</b> |
| <b>6 TEST RESULT</b>                          | <b>12</b> |
| 6.1 CONDUCTION EMISSIONS MEASUREMENT          | 12        |
| 6.1.1 Applied procedures / Limit              | 12        |
| 6.1.2 Test procedure                          | 12        |
| 6.1.3 DEVIATION FROM TEST STANDARD            | 13        |
| 6.1.4 TEST SETUP                              | 13        |
| 6.1.5 Test results                            | 14        |
| 6.2 RADIATED EMISSIONS MEASUREMENT            | 16        |
| 6.2.1 Applied procedures / Limit              | 16        |
| 6.2.2 Radiated Emissions Test Data            | 21        |
| 6.3 RADIATED RESTRICTED BAND EDGE MEASUREMENT | 52        |
| 6.3.1 Applied procedures / Limit              | 52        |
| 6.3.2 Test procedure                          | 52        |
| 6.3.3 Deviation from standard                 | 52        |
| 6.3.4 Test results                            | 53        |
| 6.4 BANDWIDTH TEST                            | 61        |
| 6.4.1 Applied procedures / Limit              | 61        |
| 6.4.2 Test procedure                          | 61        |
| 6.4.3 Deviation from standard                 | 62        |
| 6.4.4 Test setup                              | 62        |
| 6.4.5 Test results                            | 63        |
| 6.5 PEAK POWER DENSITY                        | 100       |
| 6.5.1 Applied procedures / Limit              | 100       |

|          |   |            |
|----------|---|------------|
| 6.5.2    | Test procedure .....  | 100        |
| 6.5.3    | TEST SETUP .....  | 100        |
| 6.5.4    | Deviation from standard .....                               | 100        |
| 6.5.5    | Test results .....  | 101        |
| 6.6      | MAXIMUM PEAK OUTPUT POWER .....                             | 116        |
| 6.6.1    | Applied procedures / Limit.....                             | 116        |
| 6.6.2    | Test procedure .....  | 116        |
| 6.6.3    | Test Setup .....  | 116        |
| 6.6.4    | Deviation from standard .....                               | 116        |
| 6.6.5    | Test results .....  | 118        |
| 6.7      | FREQUENCY STABILITY MEASUREMENT.....                        | 119        |
| 6.7.1    | Applied procedures / Limit.....                             | 119        |
| 6.7.2    | Test procedure .....  | 119        |
| 6.7.3    | Deviation from standard .....                               | 119        |
| 6.7.4    | Test setup .....  | 119        |
| 6.7.5    | Test results .....  | 120        |
| 6.8      | AUTOMATICALLY DISCONTINUE TRANSMISSION .....                | 121        |
| 6.8.1    | LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION .....       | 121        |
| 6.8.2    | TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION ..... | 121        |
| 6.9      | ANTENNA REQUIREMENT .....                                   | 121        |
| 6.9.1    | STANDARD REQUIREMENT .....                                  | 121        |
| 6.9.2    | EUT ANTENNA .....   | 121        |
| <b>7</b> | <b>PHOTOGRAPHS .....</b>                                    | <b>122</b> |
| 7.1      | RADIATED EMISSION TEST SETUP .....                          | 122        |
| 7.2      | CONDUCTION EMISSION TEST SETUP .....                        | 123        |
| 7.3      | EUT CONSTRUCTIONAL DETAILS .....                            | 124        |

## 2 Test Summary

### 2.1 Compliance with FCC Part 15 subpart E

| FCC Part15 (15.407)                                     |  |          |
|---|--|----------|
| Test Item   | FCC standard                               | Judgment |
| AC Conducted Emission                                   | 15.207                                     | PASS     |
| 26dB/6dB Bandwidth                                      | § 15.407 (2) (26 dB) / § 15.407 (e) (6 dB) | PASS     |
| Maximum Conducted Output Power                          | 15.407(a) (1).(2).(3).(4).(5)              | PASS     |
| Radiated Emission And ( Unwanted Emissions) Measurement | 15.407(b)& 15.209                          | PASS     |
| Radiated Restricted Band Edge Measurement               | 15.407(b)7                                 | PASS     |
| Power Spectral Density                                  | 15.407(a) (1).(2).(3).(4).(5)              | PASS     |
| Frequency Stability                                     | 15.407(g)                                  | PASS     |
| Automatically Discontinue Transmission                  | 15.407(c)                                  | PASS     |
| Antenna Requirement                                     | 15.203/15.204                              | PASS     |

Note: Reference to the ANSI C63.10-2013, KDB 789033 D02v01r01, KDB 662911 D01v02r01 and KDB 644545 D03v01.  
" N/A" denotes test is not applicable in this Test Report.

### 2.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, The following measurements uncertainty Levels maximum value of the uncertainty as below

| No. | Item                    | Uncertainty |
|-----|-------------------------|-------------|
| 1   | Conducted Emission Test | ±1.38dB     |
| 2   | Radiated Emission Test  | ±3.57dB     |

### 3 Test Facility

**The test facility is recognized, certified or accredited by the following organizations:**

**.CNAS- Registration No: L6177**

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2005 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on Apr. 18, 2013

**.FCC- Registration No: 248337**

The 3m Semi-Anechoic Chamber, 3m/10m Open Area Test Site and Shielding Room of Dongguan Yaxu (AiT) technology Limited have been registered by Federal Communications Commission (FCC) on Aug.29, 2014.

**.Industry Canada(IC)-Registration No: IC 6819A**

The 3m Semi-Anechoic Chamber and 3m/10m Open Area Test Site of A Dongguan Yaxu (AiT) technology Limited have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing on Oct. 01, 2014.

#### 3.1 Deviation from standard

None

#### 3.2 Abnormalities from standard conditions

None

## 4 General Information

### 4.1 General Description of EUT

|  |   |
|--|---|
| Manufacturer:                          | Brookstone Inc.   |
| Manufacturer Address:                  | One Innovation Way, Merrimack, New Hampshire, 03054 United States   |
| EUT Name:                              | Big Blue Party Chrome   |
| Model No.:                             | AR106A4BK   |
| Antenna Gain:                          | 4.54 dBi  |
| Operation frequency:                   | For 802.11a/n-HT20/ac-VHT20:<br>5180~5240MHz, 5745~5825MHz<br>For 802.11n-HT40/ac-VHT40:<br>5190~5230MHz, 5755~5795MHz<br>For 802.11ac-VHT80:<br>5210MHz, 5775MHz |
| Modulation Type and Antenna Type:      | 802.11a/n/ac: OFDM<br>PCB antenna   |
| Maximum Average Output Power with 5GHz | 802.11a: 11.62dBm<br>802.11n-HT20: 11.85dBm<br>802.11n-HT40: 11.68dBm<br>802.11ac-VHT20: 11.46dBm<br>802.11ac-VHT40: 11.69m<br>802.11ac-VHT80: 6.68m              |
| Brand Name:                            | BROOKSTONE  |
| Power Supply Range:                    | Input: AC 100-240v 50/60Hz 1.5A, Output: DC18V 3.5A or DC 11.1V from battery.   |
| Power Supply:                          | The same as above.  |
| H/W No.:                               | E09-02160-01  |
| S/W No.:                               | 1.0   |

---

### Channel List

---

#### Channel List for 802.11a/n-HT20/ac-VHT20

| Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 36      | 5180            | 40      | 5200            | 44      | 5220            | --      | --              |
| 48      | 5240            | 149     | 5745            | 153     | 5765            | --      | --              |
| 157     | 5785            | 161     | 5805            | 165     | 5825            | --      | --              |

---

#### Channel List for 802.11n-HT40/ac-VHT40

| Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 38      | 5190            | 46      | 5230            | 151     | 5755            | 159     | 5795            |


#### Channel List for 802.11ac-VHT80

| Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 42      | 5210            | 155     | 5775            | -       | --              | --      | --              |

## 4.2 Description of Test conditions

- (1) EUT was tested in normal configuration (Please See following Block diagram)

1. Block diagram of EUT configuration(TX Mode)



- (2) E.U.T. test conditions:

15.31(e): For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

- (3) Test frequencies:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and. If required reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

| Frequency range over which device operates | Number of frequencies | Location in the range of operation          |
|--|-----------------------|---|
| 1 MHz or less                              | 1                     | Middle                                      |
| 1 to 10 MHz                                | 2                     | 1 near top and 1 near bottom                |
| More than 10 MHz                           | 3                     | 1 near top, 1 near middle and 1 near bottom |

- (4) Frequency range of radiated measurements:


According to the 15.33, The test range will be up to the tenth harmonic of the highest fundamental frequency.

- (5) The EUT 's duty cycle is set to 100%

- (6) The measurements are performed at all Bit Rate of Transmitter, For all tests the worst-case was selected as the table below, the data of the worst-case is shown in the report.

|           |  |
|-----------|--|
| Test Mode | Mode 1: Transmit by 802.11a with antenna #1        |
|           | Mode 2: Transmit by 802.11n-HT20 with antenna #1   |
|           | Mode 3: Transmit by 802.11n-HT40 with antenna #1   |
|           | Mode 4: Transmit by 802.11ac-VHT20 with antenna #1 |
|           | Mode 5: Transmit by 802.11ac-VHT40 with antenna #1 |
|           | Mode 6: Transmit by 802.11ac-VHT80 with antenna #1 |

(7) Description of Antenna RF Port

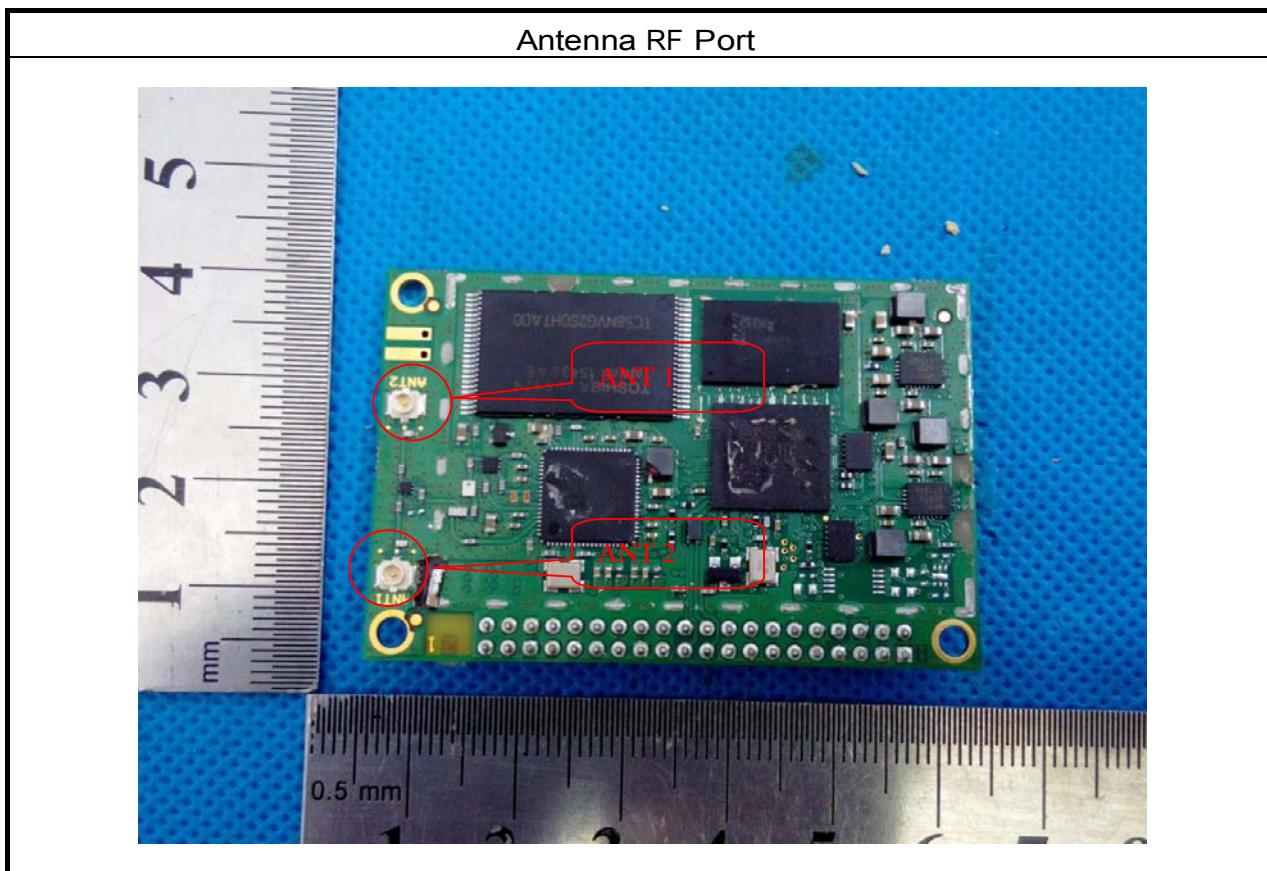

Note:1. 1/2 Represent the value of antenna1/2,The worst data is Antenna 1,only shown Antenna 1Plot.  
2. Antenna 1 and Antenna 2 can not transmit simultaneously.

#### 4.3 EUT Peripheral List

| No. | Equipment | Manufacturer | Model No. | Serial No. | Power cord | signal cable |
|-----|-----------|--------------|-----------|------------|------------|--------------|
| 1   | Adapter   | N/A          | N/A       | N/A        | N/A        | N/A          |

#### 4.4 Test Peripheral List

| No. | Equipment | Manufacturer | EMC Compliance | Model No. | Serial No. | Power cord | signal cable |
|-----|-----------|--------------|----------------|-----------|------------|------------|--------------|
| 1   | Notebook  | Asus         | FCC            | N/A       | N/A        | N/A        | N/A          |

## 5 Equipments List for All Test Items

| No        | Test Equipment                      | Manufacturer | Model No         | Serial No   | Cal. Date  | Cal. Due Date |
|-----------|-------------------------------------|--------------|------------------|-------------|------------|---------------|
| 1         | SIGNAL ANALYZER                     | R&S          | FSV40            | 101470      | 2016.06.29 | 2017.06.29    |
| 2         | EMI Measuring Receiver              | R&S          | ESR              | 101660      | 2016.06.29 | 2017.06.29    |
| 3         | Low Noise Pre Amplifier             | Tsj          | MLA-10K01-B01-27 | 1205323     | 2016.06.29 | 2017.06.29    |
| 4         | Low Noise Pre Amplifier             | Tsj          | MLA-0120-A02-34  | 2648A04738  | 2016.06.29 | 2017.06.29    |
| 5         | TRILOG Super Broadband test Antenna | SCHWARZBEC K | VULB9160         | 9160-3206   | 2016.06.29 | 2017.06.29    |
| 6         | Broadband Horn Antenna              | SCHWARZBEC K | BBHA9120D        | 452         | 2016.06.29 | 2017.06.29    |
| 7         | SHF-EHF Horn                        | SCHWARZBEC K | BBHA9170         | BBHA9170367 | 2016.06.29 | 2017.06.29    |
| 8         | Loop Antenna                        | ETS          | 6512             | 00165355    | 2016.06.29 | 2017.06.29    |
| 9         | Radiated Cable 1# (30MHz-1GHz)      | FUJIKURA     | 5D-2W            | 01          | 2016.06.29 | 2017.06.29    |
| 10        | Radiated Cable 2# (1GHz -40GHz)     | FUJIKURA     | 10D2W            | 02          | 2016.06.29 | 2017.06.29    |
| 11        | Conducted Cable 1#(9KHz-30MHz)      | FUJIKURA     | 1D-2W            | 01          | 2016.06.29 | 2017.06.29    |
| 12        | Power Meter                         | Anritsu      | ML2495A          | N/A         | 2016.06.29 | 2017.06.29    |
| 13        | Power sensor                        | Anritsu      | MA2411B          | N/A         | 2016.06.29 | 2017.06.29    |
| Note: N/A |                                     |              |                  |             |            |               |

## 6 Test Result

### 6.1 Conduction Emissions Measurement

#### 6.1.1 Applied procedures / Limit

(Frequency Range 150KHz-30MHz)

| FREQUENCY<br>(MHz) | Quasi-peak<br>(dBuV) | Average<br>(dBuV) | Standard |
|--------------------|----------------------|-------------------|----------|
| 0.15 -0.5          | 66 - 56 *            | 56 - 46 *         | CISPR    |
| 0.50 -5.0          | 56.00                | 46.00             |          |
| 5.0 -30.0          | 60.00                | 50.00             |          |

|           |           |           |     |
|-----------|-----------|-----------|-----|
| 0.15 -0.5 | 66 - 56 * | 56 - 46 * | FCC |
| 0.50 -5.0 | 56.00     | 46.00     |     |
| 5.0 -30.0 | 60.00     | 50.00     |     |

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


#### 6.1.2 Test procedure

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos

### 6.1.3 DEVIATION FROM TEST STANDARD

No deviation

### 6.1.4 TEST SETUP

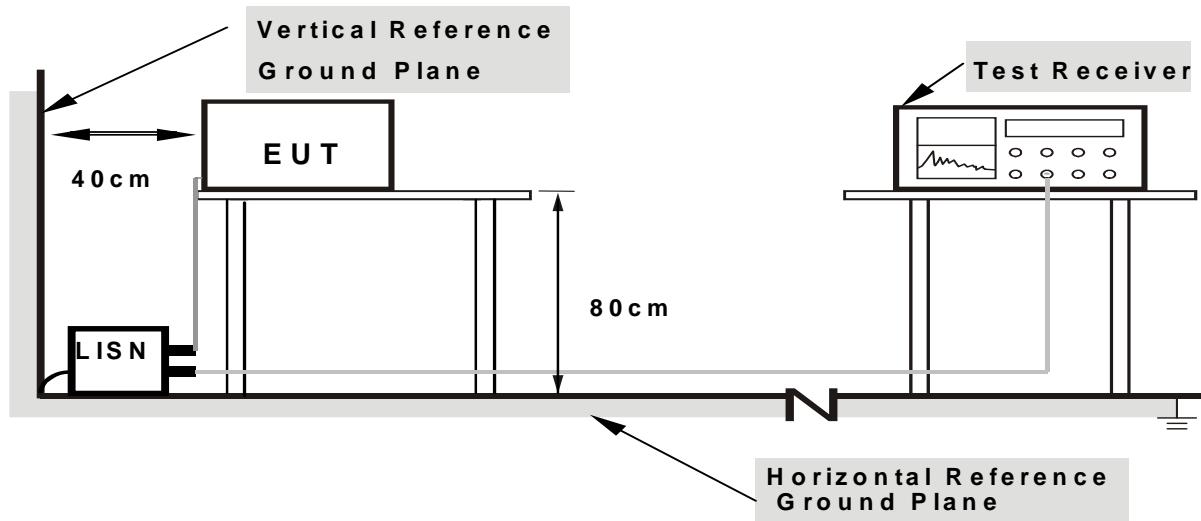


**Note:**

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes


### 6.1.5 Test results

|              |                       |                    |            |
|--------------|-----------------------|--------------------|------------|
| EUT:         | Big Blue Party Chrome | Model Name. :      | AR106A4BK  |
| Temperature: | 26 °C                 | Relative Humidity: | 54%        |
| Pressure:    | 1010hPa               | Test Date :        | 2016-09-27 |
| Test Mode:   | TX (worst case)       | Phase :            | L/N        |

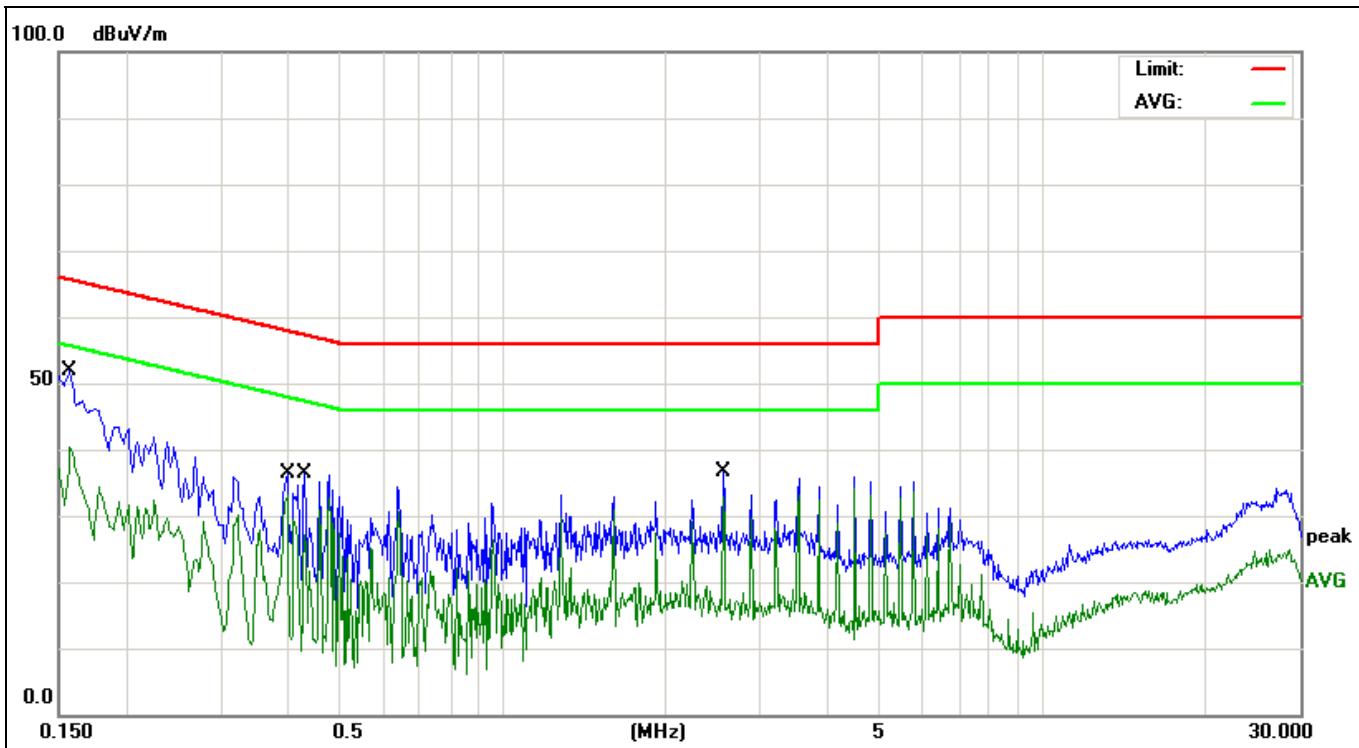

Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

| No. | Mk.    | Reading      |                 | Correct Factor | Measure-<br>ment | Limit  | Over |
|-----|--------|--------------|-----------------|----------------|------------------|--------|------|
|     |        | Freq.<br>MHz | Level<br>dBuV/m |                |                  |        |      |
| 1   | 0.1580 | 40.03        | 11.75           | 51.78          | 65.56            | -13.78 | QP   |
| 2   | 0.1580 | 28.62        | 11.75           | 40.37          | 55.56            | -15.19 | AVG  |
| 3   | 0.3980 | 22.89        | 10.13           | 33.02          | 47.89            | -14.87 | AVG  |
| 4   | 0.4300 | 26.33        | 10.09           | 36.42          | 57.25            | -20.83 | QP   |
| 5   | 2.5660 | 26.50        | 10.01           | 36.51          | 56.00            | -19.49 | QP   |
| 6 * | 2.5660 | 22.91        | 10.01           | 32.92          | 46.00            | -13.08 | AVG  |

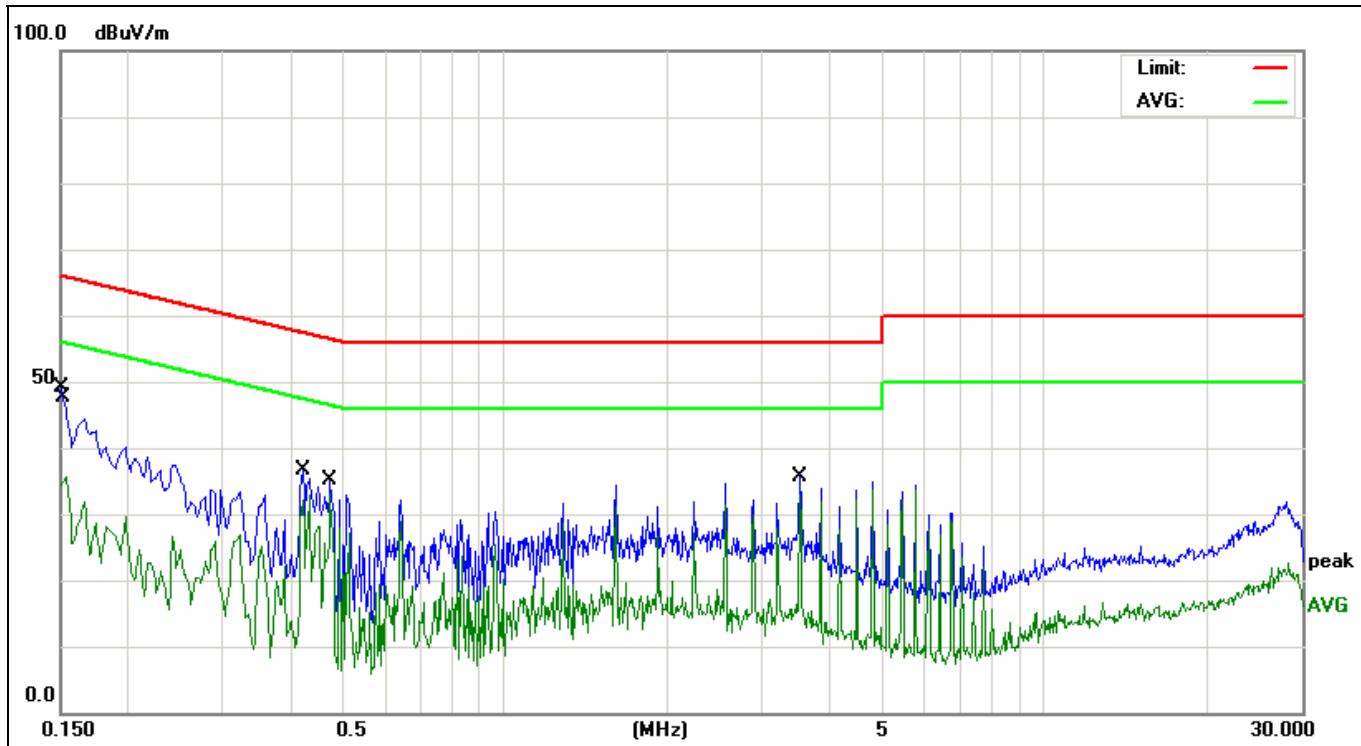

Remark: Factor = LISN factor + Cable Loss + Pulse limiter factor.

| No. | Mk. | Freq.<br>MHz | Reading         | Correct      | Measure-       | Limit<br>dBuV/m | Over<br>dB | Over<br>Detector |
|-----|-----|--------------|-----------------|--------------|----------------|-----------------|------------|------------------|
|     |     |              | Level<br>dBuV/m | Factor<br>dB | ment<br>dBuV/m |                 |            |                  |
| 1   |     | 0.1500       | 37.11           | 11.94        | 49.05          | 65.99           | -16.94     | QP               |
| 2   |     | 0.1539       | 23.81           | 11.84        | 35.65          | 55.78           | -20.13     | AVG              |
| 3   |     | 0.4220       | 26.49           | 10.11        | 36.60          | 57.41           | -20.81     | QP               |
| 4   |     | 0.4740       | 23.14           | 10.04        | 33.18          | 46.44           | -13.26     | AVG              |
| 5   |     | 3.5260       | 25.49           | 10.04        | 35.53          | 56.00           | -20.47     | QP               |
| 6   | *   | 3.5260       | 22.74           | 10.04        | 32.78          | 46.00           | -13.22     | AVG              |

## 6.2 Radiated Emissions Measurement

### 6.2.1 Applied procedures / Limit

Test FCC Part15 section 15.407

Requirement:

Limits:

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20 dB below the highest level of the desired power:

| Frequencies (MHz) | Field Strength (micorvolts/meter) | Measurement Distance (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009~0.490       | 2400/F(KHz)                       | 300                           |
| 0.490~1.705       | 24000/F(KHz)                      | 30                            |
| 1.705~30.0        | 30                                | 30                            |
| 30~88             | 100                               | 3                             |
| 88~216            | 150                               | 3                             |
| 216~960           | 200                               | 3                             |
| Above 960         | 500                               | 3                             |

#### LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz at 3M)

| FREQUENCY (MHz) | PEAK (dBuV/m) | AVERAGE (dBuV/m) |
|-----------------|---------------|------------------|
| Above 1000      | 74            | 54               |

Notes:

- (1) The lower limit shall apply at the transition frequencies.
- (2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
- (3) For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

Measurement Distance: 3m (Semi-Anechoic Chamber)

Frequency range 9 kHz – 40 GHz for transmitting mode.

Test instrumentation resolution bandwidth  
9 kHz (9 kHz - 30 MHz), 120 kHz (30 MHz - 1000 MHz), 1 MHz (1000 MHz – 40 GHz)

Detector: For PK and QP value:

RBW = 1 MHz for  $f \geq 1$  GHz, 100 kHz for  $f < 1$  GHz

$VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for  $f \geq 1$  GHz,

$VBW = 10$  Hz

Sweep = auto

Detector function = peak

Trace = max hold

**Test Procedure:**

1) 9 kHz to 30 MHz emissions:

For testing performed with the loop antenna, testing was performed in accordance to ANSI C63.10. The centre of the loop was positioned 1 m above the ground and positioned with its plane vertical at the specified distance from the EUT. During testing the loop was rotated about its vertical axis for maximum response at each azimuth and also investigated with the loop positioned in the horizontal plane.

2) 30 MHz to 1 GHz emissions:

For testing performed with the bi-log type antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

3) 1 GHz to 40 GHz emissions:

Test site with RF absorbing material covering the ground plane that met the site validation criterion called out in CISPR 16-1-4:2007 was used to perform radiated emission test above 1 GHz.

For testing performed with the horn antenna, testing was performed in accordance to ANSI C63.10. The measurement is performed with the EUT rotated 360°, the antenna height scan between 1m and 4m, and the antenna rotated to repeat the measurement for both the horizontal and vertical antenna polarizations.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for

receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

And according 15.35(a)


15.35(a) On any frequency or frequencies below or equal to 1000 MHz, the limits shown are based on measuring equipment employing a CISPR quasi-peak detector function and related measurement bandwidths, unless otherwise specified. The specifications for the measuring instrument using the CISPR quasi-peak detector can be found in Publication 16 of the International Special Committee on Radio Interference (CISPR) of the International Electro technical Commission. As an alternative to CISPR quasi-peak measurements, the responsible party, at its option, may demonstrate compliance with the emission limits using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, as long as the same bandwidths as indicated for CISPR quasi-peak measurements are employed.

Note: For pulse modulated devices with a pulse-repetition frequency of 20 Hz or less and for which CISPR quasi-peak measurements are specified, compliance with the regulations shall be demonstrated using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, using the same measurement bandwidths that are indicated for CISPR quasi-peak measurements.


According to 15.35 (b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§ 15.250, 15.252, 15.255, and 15.509-15.519 of this part, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

**Test Configuration:**


- 1) 9 kHz to 30 MHz emissions:

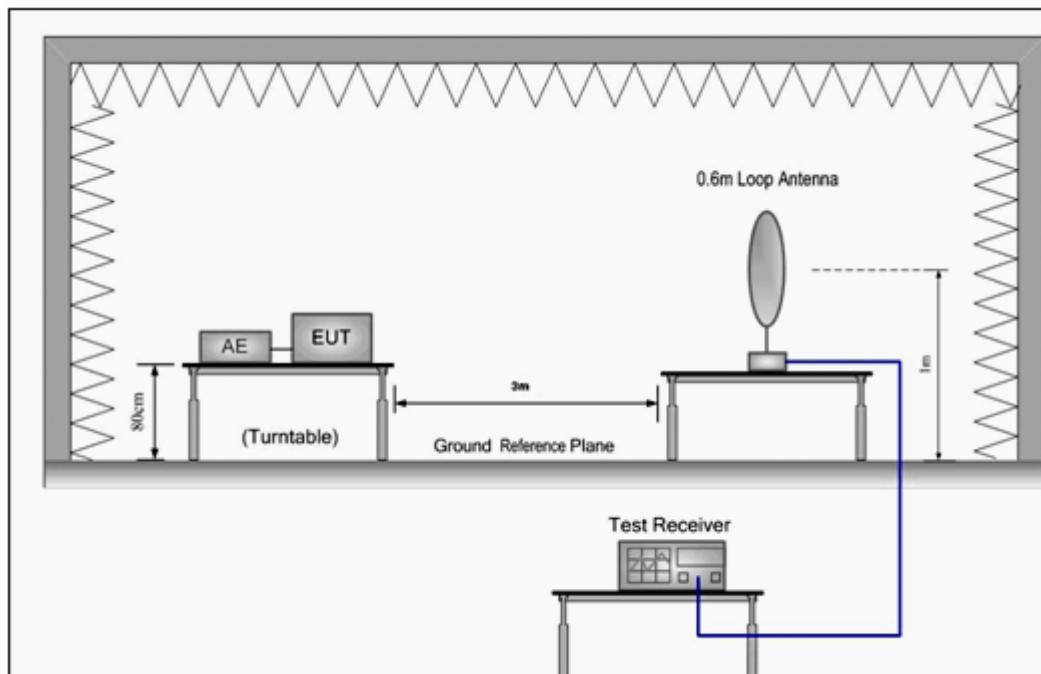

- 2) 30 MHz to 1 GHz emissions:

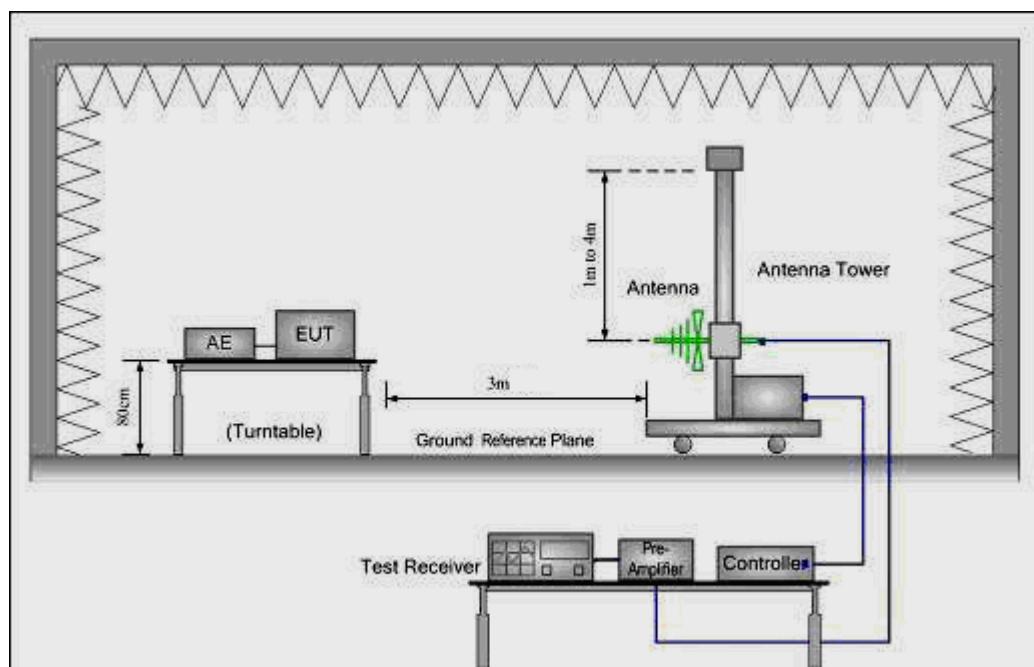

## 3) 1 GHz to 40 GHz emissions:

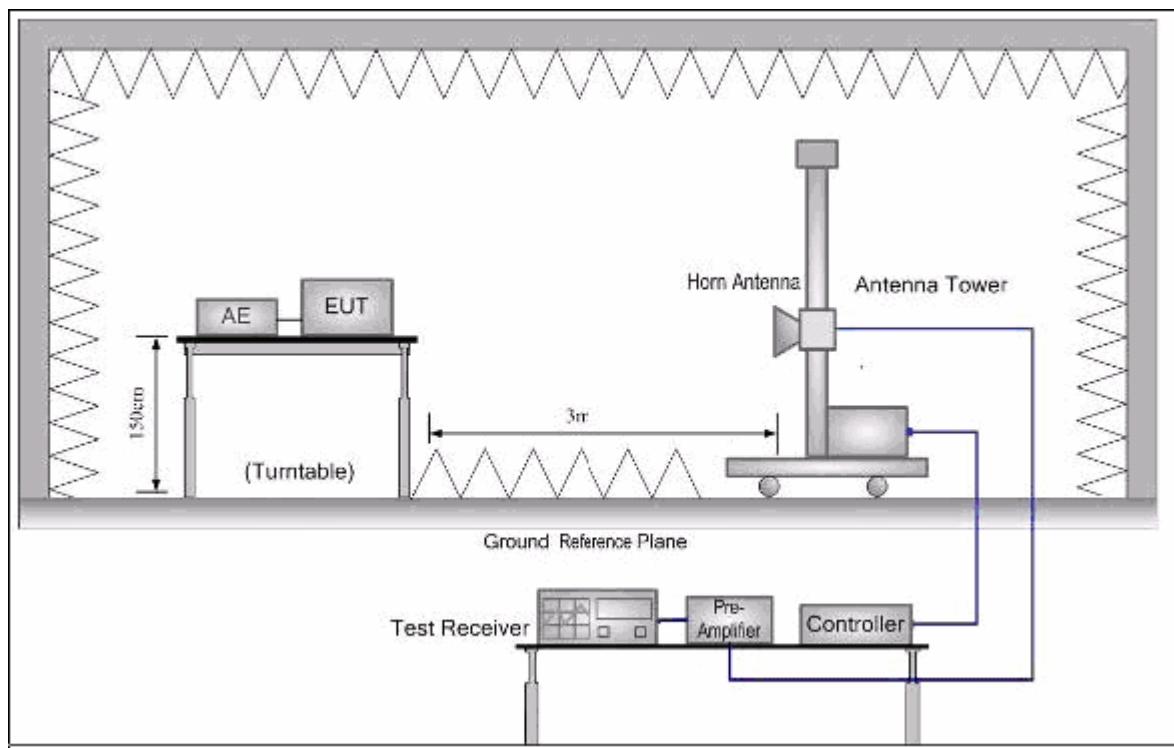

The field strength is calculated by adding the Antenna Factor, Cable Loss & Per-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Loss - Preamplifier Factor


## 6.2.2 Radiated Emissions Test Data

### **9 kHz~30 MHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement**

The measurements with active loop antenna were greater than 20dB below the limit, so the test data were not recorded in the test report.


## 30 MHz~1 GHz Field Strength of Unwanted Emissions. Quasi-Peak Measurement

|                      |  |                    |  |
|----------------------|--|--------------------|--|
| EUT:                 | Big Blue Party Chrome                                  | Model Name :       | AR106A4BK  |
| Pressure:            | 1010 hPa   | Relative Humidity: | 50%  |
| Test Mode :          | TX mode(worse-case)                                    | Test Voltage :     | DC 18V from adapter,<br>AC 120V/60Hz for adapter |
| Measurement Distance | 3 m  | Frenqucy Range     | 30MHz to 1GHz                                    |
| RBW/VBW              | 100KHz / 300KHz for spectrum, RBW=120KHz for receiver. |                    |  |

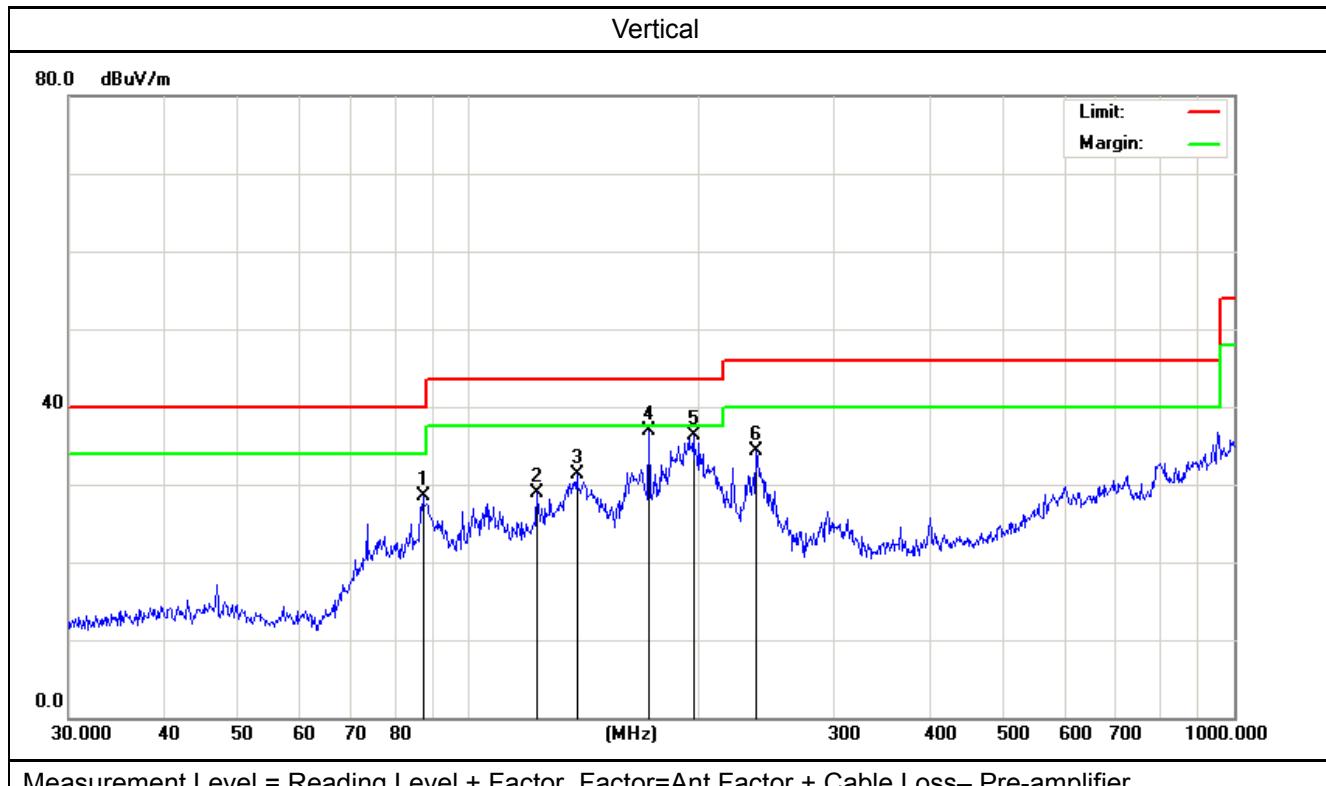

Measurement Level = Reading Level + Factor, Factor=Ant Factor + Cable Loss– Pre-amplifier.

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   |          |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|
|     |     |          | Level   | Factor  | ment     |        |        |          |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     | Detector |
| 1   |     | 87.1117  | 47.09   | -18.60  | 28.49    | 40.00  | -11.51 | QP       |
| 2   |     | 122.8340 | 43.91   | -15.04  | 28.87    | 43.50  | -14.63 | QP       |
| 3   |     | 138.3873 | 46.07   | -14.84  | 31.23    | 43.50  | -12.27 | QP       |
| 4   | *   | 171.9946 | 52.25   | -15.41  | 36.84    | 43.50  | -6.66  | QP       |
| 5   |     | 196.5098 | 53.04   | -16.65  | 36.39    | 43.50  | -7.11  | QP       |
| 6   |     | 237.4760 | 48.52   | -14.31  | 34.21    | 46.00  | -11.79 | QP       |

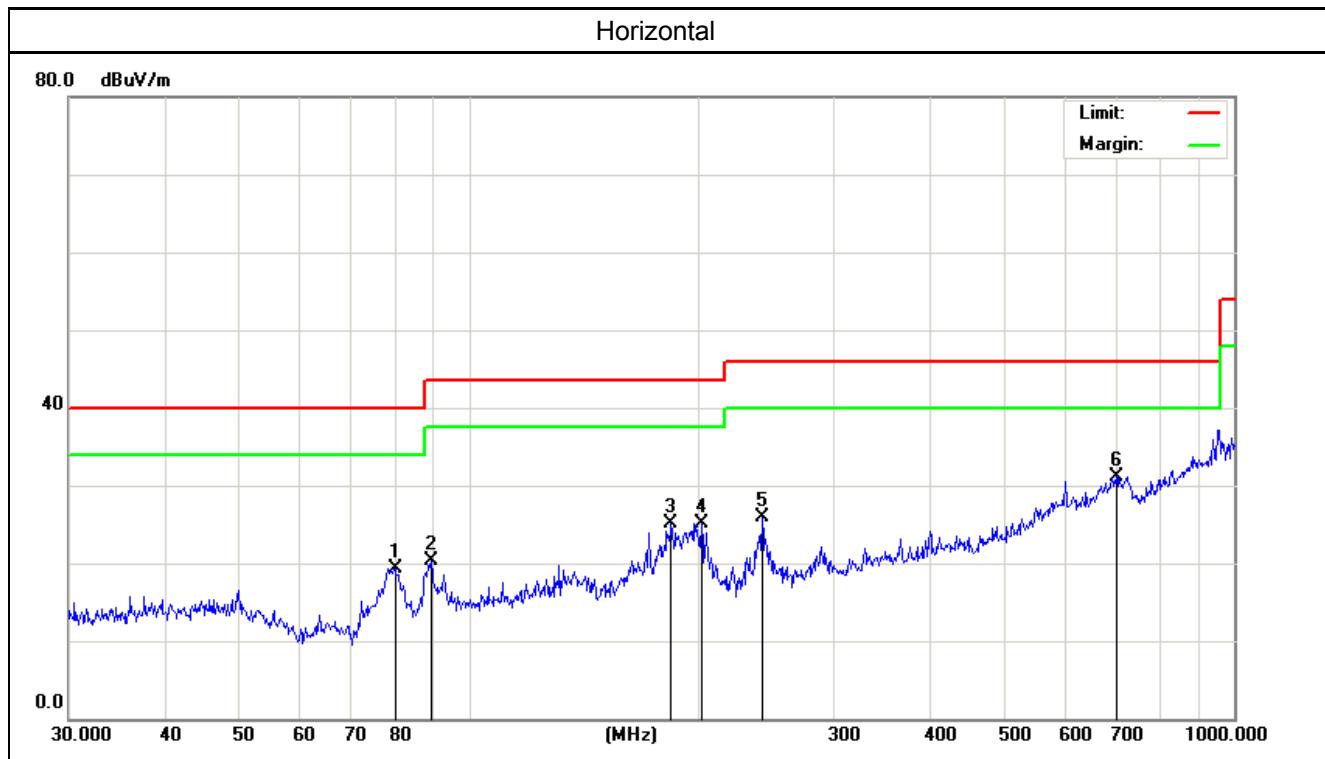

Measurement Level = Reading Level + Factor, Factor=Ant Factor + Cable Loss– Pre-amplifier.

| No. | Mk. | Freq.    | Reading | Correct | Measure- | Limit  | Over   |          |
|-----|-----|----------|---------|---------|----------|--------|--------|----------|
|     |     |          | Level   | Factor  | ment     |        |        |          |
|     |     | MHz      | dBuV    | dB      | dBuV/m   | dBuV/m | dB     | Detector |
| 1   |     | 80.0806  | 38.16   | -18.78  | 19.38    | 40.00  | -20.62 | QP       |
| 2   |     | 89.2764  | 37.21   | -16.94  | 20.27    | 43.50  | -23.23 | QP       |
| 3   |     | 183.8440 | 36.77   | -11.72  | 25.05    | 43.50  | -18.45 | QP       |
| 4   |     | 201.3930 | 42.02   | -16.91  | 25.11    | 43.50  | -18.39 | QP       |
| 5   |     | 241.6763 | 39.88   | -14.04  | 25.84    | 46.00  | -20.16 | QP       |
| 6   | *   | 701.7610 | 30.87   | 0.32    | 31.19    | 46.00  | -14.81 | QP       |

**1~40 GHz Field Strength of Fundamental & Field Strength of Unwanted Emissions.  
 Peak & Average Measurement.**

|               |   |                       |               |
|---------------|---|-----------------------|---------------|
| TX Mode:      | Ant 1   | Measurement Distance: | 3 m           |
| Test channel: | 802.11a-5180MHz   | Frequency Range:      | 1GHz to 40GHz |
| RBW/VBW:      | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                       |               |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                       |               |

| Vertical        |                      |                     |                        |                |             |               |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
| 10360.000       | 39.31                | 12.56               | 51.87                  | 74.00          | -22.13      | PEAK          |
| 15540.000       | 37.85                | 16.45               | 54.30                  | 74.00          | -19.70      | PEAK          |
| Horizontal      |                      |                     |                        |                |             |               |
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
| 10360.000       | 38.52                | 12.56               | 51.08                  | 74.00          | -22.92      | PEAK          |
| 15540.000       | 36.49                | 16.45               | 52.94                  | 74.00          | -21.06      | PEAK          |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor -Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11a-5220 MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10440.000       | 36.67   | 12.64               | 49.31                  | 74.00          | -24.69      | PEAK          |  |  |  |
| 15660.000       | 35.54   | 16.53               | 52.07                  | 74.00          | -21.93      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10440.000       | 37.12   | 12.64               | 49.76                  | 74.00          | -24.24      | PEAK          |  |  |  |
| 15660.000       | 35.36   | 16.53               | 51.89                  | 74.00          | -22.11      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

|               |   |                       |               |
|---------------|---|-----------------------|---------------|
| TX Mode:      | Ant 1   | Measurement Distance: | 3 m           |
| Test channel: | 802.11a-5240 MHz  | Frequency Range:      | 1GHz to 40GHz |
| RBW/VBW:      | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                       |               |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                       |               |

| Vertical        |                      |                     |                        |                |             |               |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
| 10480.000       | 36.48                | 12.68               | 49.16                  | 74.00          | -24.84      | PEAK          |
| 15720.000       | 34.75                | 16.54               | 51.29                  | 74.00          | -22.71      | PEAK          |
| Horizontal      |                      |                     |                        |                |             |               |
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
| 10480.000       | 35.12                | 12.68               | 47.80                  | 74.00          | -26.20      | PEAK          |
| 15720.000       | 34.37                | 16.54               | 50.91                  | 74.00          | -23.09      | PEAK          |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11a-5745 MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11490.000       | 33.84   | 16.82               | 50.66                  | 74.00          | -23.34      | PEAK          |  |  |  |
| 17235.000       | 35.72   | 22.93               | 58.65                  | 74.00          | -15.35      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11490.000       | 34.21   | 16.82               | 51.03                  | 74.00          | -22.97      | PEAK          |  |  |  |
| 17235.000       | 35.58   | 22.93               | 58.51                  | 74.00          | -15.49      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11a-5785 MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11570.000       | 34.10   | 16.71               | 50.81                  | 74.00          | -23.19      | PEAK          |  |  |  |
| 17355.000       | 36.79   | 24.37               | 61.16                  | 74.00          | -12.84      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11570.000       | 33.25   | 16.71               | 49.96                  | 74.00          | -24.04      | PEAK          |  |  |  |
| 17355.000       | 35.58   | 24.37               | 59.95                  | 74.00          | -14.05      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11a-5825 MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11650.000       | 34.12   | 16.61               | 50.73                  | 74.00          | -23.27      | PEAK          |  |  |  |
| 17475.000       | 29.38   | 25.01               | 54.39                  | 74.00          | -19.61      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11650.000       | 35.72   | 16.61               | 52.33                  | 74.00          | -21.67      | PEAK          |  |  |  |
| 17475.000       | 28.82   | 25.01               | 53.83                  | 74.00          | -20.17      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11n HT20-5180MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10360.000       | 33.24   | 12.56               | 45.80                  | 74.00          | -28.20      | PEAK          |  |  |  |
| 15540.000       | 35.37   | 16.45               | 51.82                  | 74.00          | -22.18      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10360.000       | 35.73   | 12.56               | 48.29                  | 74.00          | -25.71      | PEAK          |  |  |  |
| 15540.000       | 36.15   | 16.45               | 52.60                  | 74.00          | -21.40      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11n HT20-5220MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10440.000       | 33.98   | 12.64               | 46.62                  | 74.00          | -27.38      | PEAK          |  |  |  |
| 15660.000       | 29.44   | 16.53               | 45.97                  | 74.00          | -28.03      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10440.000       | 32.12   | 12.64               | 44.76                  | 74.00          | -29.24      | PEAK          |  |  |  |
| 15660.000       | 28.91   | 16.53               | 45.44                  | 74.00          | -28.56      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11n HT20-5240MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10480.000       | 33.15   | 12.68               | 45.83                  | 74.00          | -28.17      | PEAK          |  |  |  |
| 15720.000       | 29.36   | 16.54               | 45.90                  | 74.00          | -28.10      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10480.000       | 34.50   | 12.68               | 47.18                  | 74.00          | -26.82      | PEAK          |  |  |  |
| 15720.000       | 28.83   | 16.54               | 45.37                  | 74.00          | -28.63      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11n HT20-5745MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11490.000       | 34.95   | 16.82               | 51.77                  | 74.00          | -22.23      | PEAK          |  |  |  |
| 17235.000       | 29.91   | 22.93               | 52.84                  | 74.00          | -21.16      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11570.000       | 35.83   | 16.71               | 52.54                  | 74.00          | -21.46      | PEAK          |  |  |  |
| 17235.000       | 28.42   | 22.93               | 51.35                  | 74.00          | -22.65      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11n HT20-5785MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11570.000       | 35.39   | 16.71               | 52.10                  | 74.00          | -21.90      | PEAK          |  |  |  |
| 17355.000       | 28.72   | 24.37               | 53.09                  | 74.00          | -20.91      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11570.000       | 36.12   | 16.71               | 52.83                  | 74.00          | -21.17      | PEAK          |  |  |  |
| 17355.000       | 29.48   | 24.37               | 53.85                  | 74.00          | -20.15      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11n HT20-5825MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average  |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11650.000       | 33.56   | 16.61               | 50.17                  | 74.00          | -23.83      | PEAK          |  |  |  |
| 17475.000       | 29.71   | 25.01               | 54.72                  | 74.00          | -19.28      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11650.000       | 34.82   | 16.61               | 51.43                  | 74.00          | -22.57      | PEAK          |  |  |  |
| 17475.000       | 28.37   | 25.01               | 53.38                  | 74.00          | -20.62      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

|               |   |                       |               |
|---------------|---|-----------------------|---------------|
| TX Mode:      | Ant 1   | Measurement Distance: | 3 m           |
| Test channel: | 802.11n HT40-5190MHz  | Frequency Range:      | 1GHz to 40GHz |
| RBW/VBW:      | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                       |               |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                       |               |

| Vertical        |                      |                     |                        |                |             |               |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
| 10380.000       | 39.13                | 12.58               | 51.71                  | 74.00          | -22.29      | PEAK          |
| 15570.000       | 28.50                | 16.48               | 44.98                  | 74.00          | -29.02      | PEAK          |
| Horizontal      |                      |                     |                        |                |             |               |
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
| 10380.000       | 38.30                | 12.58               | 50.88                  | 74.00          | -23.12      | PEAK          |
| 15570.000       | 29.43                | 16.48               | 45.91                  | 74.00          | -28.09      | PEAK          |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11n HT40-5230MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10460.000       | 37.40   | 12.66               | 50.06                  | 74.00          | -23.94      | PEAK          |  |  |  |
| 15690.000       | 28.21   | 16.53               | 44.74                  | 74.00          | -29.26      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10460.000       | 36.23   | 12.66               | 48.89                  | 74.00          | -25.11      | PEAK          |  |  |  |
| 15690.000       | 26.54   | 16.53               | 43.07                  | 74.00          | -30.93      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11n HT40-5755MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11510.000       | 34.59   | 16.78               | 51.37                  | 74.00          | -22.63      | PEAK          |  |  |  |
| 17265.000       | 28.31   | 23.29               | 51.60                  | 74.00          | -22.40      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11510.000       | 35.12   | 16.78               | 51.90                  | 74.00          | -22.10      | PEAK          |  |  |  |
| 17265.000       | 29.43   | 23.29               | 52.72                  | 74.00          | -21.28      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11n HT40-5795MHz  |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11590.000       | 36.31   | 16.69               | 53.00                  | 74.00          | -21.00      | PEAK          |  |  |  |
| 17385.000       | 31.40   | 24.73               | 56.13                  | 74.00          | -17.87      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11590.000       | 34.87   | 16.69               | 51.56                  | 74.00          | -22.44      | PEAK          |  |  |  |
| 17385.000       | 28.20   | 24.73               | 52.93                  | 74.00          | -21.07      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT20-5180MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10360.000       | 34.79   | 12.56               | 47.35                  | 74.00          | -26.65      | PEAK          |  |  |  |
| 15540.000       | 30.48   | 16.45               | 46.93                  | 74.00          | -27.07      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10360.000       | 33.05   | 12.56               | 45.61                  | 74.00          | -28.39      | PEAK          |  |  |  |
| 15540.000       | 29.34   | 16.45               | 45.79                  | 74.00          | -28.21      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT20-5220MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10440.000       | 34.87   | 12.64               | 47.51                  | 74.00          | -26.49      | PEAK          |  |  |  |
| 15660.000       | 31.69   | 16.53               | 48.22                  | 74.00          | -25.78      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10440.000       | 33.66   | 12.64               | 46.30                  | 74.00          | -27.70      | PEAK          |  |  |  |
| 15660.000       | 32.01   | 16.53               | 48.54                  | 74.00          | -25.46      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT20-5240MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10480.000       | 34.46   | 12.68               | 47.14                  | 74.00          | -26.86      | PEAK          |  |  |  |
| 15720.000       | 32.93   | 16.54               | 49.47                  | 74.00          | -24.53      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10480.000       | 33.15   | 12.68               | 45.83                  | 74.00          | -28.17      | PEAK          |  |  |  |
| 15720.000       | 34.79   | 16.54               | 51.33                  | 74.00          | -22.67      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT20-5745MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11490.000       | 34.93   | 16.82               | 51.75                  | 74.00          | -22.25      | PEAK          |  |  |  |
| 17235.000       | 32.76   | 22.93               | 55.69                  | 74.00          | -18.31      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11490.000       | 36.17   | 16.82               | 52.99                  | 74.00          | -21.01      | PEAK          |  |  |  |
| 17235.000       | 28.22   | 22.93               | 51.15                  | 74.00          | -22.85      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT20-5785MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11570.000       | 35.86   | 16.71               | 52.57                  | 74.00          | -21.43      | PEAK          |  |  |  |
| 17355.000       | 29.14   | 24.37               | 53.51                  | 74.00          | -20.49      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11570.000       | 34.27   | 16.71               | 50.98                  | 74.00          | -23.02      | PEAK          |  |  |  |
| 17355.000       | 28.66   | 24.37               | 53.03                  | 74.00          | -20.97      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT20-5825MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11650.000       | 35.58   | 16.61               | 52.19                  | 74.00          | -21.81      | PEAK          |  |  |  |
| 17475.000       | 29.30   | 25.01               | 54.31                  | 74.00          | -19.69      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11650.000       | 33.29   | 16.61               | 49.90                  | 74.00          | -24.10      | PEAK          |  |  |  |
| 17475.000       | 28.76   | 25.01               | 53.77                  | 74.00          | -20.23      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

|               |   |                       |               |
|---------------|---|-----------------------|---------------|
| TX Mode:      | Ant 1   | Measurement Distance: | 3 m           |
| Test channel: | 802.11ac HT40-5190MHz   | Frequency Range:      | 1GHz to 40GHz |
| RBW/VBW:      | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                       |               |
| Remark:       | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                       |               |

| Vertical        |                      |                     |                        |                |             |               |
|-----------------|----------------------|---------------------|------------------------|----------------|-------------|---------------|
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
| 10380.000       | 33.12                | 12.58               | 45.70                  | 74.00          | -28.30      | PEAK          |
| 15570.000       | 30.35                | 16.48               | 46.83                  | 74.00          | -27.17      | PEAK          |
| Horizontal      |                      |                     |                        |                |             |               |
| Frequency (MHz) | Reading Level (dBuV) | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |
| 10380.000       | 35.57                | 12.58               | 48.15                  | 74.00          | -25.85      | PEAK          |
| 15570.000       | 32.60                | 16.48               | 49.08                  | 74.00          | -24.92      | PEAK          |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT40-5230MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10460.000       | 34.21   | 12.66               | 46.87                  | 74.00          | -27.13      | PEAK          |  |  |  |
| 15690.000       | 30.66   | 16.53               | 47.19                  | 74.00          | -26.81      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10460.000       | 35.14   | 12.66               | 47.80                  | 74.00          | -26.20      | PEAK          |  |  |  |
| 15690.000       | 30.77   | 16.53               | 47.30                  | 74.00          | -26.70      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT40-5755MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11510.000       | 36.37   | 16.78               | 53.15                  | 74.00          | -20.85      | PEAK          |  |  |  |
| 17265.000       | 32.92   | 23.29               | 56.21                  | 74.00          | -17.79      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11510.000       | 34.85   | 16.78               | 51.63                  | 74.00          | -22.37      | PEAK          |  |  |  |
| 17265.000       | 31.20   | 23.29               | 54.49                  | 74.00          | -19.51      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT40-5795MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11590.000       | 33.17   | 16.69               | 49.86                  | 74.00          | -24.14      | PEAK          |  |  |  |
| 17385.000       | 31.62   | 24.73               | 56.35                  | 74.00          | -17.65      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11590.000       | 34.80   | 16.69               | 51.49                  | 74.00          | -22.51      | PEAK          |  |  |  |
| 17385.000       | 30.35   | 24.73               | 55.08                  | 74.00          | -18.92      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT80-5210MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10420.000       | 32.16   | 12.62               | 44.78                  | 74.00          | -29.22      | PEAK          |  |  |  |
| 15630.000       | 29.94   | 16.52               | 46.46                  | 74.00          | -27.54      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 10420.000       | 34.52   | 12.62               | 47.14                  | 74.00          | -26.86      | PEAK          |  |  |  |
| 15630.000       | 31.76   | 16.52               | 48.28                  | 74.00          | -25.72      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

| TX Mode:        | Ant 1   |                     | Measurement Distance:  | 3 m            |             |               |  |  |  |
|-----------------|---|---------------------|------------------------|----------------|-------------|---------------|--|--|--|
| Test channel:   | 802.11ac HT80-5775MHz   |                     | Frequency Range:       | 1GHz to 40GHz  |             |               |  |  |  |
| RBW/VBW:        | Spurious emission: 1MHz/3MHz for Peak, 1MHz/10Hz for Average.   |                     |                        |                |             |               |  |  |  |
| Remark:         | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20dB below limit line within 1-40GHz, there is not show in the report. |                     |                        |                |             |               |  |  |  |
| Vertical        |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11550.000       | 33.11   | 16.73               | 49.84                  | 74.00          | -24.16      | PEAK          |  |  |  |
| 17325.000       | 30.45   | 24.01               | 54.46                  | 74.00          | -19.54      | PEAK          |  |  |  |
| Horizontal      |   |                     |                        |                |             |               |  |  |  |
| Frequency (MHz) | Reading Level (dBuV)  | Correct Factor (dB) | Measure Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector Type |  |  |  |
| 11550.000       | 34.78   | 16.73               | 51.51                  | 74.00          | -22.49      | PEAK          |  |  |  |
| 17325.000       | 31.54   | 24.01               | 55.55                  | 74.00          | -18.45      | PEAK          |  |  |  |

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor –Preamplifier Factor.

Average measurement was not performed if peak level lower than average limit.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), The amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

## 6.3 Radiated Restricted Band Edge Measurement

### 6.3.1 Applied procedures / Limit

*Undesirable emission limits.* Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.725-5.85 GHz band: All emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an e.i.r.p. of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (4) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in §15.207.
- (5) The provisions of §15.205 apply to intentional radiators operating under this section. (6) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

### 6.3.2 Test procedure

For Band edge

| Spectrum Parameter                    | Setting  |
|---------------------------------------|--|
| Detector                              | Peak   |
| Start/Stop Frequency                  | Lower Band Edge: 5150 MHz<br>Upper Band Edge: 5350 MHz |
| RB / VB (emission in restricted band) | 1000 KHz/3000 KHz                                      |
| Trace-Mode:                           | Max hold   |

For Band edge

| Spectrum Parameter                    | Setting  |
|---------------------------------------|--|
| Detector                              | Peak   |
| Start/Stop Frequency                  | Lower Band Edge: 5700 to 5725 MHz<br>Upper Band Edge: 5850 to 5870 MHz |
| RB / VB (emission in restricted band) | 1000 KHz/3000 KHz  |
| Trace-Mode:                           | Max hold   |



### 6.3.3 Deviation from standard



No deviation.

### 6.3.4 Test results



Note:1/2 Represent the value of antenna1/2, The worst data is Antenna 1, only shown Antenna 1 Plot.



Ant 1 802.11 a

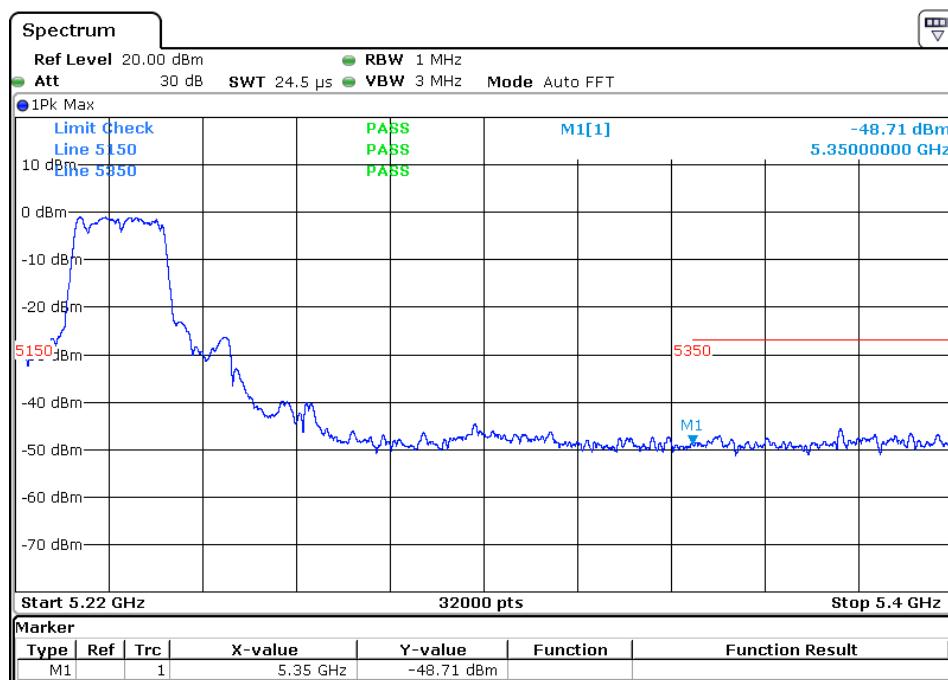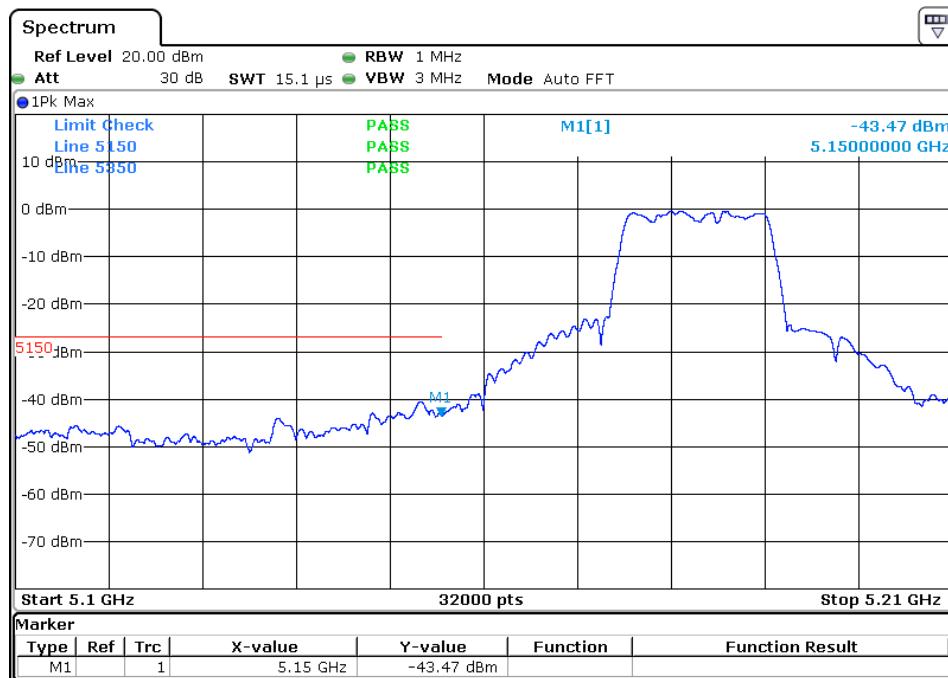

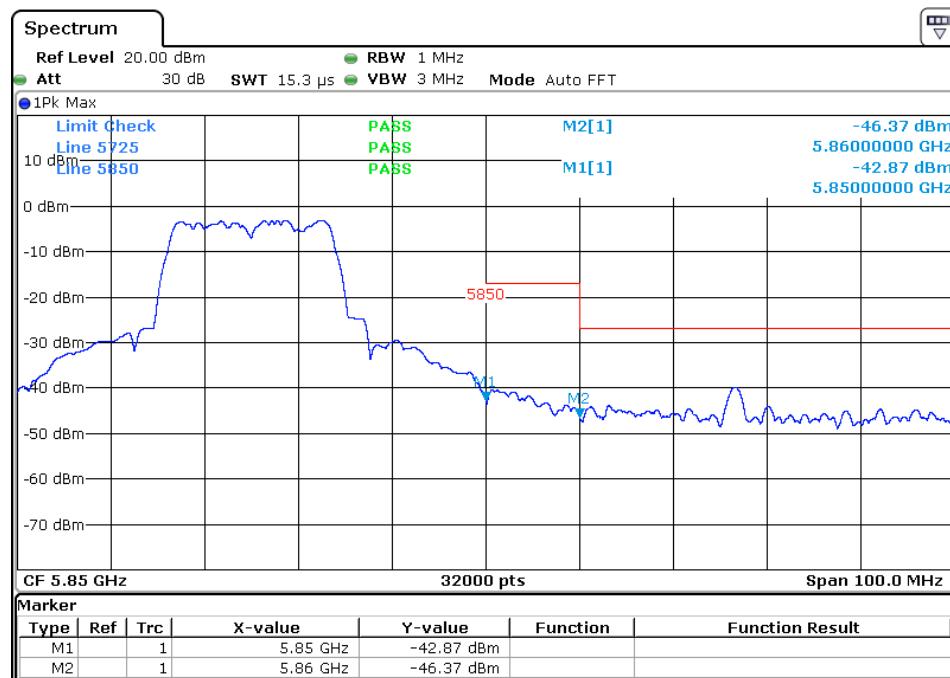
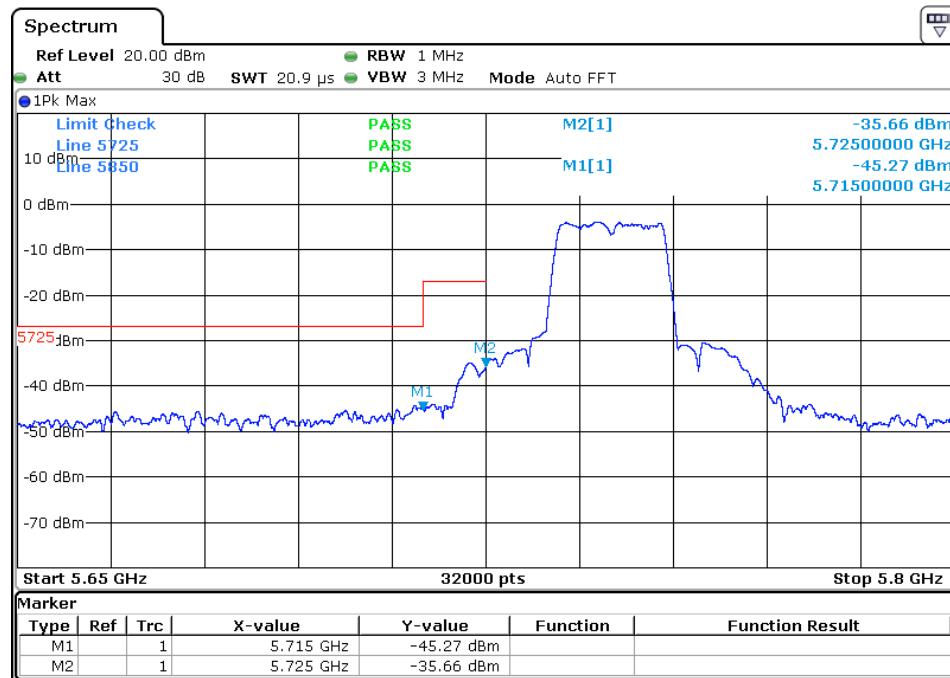


## Ant 1 802.11 n20

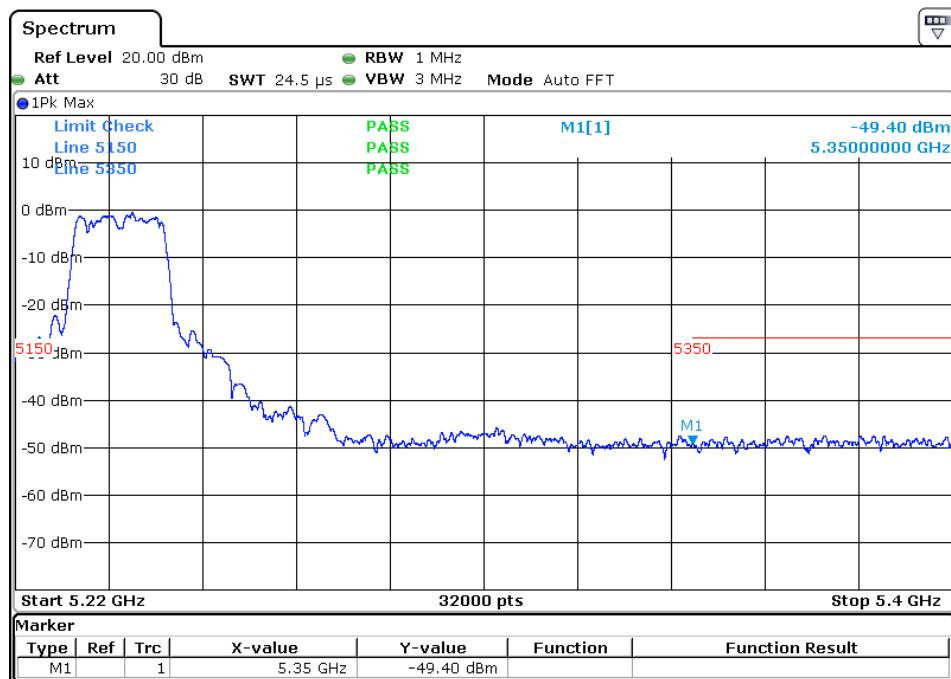
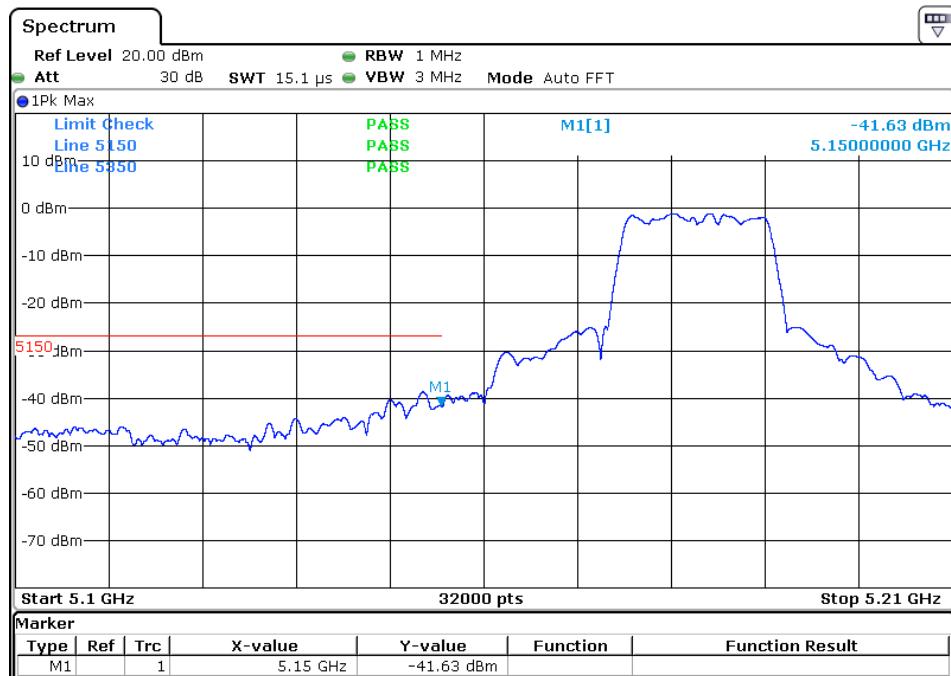


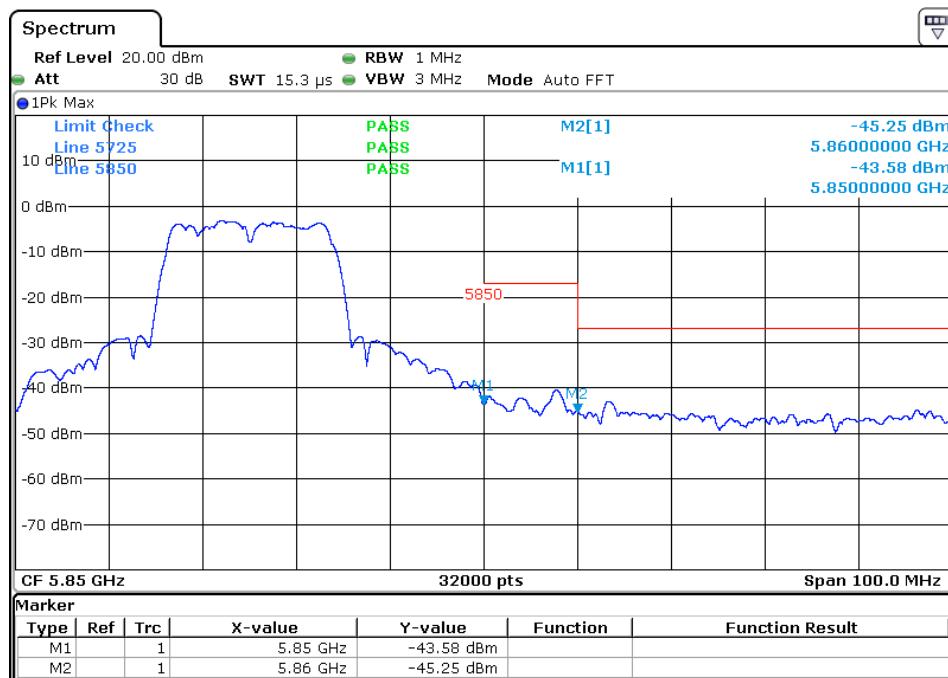
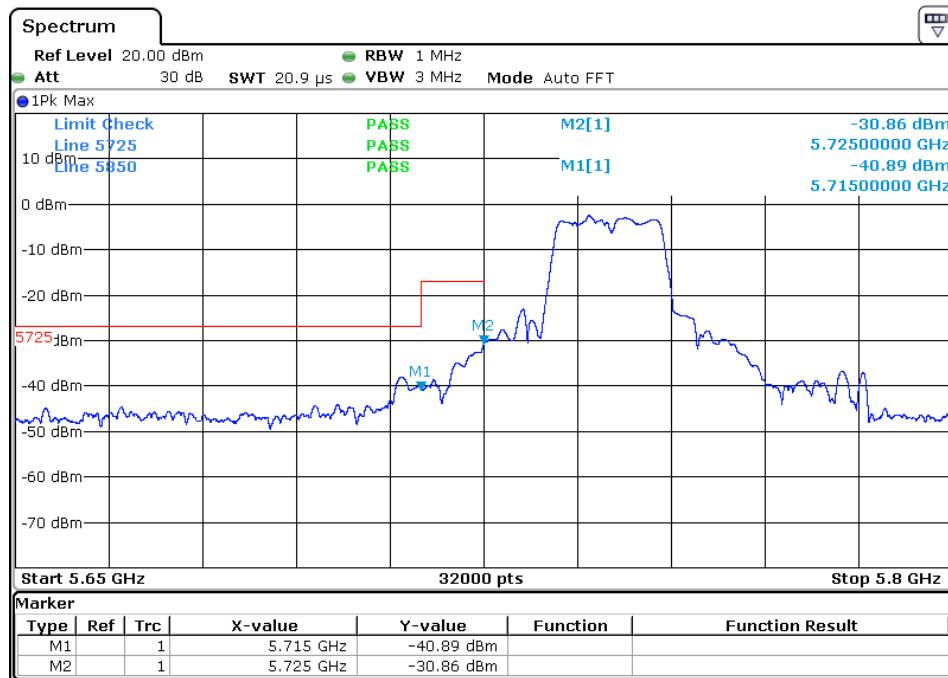


## Ant 1 802.11 n40

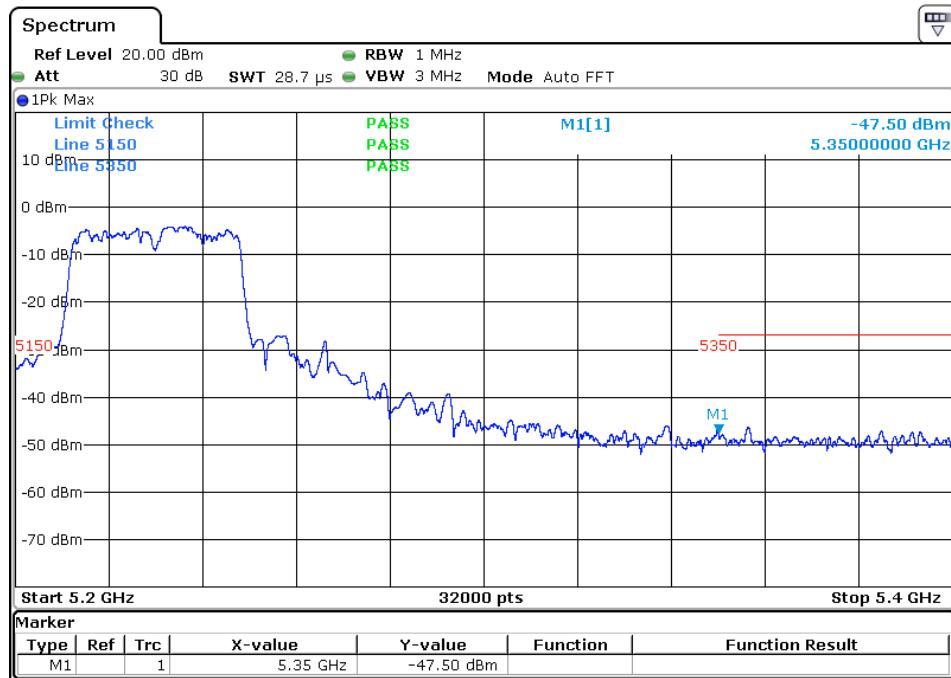
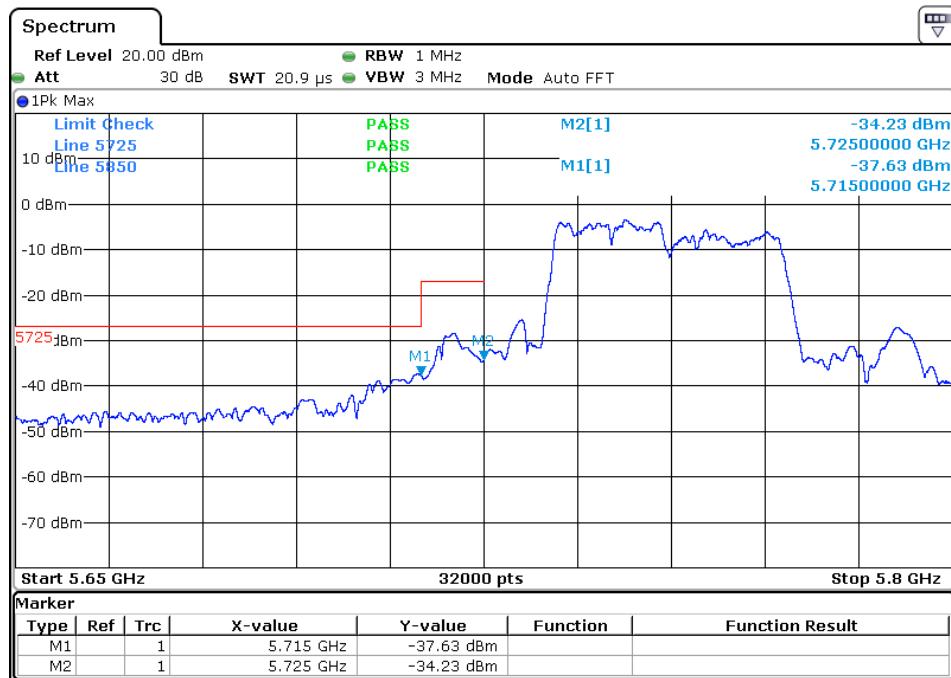


## Ant 1 802.11 ac40

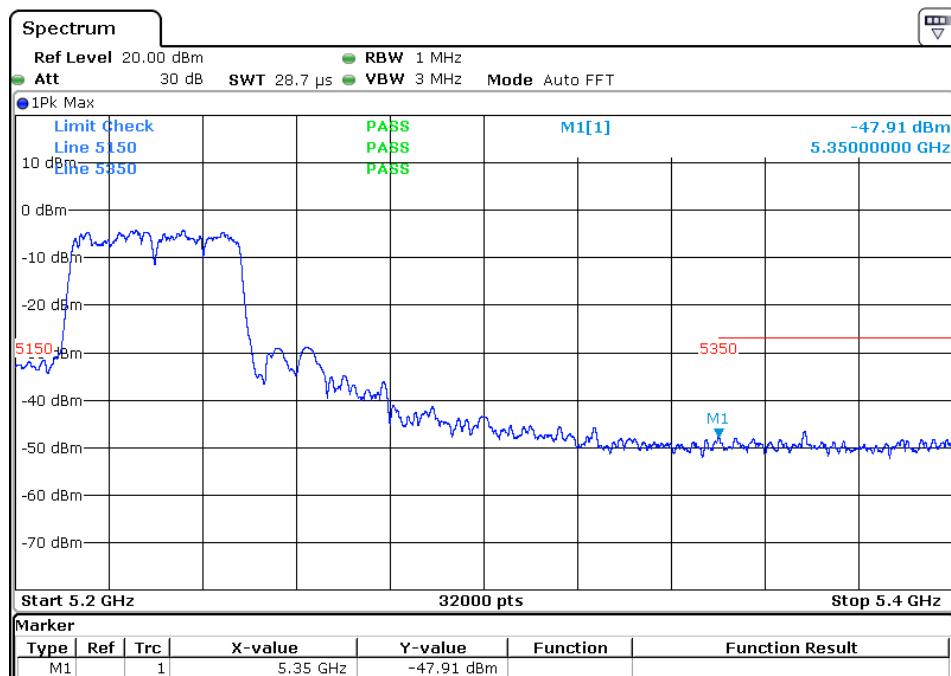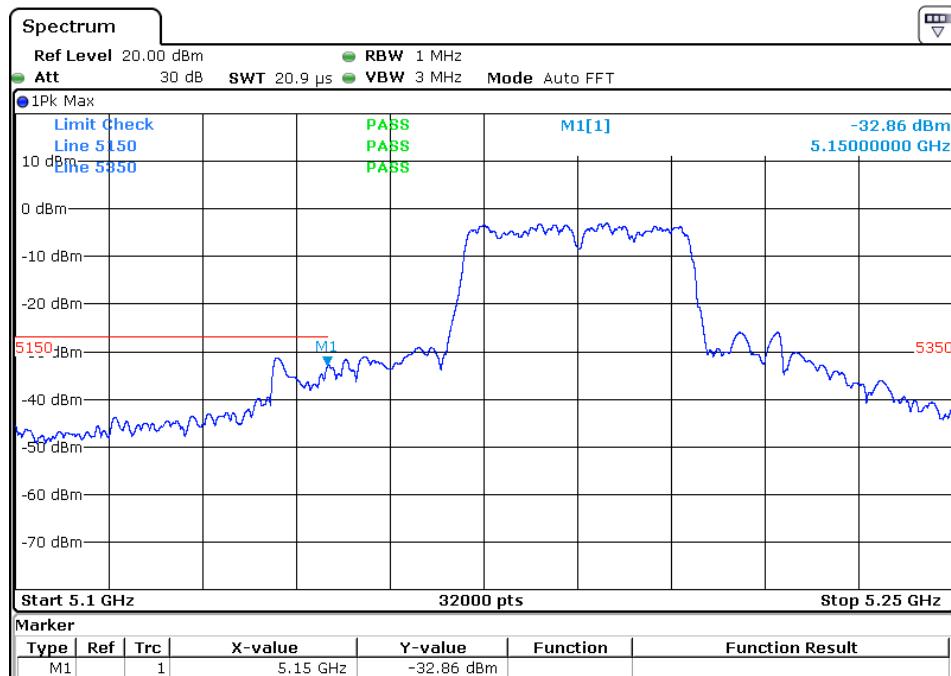

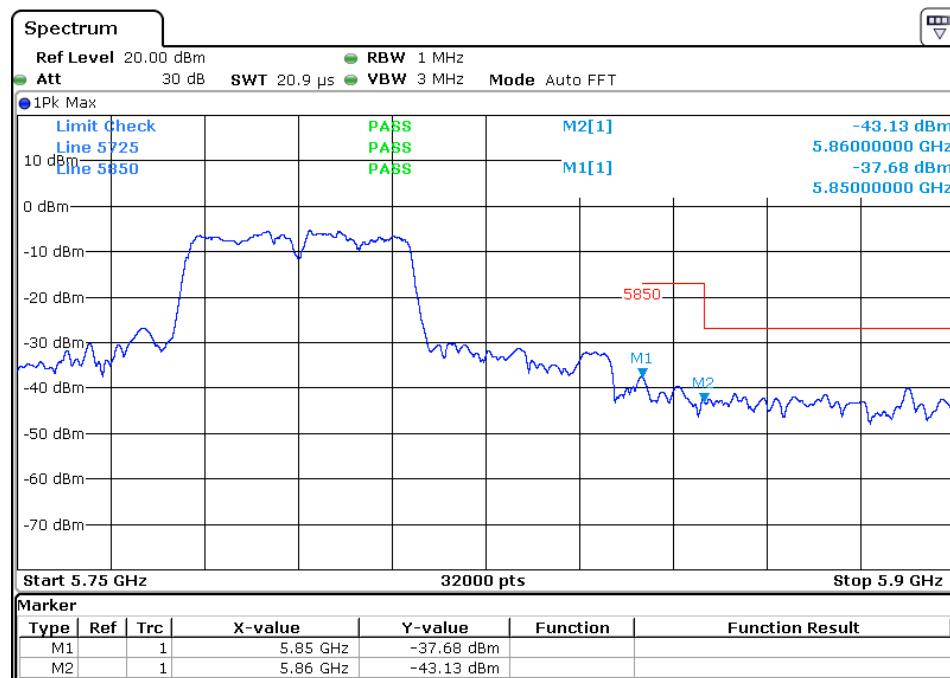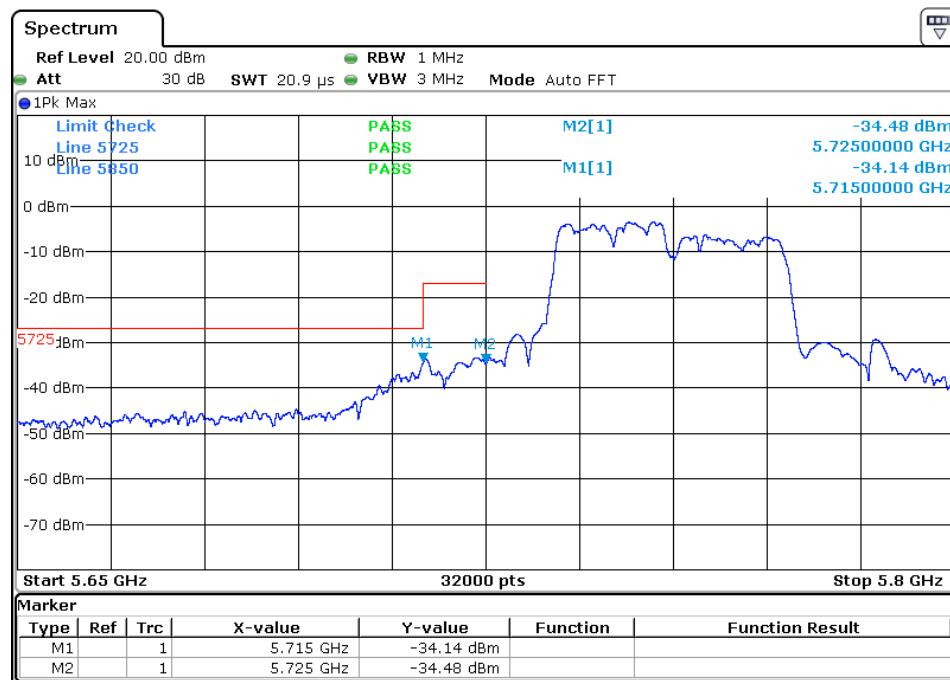

## Ant 1 802.11 ac80

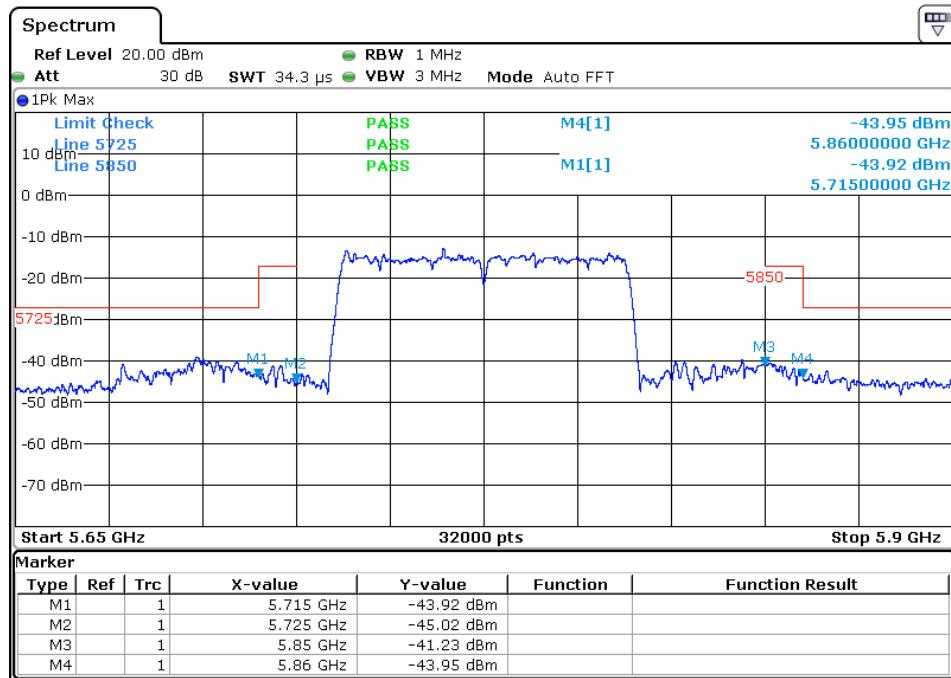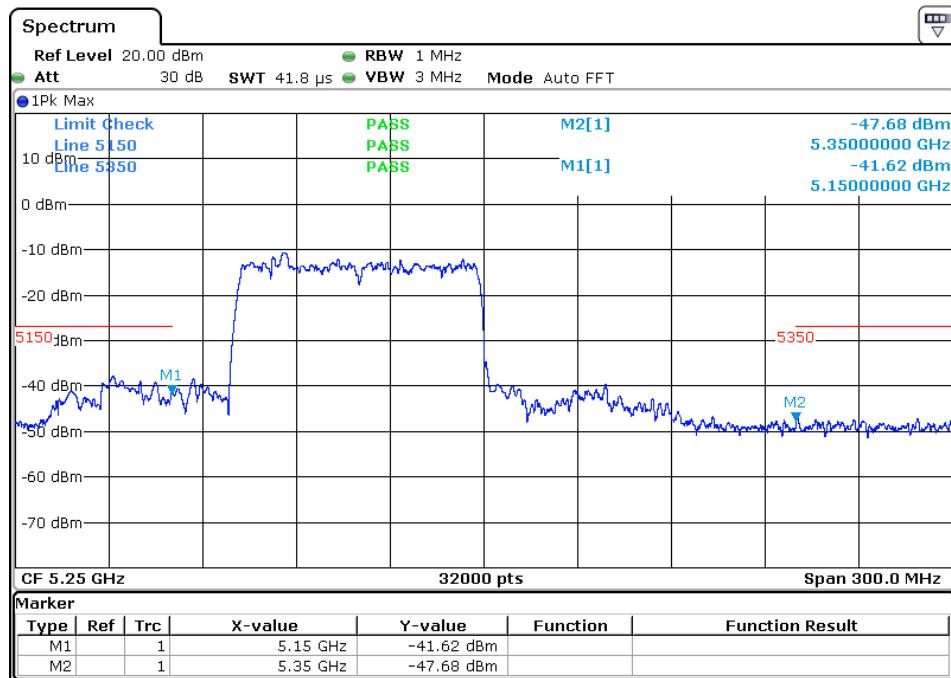

## 6.4 BANDWIDTH TEST

### 6.4.1 Applied procedures / Limit

The bandwidth at 26 dB down from the highest in-band spectral density is measured with a spectrum analyzer connected to the antenna terminal while the EUT is operating at its maximum power control level, as defined in KDB 789033, at the appropriate frequencies. The spectrum analyzer's bandwidth measurement function is configured to measure the 26 dB bandwidth.

The 26 dB bandwidth is used to determine the conducted power limits.

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.

The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

### 6.4.2 Test procedure

#### 26 dB BANDWID PROCEDURES

- a. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01
- b. Set RBW = approximately 1% of the emission bandwidth.
- c. Trace mode = max hold
- d. Detector = Peak
- e. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%

#### 6 dB BANDWID PROCEDURES

- a. Set resolution bandwidth (RBW) = 100 kHz
- b. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission


#### 99% BANDWID PROCEDURES

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW  $\geq 3 \times$  RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

#### 6.4.3 Deviation from standard

No deviation.

#### 6.4.4 Test setup

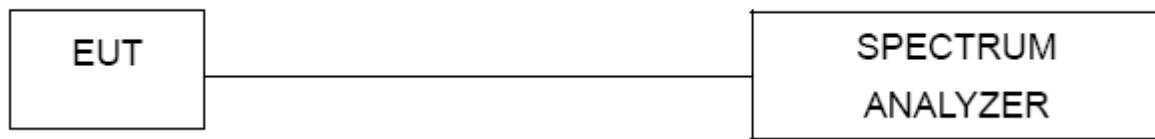



#### 6.4.5 Test results



Note:1/2 Represent the value of antenna1/2, The worst data is Antenna 1, only shown Antenna 1 Plot.



| Test Mode     | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 26dB Bandwidth (MHz) | 6dB Bandwidth (MHz) | Result |
|---------------|------------------|-------------|-----------------|----------------------|---------------------|--------|
| Ant 1         |                  |             |                 |                      |                     |        |
| 802.11a       | 6                | 36          | 5180            | 20.2387              | 17.4984             | Pass   |
| 802.11a       | 6                | 44          | 5220            | 20.495               | 17.5062             | Pass   |
| 802.11a       | 6                | 48          | 5240            | 20.105               | 17.5078             | Pass   |
| 802.11a       | 6                | 149         | 5745            | 20.2387              | 17.4937             | Pass   |
| 802.11a       | 6                | 157         | 5785            | 20.0037              | 17.5031             | Pass   |
| 802.11a       | 6                | 165         | 5825            | 20.2587              | 17.4984             | Pass   |
| 802.11n-HT20  | 7.2              | 36          | 5180            | 20.1187              | 17.4922             | Pass   |
| 802.11n-HT20  | 7.2              | 44          | 5220            | 20.2125              | 17.4812             | Pass   |
| 802.11n-HT20  | 7.2              | 48          | 5240            | 20.2225              | 17.5312             | Pass   |
| 802.11n-HT20  | 7.2              | 149         | 5745            | 20.205               | 17.5094             | Pass   |
| 802.11n-HT20  | 7.2              | 157         | 5785            | 20.125               | 17.5141             | Pass   |
| 802.11n-HT20  | 7.2              | 165         | 5825            | 20.175               | 17.5016             | Pass   |
| 802.11n-HT40  | 15               | 38          | 5190            | 40.44                | 35.625              | Pass   |
| 802.11n-HT40  | 15               | 46          | 5230            | 40.6425              | 35.435              | Pass   |
| 802.11n-HT40  | 15               | 151         | 5755            | 40.45                | 35.295              | Pass   |
| 802.11n-HT40  | 15               | 159         | 5795            | 40.115               | 35.3175             | Pass   |
| 802.11ac-VHT2 | 7.2              | 36          | 5180            | 20.815               | 17.4891             | Pass   |
| 802.11ac-VHT2 | 7.2              | 44          | 5220            | 23.0862              | 17.4953             | Pass   |
| 802.11ac-VHT2 | 7.2              | 48          | 5240            | 20.2075              | 17.5406             | Pass   |
| 802.11ac-VHT2 | 7.2              | 149         | 5745            | 20.2012              | 17.5063             | Pass   |
| 802.11ac-VHT2 | 7.2              | 157         | 5785            | 20.2325              | 17.525              | Pass   |
| 802.11ac-VHT2 | 7.2              | 165         | 5825            | 20.4187              | 17.2437             | Pass   |
| 802.11ac-VHT4 | 15               | 38          | 5190            | 40.515               | 35.005              | Pass   |
| 802.11ac-VHT4 | 15               | 46          | 5230            | 40.1375              | 35.4238             | Pass   |
| 802.11ac-VHT4 | 15               | 151         | 5755            | 40.4375              | 35.33               | Pass   |
| 802.11ac-VHT4 | 15               | 159         | 5795            | 40.2075              | 35.455              | Pass   |
| 802.11ac-VHT8 | 32.5             | 42          | 5210            | 81.625               | 76.1626             | Pass   |
| 802.11ac-VHT8 | 32.5             | 155         | 5775            | 82.29                | 76.1                | Pass   |

26 dBc Bandwidth plot as follows:



Ant 1 802.11 a

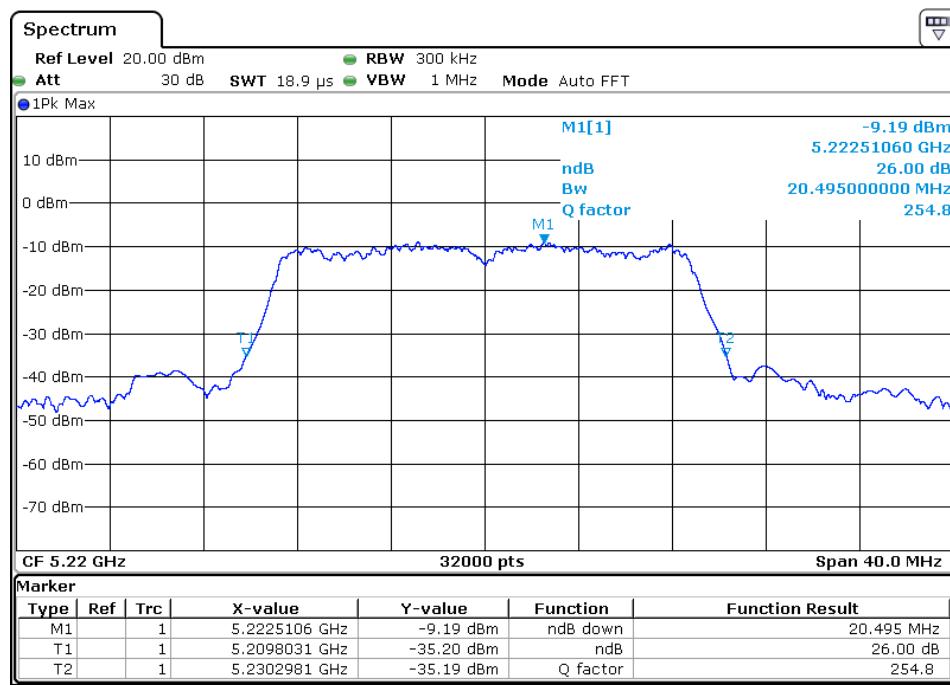
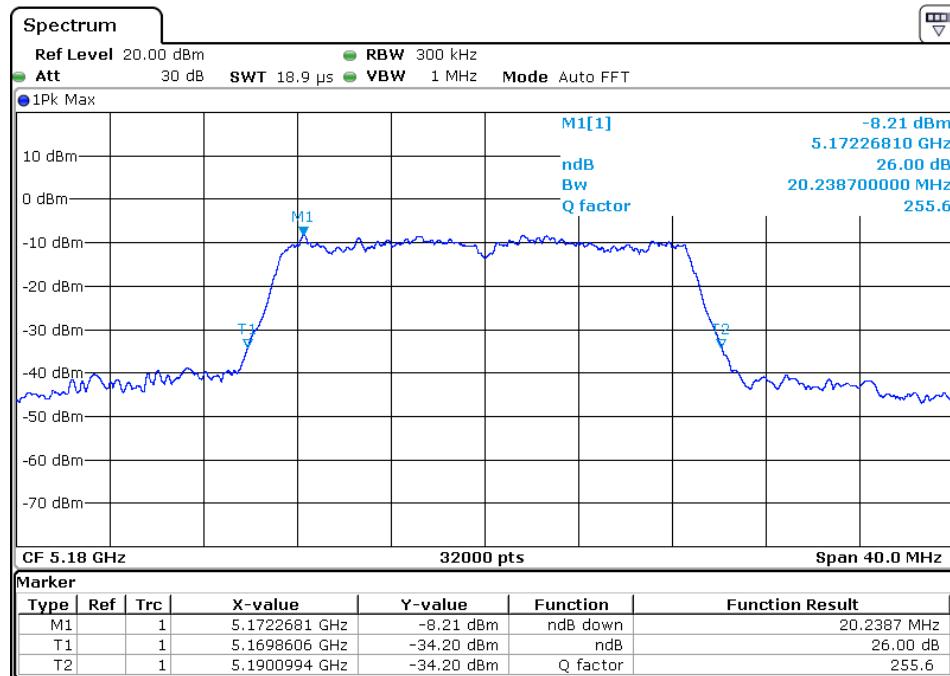


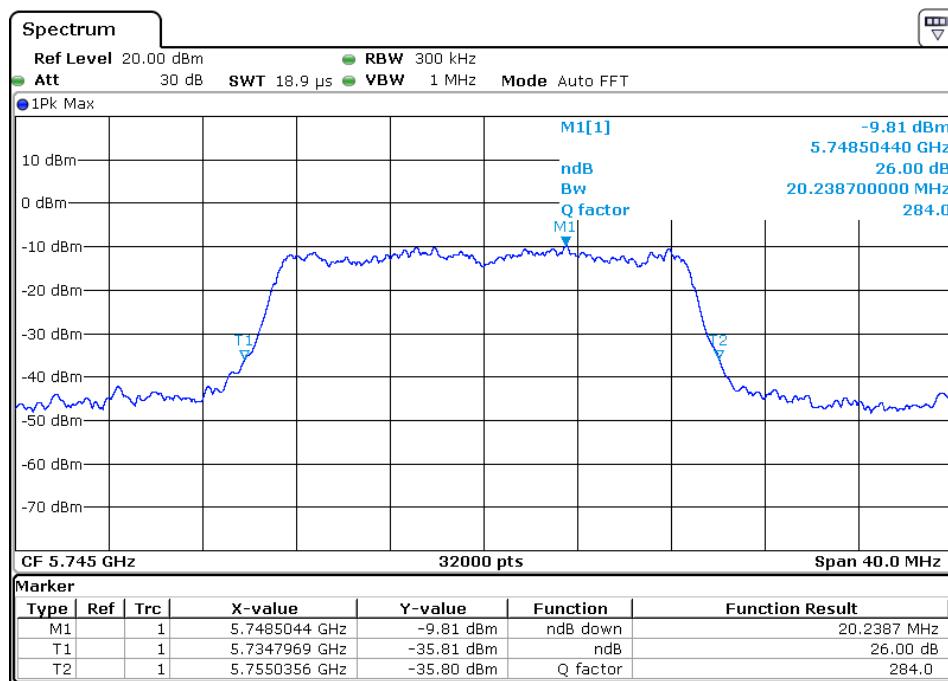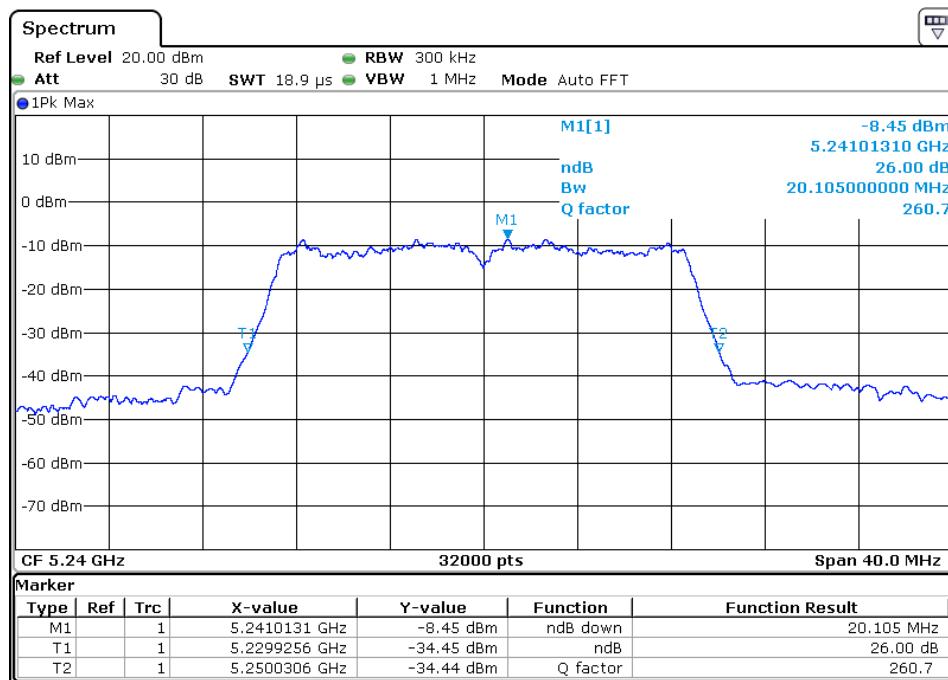


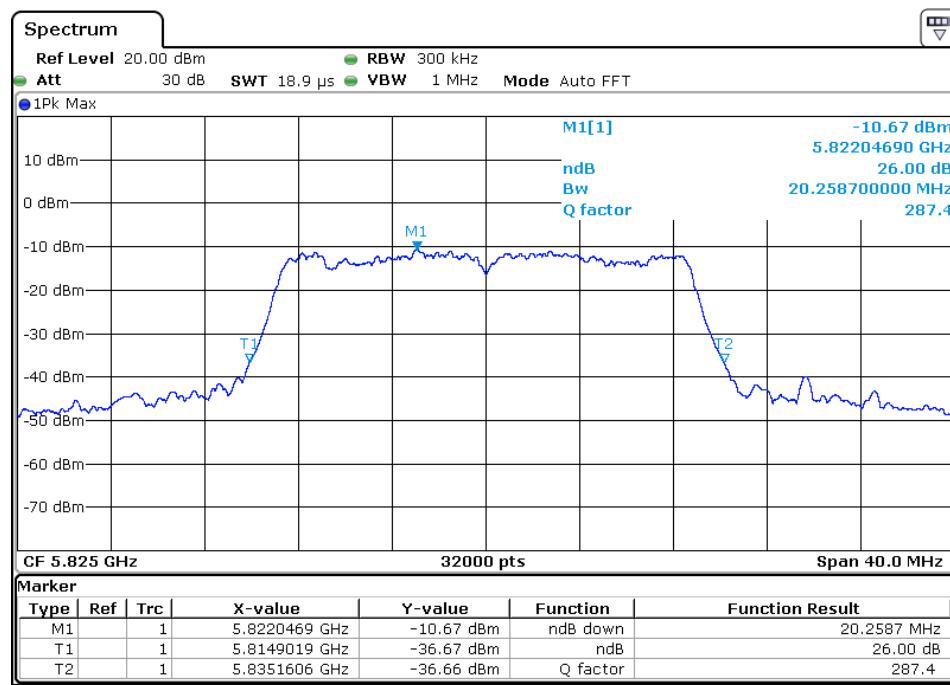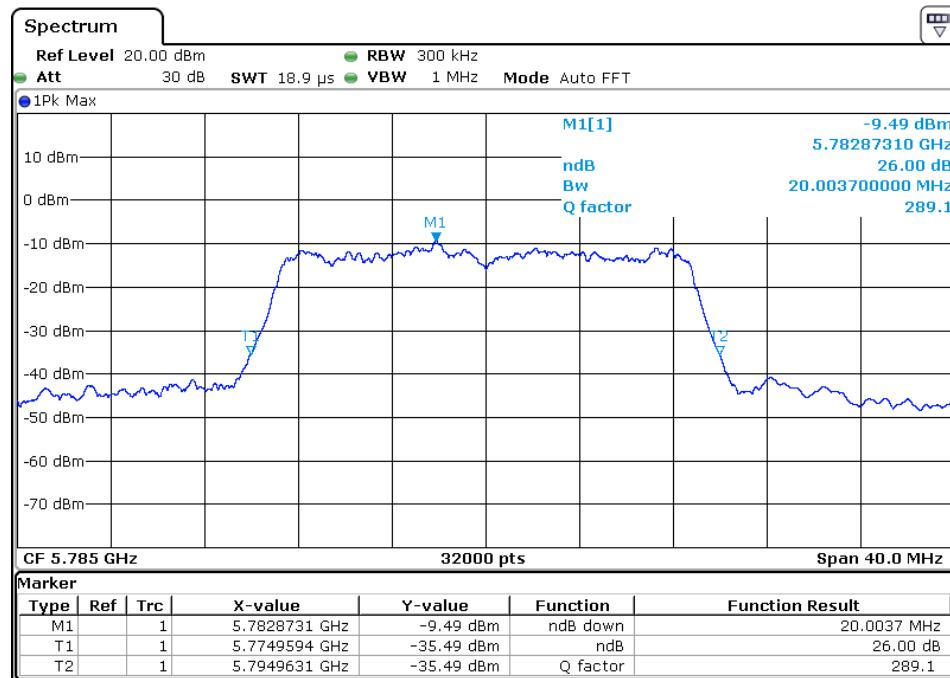



## Ant 1 802.11 n20

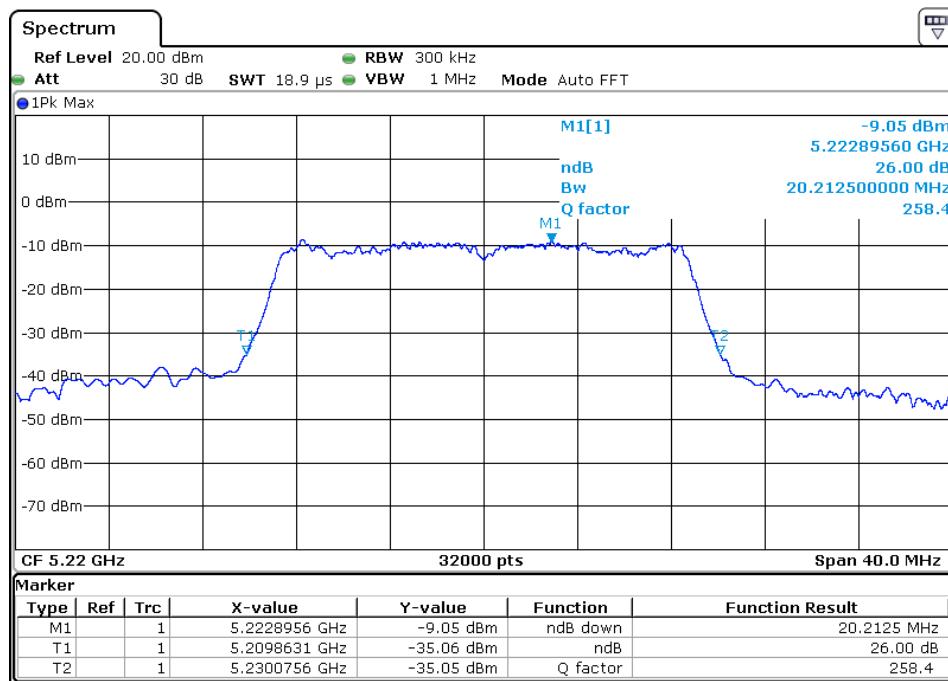
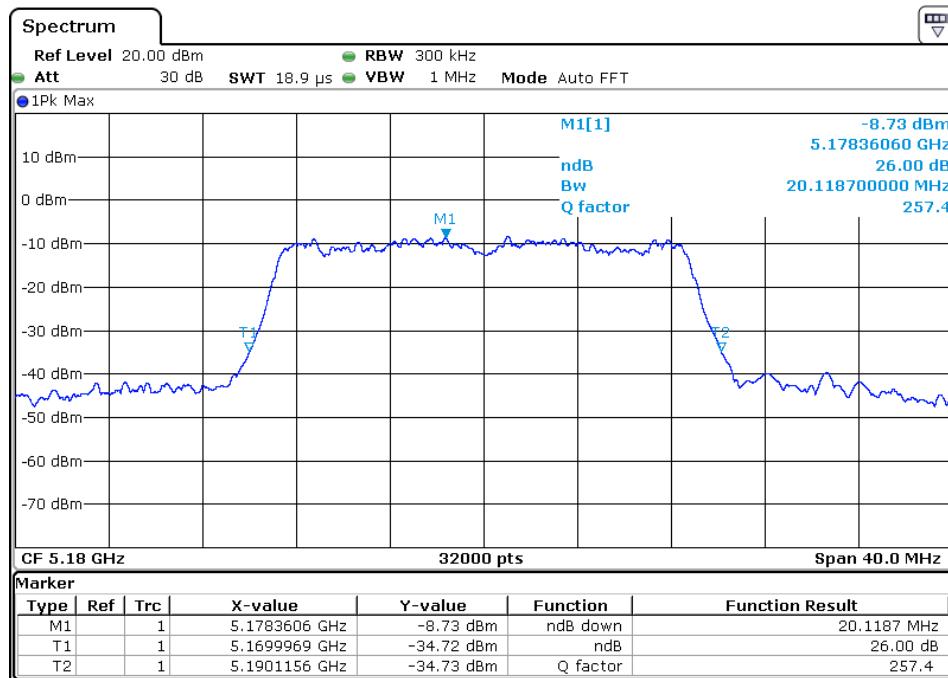


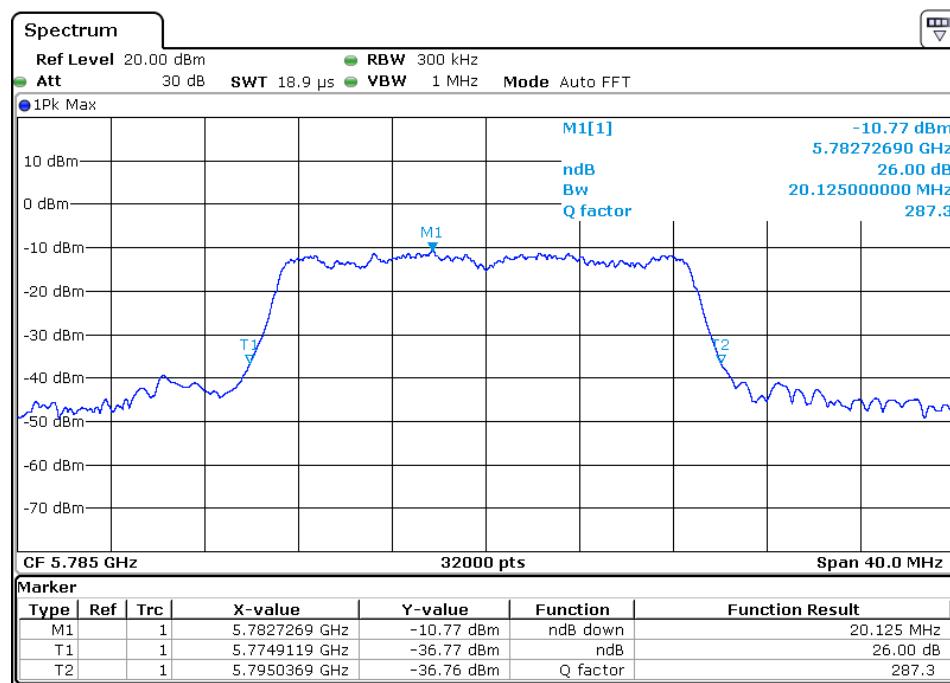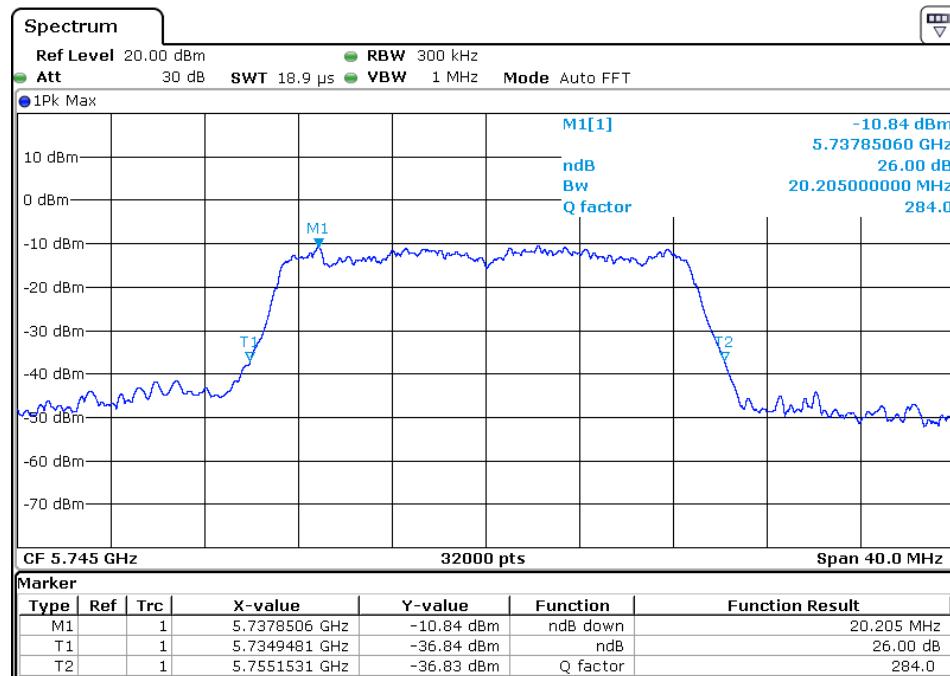


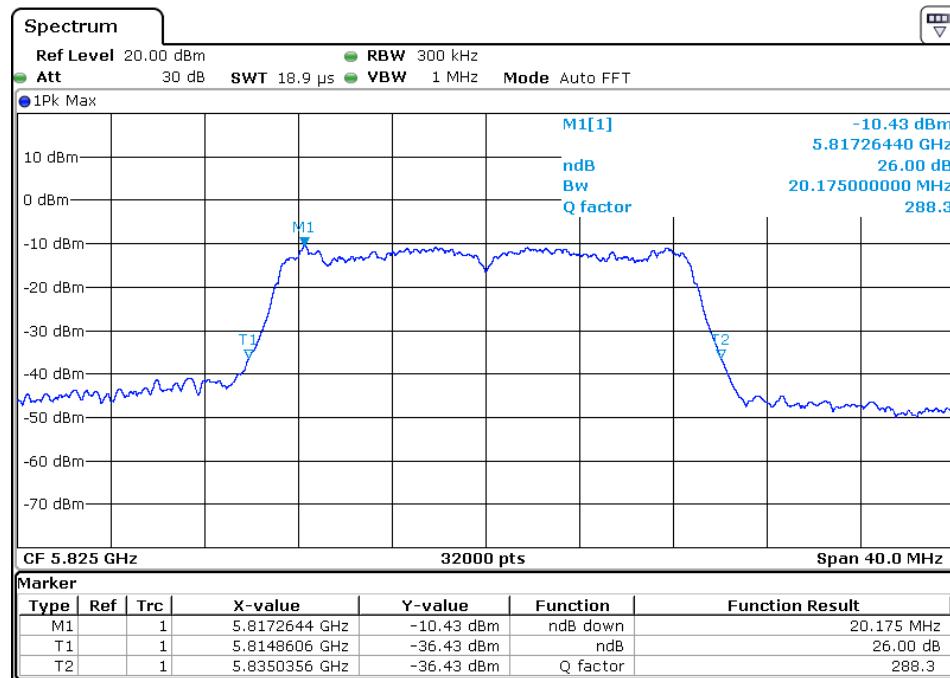




## Ant 1 802.11 n40

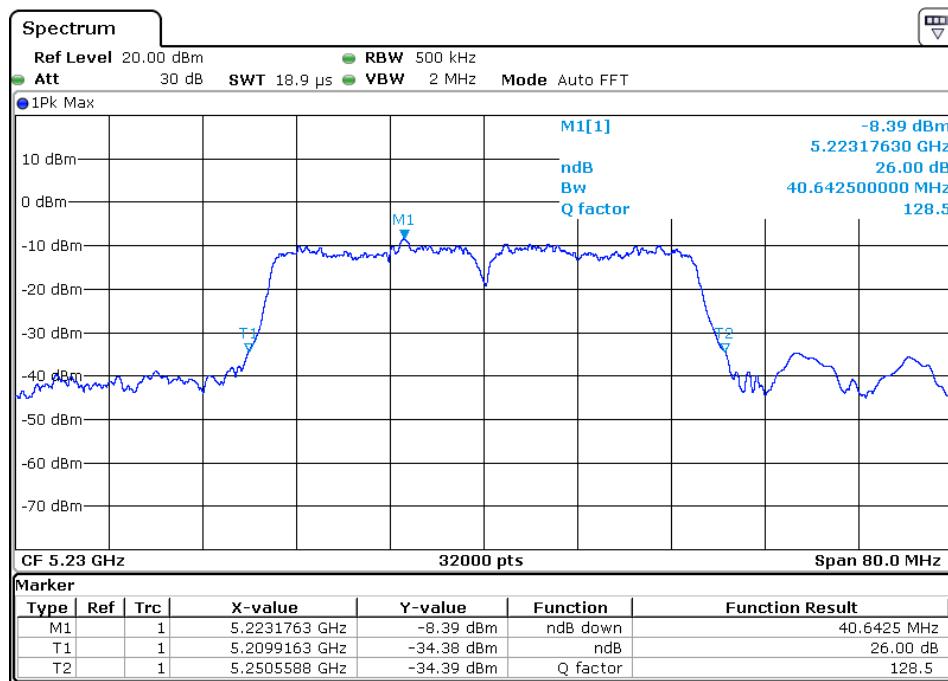
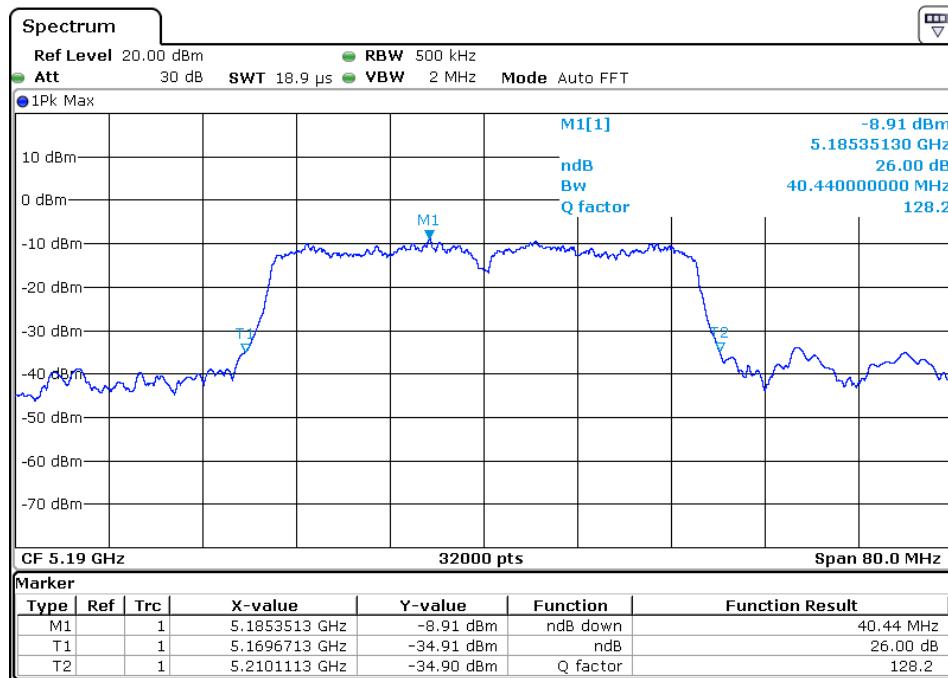


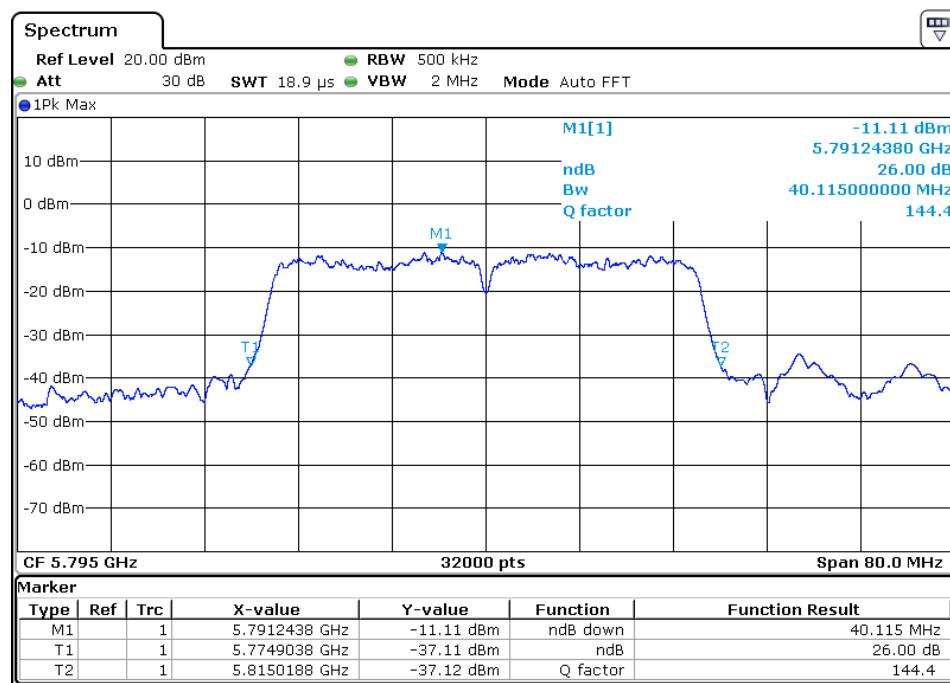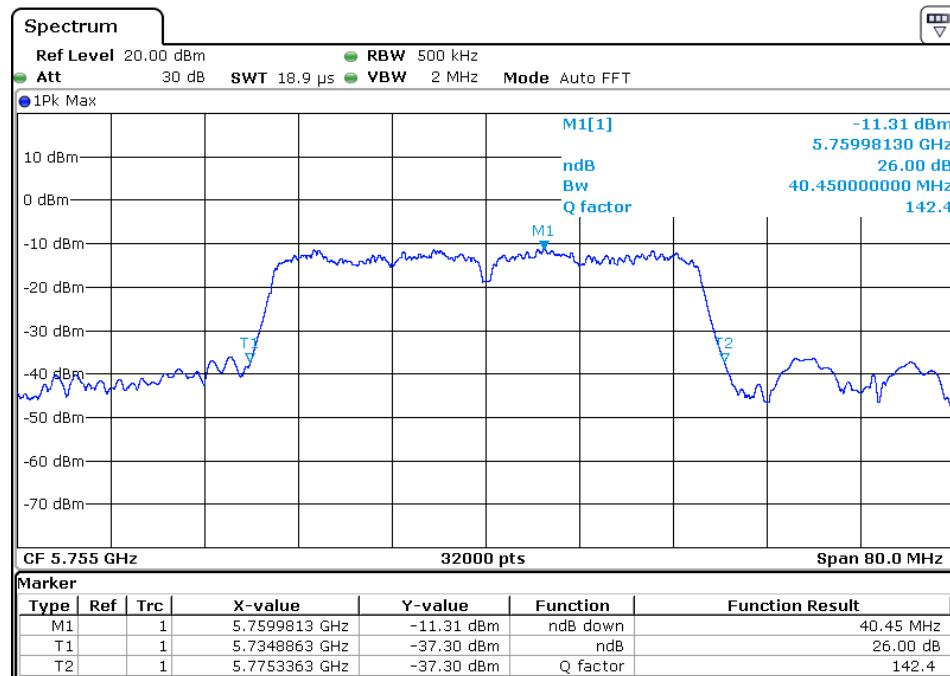



## Ant 1 802.11 ac20

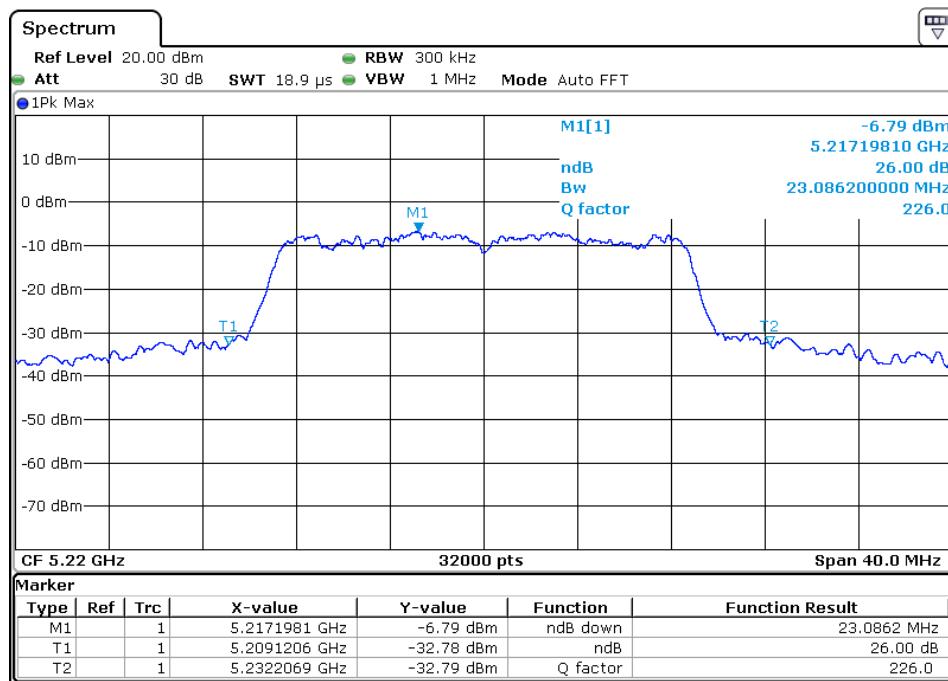
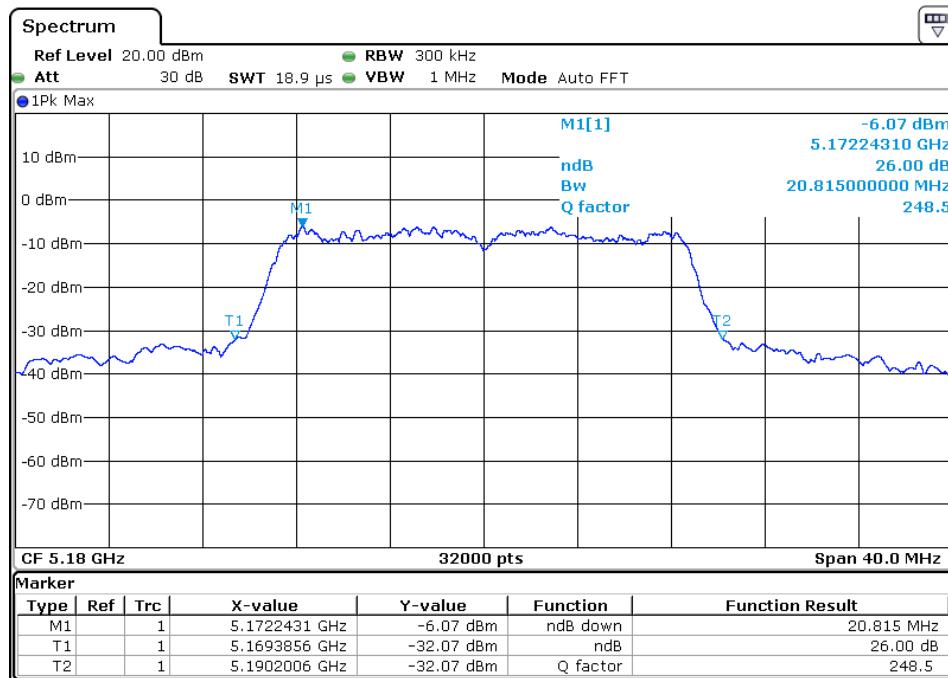


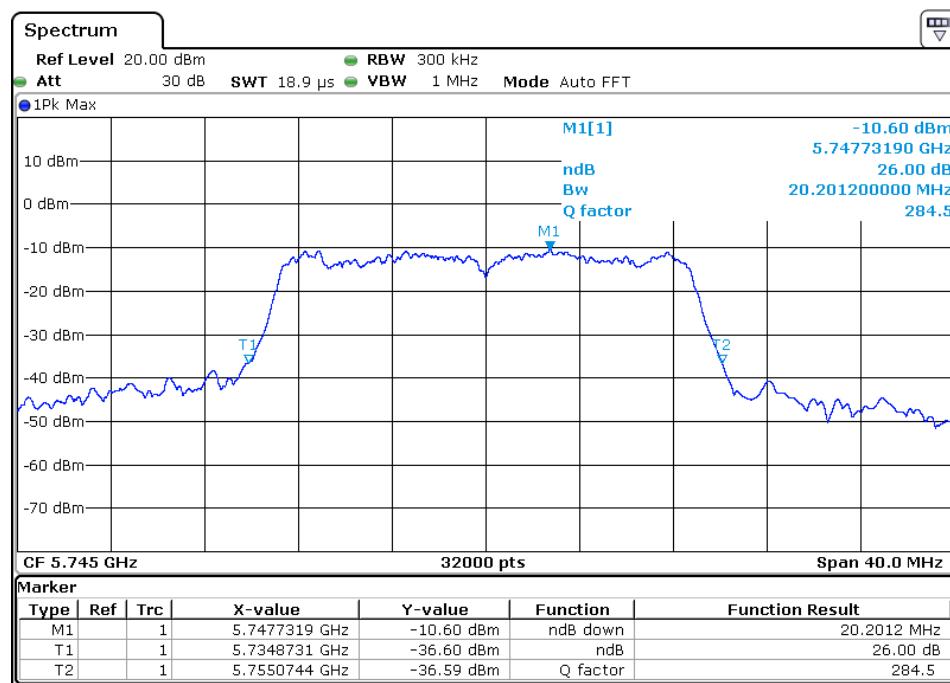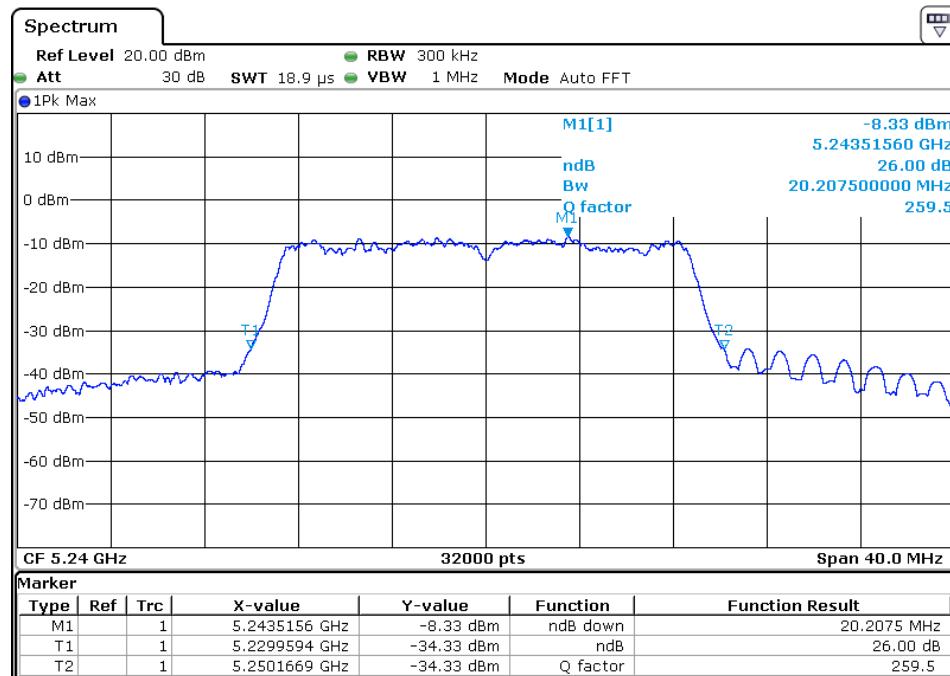

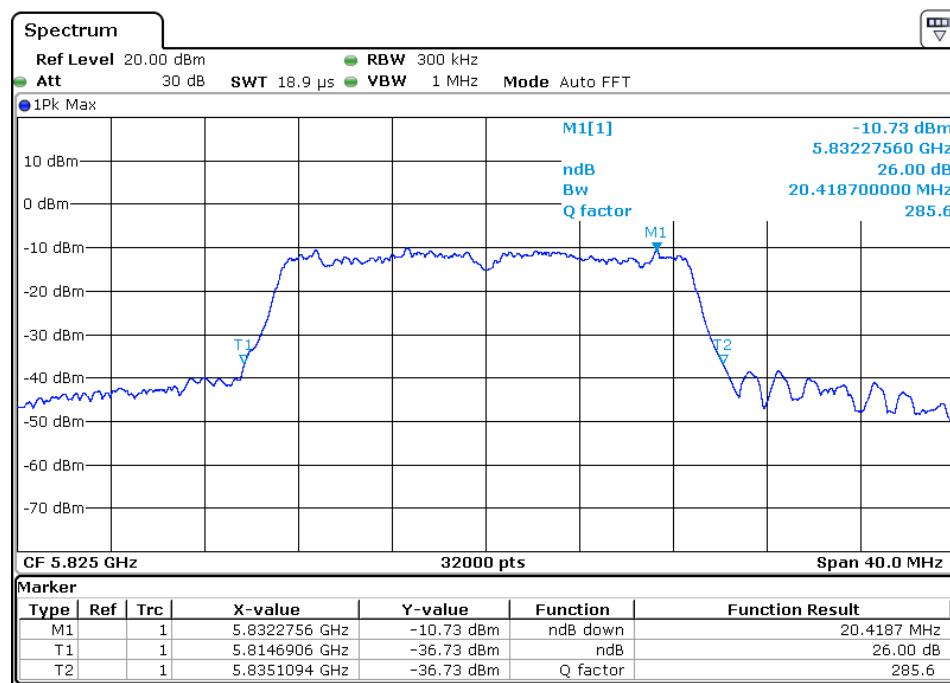
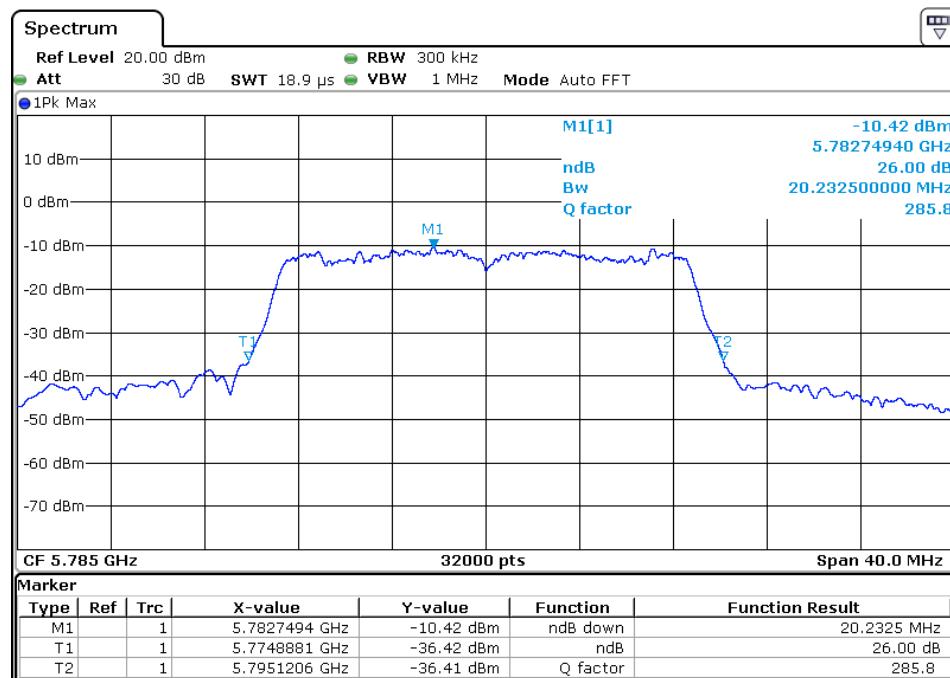


## Ant 1 802.11 ac40

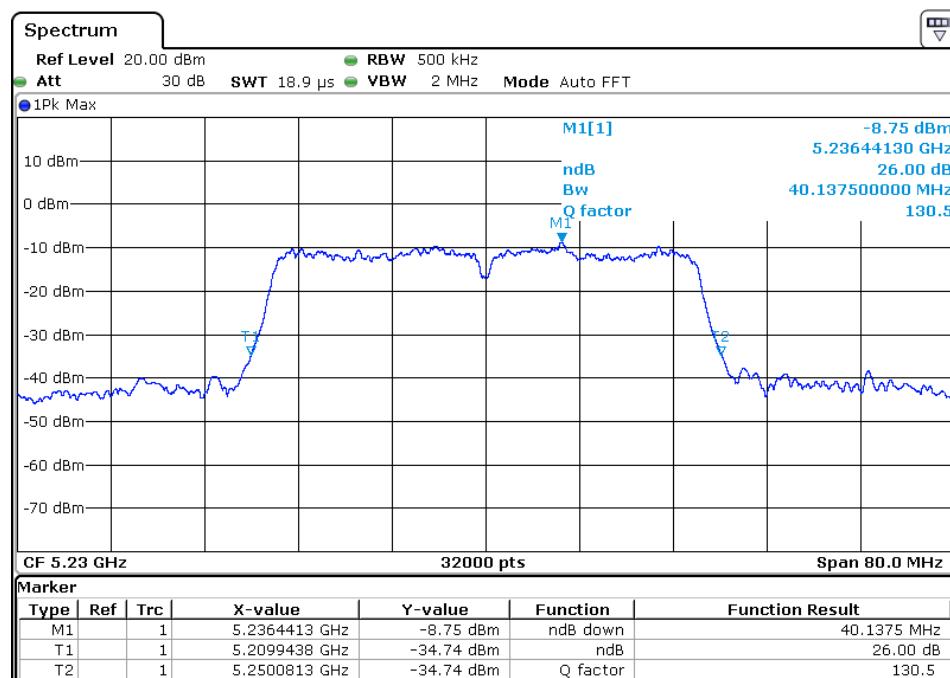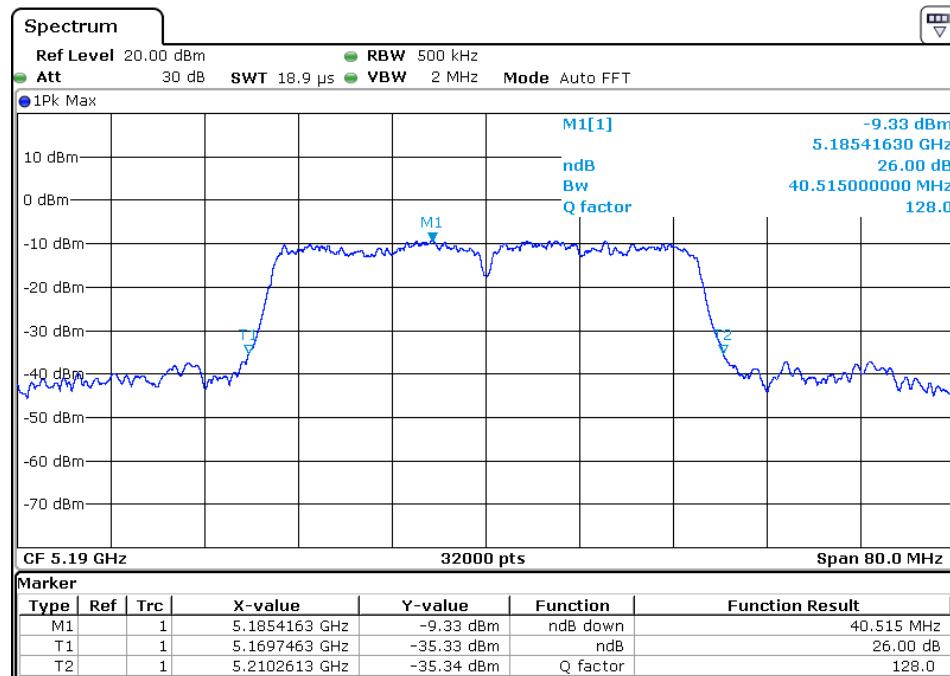

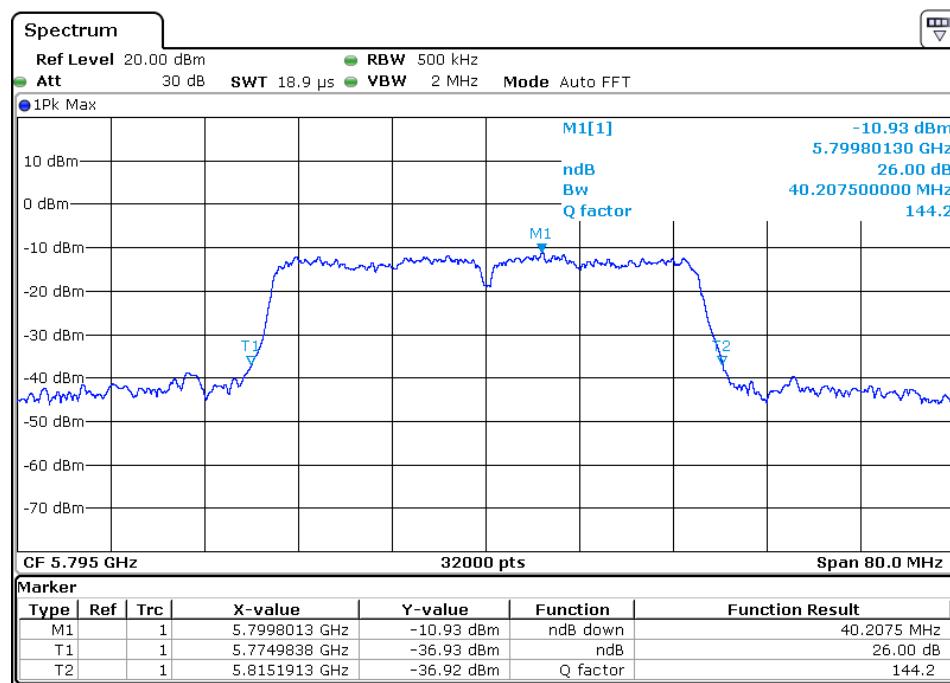
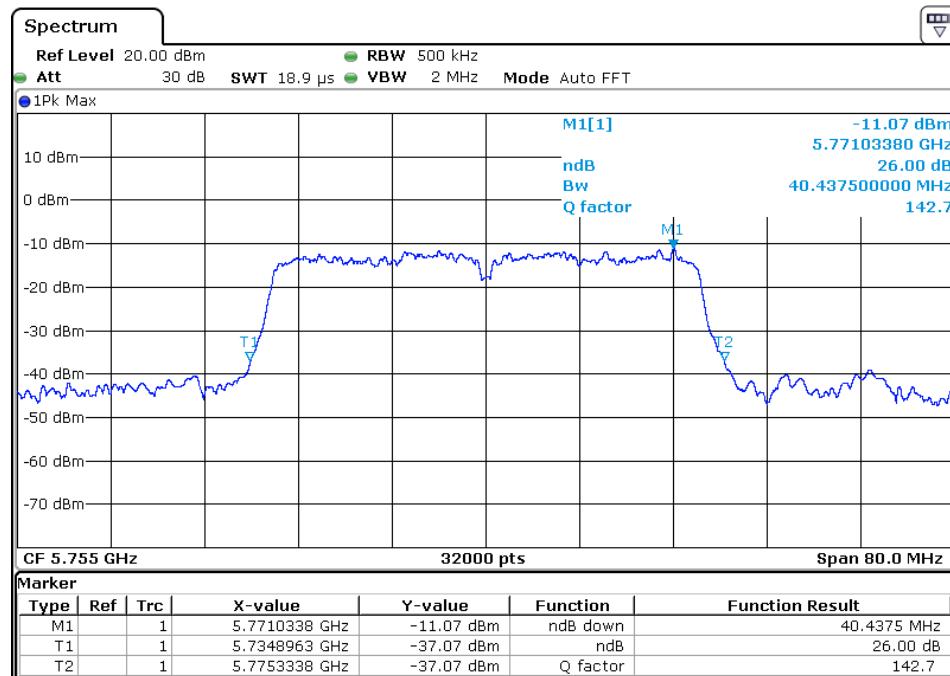




## Ant 1 802.11 ac80

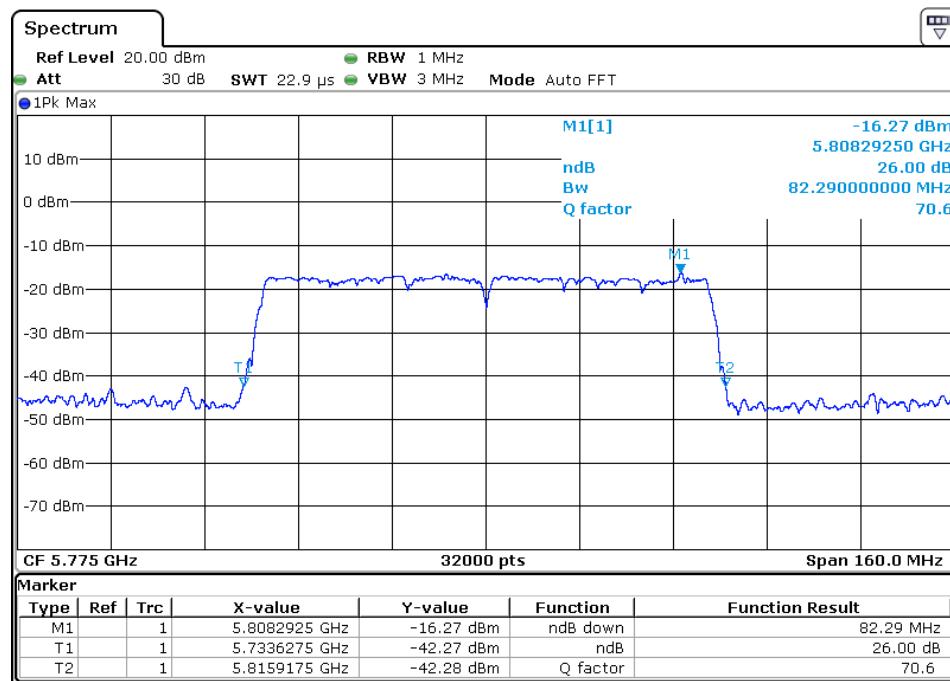
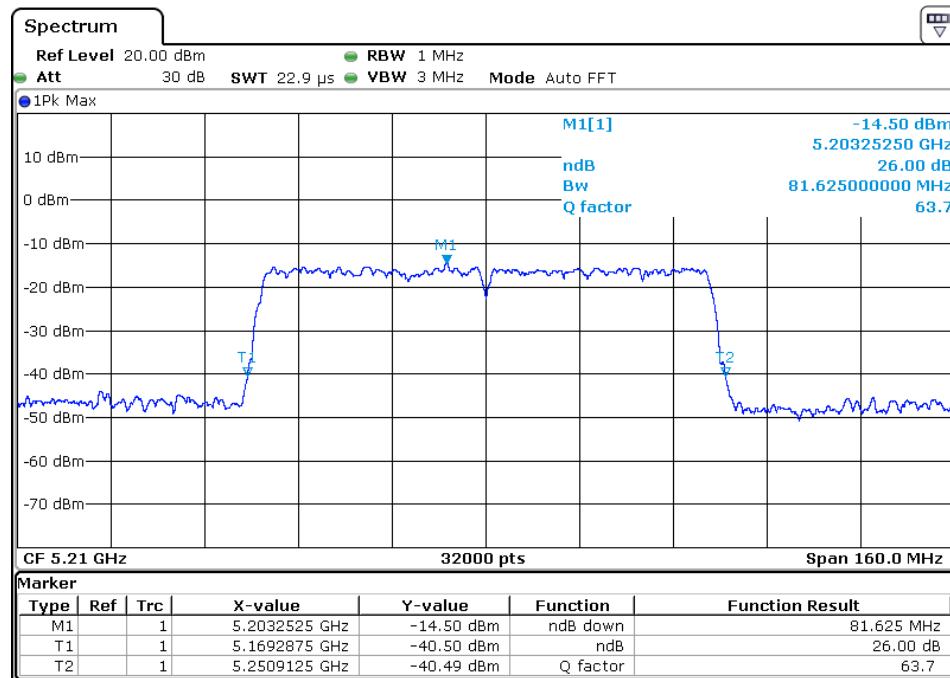


## 6 dBc Bandwidth plot as follows:



Ant 1 802.11 a

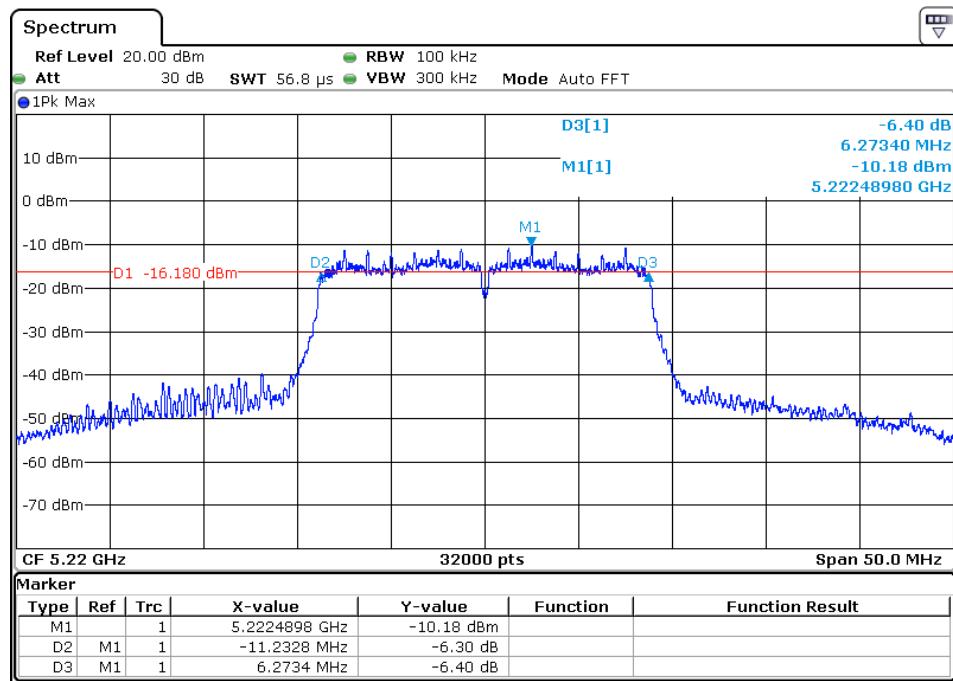
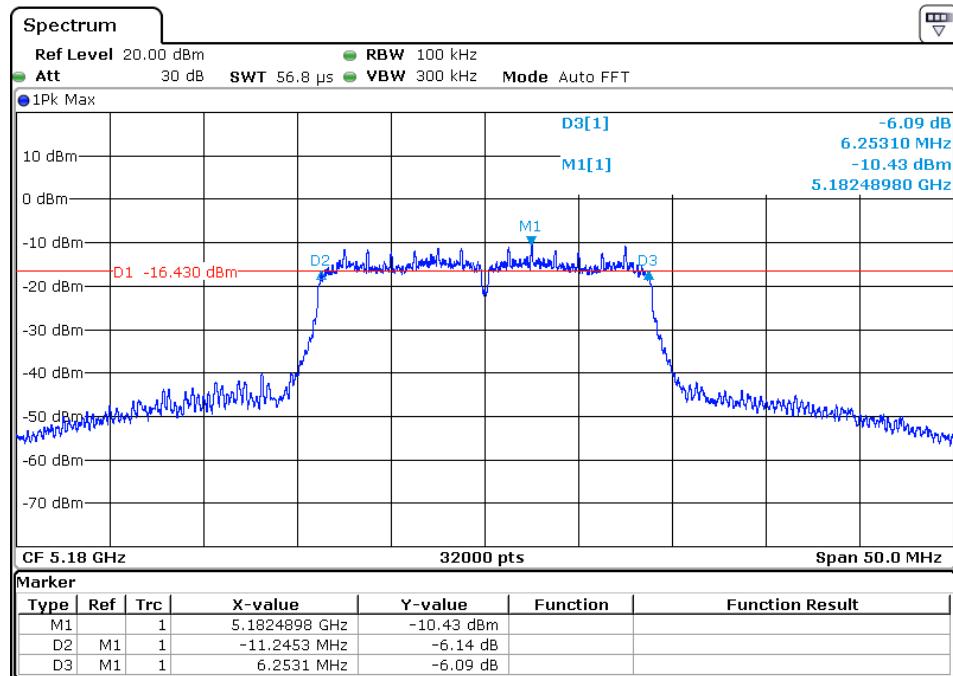


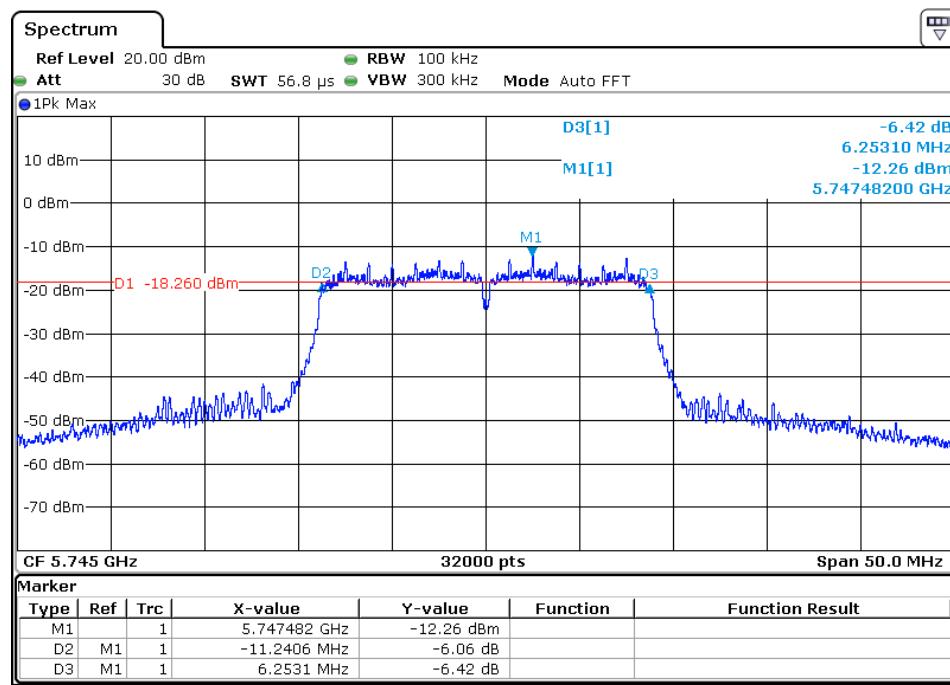
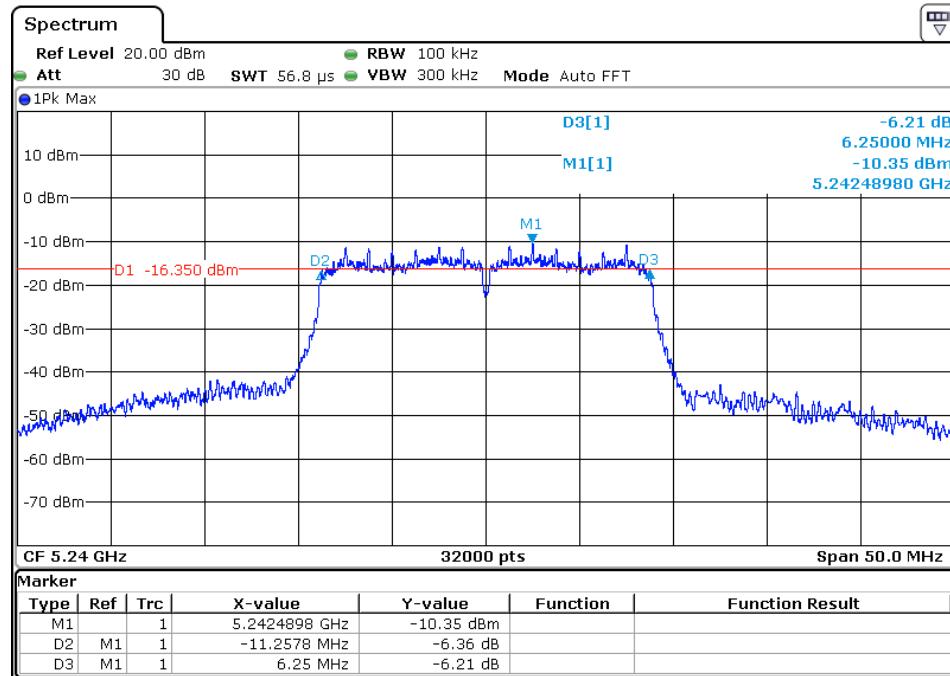


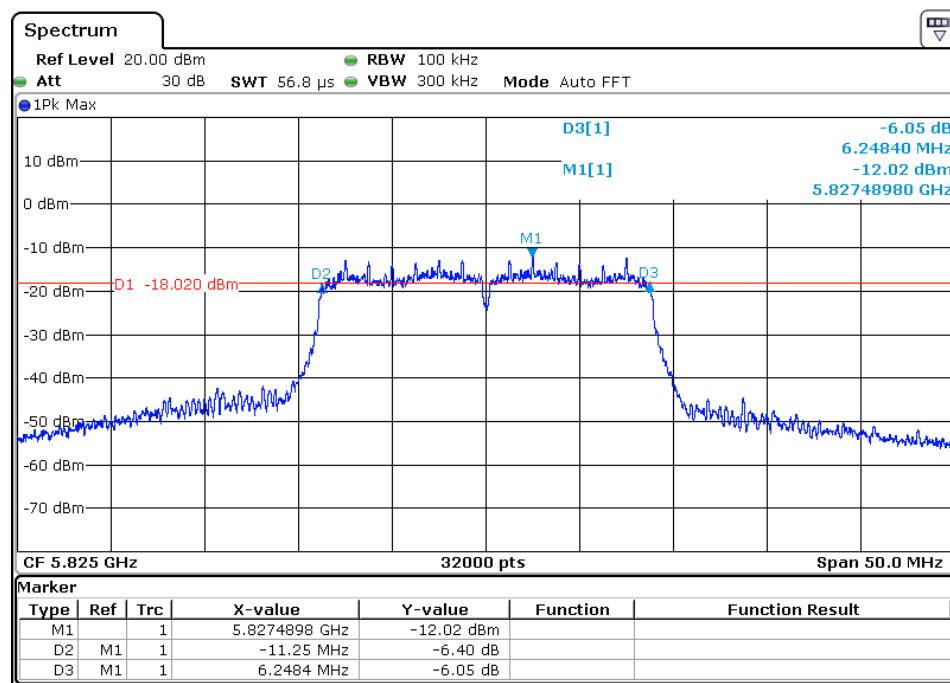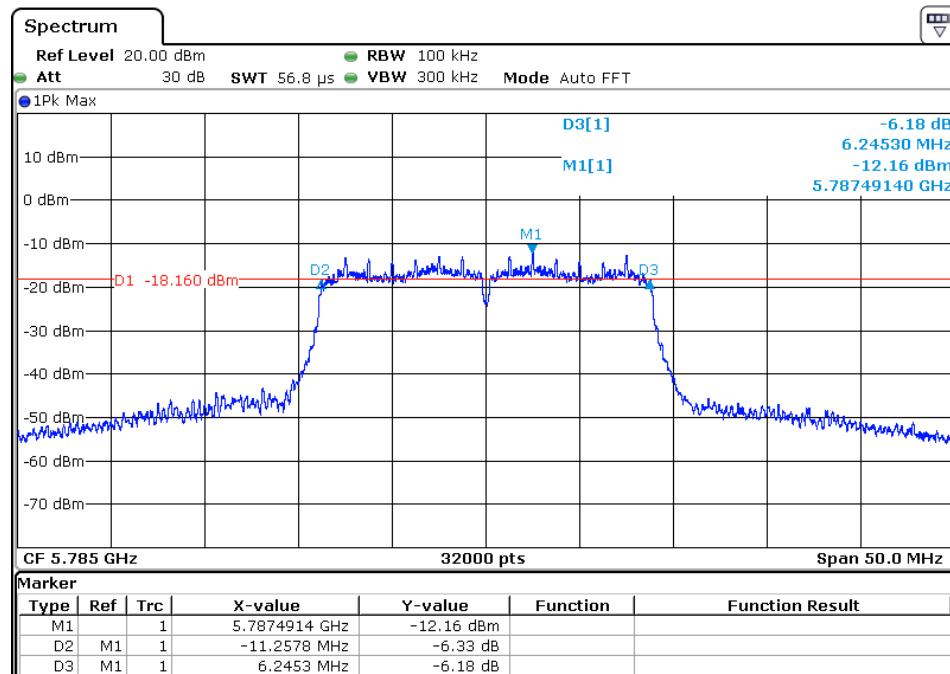



## Ant 1 802.11 n20

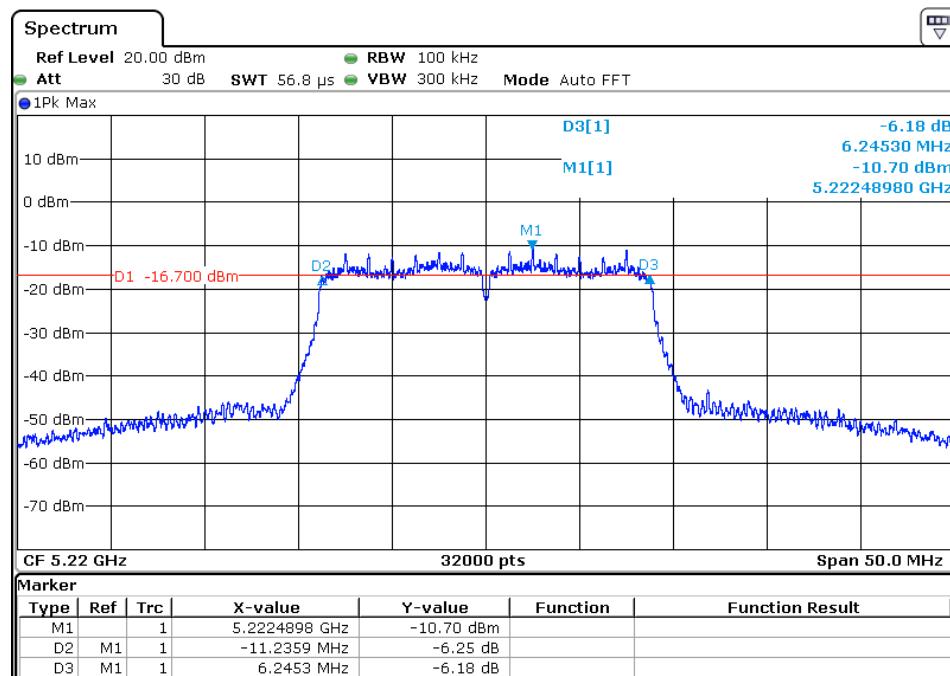
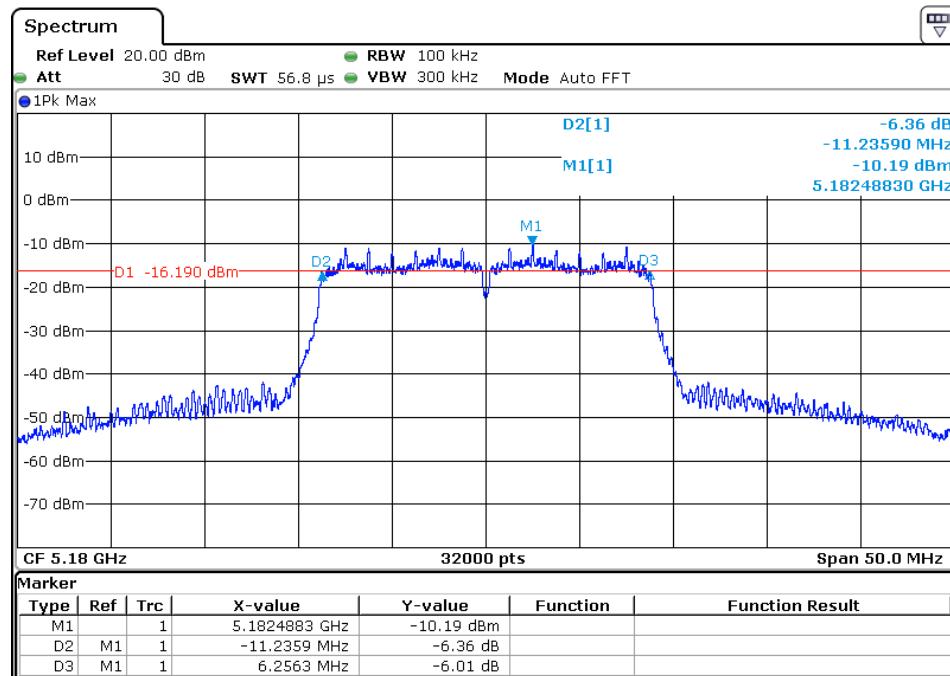


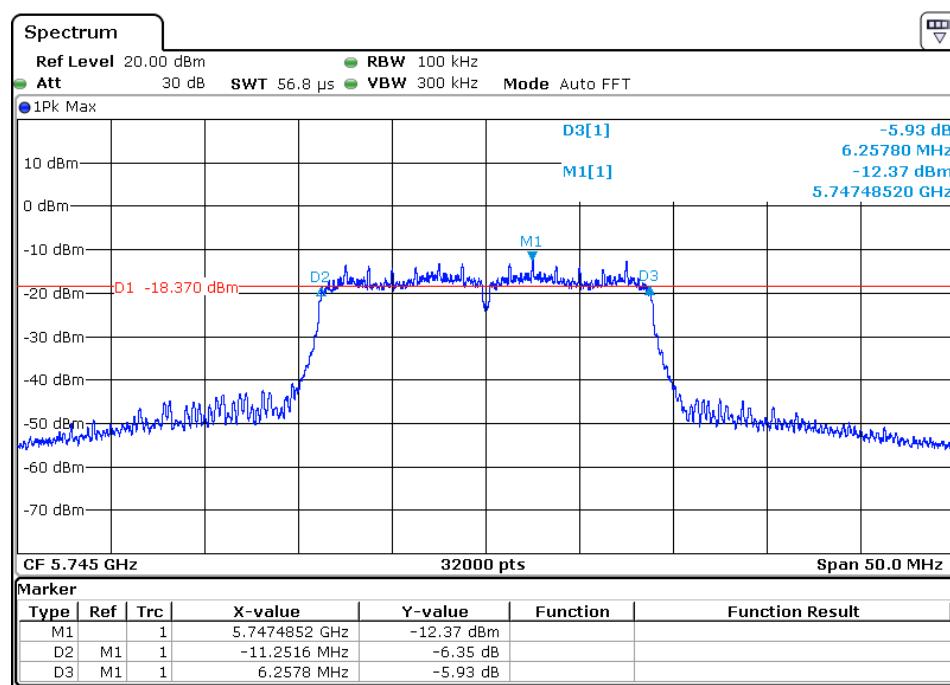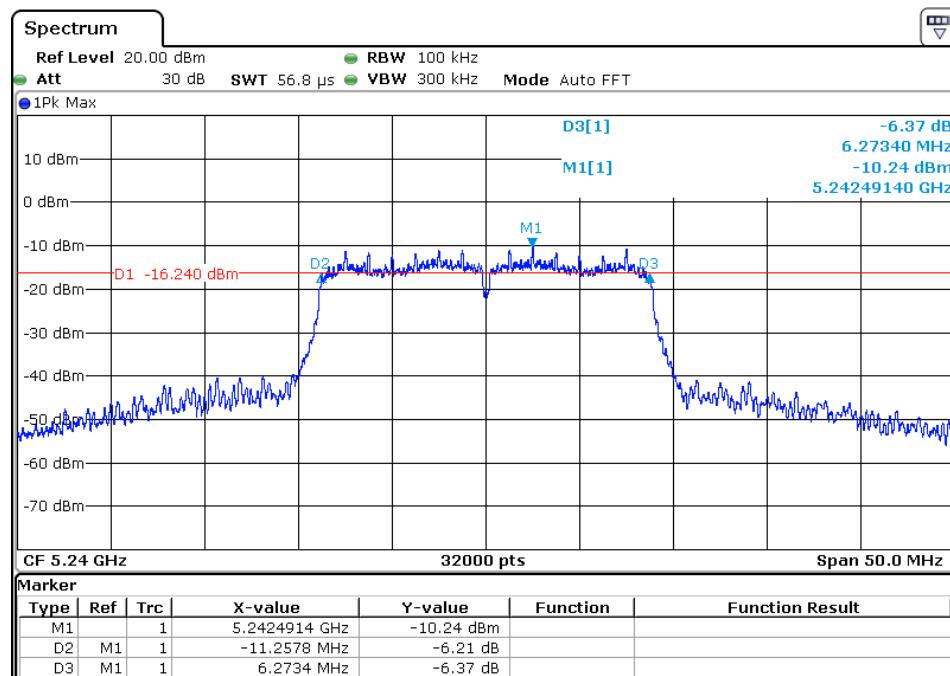

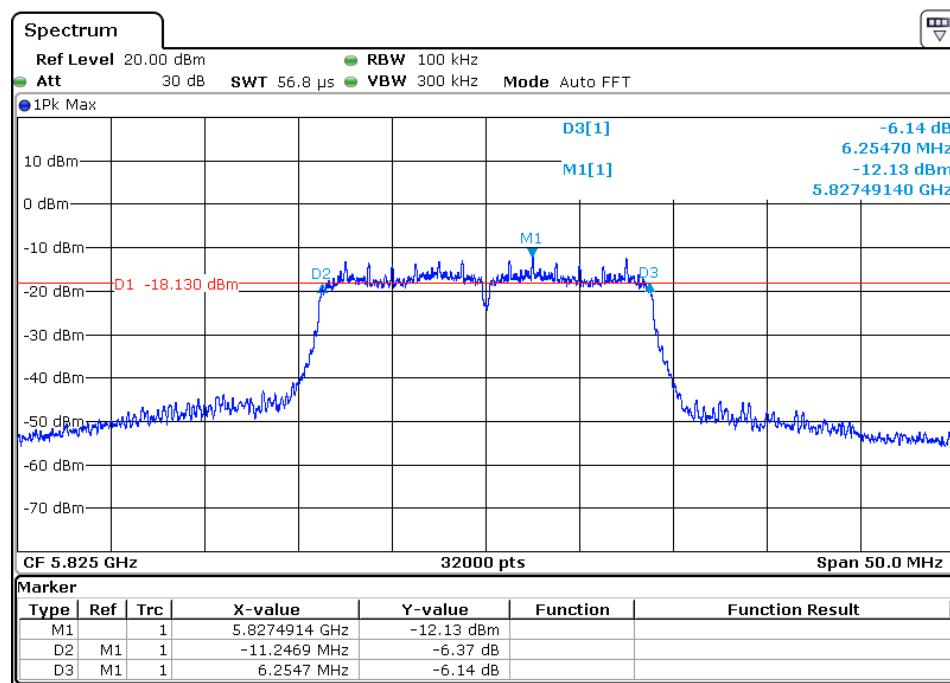
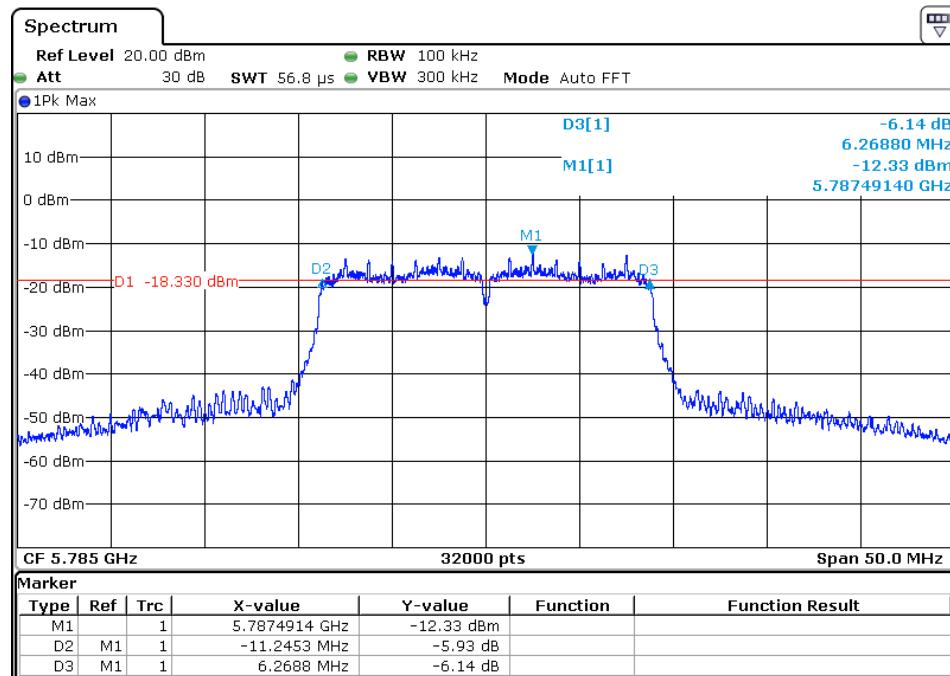




## Ant 1 802.11 n40

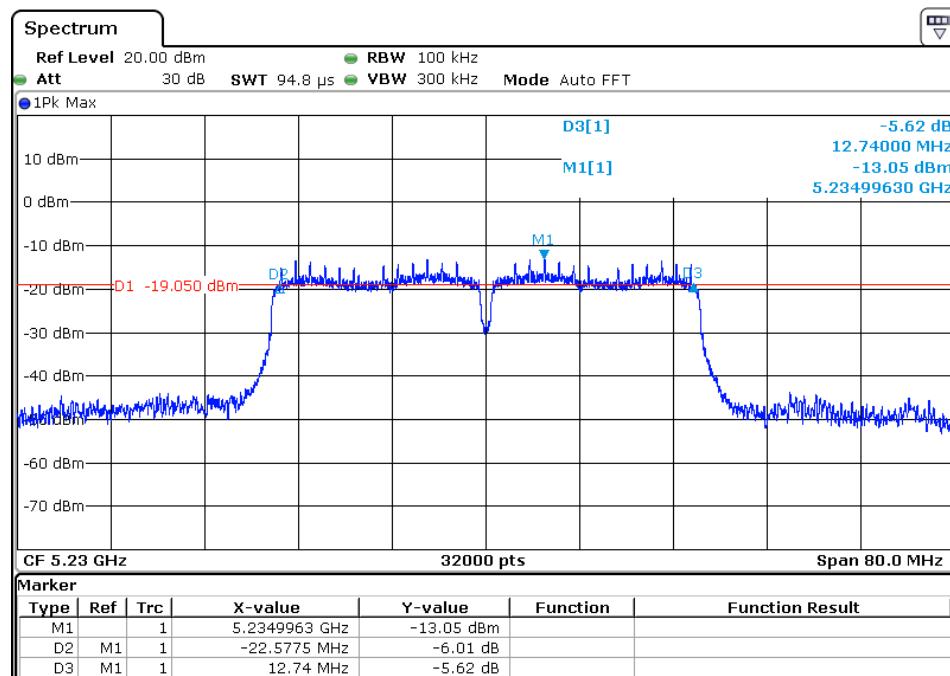
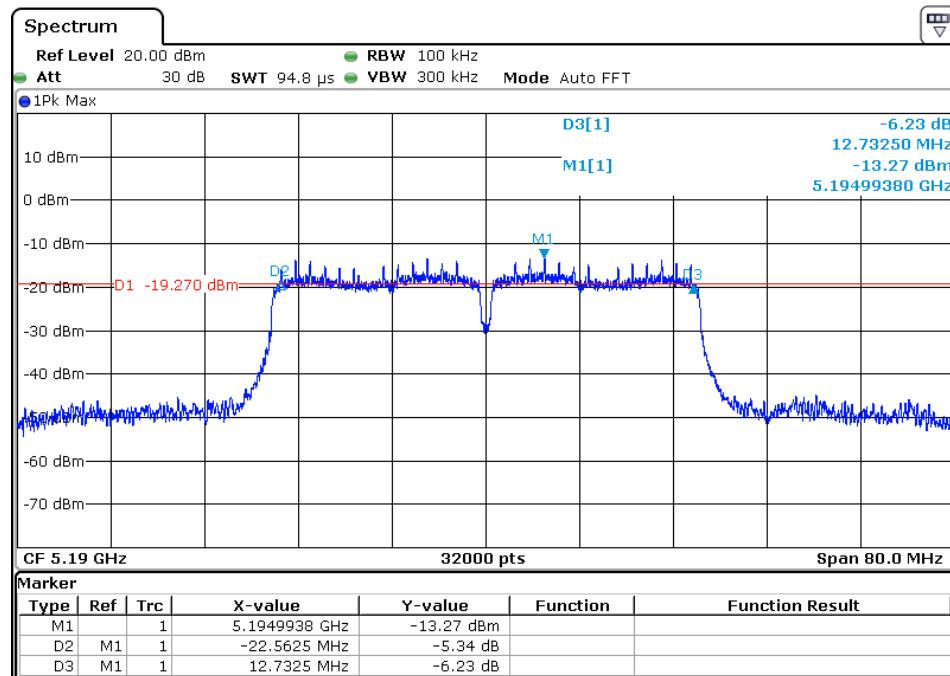


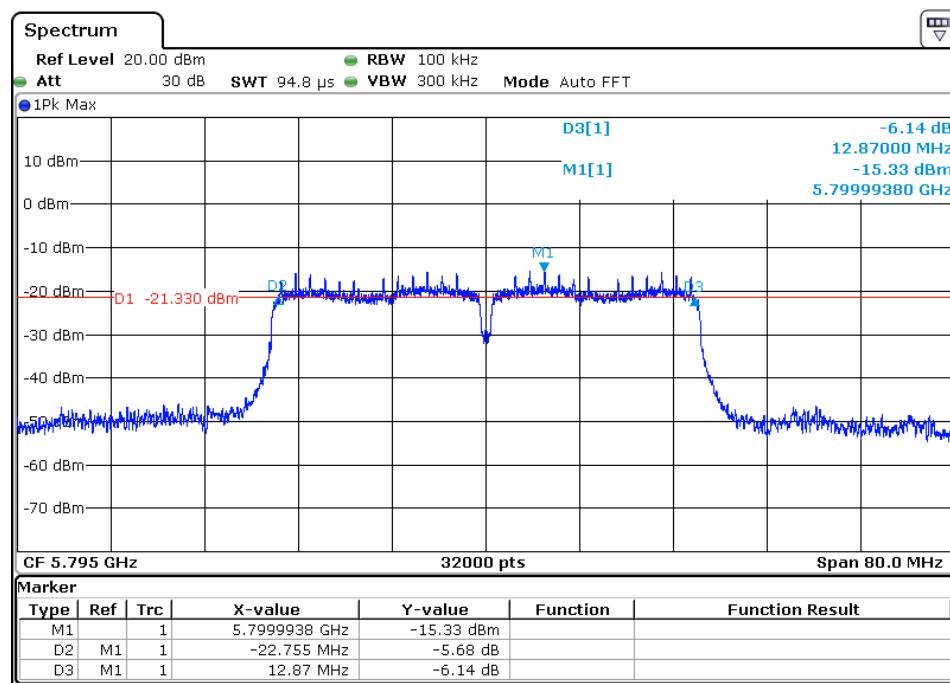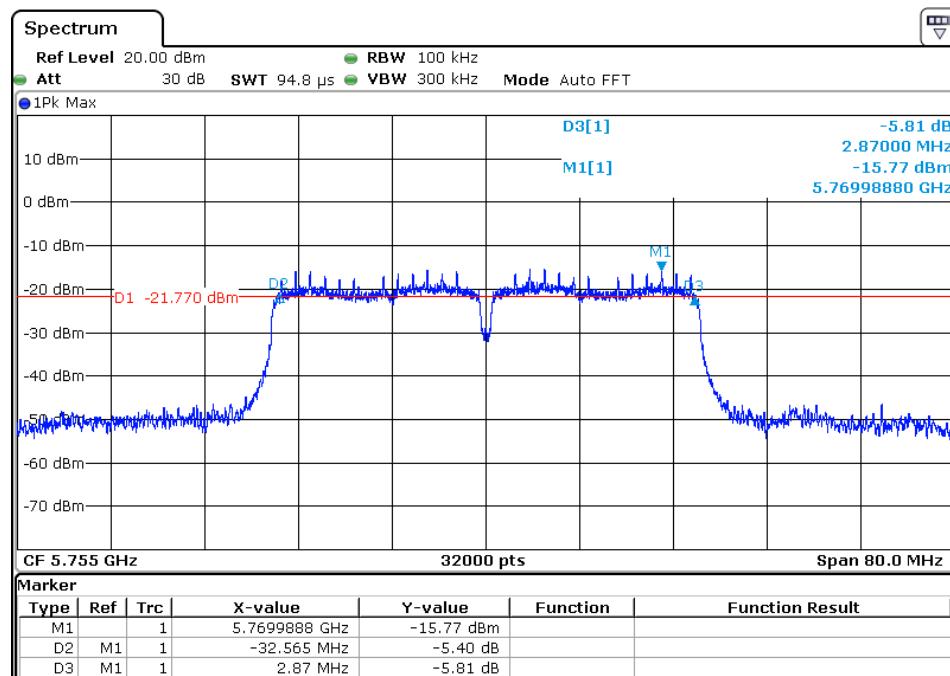



## Ant 1 802.11 ac20

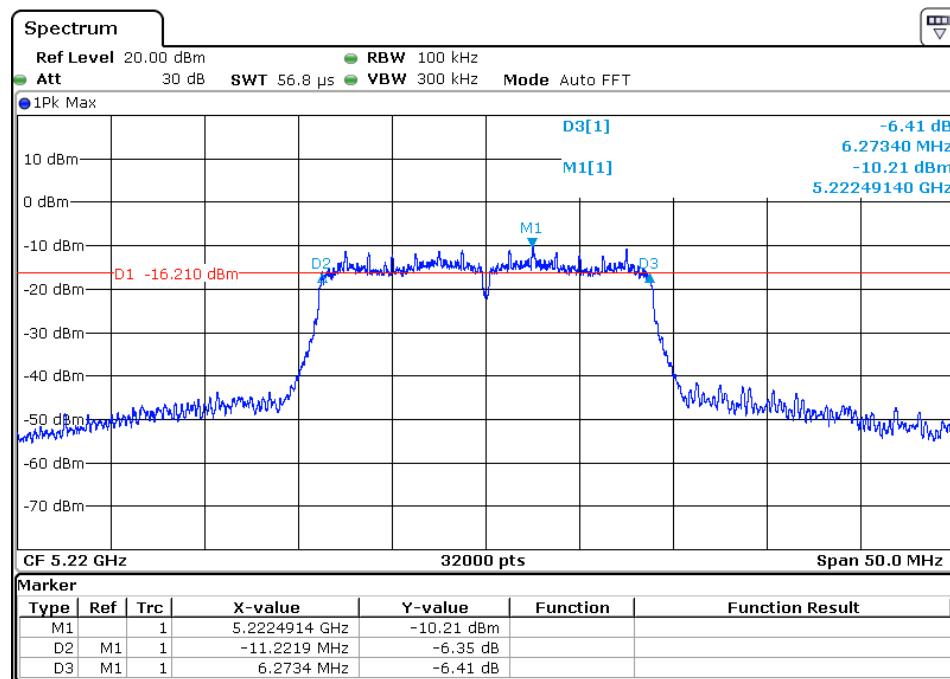
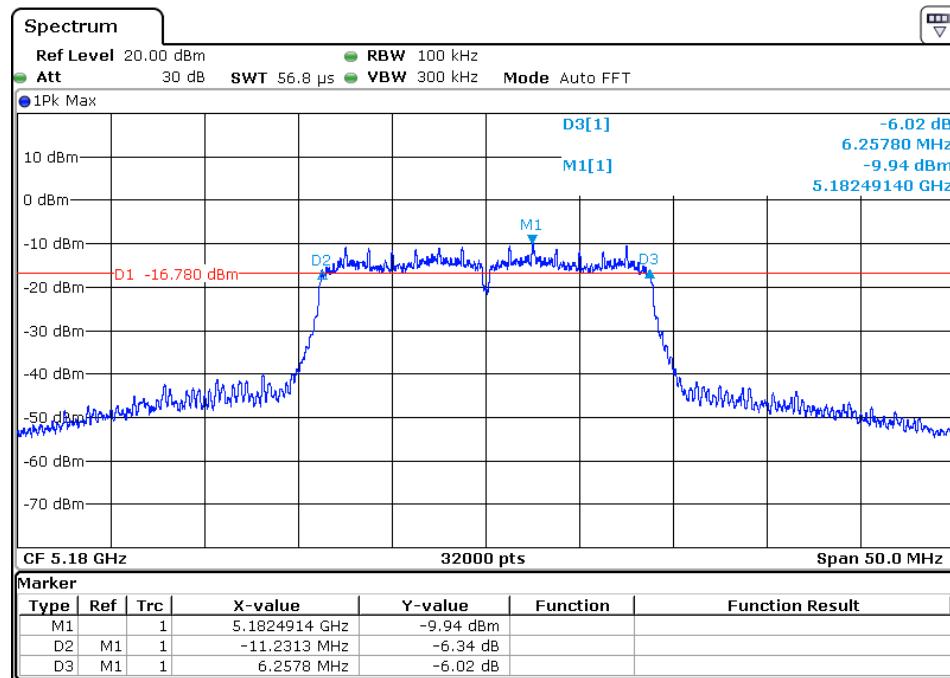


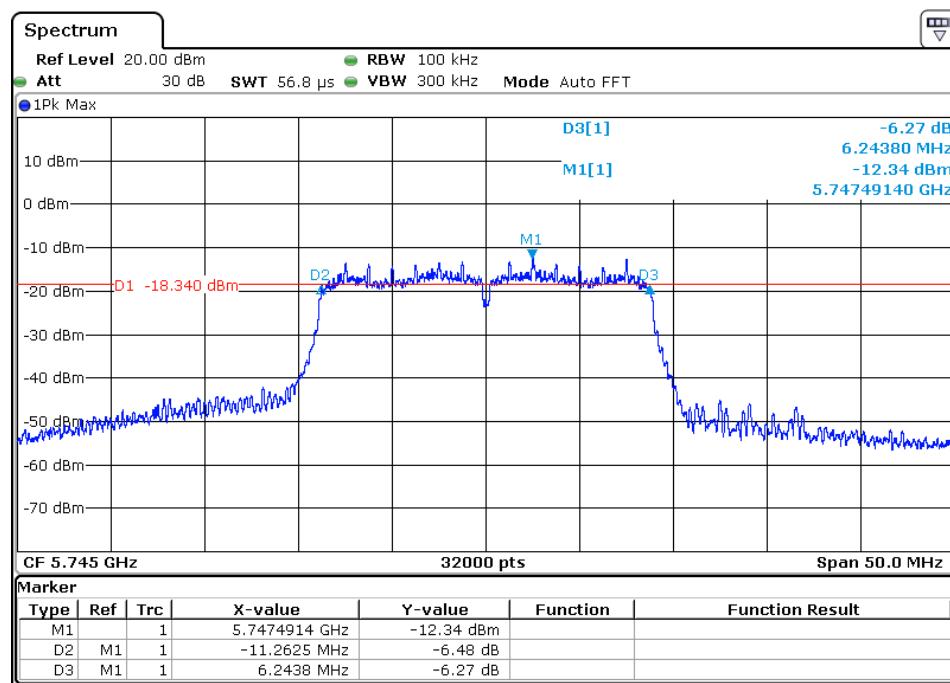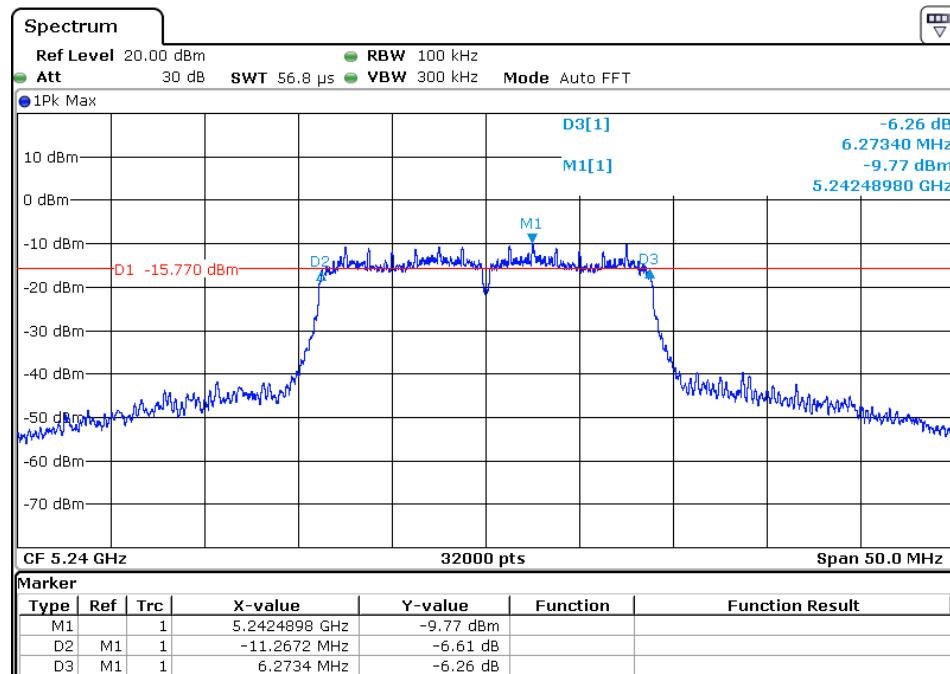

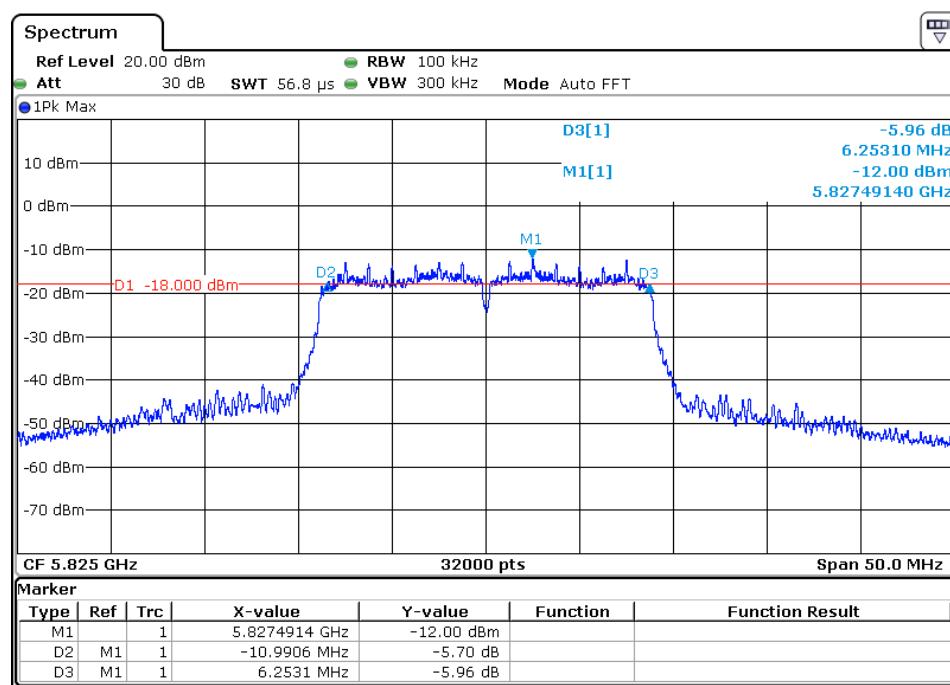
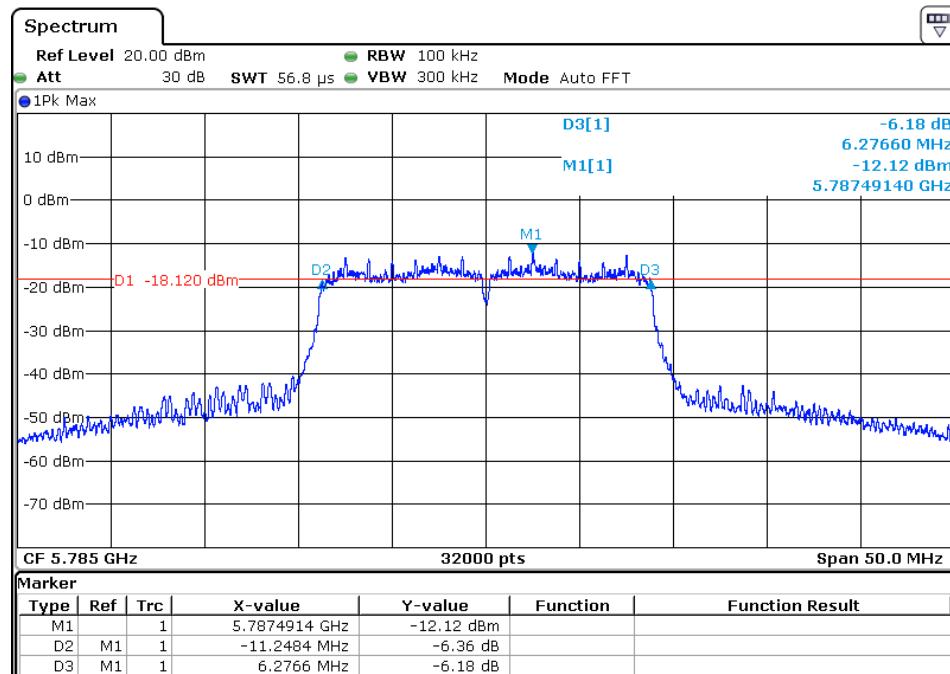


## Ant 1 802.11 ac40

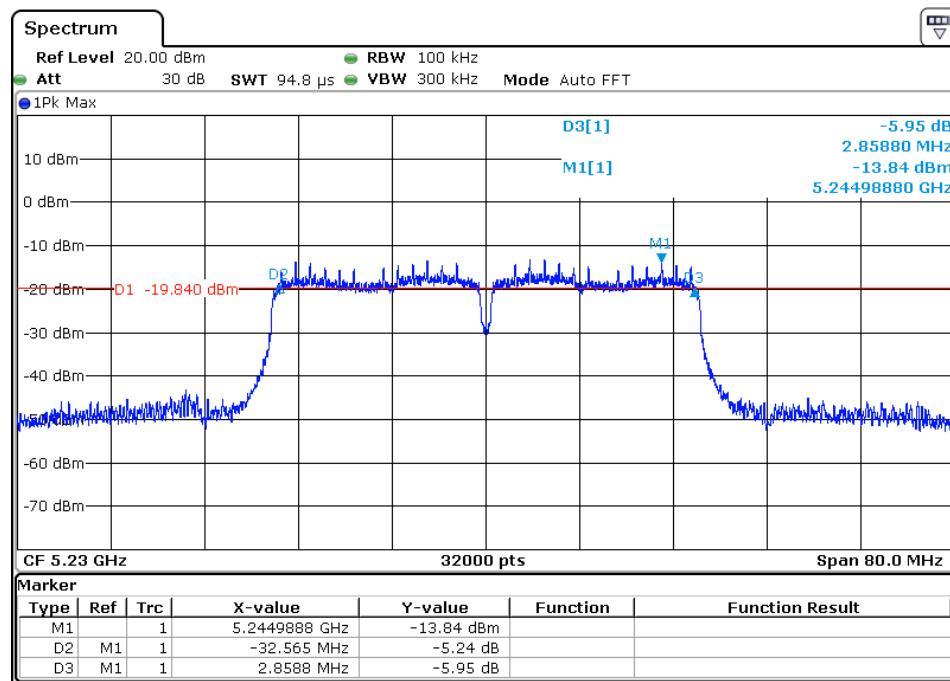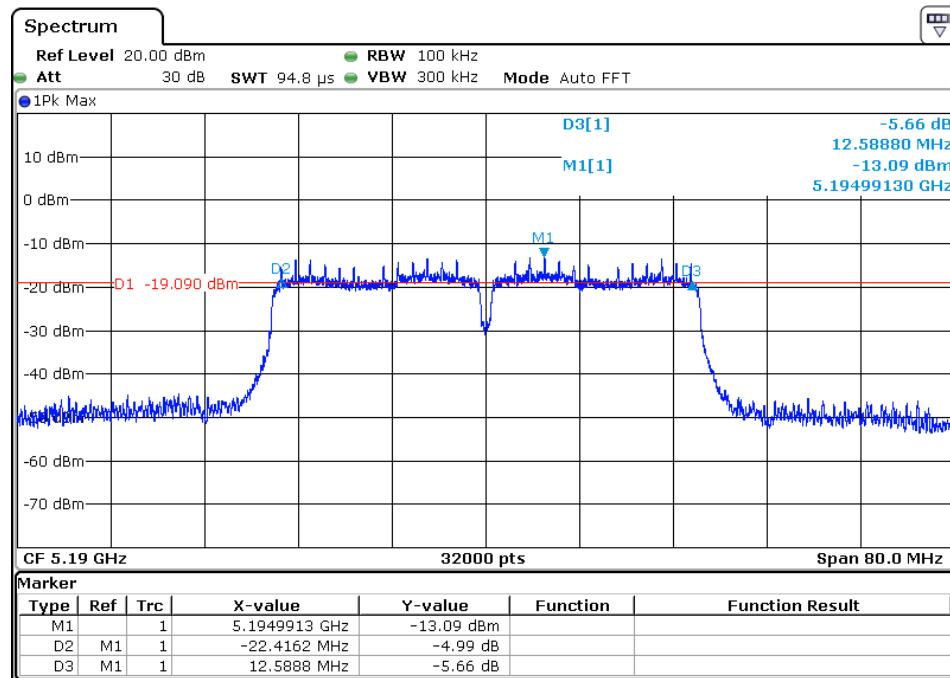

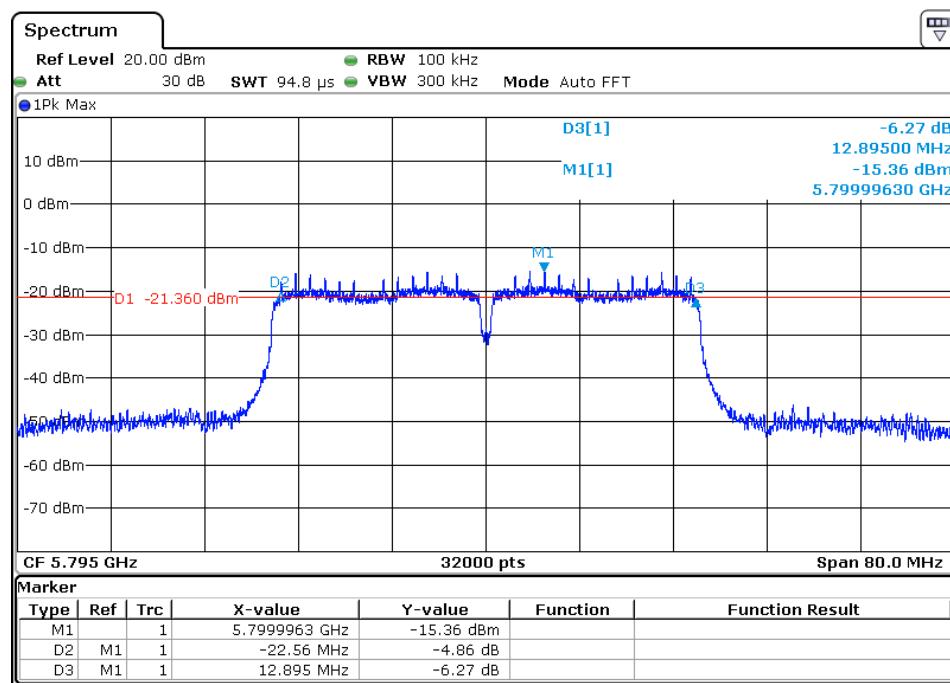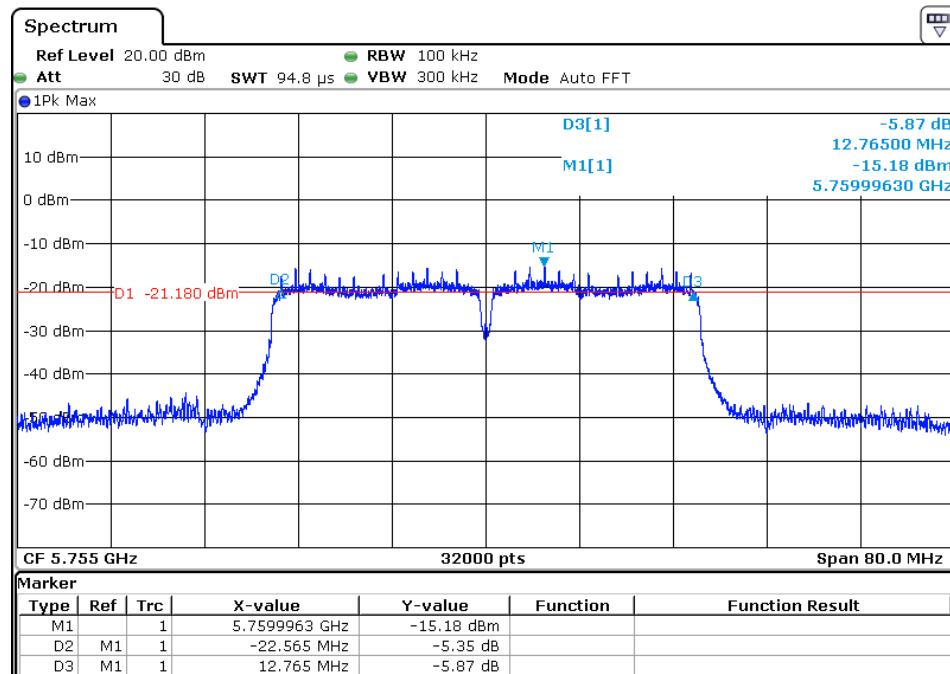



## Ant 1 802.11 ac80

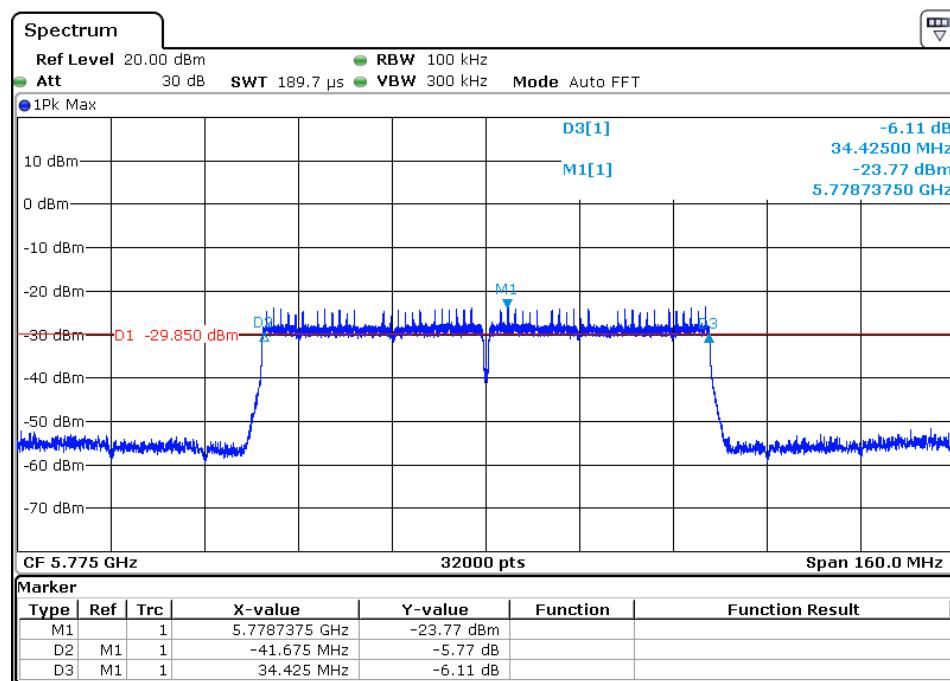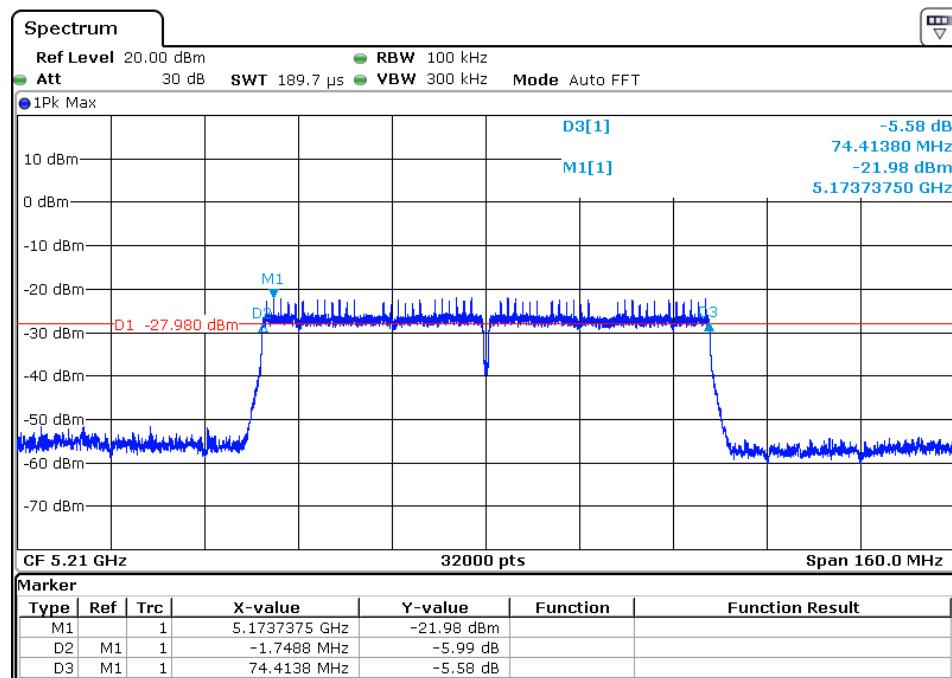


| Test Mode      | Data Rate (Mbps) | Channel No. | Frequency (MHz) | 99%Bandwidth (MHz) | Result |
|----------------|------------------|-------------|-----------------|--------------------|--------|
| Ant 1          |                  |             |                 |                    |        |
| 802.11a        | 6                | 36          | 5180            | 17.7925            | Pass   |
| 802.11a        | 6                | 44          | 5220            | 17.8575            | Pass   |
| 802.11a        | 6                | 48          | 5240            | 17.8575            | Pass   |
| 802.11n-HT20   | 7.2              | 36          | 5180            | 18.09875           | Pass   |
| 802.11n-HT20   | 7.2              | 44          | 5220            | 17.77875           | Pass   |
| 802.11n-HT20   | 7.2              | 48          | 5240            | 17.93375           | Pass   |
| 802.11n-HT40   | 15               | 38          | 5190            | 36.4125            | Pass   |
| 802.11n-HT40   | 15               | 46          | 5230            | 36.1975            | Pass   |
| 802.11ac-VHT20 | 7.2              | 36          | 5180            | 17.7625            | Pass   |
| 802.11ac-VHT20 | 7.2              | 44          | 5220            | 18.07              | Pass   |
| 802.11ac-VHT20 | 7.2              | 48          | 5240            | 17.91875           | Pass   |
| 802.11ac-VHT40 | 15               | 38          | 5190            | 36.36              | Pass   |
| 802.11ac-VHT40 | 15               | 46          | 5230            | 36.15              | Pass   |
| 802.11ac-VHT80 | 32.5             | 42          | 5210            | 76.115             | Pass   |


99% Bandwidth plot as follows:



Ant 1 802.11 a

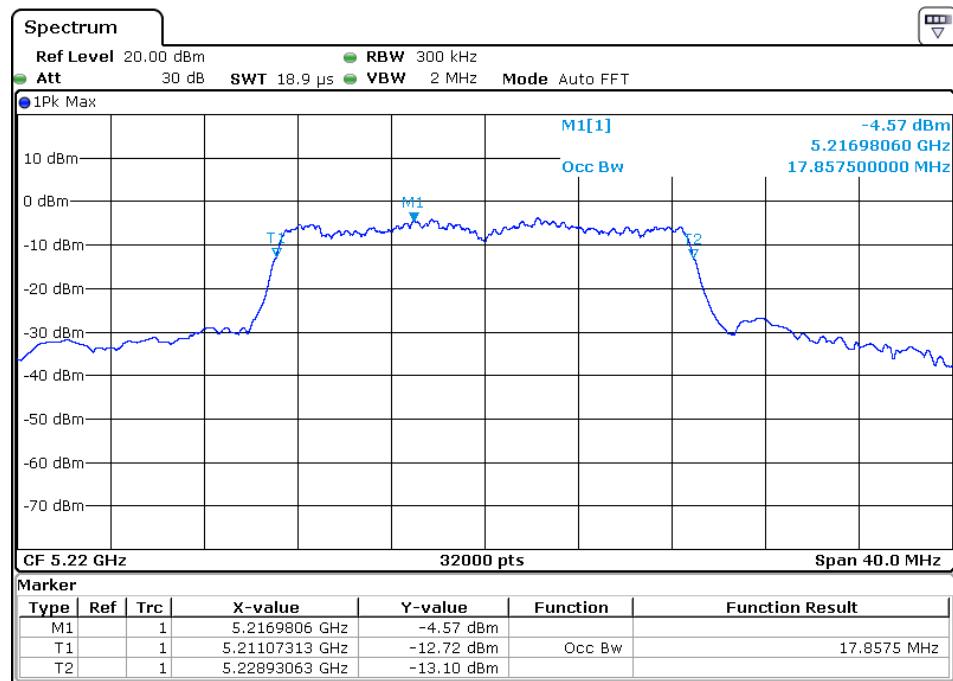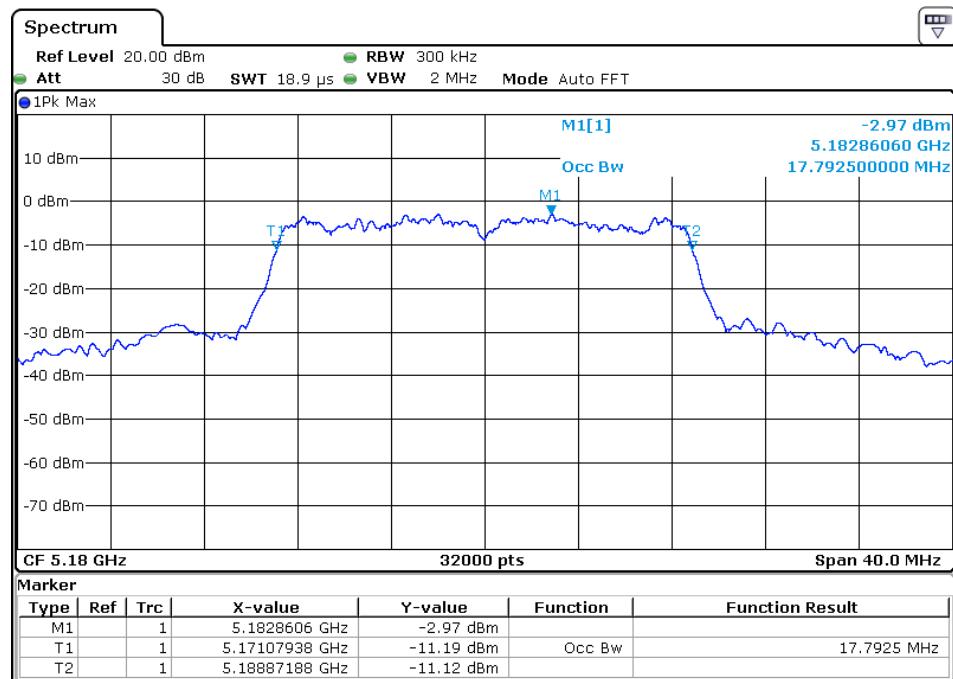


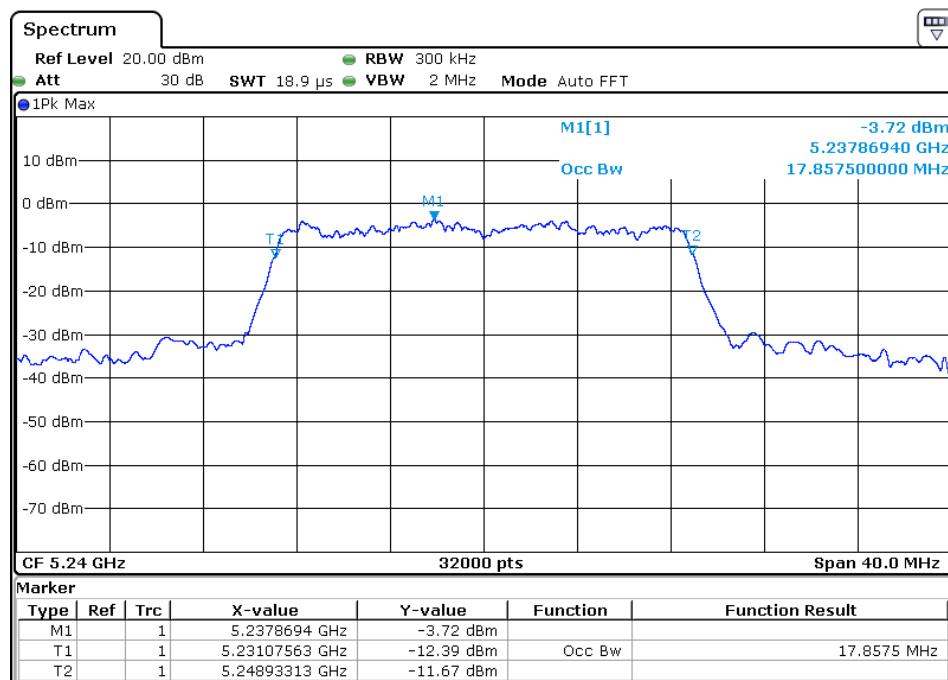


### Ant 1 802.11 n20


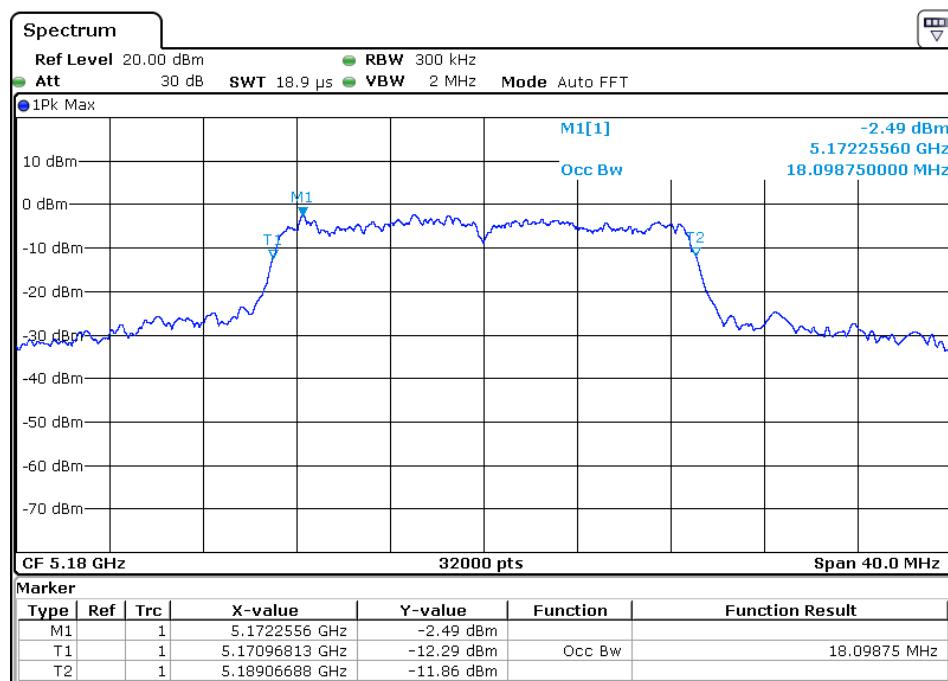


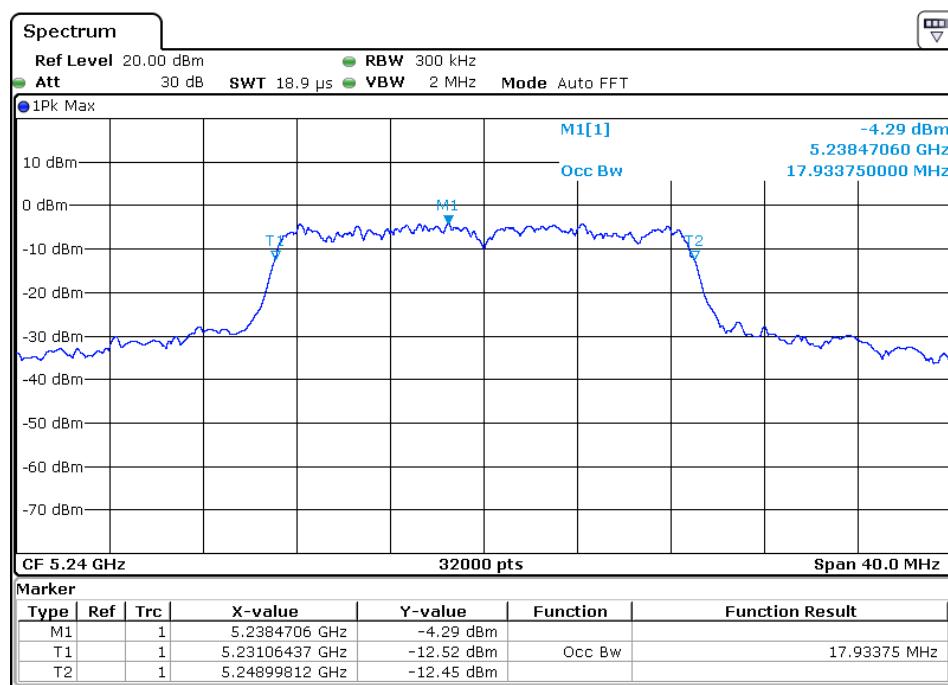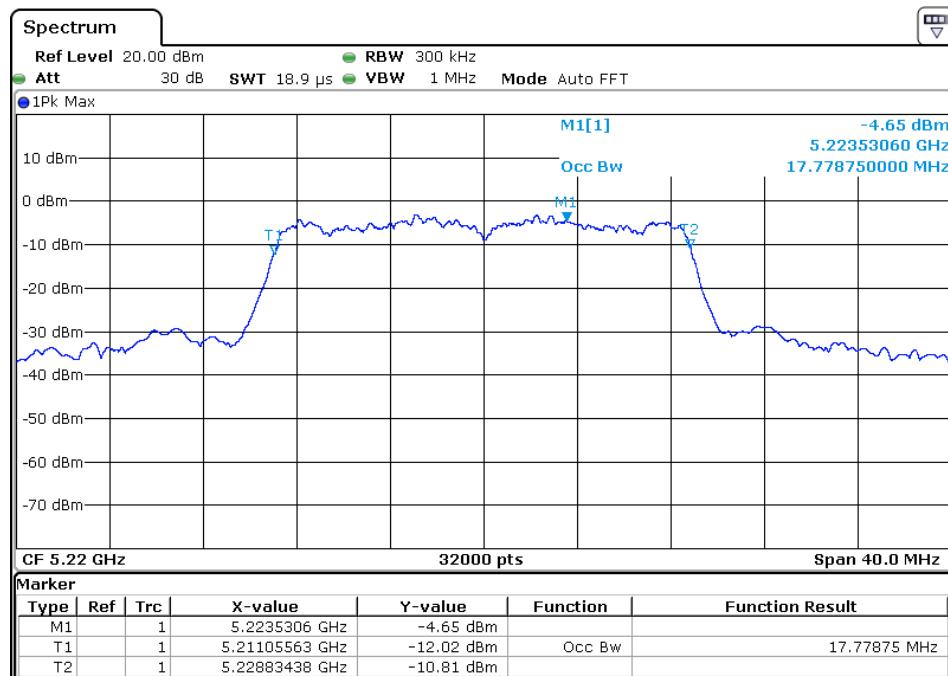


## Ant 1 802.11 n40

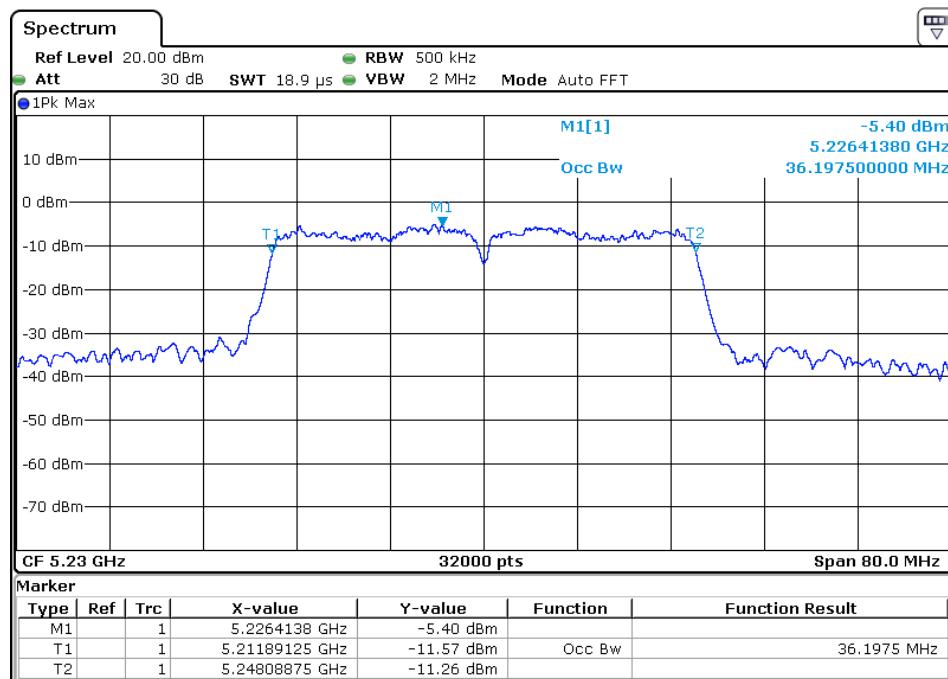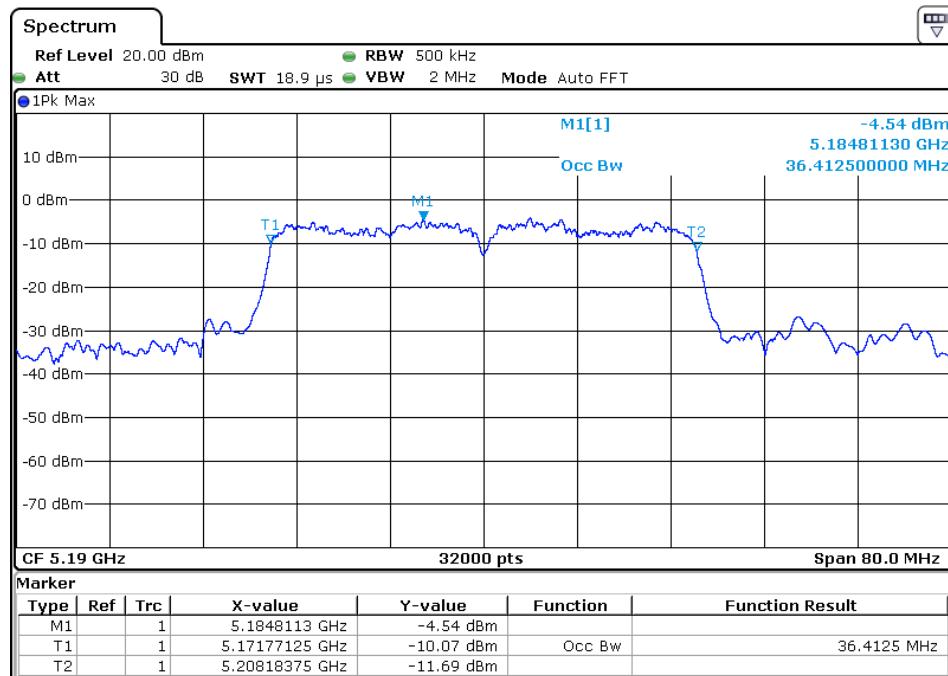



## Ant 1 802.11 ac20

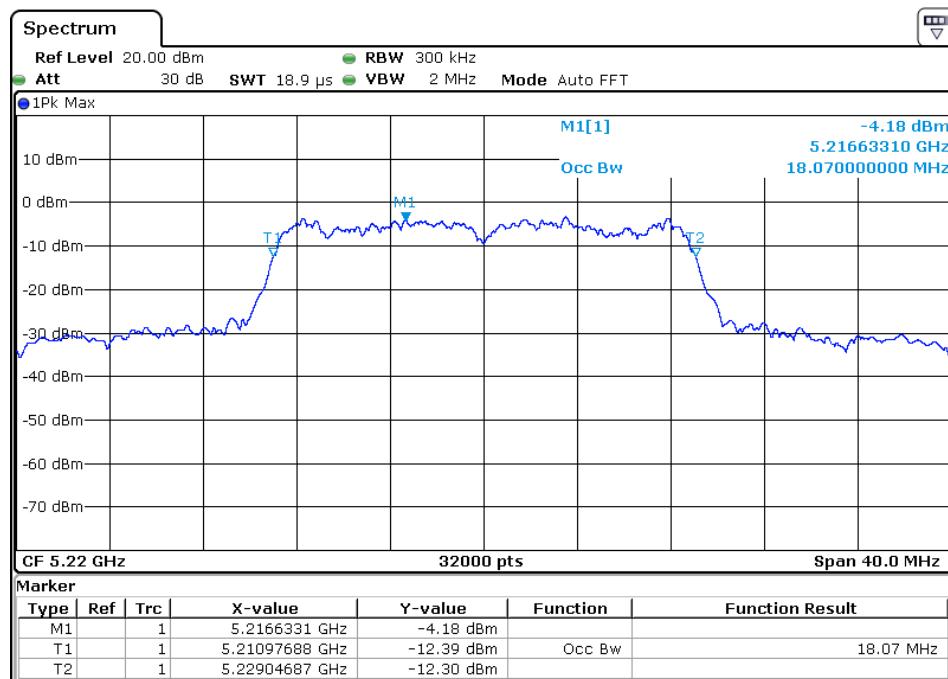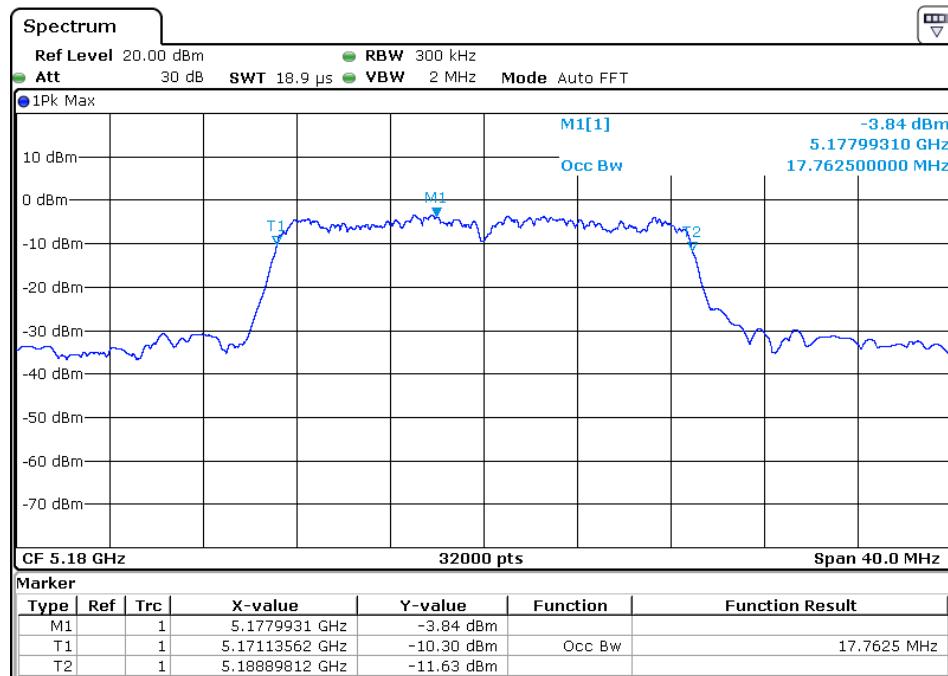

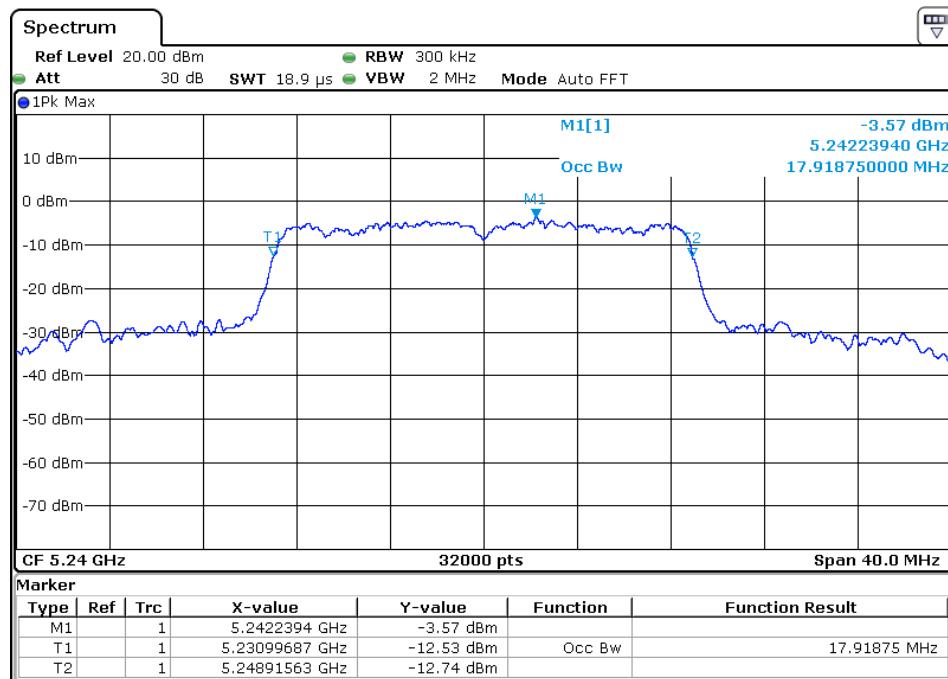


### Ant 1 802.11 ac40

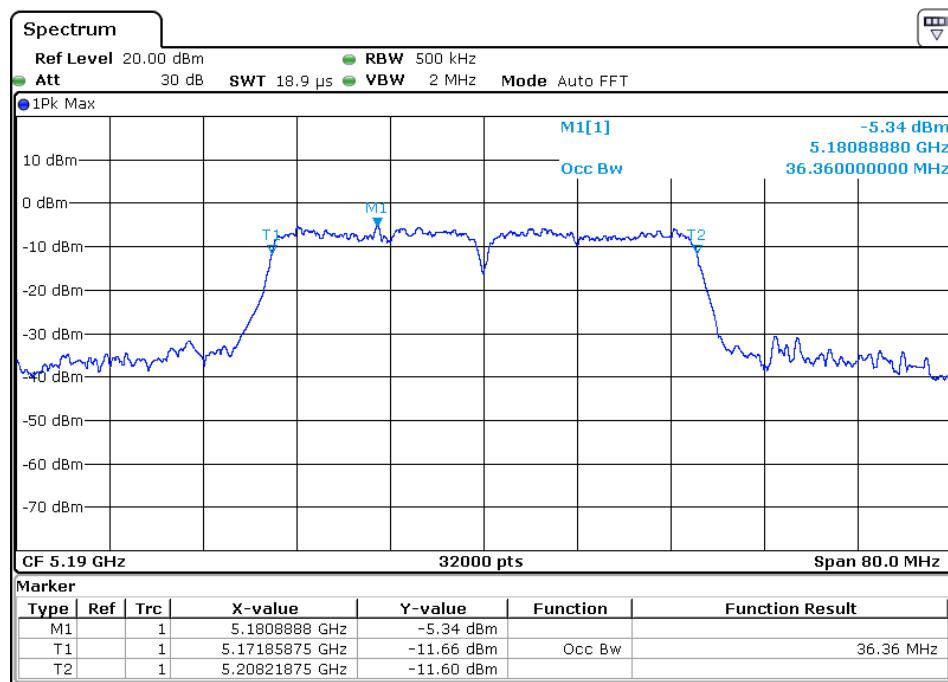

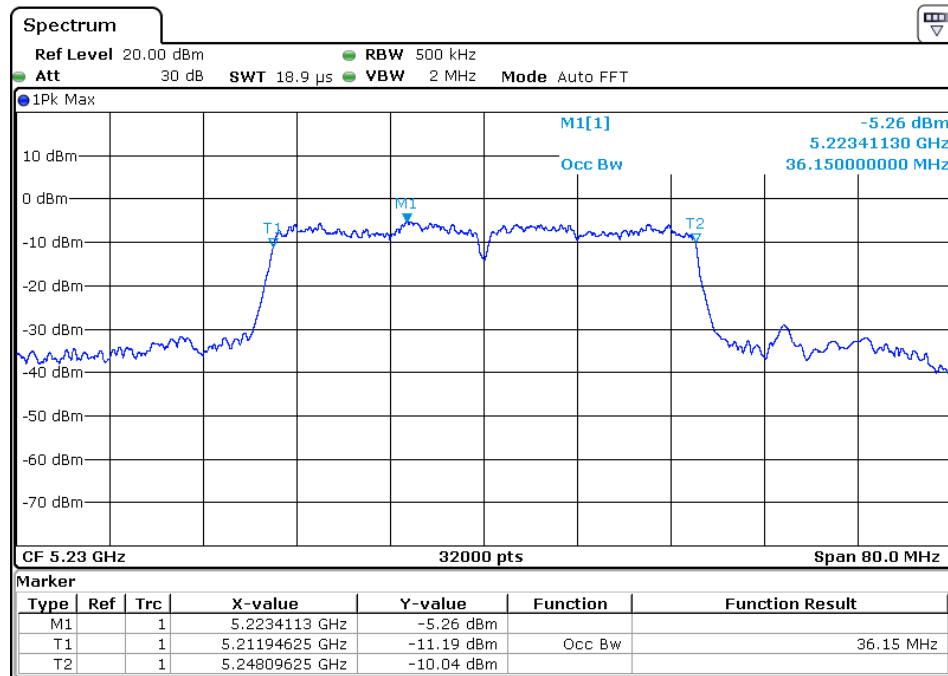

### Ant 1 802.11 ac80

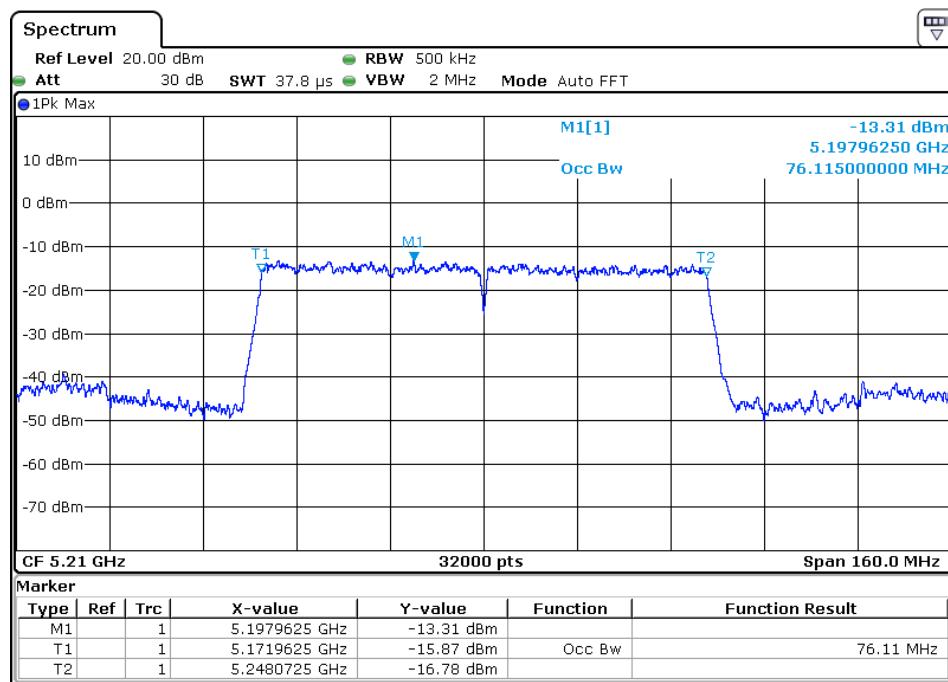

## 6.5 Peak Power Density

### 6.5.1 Applied procedures / Limit

1. For the band 5.150-5.250 GHz, the peak power spectral density shall not exceed 11 dBm in any 1000KHz band.
2. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### 6.5.2 Test procedure

1. The setting follows Method SA-1 of FCC KDB 789033 D02 General UNII Test Procedures New Rules v01 . For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, "provided that the measured power is integrated over the full reference bandwidth" to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:
  - a) Set RBW  $\geq 1/T$ , where T is defined in section II.B.I.a).
  - b) Set VBW  $\geq 3$  RBW.
  - c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add  $10\log(500\text{kHz}/\text{RBW})$  to the measured result, whereas RBW (< 500 KHz) is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
  - d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add  $10\log(1\text{MHz}/\text{RBW})$  to the measured result, whereas RBW (< 1 MHz) is the reduced resolution bandwidth of spectrum analyzer set during measurement.
  - e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

### 6.5.3 TEST SETUP



### 6.5.4 Deviation from standard

No deviation.



### 6.5.5 Test results



Note:1/2 Represent the value of antenna1/2, The worst data is Antenna 1, only shown Antenna 1 Plot.



| Test Mode  | NTx | Data Rate (Mbps) | Channel No. | Freq. (MHz) | Ant 1 PSD (dBm/MHz) | Limit (dBm /MHz) | Result |
|------------|-----|------------------|-------------|-------------|---------------------|------------------|--------|
| 11a        | 2   | 6                | 36          | 5180        | -1.16               | 11.00            | Pass   |
| 11a        | 2   | 6                | 44          | 5220        | -0.81               | 11.00            | Pass   |
| 11a        | 2   | 6                | 48          | 5240        | -0.89               | 11.00            | Pass   |
| 11n-HT20   | 2   | 7.2              | 36          | 5180        | -0.48               | 11.00            | Pass   |
| 11n-HT20   | 2   | 7.2              | 44          | 5220        | -0.82               | 11.00            | Pass   |
| 11n-HT20   | 2   | 7.2              | 48          | 5240        | -0.98               | 11.00            | Pass   |
| 11n-HT40   | 2   | 15               | 38          | 5190        | -4.19               | 11.00            | Pass   |
| 11n-HT40   | 2   | 15               | 46          | 5230        | -4.25               | 11.00            | Pass   |
| 11ac-VHT20 | 2   | 7.2              | 36          | 5180        | -1.02               | 11.00            | Pass   |
| 11ac-VHT20 | 2   | 7.2              | 44          | 5220        | -0.90               | 11.00            | Pass   |
| 11ac-VHT20 | 2   | 7.2              | 48          | 5240        | -0.64               | 11.00            | Pass   |
| 11ac-VHT40 | 2   | 15               | 38          | 5190        | -2.99               | 11.00            | Pass   |
| 11ac-VHT40 | 2   | 15               | 46          | 5230        | -2.83               | 11.00            | Pass   |
| 11ac-VHT80 | 2   | 32.5             | 42          | 5210        | -3.16               | 11.00            | Pass   |
| 11a        | 2   | 6                | 149         | 5745        | -3.31               | 30.00            | Pass   |
| 11a        | 2   | 6                | 157         | 5785        | -3.15               | 30.00            | Pass   |
| 11a        | 2   | 6                | 165         | 5825        | -2.58               | 30.00            | Pass   |
| 11n-HT20   | 2   | 7.2              | 149         | 5745        | -2.67               | 30.00            | Pass   |
| 11n-HT20   | 2   | 7.2              | 157         | 5785        | -3.35               | 30.00            | Pass   |
| 11n-HT20   | 2   | 7.2              | 165         | 5825        | -2.94               | 30.00            | Pass   |
| 11n-HT40   | 2   | 15               | 151         | 5755        | -5.94               | 30.00            | Pass   |
| 11n-HT40   | 2   | 15               | 159         | 5795        | -5.95               | 30.00            | Pass   |
| 11ac-VHT20 | 2   | 7.2              | 149         | 5745        | -2.99               | 30.00            | Pass   |
| 11ac-VHT20 | 2   | 7.2              | 157         | 5785        | -2.83               | 30.00            | Pass   |
| 11ac-VHT20 | 2   | 7.2              | 165         | 5825        | -3.16               | 30.00            | Pass   |
| 11ac-VHT40 | 2   | 15               | 151         | 5755        | -5.94               | 30.00            | Pass   |
| 11ac-VHT40 | 2   | 15               | 159         | 5795        | -5.28               | 30.00            | Pass   |
| 11ac-VHT80 | 2   | 32.5             | 155         | 5775        | -14.39              | 30.00            | Pass   |

Result plot as follows:



Ant 1 802.11 a

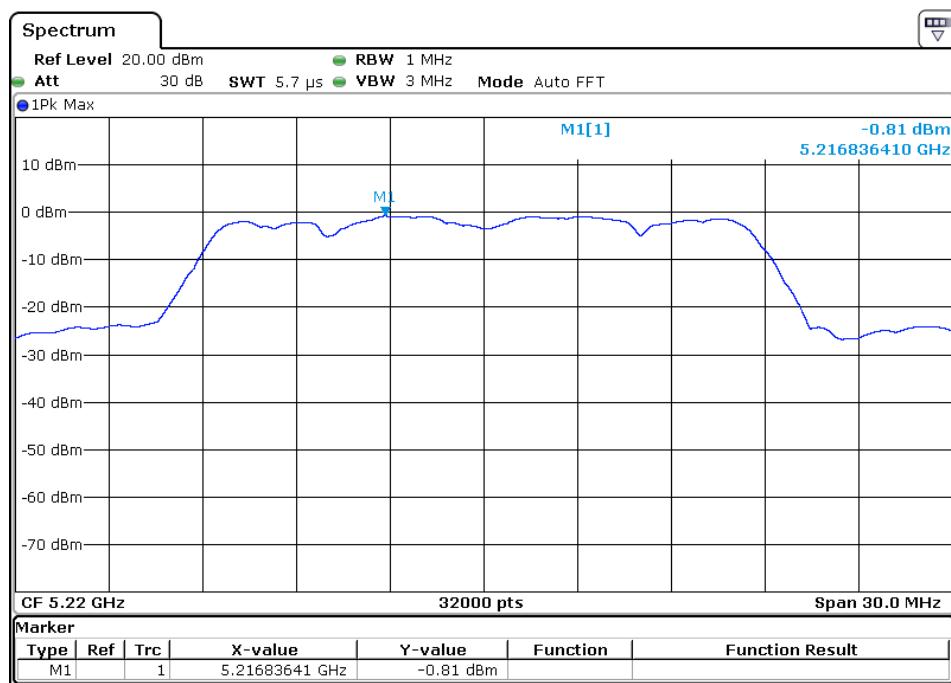
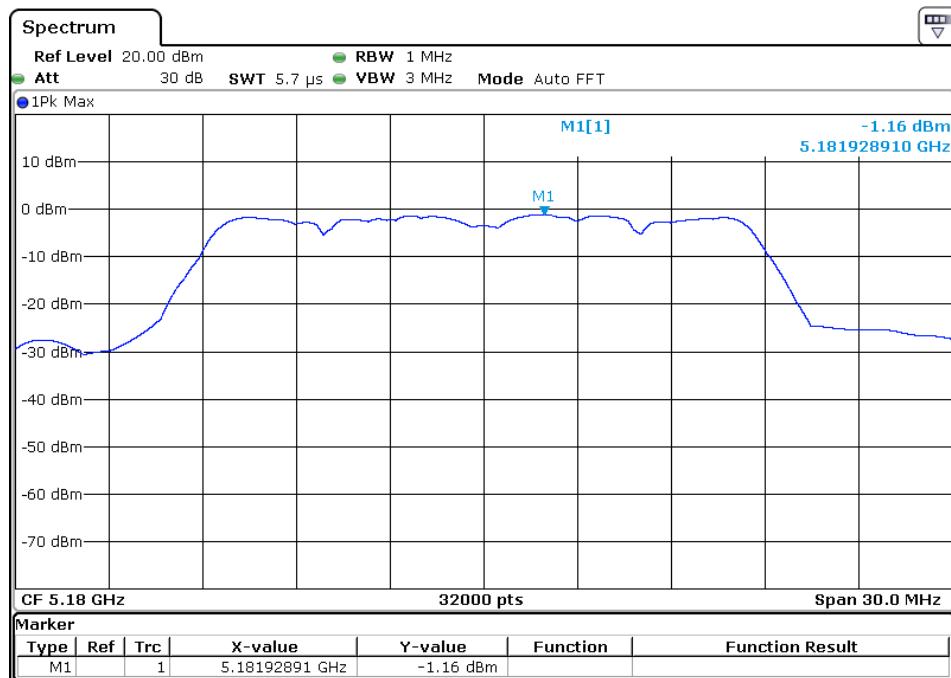


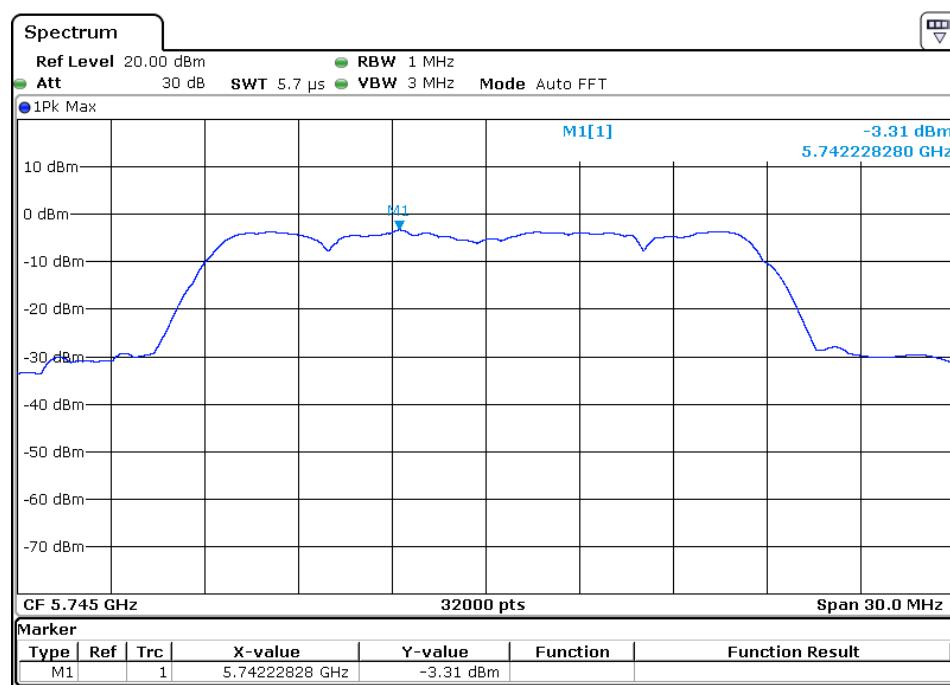
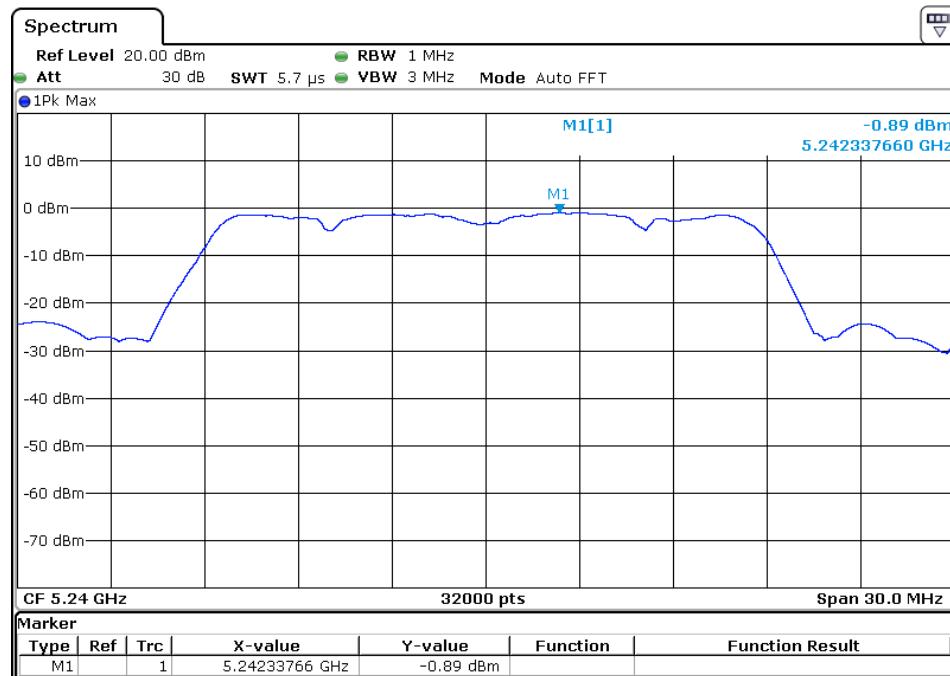


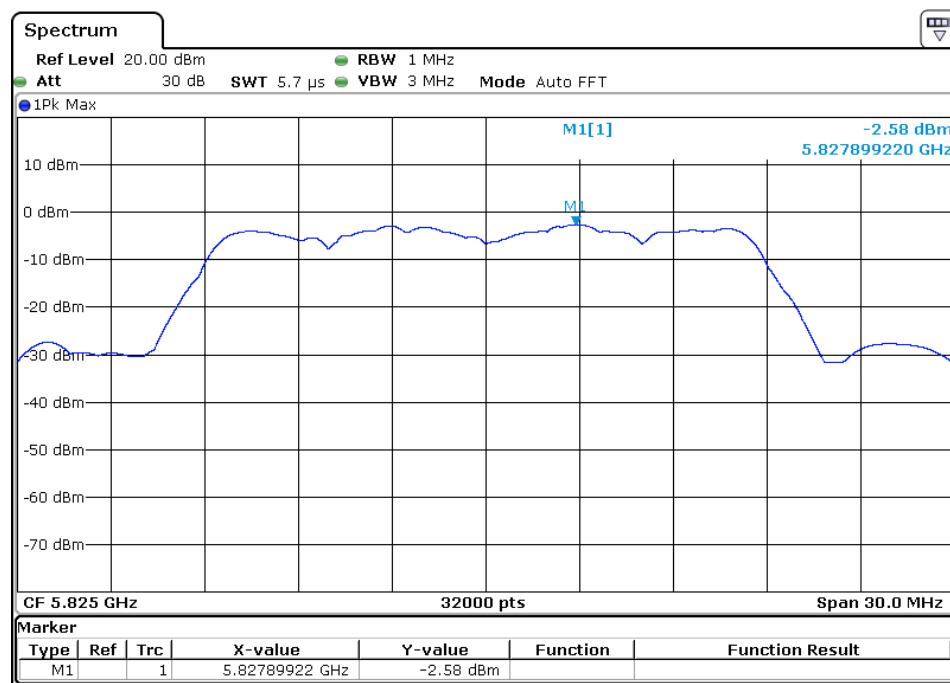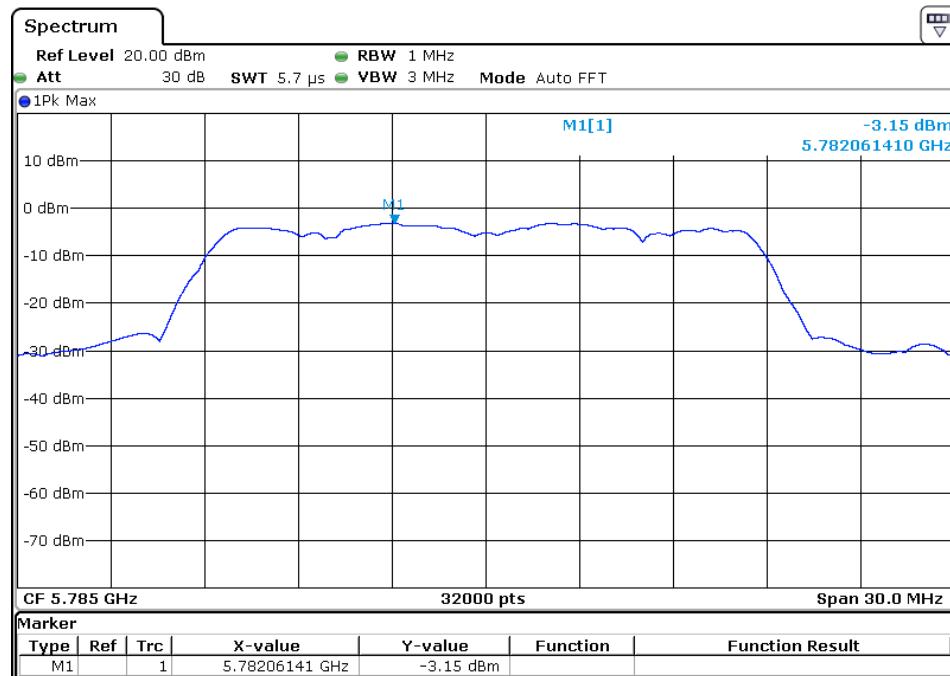



## Ant 1 802.11 n20

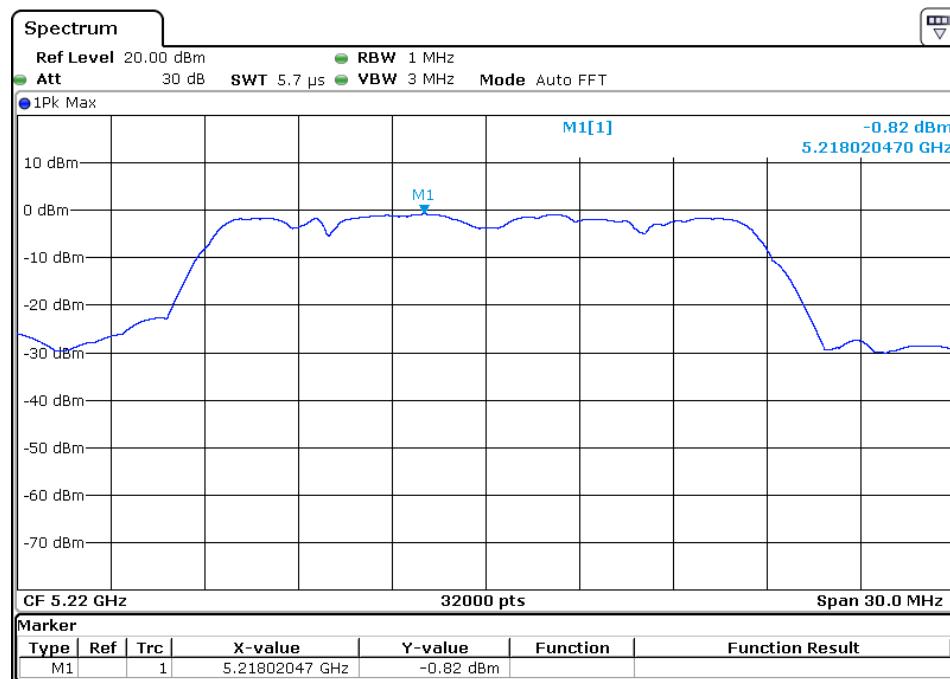
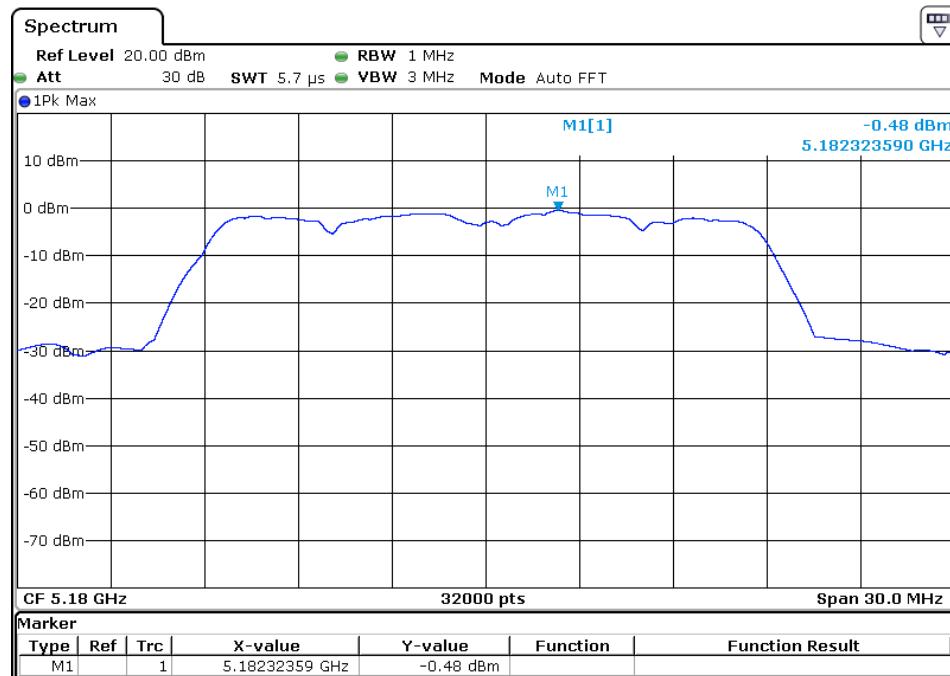


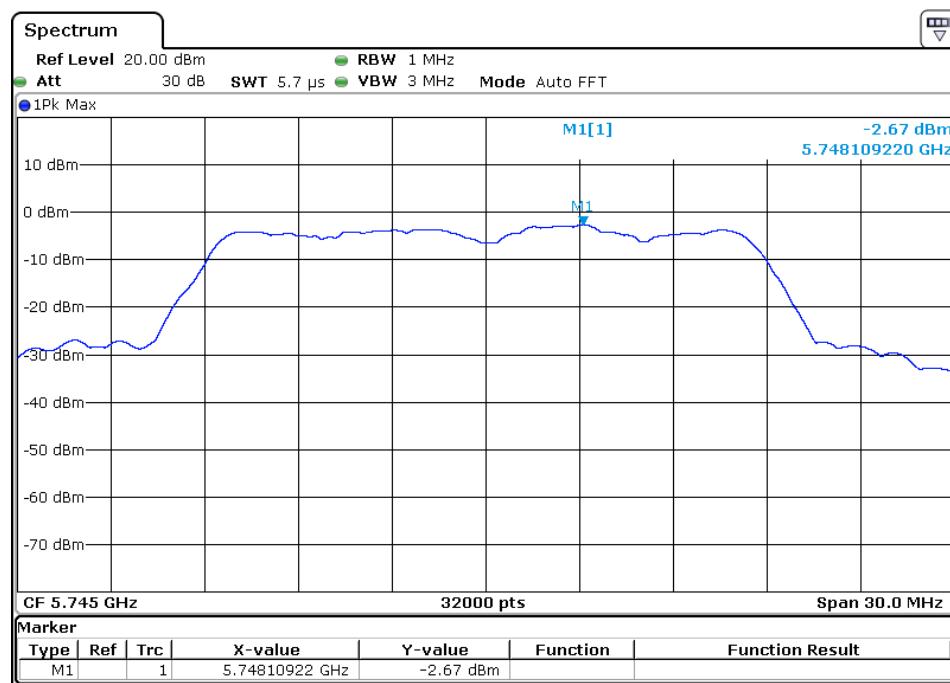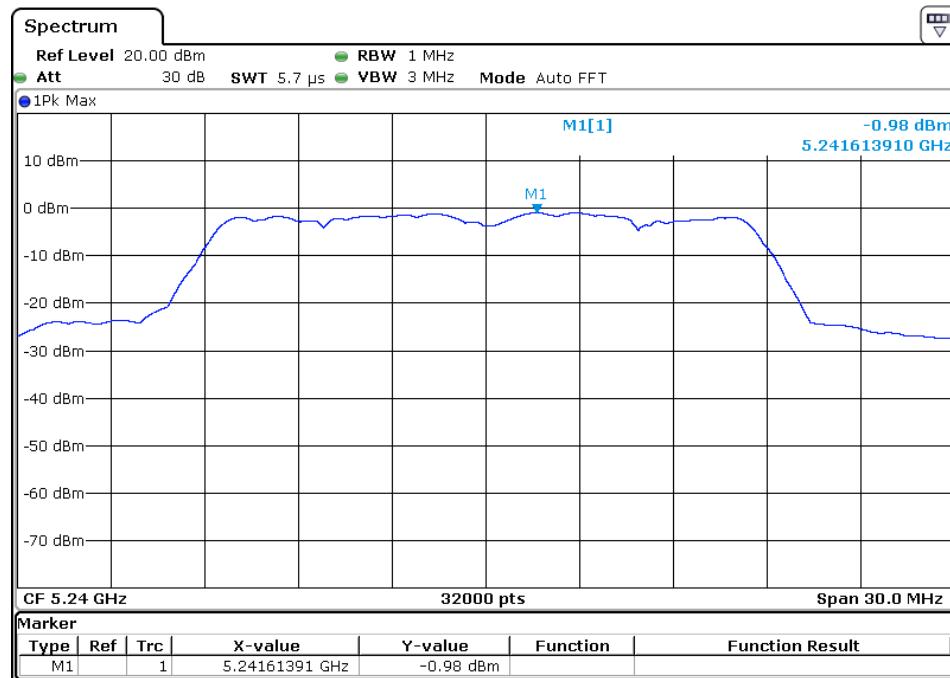

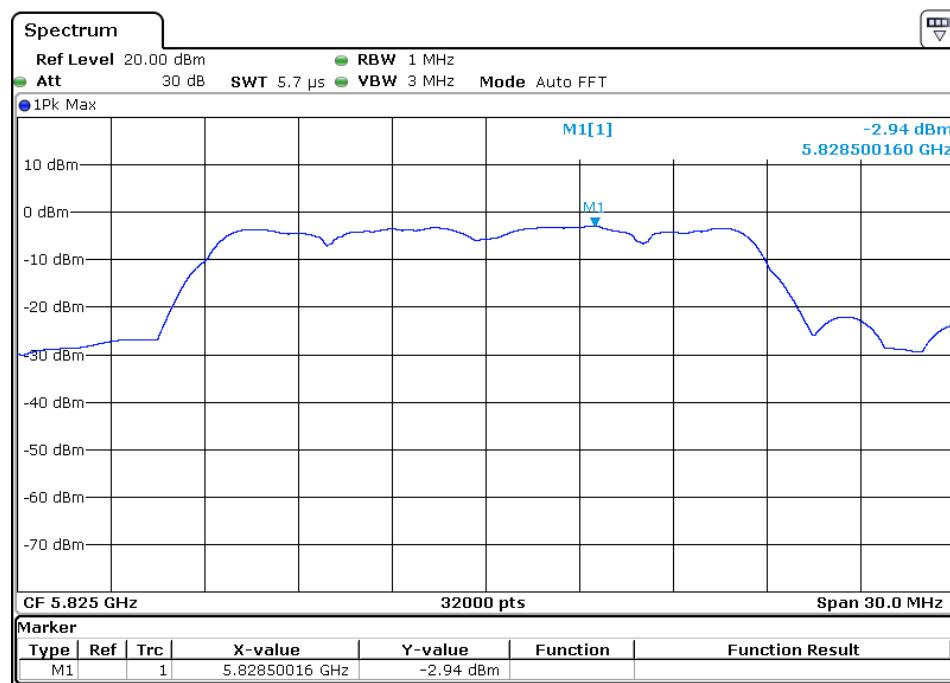
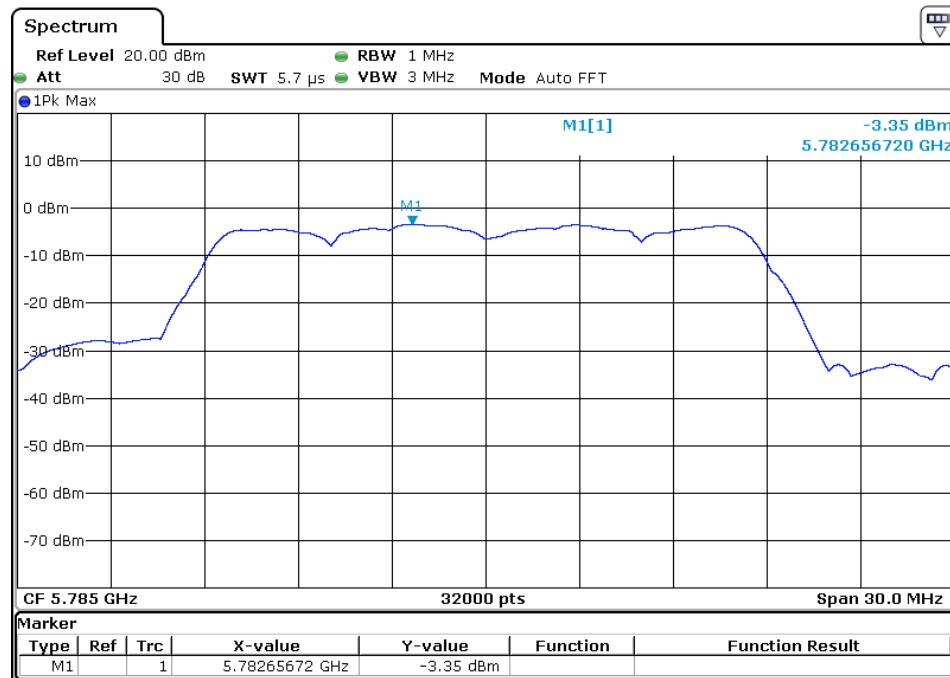




## Ant 1 802.11 n40

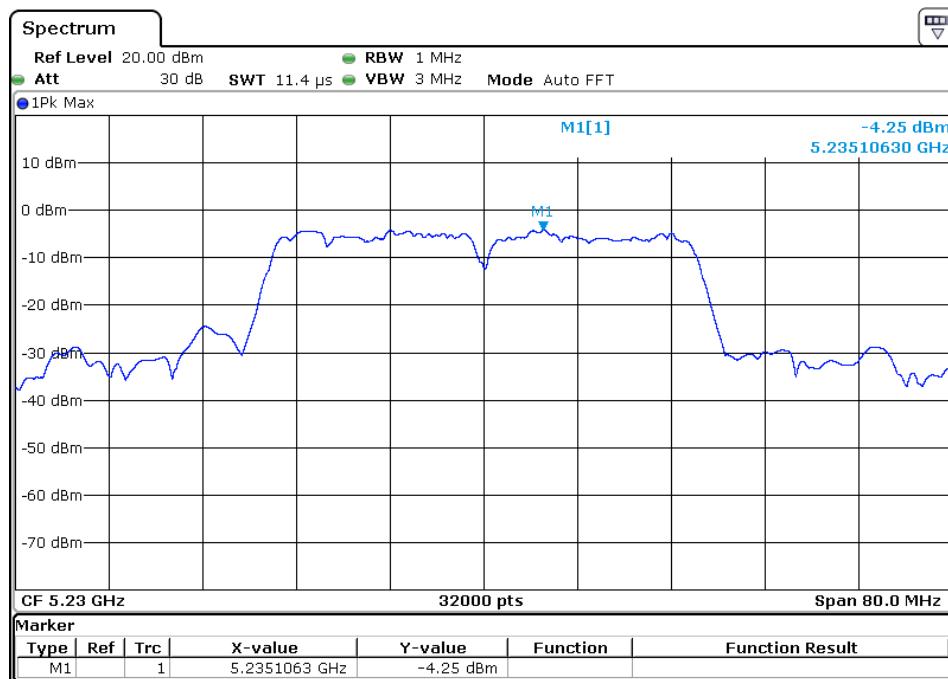
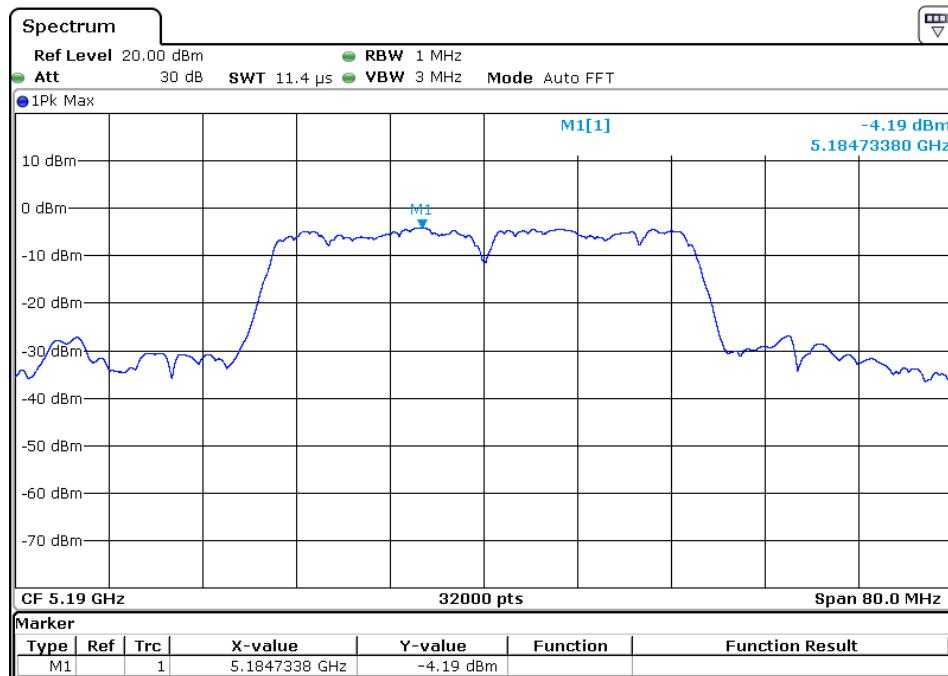


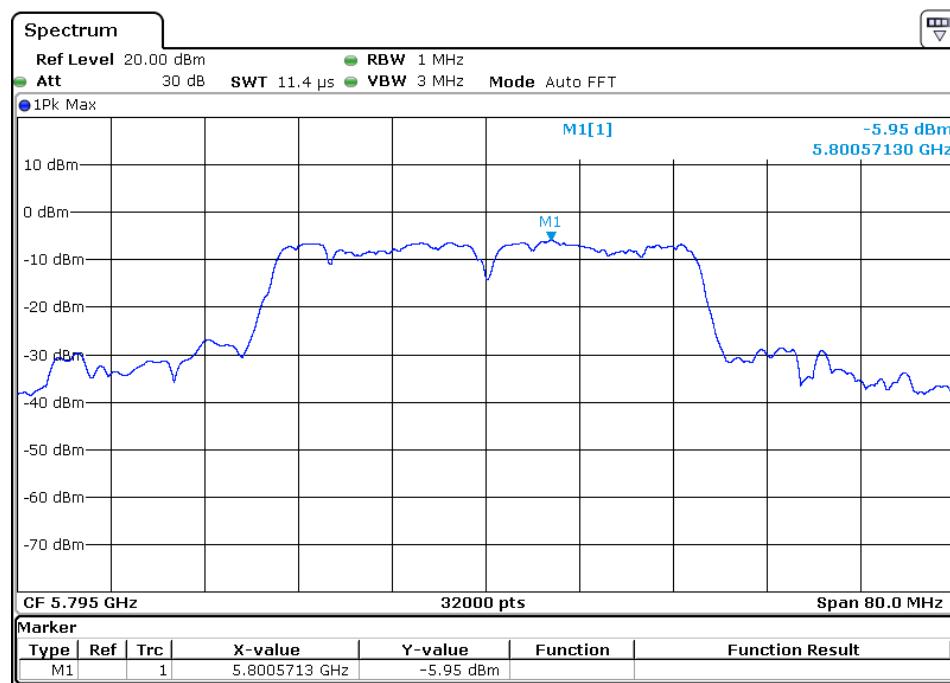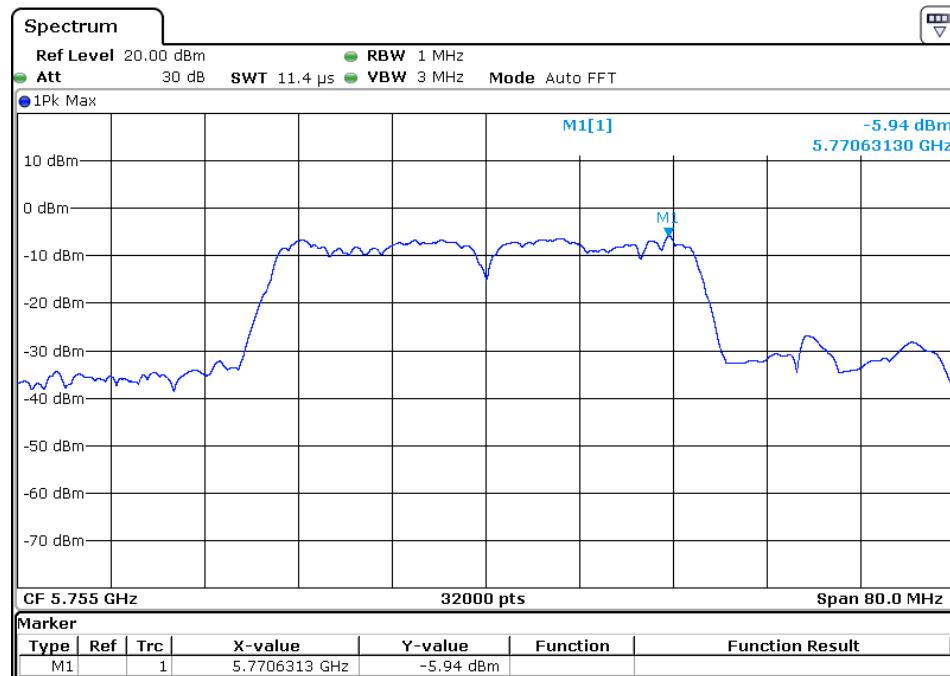



## Ant 1 802.11 ac20

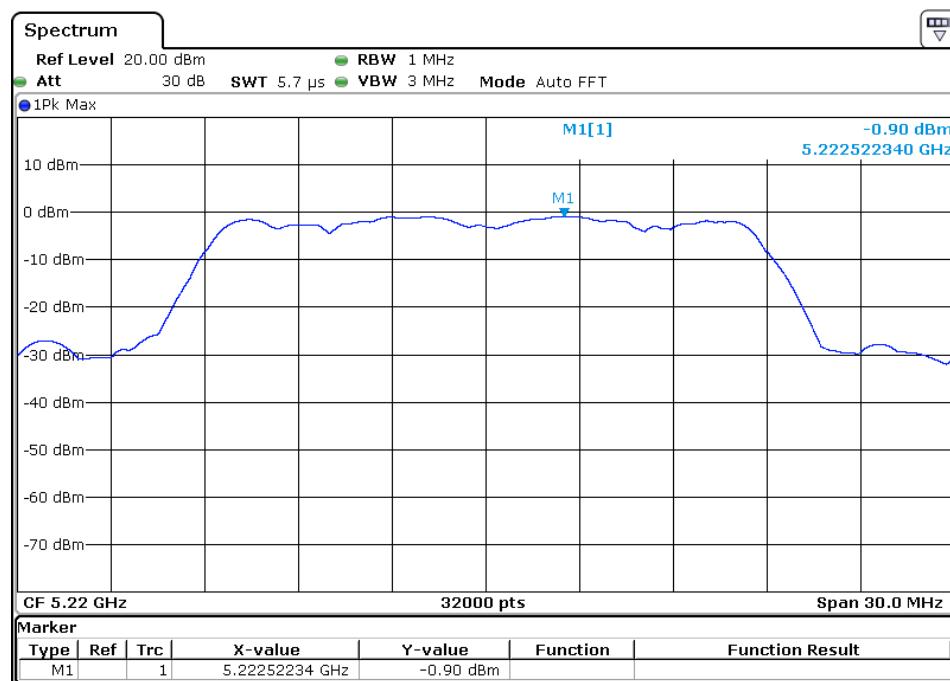
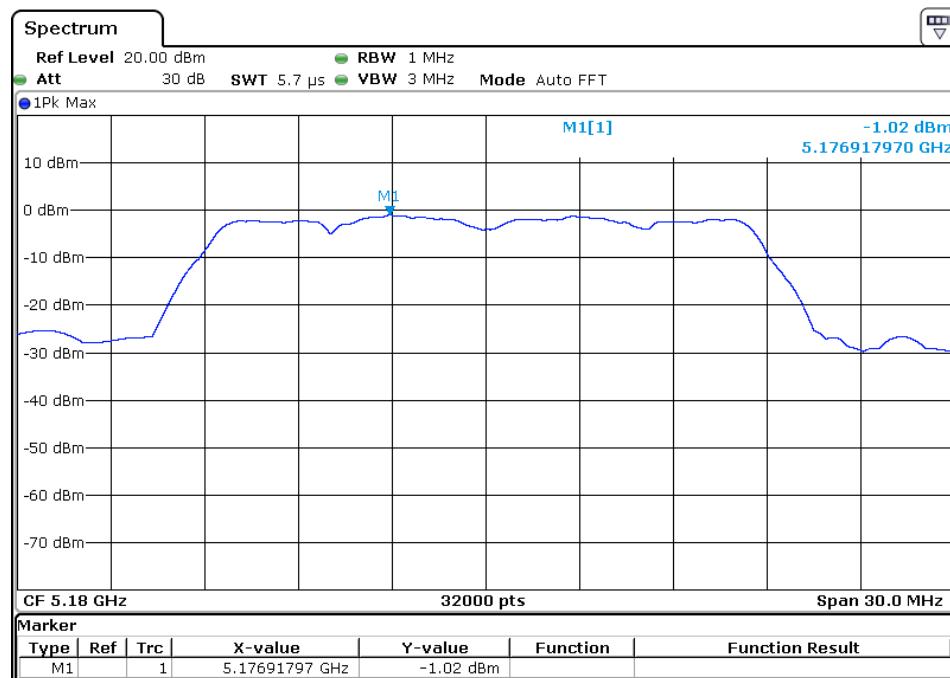


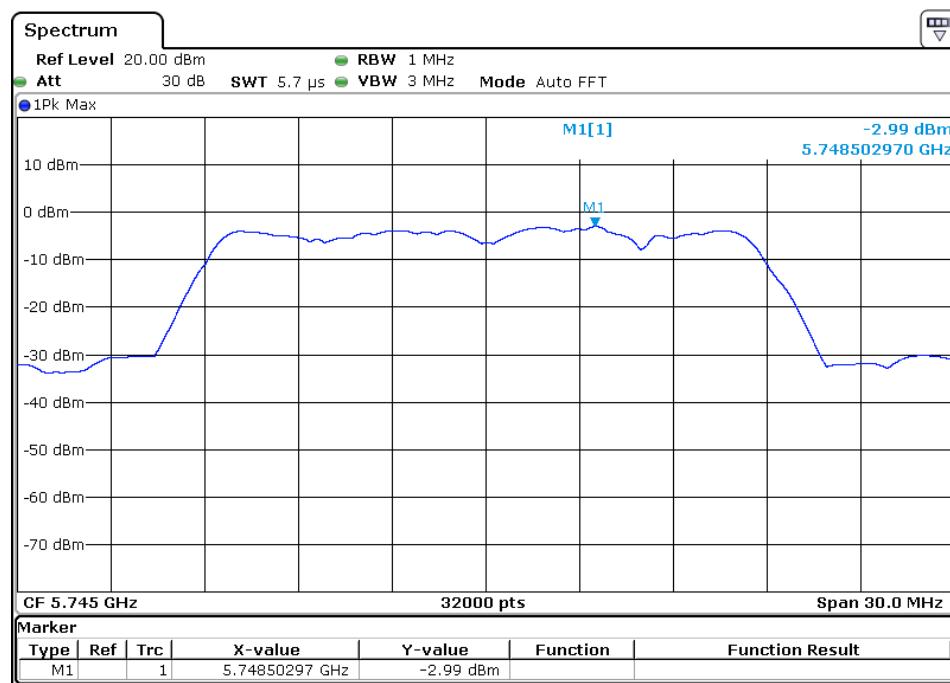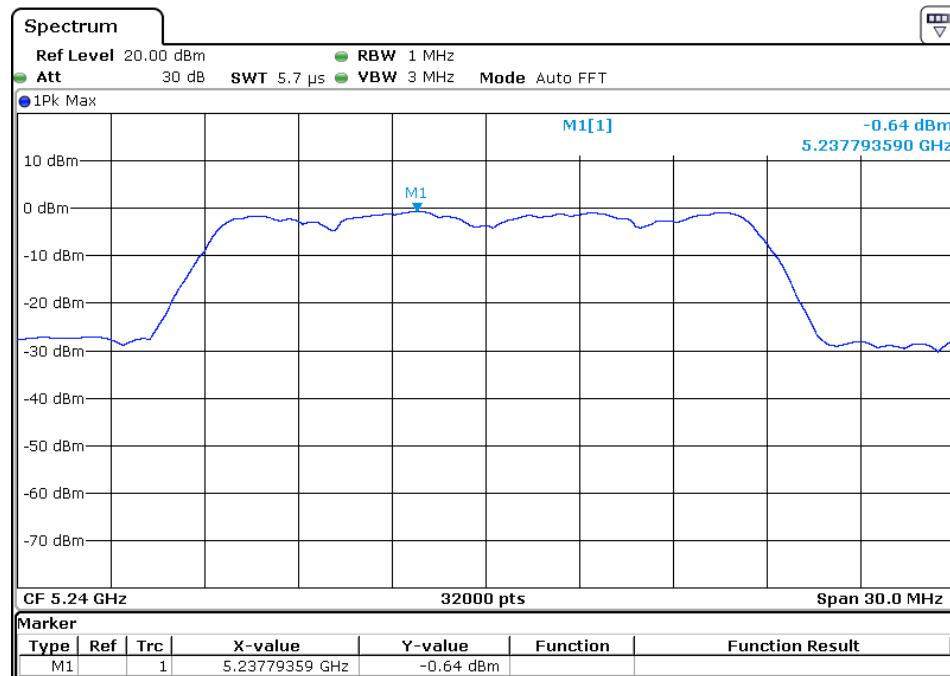

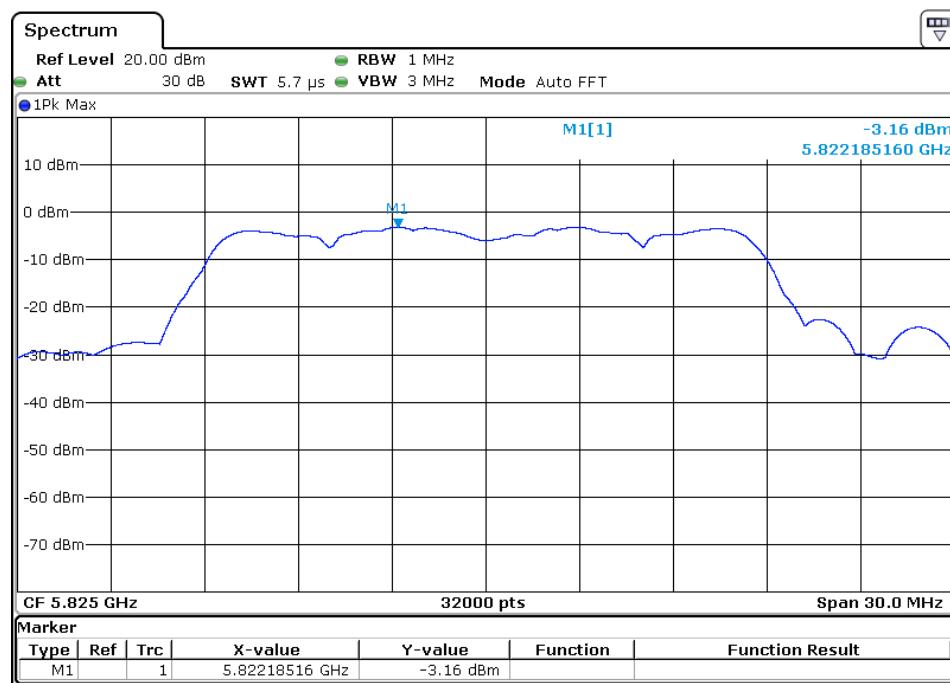
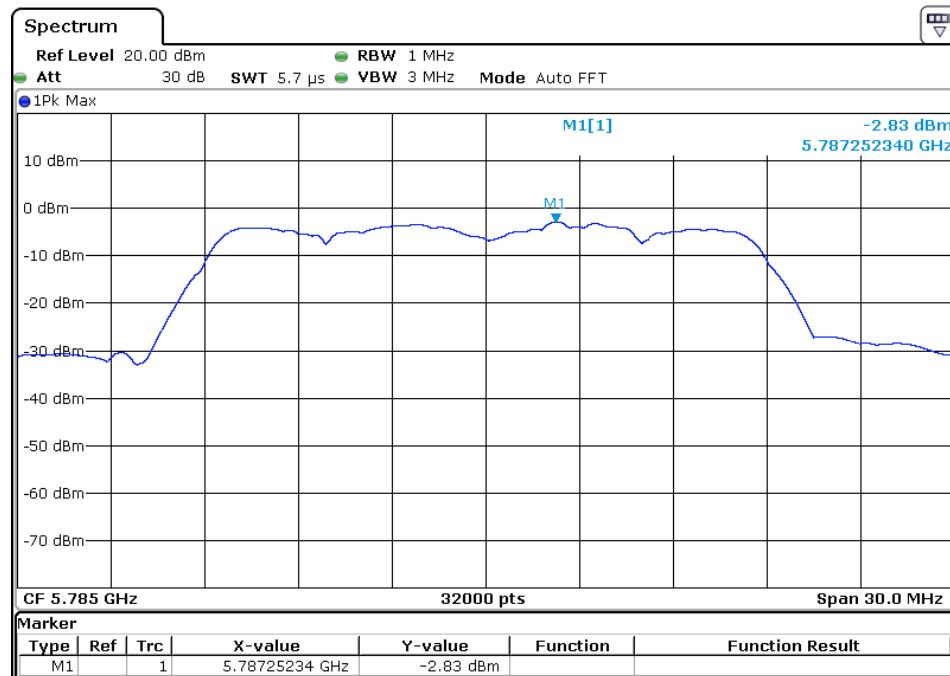


## Ant 1 802.11 ac40

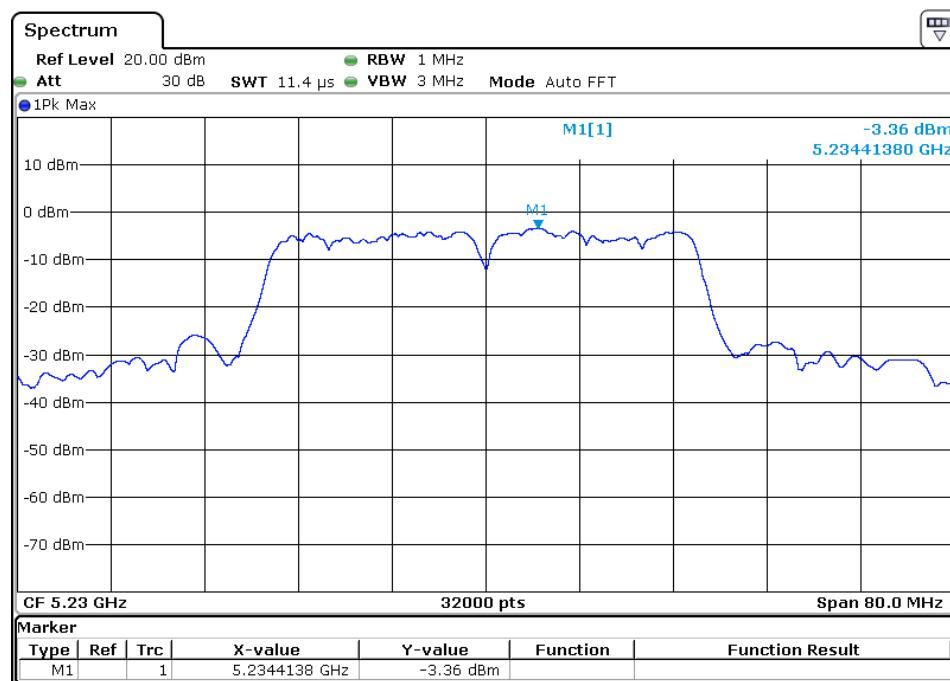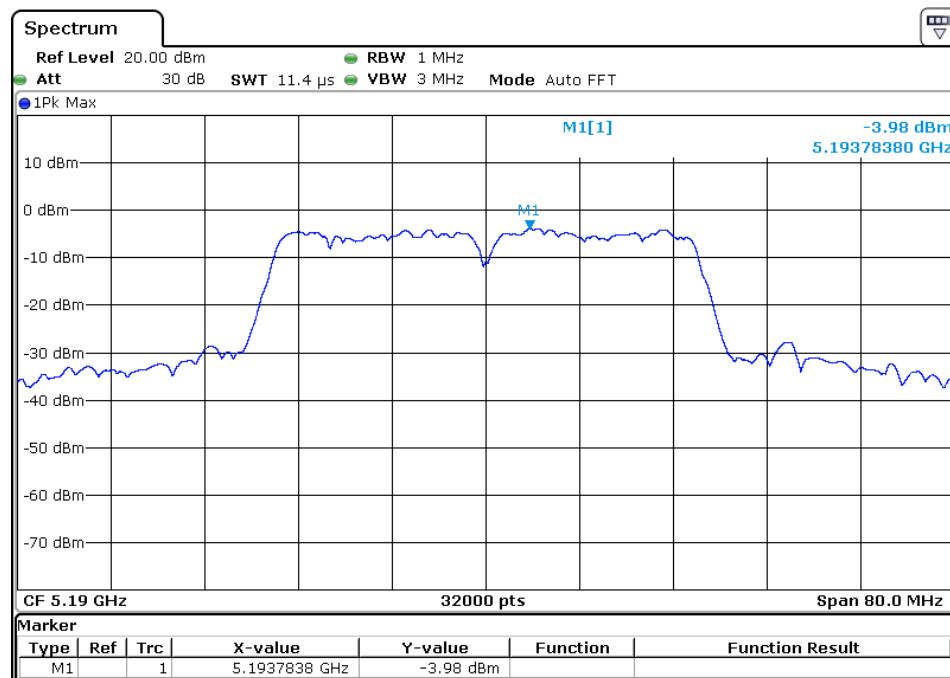

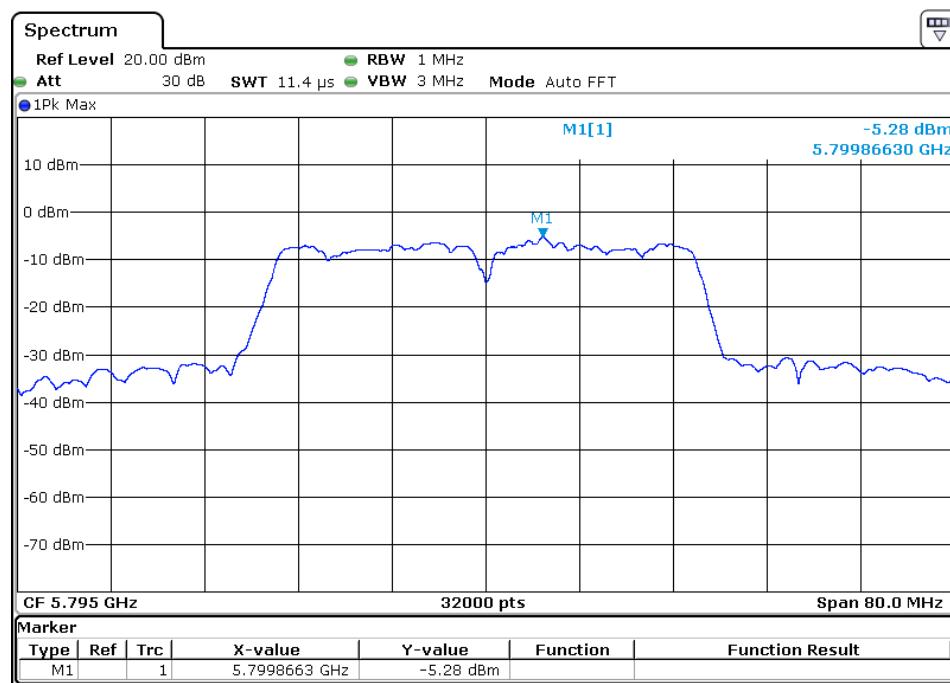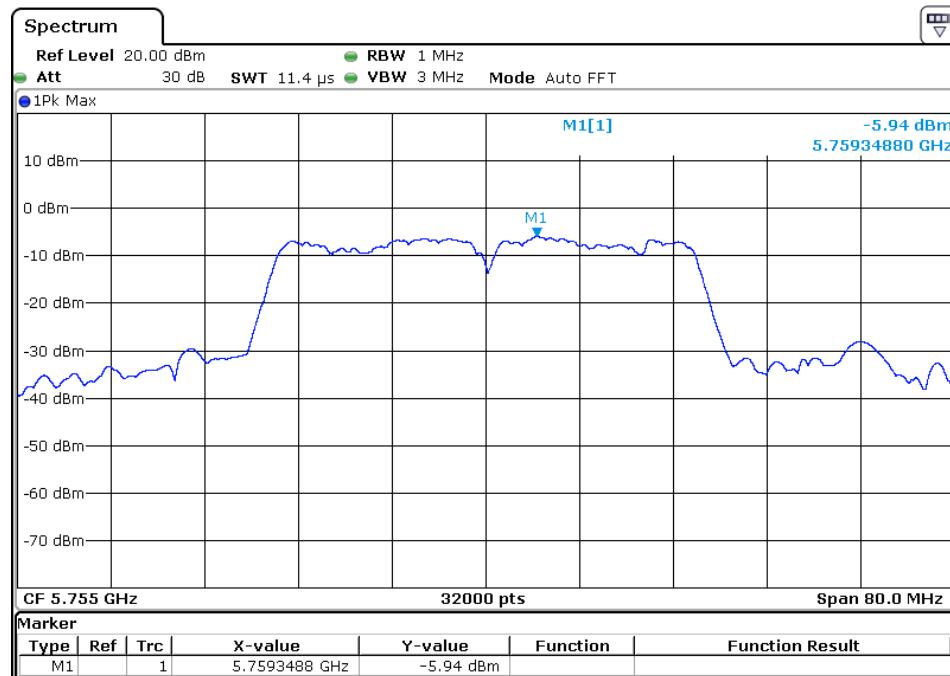

## Ant 1 802.11 ac80

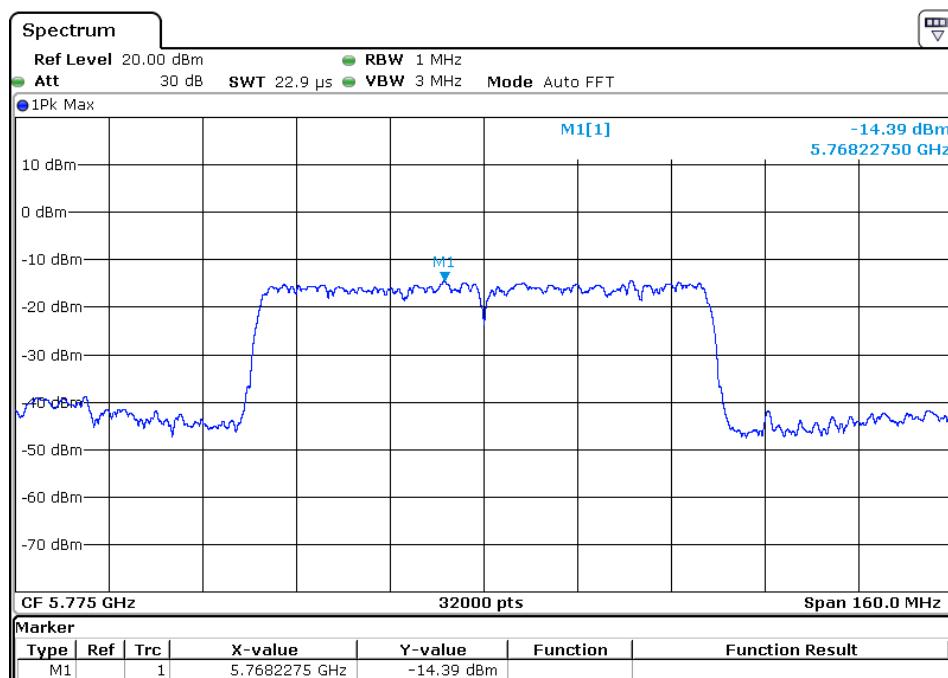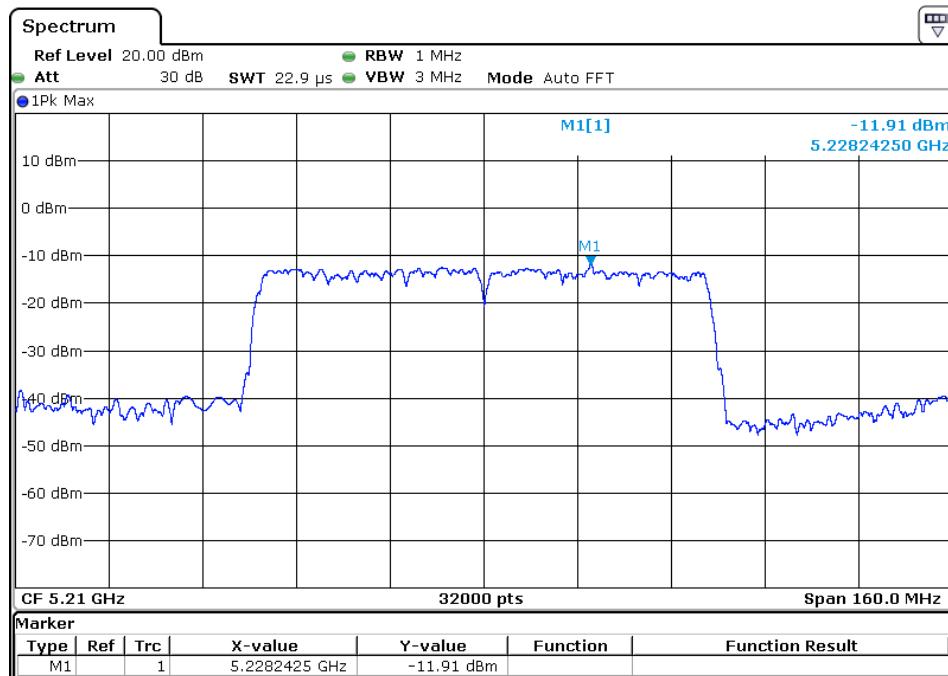

## 6.6 Maximum Peak Output Power

### 6.6.1 Applied procedures / Limit

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

#### FCC Part15 (15.407) , Subpart E

| Section               | Test Item         | Limit                      | Frequency Range (MHz) | Result |
|-----------------------|-------------------|----------------------------|-----------------------|--------|
| 15.407(E)<br>(ii)/(3) | Peak Output Power | 0.25 watt or<br>23.9794dBm | 5150-5250             | PASS   |
|                       |                   | 1 watt or 30dBm            | 5725-5850             | PASS   |

### 6.6.2 Test procedure

KDB 789033 D02v01r01 - Section E) 3) b) Method PM-G

The EUT was directly connected to the Power Sensor & Power meter.

Average power measurements were perform only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

### 6.6.3 Test Setup



### 6.6.4 Deviation from standard

No deviation.



### 6.6.5 Test results

| Test Mode  | Data Rate (Mbps) | Channel No. | Freq. (MHz) | Ant 1 Average Power (dBm) | Limit ≤(dBm) | Result |
|------------|------------------|-------------|-------------|---------------------------|--------------|--------|
| 11a        | 6                | 36          | 5180        | 11.62                     | 23.9794      | Pass   |
| 11a        | 6                | 44          | 5220        | 11.48                     | 23.9794      | Pass   |
| 11a        | 6                | 48          | 5240        | 11.51                     | 23.9794      | Pass   |
| 11a        | 6                | 149         | 5745        | 10.65                     | 30           | Pass   |
| 11a        | 6                | 157         | 5785        | 10.34                     | 30           | Pass   |
| 11a        | 6                | 165         | 5825        | 10.27                     | 30           | Pass   |
| 11n-HT20   | 7.2              | 36          | 5180        | 11.85                     | 23.9794      | Pass   |
| 11n-HT20   | 7.2              | 44          | 5220        | 11.33                     | 23.9794      | Pass   |
| 11n-HT20   | 7.2              | 48          | 5240        | 11.26                     | 23.9794      | Pass   |
| 11n-HT20   | 7.2              | 149         | 5745        | 10.71                     | 30           | Pass   |
| 11n-HT20   | 7.2              | 157         | 5785        | 10.45                     | 30           | Pass   |
| 11n-HT20   | 7.2              | 165         | 5825        | 10.36                     | 30           | Pass   |
| 11n-HT40   | 15               | 38          | 5190        | 11.19                     | 23.9794      | Pass   |
| 11n-HT40   | 15               | 46          | 5230        | 11.68                     | 23.9794      | Pass   |
| 11n-HT40   | 15               | 151         | 5755        | 10.52                     | 30           | Pass   |
| 11n-HT40   | 15               | 159         | 5795        | 10.33                     | 30           | Pass   |
| 11ac-VHT20 | 7.2              | 36          | 5180        | 11.29                     | 23.9794      | Pass   |
| 11ac-VHT20 | 7.2              | 44          | 5220        | 11.46                     | 23.9794      | Pass   |
| 11ac-VHT20 | 7.2              | 48          | 5240        | 11.35                     | 23.9794      | Pass   |
| 11ac-VHT20 | 7.2              | 149         | 5745        | 10.74                     | 30           | Pass   |
| 11ac-VHT20 | 7.2              | 157         | 5785        | 10.48                     | 30           | Pass   |
| 11ac-VHT20 | 7.2              | 165         | 5825        | 10.50                     | 30           | Pass   |
| 11ac-VHT40 | 15               | 38          | 5190        | 11.13                     | 23.9794      | Pass   |
| 11ac-VHT40 | 15               | 46          | 5230        | 11.69                     | 23.9794      | Pass   |
| 11ac-VHT40 | 15               | 151         | 5755        | 10.25                     | 30           | Pass   |
| 11ac-VHT40 | 15               | 159         | 5795        | 10.34                     | 30           | Pass   |
| 11ac-VHT80 | 32.5             | 42          | 5210        | 6.68                      | 23.9794      | Pass   |
| 11ac-VHT80 | 32.5             | 155         | 5775        | 6.45                      | 30           | Pass   |

## 6.7 FREQUENCY STABILITY MEASUREMENT

### 6.7.1 Applied procedures / Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an Emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.


### 6.7.2 Test procedure

1. To ensure emission at the band edge is maintained within the authorized band, those values shall be measured by radiation emissions at upper and lower frequency points, and finally compensated by frequency deviation as procedures below.
2. The EUT was operated at the maximum output power, and connected to the spectrum analyzer, which is set to maximum hold function and peak detector. The peak value of the power envelope was measured and noted. The upper and lower frequency points were respectively measured relatively 10dB lower than the measured peak value.
3. The frequency deviation was calculated by adding the upper frequency point and the lower frequency point divided by two. Those detailed values of frequency deviation are provided in table below.

### 6.7.3 Deviation from standard

No deviation.

### 6.7.4 Test setup

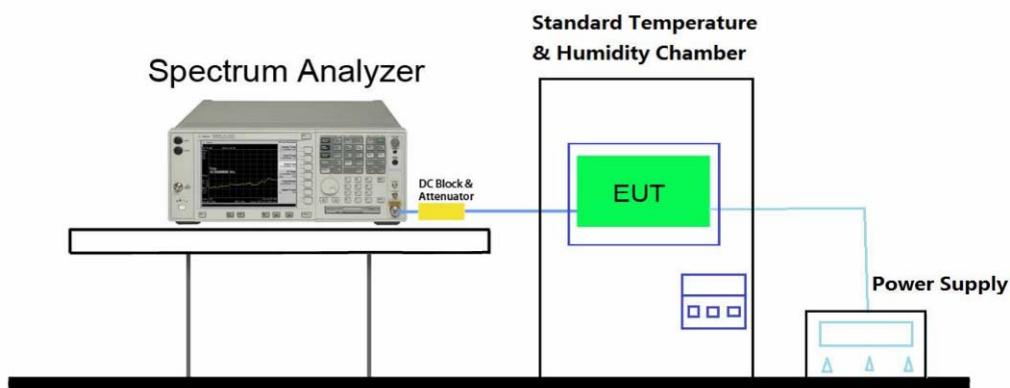

### 6.7.5 Test results

| Voltage (%) | Power (VAC) | Temp (°C)  | Frequency Tolerance (ppm) |
|-------------|-------------|------------|---------------------------|
| 100%        | 120         | - 20       | 3.47                      |
|             |             | - 10       | 2.06                      |
|             |             | 0          | 1.73                      |
|             |             | + 10       | 2.51                      |
|             |             | + 20 (Ref) | 3.96                      |
|             |             | + 30       | 4.24                      |
|             |             | + 40       | 3.01                      |
|             |             | + 50       | 2.68                      |
| 115%        | 138         | + 20       | 3.47                      |
| 85%         | 102         | + 20       | 2.88                      |

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} \*10<sup>6</sup>.

## 6.8 AUTOMATICALLY DISCONTINUE TRANSMISSION

### 6.8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

### 6.8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission

## 6.9 ANTENNA REQUIREMENT

### 6.9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 6.9.2 EUT ANTENNA

The EUT antenna comply with the standard requirement.

## 7 Photographs

### 7.1 Radiated Emission Test Setup

Below 1G



Above 1G



## 7.2 Conduction Emission Test Setup



## 7.3 EUT Constructional Details

Please refer to report E-F1609004-1.

**\*\*End of report\*\***