



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

Test Report

Product Name: ODock@RF remote

FCC ID: VL5-RFREMOTE

MODEL NO.: RF REMOTE, RM043 RF REMOTE,
AD120R RF REMOTE, PF405 RF REMOTE,
PF240 RF REMOTE

Applicant:

Plastoform Industries Ltd.
Units 6A-12, 15 Floor, Mita Centre, 552-556 Castle Peak Road,
Kwai Chung, Hong Kong

Date Received: 11/09/2009

Date Tested: 11/07-08/2009

APPLICANT: Plastoform Industries Ltd.
FCC ID: VL5-RFREMOTE

Cover Sheet



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

TABLE OF CONTENTS

APPLICANT: Plastoform Industries Ltd.

FCC ID: VL5-RFREMOTE

TEST REPORT CONTAINING:

PAGE 1.....TEST EQUIPMENT LIST
PAGE 2.....TEST PROCEDURE
PAGE 3-4.....RADIATION INTERFERENCE
PAGE 5-8.....Band Edge Compliance

EXHIBIT INCLUDED:

PAGE 1.....BLOCK DIAGRAM
PAGE 2.....SCHEMATIC
PAGE 3.....USERS MANUAL
PAGE 4.....LABEL SAMPLE
PAGE 5.....LABEL LOCATION
PAGE 6.....EXTERNAL PHOTOGRAPHS
PAGE 7.....INTERNAL PHOTOGRAPHS
PAGE 8.....OPERATIONAL DESCRIPTION
PAGE 9.....TEST SET UP PHOTOGRAPHS

APPLICANT: Plastoform Industries Ltd.
FCC ID: VL5-RFREMOTE

TABLE OF CONTENTS



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

EMC Equipment List

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|--------------------------------|---------------|----------------|--------------|--------------|---------------|
| EMI Test Receiver | ROHDE&SCHWARZ | ESCI | 100492 | Mar. 10,2009 | 1 Year |
| LISN | ROHDE&SCHWARZ | ENV216 | 100093 | Mar. 10,2009 | 1 Year |
| EMI Test Receiver | ROHDE&SCHWARZ | ESCI | 101202 | Mar. 10,2009 | 1 Year |
| Spectrum Analyzer | ANRITSU | MS2651B | 6200238316 | Mar. 10,2009 | 1 Year |
| 50 Coaxial Switch | ANRITSU CORP | MP59B | 6200283933 | Mar. 10,2009 | 1 Year |
| Bilog Antenna | Sunol | JB3 | A121206 | Mar. 10,2009 | 1 Year |
| Horn Antenna | EMCO | 3115 | 640201028-06 | Mar. 10,2009 | 1 Year |
| 50 Coaxial Switch | ANRITSU CORP | MP59B | 6200283933 | Mar. 10,2009 | 1 Year |
| Cable | Resenberger | N/A | NO.1 | Mar. 10,2009 | 1 Year |
| Cable | SCHWARZBECK | N/A | NO.2 | Mar. 10,2009 | 1 Year |
| Cable | SCHWARZBECK | N/A | NO.3 | Mar. 10,2009 | 1 Year |
| Single Phase Power Line Filter | Kikusui | LIN40MA-PC R-L | LM002352 | Mar. 10,2009 | 1 Year |
| AC Power Source | Kikusui | AC40MA | LM003232 | Mar. 10,2009 | 1 Year |
| Test analyzer | Kikusui | KHA1000 | LM003720 | Mar. 10,2009 | 1 Year |
| ESD Tester | Kikusui | KES4021 | LM003537 | Mar. 10,2009 | 1 Year |
| Signal Generator | IFR | 2032 | 203002/100 | Mar. 10,2009 | 1 Year |
| Amplifier | A&R | 150W1000 | 301584 | NCR | NCR |
| Dual Directional Coupler | A&R | DC6080 | 301508 | Mar. 10,2009 | 1 Year |
| Power Head | A&R | PH2000 | 301193 | Mar. 10,2009 | 1 Year |
| Power Meter | A&R | PM2002 | 302799 | Mar. 10,2009 | 1 Year |
| Field Monitor | A&R | FM5004 | 300329 | Mar. 10,2009 | 1 Year |
| Field Probe | A&R | FP5000 | 300221 | Mar. 10,2009 | 1 Year |
| EMCPRO System | EM Test | UCS-500-M4 | V0648102026 | Mar. 10,2009 | 1 Year |
| EMCPRO System | EM Test | UCS-500-M4 | V0648102026 | Mar. 10,2009 | 1 Year |

Remark:

Test Firm Name: Most Technology Service Co., Ltd.

Test Firm Address:

No. 5, 2nd Langshan Road, North District, Hi-tech Industrial Park, Nanshan, Shenzhen, Guangdong, China

FCC Registered Test Site Number: 490827

APPLICANT: Plastoform Industries Ltd.

FCC ID: VL5-RFREMOTE



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of MOST TECHNOLOGY SERVICE CO., LTD. The EUT was transmitting a test signal during the testing.

POWER LINE CONDUCTED INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a 50 uH LISN. Both Lines were observed. The bandwidth of the receiver was 10kHz with an appropriate sweep speed. The ambient temperature of the EUT was 25 with a humidity of 58%.

RADIATION INTERFERENCE: The test procedure used was ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a micro volt at the output of the antenna. The resolution bandwidth was 100 kHz and the video bandwidth was 300 kHz up to 1 GHz and 1 MHz with a video BW of 3 MHz above 1 GHz. The ambient temperature of the EUT was 25 with a humidity of 58%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer and cable loss. The antenna correction factors and cable loss are stated in terms of dB. The gain of the Pre-selector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

$$\begin{array}{ll} \text{Freq (MHz) METER READING + ACF + CABLE = FS} \\ 33 \quad 20 \text{ dBuV} + 10.36 \text{ dB} + 0.9 \text{ dB} = 31.26 \text{ dBuV/m @ 3m} \end{array}$$

ANSI STANDARD C63.4-2003 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to 10th harmonic of the fundamental.

Peak readings were taken in three (3) orthogonal planes and the highest readings were converted to average readings based on the duration of "ON" time.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSI Standard C63.4-2003 10.1.7 with the EUT 40 cm from the vertical ground wall.

APPLICANT: Plastoform Industries Ltd.
FCC ID: VL5-RFREMOTE



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: Plastoform Industries Ltd.

FCC ID: VL5-RFREMOTE

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.249, 15.209

REQUIREMENTS:

| FIELD STRENGTH of Fundamental: | FIELD STRENGTH of Harmonics | S15.209 |
|--------------------------------|-----------------------------|--|
| 902-928 MHz 2.4-2.4835 GHz | | 30-88 MHz 40 dBuV/m @3m 88-216 MHz 43.5 216-960 MHz 46 |
| 94 dBuV/m @3m | 54 dBuV/m @3m | ABOVE 960 MHz 54dBuV/m |

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 Db BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

REMARK: Emissions attenuated more than 20 dB below the permissible value are not reported.

| Frequency (MHz) | Antenna Polarization | Emission Level (dBuV/m) | | | FCC 15 Subpart C Limit(dBuV/m) |
|-------------------------------|----------------------|-------------------------|-------|-------|--------------------------------|
| | | Avg | QP | Peak | |
| Low frequency (2433.00MHz) | | | | | |
| 340.02 | Vertical | --- | 34.09 | 36.73 | 46.0 |
| 2433.21 | Vertical | --- | --- | 85.24 | 94.0 |
| 4866.09 | Vertical | --- | --- | 34.37 | 54.0 |
| 7299.01 | Vertical | --- | --- | 33.50 | 54.0 |
| 9732.10 | Vertical | --- | --- | 34.23 | 54.0 |
| 445.60 | Horizontal | --- | 33.09 | 35.60 | 46.0 |
| 2433.14 | Horizontal | --- | --- | 84.17 | 94.0 |
| 4866.08 | Horizontal | --- | --- | 33.63 | 54.0 |
| 7299.11 | Horizontal | --- | --- | 32.50 | 54.0 |
| 9732.04 | Horizontal | --- | --- | 31.32 | 54.0 |
| Middle frequency (2454.90MHz) | | | | | |
| 339.76 | Vertical | --- | 34.42 | 36.59 | 46.0 |
| 2454.92 | Vertical | --- | --- | 85.05 | 94.0 |
| 4909.81 | Vertical | --- | --- | 31.15 | 54.0 |
| 7364.73 | Vertical | --- | --- | 30.26 | 54.0 |
| 9819.60 | Vertical | --- | --- | 33.30 | 54.0 |
| 439.87 | Horizontal | --- | 32.30 | 36.18 | 46.0 |
| 2454.93 | Horizontal | --- | --- | 84.34 | 94.0 |
| 4909.84 | Horizontal | --- | --- | 33.41 | 54.0 |
| 7364.73 | Horizontal | --- | --- | 32.15 | 54.0 |
| 9819.66 | Horizontal | --- | --- | 32.02 | 54.0 |

APPLICANT: Plastoform Industries Ltd.

FCC ID: VL5-RFREMOTE



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: Plastoform Industries Ltd.

FCC ID: VL5-RFREMOTE

NAME OF TEST: RADIATION INTERFERENCE

RULES PART NUMBER: 15.249, 15.209

REQUIREMENTS:

| FIELD STRENGTH of Fundamental: | FIELD STRENGTH of Harmonics | S15.209 |
|--------------------------------|-----------------------------|--|
| 902-928 MHz 2.4-2.4835 GHz | | 30-88 MHz 40 dBuV/m @3m 88-216 MHz 43.5 216-960 MHz 46 |
| 94 dBuV/m @3m | 54 dBuV/m @3m | ABOVE 960 MHz 54dBuV/m |

EMISSIONS RADIATED OUTSIDE OF THE SPECIFIED FREQUENCY BANDS, EXCEPT FOR HARMONICS, SHALL BE ATTENUATED BY AT LEAST 50 Db BELOW THE LEVEL OF THE FUNDAMENTAL OR TO THE GENERAL RADIATED EMISSION LIMITS IN 15.209, WHICHEVER IS THE LESSER ATTENUATION.

REMARK: Emissions attenuated more than 20 dB below the permissible value are not reported.

Continued:

| Frequency (MHz) | Antenna Polarization | Emission Level (dBuV/m) | | | FCC 15 Subpart C Limit(dBuV/m) |
|-----------------------------|-------------------------|-------------------------|-------|-------|-----------------------------------|
| | | Avg | QP | Peak | |
| High frequency (2470.20MHz) | | | | | |
| 341.23 | Vertical | --- | 34.01 | 36.31 | 46.0 |
| 2470.23 | Vertical | --- | --- | 85.70 | 94.0 |
| 4940.42 | Vertical | --- | --- | 34.29 | 54.0 |
| 7410.60 | Vertical | --- | --- | 33.40 | 54.0 |
| 9880.83 | Vertical | --- | --- | 31.30 | 54.0 |
| 456.12 | Horizontal | --- | 32.12 | 35.67 | 46.0 |
| 2470.24 | Horizontal | --- | --- | 83.75 | 94.0 |
| 4940.42 | Horizontal | --- | --- | 33.24 | 54.0 |
| 7410.63 | Horizontal | --- | --- | 33.20 | 54.0 |
| 9880.85 | Horizontal | --- | --- | 31.56 | 54.0 |

Emissions attenuated more than 20 dB below the permissible value are not reported.

TEST PROCEDURE: ANSI Standard C63.4-2003 using a ANRITSU spectrum analyzer with a pre-selector and an appropriate antenna. The resolution bandwidth of spectrum analyzer was 100 kHz below 1 GHz and 1 MHz above 1 GHz. An appropriate sweep speed was used. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The spectrum was searched to at least the tenth (10) harmonic of the fundamental.

APPLICANT: Plastoform Industries Ltd.
FCC ID: VL5-RFREMOTE



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

APPLICANT: Plastoform Industries Ltd.

FCC ID: VL5-RFREMOTE

NAME OF TEST: Occupied Bandwidth and Band Edge Compliance

RULES PART NUMBER: 15.249, 15.209

REQUIREMENTS: The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.209.

Band edge emissions plots are included on the following pages

METHOD OF MEASUREMENT: A small sample of the transmitter output was fed into the Spectrum analyzer and the attached plot was printed. The vertical scale is set to -10 dB per division.

TEST RESULTS: The unit does meet the FCC requirements.


| Band Edge Compliance Test | | | | | | |
|---------------------------|----------------------|-----------|-----------|-------------|---------------------|-------------------|
| Band Edge Frequency | Antenna Polarization | AV dBuV/m | QP dBuV/m | Peak dBuV/m | Limit (Peak) dBuV/m | Limit (AV) dBuV/m |
| 2390.0 MHz | H | 44.08 | --- | 59.09 | 74.00 | 54.00 |
| 2390.0 MHz | V | 42.53 | --- | 56.62 | 74.00 | 54.00 |
| 2483.5 MHz | H | 44.20 | --- | 59.90 | 74.00 | 54.00 |
| 2483.5 MHz | V | 41.16 | --- | 56.23 | 74.00 | 54.00 |

APPLICANT: Plastoform Industries Ltd.
FCC ID: VL5-RFREMOTE



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost.com Email: szmost@szmost.com

Low

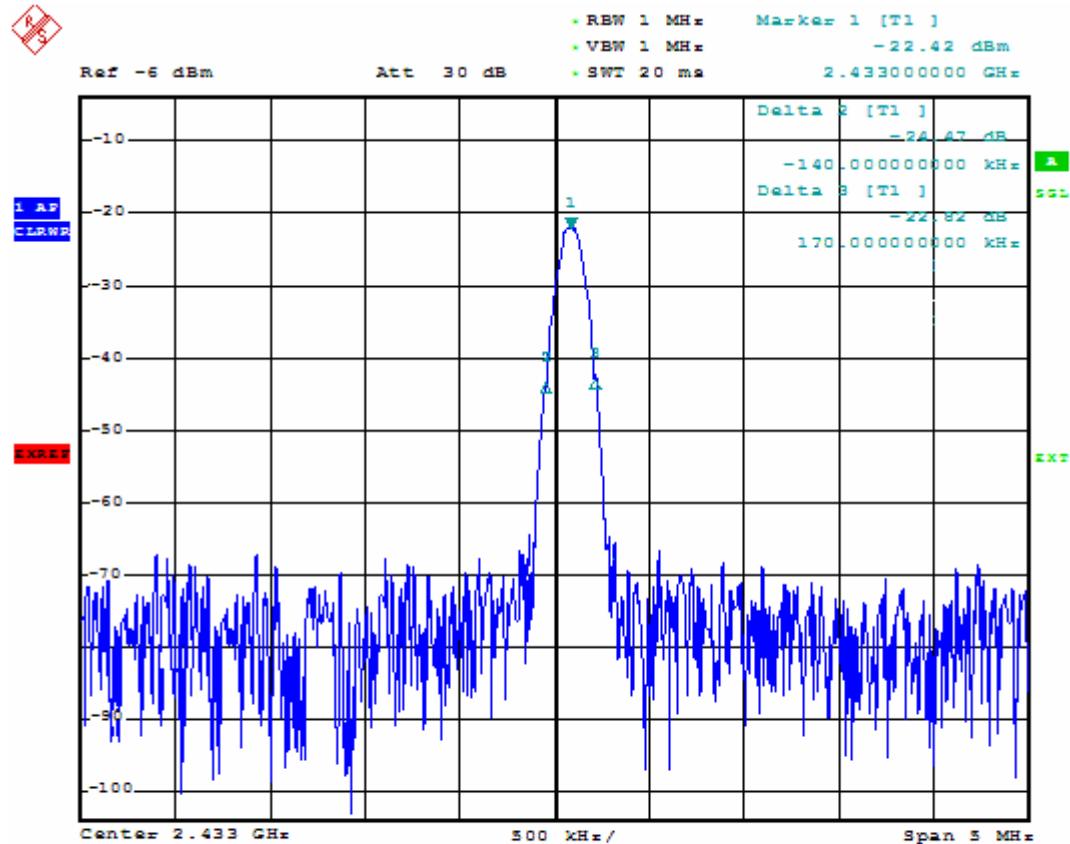

APPLICANT: Plastoform Industries Ltd.
FCC ID: VL5-RFREMOTE




Most Technology Service Co., Ltd.

Tel: (86) 755-26825180 Fax: (86) 755-86170310

Http:// www. szmost. com Email: szmost@szmost. com

Middle

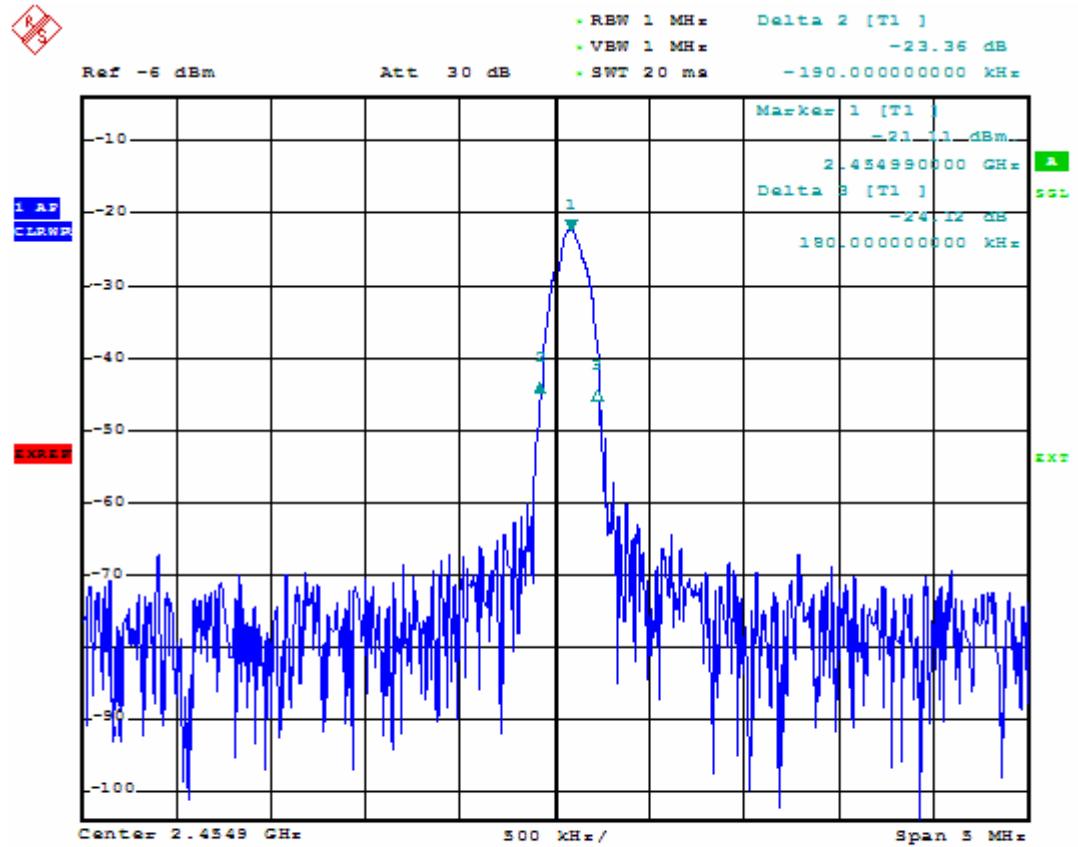


APPLICANT: Plastoform Industries Ltd.

FCC ID: VL5-RFREMOTE



Most Technology Service Co., Ltd.
Tel: (86) 755-26825180 Fax: (86) 755-86170310
Http:// www. szmost. com Email: szmost@szmost. com

High

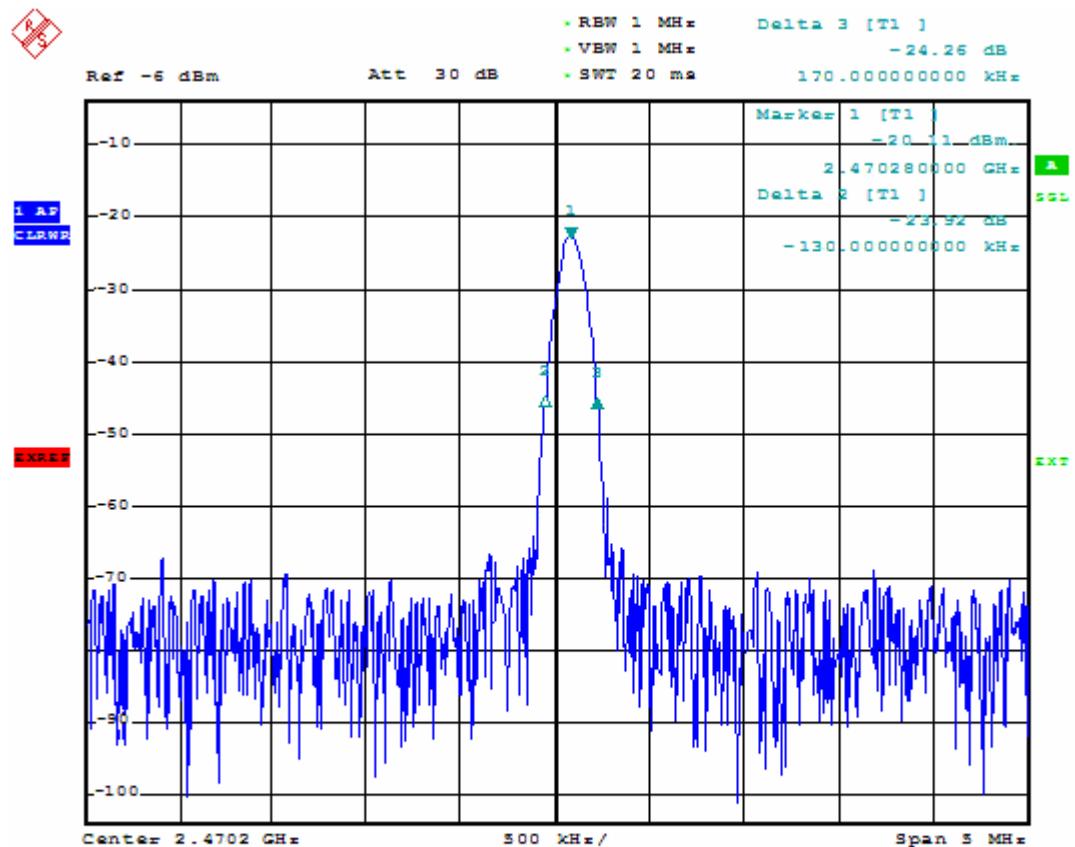

APPLICANT: Plastoform Industries Ltd.
FCC ID: VL5-RFREMOTE