



NVLAP LAB CODE 200707-0



FCC PART 18 MEASUREMENT AND TEST REPORT

For

Suzhou Daming Electric Co., Ltd.

Weixi Village, Weitang Town, Xiangcheng District, Suzhou, China

FCC ID: VL7DM2008122508

Report Type: Original Report	Product Type: Energy Saving Lamp
Test Engineer: <u>Senny Chen</u> <i>Senny Chen</i>	
Report Number: <u>RSH09030351</u>	
Report Date: <u>2009-03-23</u>	
Reviewed By: <u>William Chan</u> <i>William Chan</i>	
Prepared By: <u>EMC Engineer</u>	
Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008	

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by NVLAP*, NIST, or any agency of the Federal Government.

* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk “*” (Rev.2)

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	3
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EQUIPMENT MODIFICATIONS	5
CONFIGURATION OF TEST SETUP	5
BLOCK DIAGRAM OF TEST SETUP	5
CONDUCTED EMISSIONS	6
MEASUREMENT UNCERTAINTY	6
EUT SETUP	6
EMI TEST RECEIVER SETUP.....	7
TEST EQUIPMENT LIST AND DETAILS.....	7
TEST PROCEDURE	7
TEST RESULTS SUMMARY.....	7
TEST DATA	8
PLOT(S) OF TEST DATA.....	9

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

The *Suzhou Daming Electric Co., Ltd.*’s model: *BDS-26*; *BDTS-23*; *BDS-19*, or the “EUT” as referred to in this report is a *Energy Saving Lamp* which measures approximately: *BDS-26*: 13.5 cm L x 5.8 cm W x 5.8 cm H, *BDTS-23*: 12.5 cm L x 5.8 cm W x 5.8 cm H, *BDS-19*: 13.5 cm L x 6.0 cm W x 6.0 cm H, rated input voltage: AC 120V/60Hz.

** All measurement and test data in this report was gathered from production sample serial number: 0903001 (Assigned by BACL, Shenzhen). The EUT was received on 2009-03-03.*

Objective

The following test report is prepared on behalf of *Suzhou Daming Electric Co., Ltd.* in accordance with Part 2, Subpart J, and Part 18, Subparts A, B and C of the Federal Communication Commissions rules and regulations.

The objective of the manufacturer is to determine compliance with FCC Part 18 limits.

Related Submittal(s)/Grant(s)

No related submittal(s).

Test Methodology

All measurements contained in this report were conducted with MP-5, FCC Methods of Measurements of Radio Noise Emissions from ISM Equipment, February 1986. All measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located in the 6/F, the 3rd Phase of WanLi Industrial Building, ShiHua Road, FuTian Free Trade Zone Shenzhen, Guangdong, China.

Test site at Bay Area Compliance Laboratories Corp. (Shenzhen) has been fully described in reports submitted to the Federal Communication Commission (FCC). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on November 21, 2007. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2003.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, Bay Area Compliance Laboratories Corp. (Shenzhen) is a National Institute of Standards and Technology (NIST) accredited laboratory, under the National Voluntary Laboratory Accredited Program (Lab Code 200707-0).



The current scope of accreditations can be found at
<http://ts.nist.gov/Standards/scopes/2007070.htm>

SYSTEM TEST CONFIGURATION


Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Equipment Modifications


No modifications were made to the unit tested.

Configuration of Test Setup



EUT

Block Diagram of Test Setup

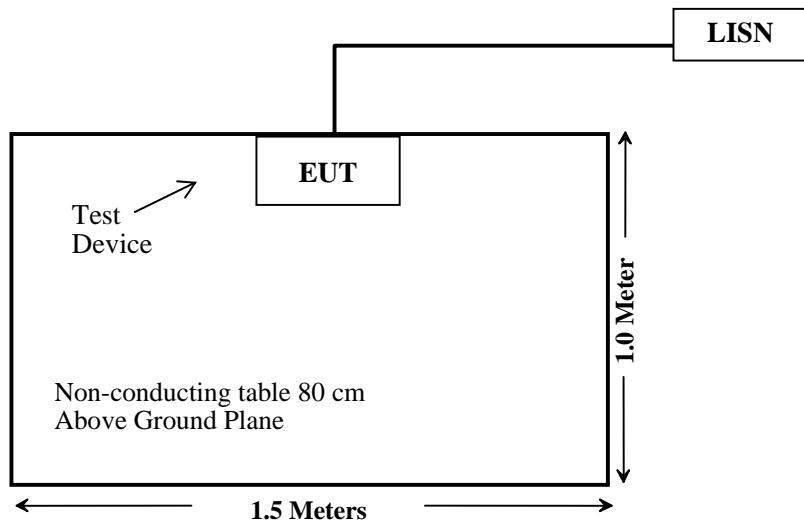


CONDUCTED EMISSIONS

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, and LISN.

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement at Bay Area Compliance Laboratories Corp. (Shenzhen) is ± 2.4 dB.

EUT Setup

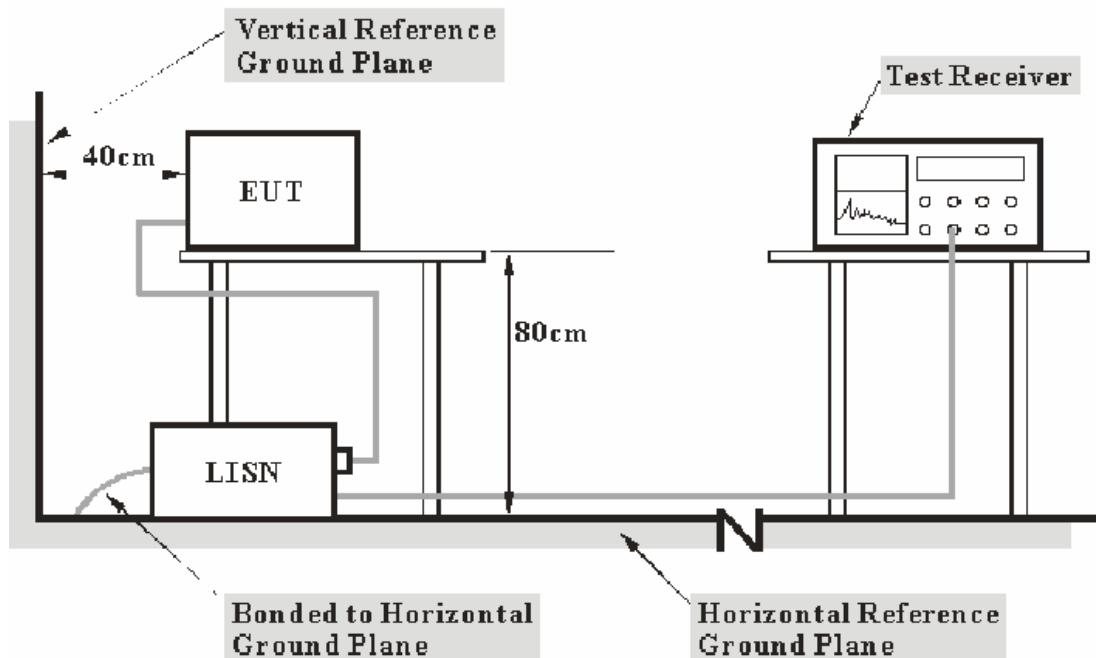

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 30 cm from other units and other metal planes support units.

The setup of EUT is according with MP-5: 1986 measurement procedure. Specification used was with the FCC Part 18 limits.

The EUT was connected to a 120 VAC/ 60Hz power source.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 450 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

<u>Frequency Range</u>	<u>IF B/W</u>
450 kHz – 30 MHz	9 kHz

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Com-Power	L.I.S.N.	LI-200	12005	N/A	N/A
Com-Power	L.I.S.N.	LI-200	12208	N/A	N/A
Rohde & Schwarz	EMI Test Receiver	ESCS30	830245/006	2008-03-25	2009-03-25
Rohde & Schwarz	L.I.S.N.	ESH2-Z5	892107/021	2008-03-25	2009-03-25

* Com-Power's LISN were used as the supporting equipment.

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to NVLAP requirements, traceable to the NIST.

Test Procedure

During the conducted emission test, the EUT power cord was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak detection mode.

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 18, with the worst margin reading of:

BDS-26: 0.30 dB at 0.460 MHz in the **Neutral** conductor mode.

BDTS-23: 1.20 dB at 0.665 MHz in the **Line** conductor mode.

BDS-19: 1.60 dB at 0.575 MHz in the **Line** conductor mode.

Test Data**Environmental Conditions**

Temperature:	25 ° C
Relative Humidity:	56 %
ATM Pressure:	100.0 kPa

Testing was performed by Senny Chen on 2009-03-05 to 2009-03-09.

Model: BDS-26

Line Conducted Emissions				FCC Part 18.307	
Frequency (MHz)	Amplitude (dB μ V)	Detector (PK/QP/AV)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.460	47.70	PK	Neutral	48.00	0.30*
0.555	47.40	PK	Neutral	48.00	0.60*
0.460	47.40	PK	Line	48.00	0.60*
0.645	46.80	PK	Neutral	48.00	1.20v
0.685	46.10	PK	Line	48.00	1.90*
0.550	44.90	PK	Line	48.00	3.10
0.640	44.70	PK	Line	48.00	3.30
0.740	44.60	PK	Neutral	48.00	3.40
0.510	44.00	PK	Line	48.00	4.00
0.830	43.10	PK	Neutral	48.00	4.90
0.790	43.10	PK	Line	48.00	4.90
0.970	42.60	PK	Neutral	48.00	5.40

Model: BDTS-23

Line Conducted Emissions				FCC Part 18.307	
Frequency (MHz)	Amplitude (dB μ V)	Detector (PK/QP/AV)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.665	46.80	PK	Line	48.00	1.20*
1.755	46.60	PK	Line	48.00	1.40*
0.845	46.40	PK	Line	48.00	1.60*
0.665	46.30	PK	Neutral	48.00	1.70*
0.845	46.30	PK	Neutral	48.00	1.70*
0.755	46.00	PK	Neutral	48.00	2.00*
0.935	46.00	PK	Line	48.00	2.00*
0.935	45.30	PK	Neutral	48.00	2.70
1.020	44.60	PK	Line	48.00	3.40
1.110	44.40	PK	Line	48.00	3.60
1.020	44.00	PK	Neutral	48.00	4.00
1.110	42.70	PK	Neutral	48.00	5.30

Model: BDS-19

Line Conducted Emissions				FCC Part 18.307	
Frequency (MHz)	Amplitude (dB μ V)	Detector (PK/QP/AV)	Conductor (Line/Neutral)	Limit (dB μ V)	Margin (dB)
0.575	46.40	PK	Line	48.00	1.60*
0.495	46.30	PK	Neutral	48.00	1.70*
0.575	45.90	PK	Neutral	48.00	2.10*
0.495	45.90	PK	Line	48.00	2.10*
0.740	44.90	PK	Line	48.00	3.10
0.660	44.60	PK	Neutral	48.00	3.40
0.820	44.50	PK	Line	48.00	3.50
0.740	44.40	PK	Neutral	48.00	3.60
0.665	43.70	PK	Line	48.00	4.30
0.825	43.20	PK	Neutral	48.00	4.80
0.985	42.90	PK	Line	48.00	5.10
0.990	42.10	PK	Neutral	48.00	5.90

* Within measurement uncertainty.

Plot(s) of Test Data

Plot(s) of Test Data is presented hereinafter as reference.


Model: BDS-26

Conducted emission

07. Mar 09 13:26

Fcc Part 18


EUT: Energy Saving Lamp M/N: BDS-26
Manuf: Daming
Op Cond: On
Operator: Benny
Test Spec: AC 120V/60Hz L
Comment: Temp: 25 Hum: 56%
BACL

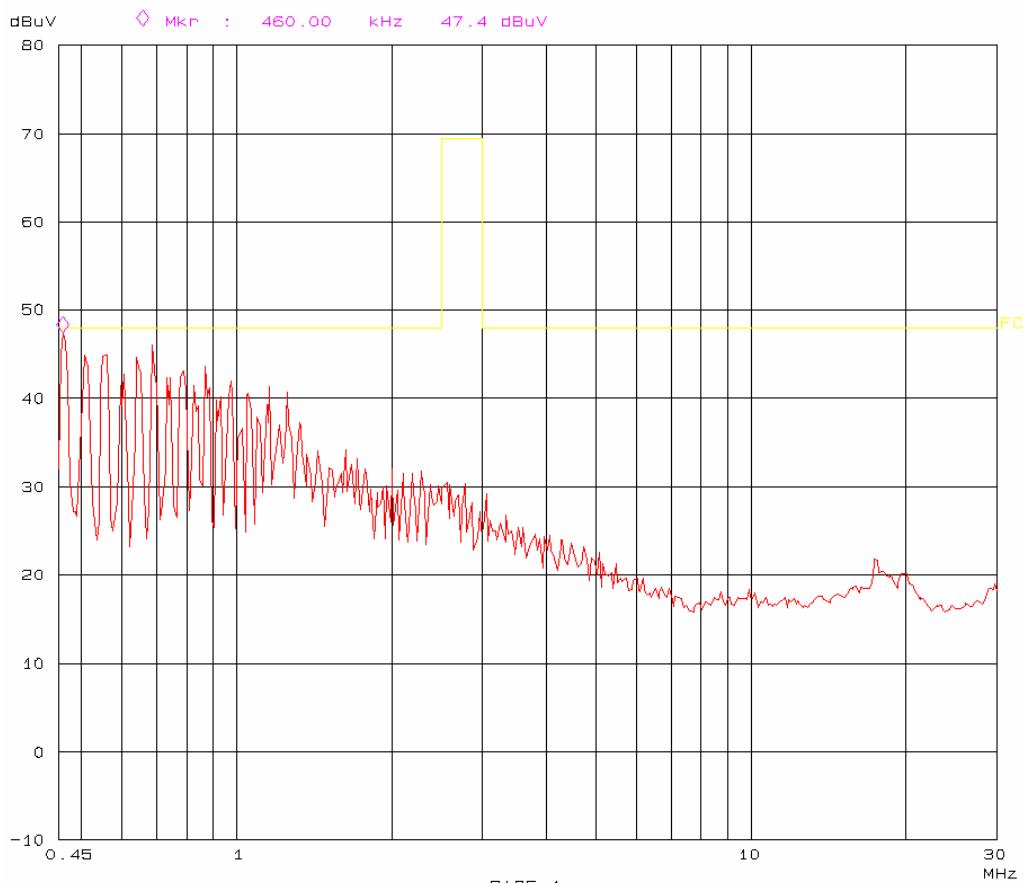

Conducted emission
Fcc Part 18

07. Mar 09 11:39

EUT: Energy Saving Lamp M/N: BDS-26
Manuf: Daming
Op Cond: On
Operator: Benny
Test Spec: AC 120V/60Hz N
Comment: Temp: 25 Hum: 56%
BACL

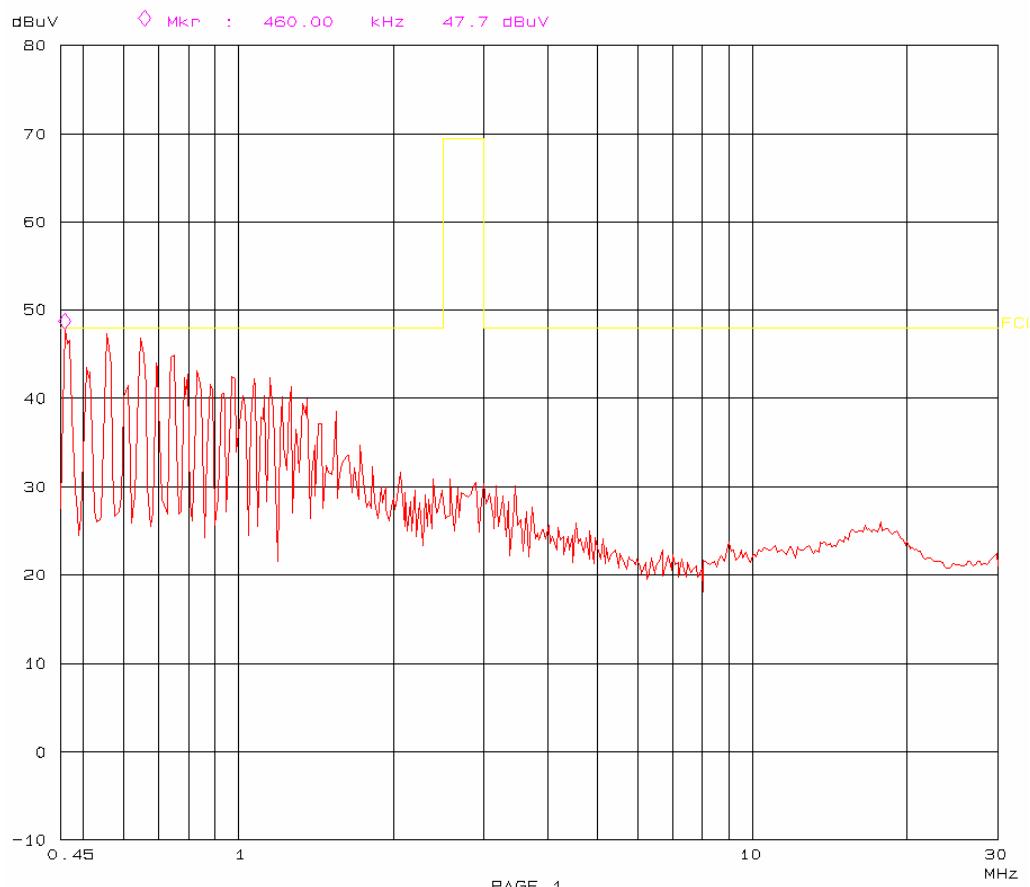


Model: BDTS-23

Conducted emission

05. Mar 09 20:03

FCC PART18


EUT: Energy saving lamp M/N: BDTS-23
Manuf: Suzhou Daming Electric Co., Ltd
Op Cond: On
Operator: Benny
Test Spec: AC 120V/60Hz L
Comment: Temp: 25 Hum: 56%
BACL

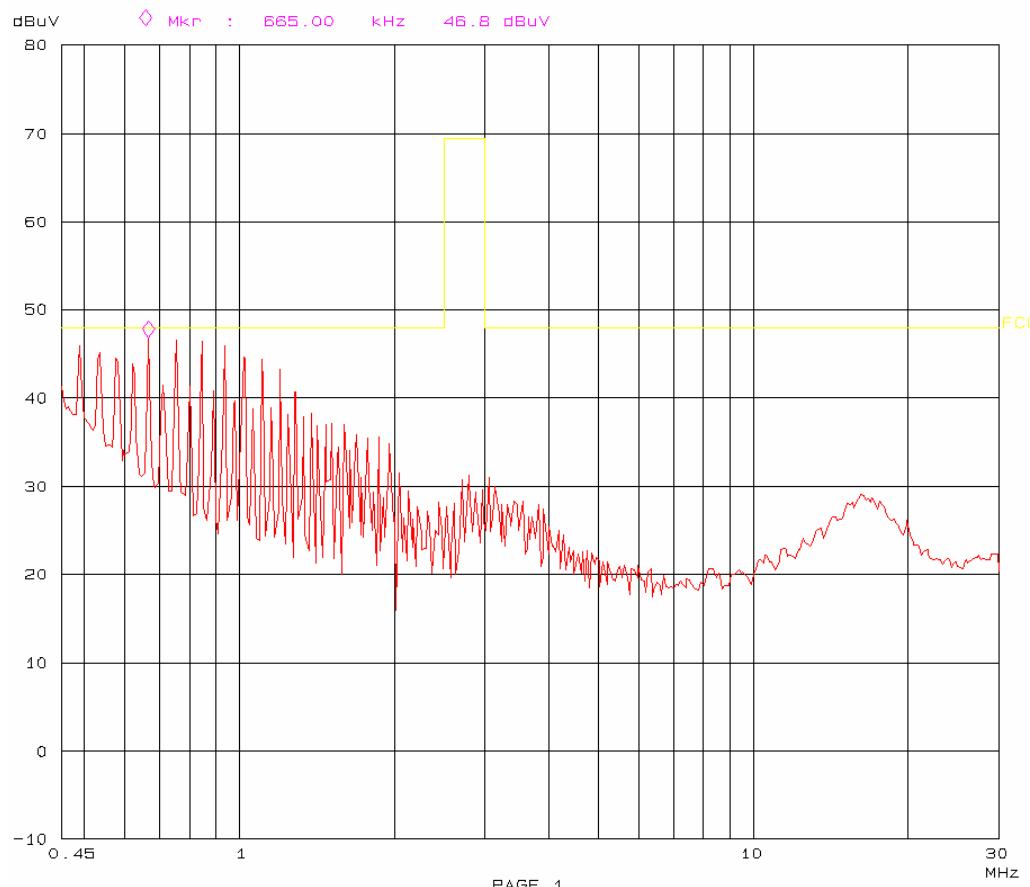

Conducted emission
FCC PART18

05. Mar 09 21:40

EUT: Energy saving lamp M/N: BDTS-23
Manuf: Suzhou Daming Electric Co., Ltd
Op Cond: On
Operator: Benny
Test Spec: AC 120V/60Hz N
Comment: Temp: 25 Hum: 56%
BACL

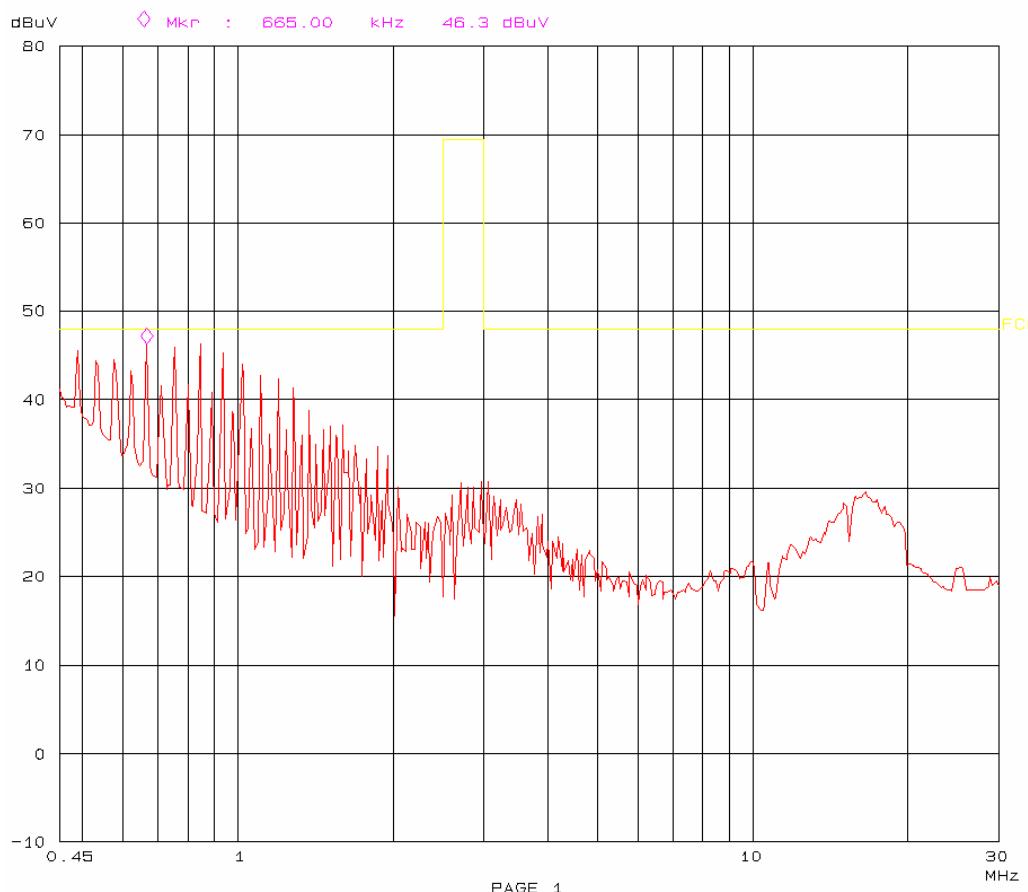


Model: BDS-19

Conducted emission
FCC Part 18

09. Mar 09 20:54


EUT: Energy Saving Lamp M/N: BDS-19
Manuf: Suzhou Daming Electric
Op Cond: Running
Operator: Senny
Test Spec: AC 120V/60Hz L
Comment: Temp: 25 Hum: 56%
BACL

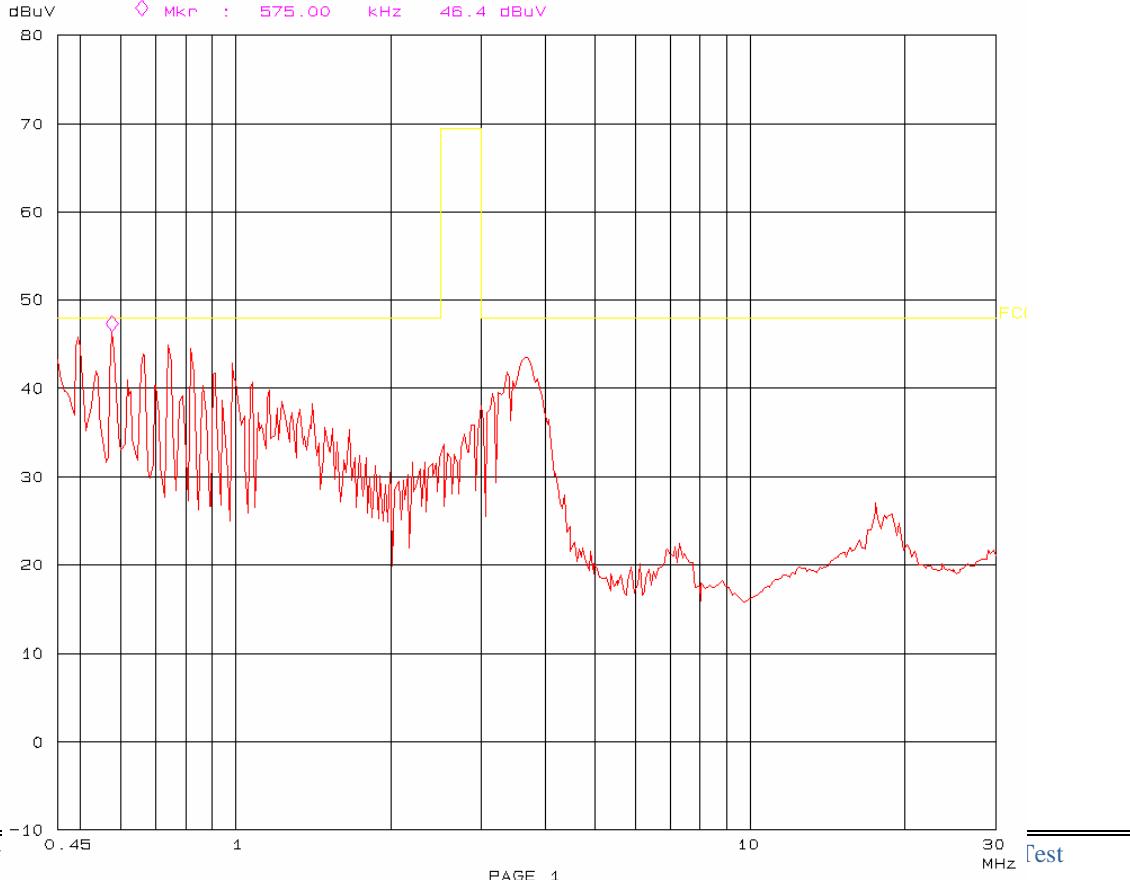

Conducted emission
FCC Part 18

09. Mar 09 18:47

EUT: Energy Saving Lamp M/N: BDS-19
Manuf: Suzhou Daming Electric
Op Cond: Running
Operator: Senny
Test Spec: AC 120V/60Hz N
Comment: Temp: 25 Hum: 56%
BACL

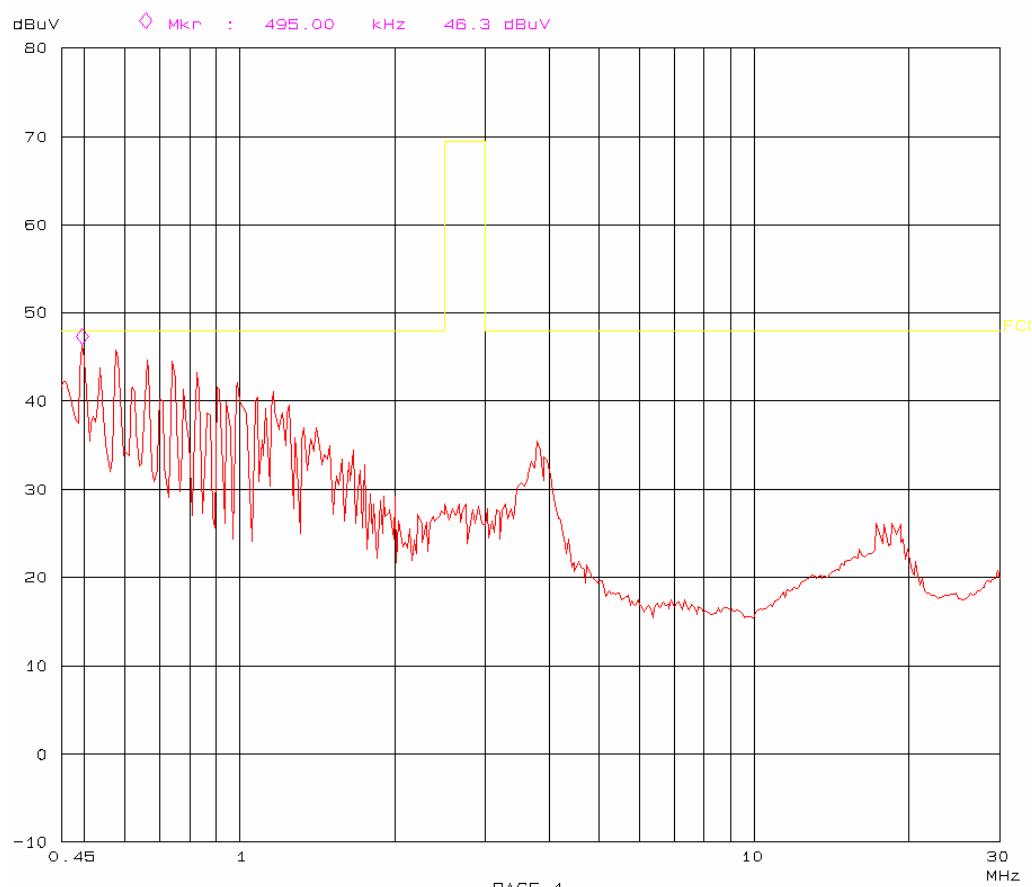

***** END OF REPORT *****