



FCC 47 CFR PART 15 SUBPART C AND ANSI C63.4 : 2003

TEST REPORT

For

RFID Tag

Model : SYTAG245-2K-V

Data Applies To : SYTAG245-2K ; SYTAG245-2S ; SYTAG245-2S-V

Trade Name : SYRIS

Issued for

SYRIS Technology Corp.

**21F-2, NO. 12, Sec. 1, Taijunggang Rd.
Taichung city, Taiwan (403)**

Issued by

Compliance Certification Services Inc.

Hsinchu Lab.

Rm. 258, Bldg. 17, NO.195, Sec.4 Chung Hsing Rd.,
ChuTung Chen, Hsinchu, Taiwan 310, R.O.C

TEL: (03) 591-0068

FAX: (03) 582-5720



Testing Laboratory
0240



NVLAP LAB CODE 200118-0

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

TITLE	PAGE NO.
1. TEST REPORT CERTIFICATION.....	3
2. EUT DESCRIPTION.....	4
2.1 DESCRIPTION OF EUT & POWER.....	4
3. DESCRIPTION OF TEST MODES.....	5
4. TEST METHODOLOGY.....	5
5. FACILITIES AND ACCREDITATIONS.....	5
5.1 FACILITIES	5
5.2 EQUIPMENT.....	5
5.3 LABORATORY ACCREDITATIONS LISTINGS.....	6
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	6
6. CALIBRATION AND UNCERTAINTY.....	7
6.1 MEASURING INSTRUMENT CALIBRATION.....	7
6.2 MEASUREMENT UNCERTAINTY.....	7
7. SETUP OF EQUIPMENT UNDER TEST.....	8
8. APPLICABLE LIMITS AND TEST RESULTS	9
8.1 DUTY CYCLE CORRECTION FACTOR	9-10
8.2 RADIATED EMISSIONS	11
8.2.1 TRANSMITTER RADIATED SUPURIOUS EMISSIONS.....	11-14
8.2.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz	15
8.2.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz.....	16-18
8.2.4 RESTRICTED BAND EDGES.....	19-22
8.3 POWERLINE CONDUCTED EMISSIONS	23-24
9. ANTENNA REQUIREMENT	25
9.1 STANDARD APPLICABLE.....	25
9.2 ANTENNA CONNECTED CONSTRUCTION.....	25
APPENDIX SETUP PHOTOS.....	26-30



1. TEST REPORT CERTIFICATION

Applicant : SYRIS Technology Corp.

Address : 21F-2, NO. 12, Sec. 1, Taijunggang Rd.
Taichung city, Taiwan (403)

Equipment Under Test : RFID Tag

Model : SYTAG245-2K-V

Data Applies To : SYTAG245-2K ; SYTAG245-2S ; SYTAG245-2S-V

Tested Date : December 25, 2007 ~ January 18, 2008

APPLICABLE STANDARD	
STANDARD	TEST RESULT
FCC Part 15 Subpart C:2006 AND ANSI C63.4:2003	No non-compliance noted

Approved by:

C. F. Wu

C. F. Wu
Manager of Hsinchu Laboratory
Compliance Certification Services Inc.

Reviewed by:

S. B. Lu

S. B. Lu
Test Engineer of Hsinchu Laboratory
Compliance Certification Services Inc.



WE HEREBY CERTIFY THAT: The measurements shown in the attachment were made in accordance with the procedures indicated, and the energy emitted by the equipment was found to be within the limits applicable. We assume full responsibility for the accuracy and completeness of these measurements and vouch for the qualifications of all persons taking them.



2. EUT DESCRIPTION

2.1 DESCRIPTION OF EUT & POWER

Product Name	RFID Tag
Model Number	SYTAG245-2K-V
Data Applies To	SYTAG245-2K ; SYTAG245-2S ; SYTAG245-2S-V
Frequency Range	2401.4MHz to 2480.18MHz $f = 2401.4 + n\text{MHz}$, $n = 62, \dots, 377$
Channel Spacing	0.25MHz
Channel Number	316 Channels
Transmit Data Rate	250 kbps
Type of Modulation	MSK / GFSK
Frequency Selection	by software / firmware
Antenna Type	Chip Antenna, Antenna Gain : 2dBi
Power Source	3VDC (From Newsun Lithium Battery Powered) Model No : CR2032

The difference of the series model

Mode Number	Difference
SYTAG245-2K	Square case, Call button, LED visual indication, No motion sensor
SYTAG245-2K-V	Square case, Call button, LED visual indication, Built-in motion sensor
SYTAG245-2S	Square case with rounded edges, No button, No LED visual indication, No motion sensor
SYTAG245-2S-V	Square case with rounded edges, No button, No LED visual indication, Built-in motion sensor

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: VLD-SYTAG245-2K filing to comply with Section 15.207, 15.209 and 15.249 of the FCC Part 15, Subpart C Rules.
3. For more details, please refer to the User's manual of the EUT.



3. DESCRIPTION OF TEST MODES

The EUT had been tested under operating condition.

There are three channels have been tested as following :

Channel	Frequency (MHz)
Low	2401.40
Middle	2440.89
High	2480.18

Note : The field strength of spurious emission was measured in the following position: EUT stand-up position(Z axis), lie-down position(X,Y axis). The worst emission was found in lie-down position(Z axis) and the worst case was recorded.

4. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CRF 47 2.1046, 2046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.249.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at Rm.258, Bldg.17, NO.195 , Sec. 4, Chung Hsing Rd., Chu-Tung Chen. Hsin-Chu, Taiwan 310 R.O.C.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



5.3 LABORATORY ACCREDITATIONS LISTINGS

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code: 200118-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (registration no: 90585 and 90584).

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	NVLAP	EN 55014-1, AS/NZS 1044, CNS 13783-1, IEC/CISPR 14-1, IEC/CISPR 22, EN 55022, EN 61000-3-2, EN 61000-3-3, ANSI C63.4, AS/NZS CISPR 22, AS/NZS 3548, IEC 61000-4-2/3/4/5/6/8/11	 200118-0
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 90585, 90584
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	 R-1229/1189 C-1250/1294
Taiwan	TAF	FCC Method-47 CFR Part 15 Subpart C,D,E CISPR 11, FCC METHOD-47 CFR Part 18, EN 55011, CNS 13803, CISPR 13, CNS 13439, FCC Method-47 CFR Part 15 Subpart B, CISPR 14-1, EN 55014-1, CNS 13783-1, EN 55015, CNS 14115, CISPR 22, EN 55022, VCCI CNS 13438, EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 0240
Taiwan	BSMI	CNS 13803, CNS 13438, CNS 13439, CNS 13783-1, CNS 14115	 SL2-IS-E-0002 SL2-IN-E-0002 SL2-A1-E-0002 SL2-R1-E-0002 SL2-R2-E-0002 SL2-L1-E-0002
Canada	Industry Canada	RSS-GEN Issue 2	

* No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government.



6. CALIBRATION AND UNCERTAINTY

6.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

6.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 1000 MHz	+/- 3.2 dB
Radiated Emission, 1 to 26.5 GHz	+/- 3.2 dB
Power Line Conducted Emission	+/- 2.1 dB

Uncertainty figures are valid to a confidence level of 95%



7. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

No.	Product	Manufacturer	Model No.	Serial No.	FCC ID
1	Notebook PC	HP	nx6130	CNU543274R	DoC
2	Reader	SYRIS	SYRD245-1N	07219001	-----
3	USB-Debug-Interface	TEXAS	MSP-FET430UIF	-----	-----

SETUP DIAGRAM FOR TESTS

EUT & peripherals setup diagram is shown in appendix setup photos.

EUT OPERATING CONDITION

1. Setup all computers like the setup diagram.
2. Open Lite FET-pro430 Elprotronic(FET MSP430 Flash Programmer)
3. TX mode
 - Open code file
 - Select Low/Middle/High
 - (1) 2K-TX_62.txt (2041.4MHz)
 - (2) 2K-TX_220.txt (2440.89MHz)
 - (3) 2K-TX_377.txt (2480.18MHz)
 - Run AUTO PROG.
4. RX mode
 - Open code file
 - Select Select Low/Middle/High
 - (1) 2K-RX_62.txt (2041.4MHz)
 - (2) 2K-RX_220.txt (2440.89MHz)
 - (3) 2K-RX_377.txt (2480.18MHz)
 - Run AUTO PROG.
5. All of the functions are under run.
6. Start test.



8. APPLICABLE LIMITS AND TEST RESULTS

8.1 DUTY CYCLE CORRECTION FACTOR

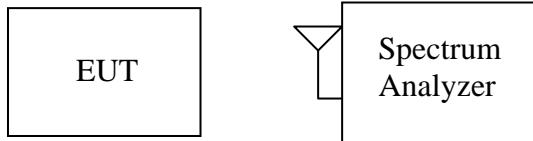
LIMIT

Nil (No dedicated limit specified in the Rules)

TEST EQUIPMENTS

Description & Manufacturer	Model No.	Serial No.	Date of Calibration
ROHDE & SCHWARZ SPECTRUM ANALYZER	FSEK30	835253/002	October 25, 2007
AGILENT SPECTRUM ANALYZER	E4446A	MY433601.32	June 06, 2007

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set center frequency of spectrum analyzer = operating frequency.
4. Set the spectrum analyzer as RBW, VBW=1MHz, Span = 0Hz.
5. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

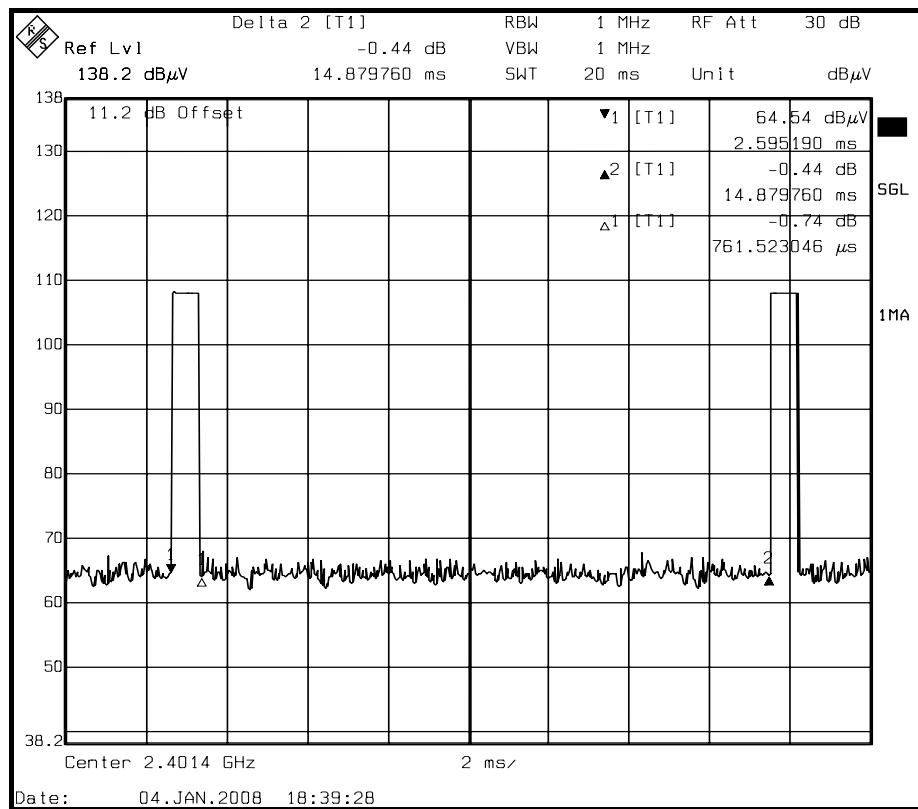
No non-compliance noted

Test Data

T_p = 14.87 (ms)

T_{on} = 0.761 (ms)

$$\begin{aligned} \text{Duty Cycle Correction Factor} &= 20 * \log (T_{on} / T_p) \\ &= 20 * \log (0.761 / 14.87) = -25.81 < -20 \\ &= -20 \text{ dB} \end{aligned}$$

**Test Plot**



8.2 RADIATED EMISSIONS

8.2.1 TRANSMITTER RADIATED SUPURIOUS EMISSIONS

LIMITS

§ 15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3338	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§ 15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



In The section 15.249 (a) :

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following :

Fundamental Frequency (MHz)	Field Strength of Fundamental Field St (microvolts/meter)	Measurement Distance (meters)
902 – 928	50	500
2400 – 2483.5	50	500
5725 – 5875	50	500
24000 – 24250	250	2500

§ 15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table :

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz, However, operation within these frequency bands is permitted under other sections of this Part, e-g, Sections 15.231 and 15.241.

§ 15.209 (b) In the emission table above, the tighter limit applies at the band edges.


TEST EQUIPMENT

The following test equipment is utilized in making the measurements contained in this report.


Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
CHASE BILOG ANTENNA	CBL6112B	2817	December 21, 2007	1 Year	FINAL
R/S SPECTRUM ANALYZER	FSEK30	835253/002	October 25, 2007	1 Year	FINAL
AGILENT SPECTRUM ANALYZER	E4446A	MY433601.32	June 06, 2007	1 Year	FINAL
R/S EMI TEST RECEIVER	ESCS30	835418/008	October 16, 2007	1 Year	FINAL
OPEN SITE	-----	No.2	May 07, 2007	1 Year	FINAL
MIYAZAKI N TYPE COAXIAL CABLE	8D-FB	02	May 16, 2007	1 Year	FINAL
Horn Antenna	AH-118	10089	October 18, 2007	1 Year	FINAL
Horn Antenna	AH-840	03077	February 25, 2007	1 Year	FINAL
Agilent Pre-amplifier	8449B	3008A01471	December 20, 2007	1 Year	FINAL
HP Amplifier	8447D	1937A02748	December 24, 2007	1 Year	FINAL
HP High pass filter	84300/80038	002	CAL. ON USE	1 Year	FINAL
HP High pass filter	84300/80039	003	CAL. ON USE	1 Year	FINAL
Loop Antenna ETS-LINDGREN	6502	2356	June 15, 2007	1 Year	FINAL

TEST SETUP

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 to 1GHz.

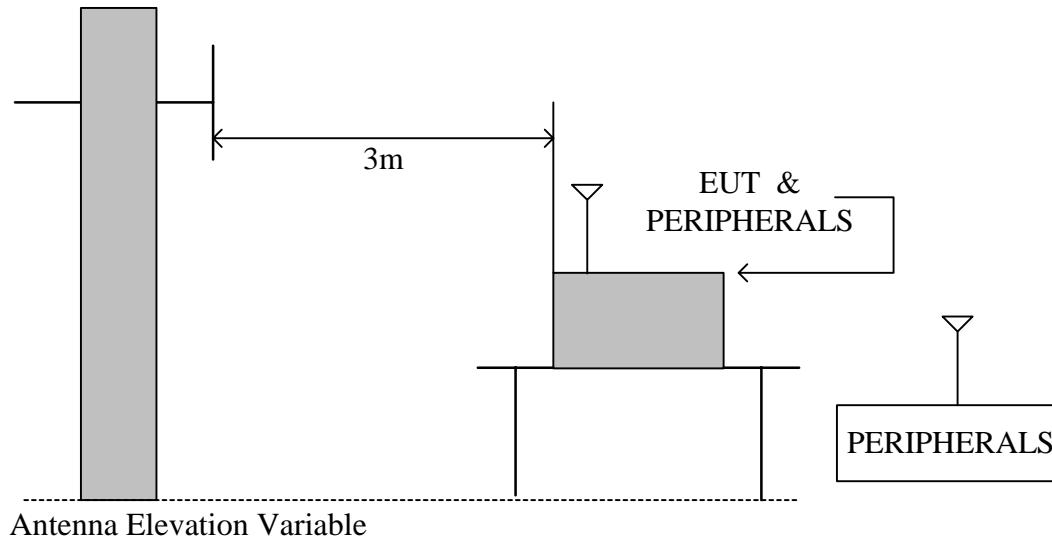

The diagram below shows the test setup that is utilized to make the measurements for emission above 1GHz.

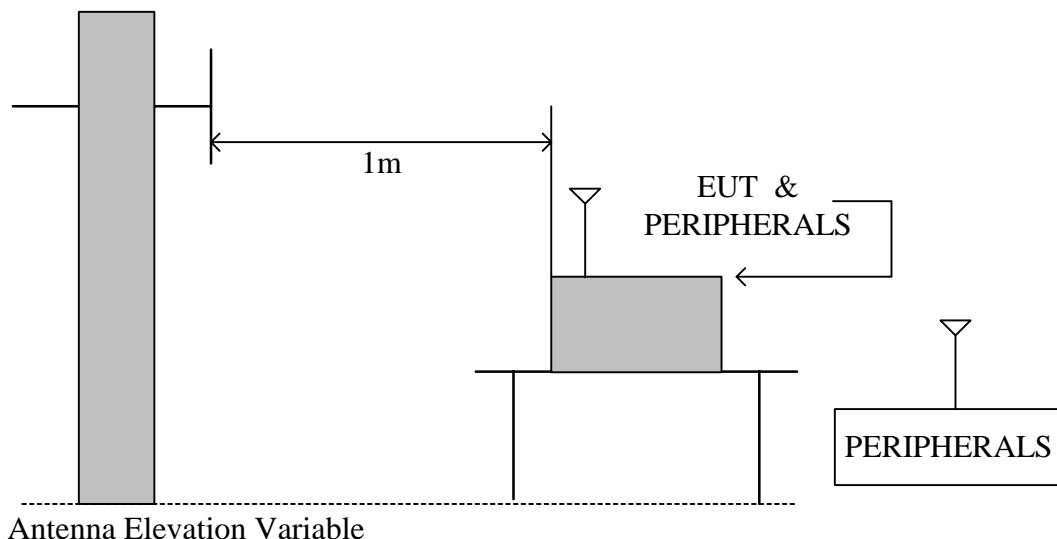



TEST PROCEDURE

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. While measuring the radiated emission below 1GHz, the EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. While measuring the radiated emission above 1GHz, the EUT was set 1 meters away from the interference-receiving antenna
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note :

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 KHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection and frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

TEST RESULTS

No non-compliance noted



8.2.2 WORST-CASE RADIATED EMISSION BELOW 1 GHz

Product Name	RFID Tag		Test Date	2008/01/12
Model	SYTAG245-2K-V		Test By	Gundam Lin
Test Mode	Normal operating		TEMP & Humidity	30°C, 67%

Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading at 3m(dB μ V)		Limits (dB μ V/m)	Emission Level at 3m(dB μ V/m)	
			Horizontal	Vertical		Horizontal	Vertical
35.82	16.29	0.87	12.80	13.60	40.00	29.96	30.76
108.77	12.00	1.50	13.10	15.80	43.50	26.60	29.30
223.99	11.30	2.04	9.80	11.50	46.00	23.13	24.83
250.00	12.70	2.16	15.70	16.80	46.00	30.56	31.66
399.98	16.70	2.81	10.50	13.70	46.00	30.01	33.21
599.99	18.90	3.55	9.80	10.20	46.00	32.25	32.65
751.59	20.22	4.06	8.20	9.50	46.00	32.47	33.77
851.59	21.16	4.34	7.60	9.20	46.00	33.10	34.70

Remark: Emission level (dB μ V/m) =Antenna Factor (dB/m) + Cable loss (dB) + Meter Reading (dB μ V).



8.2.3 TRANSMITTER RADIATED EMISSION ABOVE 1 GHz

Product Name	RFID Tag				Test Date		2007/12/25		
Model	SYTAG245-2K-V				Test By		Gundam Lin		
Test Mode	TX (CH Low)				TEMP & Humidity		24 , 72%		

Measurement Distance at 1m Horizontal polarity											
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2401.40	60.76	30.16	4.85	0.00	9.50	0.00	86.27	114.00	-27.73	P	1.00
2401.40	---	30.16	4.85	0.00	9.50	0.00	66.27	94.00	-27.73	A	1.00
4802.56	55.69	34.48	6.32	36.59	9.50	0.37	50.77	74.00	-23.23	P	1.00
4802.56	---	34.48	6.32	36.59	9.50	0.37	30.77	54.00	-23.23	A	1.00
7204.42	53.99	39.50	8.26	36.82	9.50	0.93	56.37	74.00	-17.63	P	1.00
7204.42	---	39.50	8.26	36.82	9.50	0.93	36.37	54.00	-17.63	A	1.00
9605.60	48.66	40.42	9.27	37.46	9.50	0.53	51.91	74.00	-22.09	P	1.00
9605.60	---	40.42	9.27	37.46	9.50	0.53	31.91	54.00	-22.09	A	1.00
12007.00	46.52	41.71	10.58	36.58	9.50	0.45	53.18	74.00	-20.82	P	1.00
12007.00	---	41.71	10.58	36.58	9.50	0.45	33.18	54.00	-20.82	A	1.00

Measurement Distance at 1m Vertical polarity											
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2401.40	60.56	30.16	4.85	0.00	9.50	0.00	86.07	114.00	-27.93	P	1.00
2401.40	---	30.16	4.85	0.00	9.50	0.00	66.07	94.00	-27.93	A	1.00
4802.56	50.93	34.48	6.32	36.59	9.50	0.37	46.01	74.00	-27.99	P	1.00
4802.56	---	34.48	6.32	36.59	9.50	0.37	26.01	54.00	-27.99	A	1.00
7204.42	52.35	39.50	8.26	36.82	9.50	0.93	54.73	74.00	-19.27	P	1.00
7204.42	---	39.50	8.26	36.82	9.50	0.93	34.73	54.00	-19.27	A	1.00
9605.60	47.68	40.42	9.27	37.46	9.50	0.53	50.93	74.00	-23.07	P	1.00
9605.60	---	40.42	9.27	37.46	9.50	0.53	30.93	54.00	-23.07	A	1.00
12007.00	47.00	41.71	10.58	36.58	9.50	0.45	53.66	74.00	-20.34	P	1.00
12007.00	---	41.71	10.58	36.58	9.50	0.45	33.66	54.00	-20.34	A	1.00

Remark:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
 2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz

3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB

4. The result basic equation calculation is as follow:

Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level-Limit

5. The other emission levels were 20dB below the limit

6. The test limit distance is 3M limit.

7. For Fundamental & Harmonics: Average Level = Peak Level + Duty Cycle Factor



Product Name	RFID Tag	Test Date	2007/12/25
Model	SYTAG245-2K-V	Test By	Gundam Lin
Test Mode	TX (CH Middle)	TEMP & Humidity	24 , 72%

Measurement Distance at 1m Horizontal polarity											
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2440.89	59.80	30.14	4.89	0.00	9.50	0.00	85.33	114.00	-28.67	P	1.00
2440.89	---	30.14	4.89	0.00	9.50	0.00	65.33	94.00	-28.67	A	1.00
4881.85	58.41	34.61	6.32	36.61	9.50	0.29	53.52	74.00	-20.48	P	1.00
4881.85	---	34.61	6.32	36.61	9.50	0.29	33.52	54.00	-20.48	A	1.00
7322.69	56.97	39.62	8.30	36.94	9.50	0.82	59.28	74.00	-14.72	P	1.00
7322.69	---	39.62	8.30	36.94	9.50	0.82	39.28	54.00	-14.72	A	1.00
9764.36	51.80	40.29	9.57	37.59	9.50	0.58	55.15	74.00	-18.85	P	1.00
9764.36	---	40.29	9.57	37.59	9.50	0.58	35.15	54.00	-18.85	A	1.00
12204.45	46.25	42.03	10.52	36.48	9.50	0.38	53.20	74.00	-20.80	P	1.00
12204.45	---	42.03	10.52	36.48	9.50	0.38	33.20	54.00	-20.80	A	1.00

Measurement Distance at 1m Vertical polarity											
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2440.89	61.19	30.14	4.89	0.00	9.50	0.00	86.72	114.00	-27.28	P	1.00
2440.89	---	30.14	4.89	0.00	9.50	0.00	66.72	94.00	-27.28	A	1.00
4881.85	57.34	34.61	6.32	36.61	9.50	0.29	52.45	74.00	-21.55	P	1.00
4881.85	---	34.61	6.32	36.61	9.50	0.29	32.45	54.00	-21.55	A	1.00
7322.69	53.49	39.62	8.30	36.94	9.50	0.82	55.80	74.00	-18.20	P	1.00
7322.69	---	39.62	8.30	36.94	9.50	0.82	35.80	54.00	-18.20	A	1.00
9764.36	49.90	40.29	9.57	37.59	9.50	0.58	53.25	74.00	-20.75	P	1.00
9764.36	---	40.29	9.57	37.59	9.50	0.58	33.25	54.00	-20.75	A	1.00
12204.45	46.80	42.03	10.52	36.48	9.50	0.38	53.75	74.00	-20.25	P	1.00
12204.45	---	42.03	10.52	36.48	9.50	0.38	33.75	54.00	-20.25	A	1.00

Remark:

1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Fundamental & Harmonics: Average Level = Peak Level + Duty Cycle Factor



Product Name	RFID Tag	Test Date	2007/12/25
Model	SYTAG245-2K-V	Test By	Gundam Lin
Test Mode	TX (CH High)	TEMP & Humidity	24 , 72%

Measurement Distance at 1m Horizontal polarity											
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2480.18	59.92	30.11	4.94	0.00	9.50	0.00	85.47	114.00	-28.53	P	1.00
2480.18	---	30.11	4.94	0.00	9.50	0.00	65.47	94.00	-28.53	A	1.00
4960.06	59.89	34.74	6.32	36.63	9.50	0.21	55.03	74.00	-18.97	P	1.00
4960.06	---	34.74	6.32	36.63	9.50	0.21	35.03	54.00	-18.97	A	1.00
7440.07	53.34	39.74	8.35	37.07	9.50	0.72	55.58	74.00	-18.42	P	1.00
7440.07	---	39.74	8.35	37.07	9.50	0.72	35.58	54.00	-18.42	A	1.00
9920.06	48.70	40.16	9.87	37.72	9.50	0.63	52.15	74.00	-21.85	P	1.00
9920.06	---	40.16	9.87	37.72	9.50	0.63	32.15	54.00	-21.85	A	1.00
12400.90	47.03	42.34	10.46	36.39	9.50	0.32	54.27	74.00	-19.73	P	1.00
12400.90	---	42.34	10.46	36.39	9.50	0.32	34.27	54.00	-19.73	A	1.00

Measurement Distance at 1m Vertical polarity											
Freq. (MHz)	Reading (dB μ V)	AF (dB μ V)	Cable (dB)	Pre-amp (dB)	Dist (dB)	Filter (dB)	Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Mark (P/Q/A)	Height (Meter)
2480.18	60.94	30.11	4.94	0.00	9.50	0.00	86.49	114.00	-27.51	P	1.00
2480.18	---	30.11	4.94	0.00	9.50	0.00	66.49	94.00	-27.51	A	1.00
4960.06	61.36	34.74	6.32	36.63	9.50	0.21	56.50	74.00	-17.50	P	1.00
4960.06	---	34.74	6.32	36.63	9.50	0.21	36.50	54.00	-17.50	A	1.00
7440.07	52.24	39.74	8.35	37.07	9.50	0.72	54.48	74.00	-19.52	P	1.00
7440.07	---	39.74	8.35	37.07	9.50	0.72	34.48	54.00	-19.52	A	1.00
9920.06	48.82	40.16	9.87	37.72	9.50	0.63	52.27	74.00	-21.73	P	1.00
9920.06	---	40.16	9.87	37.72	9.50	0.63	32.27	54.00	-21.73	A	1.00
12400.90	47.71	42.34	10.46	36.39	9.50	0.32	54.95	74.00	-19.05	P	1.00
12400.90	---	42.34	10.46	36.39	9.50	0.32	34.95	54.00	-19.05	A	1.00

Remark:

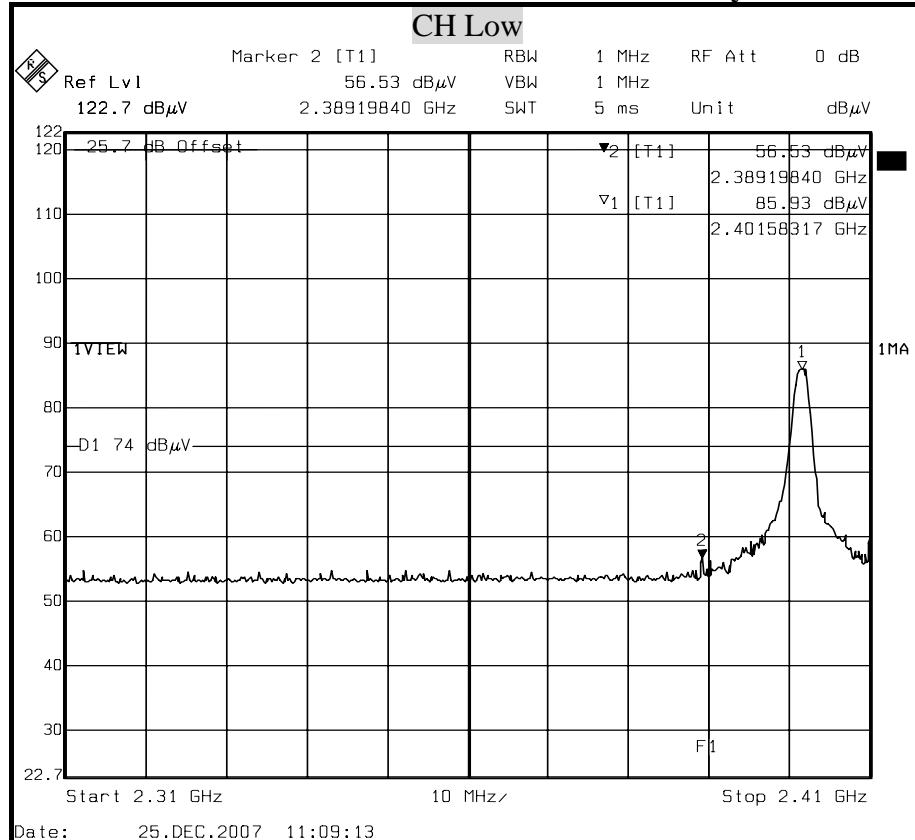
1. AF: Antenna Factor, Cable: Cable Loss, Pre-Amp: Preamplifier gain, Filter: High Pass Filter Insertion Loss (3.5GHz)
2. Spectrum analyzer setting P(Peak): RBW=1MHz, VBW=1MHz, A(Average): RBW=1MHz, VBW=10Hz
3. Dist : correction to extra plate reading to 3m specification distance 1m measurement distance = -9.5dB
4. The result basic equation calculation is as follow:

$$\text{Level} = \text{Reading} + \text{AF} + \text{Cable} - \text{Preamp} + \text{Filter} - \text{Dist}, \text{Margin} = \text{Level} - \text{Limit}$$
5. The other emission levels were 20dB below the limit
6. The test limit distance is 3M limit.
7. For Fundamental & Harmonics: Average Level = Peak Level + Duty Cycle Factor

8.2.4 RESTRICTED BAND EDGES


Detector mode : Peak



Polarity : Horizontal







Detector mode : Average

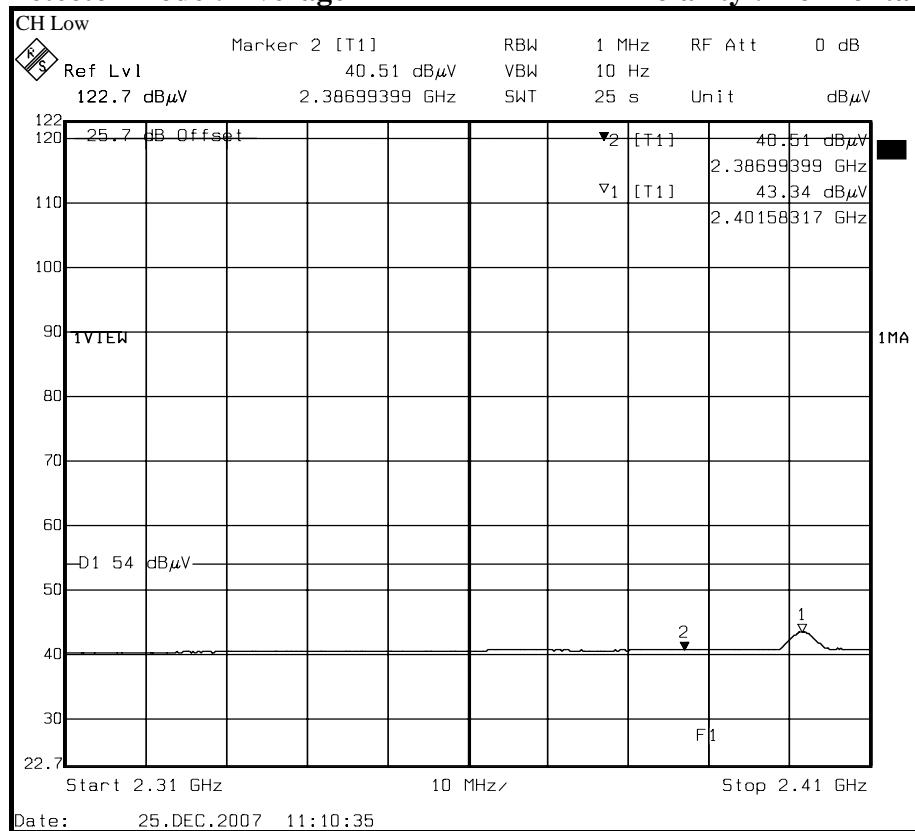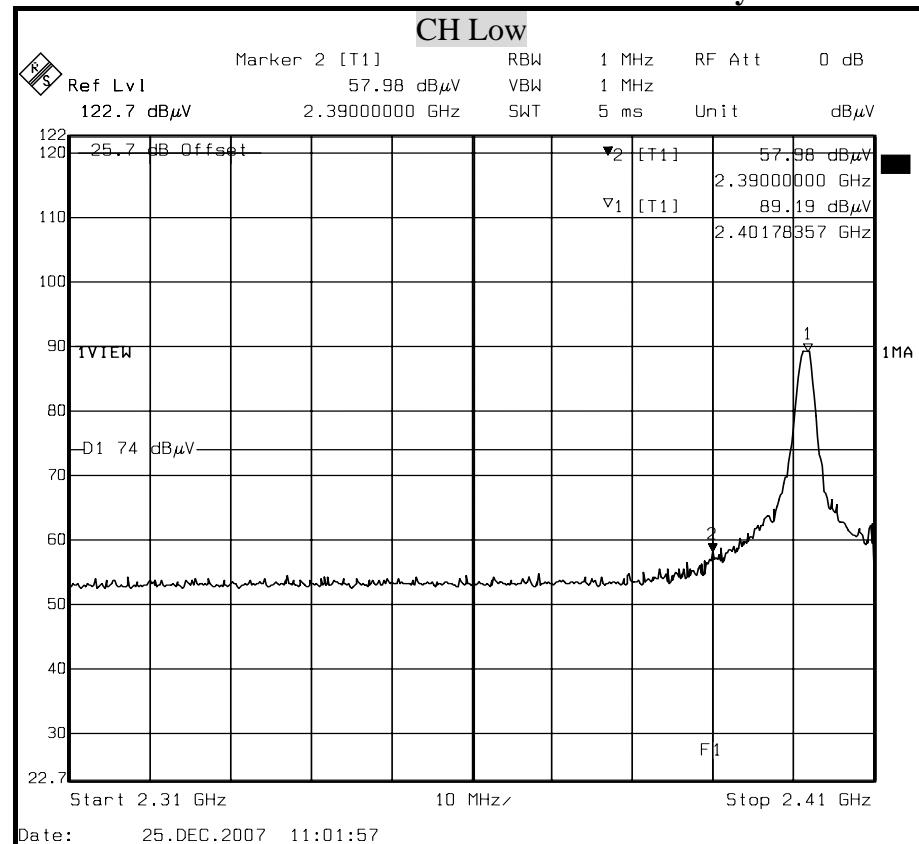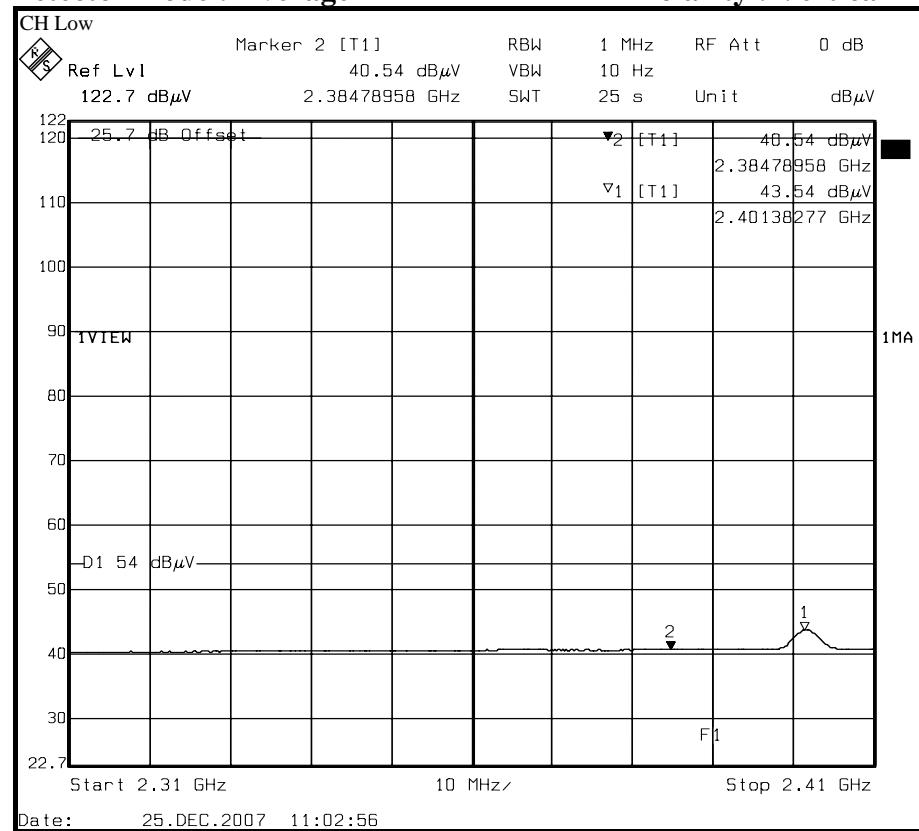Polarity : Horizontal



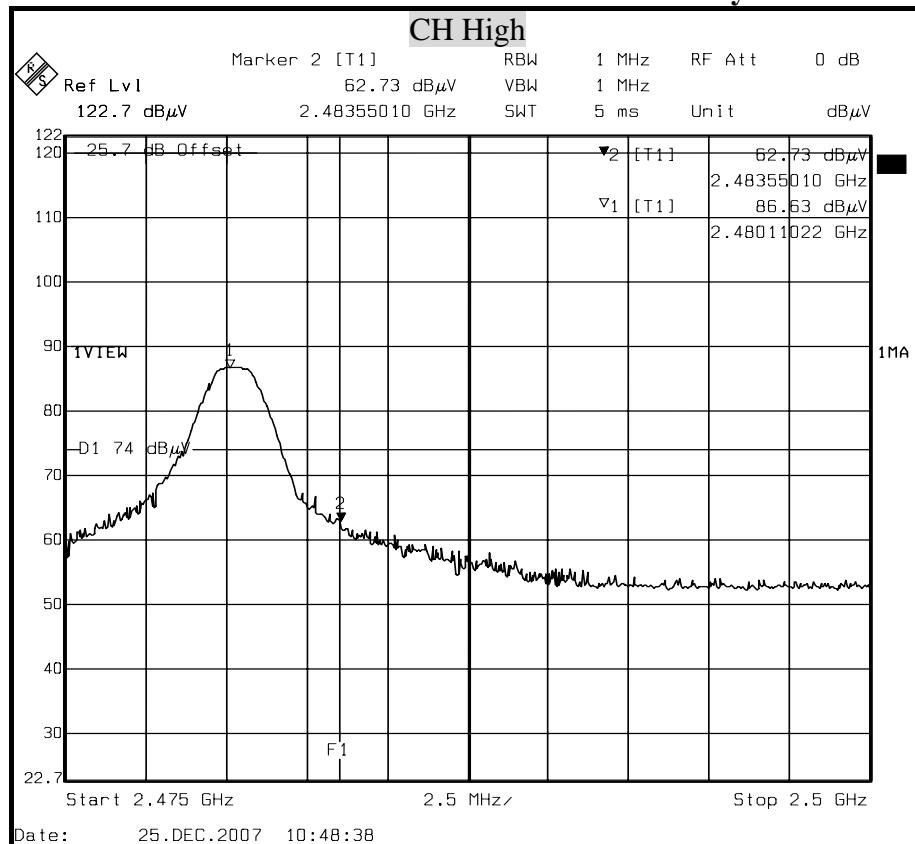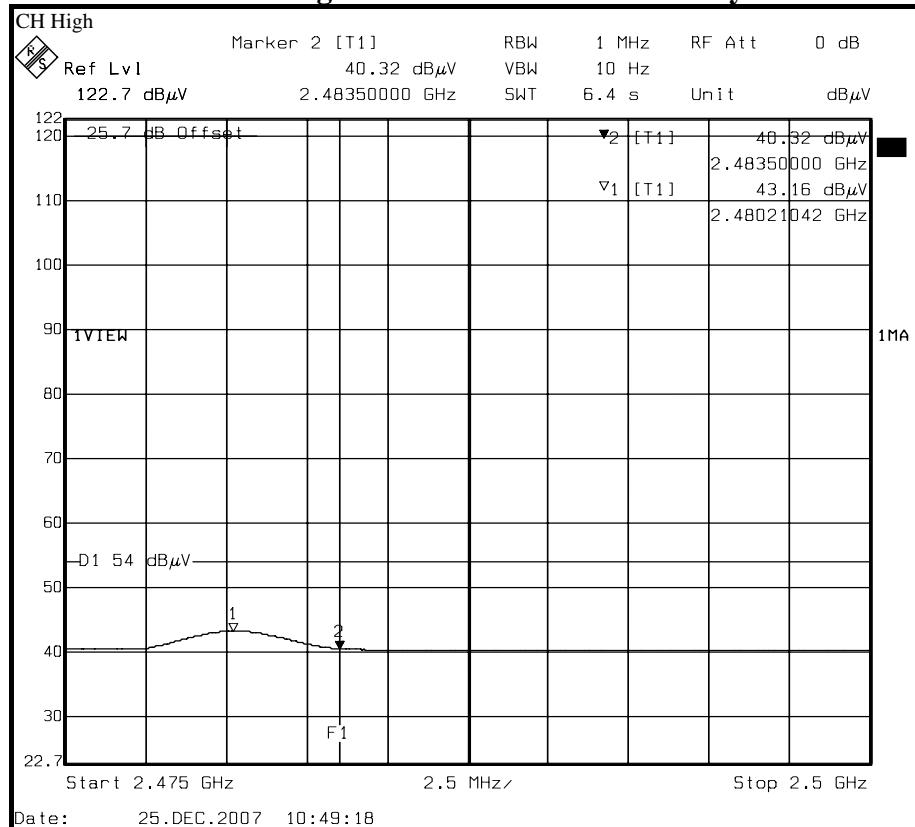Detector mode : Peak
Polarity : Vertical

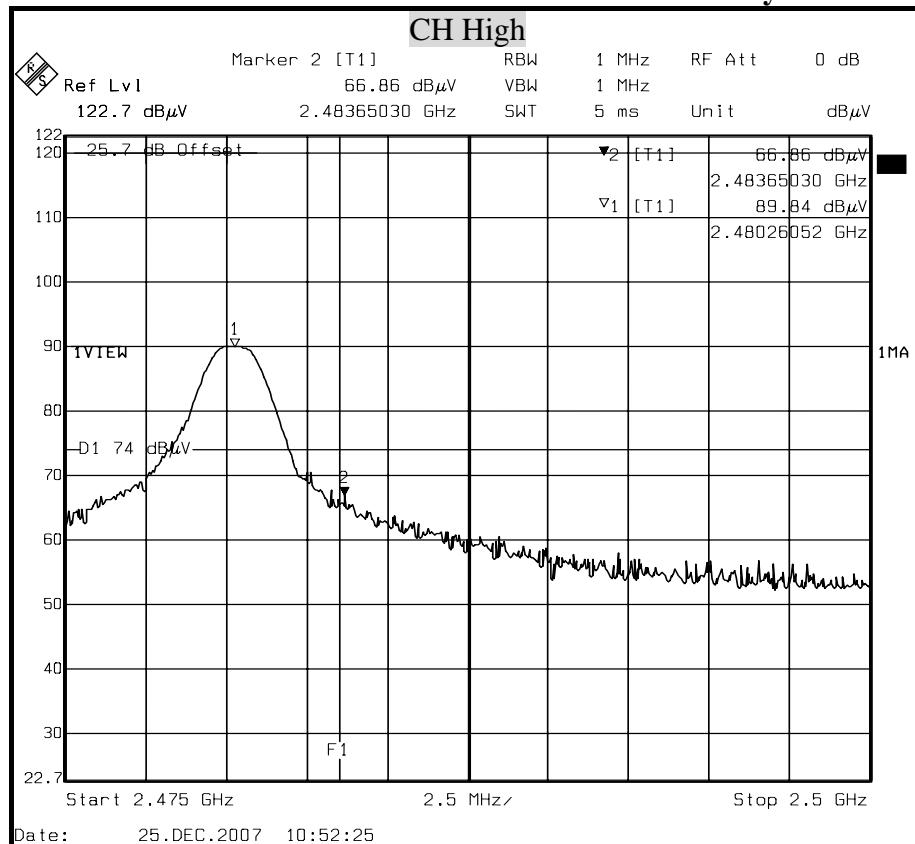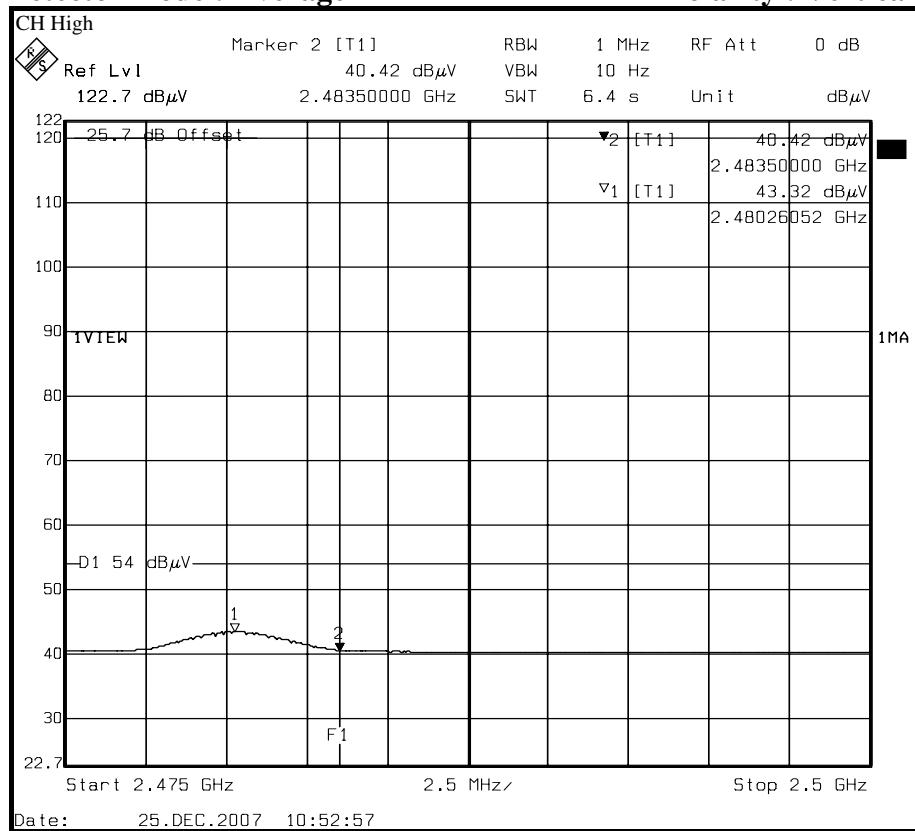Detector mode : Average
Polarity : Vertical


Detector mode : Peak
Polarity : Horizontal

Detector mode : Average
Polarity : Horizontal


Detector mode : Peak
Polarity : Vertical

Detector mode : Average
Polarity : Vertical




8.3 POWERLINE CONDUCTED EMISSIONS

LIMITS

§ 15.207 (a) Except as shown in paragraph (b) and (c) this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.


Frequency of Emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56	56 to 46
0.5 - 5	56	46
5 - 30	60	50

TEST EQUIPMENT

The following test equipment is used during the conducted powerline tests :

Manufacturer or Type	Model No.	Serial No.	Date of Calibration	Calibration Period	Remark
SCHWARZBECK L.I.S.N	NSLK 8127	8127-465	July 09, 2007	1 Year	FINAL
CHASE L.I.S.N	NNLK 8129	8129118	January 26, 2007	1 Year	FINAL
R & S TEST RECEIVER	ESHS30	838550/003	January 31, 2007	1 Year	FINAL
KEENE SHIELDED ROOM	5983	No.1	N/A	N/A	FINAL
R & S PULSE LIMIT	ESH3-Z2	10117	September 17, 2007	1 Year	FINAL
BELDEN N TYPE COAXIAL CABLE	8268 M17/164	003	September 14, 2007	1 Year	FINAL

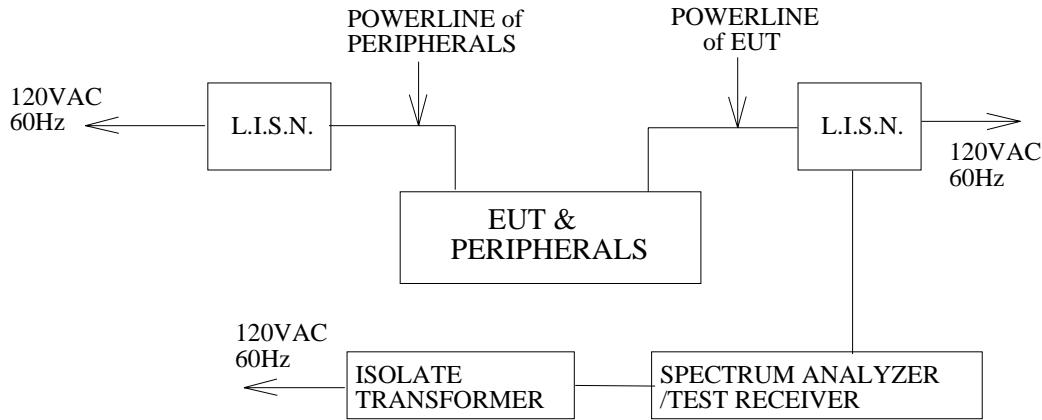TEST SETUP



TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80cm above the horizontal ground plane. The EUT IS CONFIGURED IN ACCORDANCE WITH ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both quasi-peak detection and average detection measurements.

Line conducted data is recorded for both NEUTRAL and LINE.

TEST RESULTS

No non-compliance noted

Since this EUT is powered by Battery, this test item is not applicable.



9. ANTENNA REQUIREMENT

9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used for this product is Chip antenna. The maximum Gain of this antenna only 2 dBi.