

FCC ID: VLE15086-PPL



# TEST REPORT

Applicant	Asian Express Holdings Limited.
Address	4F, -4, No.669 Jingping Rd., Zhonghe City, TaiPei county 235, Taiwan R.O.C

Manufacturer or Supplier	Asian Express Holdings Limited.
Address	4F, -4, No.669 Jingping Rd., Zhonghe City,TaiPei county 235,Taiwan R.O.C
Product	TURBO DRIFT II
Brand Name	N/A
Model	15086-PPL-B-B
Additional Model & Model Difference	15086-PPL-B-R See Item 2.1
Date of tests	Mar. 12~ 21, 2012



The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Madison Luo	Approved by Sam Tung		
Project Engineer / EMC Department	Manager / EMC Department		
Modison	Vand		

Date: Mar. 22, 2012

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



Test Report No.: FC120312N044 FCC ID: VLE15086-PPL

# **Table of Contents**

RELE	ASE CONTROL RECORD	3
1 1.1	SUMMARY OF TEST RESULTSMEASUREMENT UNCERTAINTY	
2 2.1 2.2 2.3	GENERAL INFORMATION	6 7
3 3.1 3.2 3.2.1	EMISSION TESTCONDUCTED EMISSION MEASUREMENTRADIATED EMISSION MEASUREMENTTEST INSTRUMENTS	8 8
3.2.2 3.2.3 3.2.4	TEST PROCEDURE  DEVIATION FROM TEST STANDARD  TEST SETUP	10 11 11
3.2.5 3.2.6 3.3 3.3.1	EUT OPERATING CONDITIONS	12 14 14
3.3.2 3.3.3 3.3.4 3.4	TEST INSTRUMENTS TEST PROCEDURE TEST RESULTS DUTY CYCLE CORRECTION DURING 100MSEC:	14 15 16
3.4.1 4 5	TEST RESULTS  PHOTOGRAPHS OF TEST CONFIGURATION  APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING	
	CHANGES TO THE EUT BY THE LAB	19



FCC ID: VLE15086-PPL

# **RELEASE CONTROL RECORD**

ISSUE NO. REASON FOR CHANGE		DATE ISSUED	
Original release	N/A	Mar. 22, 2012	

Tel: +86 769 8593 5656 Fax: +86 769 8593 1080



FCC ID: VLE15086-PPL

# 1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C				
Standard Section	Test Item	Result	Remark	
15.207	Conducted Emission Test	N/A	-	
15.209	Radiated Emission Test (30MHz ~ 1GHz)	PASS	Meets Class B Limit Minimum passing margin is –4.89 dB at 54.25 MHz	
15.227	27 26dB Bandwidth		-	
	Duty Cycle	PASS	-	

**Note:** 1. The maximum emission levels were compared with the requirements in section 15.209, 15.227 of FCC Part 15 regulation.

Tel: +86 769 8593 5656 Fax: +86 769 8593 1080



FCC ID: VLE15086-PPL

#### 1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY	
Radiated emissions	30MHz ~ 1GHz	+/- 3.58 dB	



FCC ID: VLE15086-PPL

#### **2 GENERAL INFORMATION**

#### 2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	TURBO DRIFT II
MODEL NO.	15086-PPL-B-B, 15086-PPL-B-R
POWER SUPPLY	DC 9V Battery
DATA CABLE	N/A
SUPPLIED	IN/A
OPERATING	07.445MH=
FREQUENCY	27.145MHz

#### NOTE:

- 1. The EUT is a wireless remote.
- 2. The model difference are model number and color.
- 3. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



FCC ID: VLE15086-PPL

#### 2.2 DESCRIPTION OF TEST MODES


The EUT was tested under the following modes, the final worst mode were marked in boldface and recorded in this report.

TX Mode		

#### 2.3 DESCRIPTION OF SUPPORT UNITS

N/A.

#### **TEST CONFIGURATION**

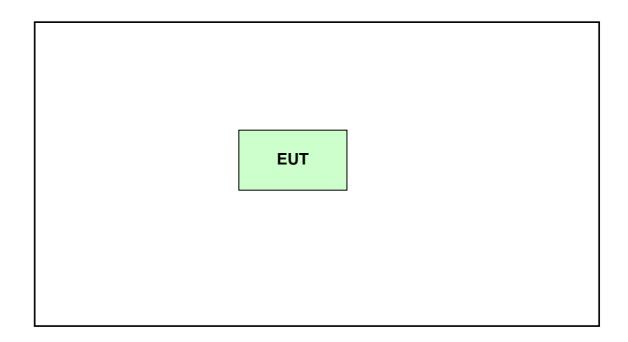



FCC ID: VLE15086-PPL

#### **EMISSION TEST**

#### **CONDUCTED EMISSION MEASUREMENT**

The EUT'S power provide by battery. no data about this item test.

#### 3.2 RADIATED EMISSION MEASUREMENT

Limits for Field Strength of Fundamental Emissions [FCC 47CFR 15.227]:

Frequency Range of Fundamental [MHz]	Field Strength of Fundamental Emission [Peak] [µV/m]	Field Strength of Fundamental Emission [Average] [  [
26.96 – 27.28	100,000 (100 dBμV/m)	10,000 (80 dBμV/m)

#### Limits for Radiated Emissions [FCC 47 CFR 15.209]:

Frequency Range	Quasi-Peak Limits		
[MHz]	[μV/m]		
1.705-30	300		
30-88	100		
88-216	150		
216-960	200		
Above960	500		

Note: (1) The lower limit shall apply at the transition frequencies.

- (2) Emission level  $(dBuV/m) = 20 \log Emission level (uV/m)$ .
- (3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



FCC ID: VLE15086-PPL

# 3.2.1 TEST INSTRUMENTS

# Frequency Range 30MHz~1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Pectrum Analyzer	Agilent	E4446A	MY46180622	Apr. 25,11	Apr. 25,12
EMI Test Receiver	Rohde&Schwarz	ESVD	847398/003	May 25,11	May 25,12
Loop antenna	Daze	ZN30900A	0708	Oct.16,11	Oct.16,12
Bilog Antenna	Teseq	CBL 6111D	27089	Jul. 24,11	Jul. 24,12
10m Semi-anechoic Chamber	CHANGLING	21.4m*12.1m* 8.8m	NSEMC006	May 2,11	May 2,12
Signal Amplifier	Agilent	8447D	2944A10488	May 2,11	May 2,12
Pre-Amplifier (20MHz-3GHz)	EMCI	EMC 330	980095	Nov. 7,11	Nov. 7,12
Test Software	ADT	ADT_Radiated _V7.6.15	N/A	N/A	N/A

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA and NIM/CHINA.

2. The test was performed in 10m Chamber.



FCC ID: VLE15086-PPL

#### 3.2.2 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4 (section 12).

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meters Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using new battery. The turntable was rotated to maximize the emission level.
- g. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.

#### NOTE:

- 1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
- 3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
- 4. Margin value = Emission level Limit value.
- 5. Fundamental AV value = PK value + duty cycle.




FCC ID: VLE15086-PPL

# 3.2.3 DEVIATION FROM TEST STANDARD


No deviation

#### 3.2.4 TEST SETUP

#### **Below 30MHz**

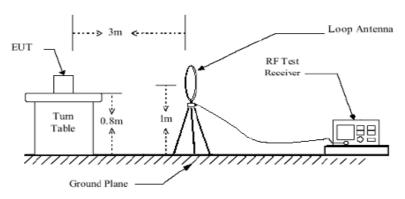

#### About 30MHz~1GHz

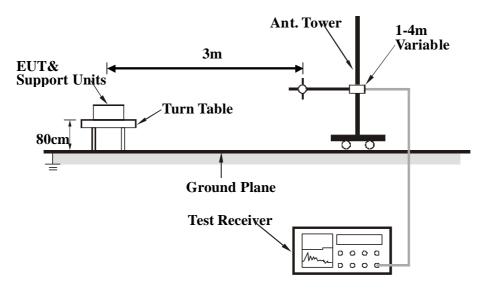

#### 3.2.5 EUT OPERATING CONDITIONS

- a. Turned on the power of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.

Tel: +86 769 8593 5656 Fax: +86 769 8593 1080



FCC ID: VLE15086-PPL

#### 3.2.6 TEST RESULT OF FUNDAMENTAL

**Detection mode: Peak** 

Frequency (MHz)	antenna orientation (H/V) and table degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.145	V/90°	18.73	69.04	100	-30.96

# **Detection mode: # Average**

Frequency (MHz)	antenna orientation (H/V) and table degree	Antenna Factor and Cable Loss (dB/m)	Field Strength at 3m (dBµV/m)	Limit at 3m (dBμV/m)	Margin (dB)
27.145	V/90°	18.73	**51.69	80	-28.31

<sup>#</sup> For pulse modulated devices and using measuring equipment employing a peak detection mode, properly adjusted for such factor as pulse desensitisation.

Note: Field Strength includes Antenna Factor and Cable Loss.

<sup>\*\*</sup>Duty Cycle Correction = 20Log(0.1357) =-17.35dB



FCC ID: VLE15086-PPL

#### 3.2.7 TEST RESULTS OF OTHER

TEST MODE	TX Mode	FREQUENCY RANGE	30-1000MHz
INPUT POWER	DC 9V Battery	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	20 deg. C, 55% RH,	TESTED BY: Madis	son

	ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
	Freq.	Emission	Limit	Margin	Antenna	Table	Raw	Correction	
No.	•	Level	(dBuV/m)	_	Height	Angle	Value	Factor	
	(MHz)	(dBuV/m)	(ubu v/III)	(dB)	(cm)	(Degree)	(dBuV)	(dB/m)	
1	30.00	22.58	40.00	-17.42	175	271	2.65	19.93	
2	54.25	28.29	40.00	-11.71	161	257	18.88	9.41	
3	109.22	17.34	43.50	-26.16	206	242	5.31	12.03	
4	149.63	12.91	43.50	-30.59	178	174	0.63	12.28	
5	170.65	13.74	43.50	-29.76	225	221	2.77	10.97	
6	261.18	15.61	46.00	-30.39	209	205	0.80	14.81	

**REMARKS:** The emission levels of other frequencies were very low against the limit.

	ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
	Freq.	Emission	Limit	Margin	Antenna	Table	Raw	Correction	
No.	(MHz)	Level	(dBuV/m)	(dB)	Height	Angle	Value	Factor	
	(IVIITZ)	(dBuV/m)	(ubu v/III)	(ub)	(cm)	(Degree)	(dBuV)	(dB/m)	
1	54.25	35.11	40.00	-4.89	128	295	25.70	9.41	
2	81.73	14.44	40.00	-25.56	100	278	5.71	8.73	
3	109.22	17.10	43.50	-26.40	146	277	5.07	12.03	
4	190.05	15.11	43.50	-28.39	123	200	4.88	10.23	
5	891.68	28.28	46.00	-17.72	174	249	2.15	26.13	
6	949.88	29.23	46.00	-16.77	190	233	1.06	28.17	

**REMARKS:** The emission levels of other frequencies were very low against the limit.



FCC ID: VLE15086-PPL

#### 3.3 26DB BANDWIDTH OF FUNDAMENTAL EMISSION

#### 3.3.1 LIMITS FOR 26DB BANDWIDTH OF FUNDAMENTAL EMISSION:

FREQUENCY	26dB Bandwidth	Limits	
(MHz)	[KHz]	[MHz]	
27.145	93.9kHz	within 26.96 – 27.28	

#### 3.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Pectrum Analyzer Agilent	E4446A	MY46180622	Apr. 25,11	Apr. 25,12

**NOTE:** 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA and NIM/CHINA.

2. The test was performed in RF Room.

#### 3.3.3 TEST PROCEDURE


The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio. The reference level is the level of the highest amplitude signal observed from the transmitter at the fundamental frequency. Once the reference level is established, the equipment is conditioned with typical modulating signal to produce the worst-case (i.e. the widest) bandwidth.



FCC ID: VLE15086-PPL

#### 3.3.4 TEST RESULTS

#### Test Result of 26dB Bandwidth of Fundamental Emission: PASS

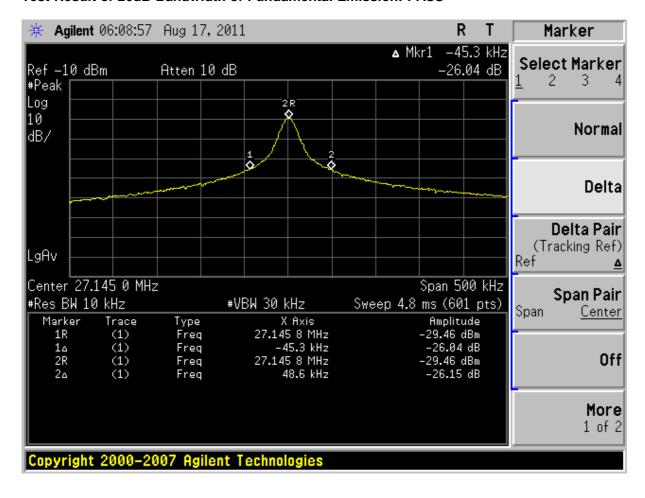



FCC ID: VLE15086-PPL

#### 3.4 DUTY CYCLE CORRECTION DURING 100MSEC:

Each function key sends a different series of characters, but each packet period(19.5msec) never exceeds a series of 1 long (3.2msec), 1 short(0.2667msec) pulses and 3 middle (2.367 msec), 3 middle(1msec).

Assuming any combination of short or long pulses may be obtained due to encoding the worst case transmit duty cycle would be considered

(1x3.2msec) + (1x0.2667msec) + (3x2.367) + (3x1) per 100msec=13.57% duty cycle. Figure A and E show the characteristics of the pulse train for one of these functions.

Remarks:

Duty Cycle Correction = 20Log(0.1357) =-17.35dB

The following figures [Figure A to Figure E] show the characteristics of the pulse train for one of these functions.



FCC ID: VLE15086-PPL

#### 3.4.1 TEST RESULTS

Figure A


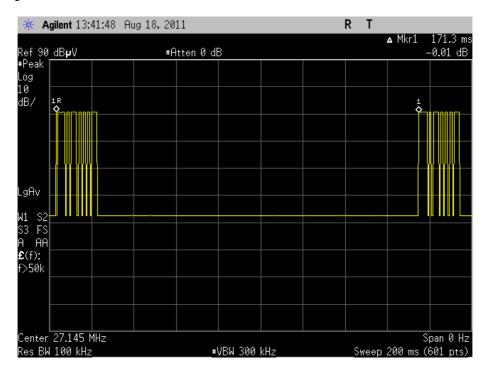


Figure B



Guangdong 523942, China

Tel: +86 769 8593 5656 Fax: +86 769 8593 1080

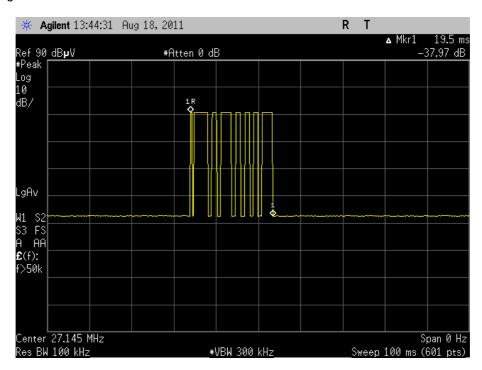

Test Report No.: FC120312N044 FCC ID: VLE15086-PPL

Figure C


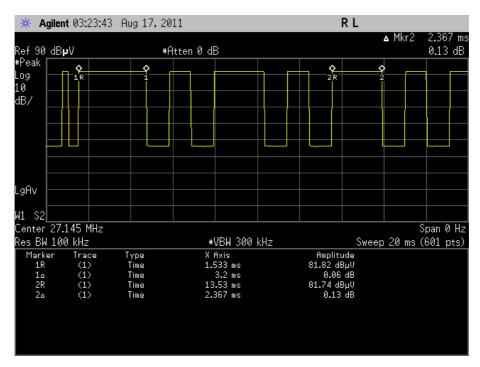


Figure D



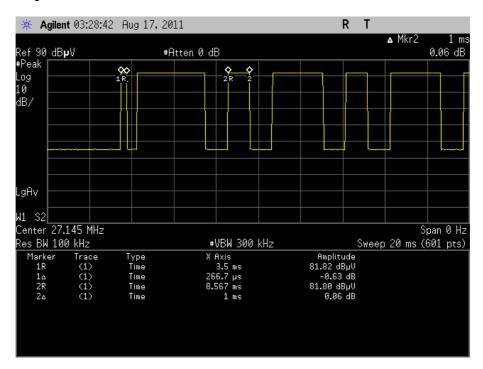

#### 4 PHOTOGRAPHS OF TEST CONFIGURATION

Please see test setup photo file.

# 5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---