



RF Test Report

Applicant : Swann Communications Pty Ltd

Product Type : Swann Wire-Free Video Doorbell

Trade Name : Swann

Model Number : SWIFI-DOORBELL

Applicable Standard : FCC 47 CFR PART 15 SUBPART C

ANSI C63.10:2013

Receive Date : May 24, 2019

Test Period : Jul. 16 ~ Sep. 19, 2019

Issue Date : Sep. 20, 2019

Issue by

A Test Lab Techno Corp.
No. 140-1, Changan Street, Bade District,
Taoyuan City 33465, Taiwan (R.O.C.)

Tel: +886-3-2710188 / Fax: +886-3-2710190

Taiwan Accreditation Foundation accreditation number: 1330


Test Firm MRA designation number: TW0010





Note:

- 1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
- 2. This report shall not be reproduced except in full, without the written approval of A Test Lab Technology Corporation.
- 3.The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.





Revision History

Rev.	Issue Date	Revisions	Revised By
00	Jul. 25, 2019	Initial Issue	Nina Lin
01	Sep. 20, 2019	Page 25 Revised Duty Cycle Test Diagrams. Page 26 Revised Duty Cycle Results. Page 27 ~ 28 Revised Fundamental Frequency Test Results.	Nina Lin



Rev.01

Verification of Compliance

Issued Date: Sep. 20, 2019

Applicant : Swann Communications Pty Ltd

Product Type : Swann Wire-Free Video Doorbell

Trade Name : Swann

Model Number : SWIFI-DOORBELL

FCC ID : VMISWIFIDOORBELL

EUT Rated Voltage : DC 5 V, 2.1 A; 12-24 Vac, 50/60 Hz, 0.5 A

Test Voltage : 12 Vac / 120 Vac, 60 Hz

Applicable Standard : FCC 47 CFR PART 15 SUBPART C

ANSI C63.10:2013

Test Result : Complied

Performing Lab. : A Test Lab Techno Corp.

No. 140-1, Changan Street, Bade District,

Taoyuan City 33465, Taiwan (R.O.C.)

Tel: +886-3-2710188 / Fax: +886-3-2710190

<u>Taiwan Accreditation Foundation accreditation number:</u>

1330http://www.atl-lab.com.tw/e-index.htm

A Test Lab Techno Corp. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by A Test Lab Techno Corp. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Y Reviewed By

(Manager) (Fly Lu) (Testing Engineer)







TABLE OF CONTENTS

1	Gen	eral Information	5
	1.1.		
	1.2.	Measurement Uncertainty	
2	EUT	Description	6
3		Methodology	
	3.1.	Mode of Operation	6
	3.2.	EUT Test Step	7
	3.3.	Configuration of Test System Details	8
	3.4.	Test Instruments	10
	3.5.	Test Site Environment	11
4	Mea	surement Procedure	12
	4.1.	AC Power Line Conducted Emission Measurement	12
	4.2.	Radiated Emissions Measurement	14
	4.3.	20 dB Bandwidth Measurement	18
	4.4.	Antenna Requirement	19
5	Test	: Results	20
	Anne	ex A. Conducted Emission	20
	Anne	ex B. Conducted Test Results	24
	Δnne	ex C. Radiated Emissions Measurement	25





1 General Information

1.1. Summary of Test Result

Standard	Item	Results	Remark			
15.207	AC Power Conducted Emission	PASS				
15.231(a)	Transmitter Deactivation Time	PASS				
15.231(b)	Transmitter Radiated Emissions	PASS				
15.231(c) 20 dB Bandwidth		PASS				
15.203 Antenna Requirement		PASS				
CFR 47 Part 15.231(2010) / ANSI C63.10:2013						


Standard	Description	
CFR47, Part 15, Subpart C	Intentional Radiators	
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	

1.2. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty (dB)
Conducted Emission	150 kHz ~ 30 MHz	2.8
	30 MHz ~ 1000 MHz	5.7
Radiated Emission	1000 MHz ~ 18000 MHz	5.6
Radiated Emission	18000 MHz ~ 26500 MHz	4.9
	26500 MHz ~ 40000 MHz	4.8
RF Bandwidth	Bandwidth 4.96 %	

Decision Rule

- Uncertainty is not included.
- $\hfill \square$ Uncertainty is included.





2 EUT Description

Applicant	Swann Communications Pty Ltd Unit 5B 706 Lorimer Street, Port Melbourne 3207, Australia
Manufacturer	Chicony Electronics (Dong Guan) Co.,Ltd. San Zhong Guan Li Qu, Qingxi Town, Dongguan City Guangdong 523651 China
Product Type	Swann Wire-Free Video Doorbell
Trade Name	Swann
Model Number	SWIFI-DOORBELL
FCC ID	VMISWIFIDOORBELL
Frequency Range	433.92 MHz
Modulation Type	ASK
Number of Channels	1 Channel
Antenna Type	PCB Antenna
Operate Temp. Range	-20 ~ +50 °C

3 Test Methodology


3.1. Mode of Operation


Test Mode
Mode 1: Transmitter Mode
Mode 2: Continuous TX Mode

Then, the above highest fundamental level mode of the configuration of the EUT and antenna was chosen for all final test items.

By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

Note: The test voltage of AC 120 V and AC 12 V were both tested. After our evaluation from AC Power Conducted Emission, the worst case is AC120 V.

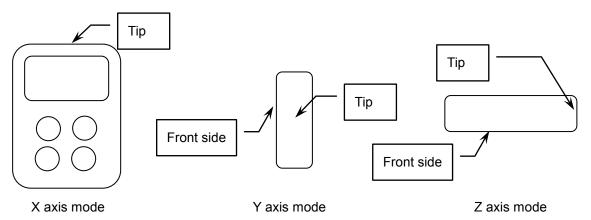






3.2. EUT Test Step

1.	Setup the EUT shown on "Configuration of Test System Details".
2.	Turn on the power of all equipment.
3.	The EUT will start to operate function.


Measurement Software					
No.	No. Description Software Version				
1	Conducted Emission	EZ EMC	1.1.4.3		
2	Radiated Emission	EZ EMC	1.1.4.4		







3.3. **Configuration of Test System Details**

Conducted Emission

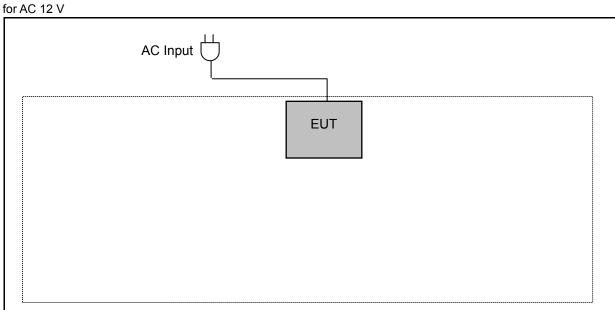

for AC 120 V

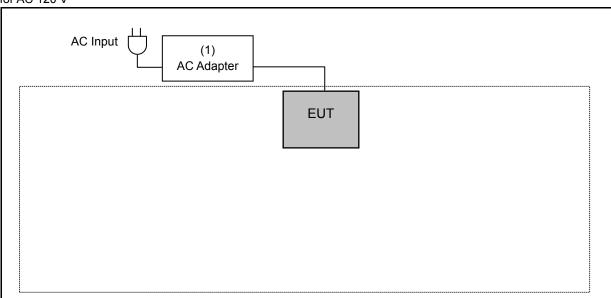





Radiated Emission

AC Input

(1)AC Adapter

EUT

	Devices Description						
Product		Manufacturer	Manufacturer Model Number Serial Number		Power Cord		
(1)	AC Adapter	HUAWEI	HW-050450U00				



Rev.01

3.4. Test Instruments

For Conducted Emission Test Period: Jul. 19, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Test Receiver	R&S	ESCI	100367	05/21/2019	1 year
LISN	R&S	ENV216	101040	04/03/2019	1 year
RF Cable	Woken	00100D1380194M	TE-02-03	05/23/2019	1 year

For Radiated Emissions

Test Period: Jul. 16, 2019


Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (10 Hz~44 GHz)	Keysight	N9010A	MY52221312	01/14/2019	1 year
Pre Amplifier (1~26.5 GHz)	Agilent	8449B	3008A02237	10/16/2018	1 year
Pre Amplifier (100 kHz~1.3 GHz)	Agilent	8447D	2944A11119	01/14/2019	1 year
Broadband Antenna	Schwarzbeck	VULB9168	416	10/19/2018	1 year
Horn Antenna (1~18 GHz)	SCHWARZBECK MESS-ELEKTRONIK	BBHA9120D	9120D-550	08/23/2018	1 year
Loop Antenna	COM-POWER CORPORATION	AL-130	121014	03/29/2019	1 year
RF Cable	EMCI	EMC104-N-N-6000	TE01-1	02/20/2019	1 year
Microwave Cable	EMCI	EMC104-SM-SM-1 3000	170814	10/30/2018	1 year
Microwave Cable	EMCI	EMC102-KM-KM-1 4000	151001	02/20/2019	1 year

For Conducted

Test Period: Jul. 16, 2019 / Sep. 19, 2019

Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
Spectrum Analyzer (3 Hz~50 GHz)	Agilent	N9030A	MY53120541	01/22/2019	1 year


Note: N.C.R. = No Calibration Request.





3.5. Test Site Environment

Items	Required (IEC 60068-1)	Actual		
Temperature (°C)	15-35	26		
Humidity (%RH)	25-75	60		
Barometric pressure (mbar)	860-1060	990		






4 Measurement Procedure

4.1. AC Power Line Conducted Emission Measurement

■ Limit

Frequency (MHz)	Quasi-peak	Average		
0.15 - 0.5	66 to 56	56 to 46		
0.50 - 5.0	56	46		
5.0 - 30.0	60	50		

■ Test Setup

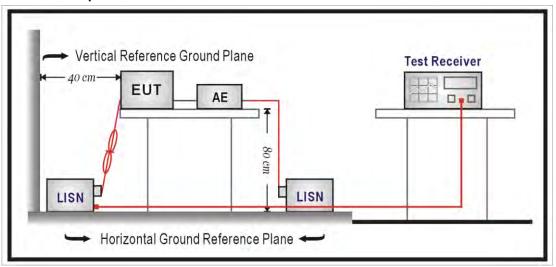



Rev.01

■ Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 Ω // 50 uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 Ω // 50 uH coupling impedance with 50 ohm termination.

Tabletop device shall be placed on a non-conducting platform, of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The wall of screened room shall be located 40 cm to the rear of the EUT. Other surfaces of tabletop or floor standing EUT shall be at least 80 cm from any other ground conducting surface including one or more LISNs. For floor-standing device shall be placed under the EUT with a 12 mm insulating material.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a resolution bandwidth of 9 kHz. The equipment under test (EUT) shall be meet the limits in section 4.1, as applicable, including the average limit and the quasi-peak limit when using respectively, an average detector and quasi-peak detector measured in accordance with the methods described of related standard. When all of peak value were complied with quasi-peak and average limit from 150 kHz to 30 MHz then quasi-peak and average measurement was unnecessary.

The AMN shall be placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for AMNs mounted on top of the ground reference plane. This distance is between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8 m from the AMN. If the mains power cable is longer than 1 m then the cable shall be folded back and forth at the centre of the lead to form a bundle no longer than 0.4 m. All of interconnecting cables that hang closer than 4.0 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 cm to 40 cm long. All of EUT and AE shall be separate place more than 0.1 m. All 50 Ω ports of the LISN shall be resistively terminated into 50 Ω loads when not connected to the measuring instrument.

If the reading of the measuring receiver shows fluctuations close to the limit, the reading shall be observed for at least 15 s at each measurement frequency; the higher reading shall be recorded with the exception of any brief isolated high reading which shall be ignored..



Rev.01

4.2. Radiated Emissions Measurement

■ Limit

According to FCC Part 15.231(b) requirement:

In addition to the provisions of §15.205, the field strength of emissions from intentional radiator operated under this section shall not exceed the following:

Fundamental and harmonics emission limits


Frequency range	Average Field Strength of Fundamental	Peak Field Strength of Fundamental		
(MHz)	(dBµV/m@3 m)	(dBµV/m@3 m)		
433.92	80.83	100.83		

General Radiated emission Limit

Serieral Natiated emission Limit							
Frequency range	Field Strength of Fundamental	Field Strength of Harmonics					
(MHz)	(uV/m at 3 m)	(uV/m at 3 m)					
40.66 to 40.70	2250 (67.04 dBuV)	225 (47.04 dBuV)					
70 to 130	1250 (61.94 dBuV)	125 (41.94 dBuV)					
400 1- 474	1250 (61.94 dBuV) to	125 (41.94 dBuV) to					
130 to 174	3750 (71.48 dBuV)	375 (51.48 dBuV)					
174 to 260	3750 (71.48 dBuV)	375 (51.48 dBuV)					
000 to 470	3750 (71.48 dBuV) to	375 (51.48 dBuV) to					
260 to 470	12500 (81.94 dBuV)	1250 (61.94 dBuV)					
470 and above	12500 (81.94 dBuV)	1250 (61.94 dBuV)					


Remark: 1. The table above tighter limit applies at the band edges.

2. The measurement distance in meters, which that between form closest point of EUT to instrument antenna.






■ Setup

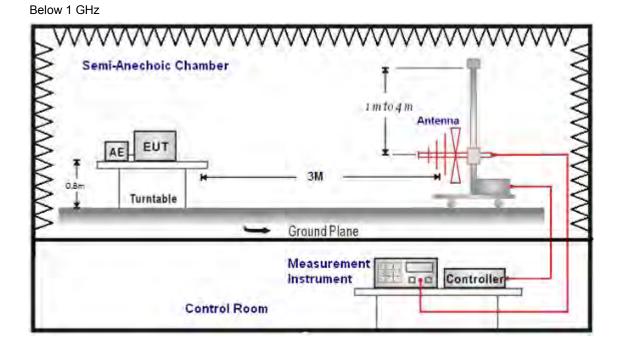

Above 1 GHz

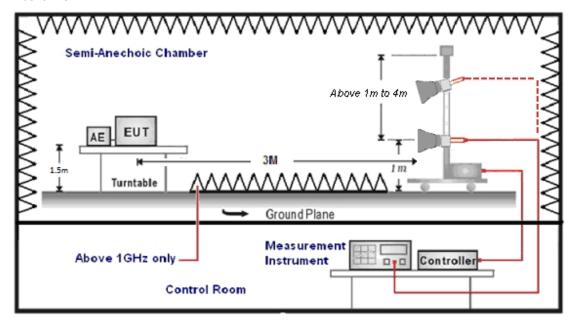



Rev.01

■ Test Procedure

Final radiation measurements were made on a three-meter, Semi Anechoic Chamber. The EUT system was placed on a nonconductive turntable which is 0.8 or 1.5 meters height, top surface 1.0 x 1.5 meter. The spectrum was examined from 250 MHz to 2.5 GHz in order to cover the whole spectrum below 10th harmonic which could generate from the EUT. During the test, EUT was set to transmit continuously & Measurements spectrum range from 30 MHz to 26.5 GHz is investigated.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 3 MHz for peak measurements and 10 Hz for average measurements.

A nonconductive material surrounded the EUT to supporting the EUT for standing on tree orthogonal planes. At each condition, the EUT was rotated 360 degrees, and the antenna was raised and lowered from one to four meters to find the maximum emission levels. Measurements were taken using both horizontal and vertical antenna polarization.

SCHWARZBECK MESS-ELEKTRONIK Biconilog Antenna at 3 Meter and the SCHWARZBECK Double Ridged Guide Antenna was used in frequencies 1 – 26.5 GHz at a distance of 1 meter. All test results were extrapolated to equivalent signal at 3 meters utilizing an inverse linear distance extrapolation Factor (20 dB/decade).

For testing above 1 GHz, the emission level of the EUT in peak mode was 20 dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

Appropriate preamplifiers were used for improving sensitivity and precautions were taken to avoid overloading or desensitizing the spectrum analyzer. No post – detector video filters were used in the test.

The spectrum analyzer's 6 dB bandwidth was set to 1 MHz, and the analyzer was operated in the peak detection mode, for frequencies both below and up 1 GHz. The average levels were obtained by subtracting the duty cycle correction factor from the peak readings.

The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dBuV) into field intensity in micro volts pre meter (uV/m).

The actual field intensity in decibels referenced to 1 microvolt in to field intensity in micro colts per meter (dBuV/m).



Rev.0

The actual field is intensity in referenced to 1 microvolt per meter (dBuV/m) is determined by algebraically adding the measured reading in dBuV, the antenna factor (dB), and cable loss (dB) and Subtracting the gain of preamplifier (dB) is auto calculate in spectrum analyzer.

(1) Amplitude (dBuV/m) = FI (dBuV) +AF (dBuV) +CL (dBuV)-Gain (dB)

FI= Reading of the field intensity.

AF= Antenna factor.

CL= Cable loss.

P.S Amplitude is auto calculate in spectrum analyzer.

(2) Actual Amplitude (dBuV/m) = Amplitude (dBuV)-Dis(dB)

The FCC specified emission limits were calculated according the EUT operating frequency and by following linear interpolation equations:

(a) For fundamental frequency: Transmitter Output < +30 dBm

(b) For spurious frequency: Spurious emission limits = fundamental emission limit /10

Data of measurement within this frequency range without mark in the table above means the reading of emissions are attenuated more than 20 dB below the permissible limits or the field strength is too small to be measured.

■ Calculation of Average Factor

The output field strengths of specification in accordance with the FCC rules specify measurements with an average detector. During the test, a spectrum analyzer incorporating a peak detector was used. Therefore, a reduction factor can be applied to the resultant peak signal level and compared to the limit for measurement instrumentation incorporating an average detector.

Please see the diagrams below.

(*) When the field strength (or envelope power) is not constant or when it is in pulses, and an averaging detector is specified to be used, the value of field strength or power over one complete pulse train, excluding blanking intervals, shall be averaged as long as the pulse train does not exceed 0.1 seconds. In cases where the pulse train exceeds 0.1 seconds, the average value (of field strength or output power) shall be determined during a 0.1 second interval during which the field strength or power is at its maximum value.



Rev.01

4.3. 20 dB Bandwidth Measurement


■ Limit

According to FCC Part 15.231(c) requirement:

The 20 dB

B.W Limit = 0.25 % * f (MHz) = 0.25 % * 315 MHz = 787.5 kHz

Test Setup

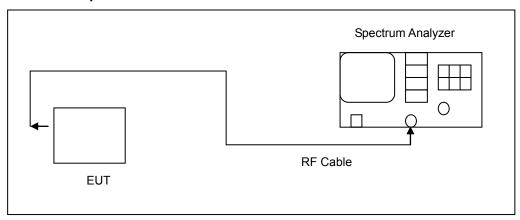

■ Test Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the analyzer through a specialized RF connector and a 10 dB passive attenuator. A fully charged battery was used for the supply voltage. The RF function of the EUT was enabled. The spectrum analyzer used the following settings:

- 1. Span = 1 MHz
- 2. RBW ≥ 1 % of the 20 dB span
- 3. VBW ≥ RBW
- 4. Sweep = auto
- 5. Detector function = peak
- 6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20 dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20 dB bandwidth of the emission.



Rev.01


4.4. Antenna Requirement

■ Limit

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

■ Antenna Connector Construction

See section 2 – antenna information.





5 Test Results


Annex A. Conducted Emission

 Standard:
 FCC Part 15.231
 Line:
 L1

 Test item:
 Conducted Emission
 Power:
 AC 12 V/60 Hz


 Test Mode:
 Mode 1
 Temp.(°C)/Hum.(%RH):
 26(°C)/60 %RH

 Description:
 Description:
 Description:
 Description:

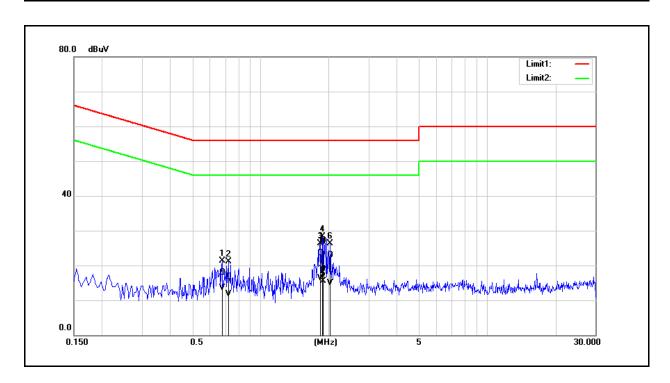

No.	Frequency	QP	AVG	Correction	QP	AVG	QP	AVG	QP	AVG	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.6780	8.33	3.96	9.55	17.88	13.51	56.00	46.00	-38.12	-32.49	Pass
2	0.7220	7.14	2.13	9.56	16.70	11.69	56.00	46.00	-39.30	-34.31	Pass
3	1.8300	13.90	6.67	9.60	23.50	16.27	56.00	46.00	-32.50	-29.73	Pass
4	1.8740	17.12	9.28	9.61	26.73	18.89	56.00	46.00	-29.27	-27.11	Pass
5	1.8900	17.41	8.80	9.61	27.02	18.41	56.00	46.00	-28.98	-27.59	Pass
6	2.0260	13.36	5.21	9.61	22.97	14.82	56.00	46.00	-33.03	-31.18	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).






Standard: FCC Part 15.231 Line: N

Test item: Conducted Emission Power: AC 12 V/60 Hz


Test Mode: Mode 1 Temp.(°ℂ)/Hum.(%RH): 26(°ℂ)/60 %RH

Description:

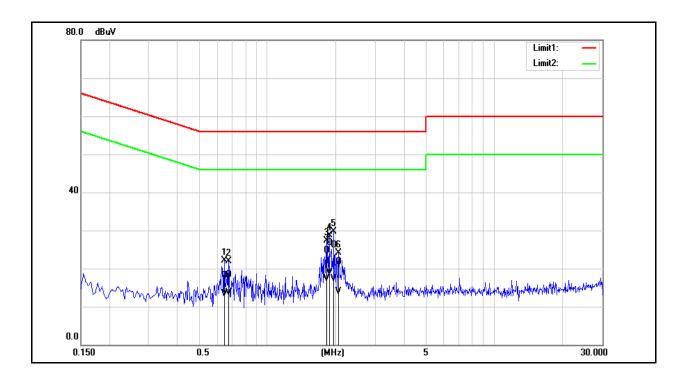

No.	Frequency	QP	AVG	Correction	QP	AVG	QP	AVG	QP	AVG	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.6460	8.55	3.75	9.65	18.20	13.40	56.00	46.00	-37.80	-32.60	Pass
2	0.6740	8.60	4.06	9.65	18.25	13.71	56.00	46.00	-37.75	-32.29	Pass
3	1.8260	14.97	7.54	9.70	24.67	17.24	56.00	46.00	-31.33	-28.76	Pass
4	1.8740	17.01	9.11	9.71	26.72	18.82	56.00	46.00	-29.28	-27.18	Pass
5	1.9660	16.30	7.55	9.71	26.01	17.26	56.00	46.00	-29.99	-28.74	Pass
6	2.0580	11.96	4.26	9.71	21.67	13.97	56.00	46.00	-34.33	-32.03	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).






Standard: FCC Part 15.231 Line: L1

Test item: Conducted Emission Power: AC 120 V/60 Hz


Test Mode: Mode 1 Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60 %RH

Description:

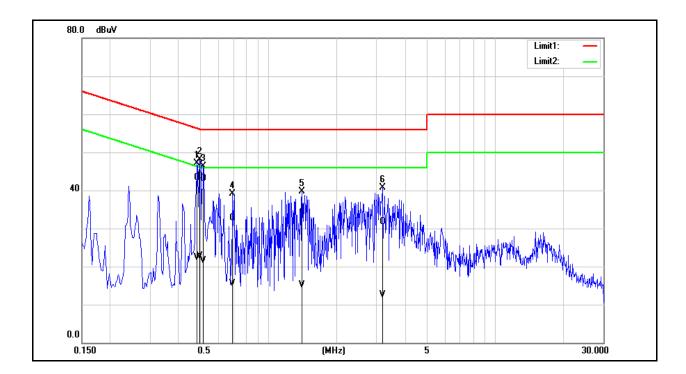

No.	Frequency	QP	AVG	Correction	QP	AVG	QP	AVG	QP	AVG	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.4860	33.82	12.74	9.54	43.36	22.28	56.24	46.24	-12.88	-23.96	Pass
2	0.4980	34.25	13.19	9.54	43.79	22.73	56.03	46.03	-12.24	-23.30	Pass
3	0.5180	33.53	11.92	9.54	43.07	21.46	56.00	46.00	-12.93	-24.54	Pass
4	0.6940	23.23	5.96	9.55	32.78	15.51	56.00	46.00	-23.22	-30.49	Pass
5	1.4100	24.56	5.44	9.58	34.14	15.02	56.00	46.00	-21.86	-30.98	Pass
6	3.1780	22.13	2.88	9.64	31.77	12.52	56.00	46.00	-24.23	-33.48	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).






Standard: FCC Part 15.231 Line: N

Test item: Conducted Emission Power: AC 120 V/60 Hz


Test Mode: Mode 1 Temp.(°ℂ)/Hum.(%RH): 26(°ℂ)/60 %RH

Description:

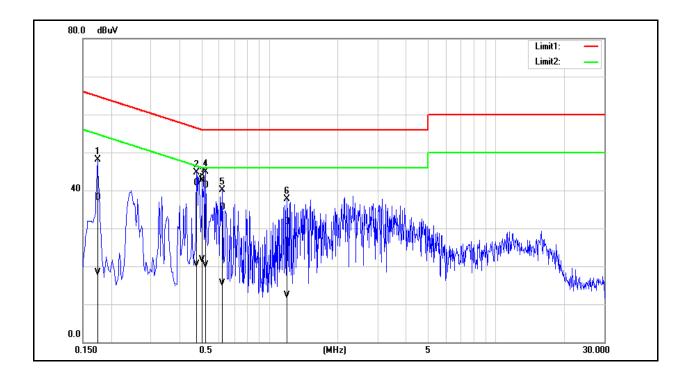

No.	Frequency	QP	AVG	Correction	QP	AVG	QP	AVG	QP	AVG	Remark
		reading	reading	factor	result	result	limit	limit	margin	margin	
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1740	28.57	8.58	9.63	38.20	18.21	64.77	54.77	-26.57	-36.56	Pass
2	0.4780	32.21	10.92	9.64	41.85	20.56	56.37	46.37	-14.52	-25.81	Pass
3	0.5060	33.28	12.16	9.64	42.92	21.80	56.00	46.00	-13.08	-24.20	Pass
4	0.5220	31.69	10.58	9.64	41.33	20.22	56.00	46.00	-14.67	-25.78	Pass
5	0.6180	25.78	5.82	9.64	35.42	15.46	56.00	46.00	-20.58	-30.54	Pass
6	1.1940	22.02	2.57	9.68	31.70	12.25	56.00	46.00	-24.30	-33.75	Pass

Note: 1. Result (dBuV) = Correction factor (dB) + Reading(dBuV).







Annex B. Conducted Test Results

20 dB Bandwidth Measurement

Test Mode	Mode 2	
Frequency	20 dB Bandwidth	Limited
(MHz)	(kHz)	(kHz)
433.92	4.875	1084.8

■ Test Graphs

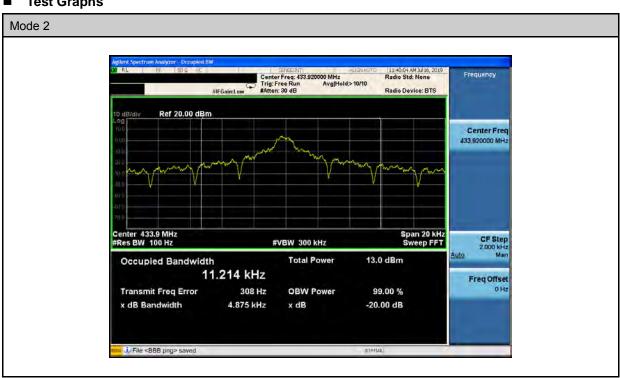







Annex C. Radiated Emissions Measurement


Duty Cycle Test Diagrams

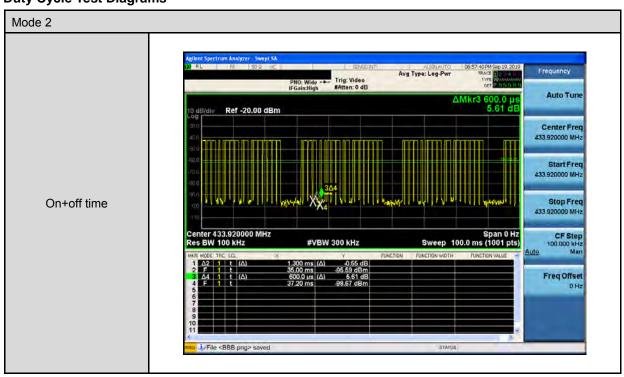





The EUT was complied with the requirement of FCC 15.231 (a) (1), which employed a switch that will automatically deactivate the transmitter within less than 5 seconds of being released.

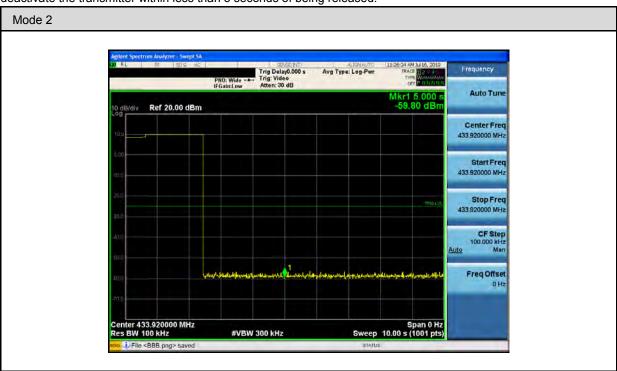


Duty Cycle Results

Test Mode	Mode 2		
	Item	Results	Note
Ton		63.6 ms	
Тр		100 ms	
Duty Cycle		0.636	
Averaging Factor (20 log * Duty Cycle)	-3.93	

Please see the diagrams below.

Note:

- 1. RB=100 kHz, VB=300 kHz, SPAN=0
- 2. Duty Cycle= Ton/Tp






Fundamental Frequency Test Results

 Standard:
 FCC Part 15.231
 Test Distance:
 3 m

 Test Mode:
 Mode 2
 Power:
 AC 120 V/60 Hz

Ant.Polar.: Horizontal Temp.(°ℂ)/Hum.(%RH): 26(°ℂ)/60 %RH

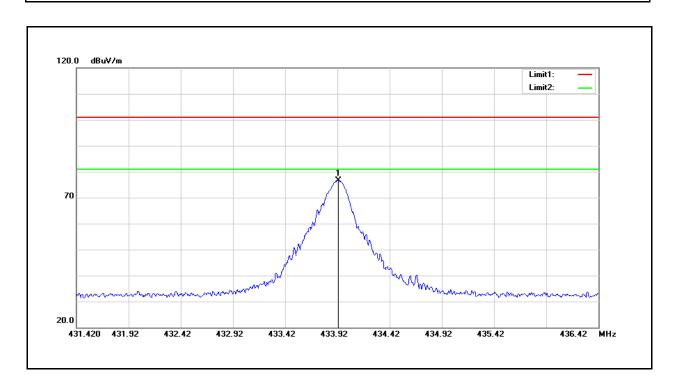

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m) (dBuV/m)		(dB)	
1	433.93	78.01	-1.38	76.63	100.83	-24.2	peak

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

Example: 76.63=-1.38+78.01.

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

No.	Frequency	Peak Result	Duty Factor	AVG Result	AVG Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	433.93	76.63	-3.93	72.70	80.83	-8.13	AVG

 $DutyCycle = Ton/Ton + off = (1.3 \ ms*42 + 0.6 \ ms*15)/100 \ ms = 0.636$

Duty Cycle Factor =20log (Duty Cycle)=20log(0.636)=-3.93 dB


Note: AVG Result (dBuV/m) =Peak Result (dBuV/m) + Duty Factor (dB)



Rev.01

Standard: FCC Part 15.231 Test Distance: 3 m

Test Mode: Mode 2 Power: AC 120 V/60 Hz Ant.Polar.: Vertical Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60 $^{\circ}$ RH

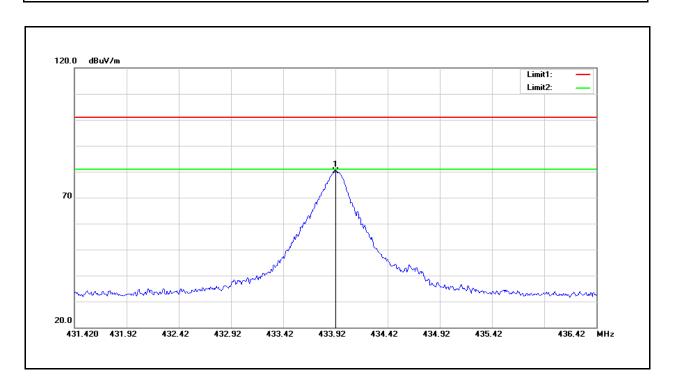

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	433.925	81.41	-1.38	80.03	100.83	-20.8	peak

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

Example: 76.63=-1.38+78.01.

2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

No.	Frequency	Peak Result	Duty Factor	AVG Result	AVG Limit	Margin	Remark
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
1	433.925	80.03	-3.93	76.10	80.83	-4.73	AVG

 $DutyCycle = Ton/Ton + off = (1.3 \ ms*42 + 0.6 \ ms*15)/100 \ ms = 0.636$

Duty Cycle Factor =20log (Duty Cycle)=20log(0.636)=-3.93 dB

Note: AVG Result (dBuV/m) =Peak Result (dBuV/m) + Duty Factor (dB)



Rev.01


Below 1 GHz

Standard: FCC Part 15.231			Test Distance:			3 m	
Test Mode:	Mode	e 1		Power:	AC 120 V/60 Hz		
				Temp.(°C)/H	lum.(%RH):	26(° ℃)/60 %	6RH
Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark	Ant.Polar.
(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)		H/V
140.5800	43.19	-6.39	36.80	43.50	-6.70	QP	Н
233.7000	34.33	-6.94	27.39	46.00	-18.61	QP	Н
419.9400	28.86	-1.73	27.13	46.00	-18.87	QP	Н
587.7500	28.95	1.78	30.73	46.00	-15.27	QP	Н
758.4700	29.74	5.12	34.86	46.00	-11.14	QP	Н
867.8400	33.47	6.75	40.22	46.00	-5.78	QP	Н
70.7400	41.34	-8.83	32.51	40.00	-7.49	QP	V
279.2900	37.28	-4.69	32.59	46.00	-13.41	QP	٧
350.1000	31.43	-3.20	28.23	46.00	-17.77	QP	٧
587.7500	28.90	1.78	30.68	46.00	-15.32	QP	V
718.7000	29.67	4.02	33.69	46.00	-12.31	QP	V
867.8400	38.22	6.75	44.97	46.00	-1.03	QP	V

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

Example: 64.35=-0.83+65.18

- 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When peak results are less than average limit, so not need to evaluate the average.






Above 1 GHz

Standard: FCC Part 15.231 Test Distance: 3 m

Test Mode: Mode 2 Power: AC 120 V/60 Hz

Ant.Polar.: Horizontal Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60 %RH

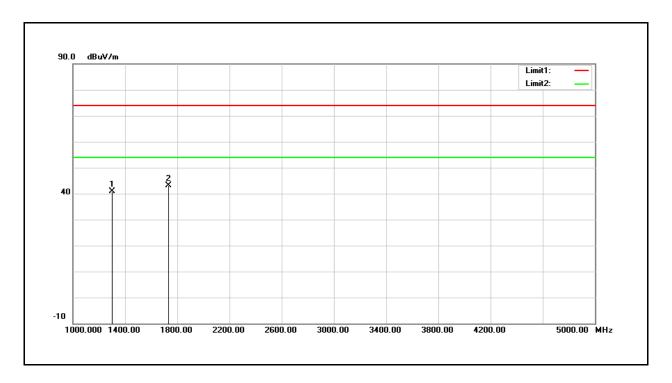


No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.760	46.32	-5.40	40.92	74.00	-33.08	peak
2	1735.680	46.74	-3.55	43.19	74.00	-30.81	peak

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

Example: 40.92=-5.40+46.32.

- 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When peak results are less than average limit, so not need to evaluate the average.






Standard: FCC Part 15.231 Test Distance: 3 m

Test Mode: Mode 2 Power: AC 120 V/60 Hz

Ant.Polar.: Vertical Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60 %RH

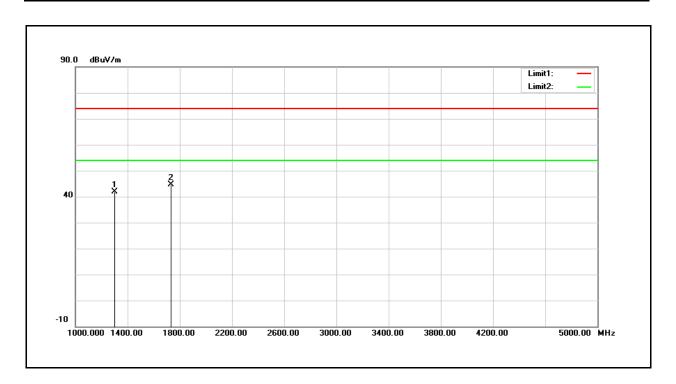


No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	1301.760	47.24	-5.40	41.84	74.00	-32.16	peak
2	1735.680	48.30	-3.55	44.75	74.00	-29.25	peak

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

Example: 41.84=-5.40+47.24.

- 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When peak results are less than average limit, so not need to evaluate the average.






Band Edge

Standard: FCC Part 15.231 Test Distance: 3 m

Test Mode: Mode 2 Power: AC 120 V/60 Hz


Ant.Polar.: Horizontal Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60 %RH

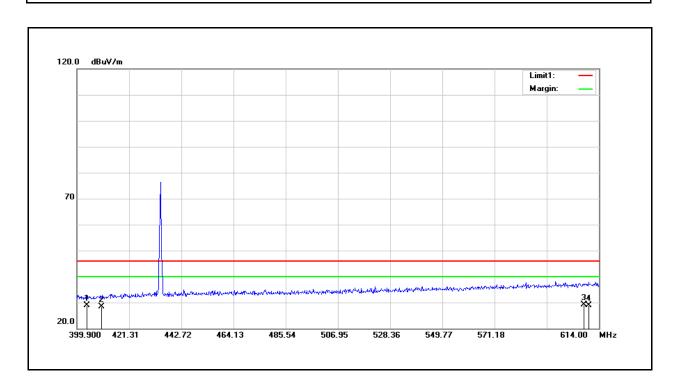

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	403.9678	31.08	-2.15	28.93	46.00	-17.07	QP
2	410.0000	30.35	-2.00	28.35	46.00	-17.65	QP
3	608.0000	26.72	2.29	29.01	46.00	-16.99	QP
4	609.7180	26.45	2.31	28.76	46.00	-17.24	QP

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

- 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When peak results are less than average limit, so not need to evaluate the average.






Standard: FCC Part 15.231 Test Distance: 3 m

Test Mode: Mode 2 Power: AC 120 V/60 Hz

Ant.Polar.: Vertical Temp.($^{\circ}$ C)/Hum.($^{\circ}$ RH): 26($^{\circ}$ C)/60 %RH

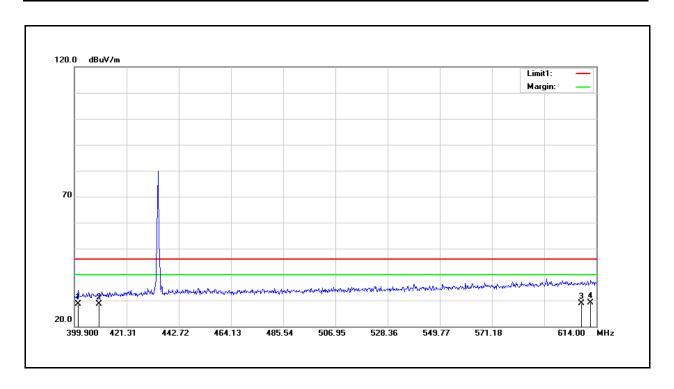

No.	Frequency	Reading	Correct Factor	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	401.3987	30.97	-2.23	28.74	46.00	-17.26	QP
2	410.0000	30.62	-2.00	28.62	46.00	-17.38	QP
3	608.0000	26.66	2.29	28.95	46.00	-17.05	QP
4	611.6450	26.78	2.33	29.11	46.00	-16.89	QP

Note: 1. Result (dBuV/m) = Correction factor (dB/m) + Reading(dBuV).

- 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) Pre-Amplifier gain (dB).
- 3. When peak results are less than average limit, so not need to evaluate the average.

--- END---