


## CGM System: Monitor Features

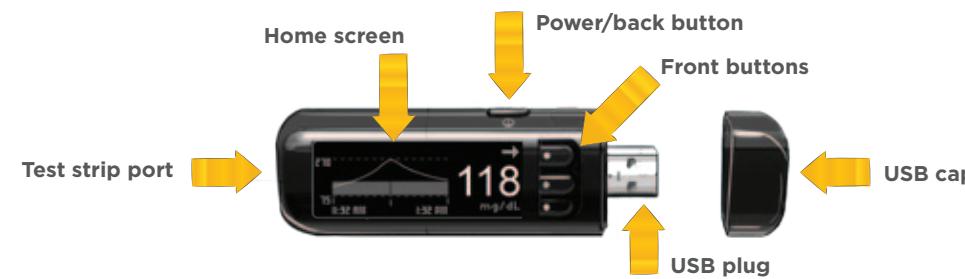

## CGM System: Monitor Charging

Charge your monitor every day.

**1. Remove the protective cap from the USB plug on the monitor.**



**2. Insert the monitor's USB plug into the wall adapter.**



**3. Plug the wall adapter into an outlet.**

**- The orange light on the test strip port will blink while it is charging.**

**- The light will turn off after it has a full charge.**

## CGM System: Pairing the Monitor and Transmitter


**1. Press and hold the power/back button for 2 seconds to turn on the monitor.**



**2. Lift to remove the fully charged transmitter from its charging unit.**



**3. Wait for the monitor to find the transmitter (it may take as long as one minute).**

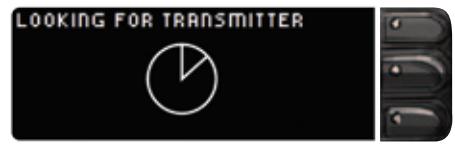

**4. Use the UP and DOWN buttons to find the number on the monitor screen that matches the number on the top of the charged transmitter, and press OK.**



**5. Wait for the monitor to connect to the transmitter.**



### 1 Warnings:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


### 2 Caution:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

## CGM System: Wearing a Sensor

Use the monitor screens to help guide you.


1. Remove the sensor guide from its sterile packaging and insert the transmitter into its slot in the sensor guide.

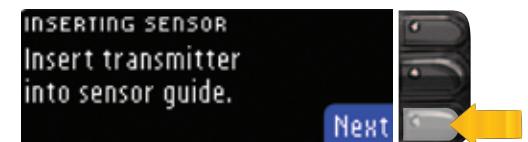

2. Turn the sensor assembly over and remove the adhesive liner before putting the sensor assembly on your skin.



3. Insert the sensor (a CLICK sound means the sensor was inserted).

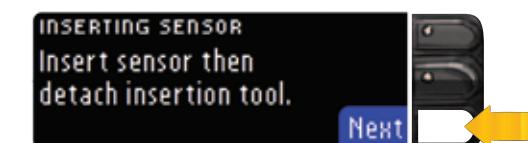

Once you have inserted a new sensor, you must wait 1 hour for the sensor to stabilize before you can calibrate it.

### Warnings:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:  
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## CGM System: Calibrating a Sensor

In order for the monitor to properly display your glucose levels, it must be calibrated with fingertip testing at least every 12 hours.

1. Choose to calibrate now or later.

- If you are ready to calibrate, press YES and insert a test strip.



2. After performing a prick of the tip of your finger, touch the tip of the test strip to the drop of blood and hold it there until the monitor beeps and shows "Accepted"



3. Read your fingertip test result.

- If you want to use this result to calibrate your monitor, press YES. If you do not wish to use it to calibrate, press NO.



4. Your continuous glucose reading will appear on the Home screen within 5 minutes of calibrating.



### Caution:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.