# **SAR Test Report**

Report No.: AGC07B120201-1S1

**FCC ID** : VO6IP-607

Product Designation : Handheld two way radio

Brand Name : KYD, SYD

test model : IP-607

Client CHINA NEW CENTURY(QUANZHOU) COMMUNICATION

ELECTRONICS CO., LTD

Date of Issue : Mar. 30, 2012

STANDARD(S) FCC Oet65 Supplement C June 2001 IEEE Std. 1528-2003,47CFR § 2.1093

# Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 2 of 68

Test Report Certification			
Applicant Name	:	CHINA NEW CENTURY(QUANZHOU) COMMUNICATION ELECTRONICS CO., LTD	
Applicant Address	:	No. 1 Fengshou Road, Quanzhou City, Fujian Province, China	
Manufacturer Name	:	CHINA NEW CENTURY(QUANZHOU) COMMUNICATION ELECTRONICS CO., LTD	
Manufacturer Address	:	No. 1 Fengshou Road, Quanzhou City, Fujian Province, China	
Product Name		Handheld two way radio	
Brand Name		KYD	
Model Name	:	IP-607	
EUT Voltage	:	DC 7.4V by battery	
Applicable Standard	:	FCC Oet65 Supplement C June 2001 IEEE Std. 1528-2003,47CFR § 2.1093	
Test Date	:	Mar. 29, 2012	
Test Results		MAX SAR MEASUREMENT(1g) Head:3.979 W/Kg (with 50% duty cycle)	
		Body: <b>4.244</b> W/Kg (with 50% duty cycle)	
Doubours ad Location		Attestation of Global Compliance Co.(Shenzhen), Ltd.	
Performed Location	•	1F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen	

Tested By

Angela Li

Angela li

Mar. 30, 2012

Checked By

Forrest Lei

Mar. 30, 2012

Authorized By

Solger Zhang

Mar. 30, 2012

Report No.: AGC07B120201-1S1 Page 3 of 68

# **TABLE OF CONTENTS**

1. GENERAL INFORMATION	5
1.1. EUT DESCRIPTION	5
1.2. TEST PROCEDURE	5
1.3. TEST ENVIRONMENT	5
2. SAR MEASUREMENT SYSTEM	6
2.1. COMOSAR SYSTEM DESCRIPTION	6
2.1.2. AREA SCANS	7
2.1.3. ZOOM SCAN (CUBE SCAN AVERAGING)	7
2.2.1. ISOTROPIC E-FIELD PROBE SPECIFICATION	8
2.3. BOUNDARY DETECTION UNIT AND PROBE MOUNTING DEVICE	8
2.4. DATA ACQUISITION ELECTRONICS (DAE) AND MEASUREMENT SERVER	g
2.5 ROBOT	8
2.6. VIDEO POSITIONING SYSTERM	9
2.7. DEVICE HOLDER	g
2.8. ELLIPTICAL PHANTOM	10
3. TISSUE SIMULATING LIQUID	11
3.1. THE COMPOSITION OF THE TISSUE SIMULATING LIQUID	11
3.2. TISSUE CALIBRATION RESULT	11
3.3. TISSUE DIELECTRIC PARAMETERS FOR HEAD AND BODY PHANTOMS	12
4. SAR MEASUREMENT PROCEDURE	13
4.1. SAR SYSTEM VALIDATION	13
4.1.1. VALIDATION DIPOLES	13
4.1.2. VALIDATION RESULT	14
4.2. SAR MEASUREMENT PROCEDURE	15
5. SAR EXPOSURE LIMITS	16
6. TEST EQUIPMENT LIST	17
7. MEASUREMENT UNCERTAINTY	18
8. CONDUCTED POWER MEASUREMENT	19

Page 4 of 68

9. TEST RESULTS	20
9.1. SAR TEST RESULTS SUMMARY	20
9.1.1. TEST POSITION AND CONFIGURATION	20
9.1.2. OPERATION MODE	20
9.1.3. CO-LOCATED SAR	20
9.1.4. TEST RESULT	21
APPENDIX A. SAR SYSTEM VALIDATION DATA	22
APPENDIX B. SAR MEASUREMENT DATA	25
APPENDIX C. TEST SETUP PHOTOGRAPHS &EUT PHOTOGRAPHS	41
APPENDIX D. PROBE CALIBRATION DATA	<b>4</b> 4
APPENDIX E. DIPOLE CALIBRATION DATA	59

Page 5 of 68

# 1. General Information

1.1. EUT Description

1.1. EUT Description			
Product Name	Handheld two way radio		
Model No.	IP-607		
Hardware Version	UVD-100A-3		
Exposure Category:	Occupational/Controlled Exposure		
Device Category	FM UHF Portable Transceiver		
Modulation Type	FM		
TX Frequency Range	400-470MHz		
Rated Power	5 Watt		
Maximum Peak Power	36.65Conducted / E.R.P. 34.21 dBm		
Channel Spacing	12.5 kHz		
Antenna Type	External Antenna		
Antenna Gain	2.15dBi		
Body-Worn Accessories:	Belt Clip		
Face-Head Accessories:	None		
Battery Type (s) Tested:	7.4 V dc Rechargeable Li-On Battery		

Note: The sample used for testing is end product.

# 1.2. Test Procedure

1	Setup the EUT for two typical configuration of hold to face and body worn individually		
2	Power on the EUT and make it continuously transmitting on required operating channel		
3	Make sure the EUT work normally during the test		

# 1.3. Test Environment


Ambient conditions in the laboratory:

Items	Required	Actual
Temperature (°C)	18-25	21 ± 2
Humidity (%RH)	30-70	56

Page 6 of 68

# 2. SAR Measurement System

# 2.1. COMOSAR System Description

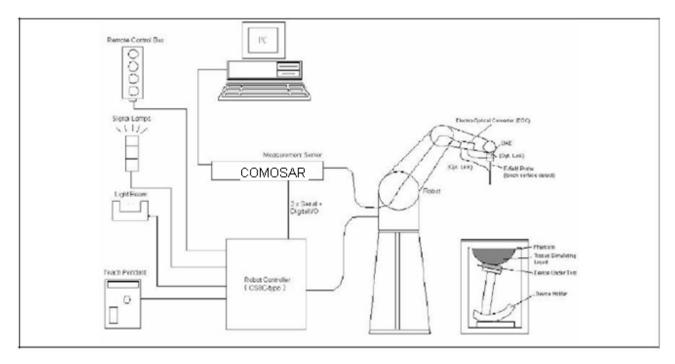

The COMOSAR system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot with controller, teach pendant and software.

An arm extension for accommodating the data acquisition electronics (DAE).

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection,

collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.

The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.

A computer running WinXP and the Opensar software.

Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.

The phantom, the device holder and other accessories according to the targeted measurement.

# 2.1.1. Applications

Predefined procedures and evaluations for automated compliance testing with all worldwide standards, e.g., IEEE 1528, OET 65, IEC 62209-1, IEC 62209-2, EN 50360, EN 50383 and others.

Page 7 of 68

#### 2.1.2. Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm<sup>2</sup> step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan).

## 2.1.3. Zoom Scan (Cube Scan Averaging)

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10mm, with the side length of the 10 g cube 21,5mm.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 7x7x7 (5mmx5mmx5mm) providing a volume of 30mm in the X & Y axis, and 30mm in the Z axis.

#### 2.1.4. Uncertainty of Inter-/Extrapolation and Averaging

In order to evaluate the uncertainty of the interpolation, extrapolation and averaged SAR calculation algorithms of the Post processor, COMOSAR allows the generation of measurement grids which are artificially predefined by analytically based test functions. Therefore, the grids of area scans and zoom scans can be filled with uncertainty test data, according to the SAR benchmark functions of IEEE 1528. The three analytical functions shown in equations as below are used to describe the possible range of the expected SAR distributions for the tested handsets. The field gradients are covered by the spatially flat distribution f1, the spatially steep distribution f3 and f2 accounts for H-field cancellation on the phantom/tissue surface.

$$f_1(x,y,z) = Ae^{-\frac{z}{2a}}\cos^2\left(\frac{\pi}{2}\frac{\sqrt{x'^2 + y'^2}}{5a}\right)$$

$$f_2(x,y,z) = Ae^{-\frac{z}{a}}\frac{a^2}{a^2 + x'^2}\left(3 - e^{-\frac{2z}{a}}\right)\cos^2\left(\frac{\pi}{2}\frac{y'}{3a}\right)$$

$$f_3(x,y,z) = A\frac{a^2}{\frac{a^2}{4} + x'^2 + y'^2}\left(e^{-\frac{2z}{a}} + \frac{a^2}{2(a+2z)^2}\right)$$

Page 8 of 68

#### 2.2. COMOSAR E-Field Probe

The SAR measurement is conducted with the dissymmetric probe manufactured by SPEAG.

The probe is specially designed and calibrated for use in liquid with high permittivity. The dissymmetric probe has special calibration in liquid at different frequency.

SPEAG conducts the probe calibration in compliance with international and national standards (e.g. IEEE 1528, EN62209-1, IEC 62209, etc.) Under ISO17025. The calibration data are in Appendix D.

## 2.2.1. Isotropic E-Field Probe Specification

Model	SSE5		
Manufacture	Satimo		
frequency	0.1 GHz-3 GHz		
	Linearity:±0.2dB(100 MHz-3 GHz)		
Dynamic	0.01W/Kg-100W/Kg		
Range	Linearity:±0.2dB		
Dimensions	Overall length:330mm		
	Length of individual dipoles:4.5mm		
	Maxmum external diameter:8mm		
	Probe Tip external diameter:5mm		
	Distance between dipoles/ probe		
	extremity:2.7mm		
Application	High precision dosimetric measurements in any exposure scenario		
	(e.g., very strong gradient fields). Only probe which enables		
	compliance testing for frequencies up to 3 GHz with precision of better		
	30%.		

#### 2.3 Robot

The COMOSAR system uses the high precision robots TX90 XL type out of the newer series from Satimo SA (France). For the 6-axis controller COMOSAR system, the KUKA robot controller version from Satimo is used.

The XL robot series have many features that are important for our application:

High precision (repeatability 0.02 mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic

construction shields against motor control fields)

6-axis controller



Page 9 of 68

# 2.4. Video Positioning Systerm

The video positioning system is used in OpenSAR to check the probe. Which is composed of a camera, LED, mirror and mechanical parts. The camera is piloted by the main computer with firewire link.

During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.




#### 2.5. Device Holder

The COMOSAR device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The COMOSAR device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon r$  =3 and loss tangent  $\delta$  = 0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

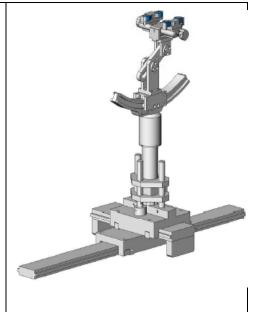

Report No.: AGC07B120201-1S1 Page 10 of 68

# 2.6. Elliptic Phantom

The Elliptic Phantom is a fiberglass shell flat phantom with 2mm+/- 0.2 mm shell thickness. It has only one measurement area for Flat phantom



Page 11 of 68

# 3. Tissue Simulating Liquid

# 3.1. The composition of the tissue simulating liquid

Ingredient (% Weight)	450 MHz		
Tissue Type	Head	Body	
Water	38.56	51.16	
Salt (NaCl)	3.95	1.49	
Sugar	56.32	46.78	
HEC	0.98	0.52	
Bactericide	0.19	0.05	
Triton X-100	0.0	0.0	
DGBE	0.0	0.0	

# 3.2. Tissue Calibration Result

The dielectric parameters of the liquids were verified prior to the SAR evaluation using COMOSAR Dielectric Probe Kit and R&S Network Analyzer ZVL6.

Head Tissue Stimulant Measurement					
Frequency (MHz)	Description	Dielectric F	Tissue Temp [°C]		
450 MHz	Reference result ±5% window	εr 43.50 41.33 - 45.67	δ[s/m] 0.87 0.83 - 0.91	N/A	
	Mar.29,2012	43.26	0.88	21.0	

Body Tissue Stimulant Measurement					
Frequency (MHz)  Description  Dielectric Parameters				Tissue Temp [°C]	
450 MHz	Reference result ±5% window	εr 56.70 53.87 – 59.53	δ[s/m] 0.94 0.89 - 0.98	N/A	
	Mar.29,2012	57.35	0.91	21.0	

Page 12 of 68

# 3.3. Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations described in Reference [12] and extrapolated according to the head parameters specified in P1528.

Target Frequency	head		body	
(MHz)	εr	σ (S/m)	εr	σ (S/m)
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00


(  $\varepsilon$  r = relative permittivity,  $\sigma$  = conductivity and  $\rho$  = 1000 kg/m<sub>3</sub>)

Page 13 of 68

# 4. SAR Measurement Procedure

# 4.1. SAR System Validation

# 4.1.1. Validation Dipoles

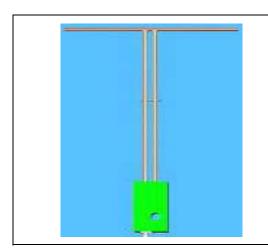

The dipoles used is based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. the table below provides details for the mechanical and electrical Specifications for the dipoles.

Frequency	L (mm)	h (mm)	d (mm)
450MHz	290	166.7	6.35

Page 14 of 68

# 4.1.2. Validation Result

System Performance Check at 450 MHz for Head Liquid					
Validation Kit: SN 46/11 DIP 0G450-184					
Frequency	Description	SAR [w/kg] 1g	SAR [w/kg] 10g	Tissue Temp.[°C]	
450 MHz	Reference result ± 10% window	4.58 4.12 to 5.03	3.06 2.754 to 3.366	N/A	
	Mar. 29, 2012	4.82	2.96	21.0	

Note: All SAR values are normalized to 1W forward power.

Page 15 of 68

#### 4.2. SAR Measurement Procedure

The COMOSAR calculates SAR using the following equation,

$$SAR = \frac{\sigma |E|^2}{\rho}$$

σ: represents the simulated tissue conductivity

ρ: represents the tissue density

The EUT is set to transmit at the required power in line with product specification, at each frequency relating to the LOW, MID, and HIGH channel settings.

Pre-scans are made on the device to establish the location for the transmitting antenna, using a large area scan in either air or tissue simulation fluid.

The EUT is placed against the Universal Phantom where the maximum area scan dimensions are larger than the physical size of the resonating antenna. When the scan size is not large enough to cover the peak SAR distribution, it is modified by either extending the area scan size in both the X and Y directions, or the device is shifted within the predefined area.

The area scan is then run to establish the peak SAR location (interpolated resolution set at 1mm²) which is then used to orient the center of the zoom scan. The zoom scan is then executed and the 1g and 10g averages are derived from the zoom scan volume (interpolated resolution set at 1mm³).

When multiple peak SAR locations were found during the same configuration or test mode, Zoom scan shall performed on each peak SAR location, only the peak point with maximum SAR value will be reported for the configuration or test mode.

Page 16 of 68

# 5. SAR Exposure Limits

SAR assessments have been made in line with the requirements of IEEE-1528, FCC Supplement C, and comply with ANSI/IEEE C95.1-1992 "Uncontrolled Environments" limits. These limits apply to a location which is deemed as "Uncontrolled Environment" which can be described as a situation where the general public may be exposed to an RF source with no prior knowledge or control over their exposure.

# Limits for General Population/Uncontrolled and Occupational Environment

Type Exposure Limits	General Population / Uncontrolled Environment Limit (W/Kg)	Occupational / Controlled Exposure Environment (W/Kg)
Spatial Peak SAR (1g cube tissue for brain or body)	0.08	0.4
Spatial Average SAR (whole body)	1.6	8.0
Spatial Peak SAR (10g for hands, feet, ankles and wrist)	4.00	20.0

Page 17 of 68

# 6. Test Equipment List

Equipment description	Manufacturer/Mo del	Identification No.	Current calibration date	Next calibration date	
SAR Probe	Satimo	SN_3511_EP132	12/09/2011	12/08/2012	
Elliptical Phantom	Satimo	SN_4511_EP	Validated. No cal required.	Validated. No cal required.	
Liquid	Satimo	-	Validated. No cal required.	Validated. No cal required.	
Comm Tester	R&S - CMU200	069Y7-158-13-712	12/09/2011	12/08/2012	
Multimeter	Keithley 2000	1188656	12/09/2011	12/08/2012	
Dipole	Satimo SID450	SN46/11 DIP 0G450-184	12/09/2011	12/08/2014	
Amplifier	Amplifier Aethercomm		12/09/2011	12/08/2012	
Power Meter	HP E4418A	US38261498	12/09/2011	12/08/2012	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	12/09/2011	12/08/2012	

Note: Per KDB 50824 Dipole SAR Validation Verification, AGC Lab has adopted 3 years calibration intervals. On annual basis, every measurement dipole has been evaluated and is in compliance with the following criteria:

- 1. There is no physical damage on the dipole;
- 2. System validation with specific dipole is within 10% of calibrated value;
- 3. Return-loss is within 20% of calibrated measurement;
- 4. Impedance is within  $5\Omega$  of calibrated measurement.

Page 18 of 68

# 7. Measurement Uncertainty

Satimo Uncertainty									
Measure	ement unce	ertainty for	300 MHz	to 3 G	Hz averaged	l over 1 grar	n / 10 gram.		
Error Description	Sec	Tol	Prob.	Div.	(Ci)	(Ci)	Std.	Std.	(Vi)
		(±%)	Dist.		1g	10g	Unc.	Unc.	Veff
							(1g) (±%)	(10g)(±%)	
Measurement System			-1	•			•	•	
Probe Calibration	E.2.1	6	N	1	1	1	6	6	00
Axial Isotropy	E.2.2	3	R	√3	$(1-c_p)^{1/2}$	$(1-c_p)^{1/2}$	1.22474	1.22474	00
Hemispherical Isotropy	E.2.2	5	R	$\sqrt{3}$	√C <sub>p</sub>	√Cp	2.04124	2.04124	00
Boundary Effects	E.2.3	1	R	√3	1	1	0.57735	0.57735	00
Linearity	E.2.4	5	R	√3	1	1	2.88675	2.88675	00
System Detection Limits	E.2.5	1	R	√3	1	1	0.57735	0.57735	00
ReadoutElectronics	E.2.6	0.5	N	1	1	1	0.5	0.5	00
Response Time	E.2.7	0.2	R	√3	1	1	0.11547	0.11547	00
Integration Time	E.2.8	2	R	√3	1	1	1.1547	1.1547	00
RF Ambient Noise	E.6.1	3	R	√3	1	1	1.73205	1.73205	00
Probe Positioner	E.6.2	2	R	√3	1	1	1.1547	1.1547	00
Mechanical Tolerance									
Probe Positioning with	E.63	1	R	√3	1	1	0.57735	0.57735	00
Respect to Phantom Shell									
Extrapolation,interpolation	E.5.2	1.5	R	√3	1	1	0.86603	0.86603	00
and Integration Algorithms									
for Max. SAR Evaluation									
Dipole		_	1	1	,		T	T	r
Device Positioning	8,E.4.2	1	N	√3	1	1	0.57735	0.57735	N-1
Power Drift	8.6.6.2	2	R	√3	1	1	1.1547	1.1547	00
Phantom and Tissue									
Parameters			T		T	1	T	T	T
Phantom Uncertainty	E.3.1	4	R	√3	1	1	2.3094	2.3094	00
Liquid Conductivity (target)	E.3.2	5	R	√3	0.64	0.43	1.84752	1.2413	00
Liquid Conductivity (meas.)	E.3.3	2.5	N	1	0.64	0.43	1.6	1.075	00
Liquid Permittivity (target)	E.3.2	3	R	√3	0.6	0.49	1.03923	0.8487	00
Liquid Permittivity (meas.)	E.3.3	2.5	N	1	0.6	0.49	1.5	1.225	М
Combined Standard			RSS				8.09272	7.9296	
Uncertainty									
Expanded Uncertainty			k				16.18544	15.8592	
(95%CONFIDENCE									
INTERVAL)									

Page 19 of 68

# 8. Conducted Power Measurement

F		Measured Conducted Output power				
Frequency	Channel Spacing	Max. Peak Power	Ave. Power			
(MHz)		(dBm)	(dBm)			
400.025		36.53	33.54			
435.05	12.5	36.58	32.72			
469.975		36.65	33.65			

Page 20 of 68

# 9. Test Results

# 9.1. SAR Test Results Summary

# 9.1.1. Test position and configuration

Head SAR was performed with the device configured in the positions according to KDB64 and Body SAR was performed with the device configurated with all accessories close to the Flat Phantom.

# 9.1.2. Operation Mode

Set the EUT to maximum output power level and transmit on lower, middle and top channel with 100% duty cycle individually during SAR measurement.

## 9.1.3. Co-located SAR

The following KDB was used for assessing this device. KDB 447498, KDB 643646 and KDB450824

Page 21 of 68

## 9.1.4. Test Result

Ambient Temperature (°C): 21 ±2

Liquid Temperature (°C): 21 ±2

Depth of Liquid (cm):>15

Product: Handheld Two way Radio

Test Mode: Hold to Face with 2.5 cm separation

Test	Frequency				SAR 1g with 100% duty	SAR 1g with 50% duty	Limit	
Position	channel	MHz	Separation (KHz)	Power (dBm)	Drift (±0.2dB)	Cycle (W/kg)	cycle (W/Kg)	(W/kg)
Face Up	Low	400.025	12.5	33.54	-0.04	2.319	1.160	8.0
Face Up	Middle	435.05	12.5	32.72	-0.01	7.958	3.979	8.0
Face Up	Тор	469.975	12.5	33.65	-0.05	4.834	2.417	8.0

Note: when the 1-g SAR of middle channel is  $\leq$  3.5 W/kg, testing for other channel is optional. refer to KDB 643646.

SAR MEASUREMENT	
Ambient Temperature (°C): 21 ±2	Relative Humidity (%): 52
Liquid Temperature (°C): 21 ±2	Depth of Liquid (cm):>15

Product: Handheld Two way Radio

Test Mode: Body worn with all accessories

Test	Frequency		Ave.	Power	SAR 1g with 100% duty	SAR 1g with 50% duty	Limit	
Position	channel	MHz	Separation (KHz)	Power (dBm)	Drift (±0.2dB)	Cycle (W/kg)	cycle (W/Kg)	(W/kg)
Back Touch	Low	400.025	12.5	33.54	-0.03	2.163	1.082	8.0
Back Touch	Middle	435.05	12.5	32.72	-0.01	4.244	4.244	8.0
Back Touch	Тор	469.975	12.5	33.65	-0.02	3.425	3.425	8.0

Note: when the 1-g SAR of middle channel is  $\leq$  3.5 W/kg, testing for other channel is optional. refer to KDB 643646.

Page 22 of 68

# Appendix A. SAR System Validation Data

Test Laboratory: AGC Lab System Check Head 450MHz

DUT: Dipole 450 MHz Type: IP-607 Test date: Mar. 29, 2012

Communication System: CW; Communication System Band: CW 450.0 MHz; Duty Cycle: 1:1; ConvF=6.06 Frequency: 450 MHz; Medium parameters used: f = 450 MHz;  $\sigma = 0.88$  mho/m;  $\epsilon r = 43.26$ ;  $\rho = 1000$  kg/m³;

Phantom Type:Elliptical Phantom; Input Power=20dBm

Ambient temperature ( $^{\circ}$ C): 21.0, Liquid temperature ( $^{\circ}$ C): 21.0

Probe:SSE5; Calibrated: 12/09/2011

· Sensor-Surface: 4mm (Mechanical Surface Detection)


· Phantom: Flat Phantom; Type: Elliptical Phantom

Measurement SW: OpenSAR V4\_02\_01

Configuration/System Check CW 450 MHz Head/Area Scan: Measurement grid: dx=8mm, dy=8mm


Configuration/System Check CW 450 MHz Head/Zoom Scan : Measurement grid: dx=8mm, dy=8mm, dz=5mm, Power Drift = -0.02 dB

Page 23 of 68

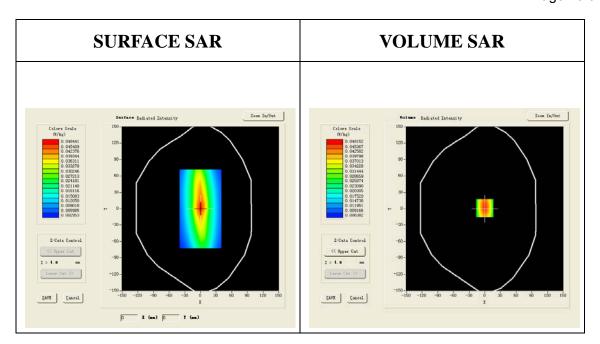

Maximum location: X=0.00, Y=1.00

SAR 10g (W/Kg)	0.029552
SAR 1g (W/Kg)	0.045734

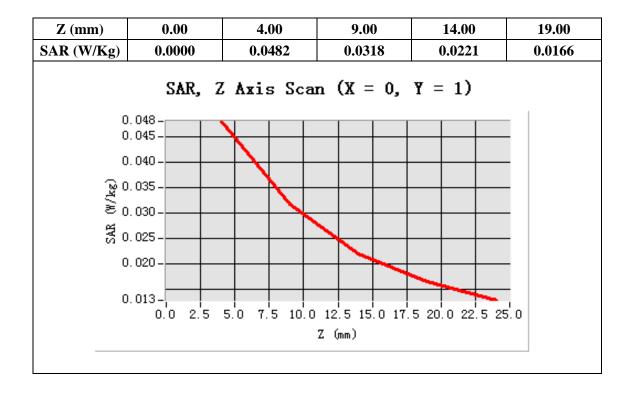

Report No.: AGC07B120201-1S1 Page 24 of 68



Page 25 of 68

# Appendix B. SAR measurement Data

Test Laboratory: AGC Lab

CW450 Low-Head

DUT: Handheld Two Way Radio; Type: IP-607 Test date: Mar. 29, 2012

Communication System: CW; Communication System Band: CW 400.05 MHz; Duty Cycle: 1:1; ConvF=6.06

Frequency: 400.05 MHz; Medium parameters used: f = 450 MHz;  $\sigma = 0.88$  mho/m;  $\epsilon r = 43.26$ ;

 $\rho$  = 1000 kg/m<sup>3</sup>; Phantom Type: Elliptical Phantom

Ambient temperature ( $^{\circ}$ C): 21.5, Liquid temperature ( $^{\circ}$ C): 21.0

Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011

Sensor-Surface: 4mm (Mechanical Surface Detection)

Phantom: Flat Phantom; Type: Elliptical Phantom

Measurement SW: OpenSAR V4\_02\_01


Configuration/CW 450/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm

Configuration/CW 450/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm, Power Drift = -0.04 dB


Area Scan	ep_direct_droit2_surf8mm.txt	
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast	
Phantom	Elliptical Phantom	
Device Position	Face up 2.5 cm separation to Phantom	
Band	CW 400.05	
Channels	Low	
Signal	Crest factor: 1	

Report No.: AGC07B120201-1S1 Page 26 of 68

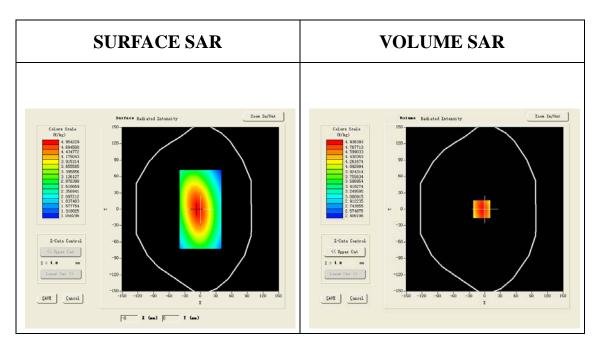


Maximum location: X=-6.00, Y=0.00

SAR 10g (W/Kg)	1.648024
SAR 1g (W/Kg)	2.239347

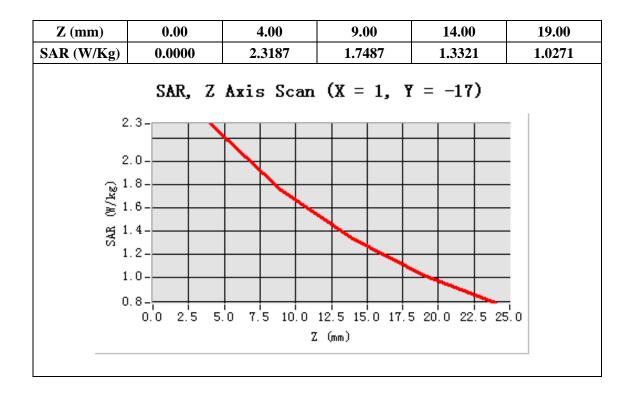

Report No.: AGC07B120201-1S1 Page 27 of 68

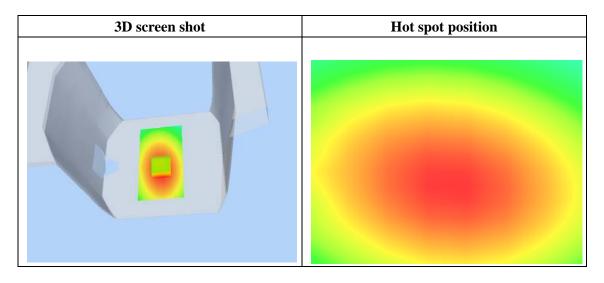

Page 28 of 68

Test Laboratory: AGC Lab CW450 Middle-Head

DUT: Handheld Two Way Radio ; Type: IP-607 Test date: Mar. 29, 2012

Communication System: CW; Communication System Band: CW 435.02 MHz; Duty Cycle: 1:1; ConvF=6.06

Frequency: 435.02 MHz; Medium parameters used: f = 450 MHz;  $\sigma = 0.88$  mho/m;  $\epsilon r = 43.26$ ;

 $\rho = 1000 \text{ kg/m}^3$ ; Phantom Type: Elliptical Phantom

Ambient temperature (°C): 21.5, Liquid temperature (°C): 21.0

# Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom


· Measurement SW: OpenSAR V4\_02\_01

Configuration/CW 450 Mid/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm

Configuration/CW 450 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm; Power Drift = -0.01 dB


Area Scan	ep_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Elliptical Phantom
Device Position	Face up 2.5 cm separation to Phantom
Band	CW 435.02
Channels	Middle
Signal	Crest factor: 1

Page 29 of 68

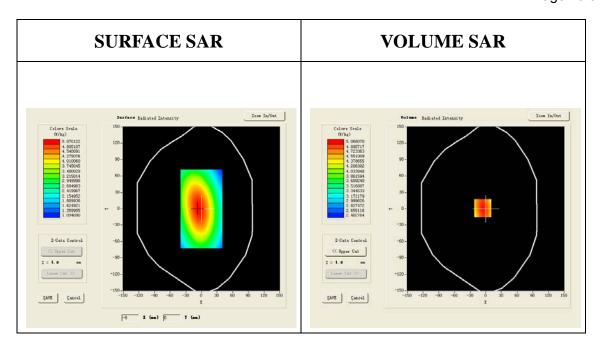

Maximum location: X=-6.00, Y=1.00

SAR 10g (W/Kg)	5.617135
SAR 1g (W/Kg)	7.684575

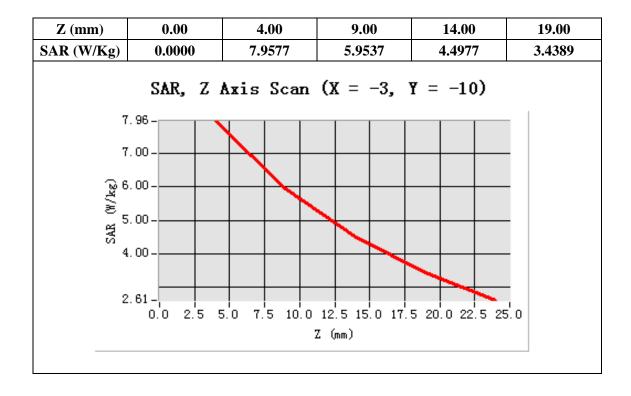

Report No.: AGC07B120201-1S1 Page 30 of 68



Page 31 of 68

Test Laboratory: AGC Lab

CW450 High-Head

DUT: Handheld Two Way Radio ; Type: IP-607 Test date: Mar. 29, 2012

Communication System: CW; Communication System Band: CW 435.02 MHz; Duty Cycle: 1:1; ConvF=6.06

Frequency: 435.02 MHz; Medium parameters used: f = 450 MHz;  $\sigma = 0.88$  mho/m;  $\epsilon r = 43.26$ 

 $\rho = 1000 \text{ kg/m}^3$ ; Phantom Type: Elliptical Phantom

Ambient temperature ( $^{\circ}$ C): 21.5, Liquid temperature( $^{\circ}$ C): 21.0

## Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01


Configuration/CW 450 Mid/Area Scan: Measurement grid: dx=20mm, dy=20mm

Configuration/CW 450 Mid/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm,

Power Drift = -0.01 dB


Area Scan	ep_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Elliptical Phantom
Device Position	Face up 2.5 cm separation to Phantom
Band	CW 435.02
Channels	Тор
Signal	Crest factor: 1

Page 32 of 68

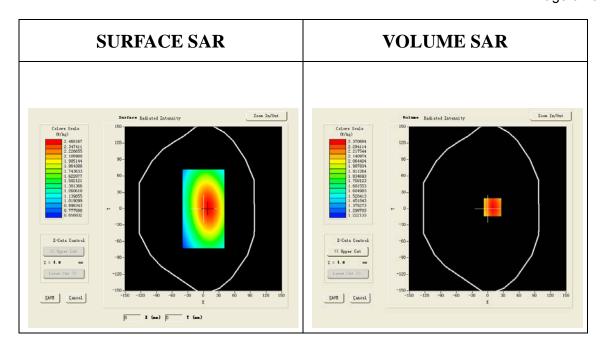

Maximum location: X=9.00, Y=3.00

SAR 10g (W/Kg)	3.422599
SAR 1g (W/Kg)	4.666744

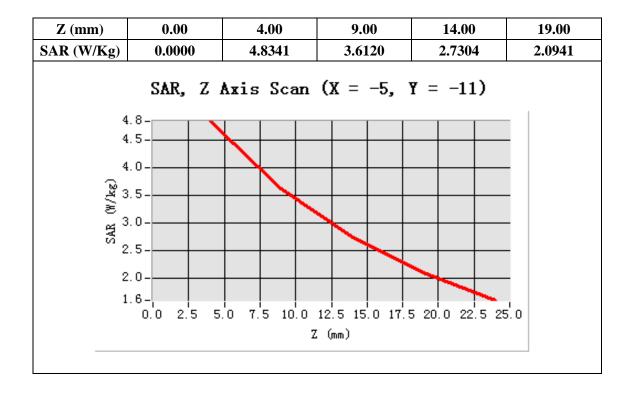

Report No.: AGC07B120201-1S1 Page 33 of 68



Page 34 of 68

Test Laboratory: AGC Lab

CW450 Low-Body

DUT: Handheld Two Way Radio ; Type: IP-607 Test date: Mar. 29, 2012

Communication System: CW; Communication System Band: CW 435.02 MHz; Duty Cycle: 1:1; ConvF=6.06

Frequency: 435.02 MHz; Medium parameters used: f = 450 MHz;  $\sigma = 0.91$  mho/m;  $\epsilon r = 57.35$ ;

 $\rho$  = 1000 kg/m<sup>3</sup>; Phantom Type: Elliptical Phantom

Ambient temperature ( $^{\circ}$ C): 21.5, Liquid temperature( $^{\circ}$ C): 21.0

## Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01


Configuration/CW 450 Mid/Area Scan: Measurement grid: dx=20mm, dy=20mm

Configuration/CW 450 Mid/Zoom Scan: Measurement grid: dx=8mm,dy=8mm, dz=5mm,

Power Drift = -0.01 dB


Area Scan	ep_direct_droit2_surf8mm.txt
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast
Phantom	Elliptical Phantom
Device Position	Back close to Phantom with Accessories
Band	CW 435.02
Channels	Low
Signal	Crest factor: 1

Page 35 of 68

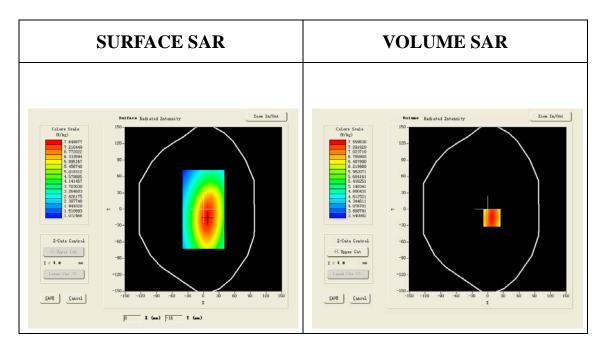


**Maximum location: X=8.00, Y=-16.00** 

SAR 10g (W/Kg)	1.536397
SAR 1g (W/Kg)	2.088730

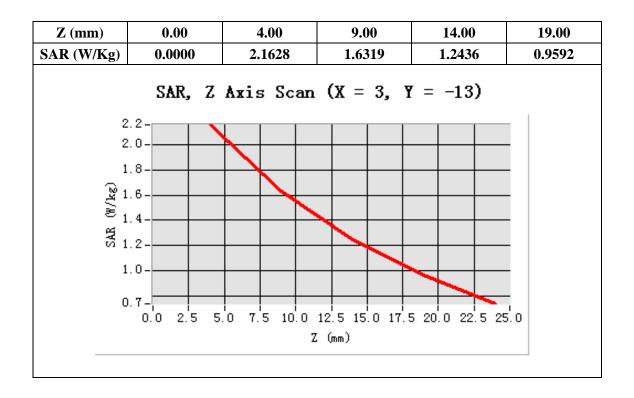

Report No.: AGC07B120201-1S1 Page 36 of 68

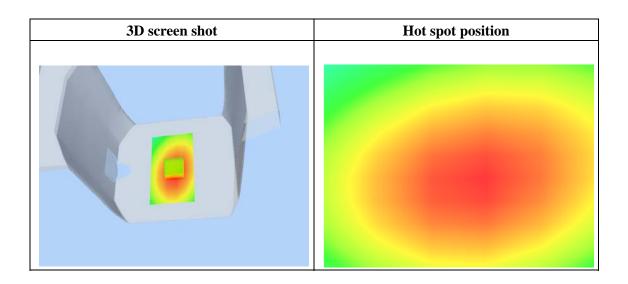

Page 37 of 68

Test Laboratory: AGC Lab CW450 Middle-Body

DUT: Handheld Two Way Radio ; Type: IP-607 Test date: Mar. 29, 2012

Communication System: CW; Communication System Band: CW 469.965 MHz; Duty Cycle: 1:1; ConvF=6.06

Frequency: 469.965 MHz; Medium parameters used: f = 450 MHz;  $\sigma = 0.91$  mho/m;  $\epsilon r = 57.35$ ;

 $\rho = 1000 \text{ kg/m}^3$ ; Phantom Type: Elliptical Phantom

Ambient temperature ( $^{\circ}$ C): 21.5, Liquid temperature( $^{\circ}$ C): 21.0

# Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011

Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01


Configuration/CW 450 Top/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm

Configuration/CW 450 Top/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm; Power Drift = -0.03 dB


Area Scan	ep_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Elliptical Phantom			
Device Position	Back close to Phantom with Accessories			
Band	CW 469.965			
Channels	Middle			
Signal	Crest factor: 1			

Page 38 of 68

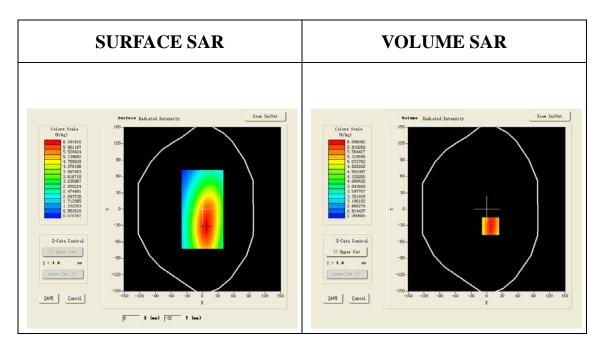


Maximum location: X=7.00, Y=-31.00

SAR 10g (W/Kg)	5.962971	
SAR 1g (W/Kg)	8.189166	

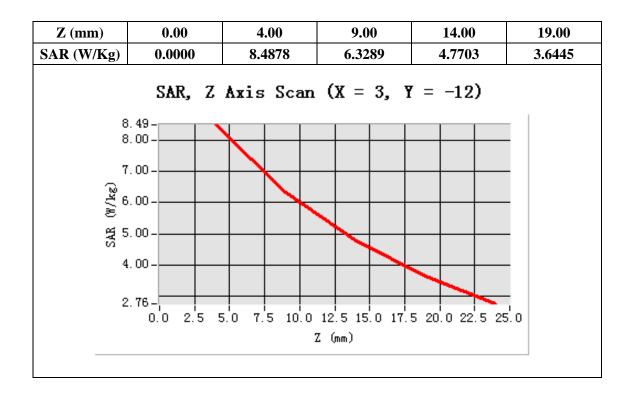

Report No.: AGC07B120201-1S1 Page 39 of 68

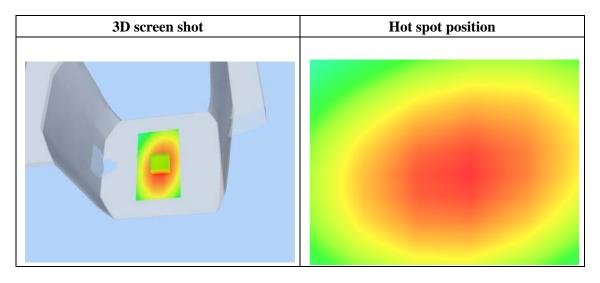

Page 40 of 68

Test Laboratory: AGC Lab

CW450High-Body

DUT: Handheld Two Way Radio ; Type: IP-607 Test date: Mar. 29, 2012

Communication System: CW; Communication System Band: CW 469.965 MHz; Duty Cycle: 1:1; ConvF=6.06

Frequency: 469.965 MHz; Medium parameters used: f = 450 MHz;  $\sigma = 0.91$  mho/m;  $\epsilon r = 57.35$ 

 $\rho = 1000 \text{ kg/m}^3$ ; Phantom Type: Elliptical Phantom

Ambient temperature ( $^{\circ}$ C): 21.5, Liquid temperature( $^{\circ}$ C): 21.0

## Satimo Configuration:

Probe:SSE5; Calibrated: 12/09/2011

· Sensor-Surface: 4mm (Mechanical Surface Detection)

· Phantom: Flat Phantom; Type: Elliptical Phantom

· Measurement SW: OpenSAR V4\_02\_01


Configuration/CW 450 Top/Area Scan (6x8x1): Measurement grid: dx=20mm, dy=20mm

Configuration/CW 450 Top/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm; Power Drift = -0.03 dB


Area Scan	ep_direct_droit2_surf8mm.txt			
ZoomScan	5x5x7,dx=8mm dy=8mm dz=5mm,Very fast			
Phantom	Elliptical Phantom			
Device Position	Back close to Phantom with Accessories			
Band	CW 469.965			
Channels	Тор			
Signal	Crest factor: 1			

Page 41 of 68

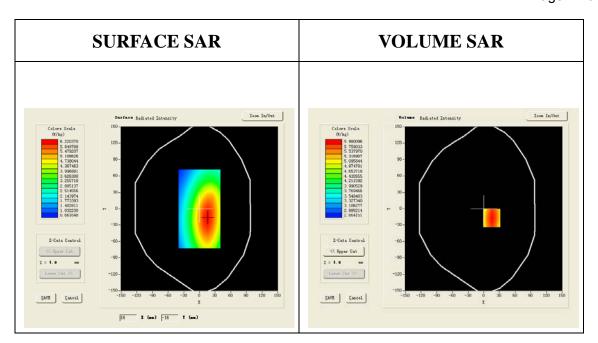


**Maximum location: X=15.00, Y=-17.00** 

SAR 10g (W/Kg)	4.837933		
SAR 1g (W/Kg)	6.623158		

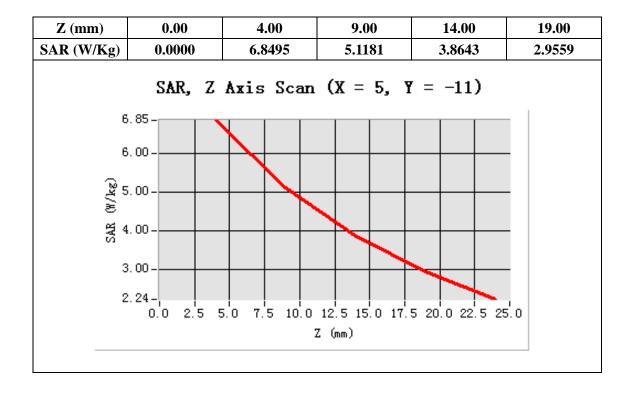

Report No.: AGC07B120201-1S1 Page 42 of 68

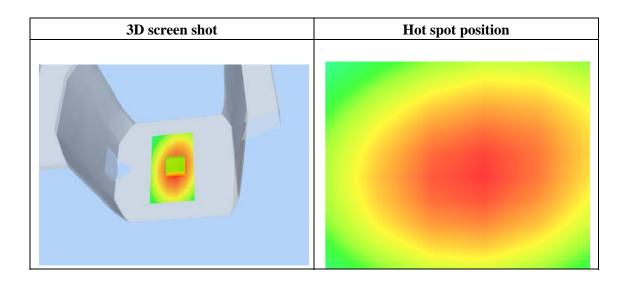


Page 43 of 68

# Appendix C. TEST SETUP PHOTOGRAPHS &EUT PHOTOGRAPS Test Setup Photographs

Face up



Bottom worn

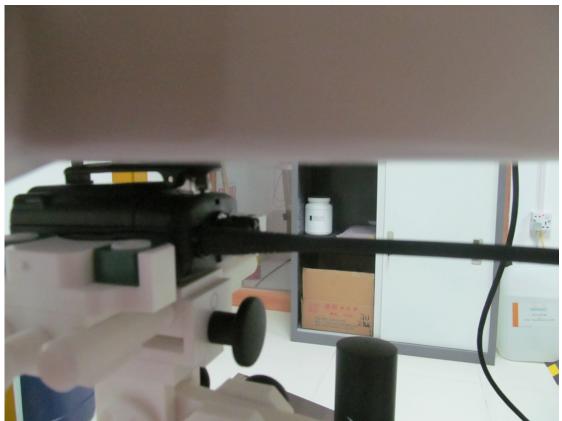

Page 44 of 68

# **EUT PHOTOGRAPS**

TOTAL VIEW OF EUT



Page 45 of 68

TOP VIEW OF EUT



**BOTTOM VIEW OF EUT** 



Report No.: AGC07B120201-1S1 Page 46 of 68

# FRONT VIEW OF EUT



**BACK VIEW OF EUT** 



Page 47 of 68

# LEFT VIEW OF EUT



RIGHT VIEW OF EUT



Page 48 of 68

## **OPEN VIEW OF EUT**




INTERNAL VIEW OF EUT - 1




Page 49 of 68

INTERNAL VIEW OF EUT - 2

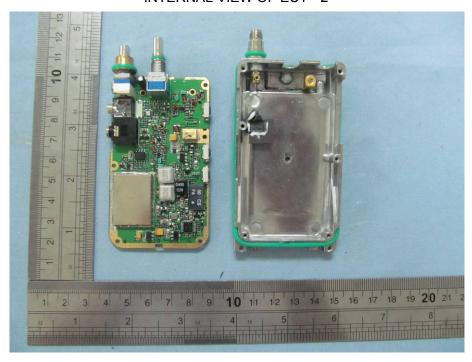

INTERNAL VIEW OF EUT – 3

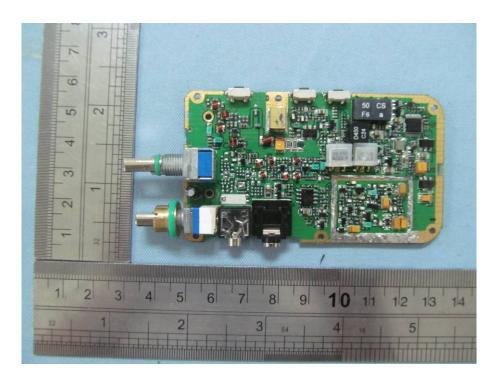

Page 50 of 68

# **Appendix D. Probe Calibration Data**



# **COMOSAR E-Field Probe Calibration Report**

Ref: ACR.343.2.11.SATU.A

# ATTESTATION OF GLOBAL COMPLIANCE CO. LTD.

1&2F, NO.2 BUILDING, HUAFENG NO.1 INDUSTRIAL PARK, GUSHU COMMUNITY XIXIANG STREET BAOAN DISTRICT, SHENZHEN, P.R. CHINA SATIMO COMOSAR DOSIMETRIC E-FIELD PROBE

SERIAL NO.: SN 35/11 EP132

Calibrated at SATIMO US

2105 Barrett Park Dr. - Kennesaw, GA 30144



12/09/11

## Summary:

This document presents the method and results from an accredited COMOSAR Dosimetric E-Field Probe calibration performed in SATIMO USA using the CALISAR / CALIBAIR test bench, for use with a SATIMO COMOSAR system only. All calibration results are traceable to national metrology institutions.

Page 51 of 68




## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.343.2.11.SATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	12/9/2011	Je
Checked by:	Jérôme LUC	Product Manager	12/9/2011	JE
Approved by:	Kim RUTKOWSKI	Quality Manager	12/9/2011	4 im Puthowshi

	Customer Name
Distribution:	ATTESTATION OF GLOBAL COMPLIANCE CO. LTD.

Issue	Date	Modifications		
A	12/9/2011	Initial release		





Ref: ACR.343 2.11.SATU.A

## TABLE OF CONTENTS

1	Devi	ce Under Test4	
2	Prod	uct Description	
	2.1	General Information	4
3	Mea	surement Method	
	3.1	Linearity	4
	3.2	Sensitivity	5
	3.3	Lower Detection Limit	
	3.4	Isotropy	5
	3.5	Boundary Effect	5
4	Mea	surement Uncertainty5	
5	Calit	oration Measurement Results	
	5.1	Sensitivity in air	6
	5.2	Linearity	7
	5.3	Sensitivity in liquid	7
	5.4	Isotropy	8
6	List	of Equipment 9	



Ref. ACR.343.2.11.SATU.A

## 1 DEVICE UNDER TEST

Device Under Test			
Device Type	COMOSAR DOSIMETRIC E FIELD PROBE		
Manufacturer	Satimo		
Model	SSE5		
Serial Number	SN 35/11 EP132		
Product Condition (new / used)	new		
Frequency Range of Probe	0.1 GHz-3GHz		
Resistance of Three Dipoles at Connector	Dipole 1: R1=1.200 MΩ		
	Dipole 2: R2=1.214 MΩ		
	Dipole 3: R3=1.004 MΩ		

A yearly calibration interval is recommended.

## 2 PRODUCT DESCRIPTION

## 2.1 GENERAL INFORMATION

Satimo's COMOSAR E field Probes are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards.



Figure 1 - Satimo COMOSAR Dosimetric E field Dipole

Probe Length	330 mm
Length of Individual Dipoles	4.5 mm
Maximum external diameter	8 mm
Probe Tip External Diameter	5 mm
Distance between dipoles / probe extremity	2.7 mm

## 3 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards provide recommended practices for the probe calibrations, including the performance characteristics of interest and methods by which to assess their affect. All calibrations / measurements performed meet the fore mentioned standards.

## 3.1 LINEARITY

The evaluation of the linearity was done in free space using the waveguide, performing a power sweep to cover the SAR range 0.01W/kg to 100W/kg.

Page: 4/9

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.

The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.





Ref: ACR.3432.11.SATU.A

## 3.2 SENSITIVITY

The sensitivity factors of the three dipoles were determined using a two step calibration method (air and tissue simulating liquid) using waveguides as outlined in the standards.

## 3.3 LOWER DETECTION LIMIT

The lower detection limit was assessed using the same measurement set up as used for the linearity measurement. The required lower detection limit is 10 mW/kg.

## 3.4 ISOTROPY

The axial isotropy was evaluated by exposing the probe to a reference wave from a standard dipole with the dipole mounted under the flat phantom in the test configuration suggested for system validations and checks. The probe was rotated along its main axis from 0 - 360 degrees in 15 degree steps. The hemispherical isotropy is determined by inserting the probe in a thin plastic box filled with tissue-equivalent liquid, with the plastic box illuminated with the fields from a half wave dipole. The dipole is rotated about its axis (0°-180°) in 15° increments. At each step the probe is rotated about its axis (0°-360°).

## 3.5 BOUNDARY EFFECT

The boundary effect is defined as the deviation between the SAR measured data and the expected exponential decay in the liquid when the probe is oriented normal to the interface. To evaluate this effect, the liquid filled flat phantom is exposed to fields from either a reference dipole or waveguide. With the probe normal to the phantom surface, the peak spatial average SAR is measured and compared to the analytical value at the surface.

## 4 MEASUREMENT UNCERTAINTY

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEL/IEC 62209 standards were followed to generate the measurement uncertainty associated with an E-field probe calibration using the waveguide technique. All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

Uncertainty analysis of the probe calibration in waveguide							
ERROR SOURCES    Uncertainty   Probability   Divisor   ci   Standard   Uncertainty (%)							
Incident or forward power	3.00%	Rectangular	√3	1	1.732%		
Reflected power	3.00%	Rectangular	√3	1	1.732%		
Liquid conductivity	5.00%	Rectangular	√3 i	1	2.887%		
Liquid permittivity	4.00%	Rectangular	√3	1	2.309%		
Field homogeneity	3.00%	Rectangular	√3	1	1.732%		
Field probe positioning	5.00%	Rectangular	-√3	1	2.887%		
Field probe linearity	3.00%	Rectangular	√3	1	1.732%		

Page 55 of 68



## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.343.2.11.SATU.A

Combined standard uncertainty			5.831%
Exp anded uncertainty 95 % confidence level k = 2			11.662%

## 5 CALIBRATION MEASUREMENT RESULTS

Calibration Parameters	
Liqui d Temperature	21 °C
Lab Temperature	21 °C
Lab Humidity	45 %


## 5.1 SENSITIVITY IN AIR

Normx dipole	Normy dipole	Normz dipole
1 (μV/(V/m)²)	2 (μV/(V/m)²)	3 (μV/(V/m)²)
5.01	4.86	

DCP dipole 1	DCP dipole 2	DCP dipole 3
(mV)	(mV)	(mV)
99	104	101

Calibration curves ei=f(V) (i=1,2,3) allow to obtain H-field value using the formula:

$$E = \sqrt{{E_1}^2 + {E_2}^2 + {E_3}^2}$$

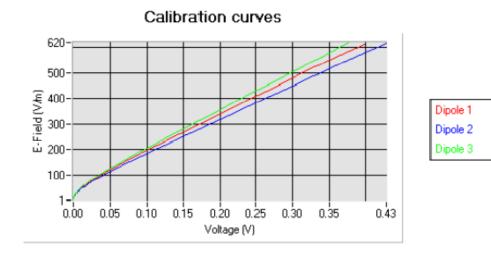

Page: 6/9


This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.

The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



R≥f: ACR.343 2.11.SATU.A

## 5.2 <u>LINEARITY</u>

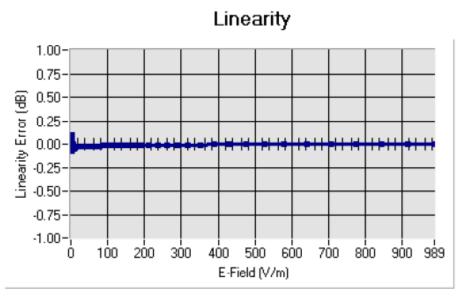

Linearity: I+/-2.29% (+/-0.10dB)

## 5.3 <u>SENSITIVITY IN LIQUID</u>

<u>Liquid</u>	Frequency (MHz +/- 100MHz)	Permittivity	Epsilon (S/m)	<u>C onvF</u>
HL300	300	44.76	0.86	5.91
HL450	450	42.52	0.88	6.06
HL900	900	41.54	0.97	6.82
HL1800	1750	38.35	1.38	6.01
HL1900	1880	39.43	1.42	6.42
HL2000	1950	40.34	1.44	5.77
HL2450	2450	38.99	1.84	5.60

LOWER DETECTION LIMIT: 7m W/kg

Page 57 of 68




## COMOSAR E-FIELD PROBE CALIBRATION REPORT

Ref: ACR.343 2.11.SATU.A

# 5.4 <u>ISOTROPY</u>


# HL900 MHz

- Axial is otropy: 0.08 dB - Hemispherical isotropy: 0.06 dB



# HL1800 MHz

- Axial is otropy: 0.11 dB - Hemispherical isotropy: 0.08 dB





Ref: ACR.343 2.11.SATU.A

# 6 LIST OF EQUIPMENT

Equipment Summary Sheet				
Equipment Manufacturer / Identification No.  Model		Current Calibration Date	Next Calibration Date	
Flat Ph antom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2010	02/2013
Reference Probe	Satimo	EP 94 SN 37/08	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Multimeter	Keithley 2000	1188656	11/2010	11/2013
Signal Generator	Agilent E4438C	MY49070581	12/2010	12/2013
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Power Meter	HP E4418A	US38261498	11/2010	11/2013
Power Sensor	HP ECP-E26A	US37181460	11/2010	11/2013
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.
Waveguide	Mega Industries	069 Y7-158-13-712	Validated. Nocal required.	Validated. No cal required.
Waveguide Transition	Mega Industries	069 Y7-158-13-701	Validated. Nocal required.	Validated. No cal required.
Waveguide Termination	Mega Industries	069 Y7-158-13-701	Validated. No cal required.	Validated. No cal required.
Temperature / Humidity Sensor	Control Company	11-661-9	3/2010	3/2012

Page 59 of 68

# **Appendix E. Dipole Calibration Data**



# SAR Reference Dipole Calibration Report

Ref: ACR.343.4.11.SATU.A

# ATTESTATION OF GLOBAL COMPLIANCE CO. LTD.

1&2F, NO.2 BUILDING, HUAFENG NO.1 INDUSTRIAL PARK, GUSHU COMMUNITY XIXIANG STREET

BAOAN DISTRICT, SHENZHEN, P.R. CHINA

# SATIMO COMOSAR REFERENCE DIPOLE

FREQUENCY: 450 MHZ SERIAL NO.: SN 46/11 DIP 0G 450-184

## Calibrated at SATIMO US

2105 Barrett Park Dr. - Kennesaw, GA 30144



## 12/09/11

## Summary:

This document presents the method and results from an accredited SAR reference dipole calibration performed in SATIMO USA using the COMOSAR test bench. All calibration results are traceable to national metrology institutions.

Page 60 of 68



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Pef: ACR.040.4.11.8 ATU.A

	Name	Function	Date	Signature
Prepared by :	Jérôme LUC	Product Manager	12/9/2011	Je
Checked by :	Jérôme LUC	Product Manager	12/9/2011	JS
Approved by :	Kim RUTKOWSKI	Quality Manager	12/9/2011	nin Puthowski

	Customer Name
Distribution :	ATTESTATION OF GLOBAL COMPLIANCE CC. LTD.

Issue	Date	Modifications
A	12/9/2011	Initial release



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.343.4.11.SATU.A

## TABLE OF CONTENTS

1	ıntro	duction 4	
2	Devi	ce Under Test	
3	Prod	uct Description	
	3.1	General Information	4
4	Mca	surcment Method	
	4.1	Return Loss Requirements	5
	4.2	Mechanical Requirements	5
5	Mea	surement Uncertainty	
	5.1	Return Loss	5
	5.2	Dimension Measurement	5
	5.3	Validation Measurement	5
6	Calit	oration Measurement Results 6	
	6.1	Return Loss	6
	6.2	Mechanical D:mensions	6
7	V alı	dati on measurement	
	7.1	Measurement Condition	7
	7.2	Head Liquid Measurement	7
	7.3	Measurement Result	8
8	List	of Equipment 8	



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.343.4.11.SATU.A

## 1 INTRODUCTION

This document contains a summary of the requirements set forth by the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards for reference dipoles used for SAR measurement system validations and the measurements that were performed to verify that the product complies with the fore mentioned standards.

## 2 DEVICE UNDER TEST

Device Under Test	
Device Type	COMOSAR 450 MHz REFERENCE DIPOLE
Manufacturer	Satimo
Model	SID450
Serial Number	SN 46/11 DIP 0G450-184
Product Condition (new / used)	new

A yearly calibration interval is recommended.

## 3 PRODUCT DESCRIPTION

## 3.1 GENERAL INFORMATION

Satimo's COMOSAR Validation Dipoles are built in accordance to the IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards. The product is designed for use with the COMOSAR test bench only.



Figure 1 - Satimo COMOSAR Validation Dipole

Page: 4/9

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO.

The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.

Page 63 of 68



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.343.4.11.SATU.A

#### 4 MEASUREMENT METHOD

The IEEE 1528, OET 65 Bulletin C and CEI/IEC 62209 standards provide requirements for reference dipoles used for system validation measurements. The following measurements were performed to verify that the product complies with the fore mentioned standards.

#### 4.1 RETURN LOSS REQUIREMENTS

The dipole used for SAE system validation measurements and checks must have a return loss of -20 dB or better. The return loss measurement shall be performed against a liquid filled flat phantom, with the phantom constucted as outlined in the fore mentioned standards.

## 4.2 MECHANICAL REQUIREMENTS

The IEEE Std. 1528 and CEI/IEC 62209 standards specify the mechanical components and dimensions of the validation dipoles, with the dimensions frequency and phantom shell thickness dependent. The COMOSAR test bench employs a 2 mm phantom shell thickness therefore the dipoles sold for use with the COMOSAR test bench comply with the requirements set forth for a 2 mm phantom shell thickness.

## 5 MEASUREMENT UNCERTAINTY

All uncertainties listed below represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2, traceable to the Internationally Accepted Guides to Measurement Uncertainty.

## 5.1 RETURN LOSS

The following uncertainties apply to the return loss measurement:

Fr equency b and	Expanded Uncertainty on Return Loss
400-6000MHz	0.1 dB

## 5.2 <u>DIMENSION MEASUREMENT</u>

The following uncertainties apply to the dimension measurements:

Length (mm)	Expanded Uncertainty on Length
3 - 300	0.05 mm

## 5.3 VALIDATION MEASUREMENT

The guidelines outlined in the IEEE 1528, OET 65 Bulletin C, CENELEC EN50361 and CEI/IEC 62209 standards were followed to generate the measurement uncertainty for validation measurements.

Scan Volume	Expanded Uncertainty
1 g	16.19 %
10 g	15.86 %

Page: 5/9

This documents hall not be reproduced, except in full or in part, without the written approval of SATIMO. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.

Page 64 of 68




## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.343.4.11.SATU.A

## 6 CALIBRATION MEASUREMENT RESULTS

## 6.1 RETURN LOSS

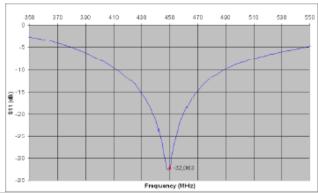

Frequency (MHz)	Return Loss (dB)	Requirement (dB)
450	-32.09	-20

# 6.2 MECHANICAL DIMENSIONS

Frequency M Hz	L mm		h mm		d mm	
	required	meas ure d	required	mea sured	required	measured
300	420.0 ±1 %.		250.0 ±1 %.		6.35 ±1%.	
450	290.0±1%.	PASS	166.7 ±1 %.	PASS	6.35 ±1%.	PASS
750	176.0 ±1 %.		100.0 ±1 %.		6.35 ±1%.	
835	161.0 ±1 %.		89.8 ±1%.		3.6 ± 1%.	
900	149.0±1%.		83.3 ±1%.		3.6±1%.	
1450	89.1 ±1 %.		51.7 ±1%.		3.6±1%.	
1500	80.5 ±1 %.		50.0 ±1%.		3.6±1%.	
1640	79.0 ±1 %.		45.7 ±1%.		3.6±1%.	
1750	/5.2 ±1 %.		42.9 ±1%.		3.5 ± 1%.	
1800	72.0 ±1 %.		41.7 ±1%.		3.6 ± 1 %.	
1900	68.0 ±1.76.		39.5 ±196.		3.6 ±196.	
1950	66.3 ±1 %.		38.5 ±1%.		3.6 ±1%.	
2000	64.5 ±1 %.		37.5 ±1%.		3.6 ± 1%.	
2100	61.0+1%		35.7±1%		3 K + 1 %	
2300	55.5 ±1 %.		32.6 ±1%.		3.6 ± 1%.	
2450	51.5 ±1 %.		30.4 ±1%.		3.6±1%.	
2600	48.5 ±1 %.	·	28.8 ±1%.		3.6 ± 1%.	
3000	41.5 ±1 %.		25.0 ±1%.		3.6±1%.	
3500	37.0±1 %.		26.4 ±1%.		3.6±1%.	
3700	34.7±1 %.		26.4 ±1%.		3.6 ± 1%.	

Report No.: AGC07B120201-1S1 Page 65 of 68



#### SAR REFERENCE DIPOLE CALIBRATION REPORT

Peff ACR 343 4 11 SATTLA

## 7 VALIDATION MEASUREMENT

The EEE Std. 1528, OET 65 Bulletin C and CEI/IEC 62209 standards state that the system validation measurements must be performed using a reference dipole meeting the fore mentioned return loss and mechanical dimension requirements. The validation measurement must be performed against a liquid filled flat phantom, with the phantom constructed as outlined in the fore mentioned standards. Per the standards, the dipole shall be positioned below the bottom of the phantom, with the dipole length centered and parallel to the longest dimension of the flat phantom, with the top surface of the dipole at the described distance from the bottom surface of the phantom.

## 7.1 MEASUREMENT CONDITION

Software	CPENSAR V 4
Phantem	SN 29711 ELLIZ1
Probe	SN 18/11 EPG122
Liquid	Head Liquid Values: eps': 42.5 sigma: U.88
Distance between dipole center and liquid	15.0 mm
Area scan resolution	dx=8mm/dy=8mm
Zoon Scan Resolution	dx=8mm/dy=8m/dz=5mm
Frequency	450 MHz
Input power	20 dBm
Liquid Temperature	21 ℃
Lab Temperature	21 °C
Lab Humidity	45 %

#### 7.2 HEAD LIQUID MEASUREMENT

Frequency MHz	Relative permittivity (s,')		Conductiv	ity (a) š/m
	required	measured	required	measured
300	45.3 ±5%		0.87 ±5 %	
450	43.5 ±5%	PASS	0.87 ±5 %	PASS
750	41.9 ±5%		0.89 ±5 %	
835	41.5 ±5%		0.90±5%	
900	41.5 ±5%		0.97±5%	
1450	40.5 ±5%		1.20 ±5 %	
1500	40.4 ±5%		1.23 ±5 %	
1640	40.2 ±5.98		1.31 ±5 98	
1750	40.1 ±5%		1.37 ±5 %	
1800	40.0 ±5 %		1.40 ±5 %	
1900	40.0 ±5 %		1.40 ±5 %	
1950	40.0 ±5 %		1.40 ±5 %	
2000	40.0 ±5 %		1.40 ±5 %	
2100	39.8 ±5%		1.49 ±5 %	
2300	39.5 ±5%		1.67 ±5 %	
2450	39.2 ±5%		1.80±5%	
2600	39.0±5%		1.96 ±5 %	
3000	38.5 ±5%		2.40 ±5 %	
3500	37.9 ±5%		2.91±5%	

Page: 7/9

His document shall not be reproduced except in full or in part, without the written approval of SATMO. The information contained herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATMO.

Page 66 of 68




## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.343.4.11.5 ATU.A

## 7.3 MEASUREMENT RESULT

The IEEE Std. 1528 and CEI/IEC 62209 standards state that the system validation measurements should produce the SAR values shown below (for phantom thickness of 2 mm), within the uncertainty for the system validation. All SAR values are normalized to 1 W forward power. In bracket, the measured SAR is given with the used input power.

Frequency MHz	1g5AR	(W/kg/W)	10g SAR	(W/kg/W)
	required	measured	required	measured
300	2.85		1.94	
450	4.58	4.80 (C.48)	3.06	3.27 (0.33)
750	8.49		5.55	
335	9.56		6.22	
300	10.9		6.99	
1450	29		15	
1500	30.5		16.8	
1640	34.2		18.4	
1750	36.4		19.3	
1800	38.4		20.1	
1900	39.7		20.5	
1950	40.5		20.9	
2000	41.1		21.1	
2100	43.6		21.9	
2300	48.7		23.3	
2450	52.4		24	
2600	55.3		24.6	
3000	63.8		25.7	
2500	67.1		25	

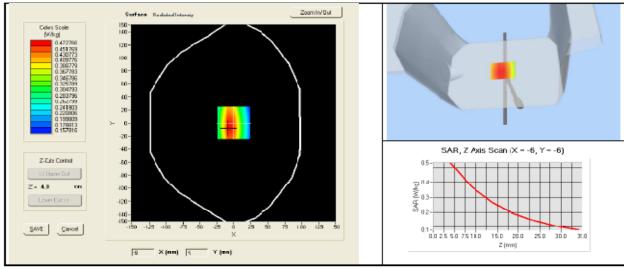

Page: 8/9

This document shall not be reproduced, except in full or in part, without the written approval of SATIMO. The reformation contamed herein is to be used only for the purpose for which it is submitted and is not to be released in whole or part without written approval of SATIMO.



## SAR REFERENCE DIPOLE CALIBRATION REPORT

Ref: ACR.343.4.11.SATU.A

# 8 LIST OF EQUIPMENT

Equipment Summary Sheet					
Equipment Description	Manufacturer / Model	Identification No.	Current Calibration Date	Next Calibration Date	
Flat Phantom	Satimo	SN-20/09-SAM71	Validated. No cal required.	Validated. No cal required.	
COMOSAR Test Bench	Version 3	NA	Validated. No cal required.	Validated. No cal required.	
Network Analyzer	Rhode & Schwarz ZVA	SN100132	02/2010	02/2013	
Calipers	Carrera	CALIPER-01	12/2010	12/2013	
Reference Probe	Satimo	EPG122 SN 18/11	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Multimeter	Keithle y 2000	1188656	11/2010	11/2013	
Signal Generator	Agilent E4438C	MY49070581	12/2010	12/2013	
Amplifier	Aethercomm	SN 046	Characterized prior to test. No cal required.		
Power Meter	HP E4418A	US38261498	11/2010	11/2013	
Power Sensor	HP ECP-E26A	US37181460	11/2010	11/2013	
Directional Coupler	Narda 4216-20	01386	Characterized prior to test. No cal required.	Characterized prior to test. No cal required.	
Temperature and Humidity Sensor	Control Company	11-661-9	3/2010	3/2012	