FCC Test Report

Report No.: AGC10081010QZ08F1

TEST NAME : FCC Part 90

FCC ID : VO6NC-6R

PRODUCT DESIGNATION: Handheld two way radio

BRAND NAME : KYD, SYD

TEST MODEL NAME : NC-6R

CLIENT : CHINA NEW CENTURY(QUANZHOU) COMMUNICATION

ELECTRONICS CO., LTD

DATE OF ISSUE : Nov.03, 2010

STANDARD(S) : FCC Part 90 Rules

Attestation of Global Compliance Co., Ltd.

CAUTION: This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

Page 1 of 65

VERIFICATION OF COMPLIANCE

Applicant	CHINA NEW CENTURY(QUANZHOU) COMMUNICATION ELECTRONICS CO., LTD
Applicant:	No.1 Fengshou Road, Quanzhou City, Fujian Province, China
Manufacturan	CHINA NEW CENTURY(QUANZHOU) COMMUNICATION ELECTRONICS CO., LTD
Manufacturer:	No.1 Fengshou Road, Quanzhou City, Fujian Province, China
Product Description:	Handheld two way radio
Brand Name:	KYD, SYD
Model Number:	NC-6R
File Number:	AGC10081010QZ08F1
Date of Test:	Oct.29 to Nov.03, 2010

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance Co., Ltd. The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 90

The test results of this report relate only to the tested sample identified in this report.

Checked By:

Jekey Zhang

Jekey Zhang

Nov.03, 2010

Authorized By

King Zhang Nov.03, 2010

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	5 5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION	6
3. SUMMARY OF TEST RESULTS	7
4. DESCRIPTION OF TEST MODES	8
5. CONDUCTED LIMITS	g
5.1 PROVISIONS APPLICABLE	10
6. FREQUENCY TOLERANCE	13
6.1 PROVISIONS APPLICABLE	13 14 14
7. EMISSION BANDWIDTH	21
7.1 PROVISIONS APPLICABLE	21 21 21
8. UNWANTED RADIATION	24
8.1 PROVISIONS APPLICABLE	

Page	3	of	65

	Page
8.3 TEST SETUP BLOCK DIAGRAM	25
8.4 MEASUREMENT EQUIPMENT USED:	27
8.5 MEASUREMENT RESULTS:	
8.6 EMISSION MASK PLOT	30
9. MODULATION CHARACTERISTICS	32
9.1 PROVISIONS APPLICABLE	_
9.2 MEASUREMENT METHOD	32
9.3 MEASUREMENT INSTRUMENTS	_
9.4 MEASUREMENT RESULT	33
10.1 PROVISIONS APPLICABLE	39
10.2 TEST PROCEDURE	39
10.3 TEST INSTRUMENTS	
10.4 TEST RESULT	
10.4 CONDUCT SPURIOUS PLOT	41
11. RANSMITTER FREQUENCY BEHAVIOR	44
11.1 PROVISIONS APPLICABLE	44
11.2TEST METHOD	44
11.3TEST INSTRUMENTS	44
12. RADIATED EMISSION ON RECEIVING MODE	49
12.1 PROVISIONS APPLICABLE	49
12.2 TEST METHOD	
12.3 TEST INSTRUMENTS	49
12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)	
13. AUDIO LOW PASS FILTER RESPONSE	
13.1 LIMITS	5 2
13.2. METHOD OF MEASUREMENTS	
13.3 TEST DATA	52
APPENDIX I	57
PHOTOGRAPHS OF SETUP	57
APPENDIX II	59
EXTERNAL VIEW OF FLIT	59

Page 4 of 65

1. GENERAL INFORMATION

1.1 PRODUCT DESCRIPTION

The EUT is a single channel Two-way Radio designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only					
Modulation	FM					
Emission Type	F3E					
Emission Bandwidth	10.09kHz/15.43kHz (Limite:11.25KHz/20KHz)					
Peak Frequency	1.53 KHz for 12.5 KHz Channel Separation (Limit<±2.5 KHz)					
Deviation	3.07 KHz for 25 KHz Channel Separation (Limit<±5 KHz)					
Maximum Transmitter	2.15W for 12.5 KHz Channel Separation					
Power	2.21W for 25.0KHz Channel Separation					
Output power Modification	2W (It was fixed by the manufacturer, any individual can't arbitrarily change it)					
Antenna Designation	Detachable					
Power Supply	DC 3.7V by battery					
Battery Endpoint	DC 3.7V					
	Frequency Range:420MHz to 480MHz Channel Separation: 12.5KHz and 25KHz					
Operation Frequency Range and Channel	Top Channel: 479.975MHz, Centre Channel:450.025MHz, Bottom Channel:420.025MHz,					
Frequency Tolerance	1.117 ppm for 12.5 KHz Channel Separation 1.345 ppm for 25.0 KHz Channel Separation					
Transmitter Spurious (Worst case)	-41.24dBm					
Receiver Spurious (Worse case)	29.83 dBuV/m at 3m measuring distance					

Page 5 of 65

1.2 RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for FCC ID: VO6NC-6R, filing to comply with the FCC Part 90

1.3 TEST METHODOLOGY

The radiated emission testing was performed according to the procedures of ANSI C 63.4: 2009; TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 TEST FACILITY

The test site used to collect the radiated data is located on the address of Attestation of Global Compliance Co., Ltd. 2F., No.2 Building, Huafeng No.1 Technical Industrial Park, Sanwei, Xixiang, Baoan District, Shenzhen. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003. FCC register No.: 259865

1.5 SPECIAL ACCESSORIES

Not available for this EUT intended for grant.

1.6 EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

Page 6 of 65

2. SYSTEM TEST CONFIGURATION

2.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT EXERCISE

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

2.3 GENERAL TECHNICAL REQUIREMENTS

- (1). Section 15.207: Conducted Limits
- (2). Section 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area
- (3). Section 90.207: Modulation Characteristic
- (4). Section 90.209: Occupied Bandwidth
- (5). Section 90.210: Emission Mask
- (6). Section 90.213: Frequency Tolerance
- (7). Section 90.214: Transient Frequency Behavior
- (8). Section 15.109: Radiated Emission

2.4 CONFIGURATION OF TESTED SYSTEM

Fig. 2-1 Configuration of Tested System

EUT

Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Note
1	Handheld two way Radio	NC-6R	FCC ID: VO6NC-6R	EUT
2	AC ADAPTER	AC6RDC		

Report No.: AGC10081010QZ08F1 Page 7 of 65

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207	Conducted Emission	Compliant
§90.205	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209	Occupied Bandwidth	Compliant
§90.210	Emission Mask	Compliant
§90.213	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant
§15.109	Radiated Emission	Compliant

Page 8 of 65

4. DESCRIPTION OF TEST MODES

The EUT (Handheld two way radio) has been tested under normal operating condition. (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation (12.5 KHz/ 25 KHz).

Page 9 of 65

5. CONDUCTED LIMITS

5.1 PROVISIONS APPLICABLE

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit(dBuV)				
	Quasi-Peak	Average			
0.15 – 0.5	66 to 56 *	56 to 46 *			
0.5 – 5	56	46			
5 – 30	60	50			


^{*} Decreases with the logarithm of the frequency.

5.2 MEASUREMENT PROCEDURE

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received AC power from a second LISN, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes. During the above scans, the emissions were maximized by cable manipulation.

Report No.: AGC10081010QZ08F1 Page 10 of 65

5.3 TEST SETUP BLOCK DIAGRAM

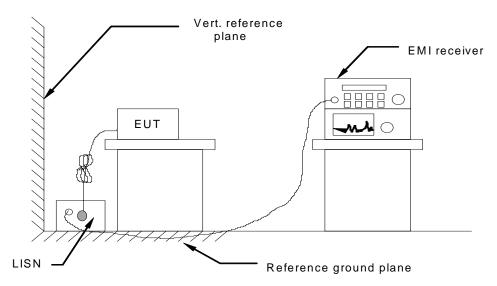


5.4 TEST EQUIPMENT USED

Conducted Emission Test Site									
Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date					
TEST RECEIVER	R&S	FCKL1528	A0304230	2010.06					
LISN	SCHWARZBECK	NSLK8127	A0304233	2010.06					

Report No.: AGC10081010QZ08F1 Page 11 of 65

5.5 TEST RESULT

LINE CONDUCTED EMISSION TEST-L

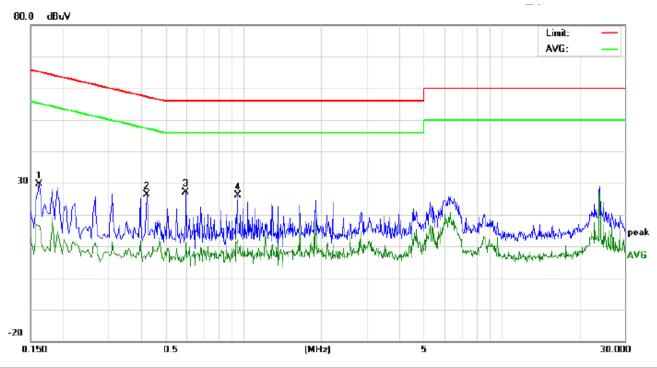

Site: Conduction Phase: Temperature: 26 L1 Limit: FCC Class B Conduction(QP) Power: AC110V/60Hz Humidity: 60 %

EUT: Handheld two way radio


M/N: NC-6R Mode: CHARGE

Note:

No.	Freq.		Reading_Level Correct (dBuV) Factor			Measurement (dBuV)		Limit Margin (dBuV) (dB)		P/F	Comment			
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1620	19.46		6.42	10.17	29.63		16.59	65.36	55.36	-35.73	-38.77	Р	
2	0.4220	15.98		-2.74	10.35	26.33		7.61	57.41	47.41	-31.08	-39.80	Р	
3	0.5980	16.70		0.69	10.31	27.01		11.00	56.00	46.00	-28.99	-35.00	Р	
4	0.9500	15.63		1.69	10.39	26.02		12.08	56.00	46.00	-29.98	-33.92	Р	

Report No.: AGC10081010QZ08F1 Page 12 of 65

LINE CONDUCTED EMISSION TEST-N

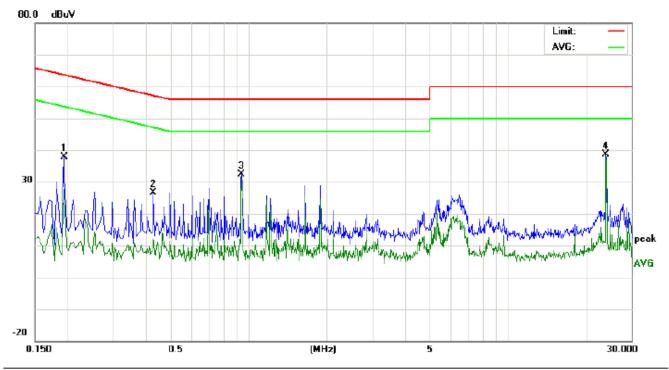

Temperature: 26 Site: Conduction Phase: Limit: FCC Class B Conduction(QP) Power: AC110V/60Hz Humidity: 60 %

EUT: Handheld two way radio

M/N: NC-6R Mode: CHARGE

Note:

No.	Freq.	Rea	ding_L (dBuV)		Correct Factor	1	asuren (dBuV)		Lir (dB	nit uV)	Mai (d	rgin IB)	P/F	Comment
	(MHz)	Peak	QP	AVG	dB	Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1940	27.64		17.50	10.21	37.85		27.71	63.86	53.86	-26.01	-26.15	Р	
2	0.4300	16.35		1.73	10.35	26.70		12.08	57.25	47.25	-30.55	-35.17	Р	
3	0.9420	21.98		20.82	10.39	32.37		31.21	56.00	46.00	-23.63	-14.79	Р	
4	24.0140	28.42		27.70	10.11	38.53		37.81	60.00	50.00	-21.47	-12.19	Р	

Page 13 of 65

6. FREQUENCY TOLERANCE

6.1 PROVISIONS APPLICABLE

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from −30°C to +50°C centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5KHz channel separation and 0.0005% for 25KHz channel separation.

6.2 MEASUREMENT PROCEDURE

6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth
 to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz.Record this
 frequency as reference frequency.
- 3. Set the temperature of chamber to 50℃. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10 ℃ decreased per stage until the lowest temperature -30 ℃ is measured, record all measured frequencies on each temperature step.


6.2.2 Frequency stability versus input voltage

- Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15℃ to 25℃.
 Otherwise, an environment chamber set for a temperature of 20℃ shall be used. The EUT shall be powered by DC 3.7V
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

Report No.: AGC10081010QZ08F1 Page 14 of 65

6.3 TEST SETUP BLOCK DIAGRAM

Temperature Chamber

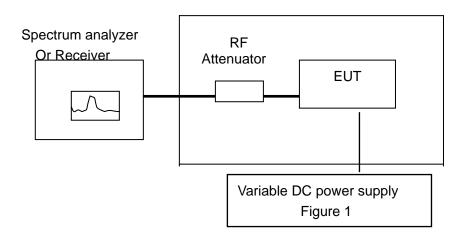

6.4 TEST EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
Receiver	R&S	ESIB26	A0304218	2010.06
Climate Chamber	Albatross			2010.12

6.5 TEST RESULT

Page 15 of 65

(1) Frequency stability versus input voltage (Supply nominal voltage is 3.7V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	420.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.7	420.024531	-1.117
40	3.7	420.024587	-0.983
30	3.7	420.024633	-0.874
20	3.7	420.024721	-0.664
10	3.7	420.024831	-0.402
0	3.7	420.024859	-0.336
-10	3.7	420.024952	-0.114
-20	3.7	420.024942	-0.138
-30	3.7	420.025061	0.145

Middle Channel @ 12.5 KHz Channel Separation

Reference Frequency:	450.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.7	450.024533	-1.038
40	3.7	450.024586	-0.920
30	3.7	450.024633	-0.816
20	3.7	450.024725	-0.611
10	3.7	450.024835	-0.367
0	3.7	450.024891	-0.242
-10	3.7	450.024957	-0.096
-20	3.7	450.025008	0.018
-30	3.7	450.025011	0.024

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.7	479.974521	-0.998
40	3.7	479.974509	-1.023
30	3.7	479.974611	-0.810
20	3.7	479.974721	-0.581
10	3.7	479.974845	-0.323
0	3.7	479.974875	-0.260
-10	3.7	479.974921	-0.165
-20	3.7	479.975011	0.023
-30	3.7	479.975117	0.244

Page 16 of 65

Bottom Channel @ 25.0 KHz Channel Separation

Reference Frequency:	420.025 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.7	420.024435	-1.345
40	3.7	420.024579	-1.002
30	3.7	420.024619	-0.907
20	3.7	420.024732	-0.638
10	3.7	420.024916	-0.200
0	3.7	420.025034	0.081
-10	3.7	420.025022	0.052
-20	3.7	420.025025	0.060
-30	3.7	420.025128	0.305

Middle Channel @ 25.0 KHz Channel Separation

Reference Frequency:	450.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.7	450.024409	-1.313
40	3.7	450.024578	-0.938
30	3.7	450.024678	-0.716
20	3.7	450.024765	-0.522
10	3.7	450.024866	-0.298
0	3.7	450.024893	-0.238
-10	3.7	450.024954	-0.102
-20	3.7	450.02501	0.022
-30	3.7	450.025018	0.040

Top Channel @ 25.0 KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.7	479.974418	-1.213
40	3.7	479.974537	-0.965
30	3.7	479.974616	-0.800
20	3.7	479.974607	-0.819
10	3.7	479.974814	-0.388
0	3.7	479.974944	-0.117
-10	3.7	479.975005	0.010
-20	3.7	479.975107	0.223
-30	3.7	479.975004	0.008

Page 17 of 65

(2) Frequency stability versus input voltage (Battery End Point voltage is 3.2V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	420.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.2	420.024549	-1.074
40	3.2	420.024585	-0.988
30	3.2	420.024631	-0.879
20	3.2	420.024719	-0.669
10	3.2	420.024829	-0.407
0	3.2	420.024856	-0.343
-10	3.2	420.024923	-0.183
-20	3.2	420.024939	-0.145
-30	3.2	420.025059	0.140

Middle Channel @ 12.5 KHz Channel Separation

Deference Francisco	150 005 MILE	1 !: ! 4 :	0.5000
Reference Frequency:	450.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.2	450.024531	-1.042
40	3.2	450.024584	-0.924
30	3.2	450.024631	-0.820
20	3.2	450.024723	-0.616
10	3.2	450.024833	-0.371
0	3.2	450.024889	-0.247
-10	3.2	450.024955	-0.100
-20	3.2	450.025006	0.013
-30	3.2	450.025009	0.020

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.2	479.974519	-1.002
40	3.2	479.974507	-1.027
30	3.2	479.974609	-0.815
20	3.2	479.974719	-0.585
10	3.2	479.974843	-0.327
0	3.2	479.974873	-0.265
-10	3.2	479.974919	-0.169
-20	3.2	479.975013	0.027
-30	3.2	479.975115	0.240

Report No.: AGC10081010QZ08F1 Page 18 of 65

Bottom Channel @ 25.0 KHz Channel Separation

Reference Frequency:	420.025 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.2	420.024472	-1.257
40	3.2	420.024577	-1.007
30	3.2	420.024617	-0.912
20	3.2	420.024729	-0.645
10	3.2	420.024914	-0.205
0	3.2	420.025032	0.076
-10	3.2	420.025019	0.045
-20	3.2	420.025023	0.055
-30	3.2	420.025126	0.300

Middle Channel @ 25.0 KHz Channel Separation

Reference Frequency:	450.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.2	450.024407	-1.318
40	3.2	450.024576	-0.942
30	3.2	450.024676	-0.720
20	3.2	450.024763	-0.527
10	3.2	450.024864	-0.302
0	3.2	450.024892	-0.240
-10	3.2	450.024952	-0.107
-20	3.2	450.025008	0.018
-30	3.2	450.025016	0.036

Top Channel @ 25.0 KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	3.2	479.974415	-1.219
40	3.2	479.974535	-0.969
30	3.2	479.974614	-0.804
20	3.2	479.974606	-0.821
10	3.2	479.974815	-0.385
0	3.2	479.974941	-0.123
-10	3.2	479.975003	0.006
-20	3.2	479.975105	0.219
-30	3.2	479.975002	0.004

Page 19 of 65

(3) Frequency stability versus input voltage (Battery Fully Charged voltage is 4.26V)

Bottom Channel @ 12.5 KHz Channel Separation

Reference Frequency:	420.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(°C)	(V)	(MHz)	ppm
50	4.26	420.024539	-1.098
40	4.26	420.024545	-1.083
30	4.26	420.024621	-0.902
20	4.26	420.024708	-0.695
10	4.26	420.024817	-0.436
0	4.26	420.024846	-0.367
-10	4.26	420.024933	-0.160
-20	4.26	420.024934	-0.157
-30	4.26	420.025066	0.157

Middle Channel @ 12.5 KHz Channel Separation

Deference Fragueses	450.025 MHz	Limit:	2 Ennm
Reference Frequency:			2.5ppm
Envionment Temperature	Power Supply	Frequency	Deviation
(℃)	(V)	(MHz)	ppm
50	4.26	450.024541	-1.020
40	4.26	450.024584	-0.924
30	4.26	450.024631	-0.820
20	4.26	450.024723	-0.616
10	4.26	450.024833	-0.371
0	4.26	450.024889	-0.247
-10	4.26	450.024955	-0.100
-20	4.26	450.025006	0.013
-30	4.26	450.025009	0.020

Top Channel @ 12.5KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency	Deviation
(℃)	(V)	(MHz)	ppm
50	4.26	479.974515	-1.010
40	4.26	479.974504	-1.033
30	4.26	479.974603	-0.827
20	4.26	479.974713	-0.598
10	4.26	479.974841	-0.331
0	4.26	479.974866	-0.279
-10	4.26	479.974915	-0.177
-20	4.26	479.975016	0.033
-30	4.26	479.975112	0.233

Report No.: AGC10081010QZ08F1 Page 20 of 65

Bottom Channel @ 25.0 KHz Channel Separation

Reference Frequency:	420.025 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	4.26	420.024444	-1.324
40	4.26	420.024567	-1.031
30	4.26	420.024637	-0.864
20	4.26	420.024749	-0.598
10	4.26	420.024934	-0.157
0	4.26	420.025052	0.124
-10	4.26	420.025015	0.036
-20	4.26	420.025021	0.050
-30	4.26	420.025122	0.290

Middle Channel @ 25.0 KHz Channel Separation

Reference Frequency:	450.025 MHz	Limit:	2.5ppm
Envionment Temperature	Power Supply	Frequency Deviation	
(℃)	(V)	(MHz)	ppm
50	4.26	450.024405	-1.322
40	4.26	450.024575	-0.944
30	4.26	450.024673	-0.727
20	4.26	450.024761	-0.531
10	4.26	450.024859	-0.313
0	4.26	450.024888	-0.249
-10	4.26	450.024948	-0.116
-20	4.26	450.025006	0.013
-30	4.26	450.025013	0.029

Top Channel @ 25.0 KHz Channel Separation

Reference Frequency:	479.975 MHz	Limit:	5.0ppm
Envionment Temperature	Power Supply	Frequency	Deviation
(℃)	(V)	(MHz)	ppm
50	4.26	479.974433	-1.181
40	4.26	479.974532	-0.975
30	4.26	479.974604	-0.825
20	4.26	479.974601	-0.831
10	4.26	479.974809	-0.398
0	4.26	479.974928	-0.150
-10	4.26	479.975001	0.002
-20	4.26	479.975103	0.215
-30	4.26	479.975002	0.004

Page 21 of 65

7. EMISSION BANDWIDTH


7.1 PROVISIONS APPLICABLE

According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz and 20 KHz for 25 KHz

7.2 MEASUREMENT PROCEDURE

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 2.5 KHz Sine wave audio signal, The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing).
 - 3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 300 Hz, Span =50 KHz.
 - 4). Set SPA Max hold. Mark peak, -26 dB.

7.3 TEST SETUP BLOCK DIAGRAM

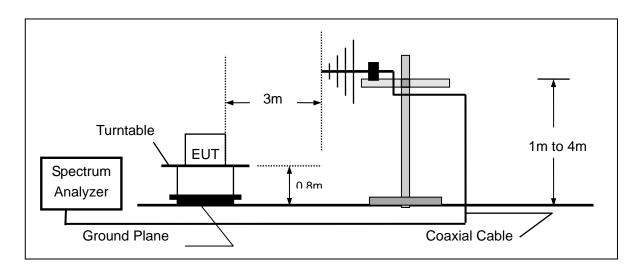

7.4 MEASUREMENT EQUIPMENT USED:


NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2010.06
MODULATION ANALYZER	HP	8901B	3104A03367	2010.06
BROADBAND ANT.	R&S	HL562	A0304224	2010.06

Page 22 of 65

7.5 MEASUREMENT RESULT:


26 dB Bandwidth Measurement Result						
Operating Frequency	12.5 KHz Channel Separation			25 KHz	Channel Se	paration
Operating Frequency	Test Data	Test Data Limits Result			Limits	Result
420.025MHz	10.07 KHz	10.07 KHz 11.25 KHz Pass		15.33KHz	20.00 KHz	Pass
450.025MHz	10.09KHz	11.25 KHz	Pass	15.43 KHz	20.00 KHz	Pass
479.975MHz	10.05 KHz	11.25 KHz	Pass	15.35 KHz	20.00 KHz	Pass

Occupied bandwidth of Middle Channel (Maximum) @ 12.5KHz Channel Separation

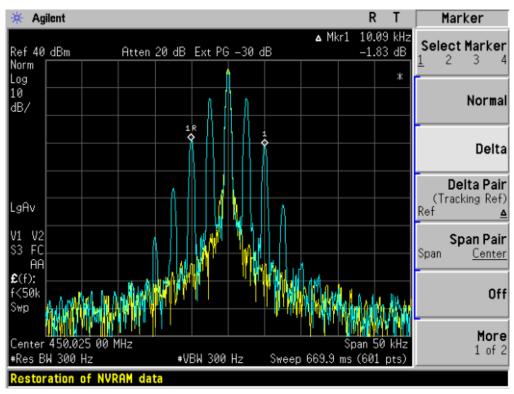

Report No.: AGC10081010QZ08F1 Page 23 of 65

Occupied bandwidth of Middle Channel (Maximum) @ 25KHz Channel Separation

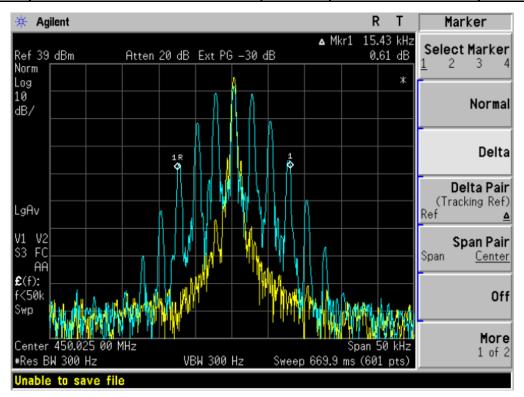

Page 24 of 65

8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:

- (1).On any frequency removed from the center of the authorized bandwidth fo to 5.625 KHz removed from fo: Zero dB
- (2).On any frequency removed from the center of the authorized bandwidth by a displacement frequency(fd in KHz)fo of more than 5.625 KHz but no more than 12.5 KHz: At least 7.27(fd-2.88 KHz) dB
- (3).On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz)fo of more than 12.5 KHz: At least 50+10 log(P) dB or 70 dB, which ever is lesser attenuation.
- 8.1.2 According to Section 90.210, Emission mask B. For transmitters designed to transmit with 25 KHz channel separation and equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as following:
 - (1), On any frequency removed from the assigned frequency by more than 50 percent, but no more than 100 percent of the authorized bandwidth: At least 25 dB.
 - (2), On any frequency removed from the assigned frequency by more than 100 percent, but no more than 250 percent of the authorized bandwidth: At least 35 dB.
 - (3), On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43+10Log(P) dB.


8.2 MEASUREMENT PROCEDURE

- (1)On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2) The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3)The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4) The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5) The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6)The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7)The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.

Page 25 of 65

- (8) The maximum signal level detected by the measuring receiver shall be noted.
- (9) The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10) Replace the antenna with a proper Antenna (substitution antenna).
- (11)The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12) The substitution antenna shall be connected to a calibrated signal generator.
- (13)If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14)The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15)The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16)The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17)The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

8.3 TEST SETUP BLOCK DIAGRAM

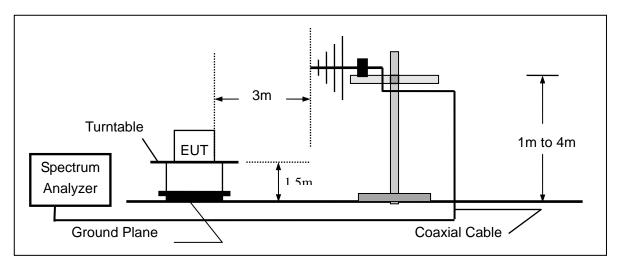


Report No.: AGC10081010QZ08F1 Page 26 of 65

SUBSTITUTION METHOD: (Radiated Emissions)

Radiated Below 1GHz

Ground Plane

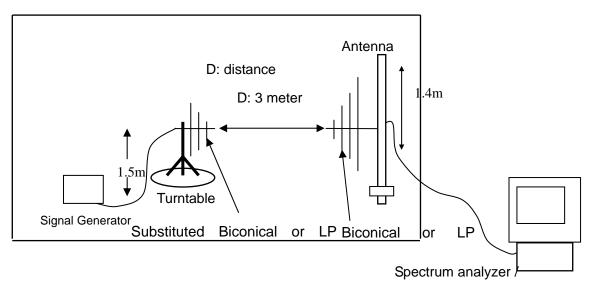

Radiated Above 1 GHz

Ground plane Antenna mast -4 meter D: distance 1.5m Horn Turn antenna table Signal Generator Substituted Horn Spectrum antenna analyzer/pre-amp

Page 27 of 65

8.4 MEASUREMENT EQUIPMENT USED:

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2010.06
TEST RECEIVER	R&S	ESIB26	A0304218	2010.06
LOOP ANTENNA	R&S	HFH2-Z2	A0304220	2010.06
HORN ANT.	R&S	HF906	100150	2010.06
BROADBAND ANT.	R&S	HL562	A0304224	2010.06

8.5 MEASUREMENT RESULTS:

Measurement Result for 12.5 KHz Channel Separation-2W

On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (fd in KHz)fo of more than 12.5 KHz: At least 50+10 log(P) dB or 70 dB, which ever is lesser attenuation.

Limit: At least 50+10 log (P) =50+10log(2)=53

Measurement Result For 25 KHz Channel Separation-2W

On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least 43+10Log(P) dB.

Limit: At least 43+10 log (P) =43+10log(2)=46

Report No.: AGC10081010QZ08F1 Page 28 of 65

Measurement Result for 25 KHz Channel Separation @ 420.025MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit	Result(P/F)
420.025	V	n Delow carrier (ubc)		pass
840.050	V	76.54(-43.54dBm)	53	pass
1260.075	V	82.89	53	pass
1680.100	V	84.78	53	pass
2100.125	V	87.65	53	pass
2520.150	V	93.43	53	pass
2940.175	V	94.62	53	pass
3360.200	V	99.19	53	pass
3780.225	V	95.56	53	pass
4200.250	V	94.22	53	pass

Measurement Result for 25 KHz Channel Separation @ 450.025MHz

Emission	Ant.	Measurement		
Frequency	Polarity(H/V)	Result	Limit	Result(P/F)
(MHz)		Below carrier(dBc)		
450.025	V	0		pass
900.050	V	75.66(-42.66dBm)	53	pass
1350.075	٧	80.23	53	pass
1800.100	V	86.99	53	pass
2250.125	V	85.25	53	pass
2700.150	٧	96.54	53	pass
3150.175	٧	94.99	53	pass
3600.200	V	98.45	53	pass
4050.225	V	95.77	53	pass
4500.250	V	94.88	53	pass

Measurement Result for 25 KHz Channel Separation @ 479.975MHz

Emission	Ant.	Measurement		
Frequency	Polarity(H/V)	Result	Limit	Result(P/F)
(MHz)	,	Below carrier(dBc)		,
479.975	V	0		pass
959.950	V	77.84(-44.84dBm)	53	pass
1439.925	V	81.56	53	pass
1919.900	V	83.65	53	pass
2399.875	V	84.47	53	pass
2879.850	V	95.54	53	pass
3359.825	V	94.53	53	pass
3839.800	V	98.67	53	pass
4319.775	V	95.78	53	pass
4799.750	V	94.54	53	pass

Page 29 of 65

Measurement Result for 12.5 KHz Channel Separation @ 420.025MHz

Emission	Ant.	Measurement		
Frequency	Polarity(H/V)	Result	Limit	Result(P/F)
(MHz)		Below carrier(dBc)		
420.025	V	0		pass
840.050	V	74.24(-41.24dBm)	46	pass
1260.075	V	83.72	46	pass
1680.100	٧	82.64	46	pass
2100.125	٧	86.77	46	pass
2520.150	٧	92.44	46	pass
2940.175	V	93.77	46	pass
3360.200	٧	98.54	46	pass
3780.225	V	94.64	46	pass
4200.250	V	93.33	46	pass

Measurement Result for 12.5 KHz Channel Separation @ 450.025MHz

Emission	Ant.	Measurement		
Frequency	Polarity(H/V)	Result	Limit	Result(P/F)
(MHz)		Below carrier(dBc)		
450.025	V	0		pass
900.050	V	74.69(-41.69dBm)	46	pass
1350.075	V	79.44	46	pass
1800.100	V	85.67	46	pass
2250.125	V	85.09	46	pass
2700.150	V	95.08	46	pass
3150.175	V	93.78	46	pass
3600.200	V	95.72	46	pass
4050.225	V	94.69	46	pass
4500.250	V	95.01	46	pass

Measurement Result for 12.5 KHz Channel Separation @ 479.975MHz

Emission Frequency (MHz)	Ant. Polarity(H/V)	Measurement Result Below carrier(dBc)	Limit	Result(P/F)
479.975	V	0		pass
959.950	V	75.99(-42.99dBm)	46	pass
1439.925	V	81.02	46	pass
1919.900	V	85.91	46	pass
2399.875	V	84.14	46	pass
2879.850	V	92.76	46	pass
3359.825	V	93.92	46	pass
3839.800	V	97.76	46	pass
4319.775	V	98.64	46	pass
4799.750	V	95.79	46	pass


Notes: The emissions were scanned from 30 MHz to 10th harmonics; The worst case for Transmitter spurious is 33dBm-74.24dBc=-41.24dBm


Page 30 of 65

8.6 EMISSION MASK PLOT

The detailed procedure employed for Emission Mask measurements are specified as following:


- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing)



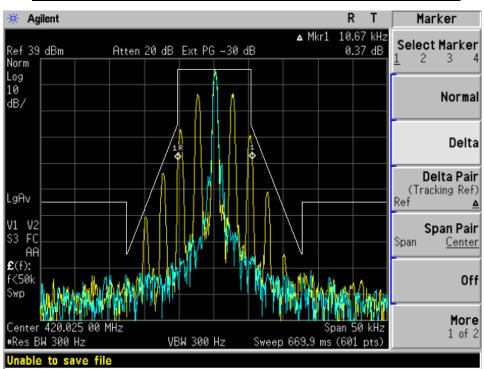

Page 31 of 65

The Worst Emission Mask for 25 KHz channel Separation (2W)

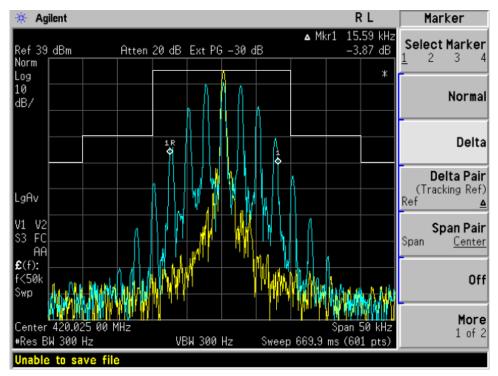

Page 32 of 65

9. MODULATION CHARACTERISTICS

9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 MEASUREMENT METHOD

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from −20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = 20log10 (Deviation of test frequency/Deviation of 1 KHz reference).

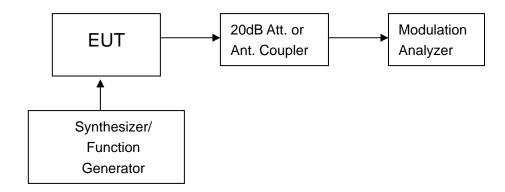


Figure 1: Modulation characteristic measurement configuration

9.3 MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
Modulation Analyzer	HP	8901B	3104A03367	2009.06

Report No.: AGC10081010QZ08F1 Page 33 of 65


9.4 MEASUREMENT RESULT

(a). Modulation Limit:

Middle Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.03	0.21	0.31	0.42
-15	0.05	0.36	0.51	0.63
-10	0.07	0.56	0.81	1.09
-5	0.1	0.99	1.42	1.47
0	0.22	1.54	1.73	1.55
+5	0.28	1.81	1.82	1.59
+10	0.21	1.75	1.83	1.5
+15	0.21	1.73	1.75	1.51
+20	0.41	1.65	1.69	1.52

Modulation Limit

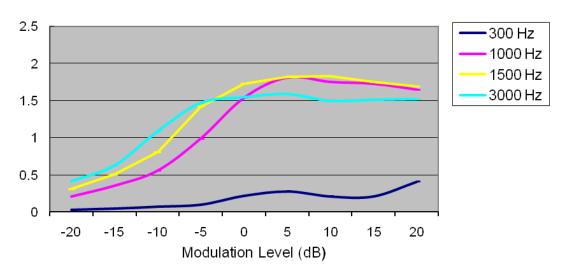


Report No.: AGC10081010QZ08F1 Page 34 of 65

Middle Channel @ 25KHz Channel Separation

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.04	0.53	0.64	0.75
-15	0.08	0.86	0.82	1.36
-10	0.12	1.44	1.72	2.21
-5	0.21	2.11	2.99	2.57
0	0.35	2.88	3.41	3.17
+5	0.54	3.42	3.46	3.29
+10	0.39	3.54	3.62	3.25
+15	0.55	3.67	3.28	3.01
+20	0.21	3.31	3.41	3.11

Modulation Limit

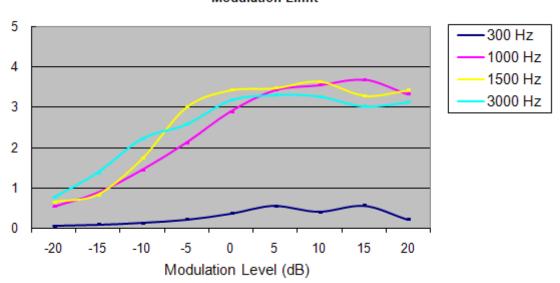


Report No.: AGC10081010QZ08F1 Page 35 of 65

(b). Audio Frequency Response:

12.5 KHz Channel Separations

12.5 KHZ Channel Separations			
Frequency (Hz)	Deviation (KHz)		
100			
200			
300	0.09		
400	0.15		
500	0.20		
600	0.28		
700	0.34		
800	0.37		
900	0.44		
1000	0.51		
1200	0.60		
1400	0.74		
1600	0.82		
1800	0.93		
2000	1.04		
2400	1.26		
2800	1.49		
3000	1.53		
3200	1.47		
3600	1.12		
4000	0.71		
4500	0.42		
5000	0.24		
5500	0.13		
6000	0.11		
6500	0.06		
7000	0.04		
7500	0.03		
9000			
10000			
12000			
14000			
16000			
20000			
25000			
30000			

Frequency Response of Middle Channel

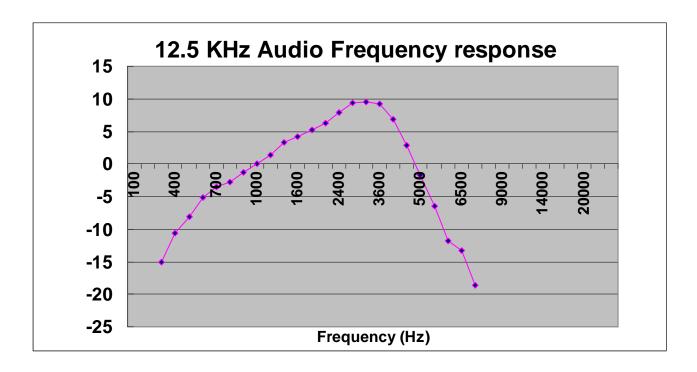


Report No.: AGC10081010QZ08F1 Page 37 of 65

25 KHz Channel Separation

Frequency (Hz)	Deviation (KHz)
100	
200	
300	0.19
400	0.31
500	0.40
600	0.56
700	0.68
800	0.74
900	0.88
1000	1.02
1200	1.21
1400	1.48
1600	1.64
1800	1.86
2000	2.09
2400	2.53
2800	2.98
3000	3.07
3200	2.94
3600	2.25
4000	1.42
4500	0.84
5000	0.47
5500	0.26
6000	0.22
6500	0.13
7000	0.08
7500	0.06
9000	
10000	
12000	
14000	
16000	
18000	
20000	
25000	
30000	
t	

Frequency Response of Middle Channel

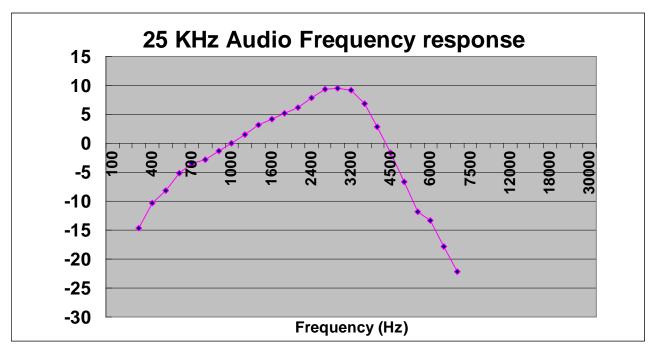

Page 39 of 65

10. MAXIMUMN TRANSMITTER POWER (CONDUCTED OUTPUT POWER) 10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

10.2 TEST PROCEDURE

The RF output of Two-way Radio was conducted to a spectrum analyzer through an appropriate attenuator.

10.3 TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2010.06

10.4 TEST RESULT

The maximum Conducted Power (CP) is 2 W for 12.5 KHz Channel Separation 2W for 25.0 KHz Channel Separation

Calculation Formula: CP = R + A + L

* Note:

CP: The final Conducted Power

R: The reading value from spectrum analyzer A: The attenuation value of the used attenuator

L: The loss of all connection cables


Report No.: AGC10081010QZ08F1 Page 40 of 65

Conducted Power Measurement Results							
Channel Separation	Channel	Measurement Result (dBm)					
Channel Separation	Chamilei	For 2W					
	Bottom(420.025MHz)	33.34(2.15W)					
12.5 KHz	Middle(450.025MHz)	33.29(2.09W)					
	Top (479.975MHz)	33.29(2.09W)					
	Bottom(420.025MHz)	33.45(2.21W)					
25 KHz	Middle(450.025MHz)	33.22(2.08W)					
	Top (479.975MHz)	33.26(2.09W)					


Report No.: AGC10081010QZ08F1 Page 41 of 65

10.4 CONDUCT SPURIOUS PLOT

Conduct Spurious Emission @ 420.025MHz (30MHz-1GHz)

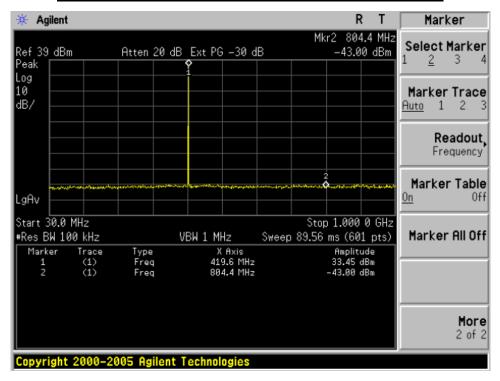


Conduct Spurious Emission @ 420.025MHz (1GHz-6GHz)

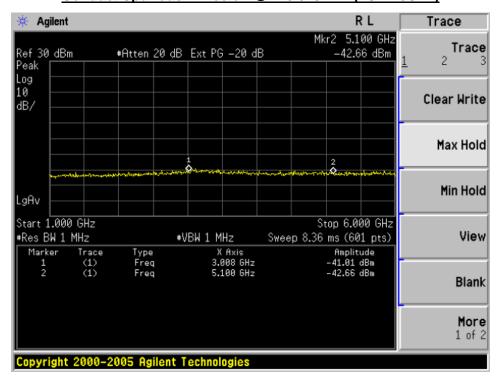


Page 42 of 65

Conduct Spurious Emission @ 450.025MHz (30MHz-1GHz)

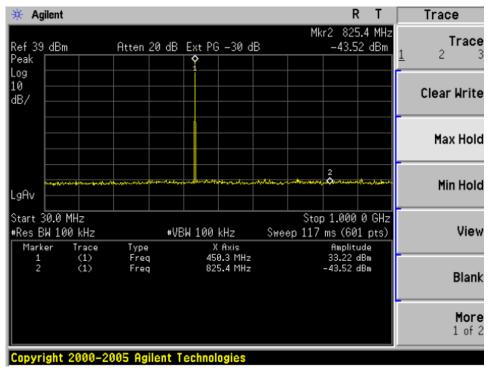


Conduct Spurious Emission @ 450.025MHz (1GHz-6GHz)

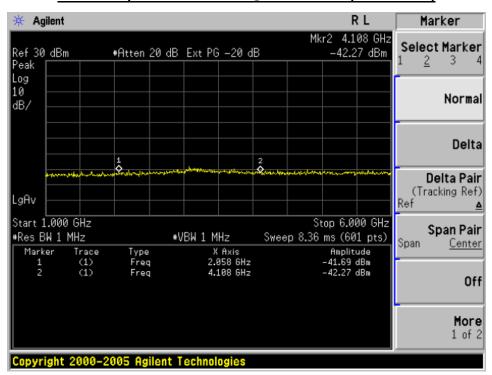


Page 43 of 65

Conduct Spurious Emission @ 479.975MHz (30MHz-1GHz)

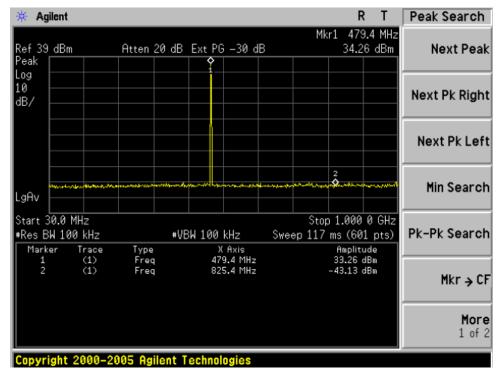

Conduct Spurious Emission @ 479.975MHz (1GHz-6GHz)

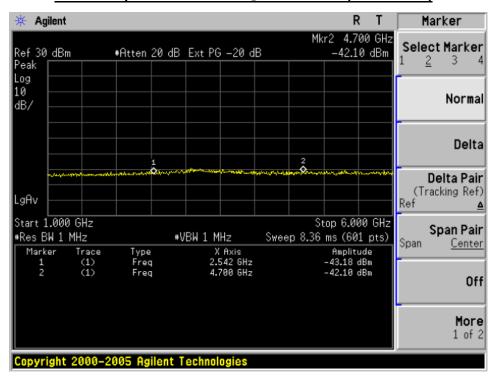

Page 44 of 65

11. RANSMITTER FREQUENCY BEHAVIOR

11.1 PROVISIONS APPLICABLE

Section 90.214

	Maximum fraguanay	All equipment						
Time intervals 1. 2	Maximum frequency difference ³	150 to 174 MHz	421 to 512 MHz					
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels								
t ₁ ⁴	± 25.0 kHz ± 12.5 kHz ± 25.0 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms					
Transient Frequency Behavior for Equipme	nt Designed to Operate	on 12.5 kHz Channels						
t ₁ ⁴	± 12.5 kHz ± 6.25 kHz ± 12.5 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms					
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels								
t ₁ ⁴	± 6.25 kHz ± 3.125 kHz ± 6.25 kHz	5.0 ms 20.0 ms 5.0 ms	10.0 ms 25.0 ms 10.0 ms					

 $^{^1}$ t $_{on}$ is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing. t_1 is the time period immediately following t_{on} . t_2 is the time period immediately following t_1 .

11.2TEST METHOD

TIA/EIA-603 2.2.19

11.3TEST INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
Signal Generator	R&S	SMT02	A0304261	2009.09
Storage Oscilloscope	Tektronix	TDS3052	B017447	2009.10

t₃ is the time period from the instant when the transmitter is turned off until t_{off}.

t_{off} is the instant when the 1 kHz test signal starts to rise.

2 During the time from the end of t₂ to the beginning of t₃, the frequency difference must not exceed the limits specified in § 90.213.

 ³ Difference between the actual transmitter frequency and the assigned transmitter frequency.
 4 If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

Page 45 of 65

11.4 DESCRIBE LIMIT LINE OF RANSMITTER FREQUENCY BEHAVIOR


ton: The switch-on instant ton of a transmitter is defined by the condition when the output power, measured at the antenna terminal, exceeds 0,1 % of the full output power (-30 dBc).

t1: period of time starting at ton and finishing according to above 11.1


t2: period of time starting at the end of t1 and finishing according to above 11.1

toff: switch-off instant defined by the condition when the output power falls below 0,1 % of the full output power (-30 dBc).

t3: period of time that finishing at toff and starting according to above 11.1

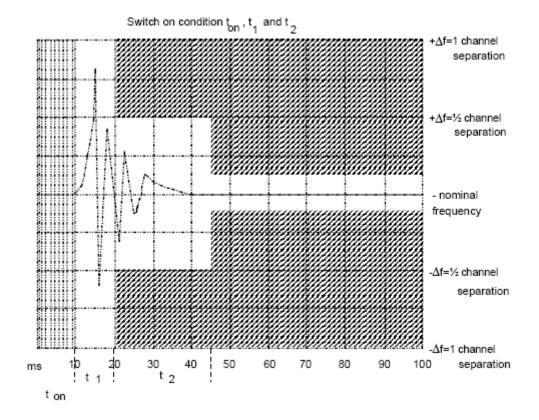


Page 46 of 65

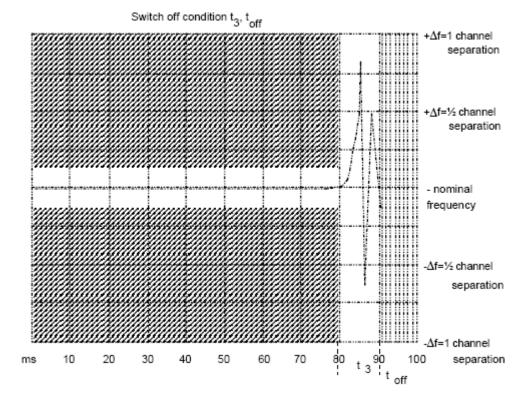


Report No.: AGC10081010QZ08F1 Page 47 of 65

11.5 MEASURE RESULT


Transmitter Frequency Behavior @ 25 KHz Channel Separation--Off to On

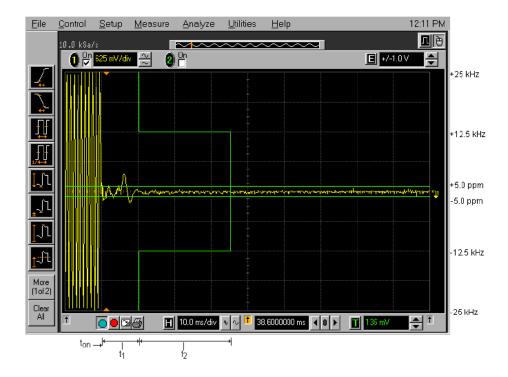


Transmitter Frequency Behaviour @ 25 KHz Channel Separation--On to Off

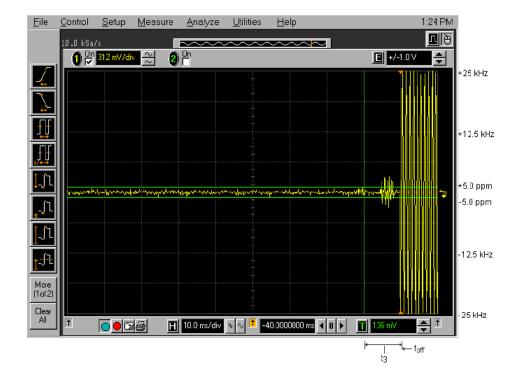

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--Off to On

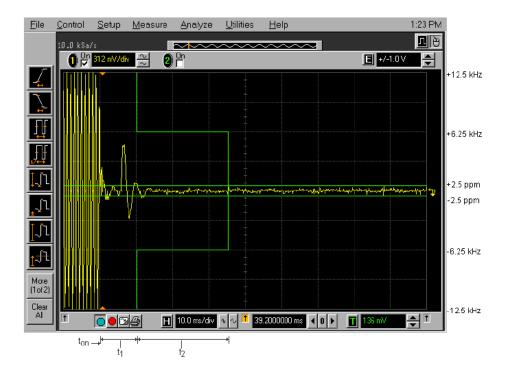

Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation--On to Off

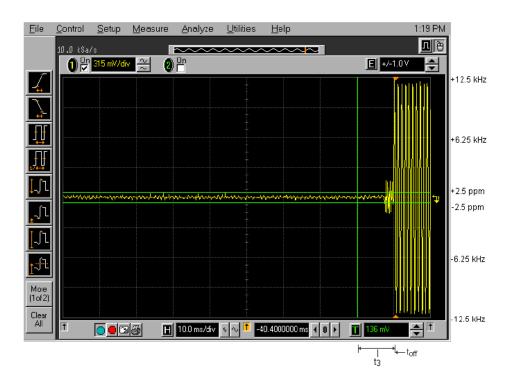

Report No.: AGC10081010QZ08F1 Page 49 of 65

12. Radiated Emission on Receiving Mode

PROVISIONS APPLICABLE 12.1

FCC Part 15 Subpart B Section 15.109

12.2 **TEST METHOD**

ANSI C 63.4: 2003


12.3 **TEST INSTRUMENTS**

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	CAL. DATE
SPECTRUM ANALYZER	AGILENT	E4440A	US44300399	2010.06
TEST RECEIVER	R&S	ESIB26	A0304218	2010.06
LOOP ANTENNA	R&S	HFH2-Z2	A0304220	2010.06
HORN ANT.	R&S	HF906	100150	2010.06
BROADBAND ANT.	R&S	HL562	A0304224	2010.06

Report No.: AGC10081010QZ08F1 Page 50 of 65

12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)

RADIATED EMISSION TEST RESULTS - HORIZONTAL

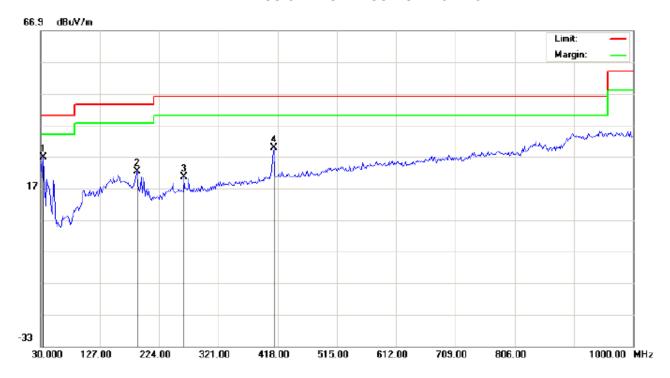

Site: site #1 Polarization: Horizontal Temperature: 26 Limit: FCC Class B 3M Radiation Power: AC110V/60Hz Humidity: 60 %


EUT: Handheld two way radio Distance: 3m

M/N: NC-6R Mode: Note:

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	34.8500	15.93	10.96	26.89	40.00	-13.11	peak			
2		188.4333	5.14	17.10	22.24	43.50	-21.26	peak			
3		264.4167	3.52	16.94	20.46	46.00	-25.54	peak			
4		411.5333	8.65	21.18	29.83	46.00	-16.17	peak			

Page 51 of 65

RADIATED EMISSION TEST RESULTS - VERTICAL

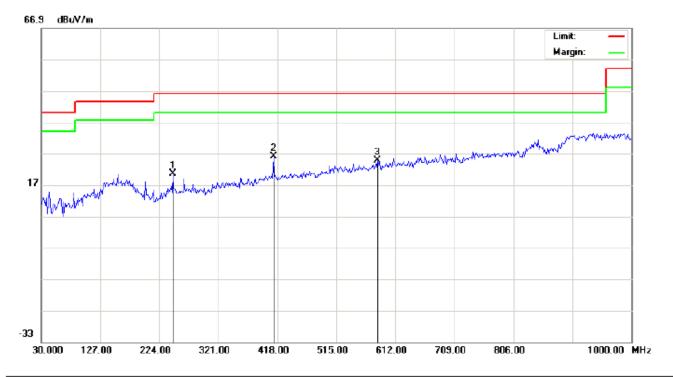

Site: site #1 Limit: FCC Class B 3M Radiation

EUT: Handheld two way radio

M/N: NC-6R Mode: Note: Polarization: Vertical Temperature: 26
Power: AC110V/60Hz Humidity: 60 %

Distance: 3m

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		246.6333	3.29	17.23	20.52	46.00	-25.48	peak			
2	*	411.5333	4.82	21.18	26.00	46.00	-20.00	peak			
3		582.9000	-0.04	24.70	24.66	46.00	-21.34	peak			

Page 52 of 65

13. Audio Low Pass Filter Response

13.1 LIMITS

2.1047(a): Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.

90.242(b)(8): Recommended audio filter attenuation characteristics are given below:

Audio band	Minimum Attenuation Rel. to 1 KHz Attenuation		
3 –20 KHz	60 log ₁₀ (f/3) dB where f is in KHz		
20 – 30 KHz	50dB		

13.2. METHOD OF MEASUREMENTS

The rated audio input signal was applied to the input of the audio low-pass filter (or of all modulation stages) using an audio oscillator, this input signal level and its corresponding output signal were then measured and recorded using the FFT Digital Spectrum Analyzer. Tests were repeated at different audio signal frequencies from 0 to 50 KHz.


13.3 TEST DATA


Page 53 of 65

12.5 KHz Channel Spacing, F3E, Frequency of All Modulation States

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-36.77	-61.31	-24.5	-61.6	
0.2	-36.77	-47.28	-10.5	-47.6	
0.4	-36.77	-10.13	26.6	-10.4	
0.6	-36.77	-5.02	31.8	-5.3	
0.8	-36.77	-1.92	34.9	-2.2	
1.0	-36.77	0.27	37.0	0.0	
1.5	-36.77	2.28	39.1	2.0	
2.0	-36.77	2.32	39.1	2.1	
2.5	-36.77	1.34	38.1	1.1	
3.0	-36.77	-1.97	34.8	-2.2	0
3.5	-36.77	-7.39	29.4	-7.7	-4
4.0	-36.77	-13.41	23.4	-13.7	-7
4.5	-36.77	-19.04	17.7	-19.3	-11
5.0	-36.77	-24.19	12.6	-24.5	-13
6.0	-36.77	-33.91	2.9	-34.2	-18
7.0	-36.77	-45.02	-8.3	-45.3	-22
8.0	-36.77	-57.23	-20.5	-57.5	-26
9.0	-36.77	-70.00	-33.2	-70.3	-29
10.0	-36.77	-70.00	-33.2	-70.3	-31
12.0	-36.77	-70.00	-33.2	-70.3	-36
14.0	-36.77	-70.00	-33.2	-70.3	-40
16.0	-36.77	-70.00	-33.2	-70.3	-44
18.0	-36.77	-70.00	-33.2	-70.3	-47
20.0	-36.77	-70.00	-33.2	-70.3	-49
22.0	-36.77	-70.00	-33.2	-70.3	-50
25.0	-36.77	-70.00	-33.2	-70.3	-50
30.0	-36.77	-70.00	-33.2	-70.3	-50
35.0	-36.77	-70.00	-33.2	-70.3	-50
40.0	-36.77	-70.00	-33.2	-70.3	-50
45.0	-36.77	-70.00	-33.2	-70.3	-50
50.0	-36.77	-70.00	-33.2	-70.3	-50

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.

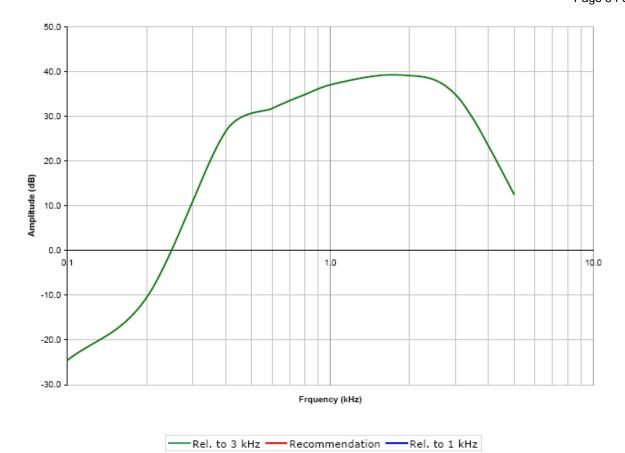

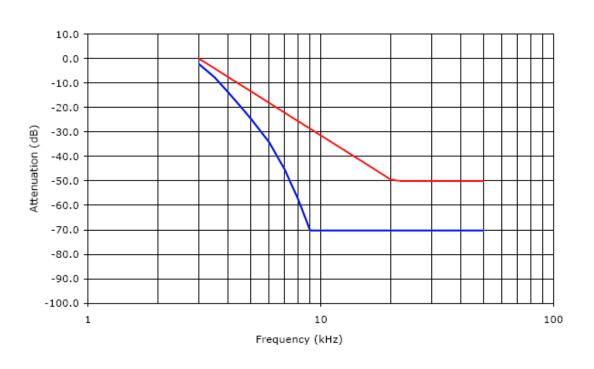


Page 55 of 65

25 KHz Channel Spacing, F3E, Frequency of All Modulation States

Frequency (KHz)	Audio In (dBV)	Audio Out (dBV)	Attenuation (Out - In) (dB)	Attenuation Rel. to 1 KHz (dB)	Recommended Attenuation (dB)
0.1	-36.42	-57.89	-21.5	-64.5	
0.2	-36.42	-41.78	-5.4	-48.3	
0.4	-36.42	-3.73	32.7	-10.3	
0.6	-36.42	0.99	37.4	-5.6	
8.0	-36.42	4.29	40.7	-2.3	
1.0	-36.42	6.56	43.0	0.0	
1.5	-36.42	8.26	44.7	1.7	
2.0	-36.42	8.37	44.8	1.8	
2.5	-36.42	7.99	44.4	1.4	
3.0	-36.42	6.48	42.9	-0.1	0
3.5	-36.42	2.84	39.3	-3.7	-4
4.0	-36.42	-2.16	34.3	-8.7	-7
4.5	-36.42	-7.53	28.9	-14.1	-11
5.0	-36.42	-12.87	23.6	-19.4	-13
6.0	-36.42	-22.65	13.8	-29.2	-18
7.0	-36.42	-33.61	2.8	-40.2	-22
8.0	-36.42	-43.78	-7.4	-50.3	-26
9.0	-36.42	-55.39	-19.0	-62.0	-29
10.0	-36.42	-62.38	-26.0	-68.9	-31
12.0	-36.42	-70.00	-33.6	-76.6	-36
14.0	-36.42	-70.00	-33.6	-76.6	-40
16.0	-36.42	-70.00	-33.6	-76.6	-44
18.0	-36.42	-70.00	-33.6	-76.6	-47
20.0	-36.42	-70.00	-33.6	-76.6	-49
22.0	-36.42	-70.00	-33.6	-76.6	-50
25.0	-36.42	-70.00	-33.6	-76.6	-50
30.0	-36.42	-70.00	-33.6	-76.6	-50
35.0	-36.42	-70.00	-33.6	-76.6	-50
40.0	-36.42	-70.00	-33.6	-76.6	-50
45.0	-36.42	-70.00	-33.6	-76.6	-50
50.0	-36.42	-70.00	-33.6	-76.6	-50

Note: Due to the difficulty of measuring the Frequency Response of the internal low-pass filter, the Frequency Response of All Modulation States is performed to show the roll-off at 3 KHz in comparison with the recommended audio filter attenuation.



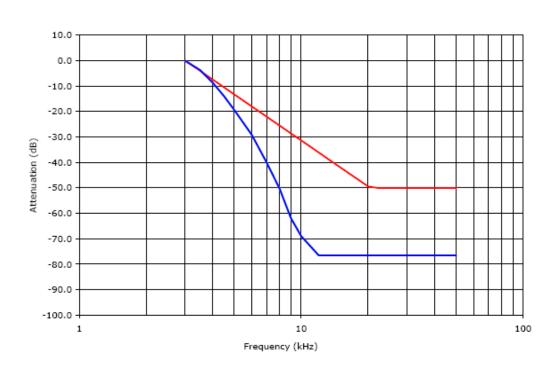

Report No.: AGC10081010QZ08F1 Page 57 of 65


APPENDIX I PHOTOGRAPHS OF SETUP

Report No.: AGC10081010QZ08F1 Page 58 of 65

CONDUCTED EMISSION TEST SETUP



RADIATED TEST SETUP

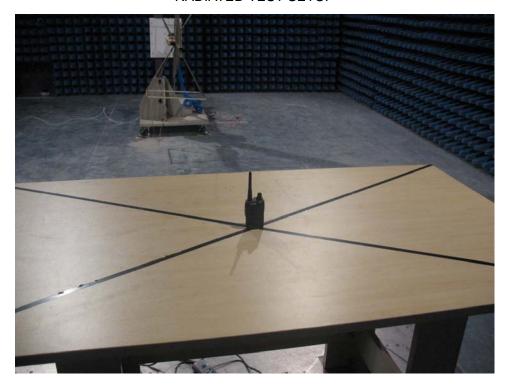

Report No.: AGC10081010QZ08F1 Page 59 of 65

APPENDIX II EXTERNAL VIEW OF EUT

Report No.: AGC10081010QZ08F1 Page 60 of 65

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



Report No.: AGC10081010QZ08F1 Page 61 of 65

LEFT VIEW OF EUT



RIGHT VIEW OF EUT



Report No.: AGC10081010QZ08F1 Page 62 of 65

FRONT VIEW OF EUT



BACK VIEW OF EUT



Report No.: AGC10081010QZ08F1 Page 63 of 65

ALL VIEW




Report No.: AGC10081010QZ08F1 Page 64 of 65

INTERNAL VIEW OF EUT - 1



Report No.: AGC10081010QZ08F1 Page 65 of 65

INTERNAL VIEW OF EUT - 2

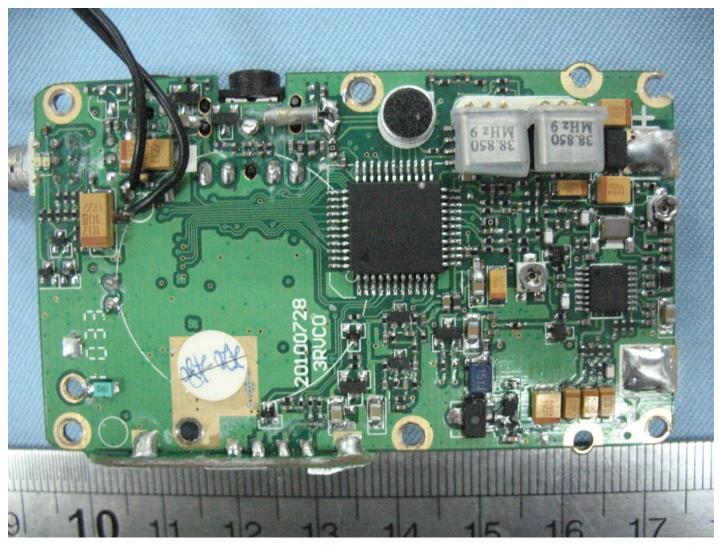

----END OF REPORT----