



FCC Part 90

TEST REPORT

For

Two Way Radio

Model Name: TD-780, TK-750, TK-880, NC-580

Trade Name: SYD, KYD

FCC ID: VO6TD-780

Report No.: SZAGC033071201E6

Date of Issue: Dec.28, 2007

Prepared For

**China New Century (Quanzhou) Communication Electronics Co., Ltd.
No.1, Fengshou Road, Zhaofeng Industrial District, Quanzhou City,
Fujian Province, China**

Tel: 86-595-2289 9399

Fax: 86-595-2288 7666

Prepared By

**Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd
Suite B11/B12, Huafeng Mall, Chuangye 2nd Road,
25 District, Bao'an, Shenzhen**

Tel: 86-755-2974 2358

Fax: 86-755-2600 8484

VERIFICATION OF COMPLIANCE

Applicant:	China New Century (Quanzhou) Communication Electronics Co., Ltd. No.1, Fengshou Road, Zhaofeng Industrial District, Quanzhou City, Fujian Province, China
Manufacturer:	China New Century (Quanzhou) Communication Electronics Co., Ltd. No.1, Fengshou Road, Zhaofeng Industrial District, Quanzhou City, Fujian Province, China
Product Description:	Two Way Radio
Brand Name:	SYD, KYD
Model Number:	TD-780, TK-750, TK-880, NC-580
Serial Number:	N/A
File Number:	SZAGC033071201E6
Date of Test:	Dec.24, 2007 ~ Dec.28, 2007

We hereby certify that:

The above equipment was tested by **Shenzhen Attestation of Global Compliance Science & Technology Co., Ltd.** The data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C 63.4:2003 and TIA/EIA 603. The sample tested as described in this report is in compliance with the FCC Rules Part 90.

The test results of this report relate only to the tested sample identified in this report.

Prepared By:

Tony Tian

Tony Tian

Dec.28, 2007

Checked By:

Randy He

Randy He

Dec.28, 2007

Authorized By

King Zhang

King Zhang

Dec.28, 2007

TABLE OF CONTENTS

1. GENERAL INFORMATION	4
1.1 PRODUCT DESCRIPTION	4
1.2 RELATED SUBMITTAL(S) / GRANT (S)	5
1.3 TEST METHODOLOGY	5
1.4 TEST FACILITY	5
1.5 SPECIAL ACCESSORIES	5
1.6 EQUIPMENT MODIFICATIONS	5
2. SYSTEM TEST CONFIGURATION	6
2.1 EUT CONFIGURATION	6
2.2 EUT EXERCISE	6
2.3 GENERAL TECHNICAL REQUIREMENTS	6
2.4 CONFIGURATION OF TESTED SYSTEM	6
3. SUMMARY OF TEST RESULTS	7
4. DESCRIPTION OF TEST MODES	8
5. CONDUCTED LIMITS (NOT APPLICABLE)	9
5.1 PROVISIONS APPLICABLE	9
5.2 MEASUREMENT PROCEDURE	9
5.3 TEST SETUP BLOCK DIAGRAM	10
5.4 TEST EQUIPMENT USED	10
5.5 TEST RESULT	11
6. FREQUENCY TOLERANCE	12
6.1 PROVISIONS APPLICABLE	12
6.2 MEASUREMENT PROCEDURE	12
6.3 TEST SETUP BLOCK DIAGRAM	13
6.4 TEST EQUIPMENT USED	13
6.5 TEST RESULT	13
7. EMISSION BANDWIDTH	18
7.1 PROVISIONS APPLICABLE	18
7.2 MEASUREMENT PROCEDURE	18
7.3 TEST SETUP BLOCK DIAGRAM	18
7.4 MEASUREMENT EQUIPMENT USED	18
7.5 MEASUREMENT RESULT	19
8. UNWANTED RADIATION	21
8.1 PROVISIONS APPLICABLE	21
8.2 MEASUREMENT PROCEDURE	21
8.3 TEST SETUP BLOCK DIAGRAM	22

8.4 MEASUREMENT EQUIPMENT USED:.....	24
8.5 MEASUREMENT RESULTS:.....	24
8.6 EMISSION MASK PLOT	27
9. MODULATION CHARACTERISTICS	29
9.1 PROVISIONS APPLICABLE.....	29
9.2 MEASUREMENT METHOD	29
9.3 MEASUREMENT INSTRUMENTS	29
9.4 MEASUREMENT RESULT	30
10. MAXIMUMN TRANSMITTER POWER (CONDUCTED OUTPUT POWER).....	37
10.1 PROVISIONS APPLICABLE.....	37
10.2 TEST PROCEDURE	37
10.3 TEST INSTRUMENTS.....	37
10.4 TEST RESULT	37
10.5 CONDUCT SPURIOUS PLOT	38
11. RANSMITTER FREQUENCY BEHAVIOR	39
11.1 PROVISIONS APPLICABLE.....	39
11.2 TEST METHOD	39
11.3 TEST INSTRUMENTS.....	39
11.4 MEASURE RESULT	39
12. RADIATED EMISSION ON RECEIVING MODE	42
12.1 PROVISIONS APPLICABLE.....	42
12.2 TEST METHOD	42
12.3 TEST INSTRUMENTS.....	42
12.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS).....	42
APPENDIX I PHOTOGRAPHS OF SETUP.....	43
APPENDIX II PHOTOGRAPHS OF EUT	45

1. GENERAL INFORMATION

1.1 Product Description

The EUT is a single channel Two-way Radio designed for voice communication. It is designed by way of utilizing the FM modulation achieves the system operating.

A major technical description of EUT is described as following:

Communication Type	Voice / Tone only
Modulation	FM
Emission Type	16K0F3E/11K0F3E
Emission Bandwidth	10.50 KHz (Limit:11.25 KHz for 12.5 KHz channel separation)
	15.50 KHz (Limit: 20 KHz for 25 KHz channel Separation)
Peak Frequency Deviation	2.05 KHz for 12.5 KHz Channel Separation (Limit<±2.5 KHz)
	4.10 KHz for 25 KHz Channel Separation (Limit<±5 KHz)
Audio Frequency Response	2.80 KHz (Limit<3.125 KHz)
Maximum Transmitter Power	4.68 W for 12.5 KHz Channel Separation
	4.70 W for 25 KHz Channel Separation
Output power Modification	Fixed can't be changed
Antenna Designation	Detachable
Power Supply	DC 7.4V by battery
Battery Endpoint	DC 6.1V
Operation Frequency Range and Channel	Frequency Range: 136 MHz to 174 MHz Channel Separation: 12.5KHz and 25KHz
	Top Channel: 136.000 MHz
	Centre Channel: 154.975 MHz
	Bottom Channel: 173.975 MHz

1.2 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: VO6TD-780** filing to comply with the FCC Part 90 requirements

1.3 Test Methodology

The radiated emission testing was performed according to the procedures of ANSI C63.4 : 2003;TIA/EIA 603 and FCC CFR 47 Rules of 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057.

1.4 Test Facility

The test site A (Accurate Technology Co., Ltd.) used to collect the radio test data is located on the address of F1, Bldg.A, Changyuan New Material Port, Keyuan Rd., Science & Industry ParK, Nanshan District, Shenzhen 518057, China

The registration number is 253065. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

The test site B (WorldStandardizationCertification&TestingCo., Ltd.) used to collect the radiated data is located on the address of 1-2/F, Dachong Keji Building, No.28 of Tonggu Road, Nanshan District, Shenzhen, 518057, China

The registration number is 989301. The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4: 2003.

1.5 Special Accessories

Not available for this EUT intended for grant.

1.6 Equipment Modifications

Not available for this EUT intended for grant.

2. SYSTEM TEST CONFIGURATION

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

The Transmitter was operated in the normal operating mode. the TX frequency was fixed which was for the purpose of the measurements.

2.3 General technical requirements

- (1). Section 15.207: Conducted Limits (Not applicable)
- (2). Section 90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area
- (3). Section 90.207: Modulation Characteristic
- (4). Section 90.209: Occupied Bandwidth
- (5). Section 90.210: Emission Mask
- (6). Section 90.213: Frequency Tolerance
- (7). Section 90.214: Transient Frequency Behavior

2.4 Configuration of Tested System

Fig. 2-1 Configuration of Tested System



Table 2-1 Equipment Used in Tested System

Item	Equipment	Model No.	Identifier	Series No.	Note
1	Two way Radio	TK-780	FCC ID: VO6TD-780	N/A	EUT
--	--	--	--	--	--
--	--	--	--	--	--

3. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.207	Conducted Emission	N/A
§90.205	Maximum Transmitter Power	Compliant
§90.207	Modulation Characteristic	Compliant
§90.209	Occupied Bandwidth	Compliant
§90.210	Emission Mask	Compliant
§90.213	Frequency Tolerance	Compliant
§90.214	Transient Frequency Behavior	Compliant

4. DESCRIPTION OF TEST MODES

The EUT (Two way Radio) has been tested under normal operating condition. Three channels (The top channel, the middle channel and the bottom channel) are chosen for testing at each channel separation (12.5 KHz/ 25 KHz).

5. CONDUCTED LIMITS (Not Applicable)

5.1 PROVISIONS APPLICABLE

a). For an intentional radiator that is designed to be connected to the public utility(AC) power line, the, the radio frequency voltage that is conducted back onto the AC power line on any frequencies within the band 150 KHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50uH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.


Frequency of Emission (MHz)	Conducted Limit(dBuV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56 *	56 to 46 *
0.5 – 5	56	46
5 – 30	60	50

* Decreases with the logarithm of the frequency.

5.2 MEASUREMENT PROCEDURE

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- (5) All support equipments received AC power from a second LISN, if any.
- (6) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (7) Analyzer / Receiver scanned from 150kHz to 30MHz for emissions in each of the test modes. During the above scans, the emissions were maximized by cable manipulation.

5.3 TEST SETUP BLOCK DIAGRAM

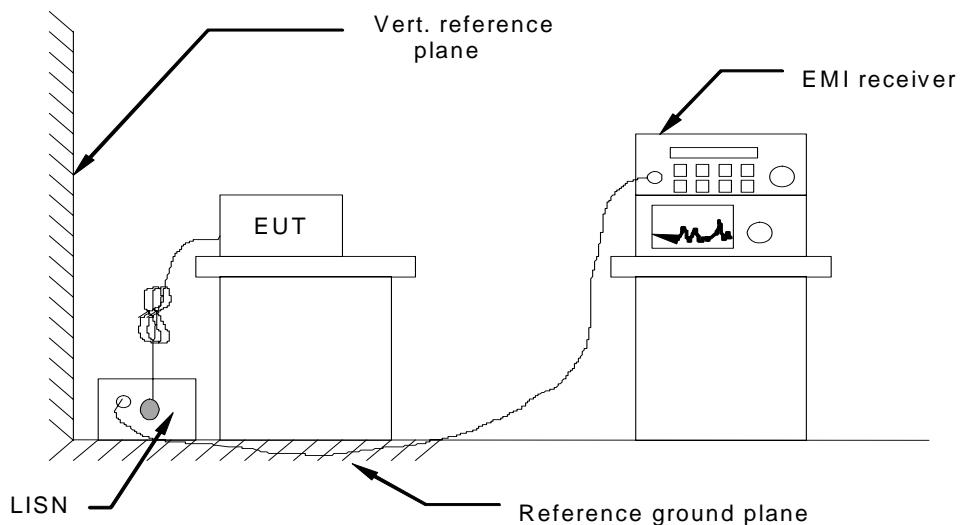

5.4 Test equipment used

Conducted Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
--	--	--	--	--
--	--	--	--	--
--	--	--	--	--
--	--	--	--	--

5.5 TEST RESULT

LINE CONDUCTED EMISSION TEST

****NOTE:**

“---” denotes the peak emission level was or more than 2dB below the Average limit, so no re-check anymore.

L1 = Line One (Hot side) / L2 = Line Two (Neutral side)

6. FREQUENCY TOLERANCE

6.1 Provisions Applicable

- a). According to FCC Part 2 Section 2.1055(a)(1), the frequency stability shall be measured with variation of ambient temperature from -30°C to $+60^{\circ}\text{C}$ centigrade.
- b). According to FCC Part 2 Section 2.1055(d)(2), for battery powered equipment, the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point, which is specified by the manufacturer.
- c). According to FCC Part 90 Section 90.213, the frequency tolerance must be maintained within 0.00025% for 12.5KHz channel separation and 0.0005% for 25KHz channel separation.

6.2 Measurement Procedure


6.2.1 Frequency stability versus environmental temperature

1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz. Record this frequency as reference frequency.
3. Set the temperature of chamber to 60°C . Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
4. Repeat step 2 with a 10°C decreased per stage until the lowest temperature -30°C is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15°C to 25°C . Otherwise, an environment chamber set for a temperature of 20°C shall be used. The EUT shall be powered by DC 13.8V
2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

6.3 Test Setup Block Diagram

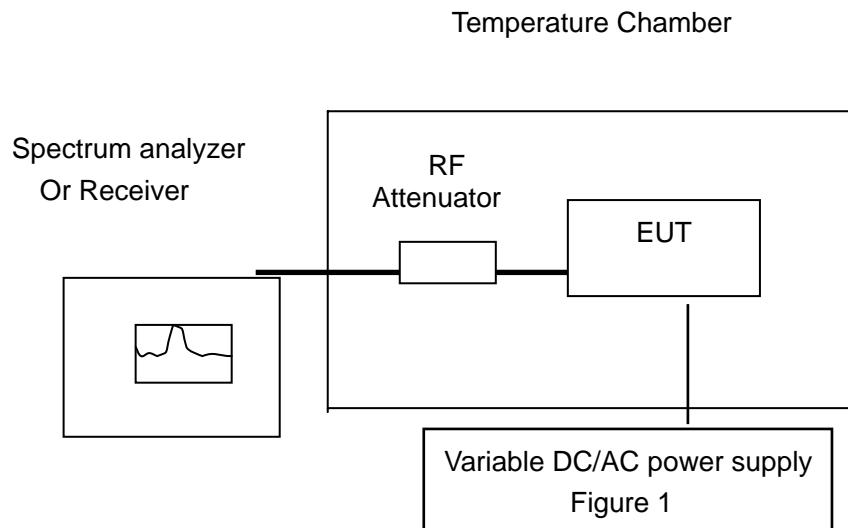

6.4 Test equipment used:

Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date
Receiver	Rohde&Schwarz	ESI26	100009	2007.01.10
Climate Chamber	ESPEC	EL-10KA	05107008	2007.01.29

6.5 Test result

(1) Frequency stability versus input voltage (battery operation end point voltage is 6.1V/1.20A)

Measurement Result for Channel Separation of 12.5 KHz

Channel	Reference Frequency (MHz)	Frequency Measured at end point voltage	Frequency Deviation (%)	Limit (%)
Top	173.975	173.97467	-0.000190	0.00025
Middle	154.975	154.97468	-0.000206	0.00025
Bottom	136.000	135.99972	-0.000206	0.00025

Measurement Result for Channel Separation of 25KHz

Channel	Reference Frequency (MHz)	Frequency Measured at end point voltage	Frequency Deviation (%)	Limit (%)
Top	173.975	173.97460	-0.000230	0.0005
Middle	154.975	154.97461	-0.000252	0.0005
Bottom	136.000	135.99968	-0.000235	0.0005

(2)Frequency stability versus ambient temperature (DC 7.4V/ 1.18A)

Bottom Channel @ 12.5 KHz Channel Separations

Reference Frequency: 136.000MHz		Limit: $\pm 0.00025\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	%
60	7.4	135.99971	-0.000213
50	7.4	135.99978	-0.000162
40	7.4	135.99982	-0.000132
30	7.4	135.99990	-0.000074
20	7.4	135.99997	-0.000022
10	7.4	136.00002	0.000015
0	7.4	136.00008	0.000059
-10	7.4	136.00012	0.000088
-20	7.4	136.00020	0.000147
-30	7.4	136.00024	0.000176

Middle Channel @ 12.5 KHz Channel Separations

Reference Frequency: 154.975 MHz		Limit: $\pm 0.00025\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	%
60	7.4	154.97463	-0.000239
50	7.4	154.97471	-0.000187
40	7.4	154.97478	-0.000142
30	7.4	154.97487	-0.000084
20	7.4	154.97496	-0.000026
10	7.4	154.97502	0.000013
0	7.4	154.97506	0.000039
-10	7.4	154.97511	0.000071
-20	7.4	154.97519	0.000123
-30	7.4	154.97527	0.000174

Top Channel @12.5KHz Channel Separation

Reference Frequency: 173.975 MHz		Limit: $\pm 0.00025\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	%
60	7.4	173.97459	-0.000236
50	7.4	173.97471	-0.000167
40	7.4	173.97479	-0.000121
30	7.4	173.97485	-0.000086
20	7.4	173.97493	-0.000040
10	7.4	173.97514	0.000080
0	7.4	173.97519	0.000109
-10	7.4	173.97523	0.000132
-20	7.4	173.97526	0.000149
-30	7.4	173.9753	0.000172

Top Channel @ 25 KHz Channel Separation

Reference Frequency: 174.975 MHz		Limit: $\pm 0.0005\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	%
60	7.4	173.97459	-0.000236
50	7.4	173.97471	-0.000167
40	7.4	173.97479	-0.000121
30	7.4	173.97485	-0.000086
20	7.4	173.97493	-0.000040
10	7.4	173.97514	0.000080
0	7.4	173.97525	0.000144
-10	7.4	173.97534	0.000195
-20	7.4	173.97537	0.000213
-30	7.4	173.9754	0.000230

Middle Channel @ 25 KHz Channel Separations

Reference Frequency: 154.975 MHz		Limit: $\pm 0.0005\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	%
60	7.4	154.97460	-0.000258
50	7.4	154.97470	-0.000194
40	7.4	154.97477	-0.000148
30	7.4	154.97485	-0.000097
20	7.4	154.97494	-0.000039
10	7.4	154.97501	0.000006
0	7.4	154.97507	0.000045
-10	7.4	154.97513	0.000084
-20	7.4	154.97525	0.000161
-30	7.4	154.97533	0.000213

Bottom Channel @ 25 KHz Channel Separation

Reference Frequency: 136.000 MHz		Limit: $\pm 0.0005\%$	
Environment Temperature (°C)	Power Supply (V)	Frequency deviation measured with time Elapse (10 minutes)	
		(MHz)	%
60	7.4	135.99968	-0.000235
50	7.4	135.99975	-0.000184
40	7.4	135.99980	-0.000147
30	7.4	135.99988	-0.000088
20	7.4	135.99995	-0.000037
10	7.4	136.00001	0.000007
0	7.4	136.00007	0.000051
-10	7.4	136.00011	0.000081
-20	7.4	136.00020	0.000147
-30	7.4	136.00028	0.000206

7. EMISSION BANDWIDTH


7.1 Provisions Applicable

According to FCC Part 90 Section 90.209: The authorized bandwidth shall be 11.25 KHz for 12.5 KHz and 20 KHz for 25 KHz

7.2 Measurement Procedure

- 1). The EUT was placed on a turn table which is 0.8m above ground plane.
- 2). The EUT was modulated by 1 KHz Sine wave audio signal to achieve 60% deviation
- 3). Set SPA Center Frequency = fundamental frequency, RBW=VBW= 100 Hz, Span =50 KHz.
- 4). Set SPA Max hold. Mark peak, -20dB.

7.3 Test Setup Block Diagram

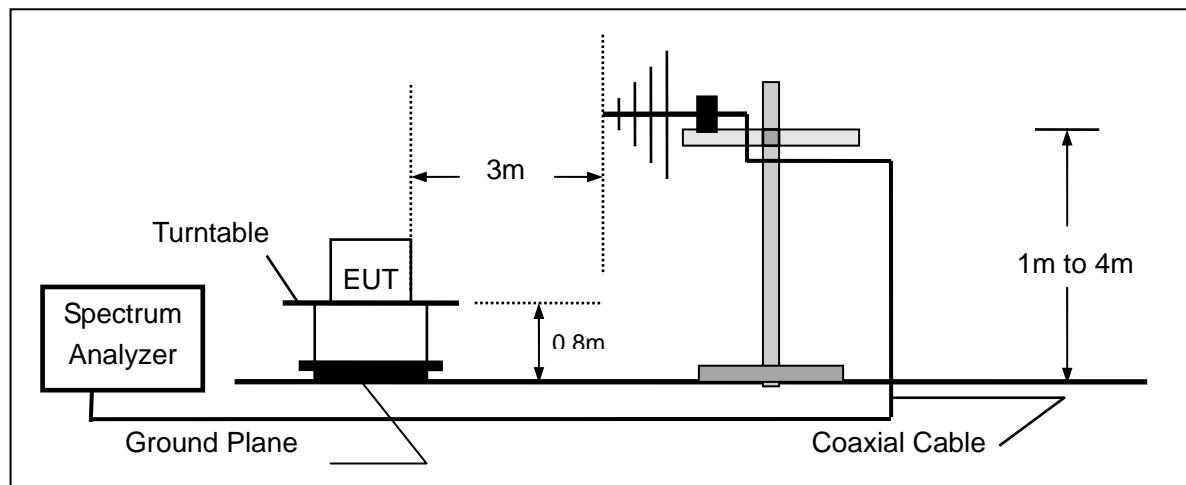


7.4 Measurement Equipment Used:


Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date
Spectrum Analyzer	Agilent	E4443A	MY46185649	2007.07.13
Climate Chamber	ESPEC	EL-10KA	05107008	2007.01.29

7.5 MEASUREMENT RESULT:

26 dB Bandwidth Measurement Result						
Operating Frequency	12.5 KHz Channel Separation			25 KHz Channel Separation		
	Test Data	Limits	Result	Test Data	Limits	Result
Bottom Channel	10.22 KHz	11.25 KHz	Pass	14.29 KHz	20.00 KHz	Pass
Middle Channel	10.50 KHz	11.25 KHz	Pass	15.50 KHz	20.00 KHz	Pass
Top Channel	10.36 KHz	11.25 KHz	Pass	15.38 KHz	20.00 KHz	Pass

Occupied bandwidth of Middle Channel @ 12.5KHz Channel Separation

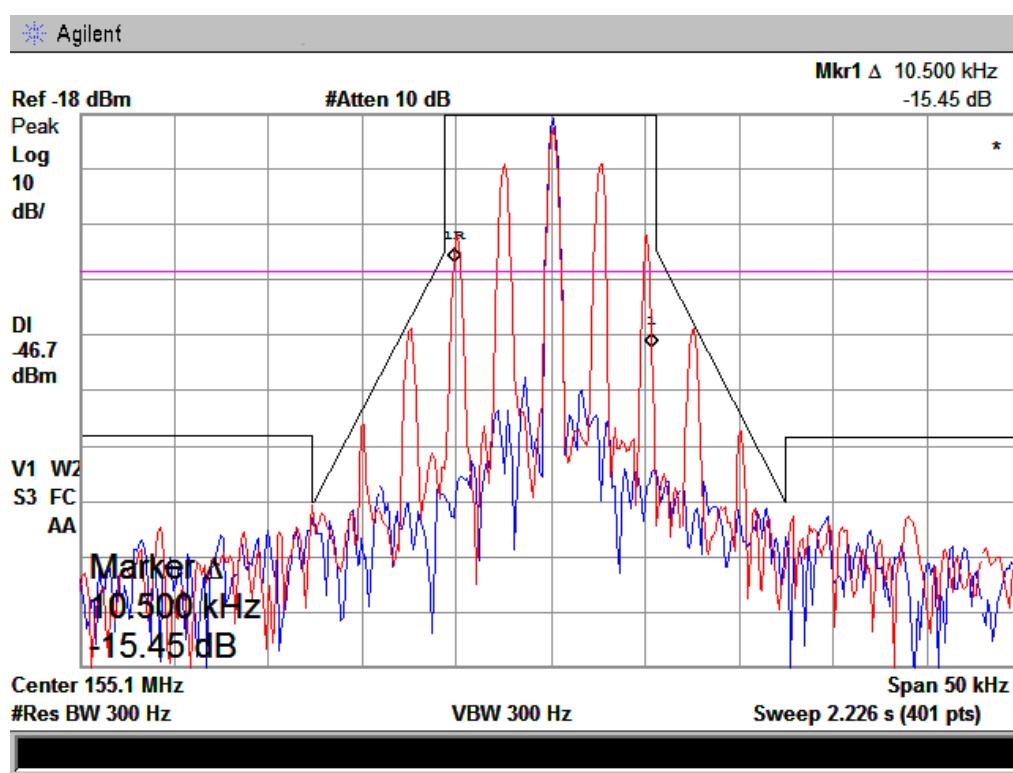

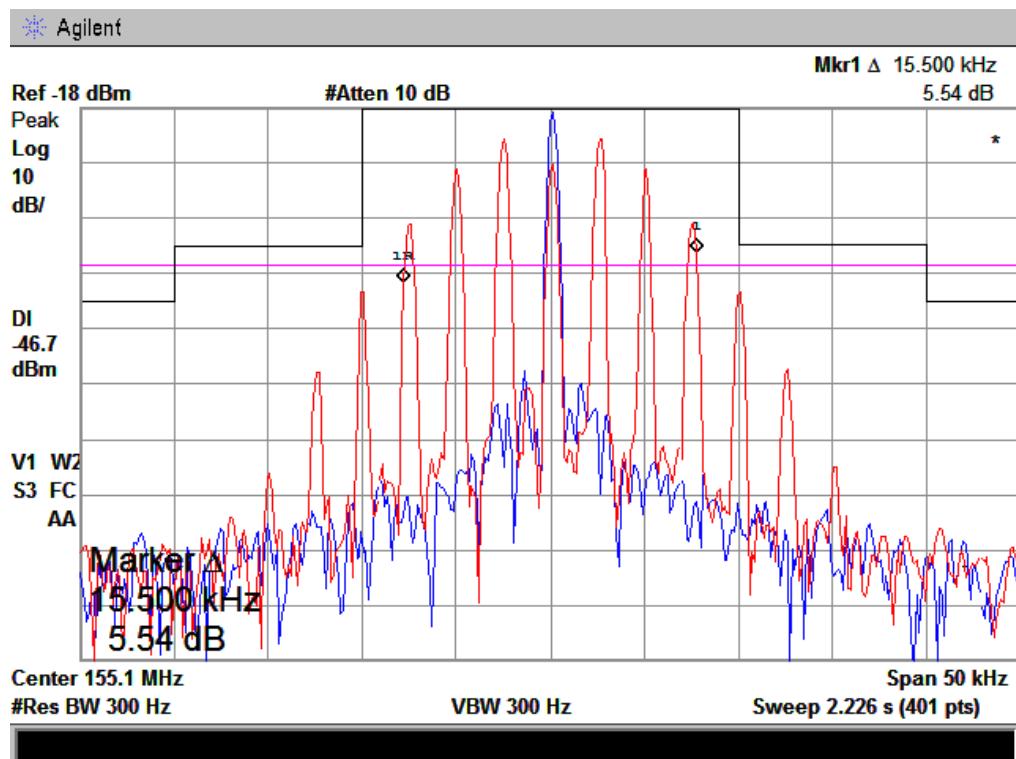Occupied bandwidth of Middle Channel @ 25 KHz Channel Separation

8. UNWANTED RADIATION

8.1 Provisions Applicable

8.1.1 According to Section 90.210, the power of each unwanted emission shall be less than Transmitted Power as specified below for transmitters designed to operate with 12.5 KHz channel bandwidth:

- (1).On any frequency removed from the center of the authorized bandwidth f_0 to 5.625 KHz removed from f_0 : Zero dB
- (2). On any frequency removed from the center of the authorized bandwidth by a displacement frequency (f_d in KHz) f_0 of more than 5.625 KHz but no more than 12.5 KHz: At least $7.27(f_d-2.88\text{ KHz})$ dB
- (3). On any frequency removed from the center of the authorized bandwidth by a displacement Frequency (f_d in KHz) f_0 of more than 12.5 KHz: At least $50+10 \log(P)$ dB or 70 dB, which ever is lesser attenuation.

8.1.2 According to Section 90.210, Emission mask B. For transmitters designed to transmit with 25KHz channel separation and equipped with an audio low-pass filter, the power of any emission must be attenuated below the unmodulated carrier power (P) as following:


- (1), On any frequency removed from the assigned frequency by more than 50 percent, but no more than 100 percent of the authorized bandwidth: At least 25 dB.
- (2), On any frequency removed from the assigned frequency by more than 100 percent, but no more than 250 percent of the authorized bandwidth: At least 35 dB.
- (3), On any frequency removed from the assigned frequency by more than 250 percent of the authorized bandwidth: At least $43+10\log(P)$ dB.

8.2 Measurement Procedure

- (1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6). The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8). The maximum signal level detected by the measuring receiver shall be noted.


- (9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10). Replace the antenna with a proper Antenna (substitution antenna).
- (11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12). The substitution antenna shall be connected to a calibrated signal generator.
- (13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

8.3 Test Setup Block Diagram

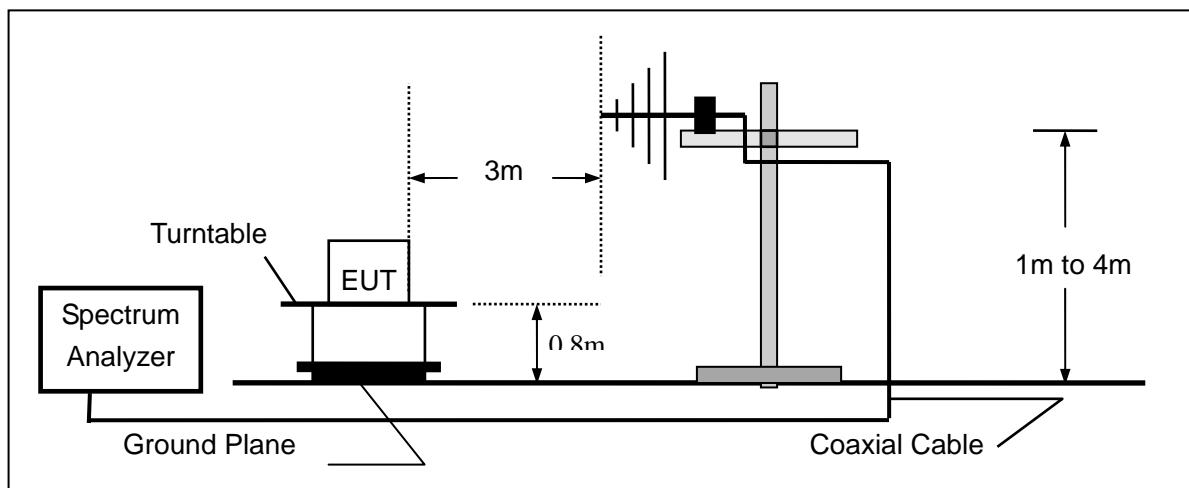


SUBSTITUTION METHOD: (Radiated Emissions)

Radiated Below 1GHz

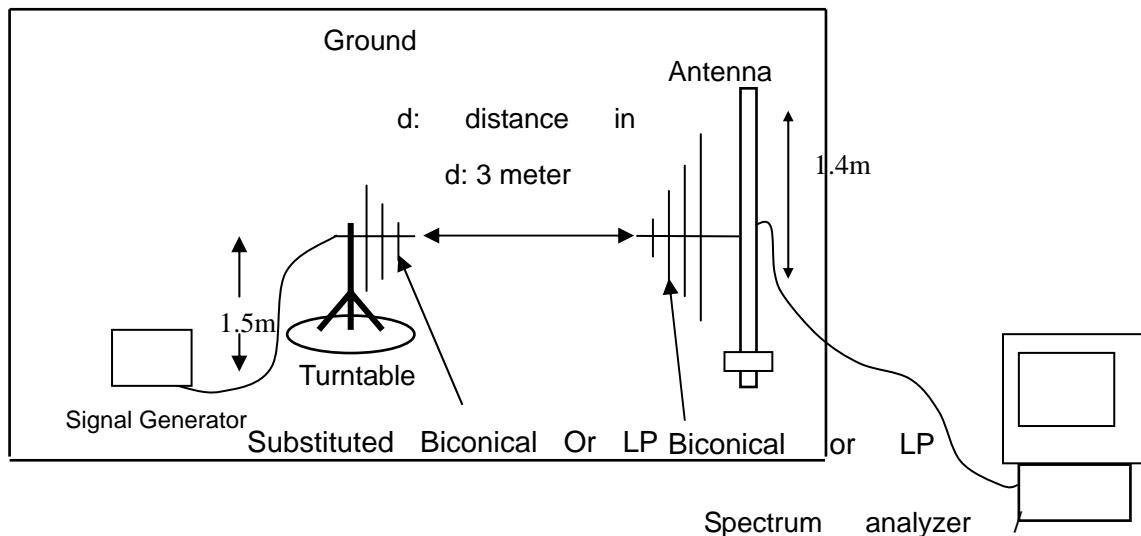

Radiated Above 1 GHz

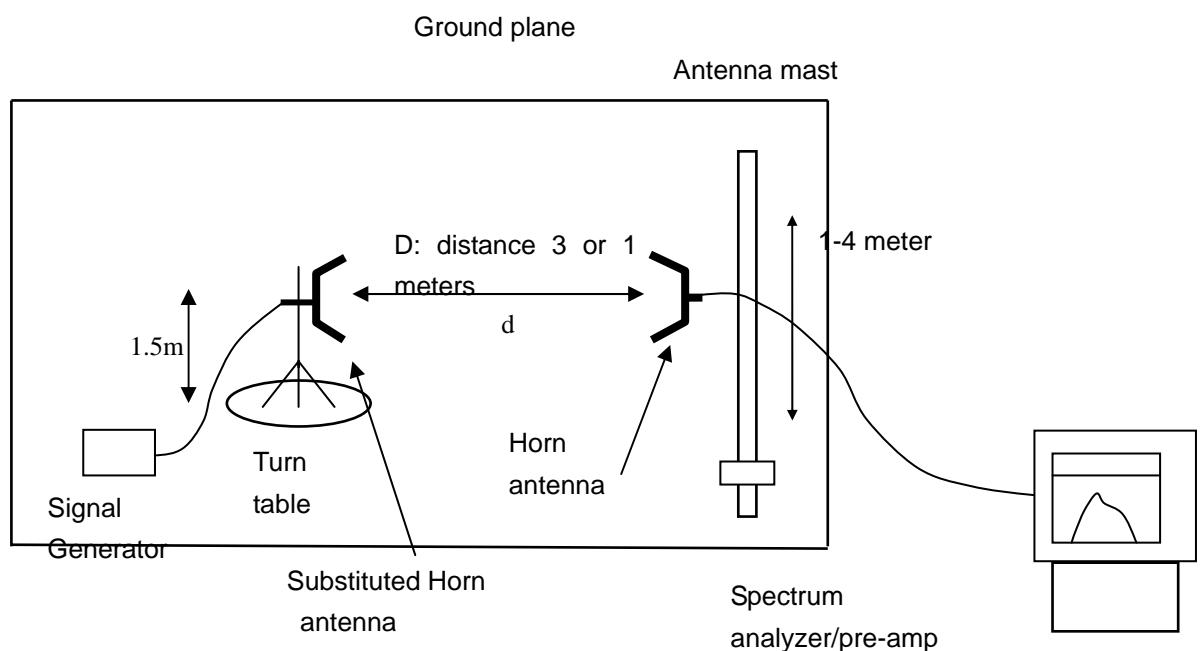

8.4 Measurement Equipment Used:

Radiated Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date
ULTRA-BROADBAND ANTENNA	Schwarzbeck	VULB9163	9163-194	2007.07.13
EMI TEST RECEIVER	ROHDE & SCHWARZ	ESCS30	100307	2007.07.13
Spectrum Analyzer	Agilent	E4443A	MY46185649	2007.07.13
Signal Generator	Rohde & Schwarz	SML01	101161	2007.07.13

8.5 MEASUREMENT RESULTS:

Measurement Result For 12.5 KHz Channel Separation

Calculation: Limit (dBm)= EL-50-10log10 (TP)

Notes:

EL is the emission level of the Output Power expressed in dBm,, in this application, the EL is 36.99 dBm.

Limit (dBm)=36.99-50-10log 10 (5) = -20

Bottom Channel

Frequency (MHz)	Reading level (dBuV)	Antenna Polarizatio n	S.G. (dBm)	Cable loss (dB)	Correction (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
--	--	--	--	--	--	--	-20	--

Middle Channel

Frequency (MHz)	Reading level (dBuV)	Antenna Polarizatio n	S.G. (dBm)	Cable loss (dB)	Correction (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
--	--	--	--	--	--	--	-20	--

Top Channel

Frequency (MHz)	Reading level (dBuV)	Antenna Polarizatio n	S.G. (dBm)	Cable loss (dB)	Correction (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
--	--	--	--	--	--	--	-20	--

Notes:

“—” means that the emission level is too low to be measured or at least 20 dB down than the limit.

Measurement Result For 25 KHz Channel Separation

Calculation: Limit (dBm)= EL-43-10log10 (TP)

Notes: EL is the emission level of the Output Power expressed in dBm,, in this application, the EL is 10log10(P) dBm.

Limit (dBm)=10log10(P) - 43-10log 10 (P) = -13 dBm

Bottom Channel

Frequency (MHz)	Reading level (dBuV)	Antenna Polarizatio n	S.G. (dBm)	Cable loss (dB)	Correction (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
--	--	--	--	--	--	--	-13	--

Middle Channel

Frequency (MHz)	Reading level (dBuV)	Antenna Polarizatio n	S.G. (dBm)	Cable loss (dB)	Correction (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
--	--	--	--	--	--	--	-13	--

Top Channel

Frequency (MHz)	Reading level (dBuV)	Antenna Polarizatio n	S.G. (dBm)	Cable loss (dB)	Correction (dB)	Emission level (dBm)	Limit (dBm)	Margin (dB)
--	--	--	--	--	--	--	-13	--

Notes:


“—” means that the emission level is too low to be measured or at least 20 dB down than the limit.

8.6 Emission Mask Plot


The detailed procedure employed for Emission Mask measurements are specified as following:

- The transmitter shall be modulated by a 2.5 kHz audio signal,
- The level of the audio signal employed is 16 dB greater than that necessary to produce 50% of rated system deviation. Rated system deviation is 2.5 kHz (12.5 kHz channel spacing) and 5 kHz (25 kHz channel spacing)

The Worst Emission Mask for 12.5 KHz channel Separation

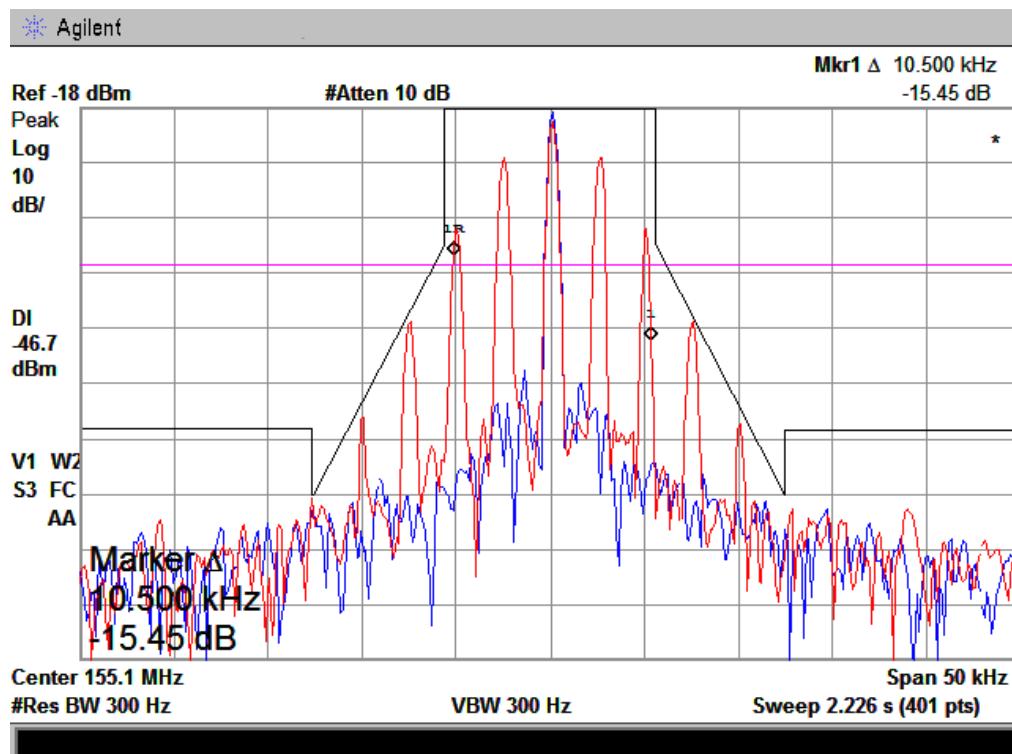

The Worst Emission Mask for 25 KHz channel Separation

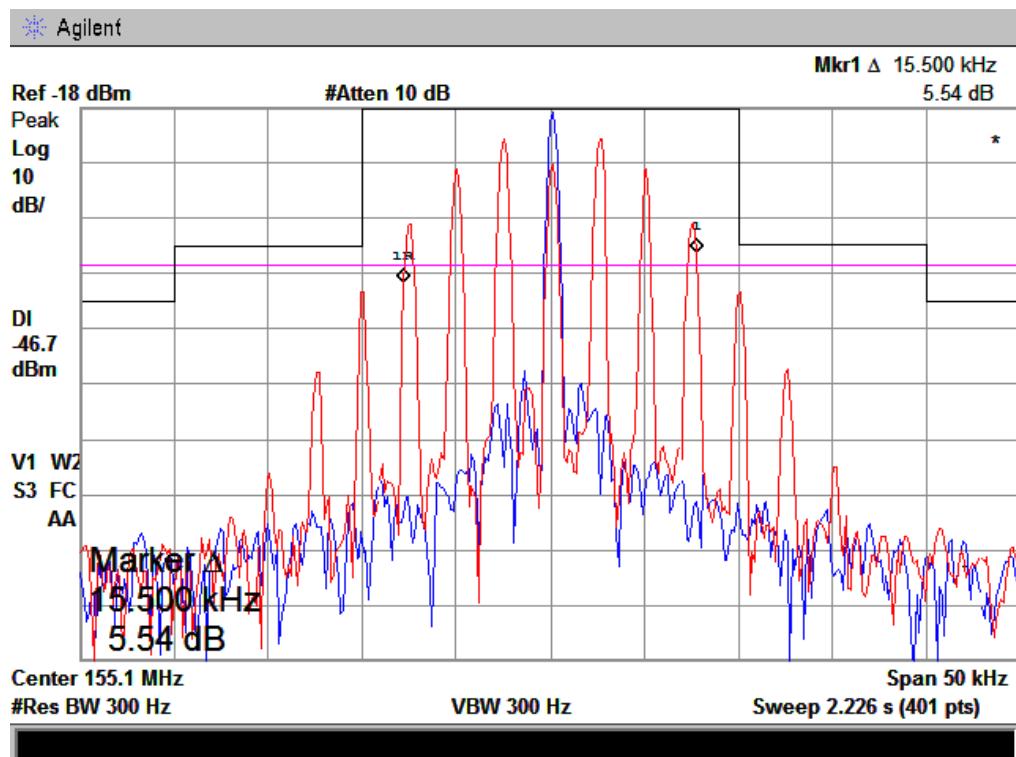

9. MODULATION CHARACTERISTICS

9.1 Provisions Applicable

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

9.2 Measurement Method

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). Configure the EUT as shown in figure 1.
- (2). Adjust the audio input for 20% of rated system deviation at 1 KHz using this level as a reference (0 dB).
- (3). Vary the Audio frequency from 100 Hz to 10 KHz and record the frequency deviation.
- (4). Audio Frequency Response = $20\log_{10} (\text{Deviation of test frequency}/\text{Deviation of 1KHz reference})$.

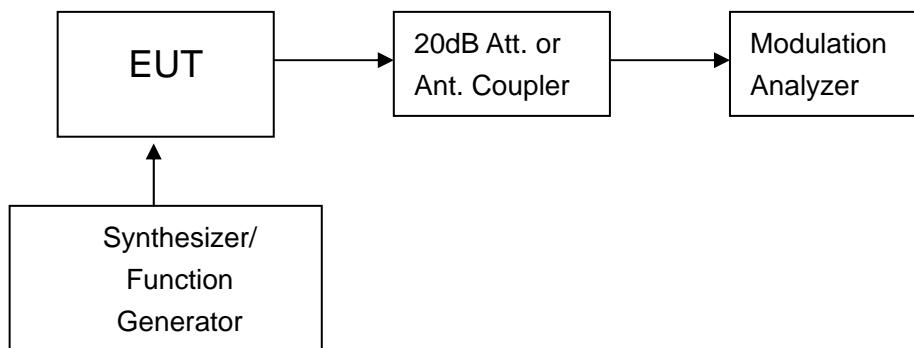


Figure 1: Modulation characteristic measurement configuration

9.3 Measurement Instruments


Name of Equipment	Manufacturer	Model	Serial Number	Cal. Date
Modulation Analyzer	HP	8901B	3104A03367	2007.07.13
Signal Generator	Rohde&Schwarz	SMT03	100059	2007.07.13

9.4 Measurement Result

(a). Modulation Limit:


Middle Channel @ 12.5 KHz Channel Separations

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.03	0.16	0.26	0.47
-15	0.06	0.27	0.44	0.82
-10	0.12	0.48	0.78	1.41
-5	0.20	0.66	1.89	1.78
0	0.36	1.51	2.00	1.80
+5	0.62	2.01	2.05	1.81
+10	1.01	2.02	2.05	1.82
+15	1.22	2.04	2.05	1.82
+20	1.42	2.04	2.05	1.82

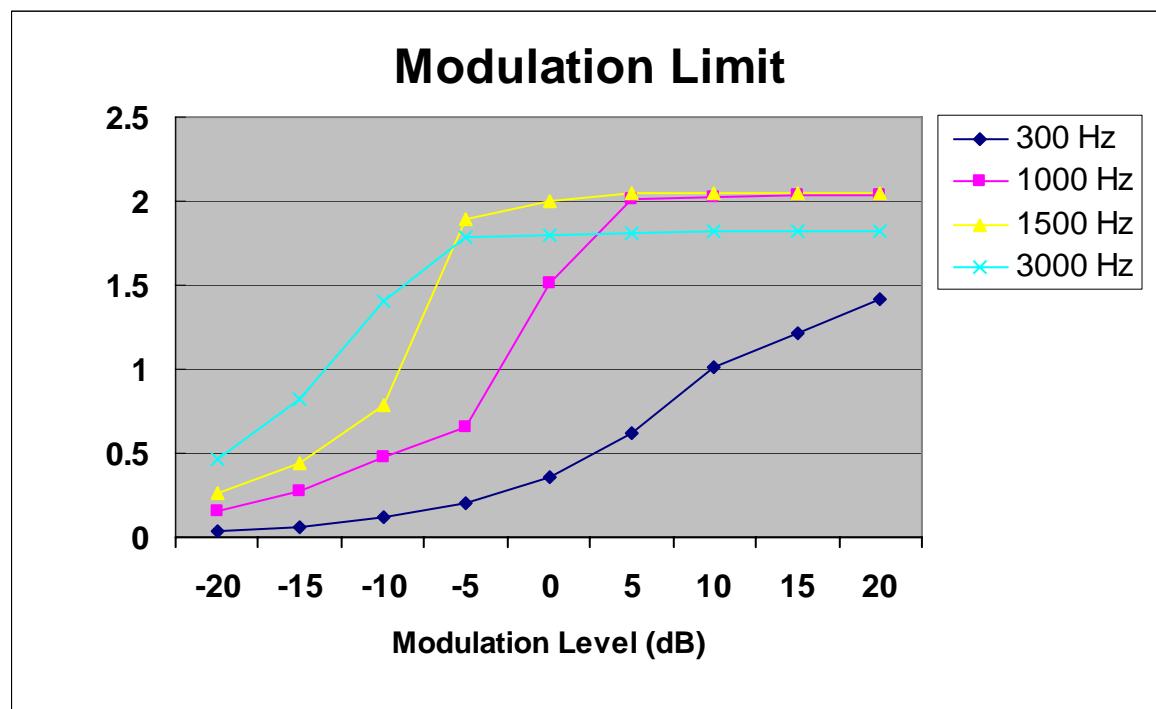


Middle Channel @ 25KHz Channel Separation


Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.07	0.31	0.50	0.93
-15	0.13	0.54	0.87	1.63
-10	0.23	0.97	1.57	2.80
-5	0.40	1.70	2.78	3.55
0	0.71	3.03	4.01	3.60
+5	1.24	4.03	4.10	3.61
+10	2.00	4.04	4.10	3.62
+15	2.43	4.09	4.10	3.62
+20	2.83	4.08	4.10	3.62

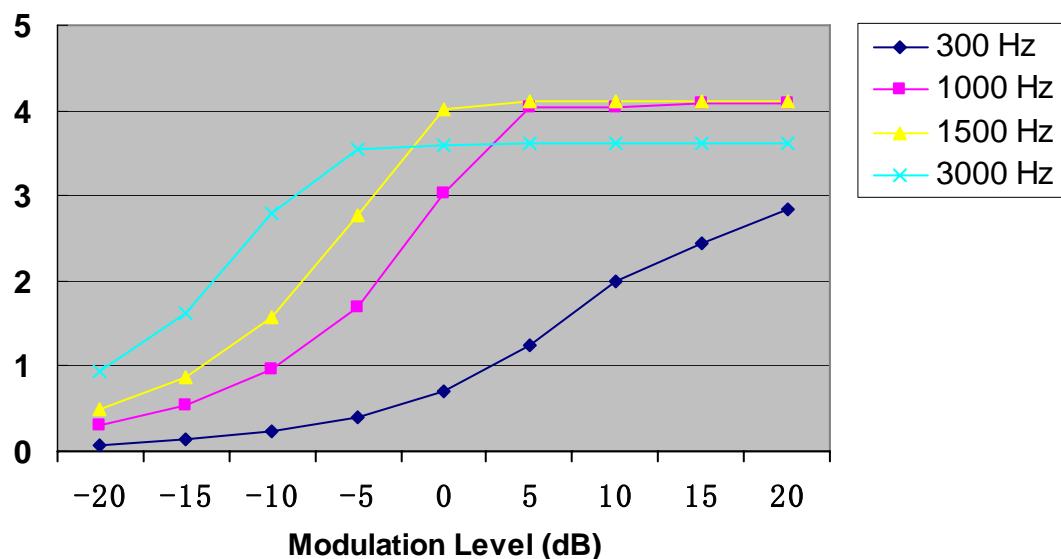Modulation Limit

Audio Low Pass Filter Response Test Plot:
Response for 12.5 KHz Channel Separation

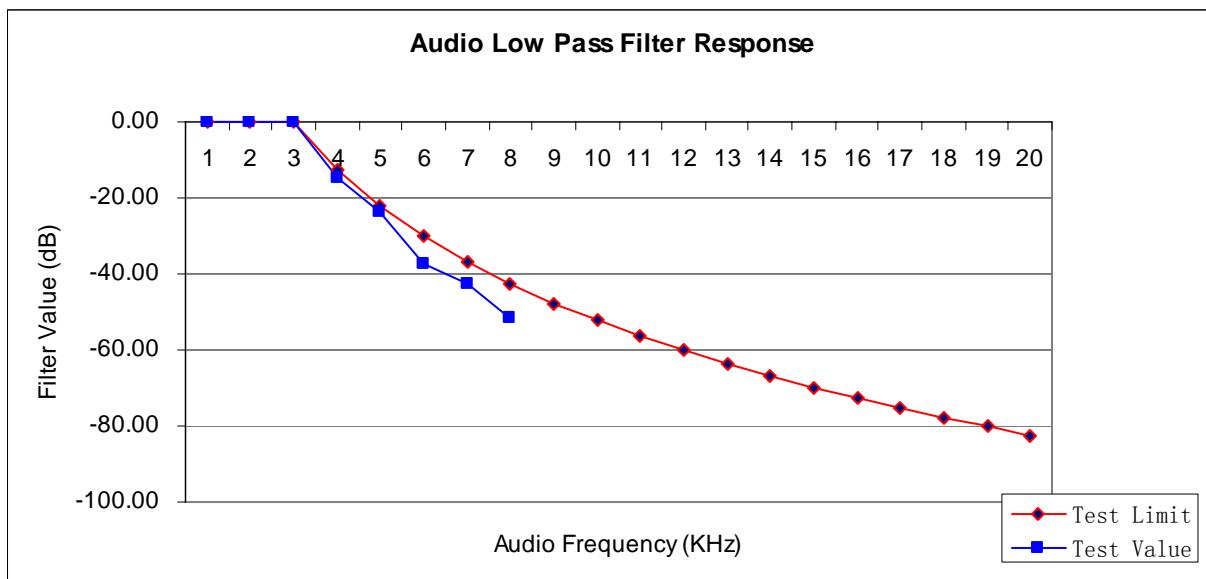


Response for 25.0 KHz Channel Separation

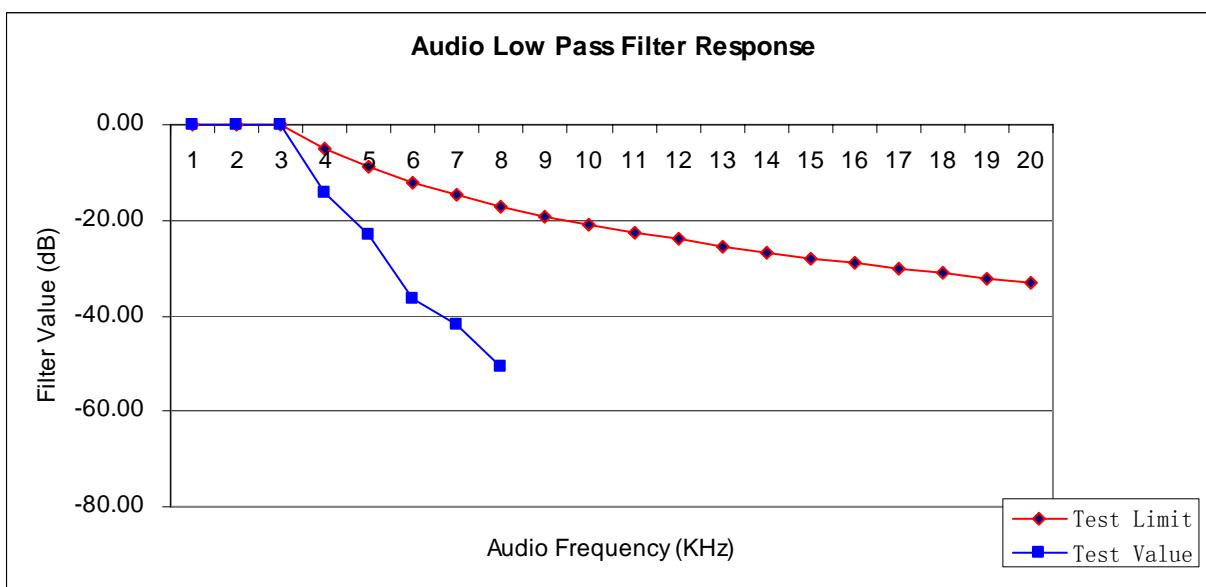

(b). Audio Frequency Response:**12.5 KHz Channel Separations**

Frequency (Hz)	Deviation (KHz)
100	--
200	--
300	0.12
400	0.16
500	0.22
600	0.27
700	0.33
800	0.38
900	0.44
1000	0.51
1200	0.62
1400	0.74
1600	0.87
1800	1.01
2000	1.23
2400	1.36
2800	1.43
3200	1.37
3600	1.16
4000	0.72
4500	0.64
5000	0.44
5500	0.30
6000	0.21
6500	0.13
7000	0.09
7500	0.06
8000	--
10000	--
12000	--
14000	--
16000	--
18000	--
20000	--
25000	--
30000	--


Frequency Response of Middle Channel

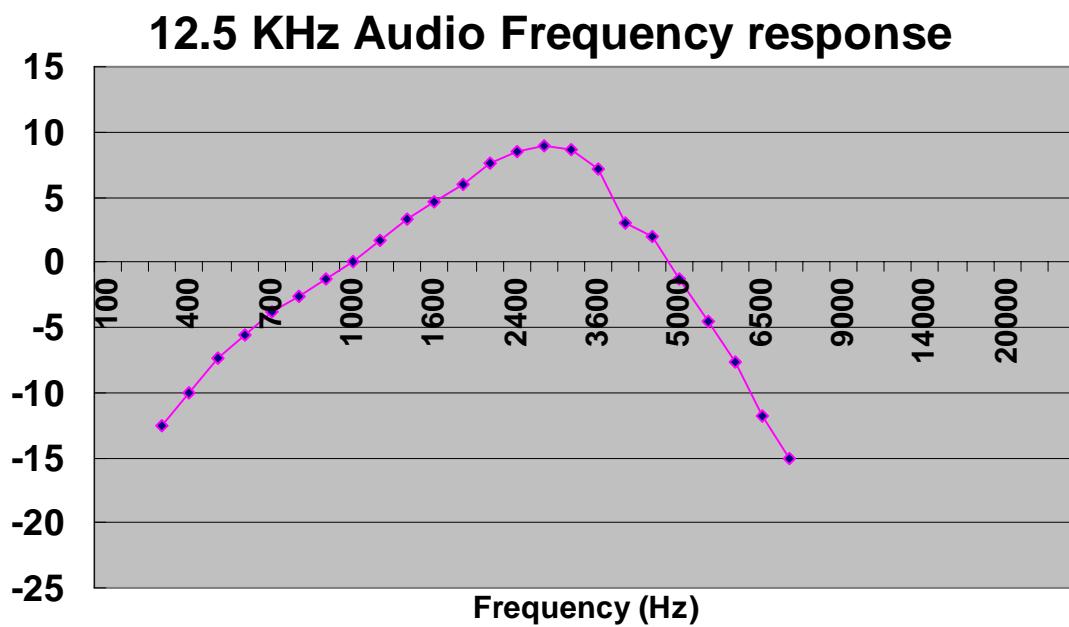

25 KHz Channel Separation

Frequency (Hz)	Deviation (KHz)
100	--
200	--
300	0.22
400	0.32
500	0.43
600	0.54
700	0.65
800	0.76
900	0.88
1000	1.01
1200	1.23
1400	1.48
1600	1.74
1800	2.02
2000	2.47
2400	2.65
2800	2.85
3200	2.73
3600	2.31
4000	1.83
4500	1.27
5000	0.88
5500	0.59
6000	0.40
6500	0.26
7000	0.18
7500	0.12
8000	--
10000	--
12000	--
14000	--
16000	--
18000	--
20000	--
25000	--
30000	--

Frequency Response of Middle Channel

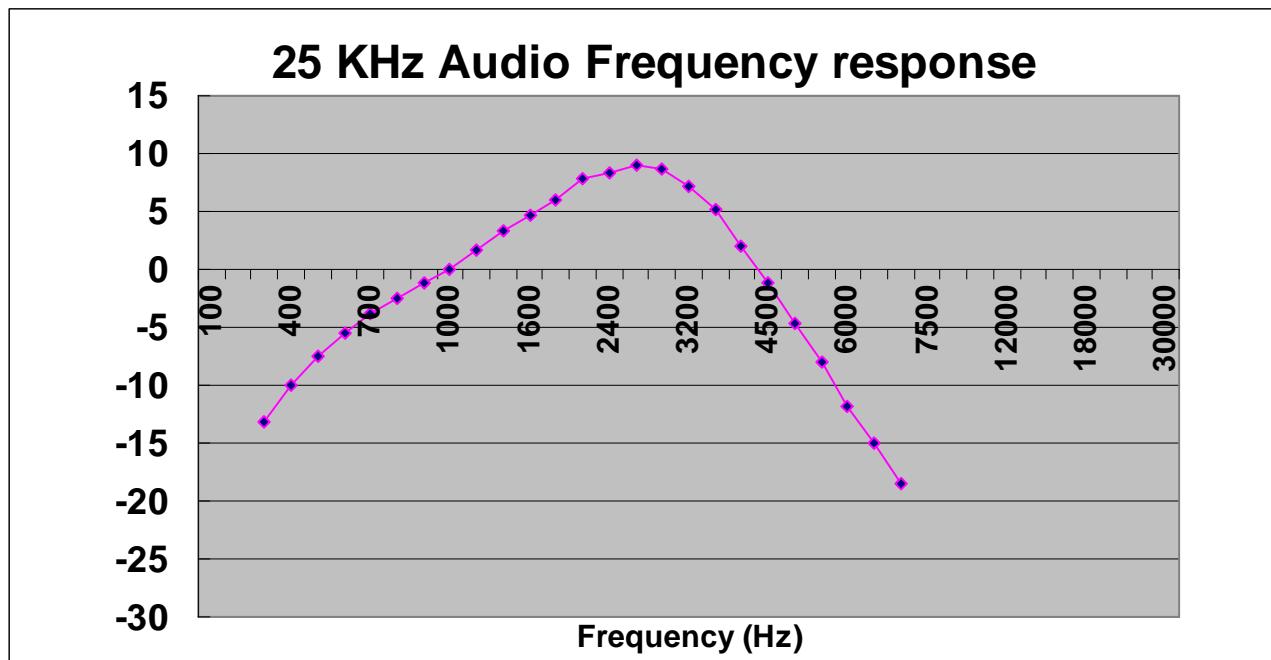

10. MAXIMUMN TRANSMITTER POWER (CONDUCTED OUTPUT POWER)

10.1 Provisions Applicable

Per FCC §2.1046 and §90.205: Maximum ERP is dependent upon the station's antenna HAAT and required service area.

10.2 Test Procedure

The RF output of transceiver was conducted to a spectrum analyzer through an appropriate attenuator.

10.3 Test Instruments

EQUIPMENT TYPE	MFR	MODEL NO.	SERIAL NO.	Cal. Date
Spectrum Analyzer	Agilent	E4443A	MY46185649	2007.07.13
Attenuator	R&S	50FH-010-30	N/A	2007/07/13

10.4 Test Result

The maximum Conducted Power (CP) is

4.68 W for 12.5 KHz Channel Separation

4.70 W for 25 KHz Channel Separation

* Note:

Calculation Formula: CP = R + A + L

CP: The final Conducted Power

R : The reading value from spectrum analyzer


A : The attenuation value of the used attenuator

L : The loss of all connection cables


Conducted Power Measurement Results		
Channel Separation	Channel	Measurement Result
12.5 KHz	Bottom	36.68 dBm
	Middle	36.70 dBm
	Top	36.60 dBm
25 KHz	Bottom	36.61 dBm
	Middle	36.72 dBm
	Top	36.60 dBm

10.5 Conduct spurious plot

The Worst Case of The Three Channels for Conduct Spurious Emission @ 12.5KHz

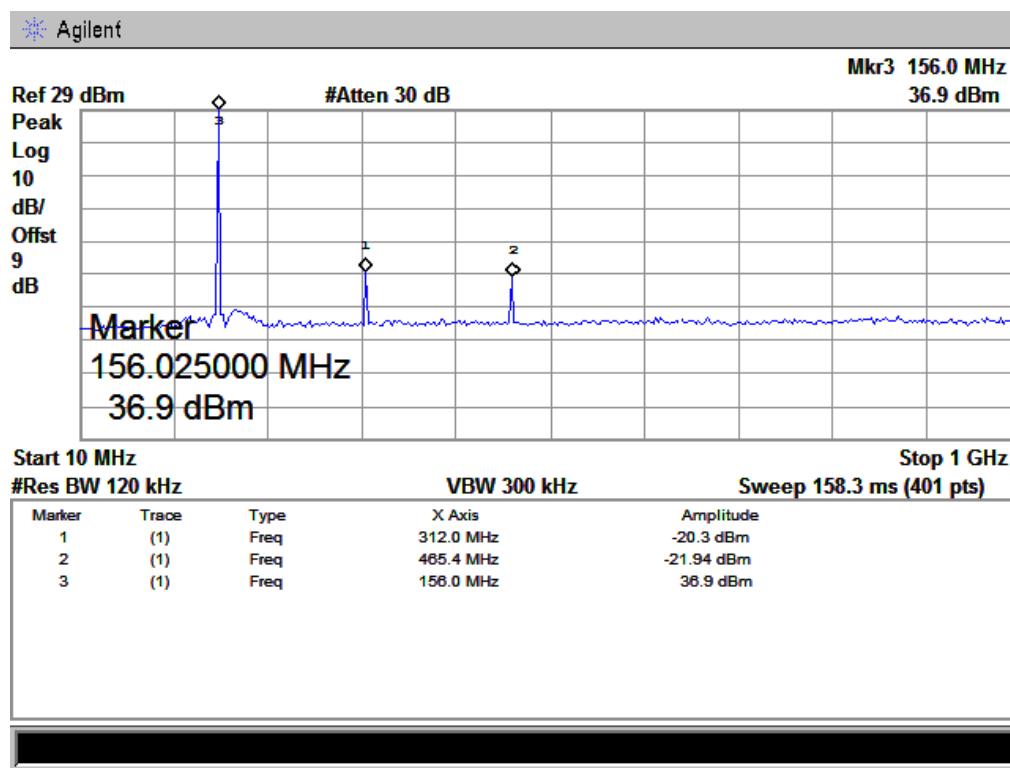

The Worst Case of The Three Channels for Conduct Spurious Emission @ 25KHz

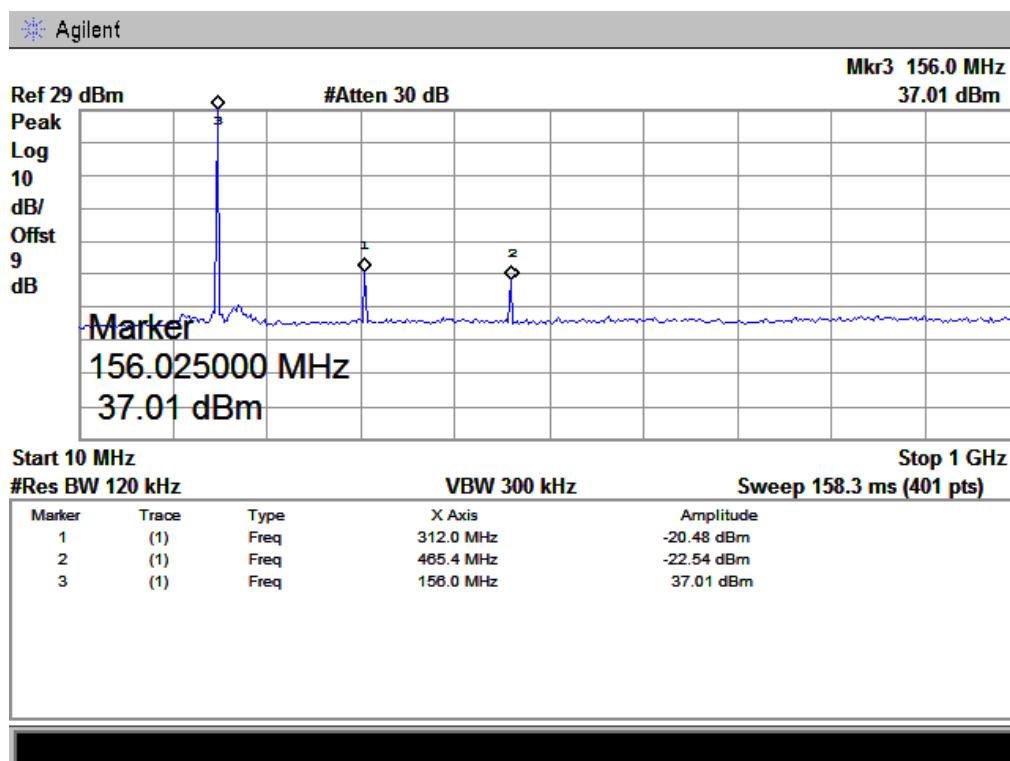

11 TRANSMITTER FREQUENCY BEHAVIOR

11.1 Provisions Applicable

Section 90.214

11.2 Test Method


TIA/EIA-603 2.2.19

11.3 Test Instruments

Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Signal Generator	Rohde&Schwarz	SML01	101161	11/10/2007
Storage Oscilloscope	Tektronix	TDS3052	B017447	06/28/2008

11.4 Measure Result


Transmitter Frequency Behaviour @ 25KHz Channel Separation-----Off to On

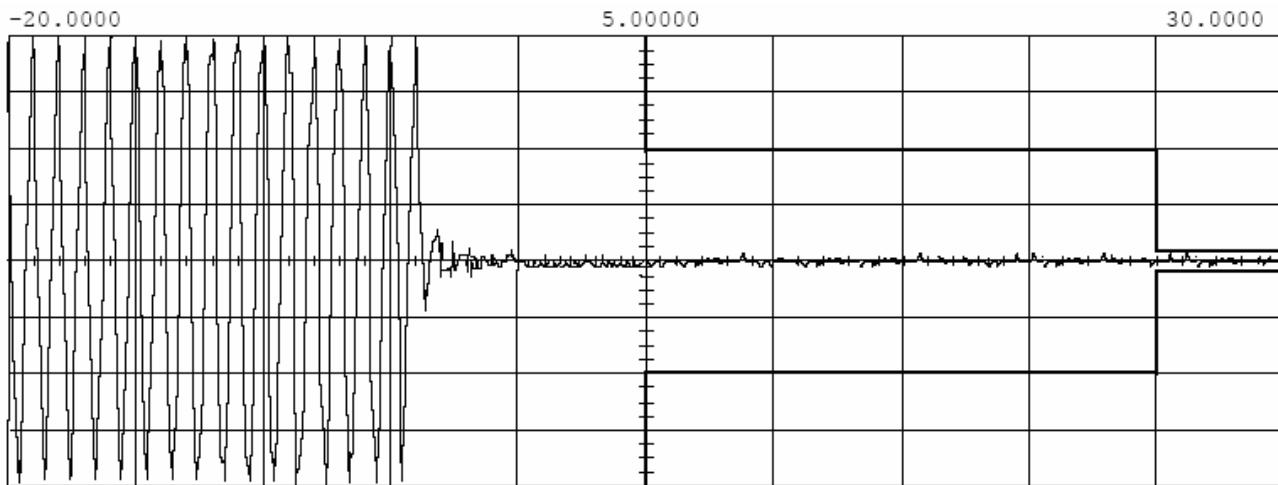

Main Timebase 5.00 ms/div Delay/Pos -20.0000 ms Left Measurements
 Main Timebase 5.00 ms/div Delay/Pos -20.0000 ms Left Measurements
 Channel 1 Sensitivity 122 mV/div Offset 0.00000 V Probe 1.000 :1
 Channel 1 Sensitivity 122 mV/div Offset 0.00000 V Probe 1.000 :1


Trigger mode :
 On Negative Edge Of
 Trigger
 Chan2 = -970.000 mV (noise
 Holdoff =-40.000

Transmitter Frequency Behaviour @ 25 KHz Channel Separation-----On to Off

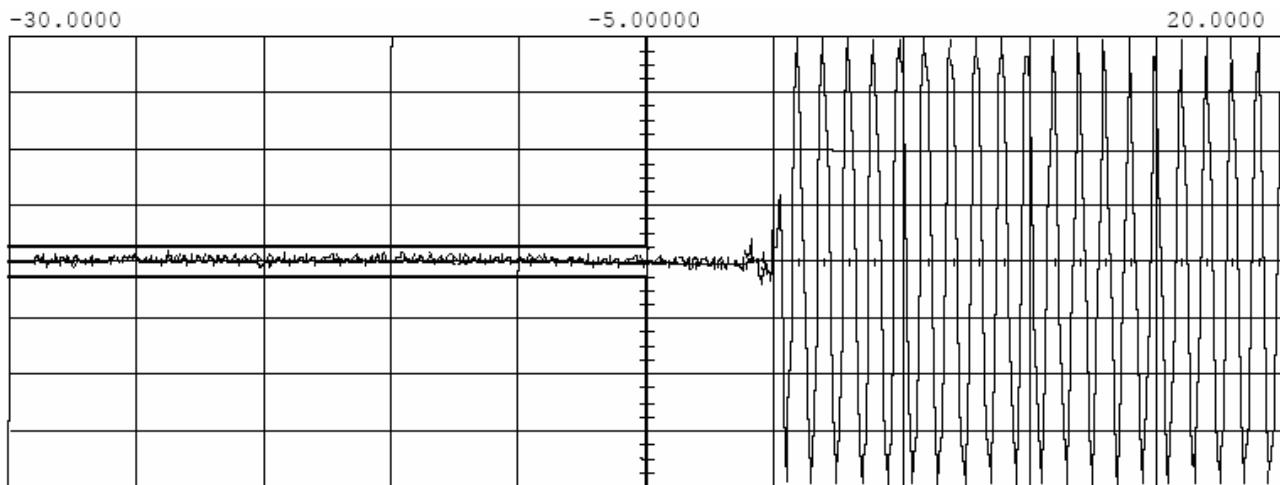


Main Timebase 5.00 ms/div Delay/Pos 20.0000 ms Right Measurements
 Main Timebase 5.00 ms/div Delay/Pos 20.0000 ms Right Measurements
 Channel 1 Sensitivity 122 mV/div Offset 0.00000 V Probe 1.000 :1
 Channel 1 Sensitivity 122 mV/div Offset 0.00000 V Probe 1.000 :1

Trigger mode :
 On Positive Edge Of
 Trigger
 Chan2 = -100.000 mV (noise
 Holdoff =-40.000

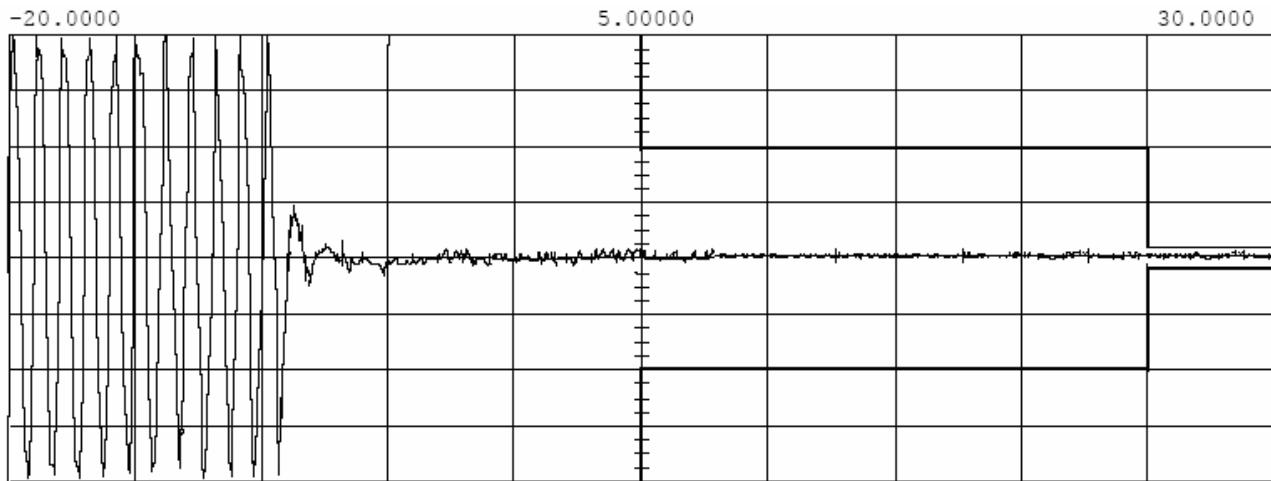Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation-----Off to On

Main Timebase 5.00 ms/div Delay/Pos -20.0000 ms Left Measurements
 Main Frequency (c1) = 39.221 mV
 Main frequency (c1) = 1.00000 kHz
 Channel 1 Sensitivity 66.0 mV/div Offset 0.00000 v Probe 1.000 :1

Trigger mode :
 On Negative Edge Of
 Trigger
 Chan2 = -440.000 mV (noise
 Holdoff =-40.000

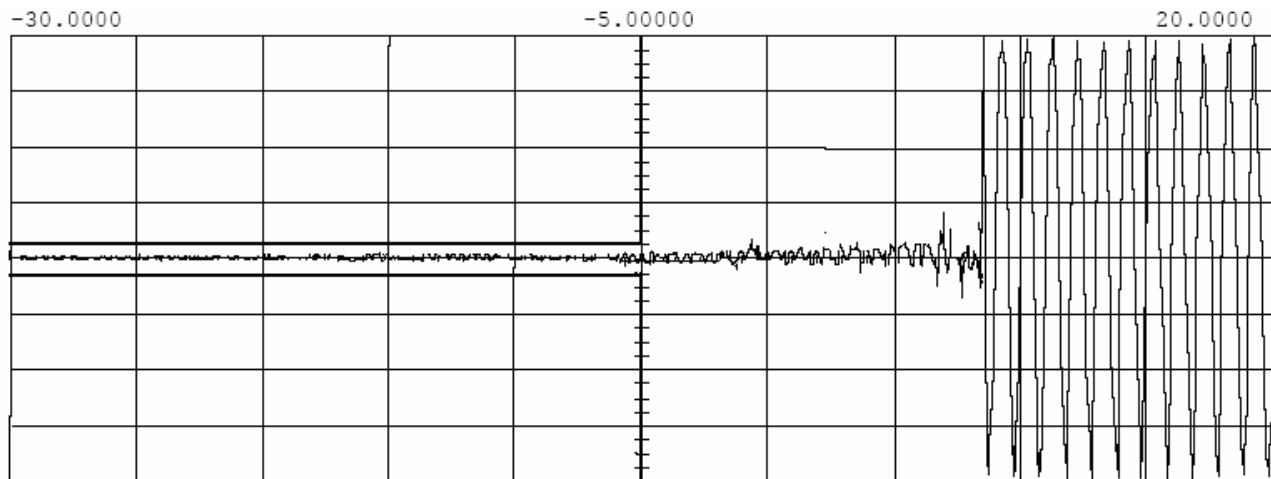Transmitter Frequency Behaviour @ 12.5 KHz Channel Separation-----On to Off

Main Timebase 5.00 ms/div Delay/Pos 20.0000 ms Right Measurements
 Main Frequency (c1) = 39.221 mV
 Main frequency (c1) = 1.00000 kHz
 Channel 1 Sensitivity 66.0 mV/div Offset 0.00000 v Probe 1.000 :1

Trigger mode :
 On Positive Edge Of
 Trigger
 Chan2 = -100.000 mV (noise
 Holdoff =-40.000

12. Radiated Emission on Receiving Mode

12.1 Provisions Applicable

FCC Part 15 Subpart B Section 15.109

12.2 Test Method

ANSI C 63.4: 2003

12.3 Test Instruments

Radiated Emission Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100343	04/16/2007
AMPLIFIER	HP	HP8447E	2945A02715	04/16/2007
ANTENNA	Sunol Sciences Corp.	JB3	A021907	04/16/2007

12.4 Measure Result (Measured at 3m using FCC Part15 B Limits)

Radiated Emission Test Result									
Frequency (MHz)	Leading Level (dBu) Peak	Factor Q.P.	dB	mission Level (dBuV/I) Peak	Q.P.	Q.P. Q.P.(dB)	Margin (P/F)	Result (P/F)	Remarks (H/V)
65.33	15.26	--	7.33	22.59	--	40.00	-17.41	P	H
97.84	18.79	--	9.21	28.00	--	43.50	-15.50	P	H
107.24	24.23	--	9.27	33.50	--	43.50	-10.00	P	H
129.53	21.05	--	7.99	29.04	--	43.50	-14.46	P	H
192.24	18.79	--	10.33	29.12	--	43.50	-14.38	P	H
65.33	16.33	--	7.31	23.64	--	40.00	-16.36	P	V
97.84	19.24	--	9.34	28.58	--	43.50	-14.92	P	V
107.24	23.17	--	9.54	32.71	--	43.50	-10.79	P	V
129.53	19.88	--	7.87	27.75	--	43.50	-15.75	P	V
192.24	18.21	--	10.22	28.43	--	43.50	-15.07	P	V

APPENDIX I

PHOTOGRAPHS OF SETUP

RADIATED TEST SETUP



APPENDIX II

EXTERNAL VIEW OF EUT

TOP VIEW OF SAMPLE



BOTTOM VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE




FRONT VIEW OF SAMPLE




BACK VIEW OF SAMPLE




INTERNAL VIEW OF SAMPLE -1

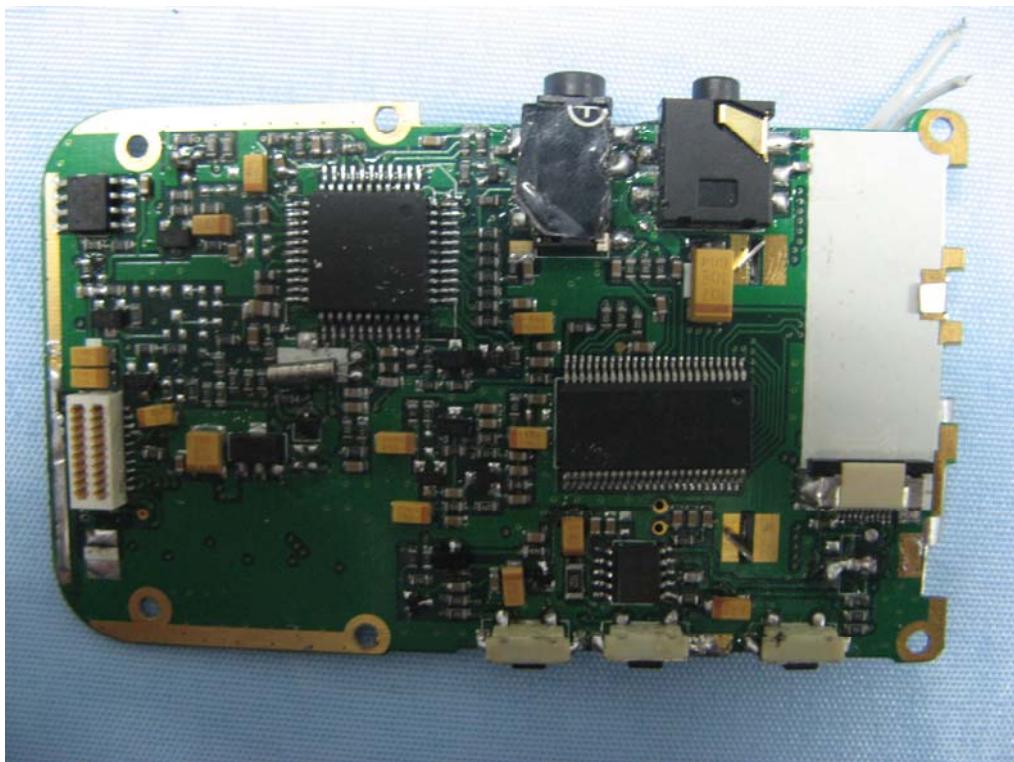


INTERNAL VIEW OF SAMPLE -2

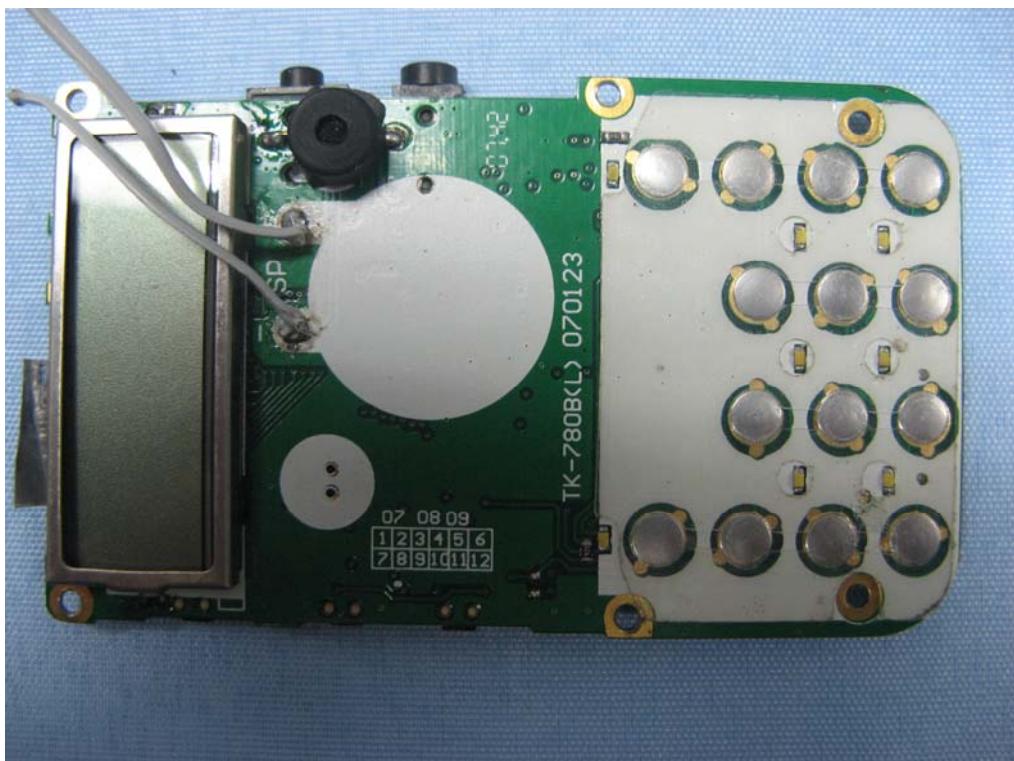

INTERNAL VIEW OF SAMPLE – 3

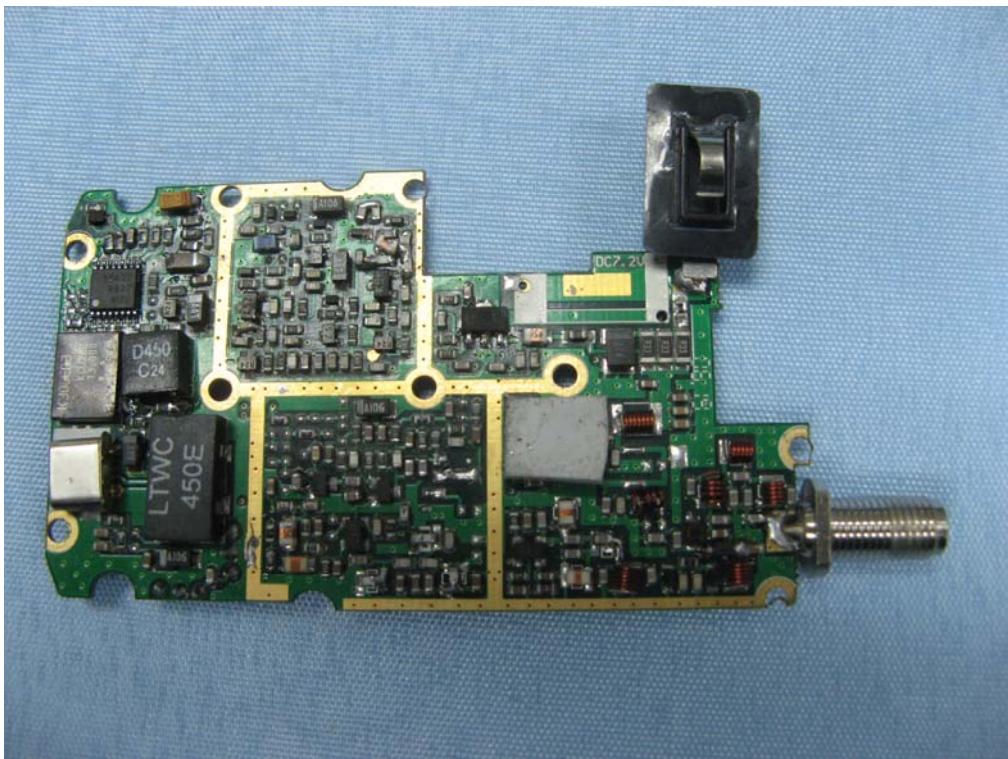

INTERNAL VIEW OF SAMPLE – 4

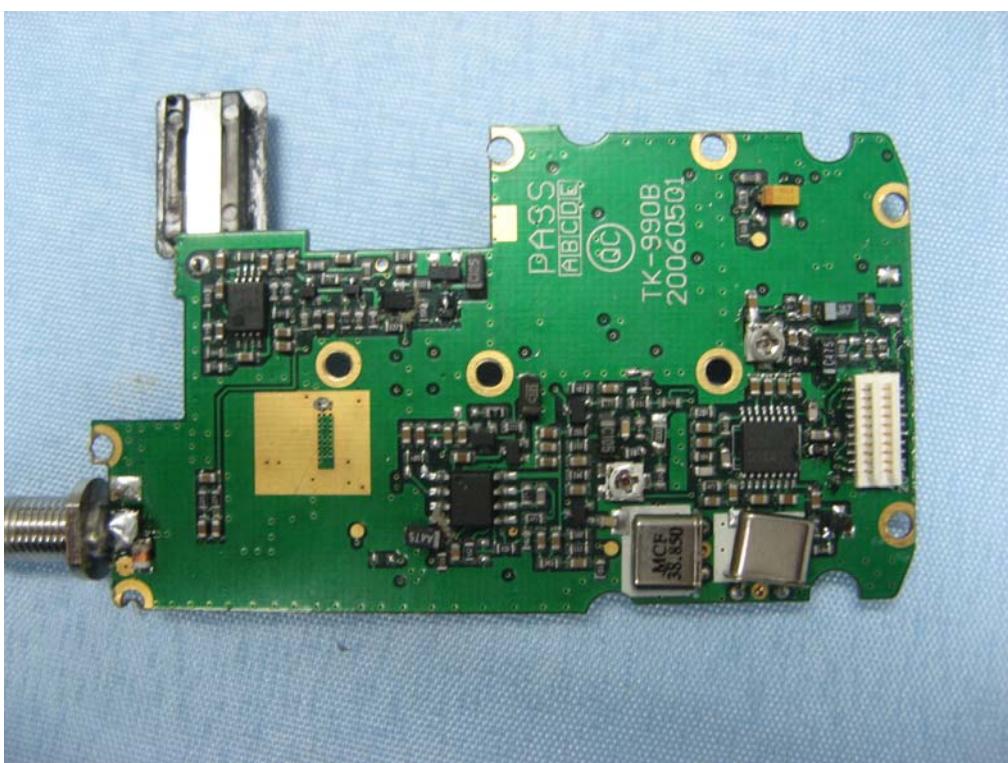

----END OF REPORT----