

Nemko Test Report:

Nemko Test Ro	eport:	13119RUS2		
Applicant:		Dickson/Unigage, Inc. 930 S. Westwood Avend Addison, IL 60101	ne	
Equipment Un(E.U.T.)	der Test:	Wizard Logger		
In Accordance	With:	FCC Part 15, Subpart (Operation within the bar 2400-2483.5 MHz, 5725 24.0-24.25 GHz.	nds 902-928	
Tested By:		Nemko USA Inc. 802 N. Kealy Lewisville, Texas 7505	7-3136	
TESTED BY:	David Light, Wireless	s Engineer	DATE:	13 May, 2008
APPROVED BY:	Miclaul Mike Cantwell, Front	Cartwell line Manager	DATE:	14 May, 2008

Total Number of Pages: 155

CFR 47, PART 15, SUBPART C, Paragraph 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz,

and 24.0-24.25 GHz.

PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Table Of Contents

SECTION 1.	SUMMARY OF TEST RESULTS	3
SECTION 2.	GENERAL EQUIPMENT SPECIFICATION	5
SECTION 3.	RADIATED EMISSIONS	7
SECTION 5.	TEST EQUIPMENT LIST	13
ANNEX A TE	ST DIAGRAMS	14

CFR 47, PART 15, SUBPART C, Paragraph 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Section 1. Summary Of Test Resul

Manufacturer: Dickson/Unigage, Inc.

Model No.: WIZARD LOGGER

Serial No.: 0450

General: All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 15.249. All tests were conducted using measurement procedure ANSI C63.4-2003. Radiated Emissions were made on an open area test site.

\boxtimes	New Submission	\boxtimes	Production Unit
	Class II Permissive Change		Pre-Production Unit

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See "Summary of Test Data".



Nemko USA Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. Nemko USA, Inc. is a NVLAP accredited laboratory.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko USA Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report. This report applies only to the items tested.

CFR 47, PART 15, SUBPART C, Paragraph 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz,

and 24.0-24.25 GHz.

PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Summary Of Test Data

NAME OF TEST	PARA. NO.	RESULT
Conducted Emissions	15.207	Not Applicable
Radiated Emissions	15.249	Complies

Footnotes:

The WH120 operates only on battery(2 x AA).

Antenna Factor M/N. ANT-916-CW-HWR-RPS.)

CFR 47, PART 15, SUBPART C, Paragraph 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

EQUIPMENT: Wizard Logger PROJECT NO.: 13119RUS2

Section 2.	General Equipment Speci	fication	
Frequency Range	ncy(ies) of Sample:	902 – 928 MHz 902.4 – 927.6 MH 902.4 MHz, 910.4	
Tunable Bands:		1	
Number of Channe	els:	64	
Occupied Bandwi	dth	200 kHz	
Channel Spacing:		400 kHz	
User Frequency A	djustment:	Not User adjustab	le
•	nector. Supplied with rubber ducky	Yes	No

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz,

and 24.0-24.25 GHz.


PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Description of EUT

The EUT is a short-range radio transmitter that is used to send telemetry data from a remote location to a central location where the data is logged.

System Diagram



CFR 47, PART 15, SUBPART C, Paragraph 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz,

and 24.0-24.25 GHz.

PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Section 3. Radiated Emissions

NAME OF TEST: Radiated Emissions PARA. NO.: 15.249

TESTED BY: T. Tidwell DATE: 1 May, 2008

Minimum Standard: Para no. 15.249

(a) The field strengths shall not exceed the following:

Carrier (MHz)	Field Strength (mV/m)	Field Strength (dBμV)	Harmonic (µV/m)	Harmonic (dB _µ V)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54
24000-24250	250	108	2500	68

- (b) Field strength limits are specified at a distance of 3 metres.
- (c) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated limits of 15.209 whichever is the less attenuation.
- (d) ...for frequencies above 1000 MHz, the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.

Test Results: Complies


Measurement Data: See attached tables.

NOTE: Field strength of the fundamental emission did not vary in amplitude when the power source was varied between 85% and 115% of nominal supply voltage (102 VAC – 138 VAC).

PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Test Data - Radiated Emissions

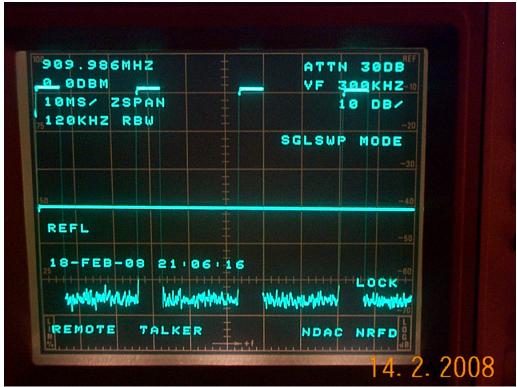

Worst-Case Duty Cycle

Duty Cycle Correction:

20 log(On Time/100msec)

20 log {(7x4)/100}

 $= 20 \log (0.28)$

= -11 dB

CFR 47, PART 15, SUBPART C, Paragraph 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz,

and 24.0-24.25 GHz.

PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Radiated Spurious Emissions

Page $\underline{1}$ of $\underline{1}$ FUNDAMENTAL

Job No.: Date: 5/12/2008

Specification: 15.247/15.205 Temperature(°C): 22

Tested By: T. Tidwell Relative Humidity(%) 40

E.U.T.: Dickson/Unigage Wizard/Logger WH120

Configuration: Set to low, mid, and high channels (902.4 MHz, 910.4 MHz, and 927.6

Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Polarity
902.40	64.6	23.0	3.6	0.0	91.2	94	-2.8	Vertical
902.40	59.8	23.0	3.6	0.0	86.4	94	-7.6	Horizontal
910.40	63.9	23.1	3.6	0.0	90.6	94	-3.4	Vertical
910.40	60.6	23.1	3.6	0.0	87.3	94	-6.7	Horizontal
927.60	63.3	23.0	3.6	0.0	89.9	94	-4.1	Vertical
927.60	60.7	23.1	3.6	0.0	87.4	94	-6.6	Horizontal
Notes:	Measurements above are made using CISPR QPk detector							

CFR 47, PART 15, SUBPART C, Paragraph 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Radiated Emissions

Page <u>1</u> of <u>1</u>

 Job No.:
 13119
 Date: 5/1/2008

 Specification:
 15.249/15.205
 Temperature(°C): 23

 Tested By:
 Tom Tidwell
 Relative Humidity(%) 31

E.U.T.: Wizard Logger WH120

Configuration: Set to low, mid, and high channels (902.4 MHz, 910.4 MHz, and 927.6

Sample Number: _____

 Location:
 AC 3
 RBW:
 1 MHz
 (Avg. 1 MHz)

 Detector Type:
 Peak
 VBW:
 1 MHz
 (Avg. 10 Hz)

Test Equipment Used

993 Antenna: Pre-Amp: 1016 Cable #1: 1484 Filter: 1485 1060 Cable #2: Receiver: 1464 1627 Cable #3: Attenuator #1 #N/A Cable #4: #N/A Attenuator #2: #N/A #N/A Mixer:

Measurement Uncertainty: +/- 3.6 dB


Frequency (MHz)	Meter Reading (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Pre-Amp Gain (dB)	Corrected Reading (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Detector / Polarity
1820.80	54.5	28.5	6.2	32.3	56.9	74	-	Peak/Horizontal
1820.80	42.3	28.5	6.2	32.3	44.7	-	54	Average/Horizontal
1820.80	57.0	28.5	6.2	32.3	59.4	74	-	Peak/Vertical
1820.80	42.8	28.5	6.2	32.3	45.2	-	54	Average/Vertical
2731.20	49.5	29.0	6.3	32.5	52.3	74	54	Peak/Horizontal
2731.20	53.3	29.0	6.3	32.5	56.1	74		Peak/Vertical
2731.20	40.7	29.0	6.3	32.5	43.5	-	54	Average/Vertical
3641.60	42.0	29.8	7.0	31.8	47.0	74	54	Peak/Horizontal
3641.60	34.8	29.8	7.0	31.8	39.8	74	54	Peak/Vertical
1855.20	58.6	28.5	6.2	32.4	60.9	74	-	Peak/Vertical
1855.20	44.5	28.5	6.2	32.4	46.8	-	54	Average/Vertical
2782.80	55.1	29.0	6.4	32.4	58.1	74	-	Peak/Vertical
2782.80	40.8	29.0	6.4	32.4	43.8	-	54	Average/Vertical
3710.40	41.0	29.9	7.3	31.7	46.5	74	-	Peak/Vertical
3710.40	37.1	29.9	7.3	31.7	42.6	-	54	Average/Vertical
1804.80	54.4	28.3	6.0	32.5	56.2	74	-	Peak/Vertical
1804.80	40.4	28.3	6.0	32.5	42.2	-	54	Average/Vertical
2707.20	53.2	29.0	6.1	32.6	55.7	74	-	Peak/Vertical
2707.20	41.1	29.0	6.1	32.6	43.6	-	54	Average/Vertical
3609.60	41.0	29.7	6.8	33.1	44.4	74	-	Peak/Vertical
3609.60	41.0	29.7	6.8	33.1	44.4	-	54	Average/Vertical

and 24.0-24.25 GHz.


PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Radiated Emissions 30 MHz - 1000 MHz

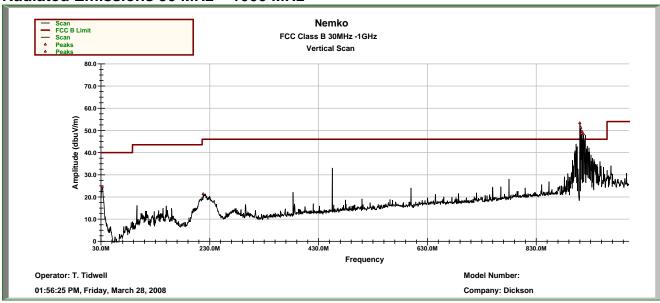

NOTE: The emission that shows to be over the 15.209 Class B limit is the transmit carrier. A notch filter was used to reduce the amplitude so as not to overdrive the measurement receiver.

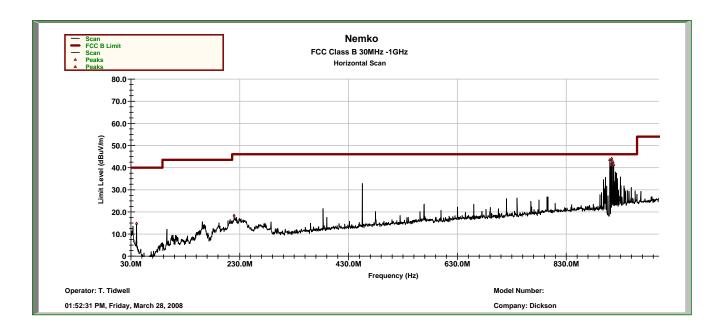

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz,

and 24.0-24.25 GHz.

EQUIPMENT: Wizard Logger

PROJECT NO.: 13119RUS2

Radiated Photographs



Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Section 4. Test Equipment List

Nemk o ID	Description	Manufacturer Model Number	Serial Number	Calibratio n Date	Calibration Due
1036	SPECTRUM ANALYZER	ROHDE & SCHWARZ FSEK30	830844/006	05/26/06	05/26/08
1629	CABLE, 6 ft	MEGAPHASE 10311 1GVT4	N/A	CBU	N/A
1482	Band Pass Filter	K & L 11SH10-4000/T12000-0/0	2	Cal on Use	N/A
1033	Horn antenna	EMCO 3115	8812-3035	07/28/06	07/28/08
1767	EMI Test Receiver 20Hz - 26.5 GHz - 150 - +30 dBm LCD	ROHDE & SCHWARZ ESIB26	837491/000 2	09/20/07	09/19/08
1310	Antenna horn	Electro Metrics RGA-60	6174	08/31/07	08/30/08
1763	Bilog Antenna	Schaffner CBL 6111D	22926	09/21/07	09/20/08
1016	Pre-Amp	HEWLETT PACKARD 8449A	2749A00159	05/01/07	04/30/08
993	Horn antenna	A.H. Systems SAS-200/571	XXX	08/31/07	08/30/08
1484	Cable	Storm PR90-010-072	N/A	05/02/07	05/01/08
1485	Cable	Storm PR90-010-216	N/A	05/02/07	05/01/08

CFR 47, PART 15, SUBPART C, Paragraph 15.249

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz,

and 24.0-24.25 GHz. PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

ANNEX A

TEST DIAGRAMS

Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz,

and 24.0-24.25 GHz.

PROJECT NO.: 13119RUS2

EQUIPMENT: Wizard Logger

Test Site For Radiated Emissions

