



Measurement of RF Interference from an Light Control Module (LCM), Model No. XF0306 REV.4 Board 6 Transceiver

For : Twistthink, LLC
: 130 Central Ave., Suite 400
: Holland, MI

P.O. No. : 212
Date Tested : July 27 through August 10, 2009
Test Personnel : Richard E King
Specification : FCC "Code of Federal Regulations" Title 47, Part 15,
Subpart B and Subpart C, Section 15.247 for Digital
Transmission Systems Operating within The band 2400-
2483.5MHz
Industry Canada RSS-210
Industry Canada RSS-GEN

A handwritten signature in black ink that reads "RICHARD E. KING".

Test Report By : Richard E King

Witnessed By : Ryan Olsen
Twistthink, LLC

A handwritten signature in black ink that reads "Craig W. Fanning".

Craig W. Fanning
Sr. EMC Engineer
iNARTE®: ATL-0188-E
and EMC-000296-NT

TABLE OF CONTENTS

PARAGRAPH	DESCRIPTION OF CONTENTS	PAGE NO.
1	INTRODUCTION	5
1.1	Scope of Tests	5
1.2	Purpose	5
1.3	Deviations, Additions and Exclusions	5
1.4	EMC Laboratory Identification	5
1.5	Laboratory Conditions	5
2	APPLICABLE DOCUMENTS	5
3	TEST ITEM SET-UP AND OPERATION	6
3.1	General Description	6
3.1.1	Power Input	6
3.1.2	Peripheral Equipment	6
3.1.3	Interconnect Cables	6
3.1.4	Grounding	6
3.2	Operational Mode	6
3.3	Test Item Modifications	6
4	TEST FACILITY AND TEST INSTRUMENTATION	7
4.1	Shielded Enclosure	7
4.2	Test Instrumentation	7
4.3	Calibration Traceability	7
4.4	Measurement Uncertainty	7
5	TEST PROCEDURES	7
5.1	Powerline Conducted Emissions	7
5.1.1	Receiver	Error! Bookmark not defined.
5.1.1.1	Requirements	Error! Bookmark not defined.
5.1.2	Transmitter	7
5.1.2.1	Requirements	7
5.1.2.2	Procedures	8
5.1.2.3	Results	8
5.2	Duty Cycle Factor Measurements	8
5.2.1	Procedures	8
5.2.2	Results	8
5.3	Radiated Measurements	9
5.3.1	Receiver	9
5.3.1.1	Requirements	9
5.3.2	Transmitter	10
5.3.2.1	Requirements	10
5.3.2.2	Procedures	10
5.3.2.3	Results	11
5.4	6dB Bandwidth and 99% Bandwidth	11
5.4.1	Requirements	11
5.4.2	Procedures	11
5.4.3	Results	12
5.5	Peak Output Power	12
5.5.1	Requirements	12
5.5.2	Procedures	12
5.5.3	Results	13
5.6	Power Spectral Density	13
5.6.1	Requirements	13

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.

5.6.2	Procedures	13
5.6.3	Results.....	13
5.7	Band-edge Compliance	13
5.7.1	Requirements	13
5.7.2	Procedures	13
5.7.3	Results.....	14
6	CONCLUSIONS	14
7	CERTIFICATION.....	14
8	ENDORSEMENT DISCLAIMER	15
9	EQUIPMENT LIST.....	16

THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL, WITHOUT THE
WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INCORPORATED.



REVISION HISTORY

Revision	Date	Description
—	August 14, 2009	Initial release

Measurement of RF Emissions from a Light Control Module (LCM), Model No. XF0306 REV.4 Board 6 Transceiver

1 INTRODUCTION

1.1 Scope of Tests

This document represents the results of the series of radio interference measurements performed on a Light Control Module (LCM), Model No. XF0306 REV.4 Board 6 transceiver (hereinafter referred to as the test item). The test item was designed to transmit and receive in the 2405MHz to 2475MHz band using an internal antenna. The test item transmitted using digital transmission system techniques. The test item was manufactured and submitted for testing by Twishink, LLC located in Holland, MI.

The receive portion of the test item is a super-heterodyne type receiver designed to receive in the 2405MHz to 2475MHz band. The test item contains a tuner which utilizes one local oscillator (LO) and an intermediate frequency (IF) at 4MHz below the tuned frequency.

1.2 Purpose

The test series was performed to determine if the test item meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109, and Subpart C, Sections 15.207 and 15.247 for Intentional Radiators operating within the 2400-2483.5MHz band. Testing was performed in accordance with ANSI C63.4-2003.

1.3 Deviations, Additions and Exclusions

There were no deviations, additions to, or exclusions from the test specification during this test series

1.4 EMC Laboratory Identification

This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

1.5 Laboratory Conditions

The temperature at the time of the test was 23°C and the relative humidity was 35%.

2 APPLICABLE DOCUMENTS

The following documents of the exact issue designated form part of this document to the extent specified herein:

- Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, Subpart C, dated 1 October 2008
- ANSI C63.4-2003, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"
- Industry Canada RSS-210, Issue 6, September 2005, "Spectrum Management and Telecommunications Radio Standards Specification, Low-power License-exempt radio communication devices (All Frequency Bands): Category I Equipment"
- Industry Canada RSS-GEN, Issue 1, September 2005, "Spectrum Management and Telecommunications Radio Standards Specification, General Requirements and Information for the Certification of radio communication equipment"
- Public Notice 558074, "New Guidance on Measurements for Digital Transmission Systems in 15.247"

- Public Notice DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems"

3 TEST ITEM SET-UP AND OPERATION

3.1 General Description

The test item is a Light Control Module (LCM), Model No. XF0306 REV.4 Board 6 transceiver. A block diagram of the test item set-up is shown as Figure 1. A photograph of the test item is shown as Figure 2.

3.1.1 Power Input

The test item and light fixture were powered with either 115V, 60Hz or 277V, 60Hz power through a 2.6 meter long, 3 wire unshielded power cord. The power supply used by the test item converted either 115V, 60Hz or 277V, 60Hz input power to 3.3VDC. The high and low leads of the input power were connected through a line impedance stabilization network (LISN) which was located on the ground plane. The network complies with the requirements of Paragraph 4.1.2 of ANSI C63.4-2001.

3.1.2 Peripheral Equipment

The test item was submitted with a six inch test harness connected to a three light bulb test fixture to simulate the proper load characteristics.

3.1.3 Interconnect Cables

The test item was connected to the light fixture through three six inch wires.

3.1.4 Grounding

The test item and light fixture were grounded only through the third wire of its input power cord.

3.2 Operational Mode

For all tests, the test item and all peripheral equipment were placed on an 80cm high non-conductive stand. The test item and all peripheral equipment were energized.

For radiated emissions tests, the test item was programmed to operate in one of the following modes:

- transmit @ 2405MHz
- receive @ 2405MHz
- transmit @ 2440MHz
- receive @ 2440MHz
- transmit @ 2475MHz
- receive @ 2475MHz

3.3 Test Item Modifications

No modifications were required for compliance to the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109, and Subpart C, Sections 15.207 and 15.249 requirements.

4 TEST FACILITY AND TEST INSTRUMENTATION

4.1 Shielded Enclosure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. With the exception of the floor, the reflective surfaces of the shielded chamber are lined with ferrite tiles on the walls and ceiling. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2003 for site attenuation.

4.2 Test Instrumentation

The test instrumentation and auxiliary equipment used during the tests are listed in Table 9-1 Equipment List. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

Conducted emission tests were performed with a spectrum analyzer in conjunction with a quasi-peak adapter. Radiated emissions were performed with a spectrum analyzer. This receiver allows measurements with the bandwidths detector functions specified by the FCC.

4.3 Calibration Traceability

Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

4.4 Measurement Uncertainty

All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty for these tests is presented below:

Conducted Emission Measurements			
Combined Standard Uncertainty		1.07	-1.07
Expanded Uncertainty (95% confidence)		2.1	-2.1

Radiated Emission Measurements			
Combined Standard Uncertainty		2.26	-2.18
Expanded Uncertainty (95% confidence)		4.5	-4.4

5 TEST PROCEDURES

5.1 Powerline Conducted Emissions

5.1.1 Transmitter

5.1.1.1 Requirements

All radio frequency voltages on the power lines of an intentional radiator shall be below the values shown below when using a quasi-peak or average detector:

CONDUCTED LIMITS FOR AN INTENTIONAL RADIATOR

Frequency MHz	RFI Voltage dBuV(QP)	RFI Voltage dBuV(Average)
0.15-0.5	66 decreasing with logarithm of frequency to 56	56 decreasing with logarithm of frequency to 46
0.5 – 5.0	56	46
5.0 – 30.0	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: If the levels measured using the QP detector meet both the QP and the Average limits, the test item is considered to have met both requirements and measurements do not need to be performed using the Average detector.

5.1.1.2 Procedures

The interference on each power lead was measured by connecting the measuring equipment to the appropriate meter terminal of the LISN. The meter terminal of the LISN not under test was terminated with 50 ohms. Measurements were first made over the entire frequency range from 150kHz through 30MHz with a peak detector and the results were automatically plotted. The data thus obtained was then searched by the computer for the highest levels. Quasi-peak measurements were automatically performed at the frequencies selected from the highest peak measurements, and the results printed.

5.1.1.3 Results

The plots of the peak preliminary conducted voltage levels on each power line, with the test item transmitting at 2440MHz for both 115V and 277V, 60Hz input power, are presented on pages 21 through 24. The conducted emissions limits are shown as a reference. The final quasi-peak and average results are presented on pages 25 through 28. As can be seen from the data, all emissions measured from the test item were within the specification limits. Photographs of the test setup are shown in Figure 3.

5.2 Duty Cycle Factor Measurements

5.2.1 Procedures

The duty cycle factor is used to convert peak detected readings to average readings. This factor is computed from the time domain trace of the pulse modulation signal.

With the transmitter set up to transmit for maximum pulse density, the time domain trace is displayed on the spectrum analyzer. This trace is obtained by tuning the center frequency to the transmitter frequency and then setting a zero span width with 10msec/div. The amplitude settings are adjusted so that the on/off transitions clear the 4th division from the bottom of the display. The markers are set at the beginning and end of a word period. If the word period exceeds 100 msec the word period is set to 100 msec. The on-time and off-time are then measured. The on-time is total time signal level exceeds the 4th division. Off-time is time under for the word period. The duty cycle is then computed as the (On-time/ word period) where the word period = (On-time + Off-time).

5.2.2 Results

The plots of the duty cycle are shown on data pages 29 and 30. The duty cycle correction factor was calculated to be -41.9dB (-41.9dB = 20*log(.4*2)msec/100msec).

5.3 Radiated Measurements

5.3.1 Receiver

5.3.1.1 Requirements

Per 15.101(b), receivers operating above 960MHz are exempt from complying with the radiated emissions requirements of 15.109. Therefore, no radiated emissions tests were performed with the test item operating in the receive mode.

Per RSS-GEN, the search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tuneable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

All emanations from a receiver shall be below the levels shown on the following table:

RADIATION LIMITS FOR A RECEIVER

Frequency MHz	Distance between Test Item And Antenna in Meters	Field Strength uV/m	Field Strength dBuV/m
30-88	3	100	40
88-216	3	150	43.5
216-960	3	200	46
Above 960	3	500	54

Note: The tighter limit shall apply at the edge between the two frequency bands.

5.3.1.2 Procedure

All tests were performed in a 32ft. x 20ft. x 18ft. hybrid ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-**Error! Unknown document property name.** for site attenuation.

- a) The field strength of all emissions above 1GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the test item. A peak detector with a resolution bandwidth of 1MHz was used on the spectrum analyzer.
- b) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The test item was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) For all radiated emissions measurements above 1GHz, if the peak reading is below the limits listed in above, no further measurements are required. If however, the peak readings exceed the limits listed above, then the emissions are remeasured using an average detector.

The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.

5.3.1.3 Results

Preliminary radiated emissions plots with the test item receiving in the 2405-2475MHz band are shown on pages 31 through 42. Final receiver radiated emissions data are presented on data pages 43 through 45. As can be seen from the data, all emissions measured from the test item were within the specification limits.

5.3.2 Transmitter

5.3.2.1 Requirements

Per section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated emissions measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must comply with the radiated emission limits specified in §15.209(a).

Paragraph 15.209(a) has the following radiated emission limits:

Frequency MHz	Field Strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	3
30.0-88.0	100	3
88.0-216.0	150	3
216.0-960.0	200	3
Above 960	500	3

5.3.2.2 Procedures

Radiated measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Preliminary radiated emissions tests were performed to determine the emission characteristics of the test item. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the test item. The entire frequency range from 30MHz to 25GHz was investigated using a peak detector function.

The final open field emission tests were then manually performed over the frequency range of 30MHz to 25GHz.

2) For all harmonics not in the restricted bands, the following procedure was used:

- a) The field strength of the fundamental was measured using a double-ridged waveguide antenna. The double-ridged waveguide antenna was positioned at a 3 meter distance from the test item. A peak detector with a resolution bandwidth of 100kHz was used on the spectrum analyzer.
- b) The field strength of all of the harmonics not in the restricted band were then measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the test item. A peak detector with a resolution bandwidth of 100kHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when measuring the fundamental emissions and the spurious emissions:
 - i) The test item was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were

measured.

- iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
- d) All harmonics not in the restricted bands must be at least 20dB below level measured at the fundamental. However, attenuation below the general limits specified in §15.209(a) is not required.

3) For all emissions in the restricted bands, the following procedure was used:

- a) The field strength of all emissions below 1GHz were measured using a bi-log antenna. The bi-log antenna was positioned at a 3 meter distance from the test item. A peak detector with a resolution bandwidth of 100kHz was used on the spectrum analyzer.
- b) The field strength of all emissions above 1GHz were measured using a double-ridged waveguide antenna. The waveguide antenna was positioned at a 3 meter distance from the test item. A peak detector with a resolution bandwidth of 1MHz was used on the spectrum analyzer.
- c) To ensure that maximum or worst case emission levels were measured, the following steps were taken when taking all measurements:
 - i) The test item was rotated so that all of its sides were exposed to the receiving antenna.
 - ii) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
 - iii) The measuring antenna was raised and lowered for each antenna polarization to maximize the readings.
- d) For all radiated emissions measurements below 1GHz, if the peak reading is below the limits listed in 15.209(a), no further measurements are required. If however, the peak readings exceed the limits listed in 15.209(a), then the emissions are remeasured using a quasi-peak detector.
- e) For all radiated emissions measurements above 1GHz, measurements were taken using a 1MHz resolution bandwidth and a 10Hz video bandwidth. For pulsed emissions, these readings were corrected to average levels using a duty cycle factor which was computed from the pulse train. All average levels must comply with the limits specified in 15.209(a).

5.3.2.3 Results

Preliminary radiated emissions plots with the test item transmitting are shown on pages 46 through 93. The final radiated emissions data is presented on data pages 94 through 105. As can be seen from the data, all emissions measured from the test item were within the specification limits. Photographs of the test are shown on Figure 4.

5.4 6dB Bandwidth and 99% Bandwidth

5.4.1 Requirements

Per 15.247(a) (2), for systems using digital modulation in the 2400-2483.5MHz band, the minimum 6dB bandwidth shall be at least 500kHz.

5.4.2 Procedures

The test item was set up inside the test chamber.

- a) With the modulation enabled, the test item was allowed to transmit continuously at 2405MHz.
- b) A double-ridged waveguide antenna was positioned at a 3 meter distance from the test item. The output of the double-ridged waveguide antenna was connected to a spectrum analyzer.
- c) The center frequency of the spectrum analyzer was set to the transmit frequency of the test item. The resolution bandwidth on the analyzer was set to 100kHz.

- d) The 'Max-Hold' function of the spectrum analyzer was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
- e) The marker-to-peak function of the analyzer was used to set the marker to the peak of the emission. The marker-delta function was used to measure 6dB down point from the peak of the emission. The marker-delta function was reset and the marker was moved to the other side of the emission until it is even with the reference marker level. The marker-delta reading at this point is the 6dB bandwidth.
- f) The analyzer's display was plotted using a 'screen dump' utility.
- g) The resolution bandwidth was then reduced to 30kHz.
- h) The 'Max-Hold' function of the spectrum analyzer was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined. The 99% bandwidth function of the spectrum analyzer was then used to measure the 99% bandwidth. The measurement was recorded.
- i) Steps (a) through (h) were repeated with the test item transmitting at 2440MHz.
- j) Steps (a) through (h) were repeated with the test item transmitting at 2475MHz.
- k) Steps (a) through (h) were repeated in both power settings.

5.4.3 Results

The plots of the 6dB bandwidth, with the test item transmitting in both high power and low power are shown on pages 106 through 111. As can be seen from the plots, the minimum 6dB bandwidth measured was 891.7kHz which is greater than the minimum required 6dB bandwidth of 500kHz. The 99% bandwidth was measured to be 2.13MHz.

5.5 Peak Output Power

5.5.1 Requirements

Per section 15.247(b)(3), for systems using digital modulation the maximum peak output conducted power shall not be greater than 1.0W (30dBm). Per section 15.247(b) (4), this limit is based on the use of antennas with directional gains that do not exceed 6dBi. Since the limit allows for a 6dBi antenna gain, the maximum EIRP can be increased by 6dB to 4 Watt (36dBm).

5.5.2 Procedures

The test item was set up inside the test chamber.

- a) With the modulation enabled, the test item was allowed to transmit continuously at 2405MHz.
- b) A double-ridged waveguide antenna was positioned at a 3 meter distance from the test item. The output of the double-ridged waveguide antenna was connected to a spectrum analyzer.
- c) The center frequency of the spectrum analyzer was set to the transmit frequency of the test item. The resolution bandwidth on the analyzer was set to 3MHz (greater than the 6dB bandwidth of the test item).
- d) The test item was maximized for worst case emissions (or maximum output power) at the measuring antenna. The maximum meter reading was recorded.
- e) The equivalent isotropic power was determined from the field intensity levels measured at 3 meters using substitution method. To determine the emission power, a second double ridged waveguide antenna was then set in place of the test item and connected to a calibrated signal generator. The output of the signal generator was adjusted to match the received level at the spectrum analyzer. The signal level was recorded. The reading was then corrected to compensate for cable loss and antenna gain, as required.
- f) Steps (a) through (e) were repeated with the test item transmitting at 2440MHz.
- g) Steps (a) through (e) were repeated with the test item transmitting at 2475MHz.

- h) Steps (a) through (e) were repeated in both power settings.

5.5.3 Results

The results are presented on page 112. The maximum EIRP measured from the transmitter was 11.2dBm or 0.013W which is below the 4 Watt or 36 dBm defacto limit.

5.6 Power Spectral Density

5.6.1 Requirements

Per section 15.247(d), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.

5.6.2 Procedures

The test item was set up inside the test chamber.

- a) With the modulation enabled, the test item was allowed to transmit continuously at 2405MHz.
- b) A double-ridged waveguide antenna was positioned at the test item. The output of the double-ridged waveguide antenna was connected to a spectrum analyzer.
- c) The center frequency of the spectrum analyzer was set to the transmit frequency of the test item. The resolution bandwidth on the analyzer was set to 3MHz (greater than the 6dB bandwidth of the test item).
- d) The display line on the spectrum analyzer was set. (This level represents the 8.0dBm power spectral density level.) The resolution bandwidth (RBW) was set to 3kHz, the sweep time was set to a time equal to or greater than the span divided by 3kHz (2 MHz/3kHz = 666 seconds). The peak detector and 'Max-Hold' function was engaged.
- e) The analyzer's display was plotted using a 'screen dump' utility.

5.6.3 Results

Data pages 113 and 114 show the power spectral density results. As can be seen from this plot, the power spectral density is less than 8dBm in a 3kHz band during any time interval of continuous transmission.

5.7 Band-edge Compliance

5.7.1 Requirements

Per section 15.247(d), the emissions at the band-edges must be at least 20dB below the highest level measured within the band but attenuation below the general limits listed in 15.209(a) is not required. In addition, the radiated emissions which fall in the restricted band beginning at 2483.5 MHz must meet the general limits of 15.209(a).

5.7.2 Procedures

- a) The test item was set up inside the test chamber on a non-conductive stand.
- b) A broadband measuring antenna was placed at a test distance of 3 meters from the test item.
- c) The test item was set to transmit continuously at the channel closest to the low band-edge.
- d) The test item was maximized for worst case emissions at the measuring antenna. The maximum meter reading was recorded.
- e) To determine the band-edge compliance, the following spectrum analyzer settings were used:
 - i. Span = Wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of

operation.

- ii. Resolution bandwidth (RBW) = 100kHz.
- iii. The 'Max-Hold' function was engaged. The analyzer was allowed to scan until the envelope of the transmitter bandwidth was defined.
- iv. The marker was set on the peak of the in-band emissions. A display line was placed 20dB down from the peak of the in-band emissions. All emissions which fall outside of the authorized band of operation must be below the 20dB down display line. (All emissions to the left of the center frequency (band-edge) must be below the display line.)
- v. The analyzer's display was plotted using a 'screen dump' utility.

- f) The test item was set to transmit continuously at the channel closest to the high band-edge.
- g) Per Public Notice DA00-705, the Marker-Delta method of measuring band edge compliance can only be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge. (Since C63.4 specifies a 1MHz resolution bandwidth for measurements above 1GHz, two "standard" bandwidths away from the band-edge would be 2MHz away from the band-edge.) Radiated emissions that are removed by more than two "standard" bandwidths must be measured in the conventional manner.
- h) The highest transmit frequency used by the test item is 2475MHz. Since this is more than two "standard" bandwidths away from the band-edge, conventional radiated emissions measurements were taken at the band-edge.
- i) The test item was set up in the test chamber. With the modulation enabled, the test item was allowed to transmit continuously at 2475MHz.
- j) A double-ridged waveguide antenna was positioned at a 3 meter distance from the test item. The output of the double-ridged waveguide antenna was connected to a spectrum analyzer.
- k) The center frequency of the spectrum analyzer was set to the band-edge (2483.5MHz). The resolution bandwidth on the analyzer was set to 1MHz.
- l) The test item was maximized for worst case emissions at the measuring antenna. The video bandwidth was reduced to 10Hz and an average reading was taken.

5.7.3 Results

Pages 115 and 116 shows the radiated band-edge compliance results at 2400MHz. As can be seen from the plot, the emissions at the band-edge are within the 20 dB down limits.

Pages 117 and 118 shows the radiated band-edge compliance results at 2483.5MHz. As can be seen from the data, the emissions at the band-edge are within the general limits.

6 CONCLUSIONS

It was determined that the Twistthink, LLC Light Control Module (LCM), Model No. XF0306 REV.4 Board 6 transceiver, (Serial No., did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109 for receivers and Subpart C Sections 15.207 and 15.247 for Intentional Radiators Operating within the 2400MHz to 2483.5MHz band, when tested per ANSI C63.4-2003.

7 CERTIFICATION

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the test item at the test date. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.



8 ENDORSEMENT DISCLAIMER

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.



9 EQUIPMENT LIST

Table 9-1 Equipment List

Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Due Date
APK4	PREAMPLIFIER OPT H02	HEWLETT PACKARD	8449B	3008A00329	1-26.5GHZ	4/6/2009	4/6/2010
APW0	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-30-20G20R6G	PL2926/0646	20GHZ-26.5GHZ	12/16/2008	12/16/2009
APW3	PREAMPLIFIER	PLANAR ELECTRONICS	PE2-35-120-5R0-10-12	PL2924	1GHZ-20GHZ	12/16/2008	12/16/2009
GRE0	SIGNAL GENERATOR	AGILENT TECHNOLOGIES	E4438C	MY42083127	250KHZ-6GHZ	1/12/2009	1/12/2010
NHG1	STANDARD GAIN HORN ANTENNA	NARDA	638	---	18-26.5GHZ	NOTE 1	
NTA1	BILOG ANTENNA	CHASE EMC LTD.	BILOG CBL6112	2054	0.03-2GHZ	9/2/2008	9/2/2009
NWF0	Attenuators			2035	1-12.4GHZ	10/25/2008	10/25/2009
NWI0	RIDGED WAVE GUIDE	AEL	H1498	153	2-18GHZ	10/25/2008	10/25/2009
NWI1	RIDGED WAVE GUIDE	AEL	H1498	154	2-18GHZ	10/25/2008	10/25/2009
PLL9	50UH LISN 462D	ELITE ELECTRONIC ENG	462D/70A	010	0.01-400MHZ	3/5/2009	3/5/2010
PLLA	50UH LISN 462D	ELITE ELECTRONIC ENG	462D/70A	011	0.01-400MHZ	3/5/2009	3/5/2010
RACA	RF PRESELECTOR	HEWLETT PACKARD	85685A	2926A00980	20HZ-2GHZ	2/20/2009	2/20/2010
RAEC	SPECTRUM ANALYZER	HEWLETT PACKARD	8566B	3014A06690	100HZ-22GHZ	2/20/2009	2/20/2010
RAF5	QUASipeak ADAPTOR	HEWLETT PACKARD	85650A	2043A00151	0.01-1000MHZ	2/20/2009	2/20/2010
RBB0	EMI TEST RECEIVER 20HZ TO 40 GHZ	ROHDE & SCHWARZ	ESIB40	100250	20 HZ TO 40GHZ	3/11/2009	3/11/2010
T1EE	10DB 25W ATTENUATOR	WEINSCHEL	46-10-34	BN2321	DC-18GHZ	12/4/2008	12/4/2009
XLJ1	5W, 50 OHM TERMINATION	JFW INDUSTRIES	50T-052	2	DC-2GHZ	8/29/2008	8/29/2009
XOB2	ADAPTER	HEWLETT PACKARD	K281C,012	09407	18-26.5GHZ	NOTE 1	
XZG4	ATTENUATOR/SWITCH DRIVER	HEWLETT PACKARD	11713A	2223A01683	---	N/A	

I/O: Initial Only

N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

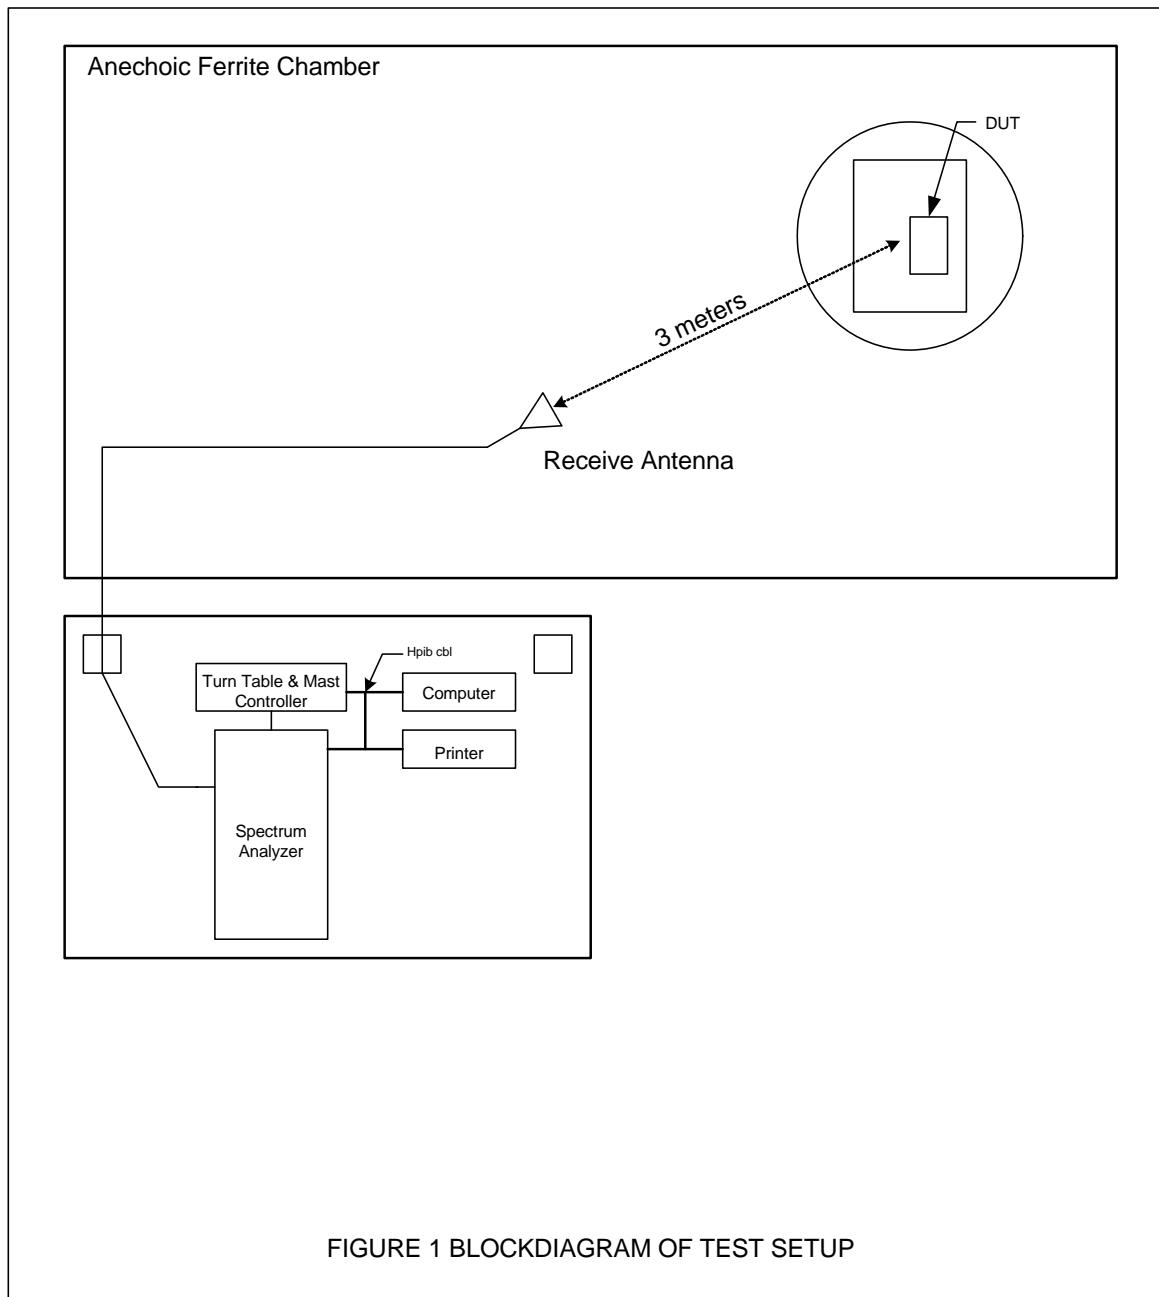


Figure 3




Test Setup for Conducted Emissions

Figure 4



Test Setup for Radiated Emissions – 2GHz to 18GHz, Horizontal Polarization

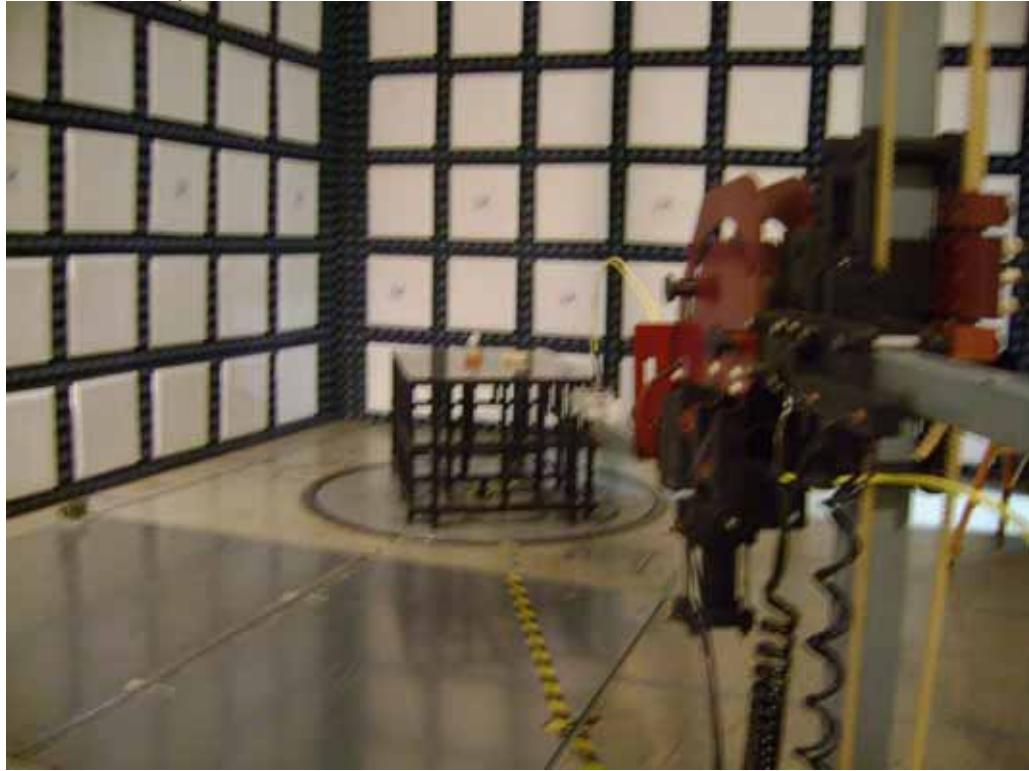


Test Setup for Radiated Emissions – 2GHz to 18GHz, Vertical Polarization





ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515


PRELIMINARY LINE CONDUCTED EMISSIONS
FCC 15B CLASS B
THIS IS A PLOT OF PEAK VALUES
MANUFACTURER: TWISTTHINK LLC
MODEL No. : LCM
S/N :
LINE TESTED : HIGH SIDE
MODE : Tx @ 2440MHz
DATE : 31 Jul 2009 R. KING
NOTES : 120VAC 60Hz

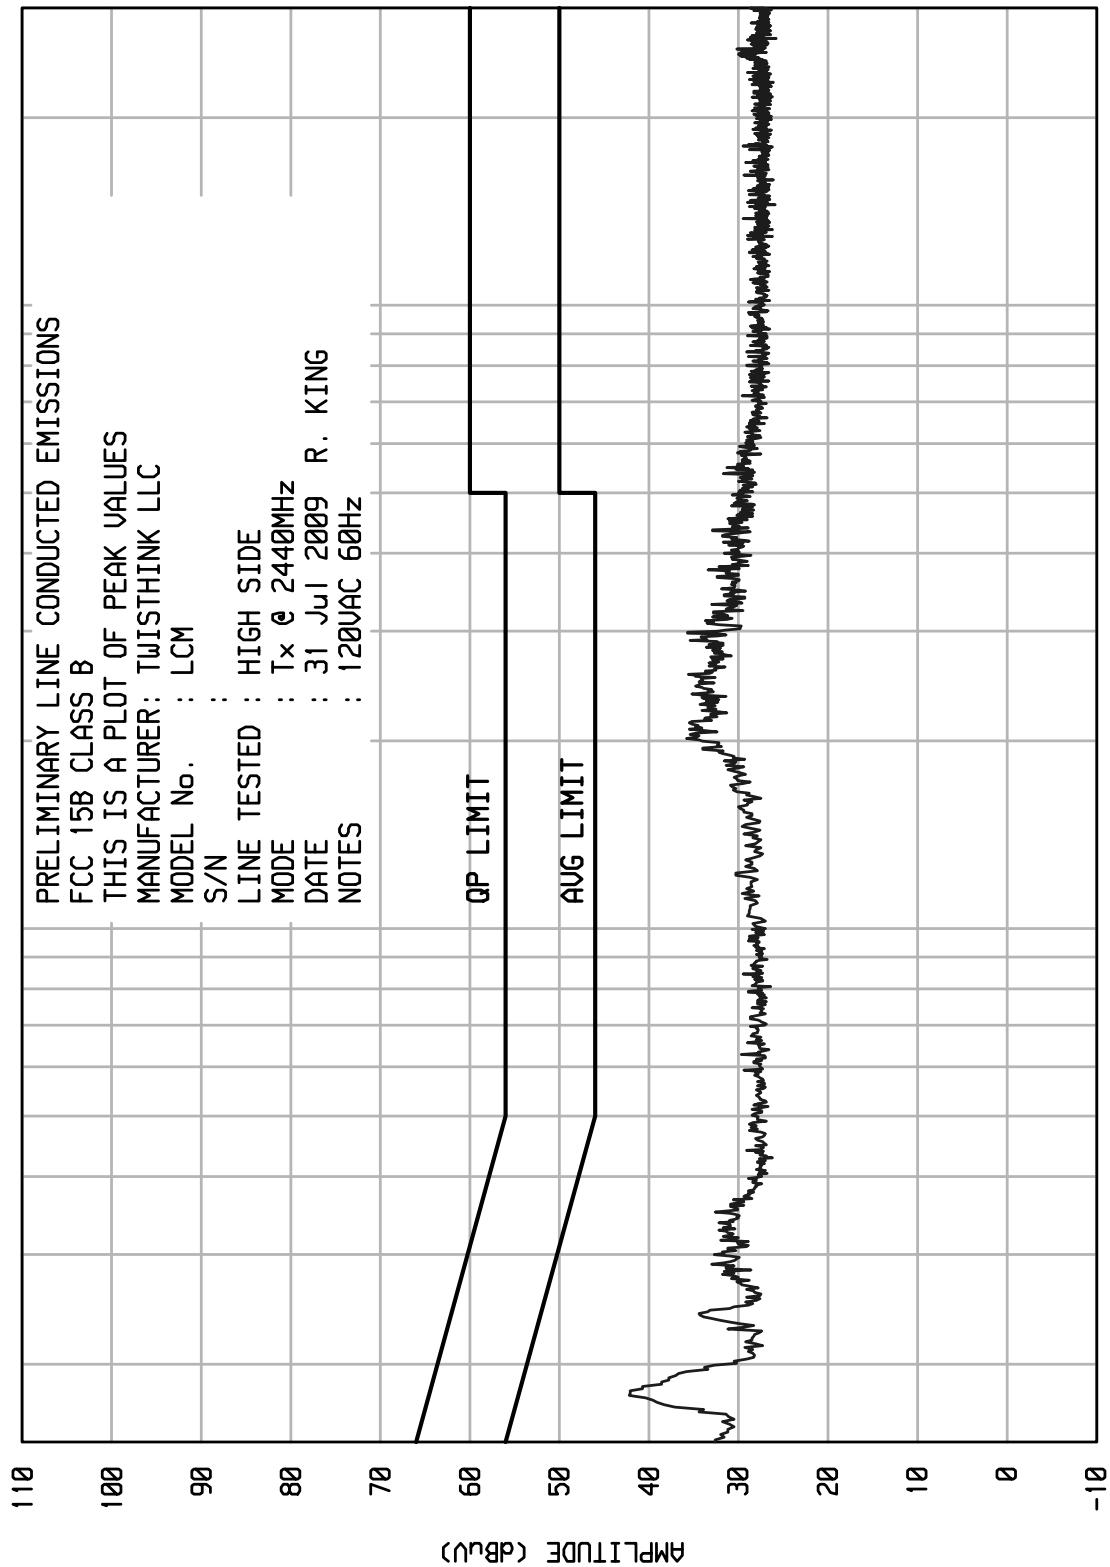

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

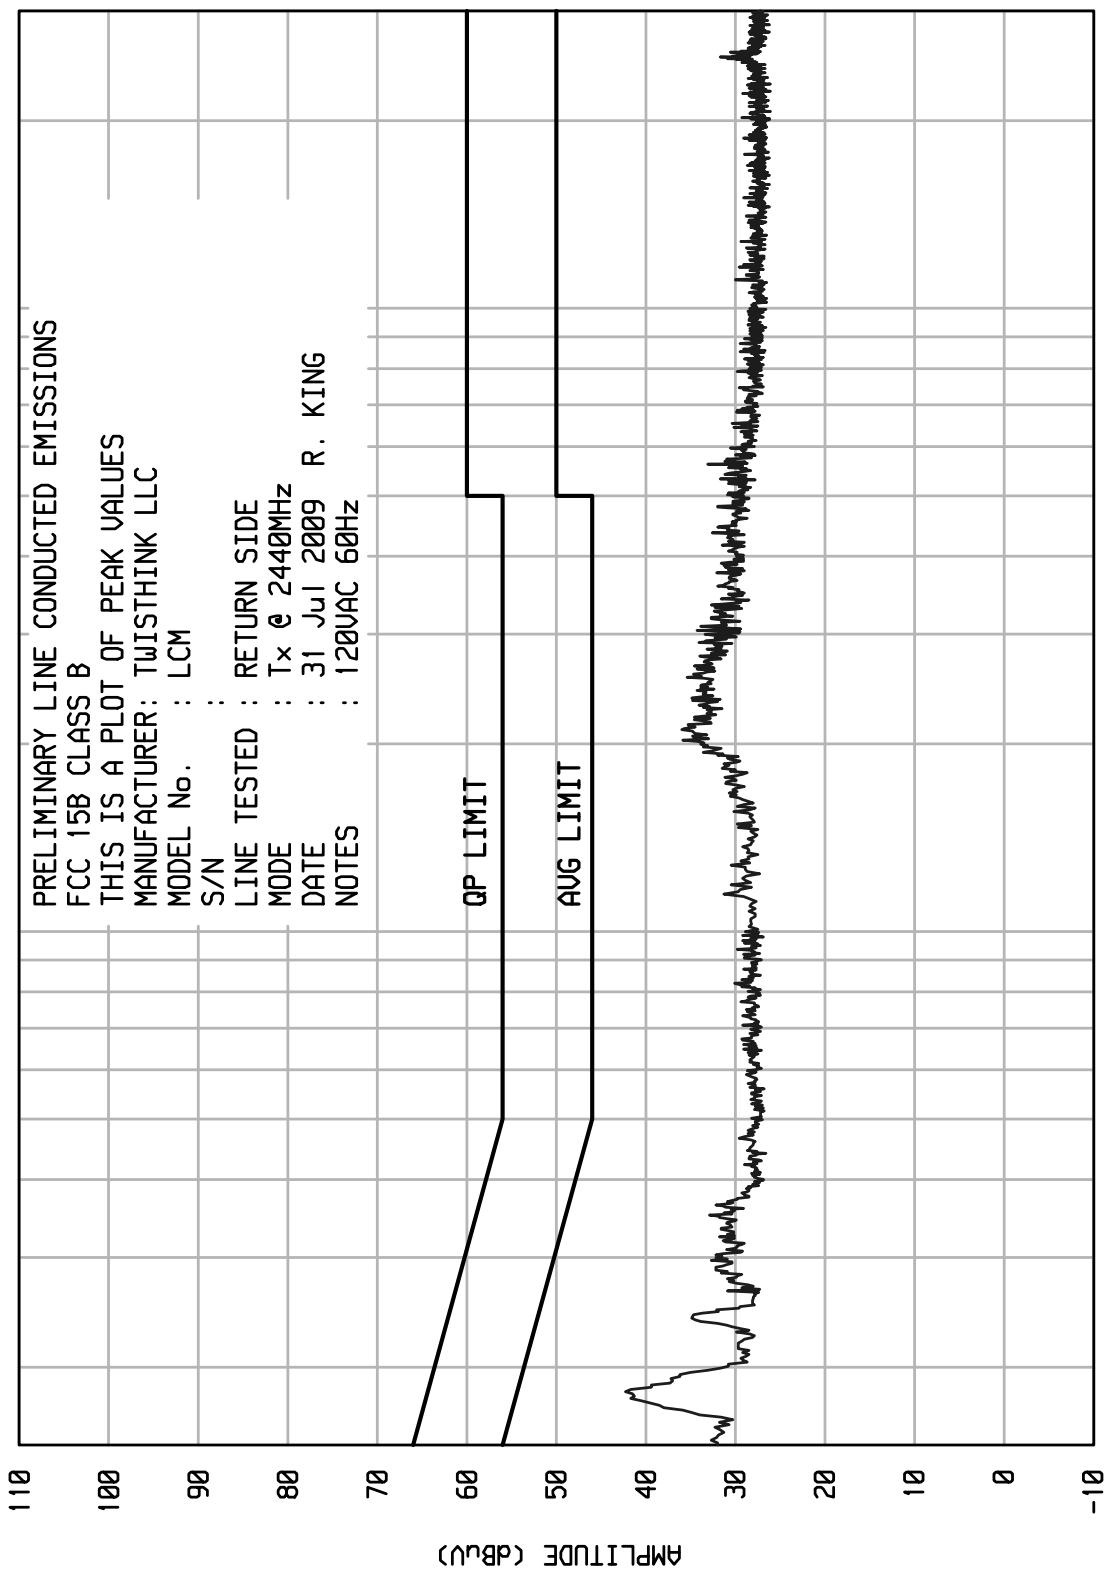

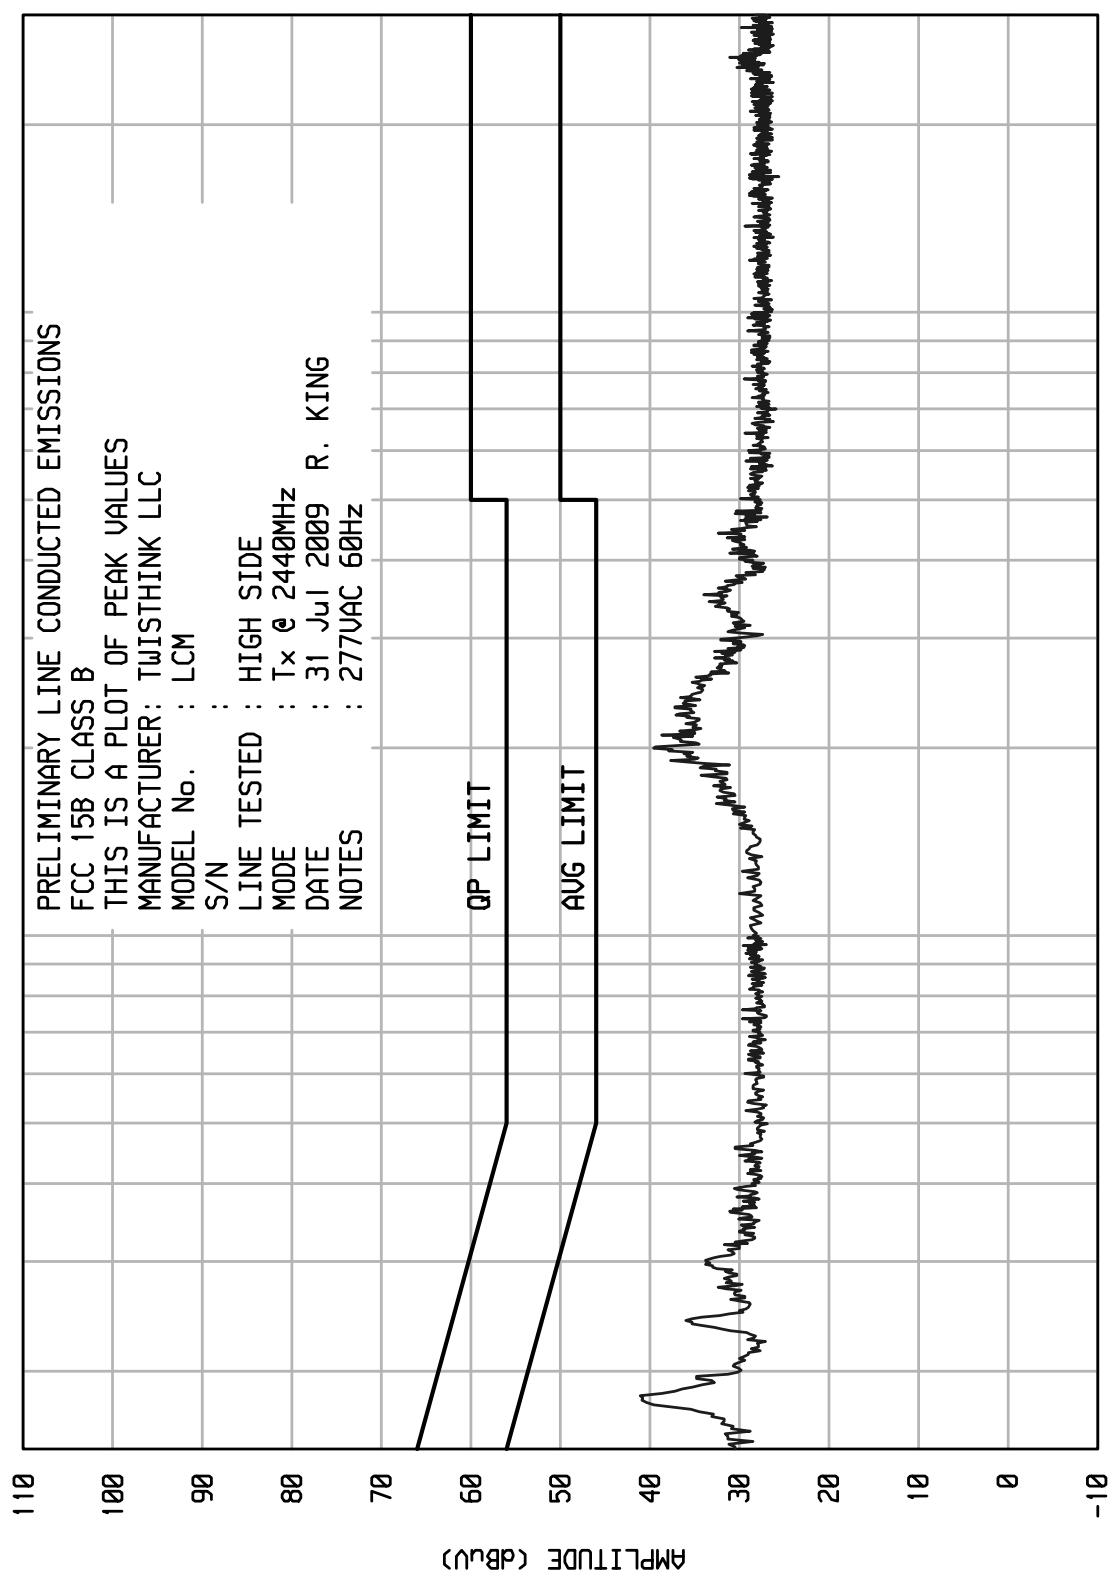

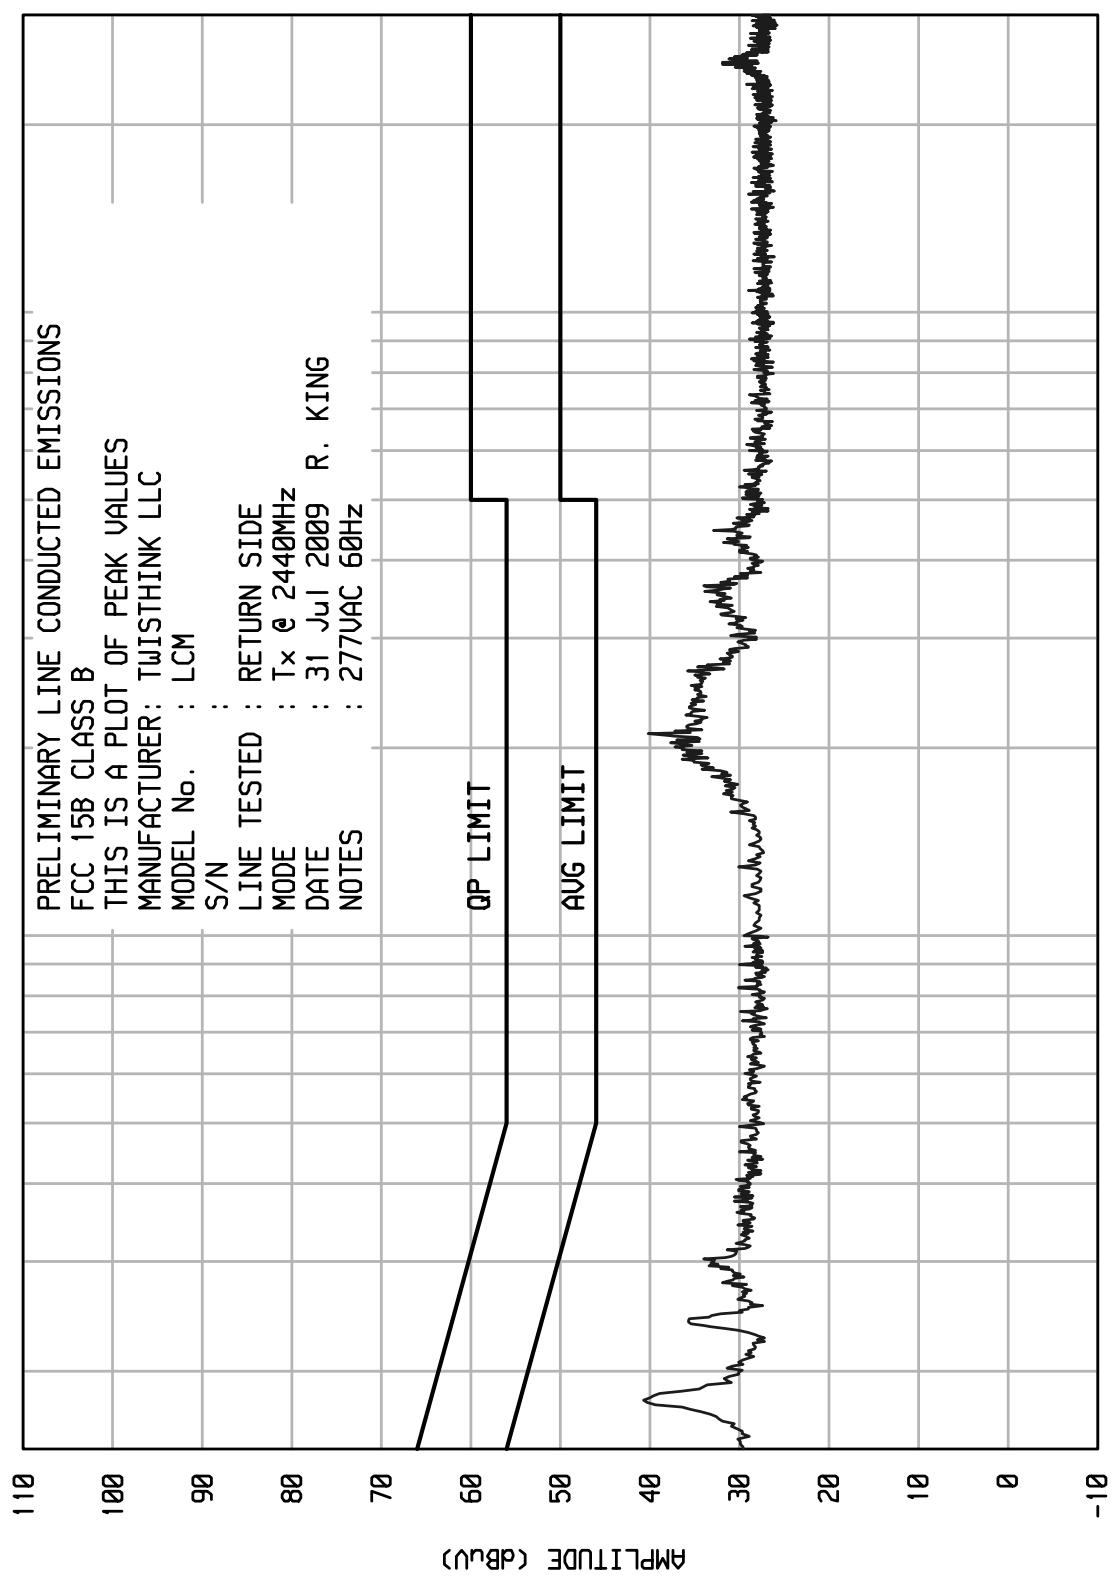



ELITE ELECTRONIC ENGINEERING CO.

MANUFACTURER : TWISTHINK LLC
MODEL : LCM
S/N :
SPECIFICATION : FCC 15B CLASS B
TEST : LINE CONDUCTED EMISSIONS
LINE TESTED : HIGH SIDE
MODE : Tx @ 2440MHz
DATE : 31 Jul 2009
NOTES : 120VAC 60Hz
RECEIVER : HP 8566 w/ HP85650A QP ADAPTOR
VALUES MEASURED WITH QP DETECTOR USING 9kHz BANDWIDTH

FREQUENCY MHz	METER RDG. dBuV	QP LIMIT dBuV	Avg RDG dBuV	Avg LIMIT dBuV	NOTES
.181	36.5	64.4		54.4	
.298	27.8	60.3		50.3	
.617	26.2	56.0		46.0	
.834	25.9	56.0		46.0	
2.020	28.6	56.0		46.0	
2.987	26.8	56.0		46.0	
3.069	27.2	56.0		46.0	
4.537	26.3	56.0		46.0	
7.906	25.6	60.0		50.0	
9.063	25.6	60.0		50.0	
12.718	25.6	60.0		50.0	
16.133	25.6	60.0		50.0	
19.099	25.6	60.0		50.0	
21.954	25.4	60.0		50.0	
24.893	25.7	60.0		50.0	
26.859	25.4	60.0		50.0	

Checked BY *RICHARD E. KING* :

Richard E. King



ELITE ELECTRONIC ENGINEERING CO.

MANUFACTURER : TWISTHINK LLC
MODEL : LCM
S/N :
SPECIFICATION : FCC 15B CLASS B
TEST : LINE CONDUCTED EMISSIONS
LINE TESTED : RETURN SIDE
MODE : Tx @ 2440MHz
DATE : 31 Jul 2009
NOTES : 120VAC 60Hz
RECEIVER : HP 8566 w/ HP85650A QP ADAPTOR
VALUES MEASURED WITH QP DETECTOR USING 9kHz BANDWIDTH

FREQUENCY MHz	METER RDG. dBuV	QP LIMIT dBuV	Avg RDG dBuV	Avg Limit dBuV	Notes
.182	36.8	64.4		54.4	
.454	26.4	56.8		46.8	
.814	26.3	56.0		46.0	
2.113	28.9	56.0		46.0	
2.542	27.9	56.0		46.0	
3.064	27.0	56.0		46.0	
4.750	26.3	56.0		46.0	
6.502	25.7	60.0		50.0	
8.727	25.6	60.0		50.0	
12.743	25.6	60.0		50.0	
14.993	25.4	60.0		50.0	
18.698	25.4	60.0		50.0	
21.898	25.4	60.0		50.0	
24.948	25.9	60.0		50.0	
27.678	25.4	60.0		50.0	

Checked BY *RICHARD E. KING* :

Richard E. King



ELITE ELECTRONIC ENGINEERING CO.

MANUFACTURER : TWISTHINK LLC
MODEL : LCM
S/N :
SPECIFICATION : FCC 15B CLASS B
TEST : LINE CONDUCTED EMISSIONS
LINE TESTED : HIGH SIDE
MODE : Tx @ 2440MHz
DATE : 31 Jul 2009
NOTES : 277VAC 60Hz
RECEIVER : HP 8566 w/ HP85650A QP ADAPTOR
VALUES MEASURED WITH QP DETECTOR USING 9kHz BANDWIDTH

FREQUENCY MHz	METER RDG. dBuV	QP LIMIT dBuV	Avg RDG dBuV	Avg Limit dBuV	Notes
.351	27.6	58.9		48.9	
.725	26.3	56.0		46.0	
1.610	26.7	56.0		46.0	
1.991	28.7	56.0		46.0	
2.408	29.3	56.0		46.0	
3.529	27.7	56.0		46.0	
4.979	25.6	56.0		46.0	
6.783	25.4	60.0		50.0	
9.290	25.4	60.0		50.0	
12.075	25.4	60.0		50.0	
15.338	25.4	60.0		50.0	
18.398	25.4	60.0		50.0	
20.958	25.4	60.0		50.0	
24.748	25.7	60.0		50.0	
28.093	25.4	60.0		50.0	

Checked BY Richard E. King :

Richard E. King




ELITE ELECTRONIC ENGINEERING CO.

MANUFACTURER : TWISTHINK LLC
MODEL : LCM
S/N :
SPECIFICATION : FCC 15B CLASS B
TEST : LINE CONDUCTED EMISSIONS
LINE TESTED : RETURN SIDE
MODE : Tx @ 2440MHz
DATE : 31 Jul 2009
NOTES : 277VAC 60Hz
RECEIVER : HP 8566 w/ HP85650A QP ADAPTOR
VALUES MEASURED WITH QP DETECTOR USING 9kHz BANDWIDTH

FREQUENCY MHz	METER RDG. dBuV	QP LIMIT dBuV	Avg RDG dBuV	Avg Limit dBuV	Notes
.181	36.9	64.4		54.4	
.448	26.6	56.9		46.9	
.813	26.3	56.0		46.0	
1.990	28.5	56.0		46.0	
2.098	29.8	56.0		46.0	
2.644	27.8	56.0		46.0	
3.608	27.4	56.0		46.0	
4.419	26.6	56.0		46.0	
6.099	25.6	60.0		50.0	
9.011	25.4	60.0		50.0	
10.803	25.4	60.0		50.0	
15.139	25.4	60.0		50.0	
18.063	25.4	60.0		50.0	
21.463	25.4	60.0		50.0	
24.938	26.0	60.0		50.0	
26.762	25.4	60.0		50.0	

Checked BY *Richard E. King* :

Richard E. King

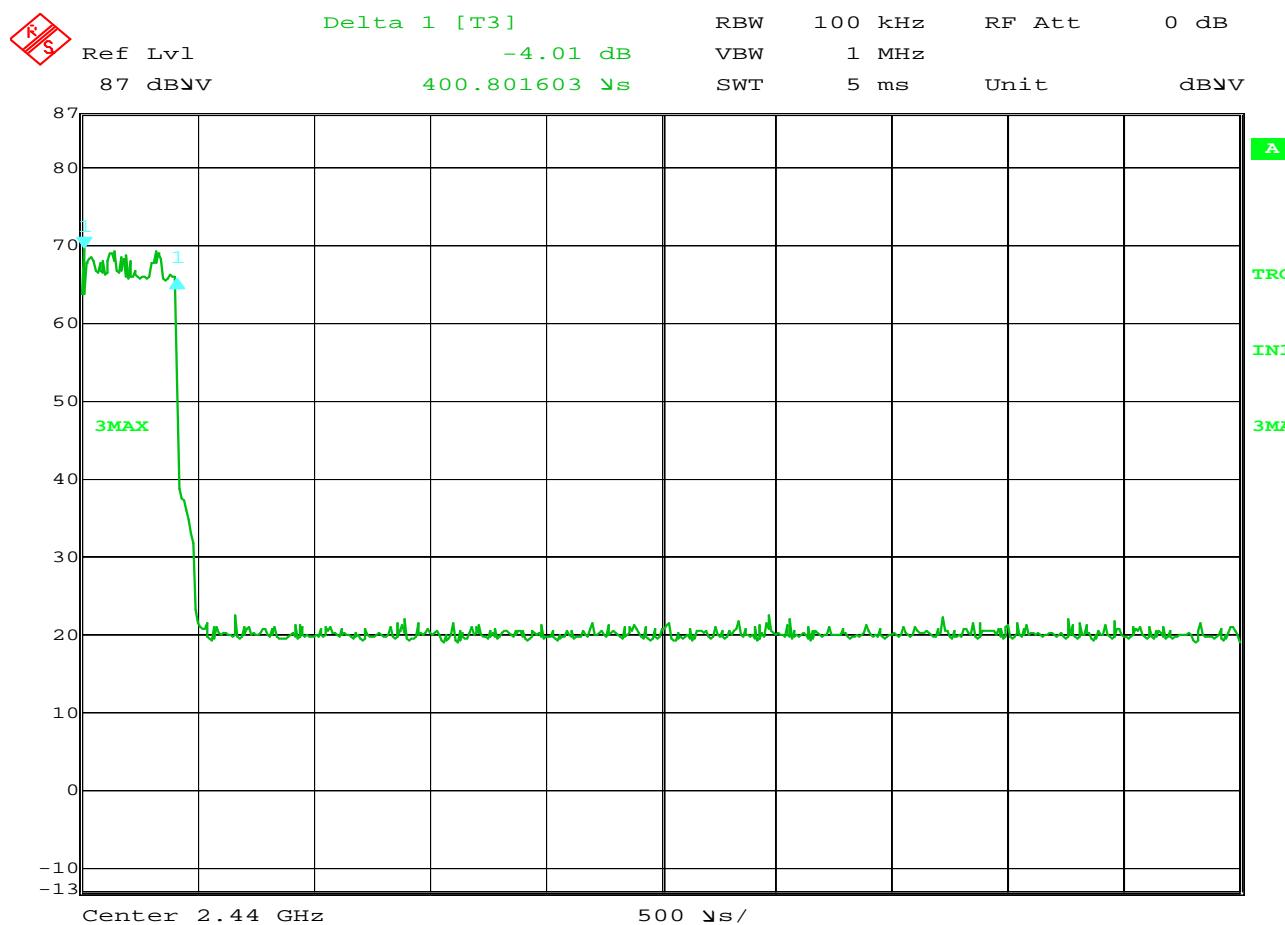


Date: 29.JUL.2009 16:48:27

FCC 15.247 Duty Cycle

MANUFACTURER : Twistthink, LLC
PRODUCT NAME : Light Control Module (LCM)
MODEL NUMBER : XF0306 REV.4 Board 6
TEST MODE : Transmit @ 2440MHz
TEST ITEM POWER : High Power
TEST PARAMETERS : Pulse width
TEST PARAMETERS : 400.8 μ s

NOTES

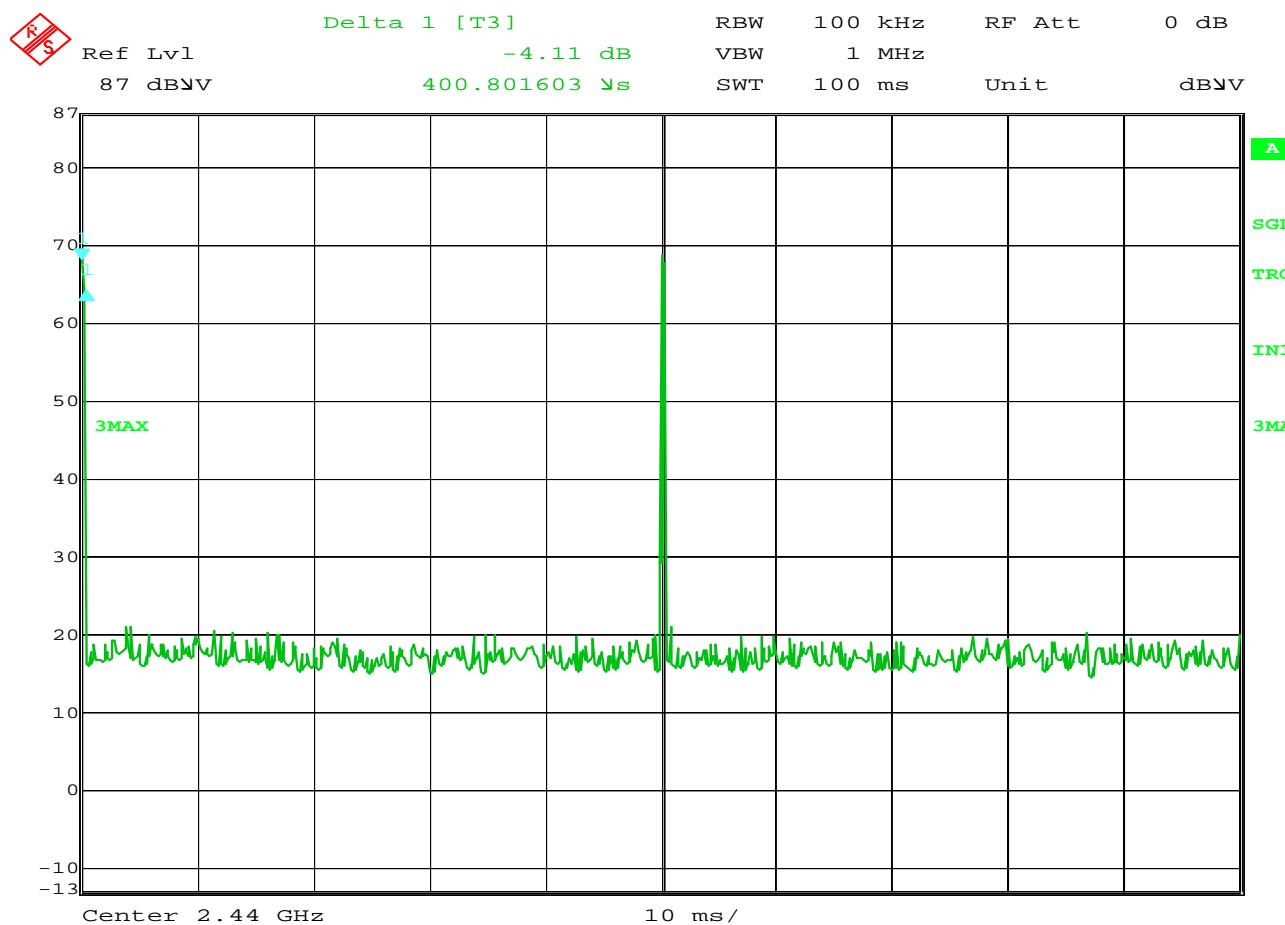

Date: 29.JUL.2009 17:13:46

FCC 15.247 Duty Cycle

MANUFACTURER : Twistthink, LLC
PRODUCT NAME : Light Control Module (LCM)
MODEL NUMBER : XF0306 REV.4 Board 6
TEST MODE : Transmit @ 2440MHz
TEST ITEM POWER : High Power
TEST PARAMETERS : Number of pulses in 100mS
TEST PARAMETERS : $20 \cdot \log((.4^2)/100) = -41.9 \text{ dB}$


NOTES

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/30/09

UNIT RCU EMI RUN 2

SPEC / TEST	:	FCC PRELIM RADIATED EMISSIONS
MANUFACTURER	:	TWISTTHINK LLC
MODEL No.	:	LCM
SERIAL No.	:	
MODE	:	Rx & 2405MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	10 Aug 2009 06:36:08
ANT. POLARIZ.	:	HORIZONTAL

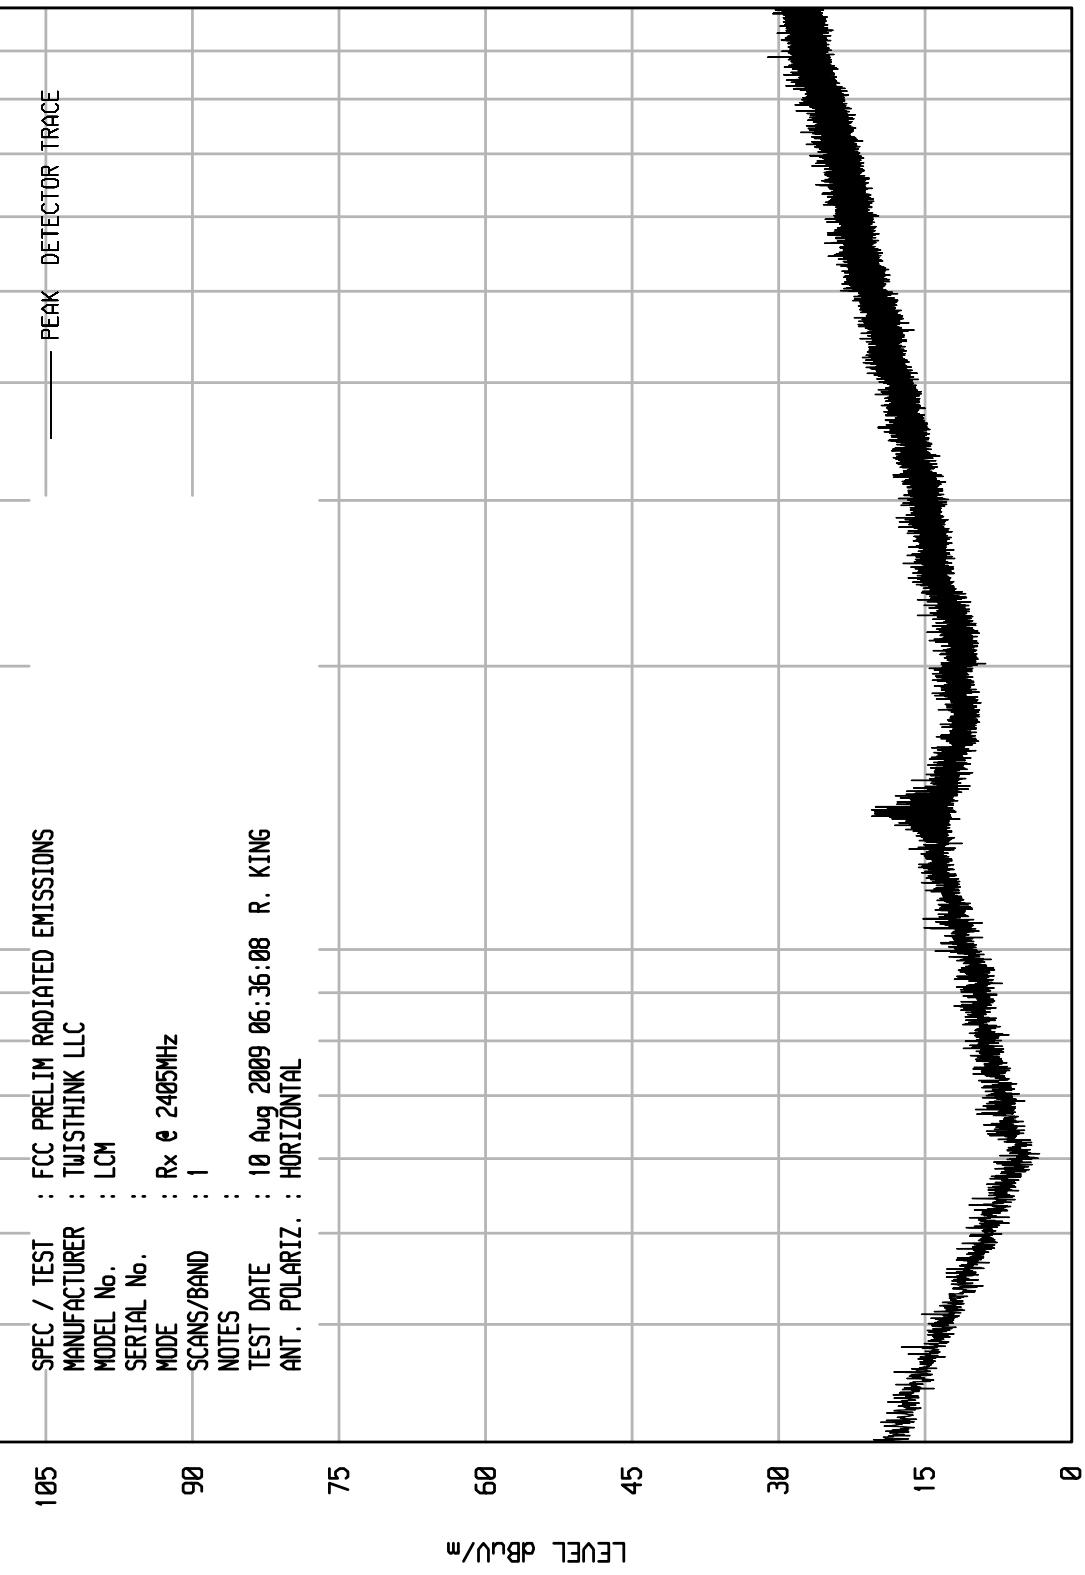


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/30/09

UNIT RCU EMI RUN 1

SPEC / TEST	:	FCC PRELIM RADIATED EMISSIONS
MANUFACTURER	:	TWISTTHINK LLC
MODEL No.	:	LCM
SERIAL No.	:	
MODE	:	Rx & 2405MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	10 Aug 2009 06:27:09
ANT. POLARIZ.	:	VERTICAL

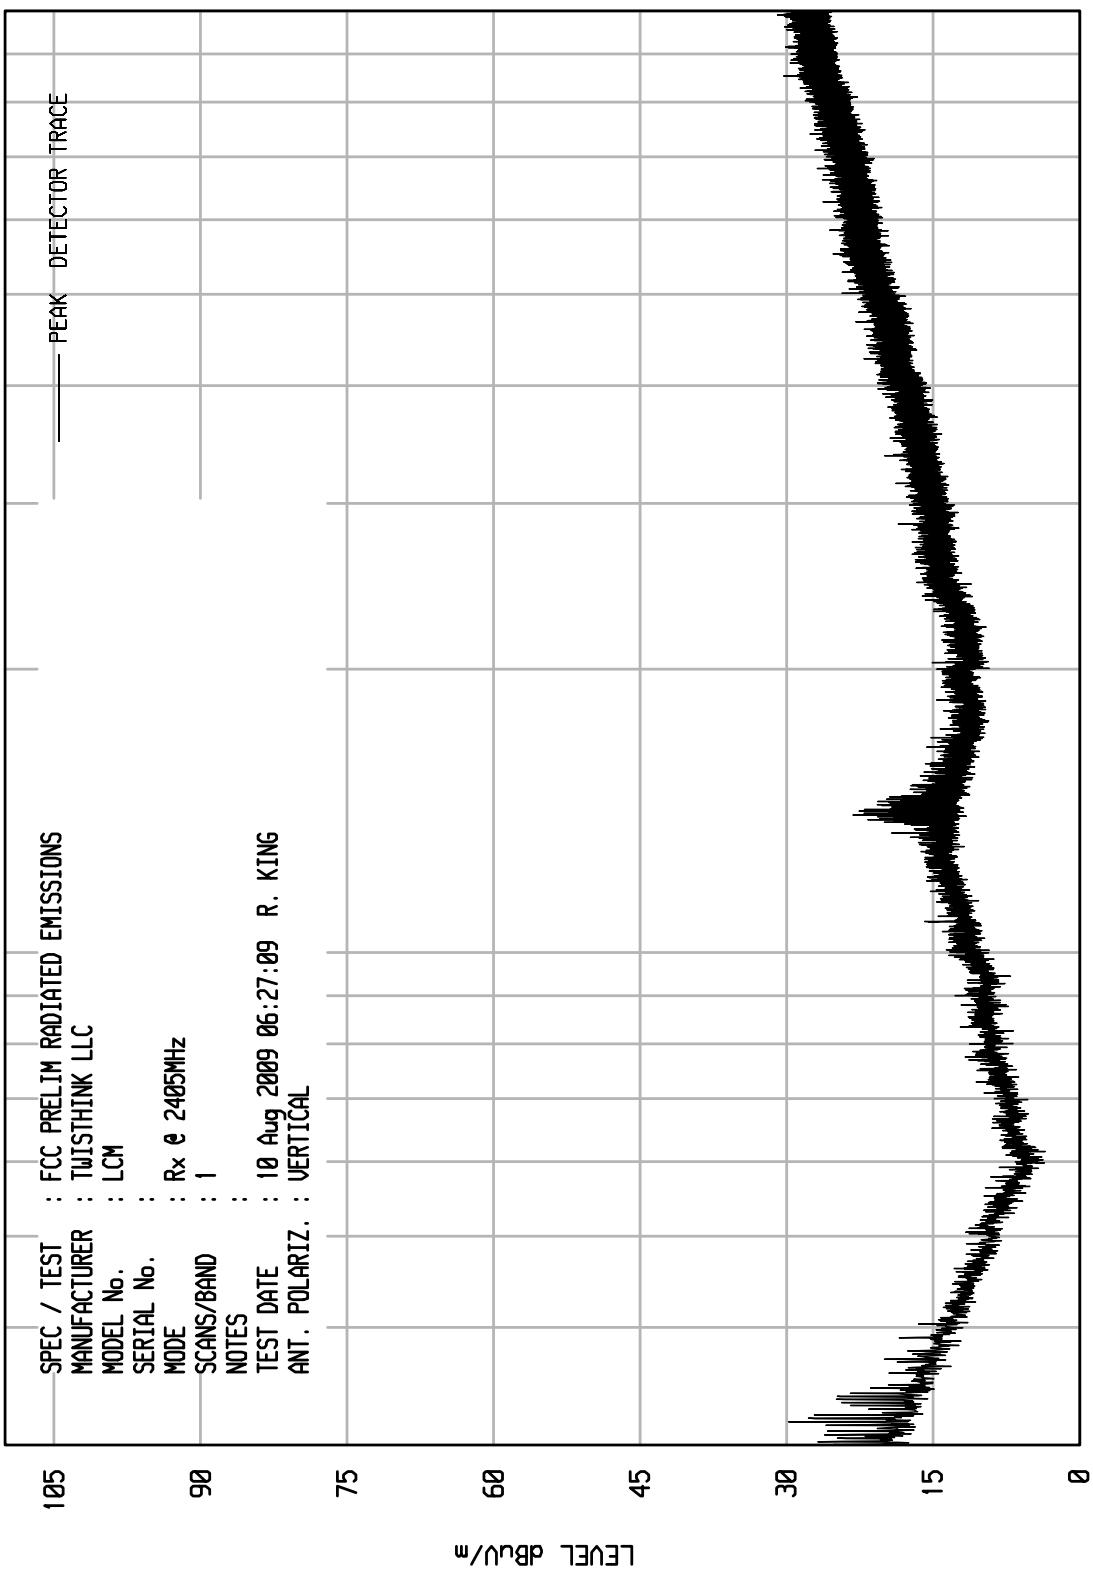


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/30/09

UNIT RCU EMI RUN 3

SPEC / TEST	:	FCC PRELIM RADIATED EMISSIONS
MANUFACTURER	:	TWISTTHINK LLC
MODEL No.	:	LCM
SERIAL No.	:	
MODE	:	Rx & 240MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	10 Aug 2009 06:37:46
ANT. POLARIZ.	:	HORIZONTAL

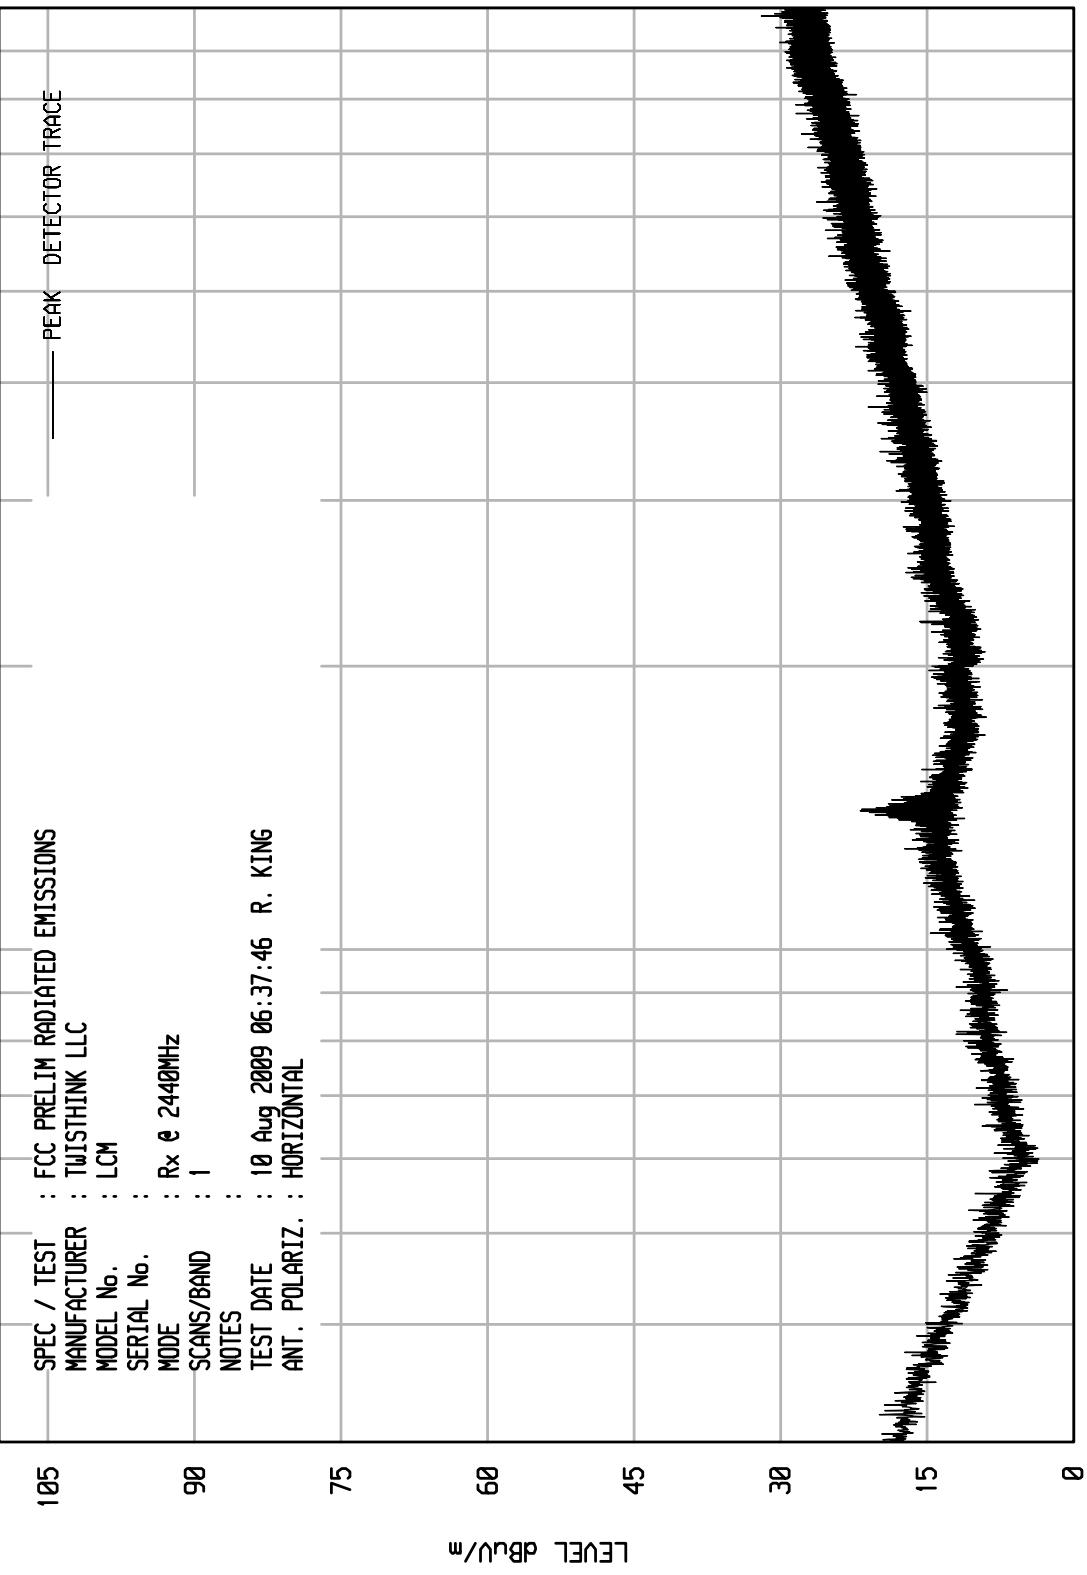


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/30/09

UNIT RCU EMI RUN 4

SPEC / TEST	:	FCC PRELIM RADIATED EMISSIONS
MANUFACTURER	:	TWISTTHINK LLC
MODEL No.	:	LCM
SERIAL No.	:	
MODE	:	Rx & 240MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	10 Aug 2009 06:39:34
ANT. POLARIZ.	:	VERTICAL

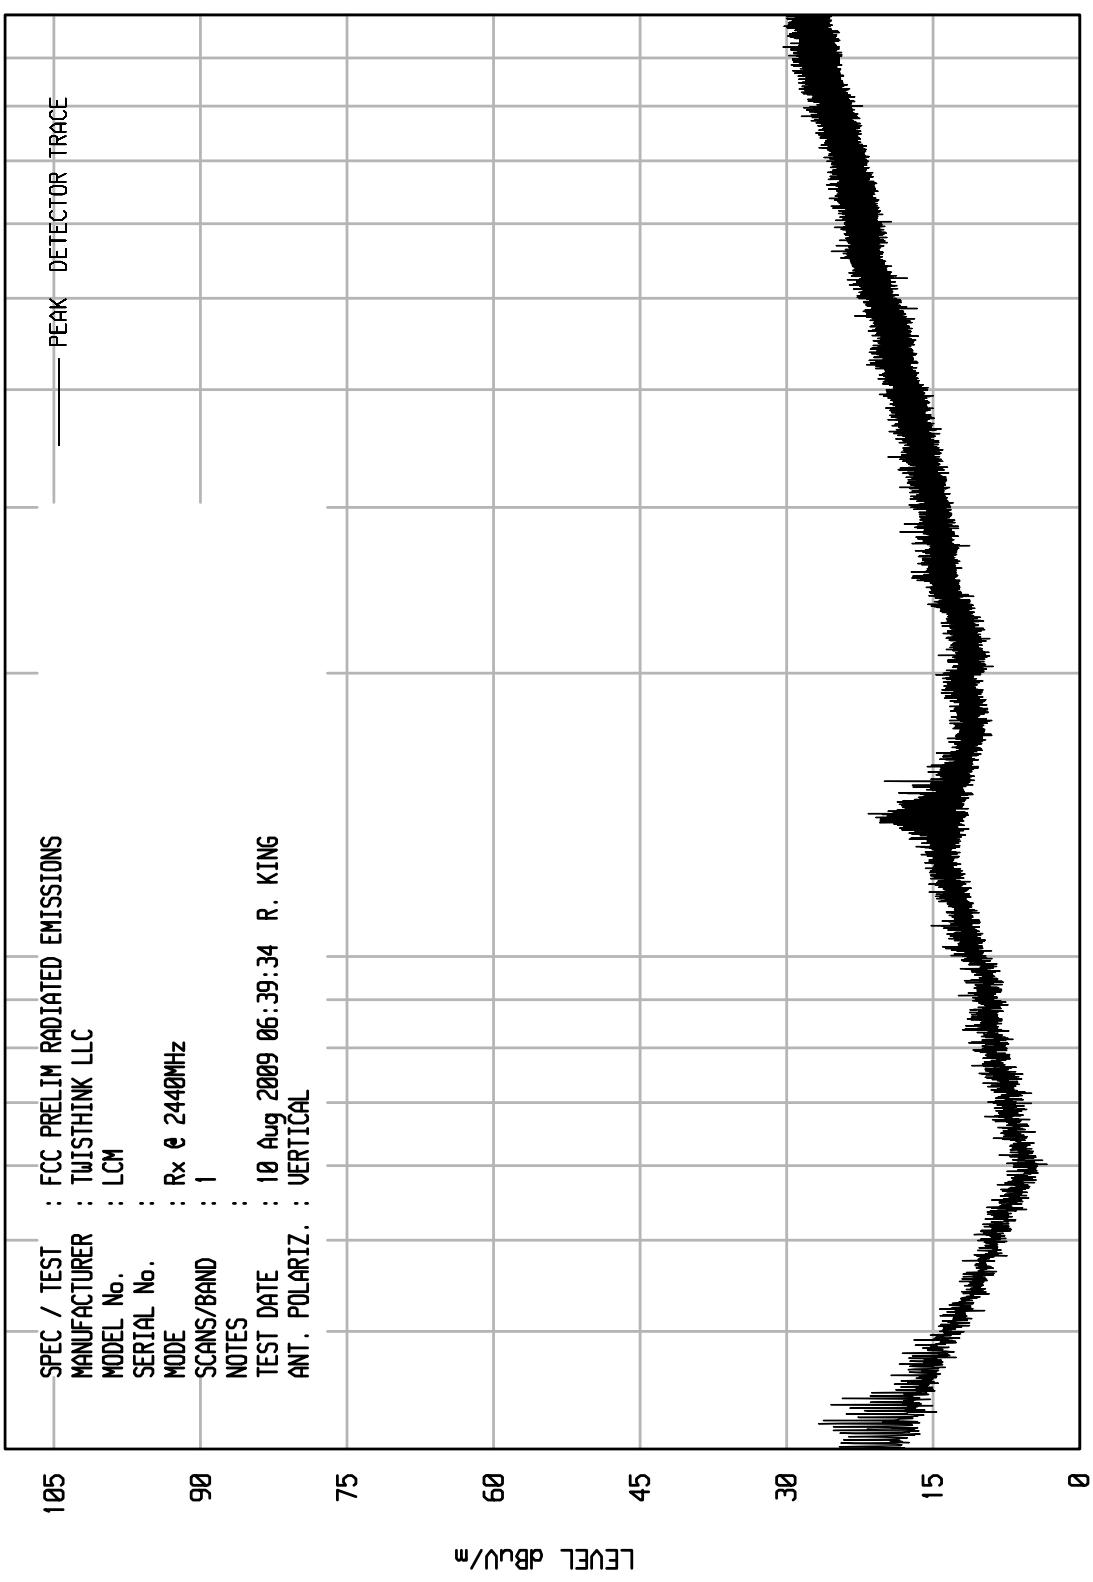


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/30/09

UNIT RCU EMI RUN 6

SPEC / TEST	:	FCC PRELIM RADIATED EMISSIONS
MANUFACTURER	:	TWISTTHINK LLC
MODEL No.	:	LCM
SERIAL No.	:	
MODE	:	Rx & 2475MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	10 Aug 2009 06:43:59
ANT. POLARIZ.	:	HORIZONTAL

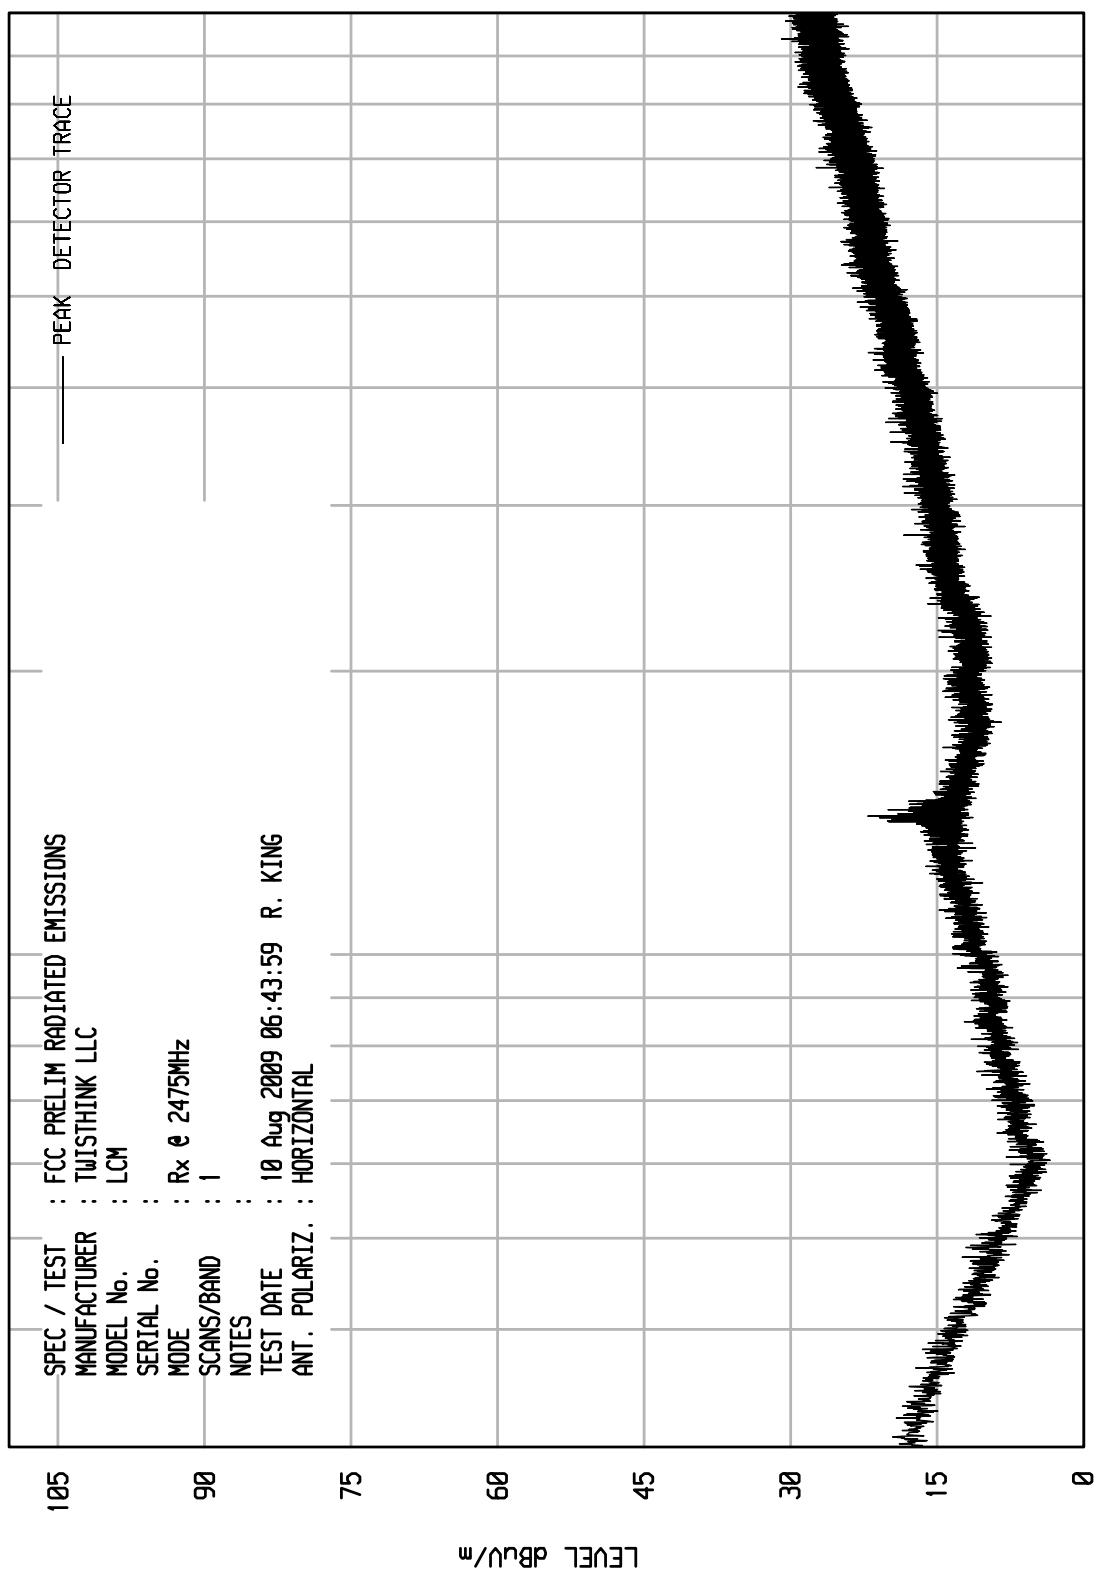


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/30/09

UNIT RCU EMI RUN 5


SPEC / TEST	:	FCC PRELIM RADIATED EMISSIONS
MANUFACTURER	:	TWISTTHINK LLC
MODEL No.	:	LCM
SERIAL No.	:	
MODE	:	Rx & 2475MHz
SCANS/BAND	:	1
NOTES	:	
TEST DATE	:	10 Aug 2009 06:41:21
ANT. POLARIZ.	:	VERTICAL

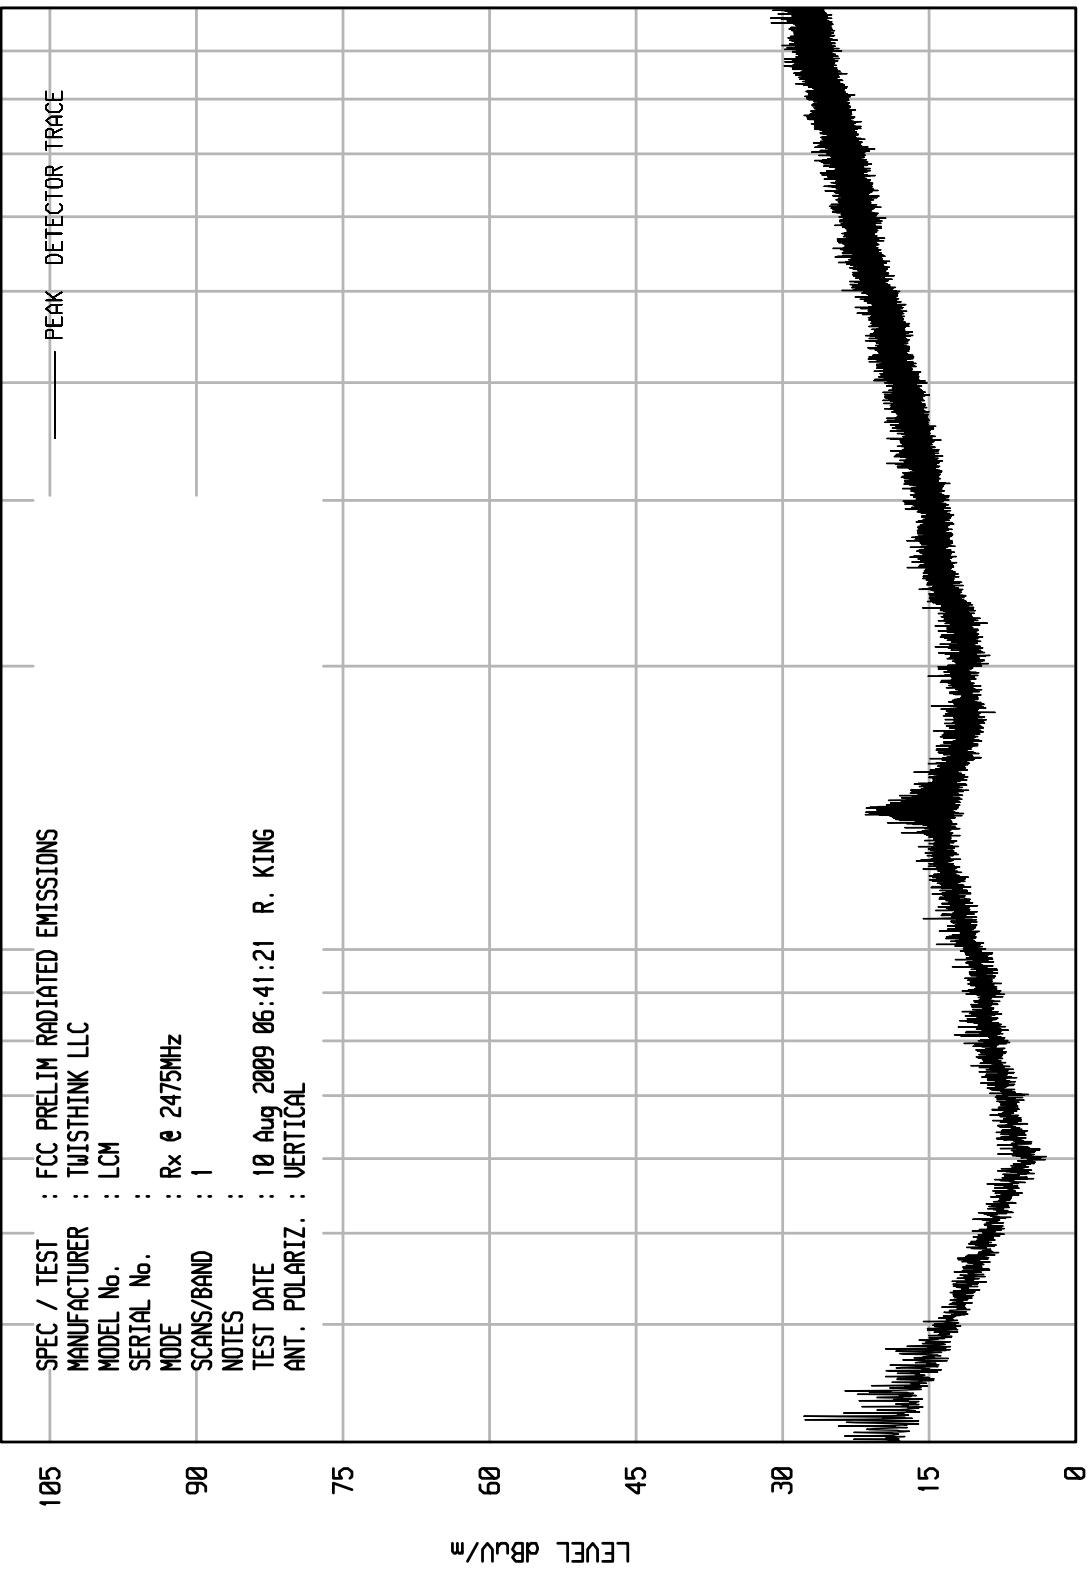

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIV RCU EMI RUN 8

WKA1	01/30/09	SPEC / TEST	PRELIM RADIATED EMISSIONS
105		MANUFACTURER	TWISTLINK LLC
		MODEL No.	LCM
		SERIAL No.	
		MODE	Rx & 2405MHz
		SCANS/BAND	1
		NOTES	
90		TEST DATE	10 Aug 2009 06:56:51 R. KING
		ANT. POLARIZ.	HORIZONTAL

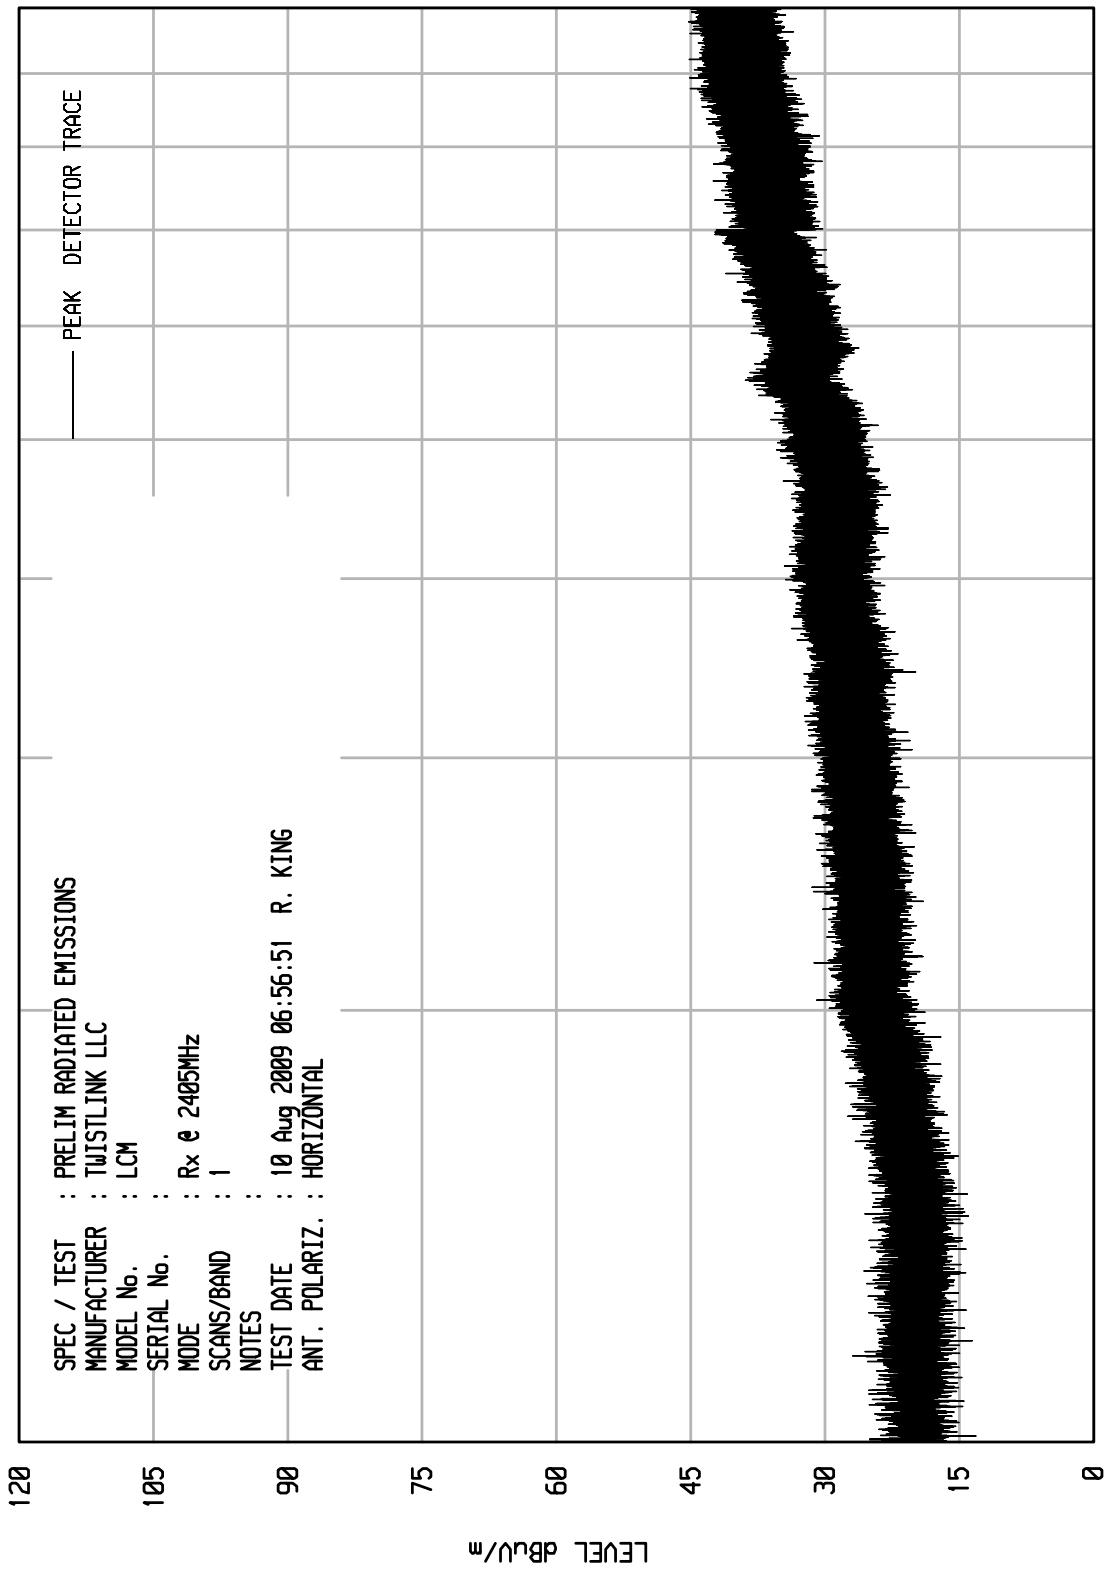


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIV RCU EMI RUN 7

WKA1 01/30/09


	SPEC / TEST	PRELIM RADIATED EMISSIONS
	MANUFACTURER	TWISTLINK LLC
105	MODEL No.	LCM
	SERIAL No.	
	MODE	Rx & 2405MHz
	SCANS/BAND	1
	NOTES	
90	TEST DATE	10 Aug 2009 06:53:22 R. KING
	ANT. POLARIZ.	VERTICAL

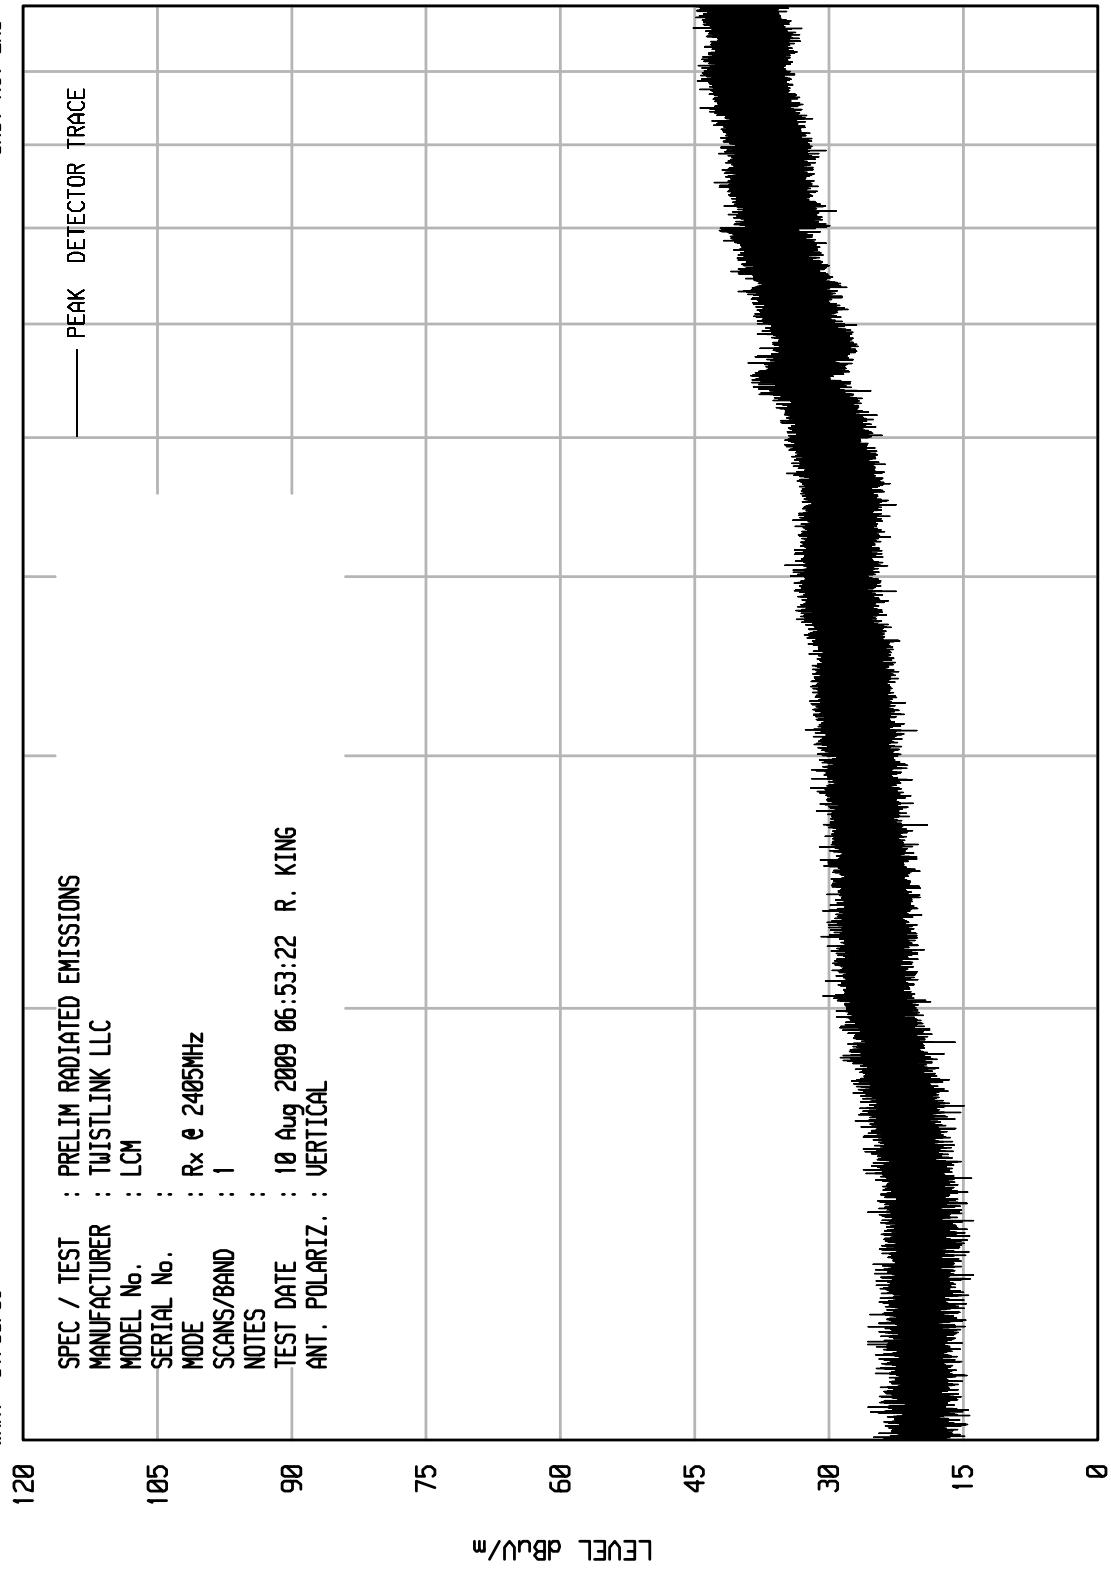

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIV RCU EMI RUN 9

WKA1	01/30/09	SPEC / TEST	PRELIM RADIATED EMISSIONS
105		MANUFACTURER	TWISTLINK LLC
		MODEL No.	LCM
		SERIAL No.	
		MODE	Rx & 240MHz
		SCANS/BAND	1
		NOTES	
90		TEST DATE	10 Aug 2009 07:00:46 R. KING
		ANT. POLARIZ.	HORIZONTAL

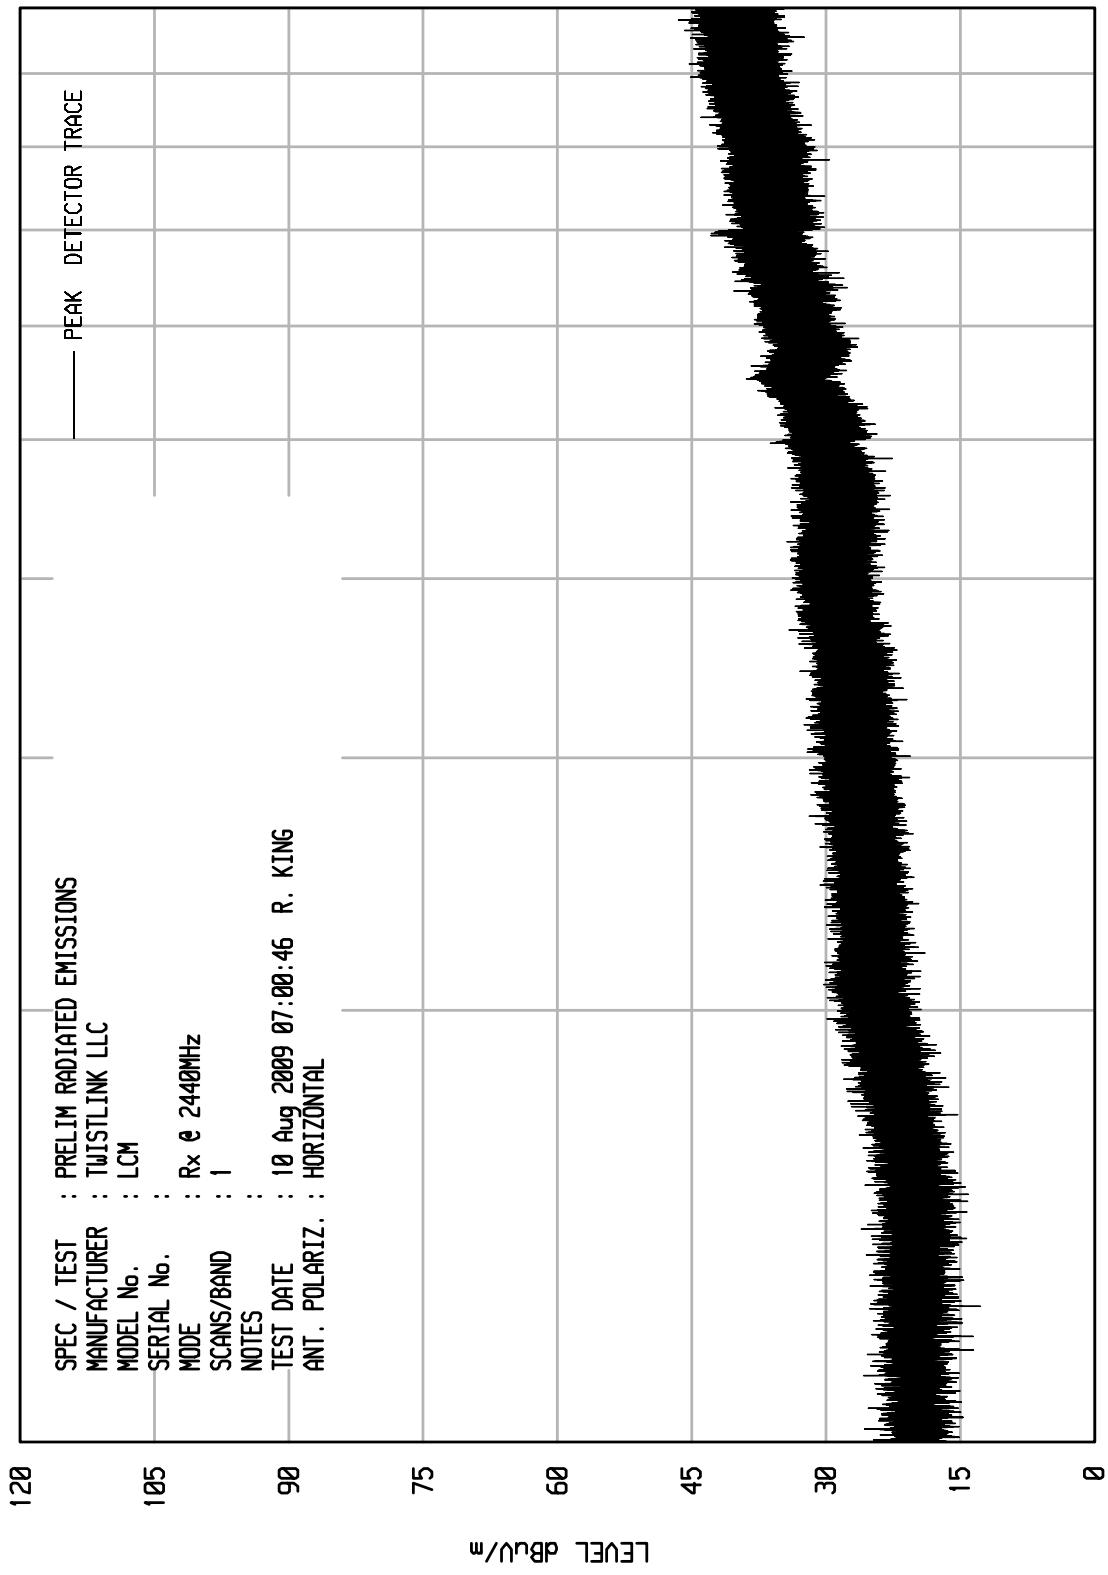


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIV RCU EMI RUN 10

WKA1 01/30/09

SPEC / TEST	: PRELIM RADIATED EMISSIONS
MANUFACTURER	: TWISTLINK LLC
MODEL No.	: LCM
SERIAL No.	
MODE	: Rx & 240MHz
SCANS/BAND	: 1
NOTES	
TEST DATE	: 10 Aug 2009 07:04:58
ANT. POLARIZ.	: VERTICAL

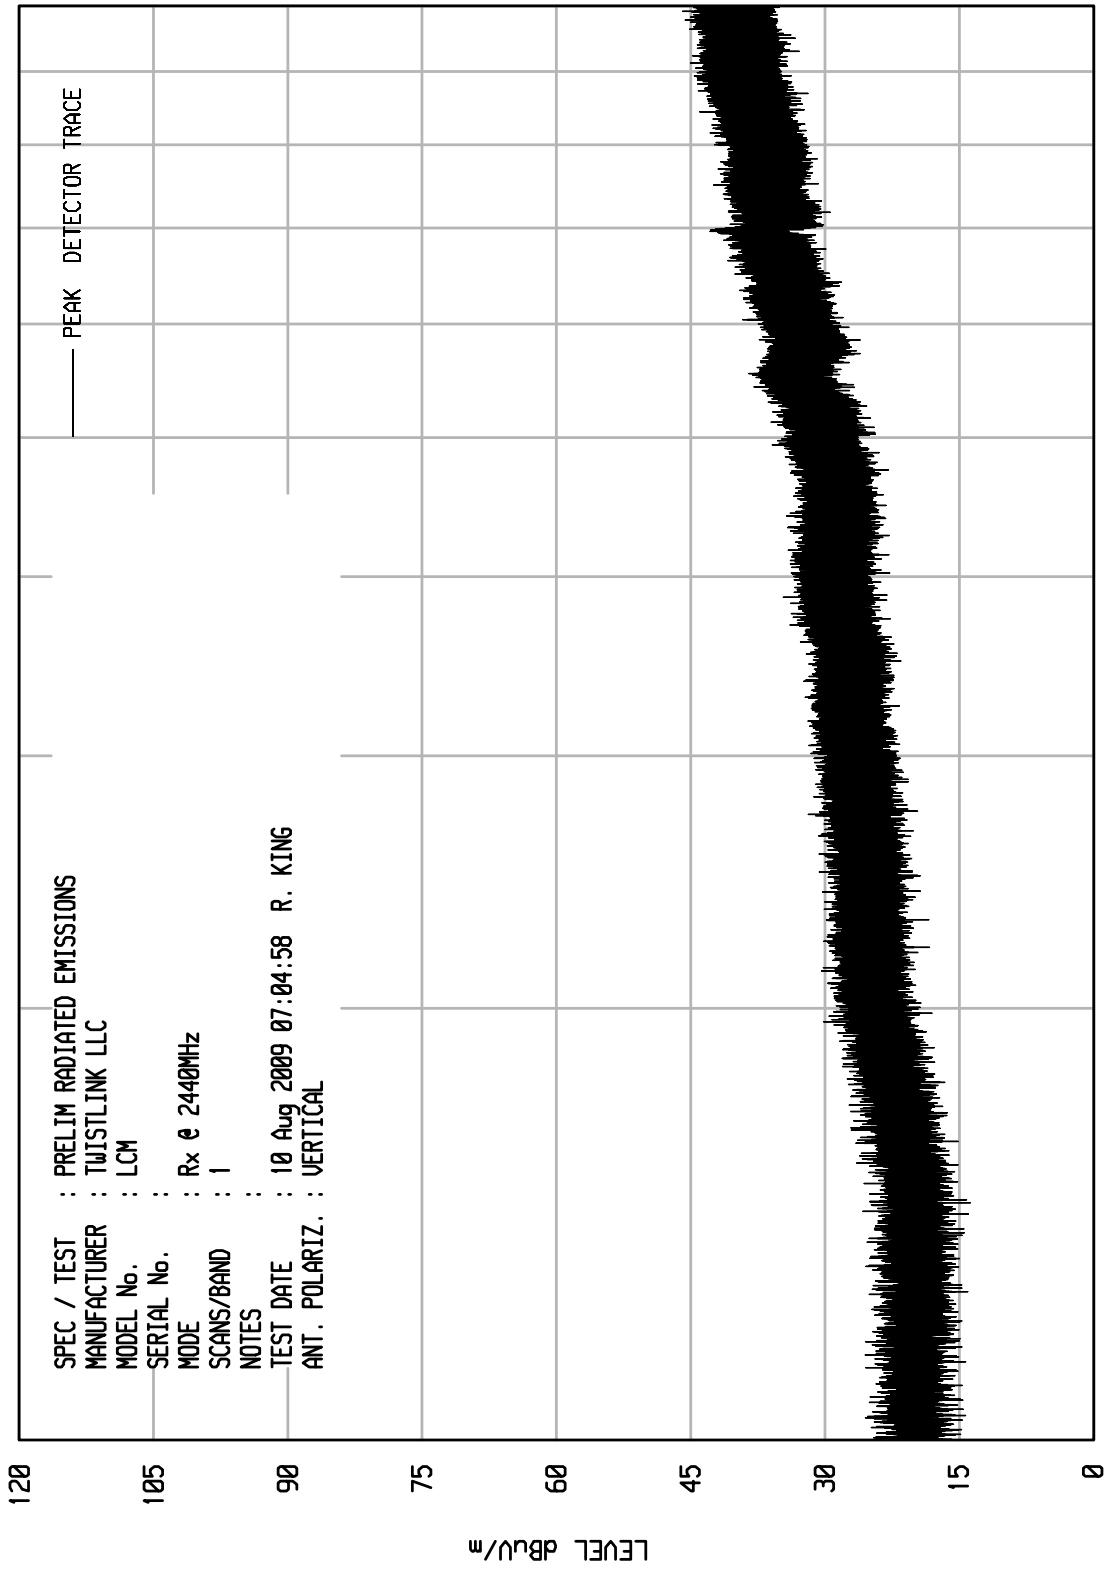

STOP = 10000

FREQUENCY MHz


STOP = 10000

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIT RCU EMI RUN 12

WKA1 01/30/09

SPEC / TEST	: PRELIM RADIATED EMISSIONS
MANUFACTURER	: TWISTLINK LLC
MODEL No.	: LCM
SERIAL No.	: 105
MODE	: Rx & 2475MHz
SCANS/BAND	: 1
NOTES	
TEST DATE	: 10 Aug 2009 07:11:24
ANT. POLARIZ.	: HORIZONTAL

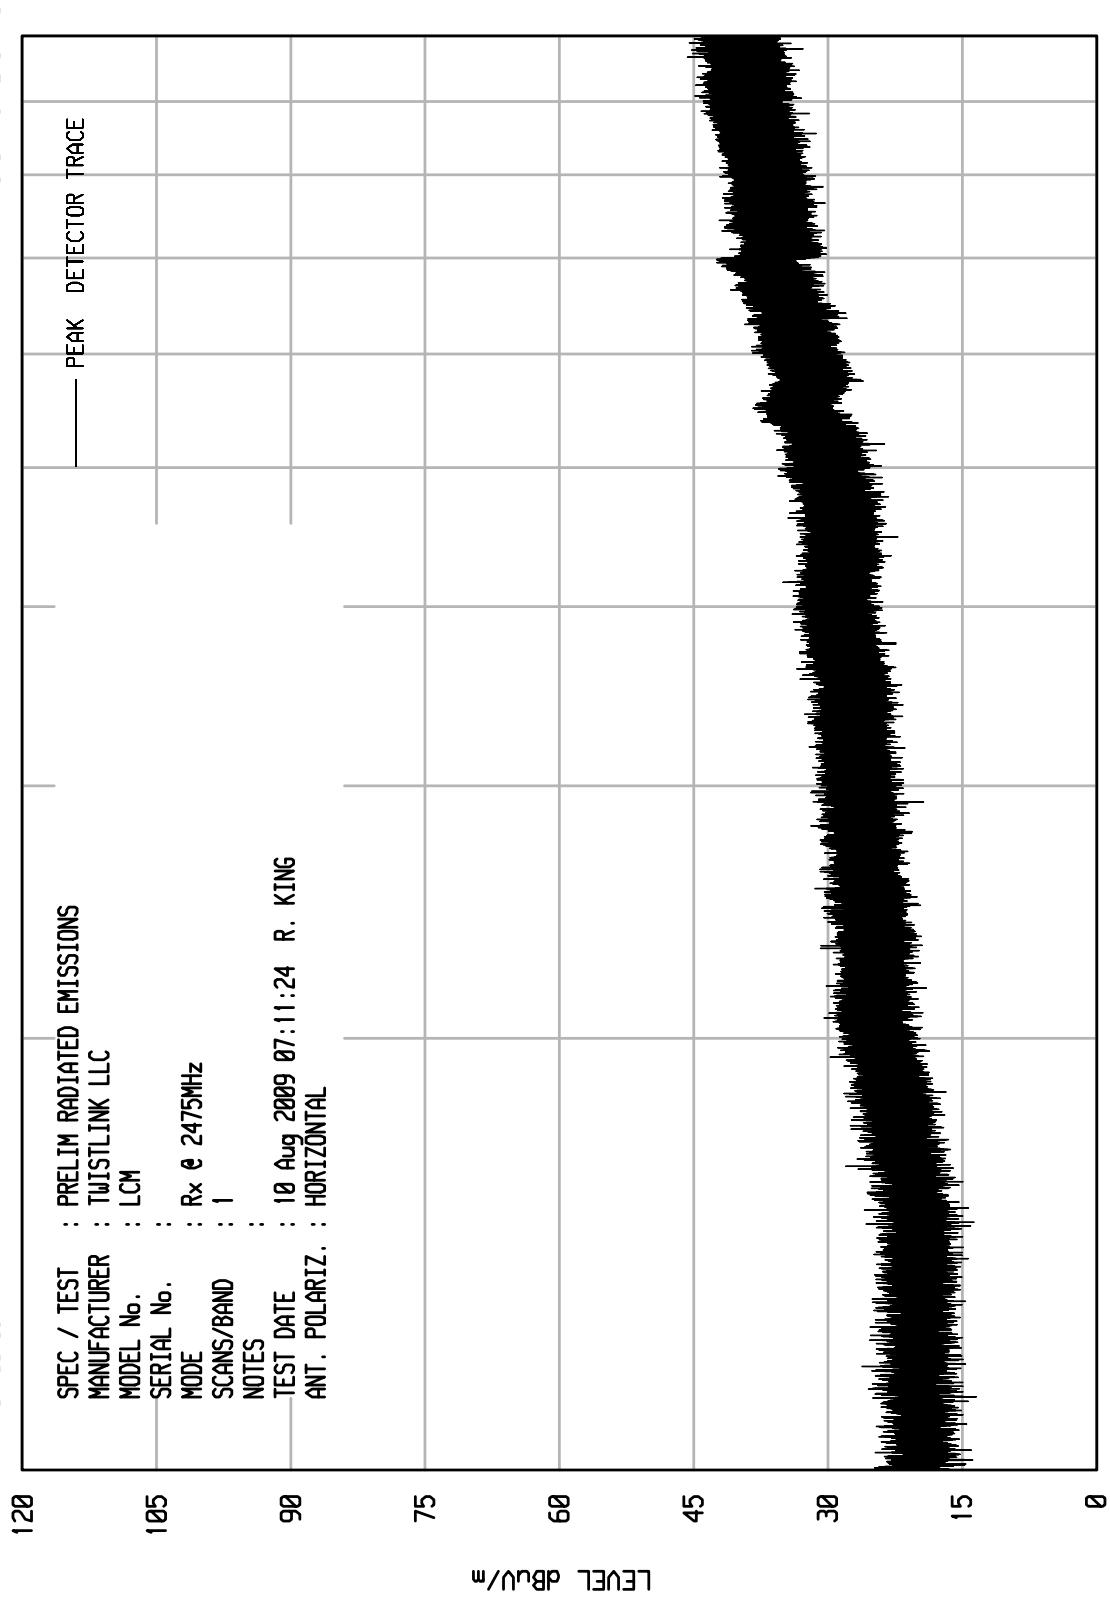


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIV RCU EMI RUN 11

WKA1 01/30/09

	SPEC / TEST	: PRELIM RADIATED EMISSIONS
105	MANUFACTURER	: TWISTLINK LLC
	MODEL No.	: LCM
	SERIAL No.	
	MODE	: Rx & 2475MHz
	SCANS/BAND	: 1
	NOTES	
90	TEST DATE	: 10 Aug 2009 07:08:14 R. KING
	ANT. POLARIZ.	: VERTICAL

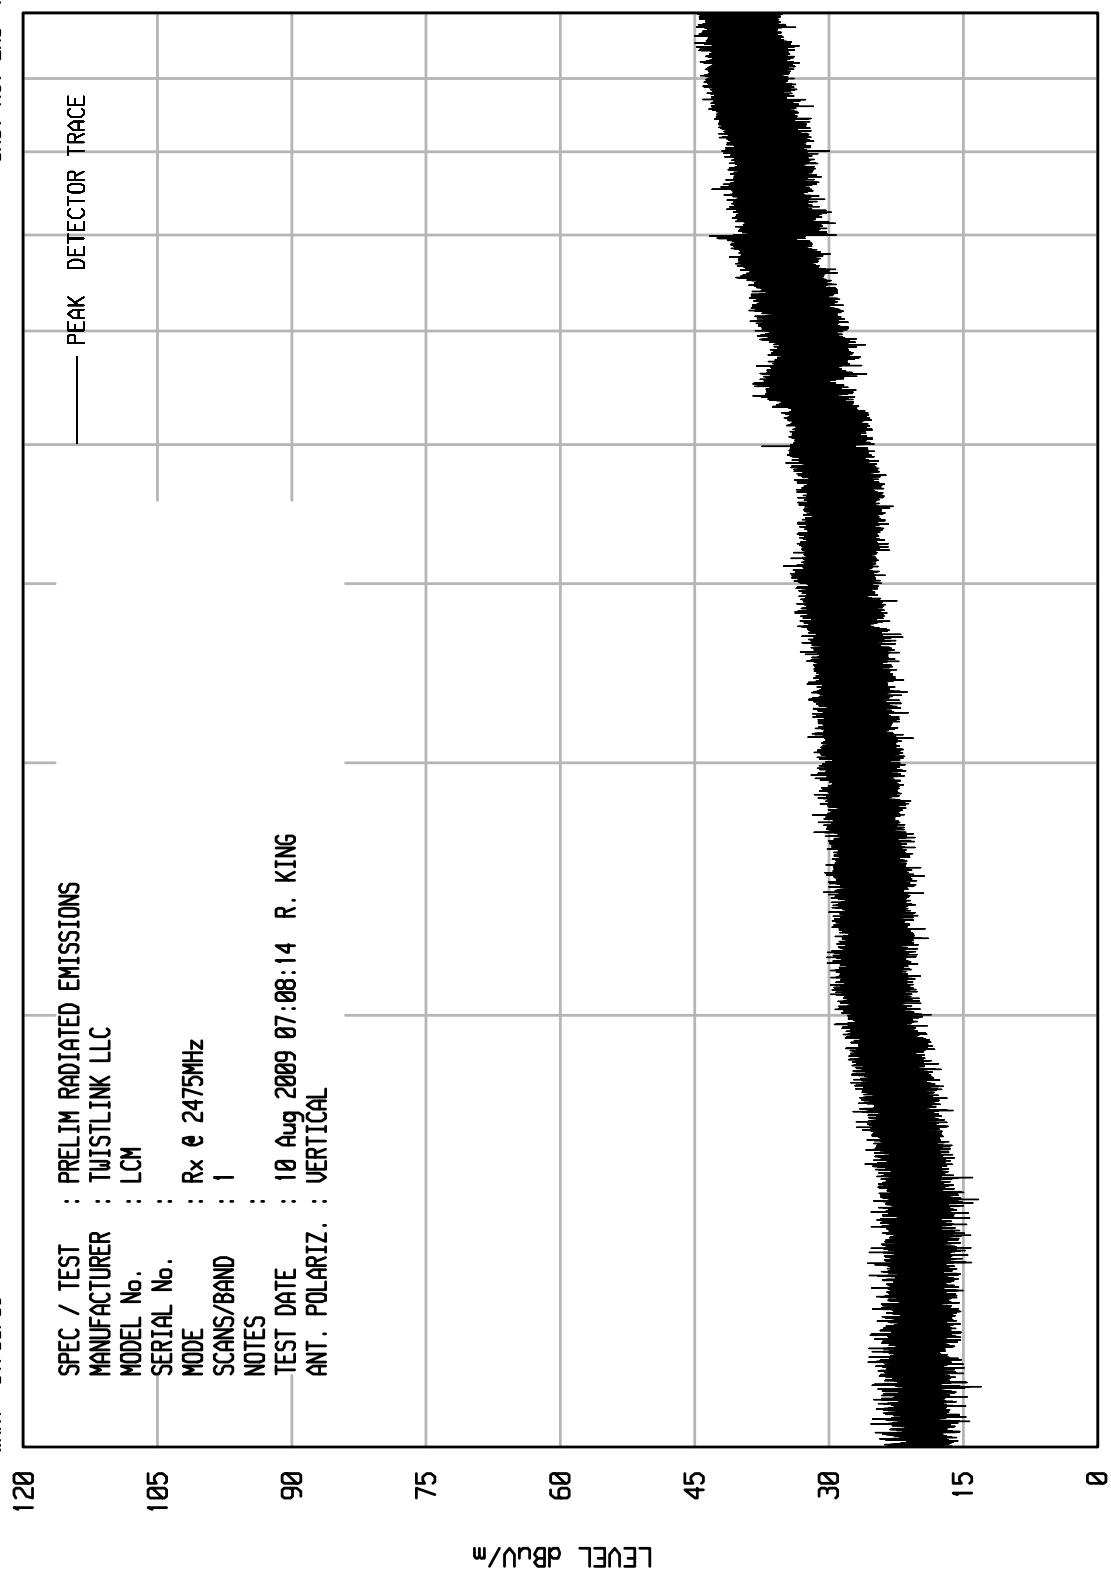

START = 1000

STOP = 10000



Manufacturer : Twistthink, LLC
Test Item : Light Control Module (LCM)
Model No. : XF0306 REV.4 Board 6
Test Specification : Industry Canada Radiated Receiver Emissions
Date : July 27 through August 10, 2009
Mode : Receive @ 2405MHz
Test Distance : 3 meters
Notes : none

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Freq (MHz)	Ant Pol	Meter Readin g (dBuV)		Ambient (dB)	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
		47.1	*								
2401.0	H	47.1	*	3.8	30.3	-40.3	40.9	111.5	500	-13.0	
2401.0	V	45.8	*	3.8	30.3	-40.3	39.6	95.3	500	-14.4	
4802.0	H	45.1	*	5.7	33.6	-40.1	44.3	164.4	500	-9.7	
4802.0	V	44.0	*	5.7	33.6	-40.1	43.2	144.5	500	-10.8	
7203.0	H	44.5	*	7.6	37.5	-39.8	49.8	310.8	500	-4.1	
7203.0	V	44.0	*	7.6	37.5	-39.8	49.3	293.4	500	-4.6	

Checked BY

RICHARD E. KING

Richard E. King



Manufacturer : Twisthink, LLC
Test Item : Light Control Module (LCM)
Model No. : XF0306 REV.4 Board 6
Test Specification : Industry Canada Radiated Receiver Emissions
Date : July 27 through August 10, 2009
Mode : Receive @ 2440MHz
Test Distance : 3 meters
Notes : none

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Meter										
Freq (MHz)	Ant Pol	Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2436.0	H	47.1	*	3.8	30.4	-40.3	41.1	113.1	500	-12.9
2436.0	V	45.8	*	3.8	30.4	-40.3	39.7	96.7	500	-14.3
4872.0	H	45.1	*	5.7	33.8	-40.1	44.5	168.3	500	-9.5
4872.0	V	44.0	*	5.7	33.8	-40.1	43.4	147.9	500	-10.6
7308.0	H	44.5	*	7.7	37.7	-39.8	50.1	321.0	500	-3.9
7308.0	V	44.0	*	7.7	37.7	-39.8	49.6	303.0	500	-4.4

Checked BY *RICHARD E. KING* :

Richard E. King



Manufacturer : Twistthink, LLC
Test Item : Light Control Module (LCM)
Model No. : XF0306 REV.4 Board 6
Test Specification : Industry Canada Radiated Receiver Emissions
Date : July 27 through August 10, 2009
Mode : Receive @ 2475MHz
Test Distance : 3 meters
Notes : none

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Freq (MHz)	Ant Pol	Meter Reading (dBuV)	Ambient	CBL Fac (dB)	Ant Fac (dB)	Pre Amp (dB)	Total dBuV/m at 3 M	Total uV/m at 3M	Limit uV/m at 3M	Margin (dB)
2471.0	H	47.1	*	3.8	30.5	-40.3	41.2	114.8	500	-12.8
2471.0	V	45.8	*	3.8	30.5	-40.3	39.8	98.1	500	-14.1
4942.0	H	45.1	*	5.8	34.0	-40.2	44.7	172.3	500	-9.3
4942.0	V	44.0	*	5.8	34.0	-40.2	43.6	151.4	500	-10.4
7413.0	H	44.5	*	7.7	38.0	-39.7	50.4	331.3	500	-3.6
7413.0	V	44.0	*	7.7	38.0	-39.7	49.9	312.8	500	-4.1

Checked BY *RICHARD E. KING* :


Richard E. King

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/30/09

UNIT RCU EMI RUN 2

SPEC / TEST	:	FCC PRELIM RADIATED EMISSIONS
MANUFACTURER	:	TWISTTHINK LLC.
MODEL No.	:	LCM
SERIAL No.	:	
MODE	:	Tx & 2405MHz
SCANS/BAND	:	1
NOTES	:	LOW POWER
TEST DATE	:	30 Jul 2009 05:22:25
ANT. POLARIZ.	:	HORIZONTAL

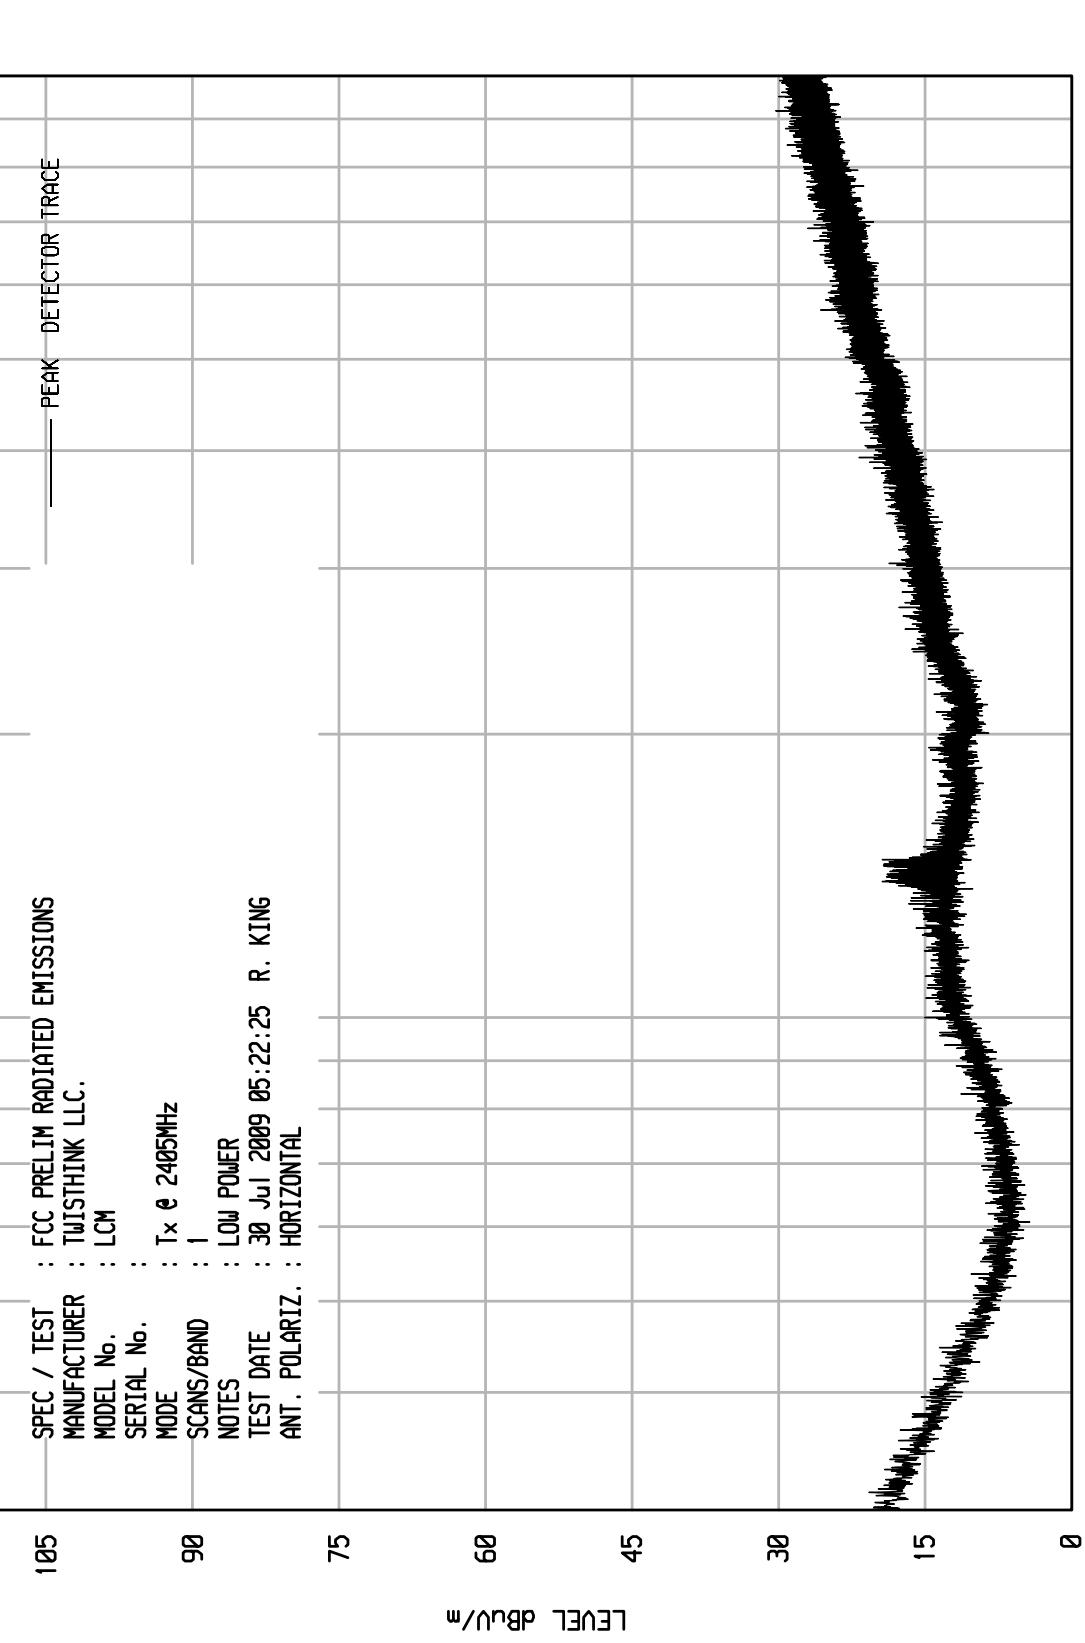


ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

WKA1 01/30/09

UNIT RCU EMI RUN 1

SPEC / TEST	:	FCC PRELIM RADIATED EMISSIONS
MANUFACTURER	:	TWISTTHINK LLC.
MODEL No.	:	LCM
SERIAL No.	:	
MODE	:	Tx & 2405MHz
SCANS/BAND	:	1
NOTES	:	LOW POWER
TEST DATE	:	30 Jul 2009 05:18:44
ANT. POLARIZ.	:	VERTICAL

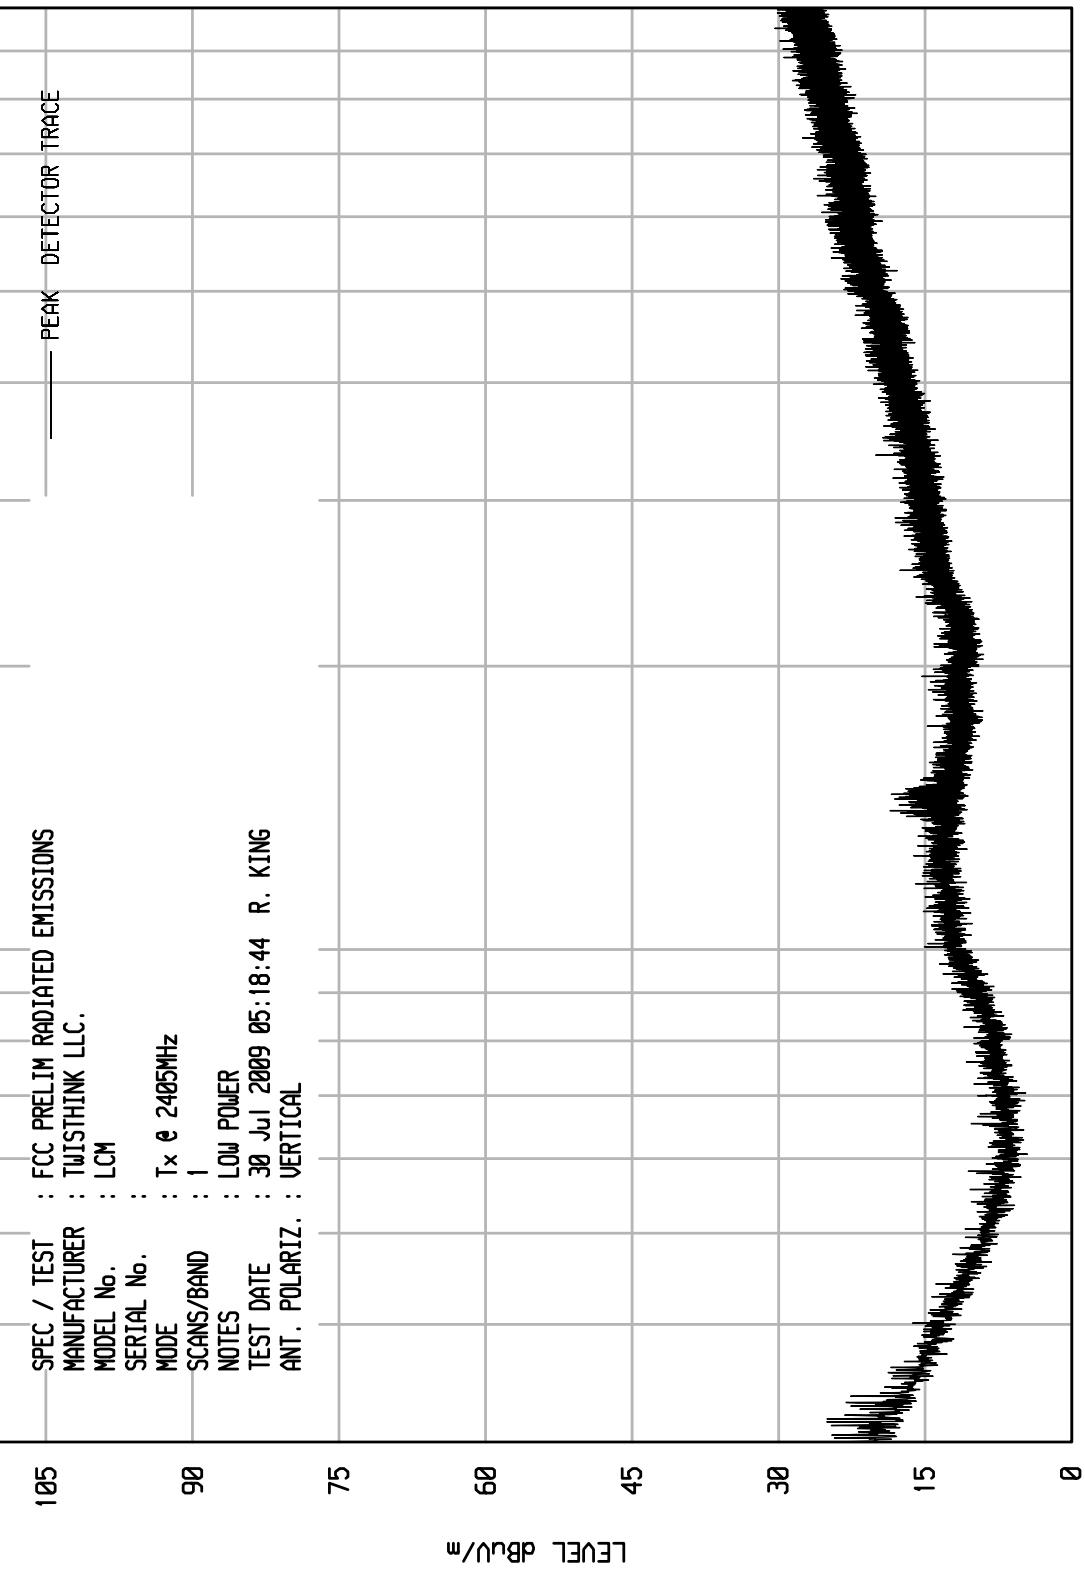

ELITE ELECTRONIC ENGINEERING Inc.
Downers Grove, Ill. 60515

UNIV RCU EMI RUN 22

