

Test report No.

Page

: 31HE0183-HO-01-A

Issued date FCC ID

: 1 of 109 : June 16, 2011

: VPY-LBUN

RADIO TEST REPORT

Test Report No.: 31HE0183-HO-01-A

Applicant

: Murata Manufacturing Co., Ltd.

Type of Equipment

Wireless LAN Module

Model No.

LBWA1ZZUN1

FCC ID

: VPY-LBUN

Test regulation

FCC Part 15 Subpart C: 2010

Test Result

Complied

- 1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
- 2. The results in this report apply only to the sample tested.
- 3. This sample tested is in compliance with the above regulation.
- 4. The test results in this report are traceable to the national or international standards.
- 5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test:

April 26 to May 20, 2011

Representative test engineer:

Takumi Shimada Engineer of WiSE Japan, UL Verification Service

Approved by:

Takahiro Hatakeda Engineer of WiSE Japan, UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. *As for the range of Accreditation in NVLAP, you may refer to the WEB address, http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone Facsimile : +81 596 24 8116

ile :+81 596 24 8124

Page : 2 of 109
Issued date : June 16, 2011
FCC ID : VPY-LBUN

CONTENTS	<u> PAGE</u>
SECTION 1: Customer information	3
SECTION 2: Equipment under test (E.U.T.)	
SECTION 3: Test specification, procedures & results	
SECTION 4: Operation of E.U.T. during testing	
SECTION 5: Conducted Emission	
SECTION 6: Radiated Spurious Emission	
SECTION 7: Antenna Terminal Conducted Tests	
APPENDIX 1: Photographs of test setup	
Conducted Emission	
Radiated Spurious Emission	
Worst Case Position (Horizontal: X-axis/ Vertical: Y-axis)	
APPENDIX 2: Data of EMI test	
Conducted Emission	
6dB Bandwidth	
Maximum Peak Output Power	
Radiated Spurious Emission	
The tested burst timing	
Conducted Spurious Emission	
Conducted Emission Band Edge compliance	
Power Density	
99% Occupied Bandwidth	
APPENDIX 3: Test instruments	

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

 Page
 : 3 of 109

 Issued date
 : June 16, 2011

 FCC ID
 : VPY-LBUN

SECTION 1: Customer information

Company Name : Murata Manufacturing Co., Ltd.

Address : 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555 Japan

Telephone Number : +81-75-955-6315 Facsimile Number : +81-75-955-7097 Contact Person : Mitsuhiro Hoshii

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Wireless LAN Module Model No. : LBWA1ZZUN1

Serial No. : Refer to Section 4, Clause 4.2

Rating : DC5.0V
Receipt Date of Sample : April 3, 2011
Country of Mass-production : China

Condition of EUT : Production prototype

(Not for Sale: This sample is equivalent to mass-produced items.)

Modification of EUT : No Modification by the test lab

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

 Page
 : 4 of 109

 Issued date
 : June 16, 2011

 FCC ID
 : VPY-LBUN

2.2 Product Description

General Specification

Clock frequency in the system : CRYSTAL: 20MHz

Specification of WLAN (IEEE802.11a/b/g)

Specification of WLAN (IEEE802)	.11a/b/g)					
Type of radio	Wireless LAN (IEEE802.11a)	Wireless LAN (IEEE802.11b/g)				
Equipment Type	Transceiver					
Frequency of Operation	5180MHz - 5320MHz	2412MHz - 2462MHz				
	5500MHz - 5700MHz					
	5745MHz - 5825MHz					
Bandwidth & Channel spacing	Bandwidth: 18MHz	Bandwidth: 20MHz				
	Ch spacing: 20MHz	Ch spacing: 5MHz				
Type of Modulation	OFDM	11b: DSSS				
		11g: OFDM				
Antenna Type	Pattern antenna(1/4 lambda monople antenna) [Antenna 0, Antenna 1]					
Antenna Gain	5150-5350MHz:	Antenna 0 : -0.6dBi				
	Antenna 0: 2.3dBi	Antenna 1: 0.8dBi				
	Antenna 1: 2.8dBi					
	5470-5725MHz:					
	Antenna 0: 3.5dBi					
	Antenna 1: 2.7dBi					
	5725-5850MHz:					
	Antenna 0: 3.7dBi					
	Antenna 1: 2.9dBi					
Power Supply	DC 5.0V					
Operating temperature range	0 to +55 deg. C.					

Specification of WLAN (IEEE802.11n)

Type of radio		Wireless LAN	(IEEE802.11n)			
	2.4G Band MISO	2.4G Band MISO	5G Band MISO	5G Band MISO		
	(20M Band)	(40M Band)	(20M Band)	(40M Band)		
Equipment Type		Trans	ceiver			
Frequency of Operation	2412MHz - 2462MHz	2422MHz - 2452MHz	5180MHz - 5320MHz	5190MHz - 5310MHz		
			5500MHz - 5700MHz	5510MHz - 5670MHz		
			5745MHz - 5825MHz	5755MHz - 5795MHz		
Bandwidth & Channel	Bandwidth: 20MHz	Bandwidth: 40MHz	Bandwidth: 18MHz	Bandwidth: 40MHz		
spacing	Ch spacing: 5MHz	Ch spacing: 5MHz	Ch spacing: 20MHz	Ch spacing: 40MHz		
Type of Modulation		OF	FDM			
Antenna Type	Pattern antenna(1/4 lambda monople antenna) [Antenna 0, Antenna 1]					
Antenna Gain	Antenna 0 : -0.6dBi		5150-5350MHz:			
	Antenna 1: 0.8dBi		Antenna 0: 2.3dBi			
			Antenna 1: 2.8dBi			
			5470-5725MHz:			
			Antenna 0: 3.5dBi			
			Antenna 1: 2.7dBi			
			5725-5850MHz:			
			Antenna 0: 3.7dBi			
			Antenna 1: 2.9dBi			
Power Supply		DC	5.0V			
Operating temperature		0 to +55	deg. C.			
range						
Notes: 5600-5650MHz is r	not used in Canada.					

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Page : 5 of 109 Issued date : June 16, 2011 FCC ID : VPY-LBUN

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C: 2010, final revised on December 6, 2010 and effective

January 5, 2011

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators

Section 15.207 Conducted limits

Section 15.247 Operation within the bands 902-928MHz,

2400-2483.5MHz, and 5725-5850MHz

3.2 Procedures and results

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted Emission	FCC: ANSI C63.4:2003 7. AC powerline Conducted Emission measurements IC: RSS-Gen 7.2.4	FCC: Section 15.207	QP 14.7dB, 0.20922MHz, L AV 9.8dB, 0.34863MHz, N	Complied	-
6dB Bandwidth		FCC: Section 15.247(a)(2) IC: RSS-210 A8.2(a)	-	Complied	Conducted
Maximum Peak Output Power	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247"	FCC: Section 15.247(b)(3) See data.		Complied	Conducted
ī	IC: RSS-Gen 4.8	IC: RSS-210 A8.4(4)			
Power Density	FCC: "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247"	FCC: Section 15.247 (e)	15.247 (e)		Conducted
	IC: -	IC: RSS-210 A8.2(b)	-		
Spurious Emission	Digital Transmission Systems Operating under Section 15 247"	FCC: Section15.247(d)	0.7B	Complied	Conducted/
Restricted Band Edges	IC: RSS-Gen 4.9	IC: RSS-210 A8.5 RSS-Gen 7.2.3		1	Radiated

^{*} In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

FCC 15.31 (e)

The RF Module has its own regulator.

The stable voltage (DC3.3V/1.2V) is constantly provided to the RF Module through the regulator regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203/212 Antenna requirement

It is impossible for end users to replace the antenna, because it is soldered on the circuit board. Therefore the equipment complies with the requirement of 15.203/212.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Page : 6 of 109 Issued date : June 16, 2011 FCC ID : VPY-LBUN

3.3 Addition to standard

Item	Item Test Procedure		Worst margin	Results	Remarks	
99% Occupied	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	N/A	-	Conducted	
Bandwidth						

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room	Conducted emission
(semi-	(<u>+</u> dB)
anechoic	150kHz-30MHz
chamber)	
No.1	3.1dB
No.2	3.3dB
No.3	3.7dB
No.4	3.2dB

Test room	Radiated emission								
(semi-		(3m*)((<u>+</u> dB)	(1m*)	$(0.5\text{m}^*)(\underline{+}\text{dB})$				
anechoic	9kHz	30MHz	300MHz	1GHz	10GHz	18GHz	26.5GHz		
chamber)	-30MHz	-300MHz	-1GHz	-10GHz	-18GHz	-26.5GHz	-40GHz		
No.1	3.5dB	5.1dB	5.2dB	4.8dB	5.1dB	4.4dB	4.3dB		
No.2	4.0dB	5.1dB	5.2dB	4.8dB	5.0dB	4.3dB	4.2dB		
No.3	4.2dB	4.7dB	5.2dB	4.8dB	5.0dB	4.5dB	4.2dB		
No.4	4.0dB	5.0dB	5.1dB	4.8dB	5.0dB	5.1dB	4.2dB		

^{*3}m/1m/0.5m = Measurement distance

Power meter (<u>+</u> dB)						
Below 1GHz	Above 1GHz					
1.0dB	1.0dB					

	rminal conducto		Antenna terminal	Channel power (+dB)		
and Power density (+dB) Below 1GHz		18GHz-26.5GHz	1 B) 26.5GHz-40GHz	(<u>+</u> aB)		
1.0dB 1.1dB 2.7dB		3.2dB	3.3dB	1.5dB		

Conducted Emission test

The data listed in this test report has enough margin, more than the site margin.

Radiated emission test(3m)

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Page : 7 of 109
Issued date : June 16, 2011
FCC ID : VPY-LBUN

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8116 Facsimile: +81 596 24 8124

	FCC	IC Registration	Width x Depth x	Size of	Other
	Registration Number	Number	Height (m)	reference ground plane (m) / horizontal conducting plane	rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

^{*} Size of vertical conducting plane (for Conducted Emission test): 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, and Test instruments

Refer to APPENDIX.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Page : 8 of 109
Issued date : June 16, 2011
FCC ID : VPY-LBUN

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Test operating mode was determined as follows according to "Section 1 of 6 802.11 a/b/g/n testing - Managing Complex Regulatory Approvals - " of TCB Council Workshop October 2009.

Mode	Remarks*
IEEE 802.11a (11a)	6Mbps, PN9, Antenna 0
IEEE 802.11b (11b)	1Mbps, PN9, Antenna 1
IEEE 802.11g (11g)	6Mbps, PN9, Antenna 1
IEEE 802.11n MISO 20MHz BW (11n-20): 2.4G Band	MCS 0, PN9, Antenna 1
IEEE 802.11n MISO 20MHz BW (11n-20): 5G Band	MCS 0, PN9, Antenna 0
IEEE 802.11n MISO 40MHz BW (11n-40): 2.4G Band	MCS 0, PN9, Antenna 1
IEEE 802.11n MISO 40MHz BW (11n-40): 5G Band	MCS 0, PN9, Antenna 0
*The worst condition was determined based on the test result	It of Maximum Peak Output Power (Mid
Channel)	
*This EUT has two antennas, but it transmits with single and	tenna and does not transmit with multi antennas.

Power of the EUT was set by the software as follows:

Software name & version: USB Driver Version 5.100

[Power Setting]

LI OWEI SCHI	ngj										
ch	1	2	3	4	5	6	7	8	9	10	11
11b	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5	11.5
11g	12	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5
11nHT20	11.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	12.5
11nHT40	-	-	8	13.5	13.5	13.5	13.5	13.5	13	-	-

^{*}The above setting of the software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Page : 9 of 109 Issued date : June 16, 2011 FCC ID : VPY-LBUN

Details of Operating mode(s) for 2.4GHz band

Test Item	Operating Mode	Tested Antenna	Tested frequency
Conducted Emission	11g Tx *1)	Antenna 1 *2)	2462MHz
Spurious Emission (Radiated,			
below 1GHz)			
Maximum Peak Output Power	11b Tx	Antenna 0	2412MHz
	11g Tx	Antenna 1	2437MHz
	11n-20 Tx		2462MHz
	11n-40 Tx		2422MHz
			2437MHz
			2452MHz
Spurious Emission (Radiated,	11b Tx	Antenna 1 *2)	2412MHz
above 1GHz)	11g Tx		2437MHz
Spurious Emission (Conducted)	11n-20 Tx		2462MHz
	11n-40 Tx		2422MHz
			2437MHz
			2452MHz
6dB Bandwidth	11b Tx	Antenna 1 *2)	2412MHz
Power Density	11g Tx		2437MHz
99% Occupied Bandwidth	11n-20 Tx		2462MHz
	11n-40 Tx	Antenna 1 *2)	2422MHz
		·	2437MHz
			2452MHz

^{*1)} The mode was tested as a representative, because it had the highest power at antenna terminal test and the noise levels at the mode/tested frequencies were equivalent to those of other modes/tested frequencies.

Details of Operating mode(s) for 5GHz band

Test Item	Operating Mode	Tested Antenna	Tested frequency
Conducted Emission	11a Tx *1)	Antenna 0 *2)	5785MHz
Spurious Emission (Radiated,			
below 1GHz)			
Maximum Peak Output Power	11a Tx	Antenna 0	5745MHz
	11n-20 Tx	Antenna 1	5785MHz
			5825MHz
	11n-40 Tx		5755MHz
			5795MHz
Spurious Emission (Radiated,	11a Tx	Antenna 0 *2)	5745MHz
above 1GHz)	11n-20 Tx		5785MHz
			5825MHz
	11n-40 Tx		5755MHz
			5795MHz
6dB Bandwidth	11a Tx	Antenna 0 *2)	5745MHz
Power Density	11n-20 Tx		5785MHz
99% Occupied Bandwidth			5825MHz
	11n-40 Tx		5755MHz
			5795MHz

^{*1)} The mode was tested as a representative, because it had the highest power at antenna terminal test and the noise level at the mode/channel was equivalent to that of other mode/tested frequency.

UL Japan, Inc.

Head Office EMC Lab.


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

^{*2)} Antenna 1 was used for the test as a representative, because it had the highest power at antenna terminal test.

^{*2)} Antenna 0 was used for the test as a representative, because it had the highest power at antenna terminal test.

Page : 10 of 109 Issued date : June 16, 2011 FCC ID : VPY-LBUN

4.2 Configuration and peripherals

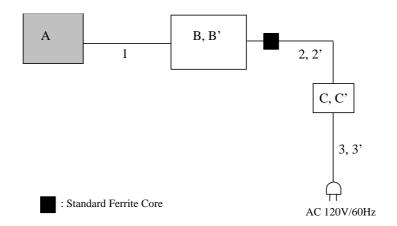

- * Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.
- * It was confirmed there was no difference in emission levels due to a ferrite core attached on cable 2 and 2'

Description of EUT

Desci.	<u>ւթստո ու բ</u>	_		_	
No.	Item	Model number	Serial number	Manufacturer	Remarks
Α	Wireless LAN Module	LBWA1ZZUN1	13 *1)	MURATA	EUT
Α			15 *2)	MUKATA	EUI
В	Laptop PC	2373-T49	L3-16W54	IBM	_
В'		7661-CB9	L3-R2056	Lenovo	*3)
С	AC Adaptor	08K8208	11S08K8208Z1Z9MA5686XR	IBM	-
C'		92P1160	11S92P1160Z1ZBGH7B99A8	Lenovo	*3)

^{*1)} Used for Antenna Terminal conducted test

List of cables used

List U	cabics useu				
No.	Name	Length (m)	Sh	Remarks	
			Cable	Connector	
1	USB Cable	0.2	Unshielded	Unshielded	-
2	DC Cable	1.8	Shielded	Shielded	-
2'		1.8	Shielded	Shielded	*1)
3	AC Cable	1.0	Unshielded	Unshielded	-
3'		0.9	Unshielded	Unshielded	*1)

^{*1)} Used for Radiated Emission test (below 1GHz) only

UL Japan, Inc.

Head Office EMC Lab.

 $4383\text{-}326 \; Asama\text{-}cho, \, Ise\text{-}shi, \, Mie\text{-}ken \; 516\text{-}0021 \; JAPAN$

^{*2)} Used for Conducted Emission and Radiated Emission tests

^{*3)} Used for Radiated Emission test (below 1GHz) only

Page : 11 of 109

Issued date : June 16, 2011

FCC ID : VPY-LBUN

SECTION 5: Conducted Emission

Test Procedure and conditions

EUT was placed on a urethane platform of nominal size, 1.0m by 0.5m, raised 0.8m above the conducting ground plane. The rear of tabletop was located 40cm to the vertical conducting plane. The rear of EUT, including peripherals aligned and flushed with rear of tabletop. All other surfaces of tabletop were at least 80cm from any other grounded conducting surface. EUT was located 80cm from a Line Impedance Stabilization Network (LISN)/ Artificial mains Network (AMN) and excess AC cable was bundled in center.

For the tests on EUT with other peripherals (as a whole system)

I/O cables that were connected to the peripherals were bundled in center. They were folded back and forth forming a bundle 30cm to 40cm long and were hanged at a 40cm height to the ground plane. All unused 50ohm connectors of the LISN(AMN) were resistivity terminated in 50ohm when not connected to the measuring equipment.

The AC Mains Terminal Continuous disturbance Voltage has been measured with the EUT in a Semi Anechoic Chamber. The EUT was connected to a LISN (AMN).

An overview sweep with peak detection has been performed.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Detector : QP and AV
Measurement range : 0.15-30MHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Test report No. : 31HE0183-HO-01-A Page : 12 of 109

Page : 12 of 109 Issued date : June 16, 2011 FCC ID : VPY-LBUN

SECTION 6: Radiated Spurious Emission

Test Procedure

It was measured based on "2. Radiated emission test" of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247".

EUT was placed on a urethane platform of nominal size, 0.5m by 1.0m, raised 0.8m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	Below 30MHz	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

In any 100kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 / Table 2 of RSS-210 2.7 (IC) and outside the restricted band of FCC 15.205 / Table 1 of RSS-210 2.7 (IC).

Frequency	Below 1GHz	Above 1GHz	20dBc			
Instrument used	Test Receiver	Spectrum Analyzer	Spectrum Analyzer			
Detector	QP	PK	PK			
IF Bandwidth	BW 120kHz(T/R)	RBW: 1MHz VBW: 3MHz	RBW: 1MHz VBW: 10Hz *1)	RBW: 100kHz VBW: 300kHz (S/A)		
Test Distance	3m	3m (below 10GHz), 1m*2) (above 10GHz) 0.5m *3) (above 26.5GHz)		1m*2) (above 10GHz)		3m (below 10GHz), 1m*2) (above 10GHz) 0.5m *3) (above 26.5GHz)

^{*1)} The test was performed with VBW 10Hz since the EUT had no intervals during which the transmitter was off for the burst rate (see Appendix).

*2) Distance Factor: 20 x log (3.0m/1.0m) = 9.5dB *3) Distance Factor: 20 x log (3.0m/0.5m) = 15.6dB

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30M-40GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

⁻ The carrier level and noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

Page : 13 of 109 Issued date : June 16, 2011 FCC ID : VPY-LBUN

SECTION 7: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
6dB Bandwidth	20MHz / 40MHz	100kHz	300kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied	Enough width to display	1 to 3%	Three times	Auto	Peak	Max Hold *1)	Spectrum Analyzer
Bandwidth	20dB Bandwidth	of Span	of RBW				
Maximum Peak	-	-	-	Auto	Peak	-	Power Meter
Output Power							(Sensor: 50MHz BW)
Peak Power Density	18MHz	30kHz	100kHz	600sec	Peak	Max Hold	Spectrum Analyzer
	20MHz			667sec			*2) *3)
	40MHz			1334sec			
Conducted Spurious	9kHz to 150kHz	200Hz	620Hz	Auto	Peak	Max Hold	Spectrum Analyzer
Emission *4)	150kHz to 30MHz	9.1kHz	27kHz				
	30MHz to 25GHz	100kHz	300kHz				
	(Less or equal to 5GHz)						

^{*1)} The measurement was performed with Max Hold since the duty cycle was not 100%.

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : APPENDIX

Test result : Pass

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

^{*2)} PSD Option 1 of "Guidance on Measurement of Digital Transmission Systems Operating under Section15.247 ".

^{*3)} The test was not performed at RBW:3kHz however the measurement is to be performed with RBW:3kHz in the regulation, because, the measurement value with RBW:3kHz is less than the value of RBW:30kHz and the test data met the limit with RBW:30kHz.

^{*4)} In the frequency range below 30MHz, RBW was narrowed to separate the noise contents. Then, wide-band noise near the limit was checked separately, however the noise was not detected as shown in the chart.(9kHz-150kHz:RBW=200Hz, 150kHz-30MHz:RBW=9.1kHz)