



Excellence in Compliance Testing

Certification Test Report

**FCC ID: VPYLB1CK982
IC: 772C-LB1CK982**

**FCC Rule Part: 15.407
ISED Canada Radio Standards Specification: RSS-247**

ACS Report Number: 16-0186.W06.4B

**Manufacturer: Murata Manufacturing Co., Ltd.
Model: LBEE5ZZ1CK-982**

**Test Begin Date: May 7, 2016
Test End Date: August 3, 2016**

Report Issue Date: November 8, 2016



FOR THE SCOPE OF ACCREDITATION UNDER Certificate Number: AT-2021

This report must not be used by the client to claim product certification, approval, or endorsement by ANAB, NIST, or any agency of the Federal Government.

Prepared by:

**Ryan McGann
Wireless Program Manager
Advanced Compliance Solutions, Inc.**

Reviewed by:

**Thierry Jean-Charles
EMC Engineer
Advanced Compliance Solutions, Inc.**

This test report shall not be reproduced except in full. This report may be reproduced in part with prior written consent of ACS, Inc. The results contained in this report are representative of the sample(s) submitted for evaluation.

This report contains 21 pages

TABLE OF CONTENTS

1	GENERAL	3
1.1	PURPOSE.....	3
1.2	APPLICANT INFORMATION.....	3
1.3	PRODUCT DESCRIPTION.....	3
1.4	TEST METHODOLOGY AND CONSIDERATIONS	4
2	TEST FACILITIES.....	6
2.1	LOCATION	6
2.2	LABORATORY ACCREDITATIONS/RECOGNITIONS/CERTIFICATIONS	6
2.3	RADIATED EMISSIONS TEST SITE DESCRIPTION	7
2.3.1	<i>Semi-Anechoic Chamber Test Site.....</i>	7
2.3.2	<i>Open Area Tests Site (OATS)</i>	8
2.4	CONDUCTED EMISSIONS TEST SITE DESCRIPTION	9
3	APPLICABLE STANDARD REFERENCES.....	10
4	LIST OF TEST EQUIPMENT.....	11
5	SUPPORT EQUIPMENT	12
6	EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM	12
7	SUMMARY OF TESTS.....	13
7.1	ANTENNA REQUIREMENT – FCC 15.203	13
7.2	POWER LINE CONDUCTED EMISSIONS – FCC 15.207, ISED CANADA: RSS-GEN 8.8.....	13
7.2.1	<i>Measurement Procedure.....</i>	13
7.2.2	<i>Measurement Results</i>	13
7.3	RADIATED SPURIOUS EMISSIONS – 15.407(B); ISED CANADA: RSS-GEN 8.9/8.10	15
7.3.1	<i>Measurement Procedure.....</i>	15
7.3.2	<i>Measurement Results</i>	15
7.3.3	<i>Sample Calculation:</i>	21
8	CONCLUSION	22

1 GENERAL

1.1 Purpose

The purpose of this report is to demonstrate compliance with Part 15 Subpart E of the FCC's Code of Federal Regulations and Innovation, Science and Economic Development Canada's Radio Standards Specification RSS-247 for the tests documented herein.

1.2 Applicant Information

Murata Manufacturing Co., Ltd.
2200 Lake Park Drive
Smyrna, GA. 30080

1.3 Product Description

The Murata Manufacturing Co., Ltd. model LBEE5ZZ1CK-982 is an IEEE 802.11a/b/g/n/ac WLAN + Bluetooth 4.0 wireless transceiver module. The test report documents the compliance of the 5GHz WLAN mode of operation.

Technical Details

Mode of Operation: WLAN IEEE 802.11a/n/ac
Modulations: OFDM
Antenna Type/Gain: PCB Trace Antenna, 0.7 dBi
Input Power: 3.6 VDC

Band of Operation* (MHz)	Mode of Operation (802.11)	Ch. Range (MHz)	Number of Available Channels	Channel Spacing	Data Rate or MCS Index
5150 - 5250	a	5180 - 5240	4	20	6 Mbps – 54 Mbps
5250 - 5350		5260 - 5320	4		
5470 - 5725		5500 - 5720	12		
5725 - 5850		5745 - 5825	5		
5150 - 5250	n (HT20)	5180 - 5240	4	20	6.5 Mbps – 65 Mbps
5250 - 5350		5260 - 5320	4		
5470 - 5725		5500 - 5720	12		
5725 - 5850		5745 - 5825	5		
5150 - 5250	n (HT40) ac (VHT40)	5190 - 5230	2	40	13.5 Mbps – 135 Mbps (n HT40) 13.5 Mbps – 180 Mbps (ac VHT40)
5250 - 5350		5270 - 5310	2		
5470 - 5725		5510 - 5710	6		
5725 - 5850		5755 - 5795	2		
5150 - 5250	ac (VHT80)	5210	1	80	29.3 Mbps – 390 Mbps
5250 - 5350		5290	1		
5470 - 5725		5530 - 5690	3		
5725 - 5850		5775	1		

* Operation in the 5600 – 5660 MHz band is not applicable to Innovation Science Economic Development Canada.

Model Number: LBEE5ZZ1CK-982

Test Sample Serial Number(s): 433900071FAC

Test Sample Condition: The equipment was provided in good condition without any physical damage.

1.4 Test Methodology and Considerations

The EUT was evaluated for radiated and power line conducted emissions for the 5 GHz WLAN mode of operation. Compliance to the RF Conducted emissions requirements are documented in a separate test report.

For radiated emissions, the EUT was evaluated in three orthogonal orientations. The worst case orientation was the X-orientation. See test setup photos for more information.

For power line conducted emissions, the EUT was evaluated with a commercially available wall wart power supply.

Table 1.4-1 indicates the worst case mode of operation, channels, power settings, and data rates below.

Table 1.4-1: IEEE 802.11a/n/ac Test Configuration

Band of Operation	Mode of Operation	Frequency (MHz)	Channel	Power Setting	Data Rate (Modulation Index)
U-NII-1 (5.15 - 5.25 GHz)	802.11a	5180	36	12 dBm	6 Mbps
		5200	40		
		5240	48		
	802.11n 20 MHz	5180	36	12 dBm	MCS 0
		5200	40		
		5240	48		
	802.11n 40 MHz	5190	38	11.5 dBm	MCS 0
		5230	46		
	802.11ac 80 MHz	5210	42	11 dBm	MCS 0
U-NII-2A (5.25 - 5.35 GHz)	802.11a	5260	52	12 dBm	6 Mbps
		5280	56		
		5320	64		
	802.11n 20 MHz	5260	52	12 dBm	MCS 0
		5280	56		
		5320	64		
	802.11n 40 MHz	5270	54	11.5 dBm	MCS 0
		5310	62		
	802.11ac 80 MHz	5290	58	11 dBm	MCS 0
U-NII-2C (5.47 - 5.725 GHz)	802.11a	5500	100	12 dBm	6 Mbps
		5600	120		
		5720	144		
	802.11n 20 MHz	5500	100	12 dBm	MCS 0
		5600	120		
		5720	144		
	802.11n 40 MHz	5510	102	11.5 dBm	MCS 0
		5590	118		
		5710	142		
	802.11ac 80 MHz	5530	106	11 dBm	6 Mbps
		5610	122		
		5690	138		
U-NII-3 (5.725 - 5.85 GHz)	802.11a	5745	149	12 dBm	6 Mbps
		5785	157		
		5825	165		
	802.11n 20 MHz	5745	149	12 dBm	MCS 0
		5785	157		
		5825	165		
	802.11n 40 MHz	5755	151	11.5 dBm	MCS 0
		5795	159		
	802.11ac 80 MHz	5775	155	11 dBm	MCS 0

* Operation in the 5600 – 5660 MHz band is not applicable to Innovation Science Economic Development Canada.

2 TEST FACILITIES

2.1 Location

The radiated and conducted emissions test sites are located at the following address:

Advanced Compliance Solutions
5015 B.U. Bowman Drive
Buford, GA 30518
Phone: (770) 831-8048
Fax: (770) 831-8598

2.2 Laboratory Accreditations/Recognitions/Certifications

ACS is accredited to ISO/IEC 17025 by the ANSI-ASQ National Accreditation Board/ANAB accreditation program, and has been issued certificate number AT-2021 in recognition of this accreditation. Unless otherwise specified, all tests methods described within this report are covered under the ISO/IEC 17025 scope of accreditation.

The Semi-Anechoic Chamber Test Site, Open Area Test Site (OATS) and Conducted Emissions Site have been fully described, submitted to, and accepted by the FCC, ISED Canada and the Japanese Voluntary Control Council for Interference by information technology equipment.

FCC Registration Number: 391271

ISED Canada Lab Code: IC 4175A

VCCI Member Number: 1831

- VCCI OATS Registration Number R-1526
- VCCI Conducted Emissions Site Registration Number: C-1608

2.3 Radiated Emissions Test Site Description

2.3.1 Semi-Anechoic Chamber Test Site

The Semi-Anechoic Chamber Test Site consists of a 20' x 30' x 18' shielded enclosure. The chamber is lined with Toyo Ferrite Grid Absorber, model number FFG-1000. The ferrite tile grid is 101 x 101 x 19mm thick and weighs approximately 550 grams. These tiles are mounted on steel panels and installed directly on the inner walls of the chamber.

The turntable is 150cm in diameter and is located 160cm from the back wall of the chamber. The chamber is grounded via 1 - 8' copper ground rod, installed at the center of the back wall, it is bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is all steel, flush mounted table installed in an all steel frame. The table is remotely operated from inside the control room located 25' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Behind the turntable is a 3' x 6' x 4' deep shielded pit used for support equipment if necessary. The pit is equipped with 1 - 4" PVC chases from the turntable to the pit that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit.

A diagram of the Semi-Anechoic Chamber Test Site is shown in Figure 2.3-1 below:

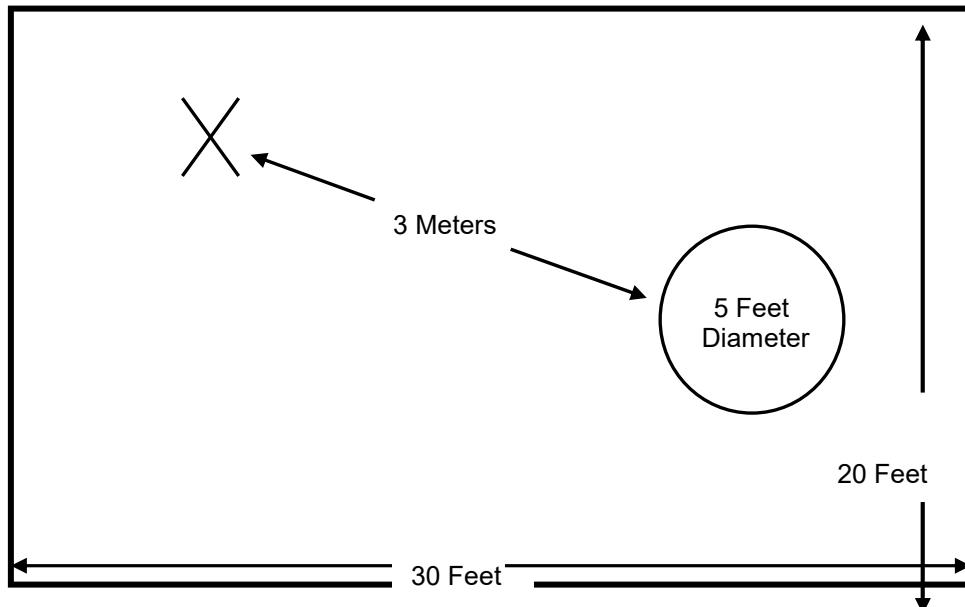


Figure 2.3-1: Semi-Anechoic Chamber Test Site

2.3.2 Open Area Tests Site (OATS)

The open area test site consists of a 40' x 66' concrete pad covered with a perforated electro-plated galvanized sheet metal. The perforations in the sheet metal are 1/8" holes that are staggered every 3/16". The individual sheets are placed to overlap each other by 1/4" and are riveted together to provide a continuous seam. Rivets are spaced every 3" in a 3 x 20 meter perimeter around the antenna mast and EUT area. Rivets in the remaining area are spaced as necessary to properly secure the ground plane and maintain the electrical continuity.

The entire ground plane extends 12' beyond the turntable edge and 16' beyond the antenna mast when set to a 10 meter measurement distance. The ground plane is grounded via 4 - 8' copper ground rods, each installed at a corner of the ground plane and bound to the ground plane using 3/4" stainless steel braided cable.

The turntable is an all aluminum 10' flush mounted table installed in an all aluminum frame. The table is remotely operated from inside the control room located 40' from the range. The turntable is electrically bonded to the surrounding ground plane via steel fingers installed on the edge of the turn table. The steel fingers make constant contact with the ground plane during operation.

Adjacent to the turntable is a 7' x 7' square and 4' deep concrete pit used for support equipment if necessary. The pit is equipped with 5 - 4" PVC chases from the pit to the control room that allow for cabling to the EUT if necessary. The underside of the turntable can be accessed from the pit so cables can be supplied to the EUT from the pit. The pit is covered with 2 sheets of 1/4" diamond style re-enforced steel sheets. The sheets are painted to match the perforated steel ground plane; however the underside edges have been masked off to maintain the electrical continuity of the ground plane. All reflecting objects are located outside of the ellipse defined in ANSI C63.4.

A diagram of the Open Area Test Site is shown in Figure 2.3-2 below:

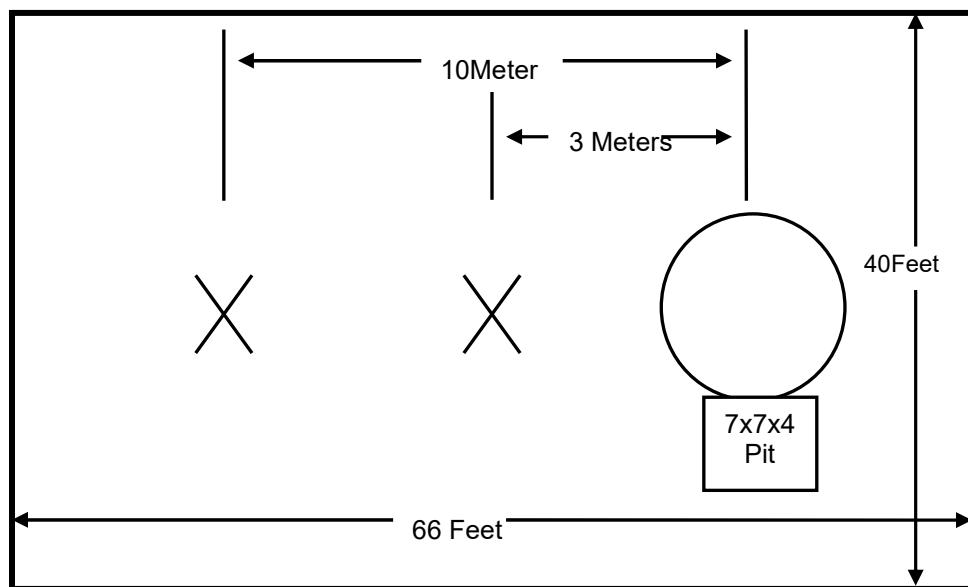


Figure 2.3-2: Open Area Test Site

2.4 Conducted Emissions Test Site Description

The AC mains conducted EMI site is located in the main EMC lab. It consists of an 8' x 8' solid aluminum horizontal ground reference plane (GRP) bonded every 3" to an 8' X 8' vertical ground plane.

The site is of sufficient size to test table top and floor standing equipment in accordance with section 6.1.4 of ANSI C63.4.

A diagram of the room is shown below in figure 4.1.3-1:

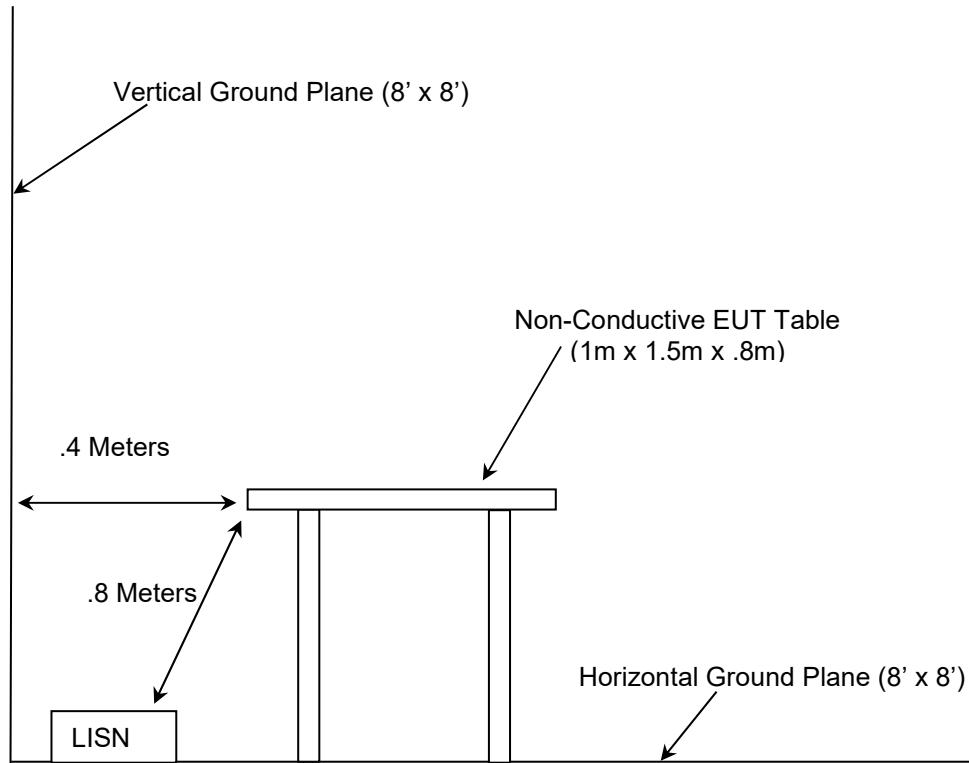


Figure 2.4-1: AC Mains Conducted EMI Site

3 APPLICABLE STANDARD REFERENCES

The following standards were used:

- ❖ ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 2, Subpart J: Equipment Authorization Procedures, 2016
- ❖ US Code of Federal Regulations (CFR): Title 47, Part 15, Subpart E: Unlicensed National Information Infrastructure Devices, 2016
- ❖ FCC OET KDB Publication No. 905462 D06 802.11 Channel Plans New Rules v02: Operation in U-NII Bands – 802.11 Channel Plan, 15.407 (Part15E), 1st R&O (FCC 06-96) August 2016
- ❖ FCC OET KDB Publication No. 789033 D02 General U-NII Test Procedures New Rules v01r02: Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E, April 2016
- ❖ FCC OET KDB Publication No. 644545 D03 Guidance for IEEE 802.11ac v01: Guidance for IEEE Standard 802.11acTM Devices Emissions Testing, August 2014
- ❖ ISED Canada Radio Standards Specification: RSS-247 – Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices, Issue 1, May 2015
- ❖ ISED Canada Radio Standards Specification: RSS-GEN – General Requirements for Compliance of Radio Apparatus, Issue 4, Nov 2014.

4 LIST OF TEST EQUIPMENT

The calibration interval of test equipment is annually or the manufacturer's recommendations. Where the calibration interval deviates from the annual cycle based on the instrument manufacturer's recommendations, it shall be stated below.

Table 4-1: Test Equipment

AssetID	Manufacturer	Model #	Equipment Type	Serial #	Last Calibration Date	Calibration Due Date
1	Rohde & Schwarz	ESMI - Display	Spectrum Analyzers	833771/007	7/14/2015	7/14/2016
2	Rohde & Schwarz	ESMI - Receiver	Spectrum Analyzers	839587/003	7/14/2015	7/14/2016
30	Spectrum Technologies	DRH-0118	Antennas	970102	4/30/2015	4/30/2017
40	EMCO	3104	Antennas	3211	2/10/2015	2/10/2017
73	Agilent	8447D	Amplifiers	2727A05624	7/15/2015	7/15/2016
167	ACS	Chamber EMI				
324	ACS	Belden	Cable Set	167	10/20/2015	10/20/2016
332	Rohde & Schwarz	TS-PR40	Amplifiers	100021	3/14/2016	3/14/2018
333	Rohde & Schwarz	3160-10	Antennas	45576	11/4/2010	NCR
334	Rohde & Schwarz	3160-09	Antennas	49404	11/4/2010	NCR
335	Suhner Sucoflex	SF-102A	Cables	882/2A	7/14/2015	7/14/2016
335	Suhner Sucoflex	SF-102A	Cables	882/2A	7/12/2016	7/12/2017
338	Hewlett Packard	8449B	Amplifiers	3008A01111	8/21/2015	8/21/2017
345	Suhner Sucoflex	102A	Cables	1077/2A	7/14/2015	7/14/2016
345	Suhner Sucoflex	102A	Cables	1077/2A	7/12/2016	7/12/2017
412	Electro Metrics	LPA-25	Antennas	1241	7/24/2014	7/24/2016
422	Florida RF	SMS-200AW-72.0-SMR	Cables	805	10/30/2015	10/30/2016
432	Microwave Circuits	H3G020G4	Filters	264066	5/20/2015	5/20/2016
432	Microwave Circuits	H3G020G4	Filters	264066	5/13/2016	5/13/2017
616	Florida RF Cables	SMRE-200W-12.0-SMRE	Cables	N/A	9/3/2015	9/3/2016
676	Florida RF Labs	SMS-290AW-480.0-SMS	Cables	MFR2Y194	9/3/2015	9/3/2016
3010	Rohde & Schwarz	ENV216	LISN	3010	7/10/2015	7/10/2016
3010	Rohde & Schwarz	ENV216	LISN	3010	7/11/2016	7/11/2017
3023	Micro-Tronics	BRG50705	Filter	51	12/22/2015	12/22/2016
3024	Micro-Tronics	BRG50703	Filter	62	12/22/2015	12/22/2016
3025	Micro-Tronics	BRG50704	Filter	53	12/22/2015	12/22/2016
RE112	Rohde & Schwarz	ESIB26	Receiver	836119/012	7/16/2015	7/16/2016
RE112	Rohde & Schwarz	ESIB26	Receiver	836119/012	7/13/2016	7/13/2017

NCR = No Calibration Required

NOTE: All test equipment was used only during active calibration cycles as reported above.

5 SUPPORT EQUIPMENT

Table 5-1: Support Equipment

Item	Equipment Type	Manufacturer	Model Number	Serial Number
1	Evaluation Board	Murata	Type 1CK EVB	N/A
2	Bench Power Supply	Hewlett Packard	E3630A	KR64308603
3	Wall Wart Power Supply	ChungKwang Tech, Inc.	EDF0500150A1BA	N/A
4	Evaluation Board	NXP	MCIMX6UL-BB	TR15360422
5	Wall Wart Power Supply	Sceptre Power	XA012AM0500240	N/A

Table 5-2: Cable Description

Item	Cable Type	Length	Shield	Termination
A	DC Power Cable	200 cm	No	1 – 2
B	DC Power Cable	250 cm	No	1 – 3
C	DC Power Cable	200 cm	No	4 – 5

6 EQUIPMENT UNDER TEST SETUP BLOCK DIAGRAM

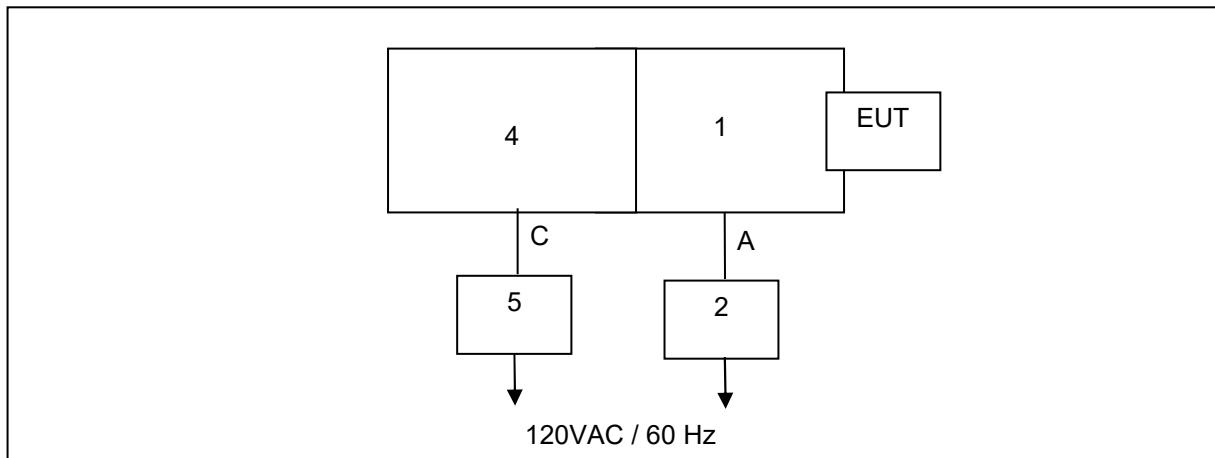


Figure 6-1: Test Setup Block Diagram – Radiated Emissions

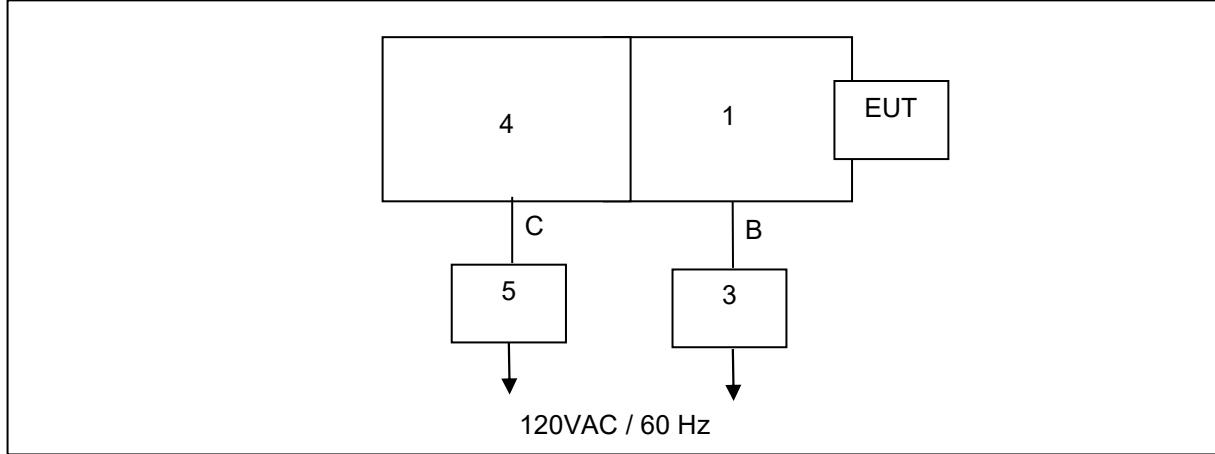


Figure 6-2: Test Setup Block Diagram – Power Line Conducted Emissions

7 SUMMARY OF TESTS

Along with the tabular data shown below, plots were taken of all signals deemed important enough to document.

7.1 Antenna Requirement – FCC 15.203

The EUT utilizes a PCB trace antenna. The antenna is integral to the device and cannot be removed or replaced by the end user. The gain of the antenna is 0.7dBi.

7.2 Power Line Conducted Emissions – FCC 15.207, ISED Canada: RSS-Gen 8.8

7.2.1 Measurement Procedure

ANSI C63.10 section 6 was the guiding documents for this evaluation. Conducted emissions were performed from 150kHz to 30MHz with the spectrum analyzer's resolution bandwidth set to 9kHz and the video bandwidth set to 30kHz. The calculation for the conducted emissions is as follows:

Corrected Reading = Analyzer Reading + LISN Loss + Cable Loss

Margin = Applicable Limit - Corrected Reading

7.2.2 Measurement Results

Table 7.2.2-1: Conducted EMI Results Line 1

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.355511	---	32.25	48.64	16.39	L1	9.7
0.355511	39.27	---	58.67	19.40	L1	9.7
0.371142	---	33.51	48.30	14.79	L1	9.7
0.371142	40.24	---	58.32	18.08	L1	9.7
0.467535	---	21.45	46.51	25.06	L1	9.7
0.467535	30.15	---	56.52	26.37	L1	9.7
0.516934	---	25.74	46.00	20.26	L1	9.7
0.516934	33.22	---	56.00	22.78	L1	9.7
0.699799	---	19.89	46.00	26.11	L1	9.7
0.699799	28.25	---	56.00	27.75	L1	9.7
2.053817	---	18.19	46.00	27.81	L1	9.8
2.053817	25.76	---	56.00	30.24	L1	9.8

Table 7.2.2-2: Conducted EMI Results Line 2

Frequency (MHz)	Corrected Reading		Limit (dBuV)	Margin (dB)	Line	Correction (dB)
	Quasi-Peak (dBuV)	Average (dBuV)				
0.159278	---	23.64	55.45	31.81	N	9.7
0.159278	38.12	---	65.46	27.34	N	9.7
0.354609	---	29.97	48.66	18.69	N	9.7
0.354609	37.15	---	58.69	21.54	N	9.7
0.382165	---	28.22	48.06	19.84	N	9.7
0.382165	36.29	---	58.09	21.80	N	9.7
0.443887	---	20.62	46.90	26.28	N	9.7
0.443887	29.01	---	56.92	27.91	N	9.7
0.749699	---	17.00	46.00	29.00	N	9.7
0.749699	26.30	---	56.00	29.70	N	9.7
0.766834	---	17.51	46.00	28.49	N	9.7
0.766834	26.21	---	56.00	29.79	N	9.7

7.3 Radiated Spurious Emissions – 15.407(b); ISED Canada: RSS-GEN 8.9/8.10, RSS-247 6.2

7.3.1 Measurement Procedure

The unwanted emissions were measured radiated over the frequency range of 30MHz to 40GHz.

The EUT was rotated through 360° and the receive antenna height was varied from 1m to 4m so that the maximum radiated emissions level would be detected. For frequencies below 1000MHz, quasi-peak measurements were made using a RBW of 120 kHz and a VBW of 300 kHz. For frequencies above 1000MHz, peak and average measurements were made with RBW and VBW of 1 MHz and 3 MHz respectively.

Each emission found to be in a restricted band as defined by section 15.205, including any emission at the operational band-edge, was compared to the radiated emission limits as defined in section 15.209. The other emissions were evaluated either per the general radiated emission limits of FCC Section 15.209 or the limits of FCC Section 15.407(b) / IC RSS-247 6.2. The EIRP limits of FCC Section 15.407(b) / IC RSS-247 6.2 were converted to field strength limits using a correction factor of 95.2 dB. Further, band-edge compliance for transmitters operating in the 5.725-5.85 GHz band is shown in plots provided using the mask specified in FCC Section 15.407(b)(i).

7.3.2 Measurement Results

Band 5.15 GHz – 5.25 GHz

Table 7.3.2-1: Radiated Spurious Emissions Tabulated Data – 802.11a

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
10360	49.95	37.24	V	10.76	60.71	48.00	83.5	63.5	22.8	15.5
Middle Channel										
10400	48.50	35.67	V	10.88	59.38	46.55	83.5	63.5	24.1	17.0
High Channel										
10480	45.76	34.52	V	11.14	56.90	45.66	83.5	63.5	26.6	17.9

Table 7.3.2-2: Radiated Spurious Emissions Tabulated Data – 802.11n 20MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
1385.9	52.74	46.81	H	-10.94	41.80	35.87	74.0	54.0	32.2	18.1
1385.9	51.15	44.20	V	-10.94	40.21	33.26	74.0	54.0	33.8	20.7
5150	45.01	32.97	H	2.94	47.95	35.91	74.0	54.0	26.1	18.1
5150	49.77	36.76	V	2.94	52.71	39.70	74.0	54.0	21.3	14.3
10360	53.56	41.96	H	10.76	64.32	52.72	83.5	63.5	19.2	10.8
10360	49.81	38.41	V	10.76	60.57	49.17	83.5	63.5	22.9	14.4
Middle Channel										
1385.9	53.24	47.78	H	-10.94	42.30	36.84	74.0	54.0	31.7	17.2
1385.9	52.13	45.62	V	-10.94	41.19	34.68	74.0	54.0	32.8	19.3
10400	52.91	41.12	H	10.88	63.79	52.00	83.5	63.5	19.7	11.5
10400	47.23	35.56	V	10.88	58.11	46.44	83.5	63.5	25.4	17.1
High Channel										
1385.9	53.01	47.35	H	-10.94	42.07	36.41	74.0	54.0	31.9	17.6
1385.9	52.45	46.76	V	-10.94	41.51	35.82	74.0	54.0	32.5	18.2
10480	53.28	41.68	H	11.14	64.42	52.82	83.5	63.5	19.1	10.7
10480	47.17	35.31	V	11.14	58.31	46.45	83.5	63.5	25.2	17.1

Table 7.3.2-3: Radiated Spurious Emissions Tabulated Data – 802.11n 40 MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
5150	55.06	40.26	H	1.85	56.91	42.11	74.0	54.0	17.1	11.9
5150	62.07	46.58	V	1.85	63.92	48.43	74.0	54.0	10.1	5.6
3462	51.08	44.70	H	-2.35	48.73	42.35	74.0	54.0	25.3	11.6
3462	50.11	42.85	V	-2.35	47.76	40.50	74.0	54.0	26.2	13.5
High Channel										
1386	52.55	46.48	H	-11.20	41.35	35.28	74.0	54.0	32.7	18.7
1386	50.34	43.00	V	-11.20	39.14	31.80	74.0	54.0	34.9	22.2
3487	50.90	44.25	H	-2.27	48.63	41.98	74.0	54.0	25.4	12.0
3487	46.01	34.47	V	-2.27	43.74	32.20	74.0	54.0	30.3	21.8

Table 7.3.2-4: Radiated Spurious Emissions Tabulated Data – 802.11ac 80 MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Middle Channel										
5150	50.14	37.26	H	2.43	52.57	39.69	74.0	54.0	21.4	14.3
5150	57.32	43.69	V	2.43	59.75	46.12	74.0	54.0	14.2	7.9

Band 5.25 GHz – 5.35 GHz**Table 7.3.2-5: Radiated Spurious Emissions Tabulated Data – 802.11a**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)			
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg		
Low Channel												
All emissions were attenuated below the noise floor of the instrumentation												
Middle Channel												
All emissions were attenuated below the noise floor of the instrumentation												
High Channel												
5350	50.61	37.44	V	3.11	53.72	40.55	74.0	54.0	20.3	13.4		
10640	50.85	39.45	H	11.11	61.96	50.56	83.5	63.5	21.5	13.0		

Table 7.3.2-6: Radiated Spurious Emissions Tabulated Data – 802.11n 20MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)			
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg		
Low Channel												
All emissions were attenuated below the noise floor of the instrumentation												
Middle Channel												
All emissions were attenuated below the noise floor of the instrumentation												
High Channel												
10640	51.13	39.45	H	11.11	62.24	50.56	83.5	63.5	21.3	13.0		
10640	46.51	34.78	V	11.11	57.62	45.89	83.5	63.5	25.9	17.7		

Table 7.3.2-7: Radiated Spurious Emissions Tabulated Data – 802.11n 40 MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
1386	52.97	46.86	H	-11.20	41.77	35.66	74.0	54.0	32.2	18.3
1386	51.26	43.92	V	-11.20	40.06	32.72	74.0	54.0	33.9	21.3
3513	51.13	44.63	H	-2.17	48.96	42.46	74.0	54.0	25.0	11.5
3513	49.22	41.43	V	-2.17	47.05	39.26	74.0	54.0	27.0	14.7
High Channel										
1386	52.25	46.28	H	-11.20	41.05	35.08	74.0	54.0	33.0	18.9
1386	51.13	43.49	V	-11.20	39.93	32.29	74.0	54.0	34.1	21.7
3540	46.14	34.57	H	-2.07	44.07	32.50	74.0	54.0	29.9	21.5
3540	49.12	40.26	V	-2.07	47.05	38.19	74.0	54.0	26.9	15.8

Table 7.3.2-8: Radiated Spurious Emissions Tabulated Data – 802.11ac 80 MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)			
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg		
Middle Channel												
All emissions were attenuated below the noise floor of the instrumentation												

Band 5.47 GHz – 5.725 GHz**Table 7.3.2-9: Radiated Spurious Emissions Tabulated Data – 802.11a**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
5470	49.12	37.42	V	3.52	52.64	40.94	74.0	54.0	21.4	13.1
Middle Channel										
All emissions were attenuated below the noise floor of the instrumentation										
High Channel										
All emissions were attenuated below the noise floor of the instrumentation										

Table 7.3.2-10: Radiated Spurious Emissions Tabulated Data – 802.11n 20MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
5470	51.05	37.87	V	3.52	54.57	41.39	74.0	54.0	19.4	12.6
Middle Channel										
All emissions were attenuated below the noise floor of the instrumentation										
High Channel										
All emissions were attenuated below the noise floor of the instrumentation										

Table 7.3.2-11: Radiated Spurious Emissions Tabulated Data – 802.11n 40 MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
1386	51.76	45.01	H	-11.20	40.56	33.81	74.0	54.0	33.4	20.2
1386	51.66	44.65	V	-11.20	40.46	33.45	74.0	54.0	33.5	20.6
5470	50.11	36.48	H	2.92	53.03	39.40	74.0	54.0	21.0	14.6
5470	60.25	45.16	V	2.92	63.17	48.08	74.0	54.0	10.8	5.9
Middle Channel										
1386	52.09	45.57	H	-11.20	40.89	34.37	74.0	54.0	33.1	19.6
1386	52.00	44.73	V	-11.20	40.80	33.53	74.0	54.0	33.2	20.5
High Channel										
1386	52.68	46.18	H	-11.20	41.48	34.98	74.0	54.0	32.5	19.0
1386	52.02	45.59	V	-11.20	40.82	34.39	74.0	54.0	33.2	19.6

Table 7.3.2-12: Radiated Spurious Emissions Tabulated Data – 802.11ac 80 MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
5470	48.63	33.05	H	3.52	52.15	36.57	74.0	54.0	21.8	17.4
5470	52.85	40.46	V	3.52	56.37	43.98	74.0	54.0	17.6	10.0
5751.46	46.04	31.45	H	4.10	50.14	35.55	74.0	54.0	23.9	18.4
Middle Channel										
All emissions were attenuated below the noise floor of the instrumentation										
High Channel										
All emissions were attenuated below the noise floor of the instrumentation										

Band 5.725 GHz – 5.85 GHz**Table 7.3.2-13: Radiated Spurious Emissions Tabulated Data – 802.11a**

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)			
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg		
Low Channel												
All emissions were attenuated below the noise floor of the instrumentation												
Middle Channel												
All emissions were attenuated below the noise floor of the instrumentation												
High Channel												
5850	49.10	37.09	H	4.29	53.39	41.38	74.0	54.0	20.6	12.6		

Table 7.3.2-14: Radiated Spurious Emissions Tabulated Data – 802.11n 20MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
5725	54.21	40.03	V	4.05	58.26	44.08	74.0	54.0	15.7	9.9
Middle Channel										
All emissions were attenuated below the noise floor of the instrumentation										
High Channel										
5850	51.46	38.61	V	4.29	55.75	42.90	74.0	54.0	18.2	11.1

Table 7.3.2-15: Radiated Spurious Emissions Tabulated Data – 802.11n 40 MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Low Channel										
1386	52.14	46.08	H	-11.20	40.94	34.88	74.0	54.0	33.1	19.1
1386	52.10	45.54	V	-11.20	40.90	34.34	74.0	54.0	33.1	19.7
5725	47.05	34.29	H	3.42	50.47	37.71	74.0	54.0	23.5	16.3
5725	55.02	41.25	V	3.42	58.44	44.67	74.0	54.0	15.6	9.3
High Channel										
1386	47.14	35.56	H	-11.20	35.94	24.36	74.0	54.0	38.1	29.6
1386	47.18	35.11	V	-11.20	35.98	23.91	74.0	54.0	38.0	30.1
5850	43.27	31.85	H	3.64	46.91	35.49	74.0	54.0	27.1	18.5
5850	46.08	34.12	V	3.64	49.72	37.76	74.0	54.0	24.3	16.2

Table 7.3.2-16: Radiated Spurious Emissions Tabulated Data – 802.11ac 80 MHz

Frequency (MHz)	Level (dBuV)		Antenna Polarity (H/V)	Correction Factors (dB)	Corrected Level (dBuV/m)		Limit (dBuV/m)		Margin (dB)	
	pk	Qpk/Avg			pk	Qpk/Avg	pk	Qpk/Avg	pk	Qpk/Avg
Middle Channel										
5725	47.32	34.83	V	4.05	51.37	38.88	74.0	54.0	22.6	15.1

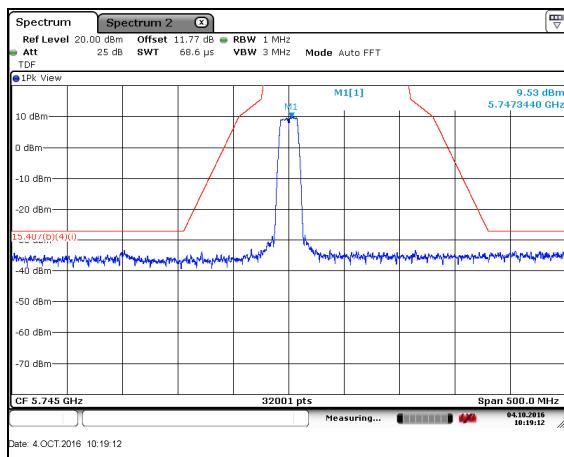


Figure 7.3.2-1: Radiated BE Lower – 802.11a

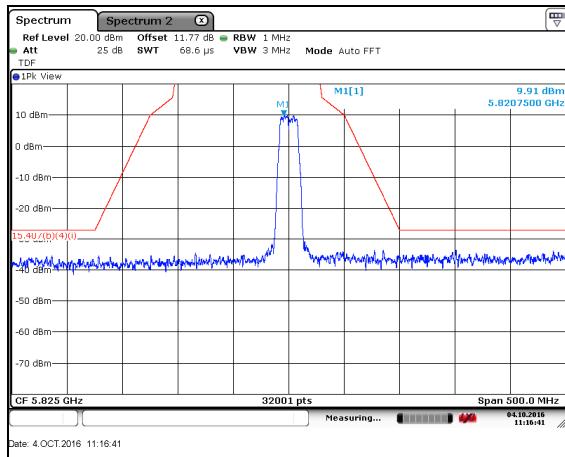


Figure 7.3.2-2: Radiated BE Upper – 802.11a

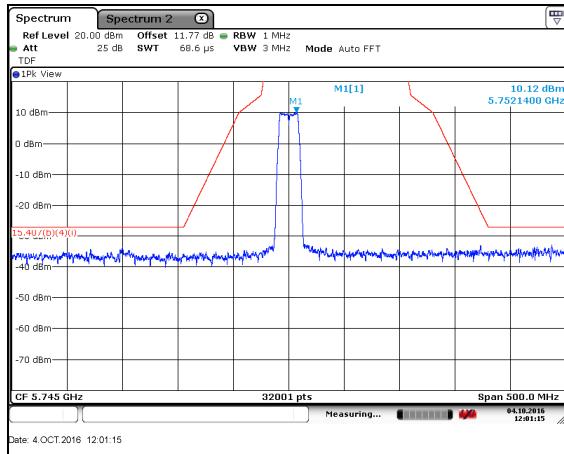


Figure 7.3.2-3: Radiated BE Lower – 802.11n20

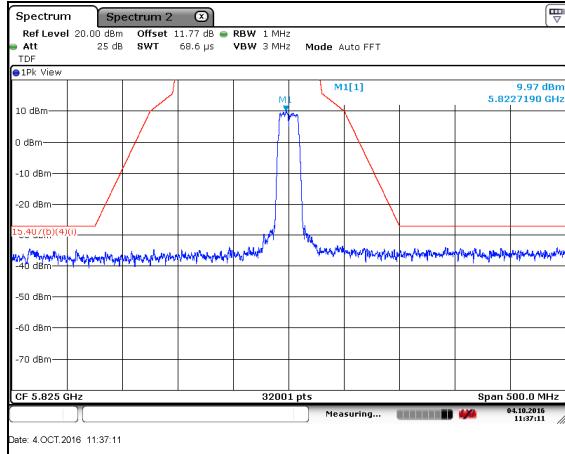


Figure 7.3.2-4: Radiated BE Upper – 802.11n20

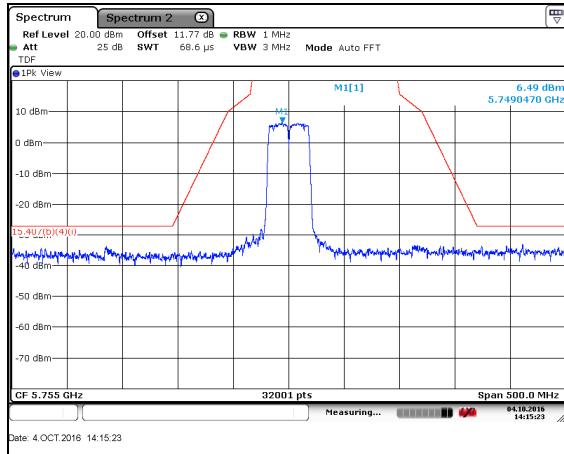


Figure 7.3.2-5: Radiated BE Lower – 802.11n40

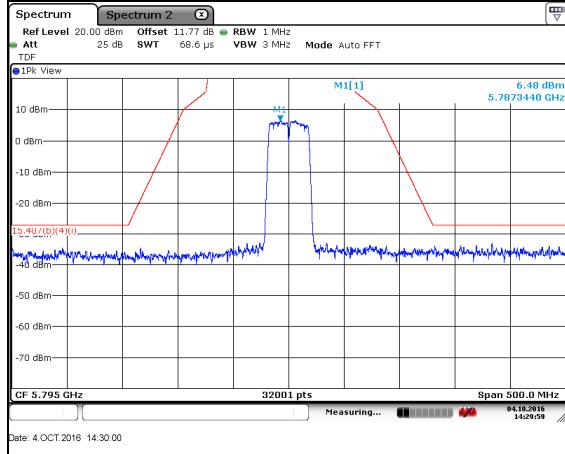


Figure 7.3.2-6: Radiated BE Upper – 802.11n40

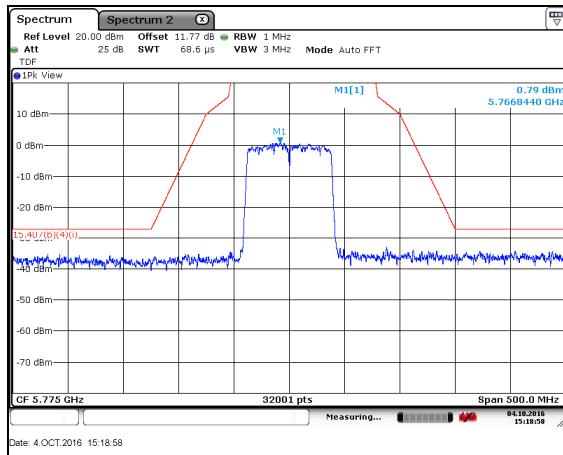


Figure 7.3.2-7: Radiated BE – 802.11ac80

7.3.3 Sample Calculation:

$$R_C = R_U + C F_T$$

Where:

$C F_T$	=	Total Correction Factor (AF+CA+AG)-DC (Average Measurements Only)
R_U	=	Uncorrected Reading
R_C	=	Corrected Level
AF	=	Antenna Factor
CA	=	Cable Attenuation
AG	=	Amplifier Gain
DC	=	Duty Cycle Correction Factor

Example Calculation: Peak

$$\text{Corrected Level: } 49.95 + 10.76 = 60.71 \text{ dBuV/m}$$

$$\text{Margin: } 83.5 \text{ dBuV/m} - 60.71 \text{ dBuV/m} = 22.8 \text{ dB}$$

Example Calculation: Average

$$\text{Corrected Level: } 37.24 + 10.76 - 0 = 48.00 \text{ dBuV}$$

$$\text{Margin: } 63.5 \text{ dBuV} - 48.00 \text{ dBuV} = 15.5 \text{ dB}$$

8 CONCLUSION

In the opinion of ACS, Inc. the LBEE5ZZ1CK-982, manufactured by Murata Manufacturing Co., Ltd. meets the requirements of FCC Part 15 subpart E and ISED Canada's Radio Standards Specification RSS-247.

END REPORT