



Test report No:
22B0213R-RF-US-P06V01

FCC & ISED TEST REPORT

Product Name	Geolocation Module
Trademark	Murata
Model and /or type reference	LBEU5ZZ1WL
FCC ID	VPYLB1WL
IC	772C-LB1WL
Applicant's name / address	Murata Manufacturing Co., Ltd. 10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555, Japan
Test method requested, standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10: 2013 KDB558074 D01 15.247 Meas Guidance v05r02 RSS-Gen Issue 5 RSS-247 Issue 2
Verdict Summary	IN COMPLIANCE
Tested by (name / position & signature)	Tim Cao/ Project Manager 
Approved by (name / position & signature)	Jack Zhang/ Manager 
Date of issue	2023-01-09
Report Version	V1.0
Report template No	Template_FCC 15.247-RF-V1.0

INDEX

	page
General conditions	4
Environmental conditions	4
Possible test case verdicts	5
Abbreviations	5
Document History	6
Remarks and Comments.....	6
Used Equipment	7
Uncertainty	8
1 General Information.....	9
1.1 General Description of the Item(s)	9
1.2 Antenna Information	10
1.3 Channel List	11
1.4 Power Setting.....	11
2 Description of Test Setup	12
2.1 Operating mode(s) used for tests.....	12
2.2 Accessories Information	12
2.3 Auxiliary equipment / Test software for the EUT.....	12
2.4 Test Configuration / Block diagram used for tests	13
2.5 Testing process.....	14
3 Verdict summary section	15
3.1 Standards.....	15
3.2 Deviation(s) from the Standard(s) / Test Specification(s).....	15
3.3 Overview of results.....	16
3.4 Test Facility.....	17
4 Test Results	18
4.1 AC Power Line Conducted Emission	18
4.1.1 Limit	18
4.1.2 Test Setup.....	18
4.1.3 Test Procedure.....	18
4.1.4 Test Data	19
4.2 Emissions in restricted frequency bands	20
4.2.1 Limit	20
4.2.2 Test Setup.....	22
4.2.3 Test Procedure.....	23

4.2.4	Test Data	24
4.3	Emissions in non-restricted frequency band.....	40
4.3.1	Limit.....	40
4.3.2	Test Setup.....	40
4.3.3	Test Procedure.....	40
4.3.4	Test Data	41
4.4	Duty cycle	49
4.4.1	Limit.....	49
4.4.2	Test Setup.....	49
4.4.3	Test Procedure.....	49
4.4.4	Test Data	50
4.5	Band Edge	51
4.5.1	Limit.....	51
4.5.2	Test Setup.....	51
4.5.3	Test Procedure.....	51
4.5.4	Test Data	52
4.6	DTS Bandwidth	68
4.6.1	Limit.....	68
4.6.2	Test Setup.....	68
4.6.3	Test Procedure.....	68
4.6.4	Test Data	69
4.7	Fundamental emission output power	70
4.7.1	Limit.....	70
4.7.2	Test Setup.....	70
4.7.3	Test Procedure.....	71
4.7.4	Test Data	72
4.8	Power Density	73
4.8.1	Limit:	73
4.8.2	Test Setup.....	73
4.8.3	Test Procedure.....	73
4.8.4	Test Data	74
4.9	Antenna Requirement.....	75
4.9.1	Limit:	75
4.9.2	Antenna Connector Construction:	75
5	Test setup photo and EUT Photo.....	76

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

Test Location	No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China
Date(receive sample)	Nov. 07, 2022
Date (start test)	Nov. 14, 2022
Date (finish test)	Dec. 13, 2022

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

Ambient temperature	15 °C – 35 °C
Relative Humidity air	30% - 60%

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

Test case does not apply to test object	N/A
Test object does meet requirement	P (Pass) / PASS
Test object does not meet requirement	F (Fail) / FAIL
Not measured	N/M

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

EUT	: Equipment Under Test
QP	: Quasi-Peak
CAV	: CISPR Average
AV	: Average
CDN	: Coupling Decoupling Network
SAC	: Semi-Anechoic Chamber
OATS	: Open Area Test Site
BW	: Bandwidth
AM	: Amplitude Modulation
PM	: Pulse Modulation
HCP	: Horizontal Coupling Plane
VCP	: Vertical Coupling Plane
U_N	: Nominal voltage
Tx	: Transmitter
Rx	: Receiver
N/A	: Not Applicable
N/M	: Not Measured

DOCUMENT HISTORY

Report No.	Version	Description	Issued Date
2260325R-RF-US-P06V01	V1.0	Initial issue of report.	2023-01-09

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. These test results on a sample of the device are for the purpose of demonstrating Compliance with Part 15 Subpart C Paragraph 15.247, RSS-Gen Issue 5, RSS-247 Issue 2.
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Information;
 - Chapter 1.3 Channel List;
 - Chapter 1.4 Power Setting.

USED EQUIPMENT

AC Power Line Conducted Emission / TR1

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2022.09.17	2023.09.16
Two-Line V-Network	R&S	ENV216	101044	2022.03.12	2023.03.11
Current Probe	R&S	EZ-17	100678	2021.12.31	2022.12.30
50ohm Termination	SHX	TF2	07081403	2022.08.27	2023.08.26
50ohm Coaxial Switch	Anritsu	MP59B	6200464462	N/A	N/A
Temperature/Humidity Meter	RTS	RTS-8S	TR1-TH	2022.07.07	2023.07.06
Coaxial Cable	Suhner	RG 223	TR1-C2	2022.03.21	2023.03.20
Dekra test software	Dekra	-	-	-	-

Emissions in non-restricted frequency bands/ Occupied Bandwidth/ Fundamental emission output power/ Power Spectral Density/Band Edge/ TR8

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
MAX Signal Analyzer	Agilent	N9020A	MY49100159	2022.09.18	2023.09.17
MXA Signal Analyzer	Keysight	N9020A	MY56060147	2022.07.14	2023.07.13
Temperature/Humidity Meter	RTS	RTS-8S	RF08	2022.07.07	2023.07.06
Tonscend test software	Tonscend	-	-	-	-

Radiated Emission(30MHz-1GHz) / AC2

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESCI	100573	2022.09.17	2023.09.16
Loop Antenna	R&S	HFH2-Z2	833799/003	2022.04.15	2023.04.14
Bilog Antenna	Teseq GmbH	CBL6112D	27611	2022.08.28	2023.08.27
Temperature/Humidity Meter	RTS	RTS-8S	AC2-TH	2022.07.07	2023.07.06
Coaxial Cable	Huber+Suhner	RG 214	AC2-C	2022.03.21	2023.03.20
Dekra test software	Dekra	-	-	-	-

Radiated Emission(1GHz-40GHz) / AC5

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
MXA Signal Analyzer	Keysight	N9020B	MY60112218	2022.01.09	2023.01.08
Pre-Amplifier	SKET	LNPA_0118G-45	SK2021090101	2022.07.15	2023.07.14
Preamplifier	CHENGYI	EMC184045SE	980263	2022.05.21	2023.05.20
DRG Horn	ETS-Lindgren	3117	00123988	2022.11.01	2023.10.31
Broad-Band Horn Antenna	Schwarzbeck	BBHA9170	294	2022.05.19	2023.05.18
Temperature/Humidity Meter	RTS	RTS-8S	AC5-TH	2022.07.07	2023.07.06
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C1	2022.03.21	2023.03.20
Coaxial Cable	Huber+Suhner	SUCOFLEX 106	AC5-C2	2022.03.21	2023.03.20
Coaxial Cable	Huber+Suhner	SUCOFLEX 102	AC5-C3	2022.03.21	2023.03.20
Dekra test software	Dekra	-	-	-	-

UNCERTAINTY

Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%. The Uncertainties is comply with standard required as below.

Test item	Uncertainty
AC Power Line Conducted Emission	9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB
Peak Power Output	± 1.27 dB
Radiated Emission(30MHz~1GHz)	Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB
Radiated Emission(1GHz~26.5GHz)	Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB
RF antenna conducted test	± 1.27 dB
Radiated Emission Band Edge	± 3.9 dB
DTS Bandwidth	± 150 Hz
Occupied Bandwidth	± 1 kHz
Power Density	± 1.27 dB

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

Product Name	Geolocation Module
Model No.	LBEU5ZZ1WL
FCC ID	VPYLB1WL
IC.....	772C-LB1WL
Hardware Version	1.0
Software Version.....	1.0
Manufacturer.....	Murata Manufacturing Co., Ltd.
Manufacturer Address.....	10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555, Japan
Factory	Murata Manufacturing Co., Ltd.
Factory Address.....	10-1, Higashikotari 1-chome, Nagaokakyo-shi, Kyoto 617-8555, Japan

Wireless specification.....	Bluetooth LE V5.0				
Operating frequency range(s).....	2400~2483.5MHz				
Type of Modulation.....	GFSK				
PHYS	☒	LE 1M	☒	LE 2M	☐ LE Coded S=2/8
Data Rate	☒	1Mbit/s	☒	2Mbit/s	☐ 500/125 Kbit/s
Number of channel.....	40				

Rated power supply	Voltage and Frequency	
	☐	AC: 220 – 240 V, 50/60 Hz
	☒	DC:3.0 – 3.3V, Typical 3.3V
	☐	Adapter:
	☐	Battery:.....
Mounting position.....	☐	Table top equipment
	☐	Wall/Ceiling mounted equipment
	☐	Floor standing equipment
	☐	Head-mounted equipment
	☒	Other: Module

1.2 Antenna Information

Antenna model / type number.....:	W1010		
Antenna serial number	N/A		
Antenna Delivery	☒	1TX + 1RX	
	☐	2TX + 2RX	
	☐	Others:.....	
Antenna technology.....:	☒	SISO	
	☐	MIMO	☐ CDD
			☐ Beam-forming
Antenna Type.....:	☒	External	☐ Dipole
			☒ Whip
			☐ Sectorized
			☐ PCB
	☐	Internal	☐ PIFA
			☐ PCB
			☐ Dipole
			☐ Others.....
Antenna Gain.....:	1.7 dBi		

1.3 Channel List

Bluetooth Working Frequency of Each Channel (LE):

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
00	2402 MHz	01	2404 MHz	02	2406 MHz	03	2408 MHz
04	2410 MHz	05	2412 MHz	06	2414 MHz	07	2416 MHz
08	2418 MHz	09	2420 MHz	10	2422 MHz	11	2424 MHz
12	2426 MHz	13	2428 MHz	14	2430 MHz	15	2432 MHz
16	2434 MHz	17	2436 MHz	18	2438 MHz	19	2440 MHz
20	2442 MHz	21	2444 MHz	22	2446 MHz	23	2448 MHz
24	2450 MHz	25	2452 MHz	26	2454 MHz	27	2456 MHz
28	2458 MHz	29	2460 MHz	30	2462 MHz	31	2464 MHz
32	2466 MHz	33	2468 MHz	34	2470 MHz	35	2472 MHz
36	2474 MHz	37	2476 MHz	38	2478 MHz	39	2480 MHz

1.4 Power Setting

Mode	Channel	Test Frequency (MHz)	Power Setting
LE_1Mbps	00	2402	31
	19	2440	31
	39	2480	31
LE_2Mbps	00	2402	31
	19	2440	31
	39	2480	31

Note: The general description of the Item(s), antenna information, channel list and Power Setting in clause 1 are provided and confirmed by the client.


2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

Test Mode For Bluetooth	Mode1: Transmit by LE_1Mbps
	Mode2: Transmit by LE_2Mbps

Note : For client device, radiated tests was verified over X, Y, Z axis, and shown the worst case X axis on this report.

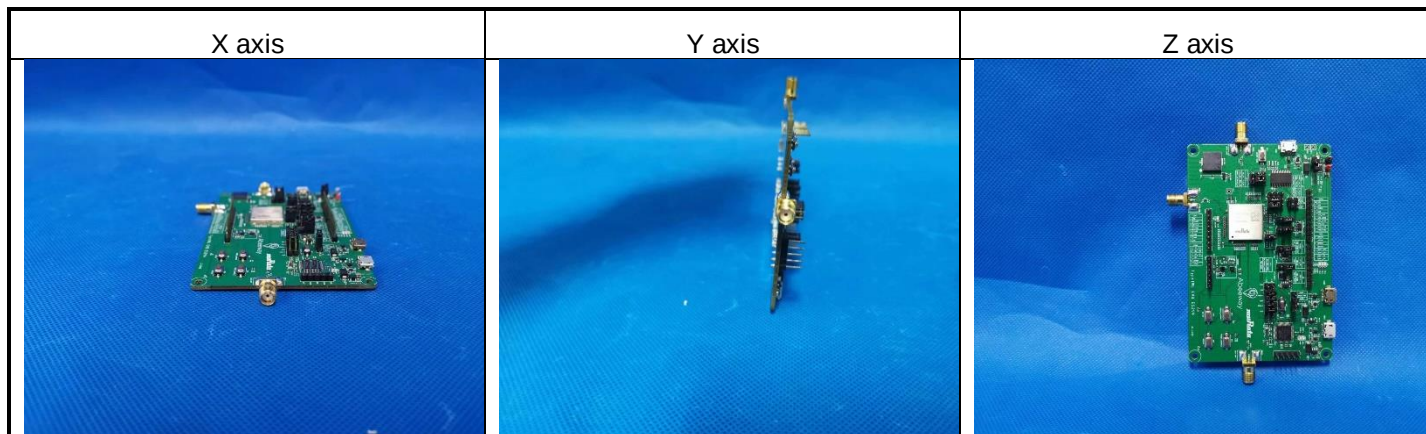

2.2 Accessories Information


Accessories Information	Brand/model name	Cable		
		Length used during test [m]	Attached during test	Shielded
USB Cable	N/A	10	☒	☒
USB Cable	N/A	1	☒	☒

2.3 Auxiliary equipment / Test software for the EUT


Auxiliary equipment	Type / Version	Manufacturer	Supplied by
Notebook	Think Pad X280	Lenovo	Adapter
Software	Type / Version	Manufacturer	Supplied by
SSCOM	5.13.1	N/A	N/A

2.4 Test Configuration / Block diagram used for tests

Test setup Diagram- Conducted test

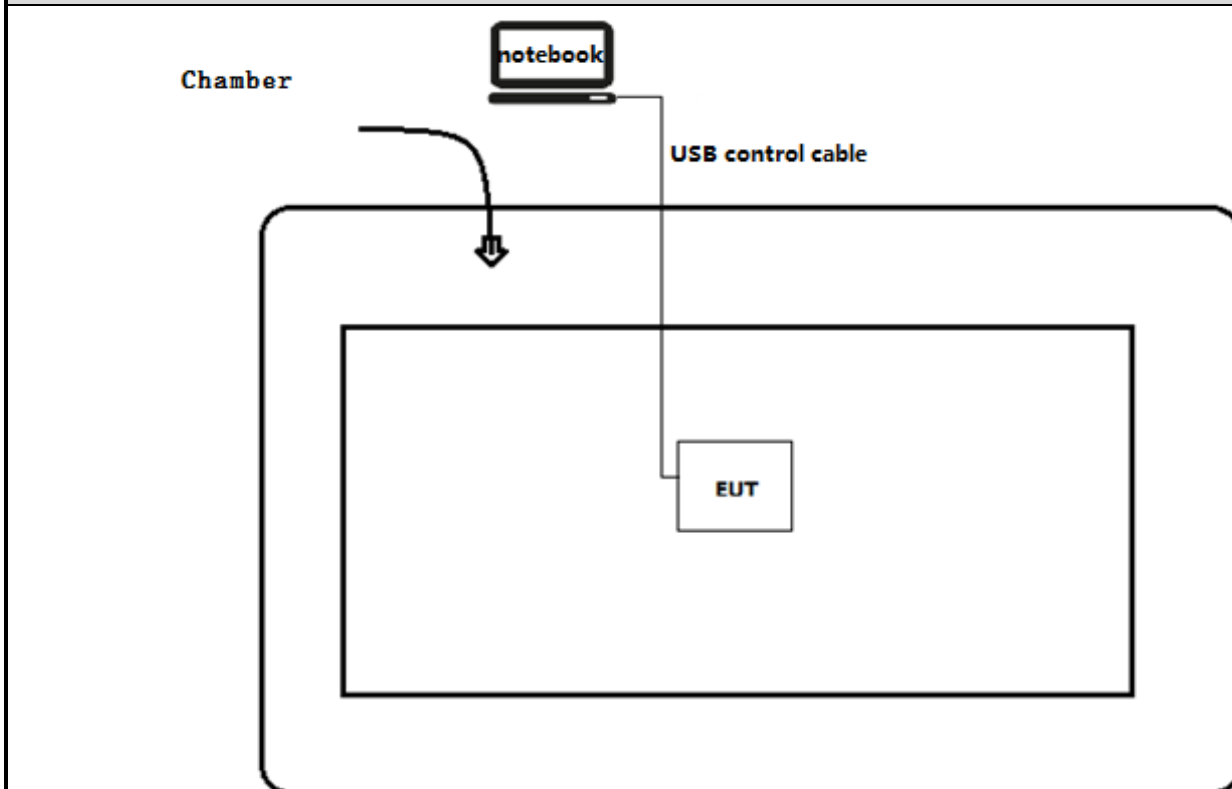

Test setup Diagram- Radiated Emission

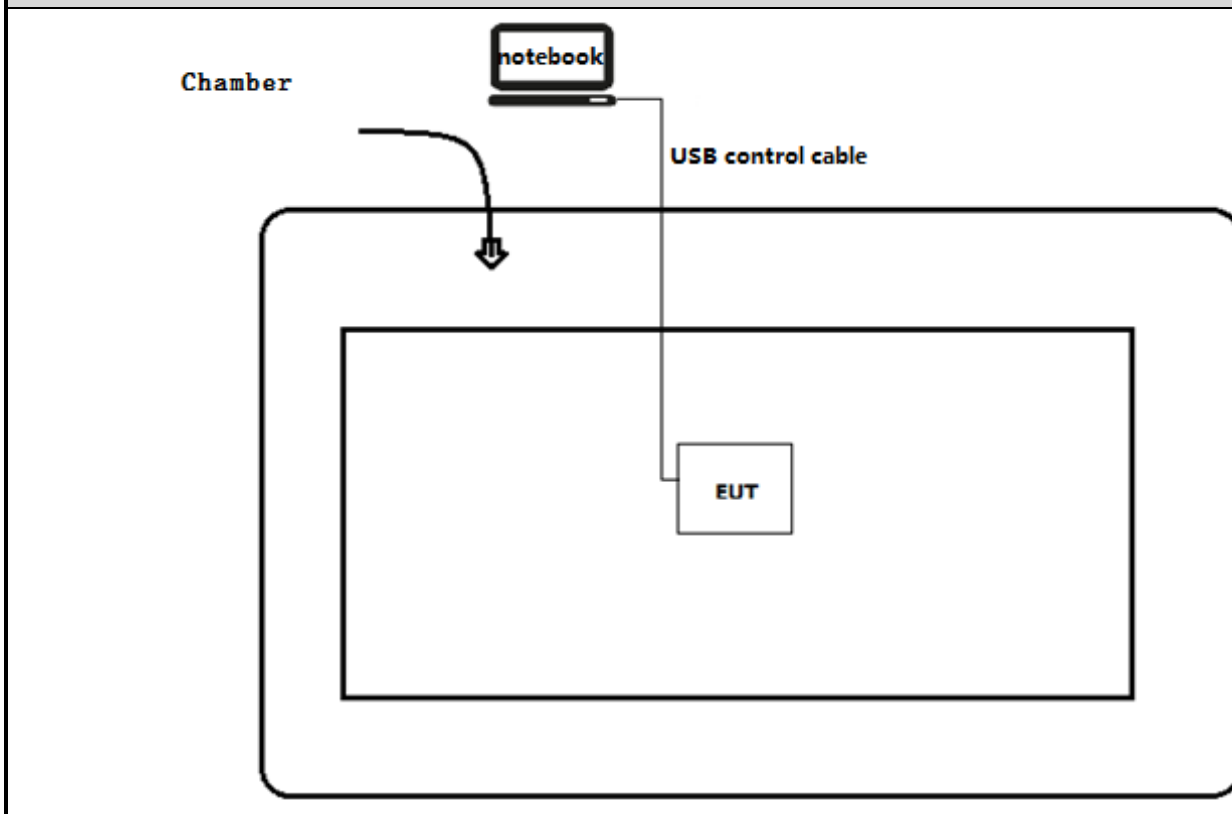

2.5 Testing process

1	Setup the EUT as shown in Section 2.4.
2	Run the software “SSCOM” on the notebook computer.
3	Open the serial port and enter the corresponding commands to configure the test mode, test channel, test power and data rate.
4	Verify that the EUT works properly.

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

Standard	Year	Description
FCC CFR Title 47 Part 15 Subpart C Section 15.247	2020	Operation within the bands 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz.
ANSI C63.10	2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB558074 D01 v05r02	2019	Guidance for performing compliance measurements on Digital Transmission System (DTS) operating under section 15.247
RSS-Gen Issue 5 Amendment 2	2021	General Requirements for Compliance of Radio Apparatus
RSS-247 Issue 2	2017	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

For FCC

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	FCC 15.207	N/A	---
Emissions in restricted frequency bands	FCC 15.247(b)(3)	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	FCC 15.247(d), FCC 15.209	PASS	---
Band Edge	FCC 15.247(d)	PASS	---
Fundamental emission output power	FCC 15.247(d), FCC 15.209	PASS	---
DTS Bandwidth	FCC 15.247(a)(2)	PASS	---
Power Spectral Density	FCC 15.247(e)	PASS	---
Antenna Requirement	FCC 15.203	PASS	---

For ISED

Requirement – Test case	Basic standard(s)	Verdict	Remark
AC Power Line Conducted Emission	RSS-Gen Issue 5 Section 8.8	N/A	---
Emissions in restricted frequency bands	RSS-Gen Issue 5 Section 8.9	PASS	---
Duty cycle	ANSI C63.10:2013	PASS	---
Emissions in non-restricted frequency bands	RSS-247 Issue 2 Section 5.5	PASS	---
Band Edge	RSS-Gen Issue 5 Section 8.10	PASS	---
Fundamental emission output power	RSS-247 Issue 2 Section 5.4(d)	PASS	---
DTS Bandwidth	RSS-Gen Issue 5 Section 6.7	PASS	---
Power Spectral Density	RSS-247 Issue 2 Section 5.2(b)	PASS	---
Antenna Requirement	RSS-Gen Issue 5 Section 6.8	PASS	---

3.4 Test Facility

USA	:	FCC Designation Number: CN1199
CA	:	ISED CAB identifier: CN0040

4 TEST RESULTS

4.1 AC Power Line Conducted Emission

VERDICT: N/A

4.1.1 Limit

Standard	FCC Part 15 Subpart C Paragraph 15.207	
Frequency range [MHz]	Limit: QP [dB(μV) ¹⁾]	Limit: AV [dB(μV) ¹⁾]
0,15 - 0,50	66 - 56 ²⁾	56 - 46 ²⁾
0,50 - 5,0	56	46
5,0 - 30	60	50


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.1.2 Test Setup

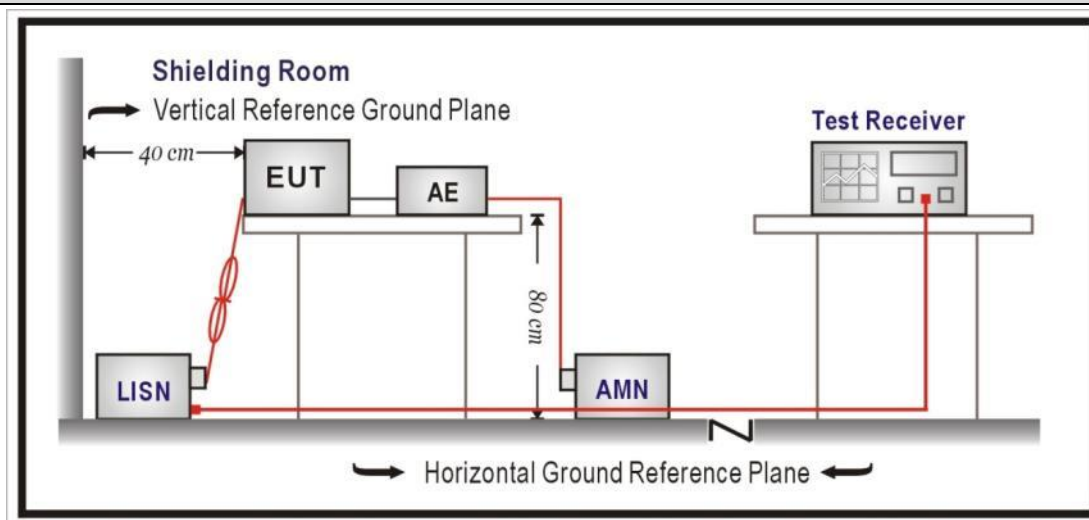

4.1.3 Test Procedure

	References Rule	Chapter	Item
☒	ANSI C63.10-2013	6.2	Standard test method for ac power-line conducted emissions from unlicensed wireless devices

4.1.4 Test Data

N/A: The EUT is powered by DC.

4.2 Emissions in restricted frequency bands**VERDICT: PASS****4.2.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.209

Restricted Bands of operationfor FCC

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.81425 – 8.81475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	
13.36 – 13.41			

Restricted Bands of operationfor IC

0.090 - 0.110	13.36 - 13.41	960 - 1427	9.0 - 9.2
0.495 - 0.505	16.42 - 16.423	1435 - 1626.5	9.3 - 9.5
2.1735 - 2.1905	16.69475 - 16.69525	1645.5 - 1646.5	10.6 - 12.7
3.020 - 3.026	16.80425 - 16.80475	1660 - 1710	13.25 - 13.4
4.125 - 4.128	25.5 - 25.67	1718.8 - 1722.2	14.47 - 14.5
4.17725 - 4.17775	37.5 - 38.25	2200 - 2300	15.35 - 16.2
4.20725 - 4.20775	73 - 74.6	2310 - 2390	17.7 - 21.4
5.677 - 5.683	74.8 - 75.2	2483.5 - 2500	22.01 - 23.12
6.215 - 6.218	108 - 138	2655 - 2900	23.6 - 24.0
6.26775 - 6.26825	149.9 - 150.05	3260 - 3267	31.2 - 31.8
6.31175 - 6.31225	156.52475 - 156.52525	3332 - 3339	36.43 - 36.5
8.291 - 8.294	156.7 - 156.9	3345.8 - 3358	Above 38.6
8.362 - 8.366	162.0125 - 167.17	3500 - 4400	
8.37625 - 8.38675	167.72 - 173.2	4500 - 5150	
8.41425 - 8.41475	240 - 285	5350 - 5460	
12.29 - 12.293	322 - 335.4	7250 - 7750	
12.51975 - 12.52025	399.9 - 410	8025 - 8500	
12.57675 - 12.57725	608 - 614	--	

Restricted Band Emissions Limit

Frequency (MHz)	Field strength ($\mu\text{V/m}$)	Field strength (dB $\mu\text{V/m}$)	Measurement distance (m)
0.009 - 0.49	2400/F(kHz)	48.5 – 13.8	300 _(Note 1)
0.49 - 1.705	24000/F(kHz)	33.8 - 23	30 _(Note 1)
1.705 - 30	30	29.5	30 _(Note 1)
30 - 88	100	40	3 _(Note 2)
88-216	150	43.5	3 _(Note 2)
216 - 960	200	46	3 _(Note 2)
Above 960	500	54	3 _(Note 2)


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment.


Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

4.2.2 Test Setup


Below 30MHz Test Setup:

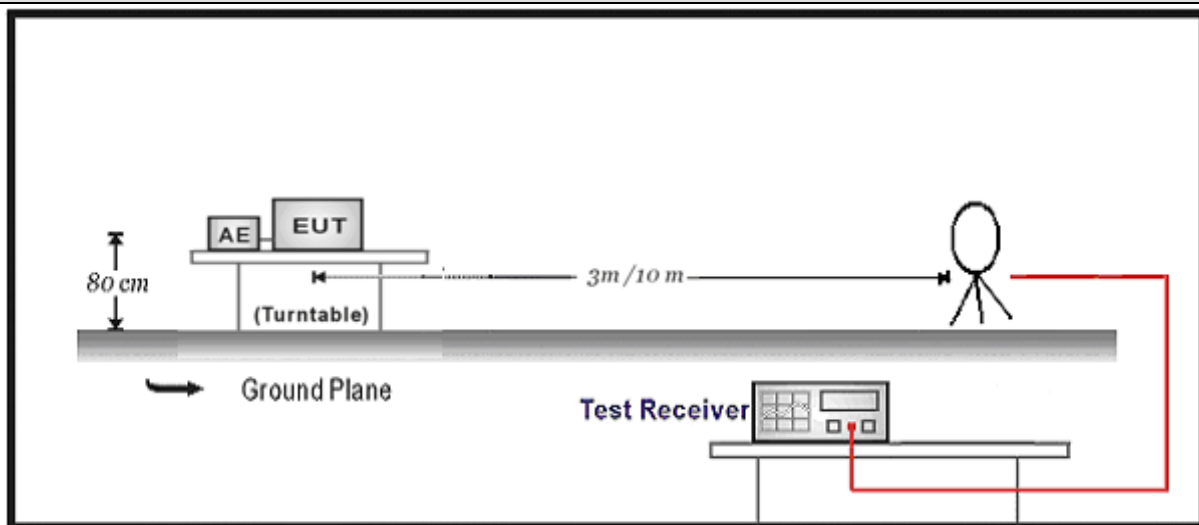

30MHz-1GHz Test Setup:

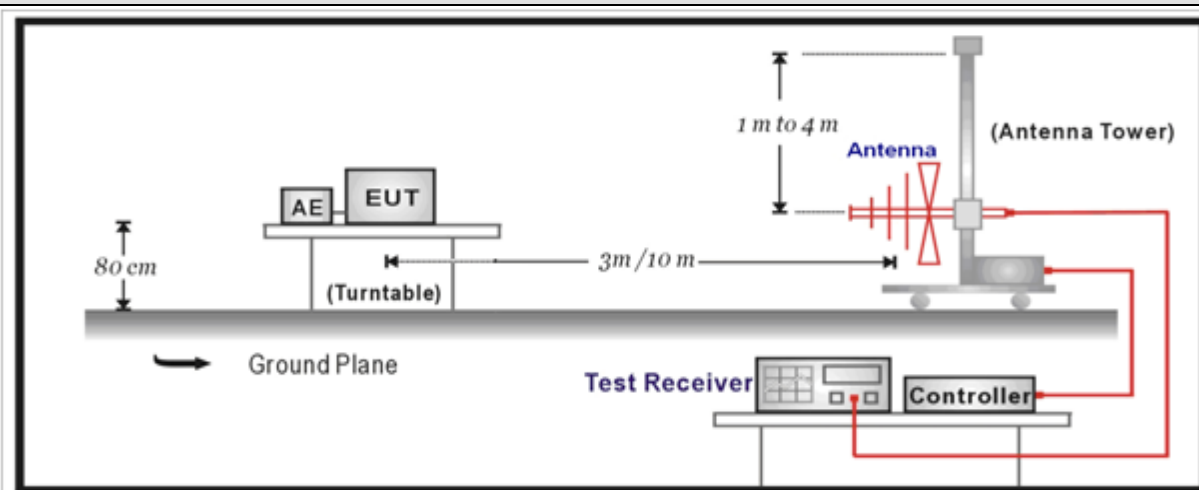

Above 1GHz Test Setup:

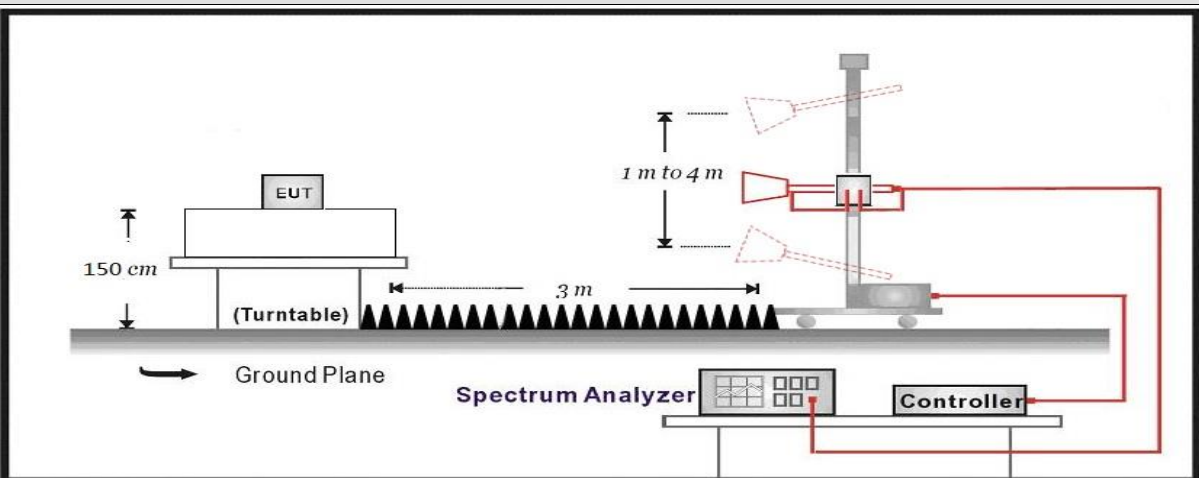


4.2.3 Test Procedure

	References Rule		Chapter	Description
☒	ANSI C63.10		11.12	Emissions in restricted frequency bands
	☒	ANSI C63.10	11.12.1	Radiated emission measurements
	☒	ANSI C63.10	11.12.2.7	Radiated spurious emission test
		☒ ANSI C63.10	6.4	Radiated emissions from unlicensed wireless devices below 30 MHz
		☒ ANSI C63.10	6.5	Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz
		☒ ANSI C63.10	6.6	Radiated emissions from unlicensed wireless devices above 1 GHz


4.2.4 Test Data

Profile: 22B0213R	Page No.: 29
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Mode1:Transmit at 2402MHz by LE_1Mbps	

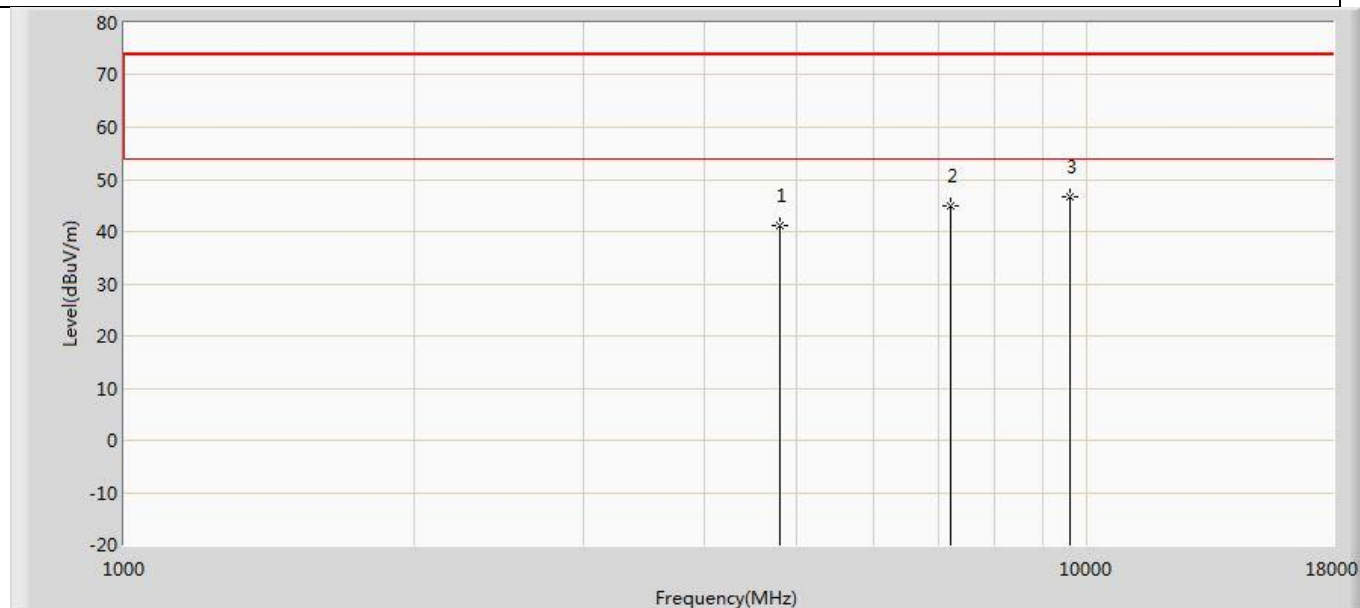


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.038	56.018	-32.962	74.000	-14.981	PK
2		7206.000	44.891	55.711	-29.109	74.000	-10.820	PK
3	*	9608.000	46.603	54.697	-27.397	74.000	-8.094	PK

Profile: 22B0213R	Page No.: 30
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_1Mbps	

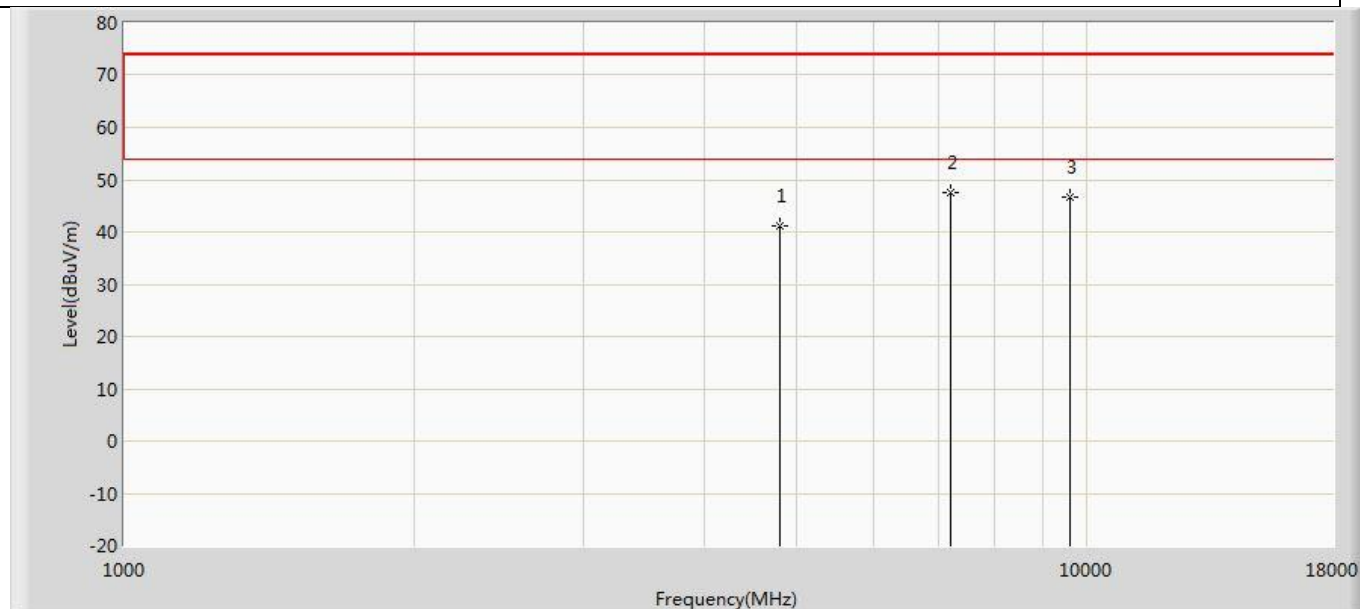


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.160	56.140	-32.840	74.000	-14.981	PK
2	*	7205.000	47.526	58.338	-26.474	74.000	-10.813	PK
3		9608.000	46.633	54.727	-27.367	74.000	-8.094	PK

Profile: 22B0213R	Page No.: 31
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:51
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2440MHz by LE_1Mbps	

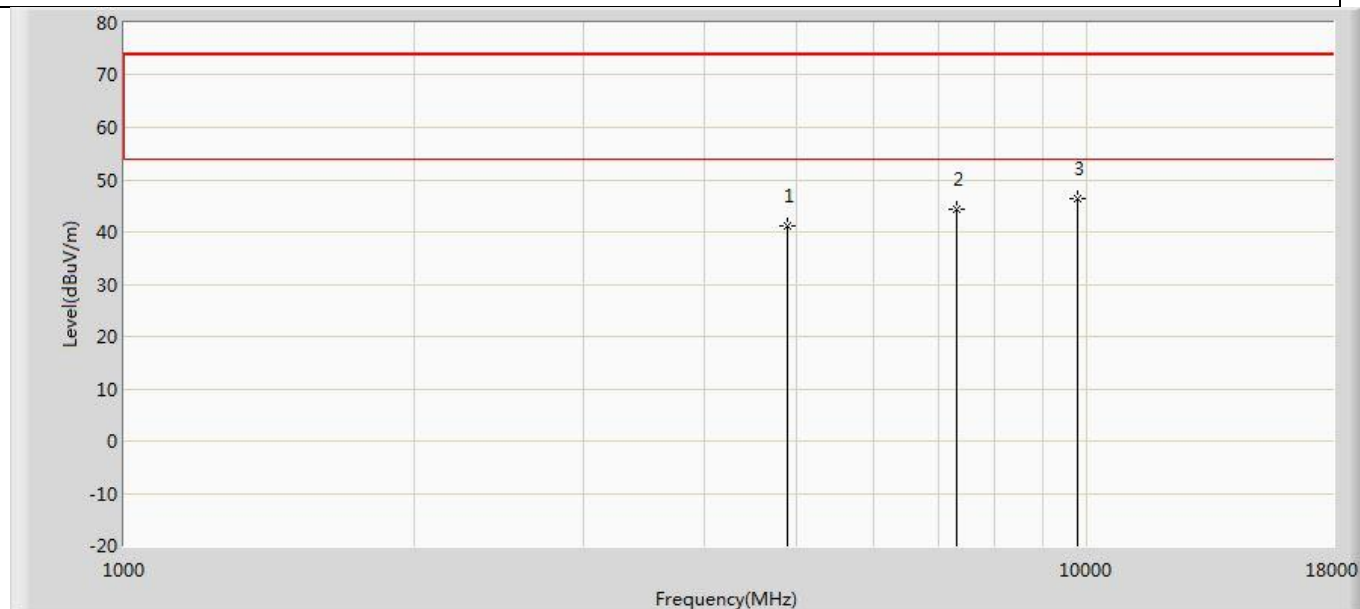


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	41.119	55.719	-32.881	74.000	-14.600	PK
2		7320.000	44.257	55.125	-29.743	74.000	-10.868	PK
3	*	9760.000	46.456	54.253	-27.544	74.000	-7.797	PK

Profile: 22B0213R	Page No.: 32
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2440MHz by LE_1Mbps	

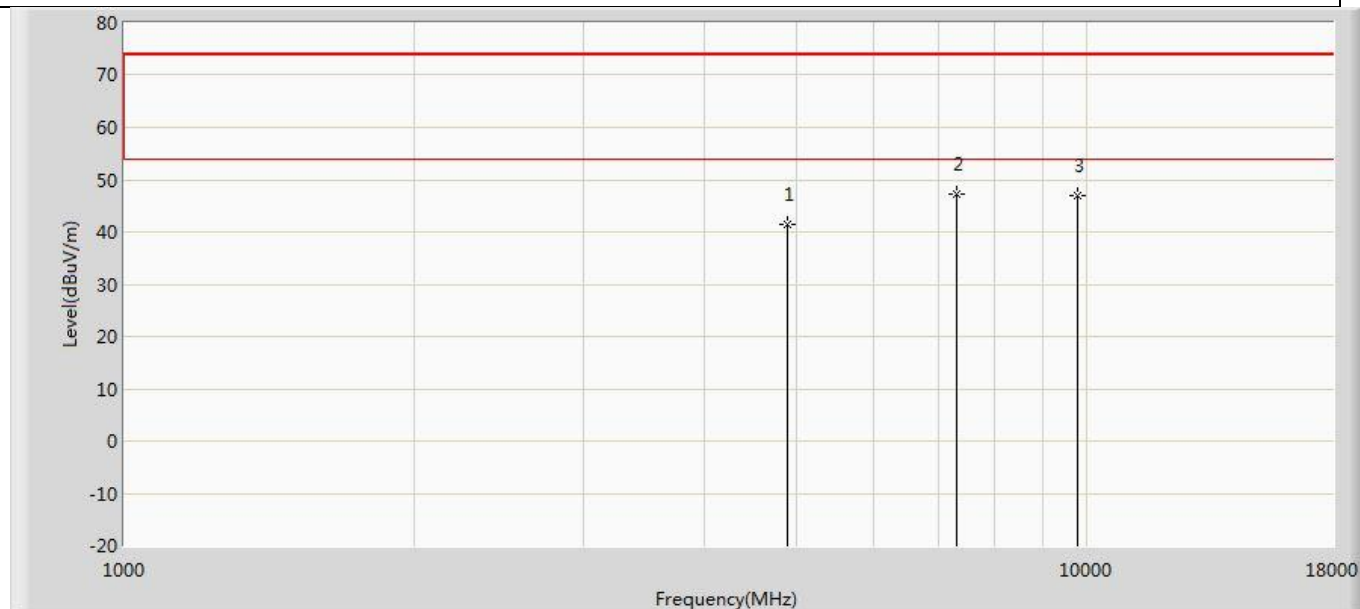


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	41.369	55.969	-32.631	74.000	-14.600	PK
2	*	7324.000	47.359	58.238	-26.641	74.000	-10.879	PK
3		9760.000	46.835	54.632	-27.165	74.000	-7.797	PK

Profile: 22B0213R	Page No.: 33
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_1Mbps	

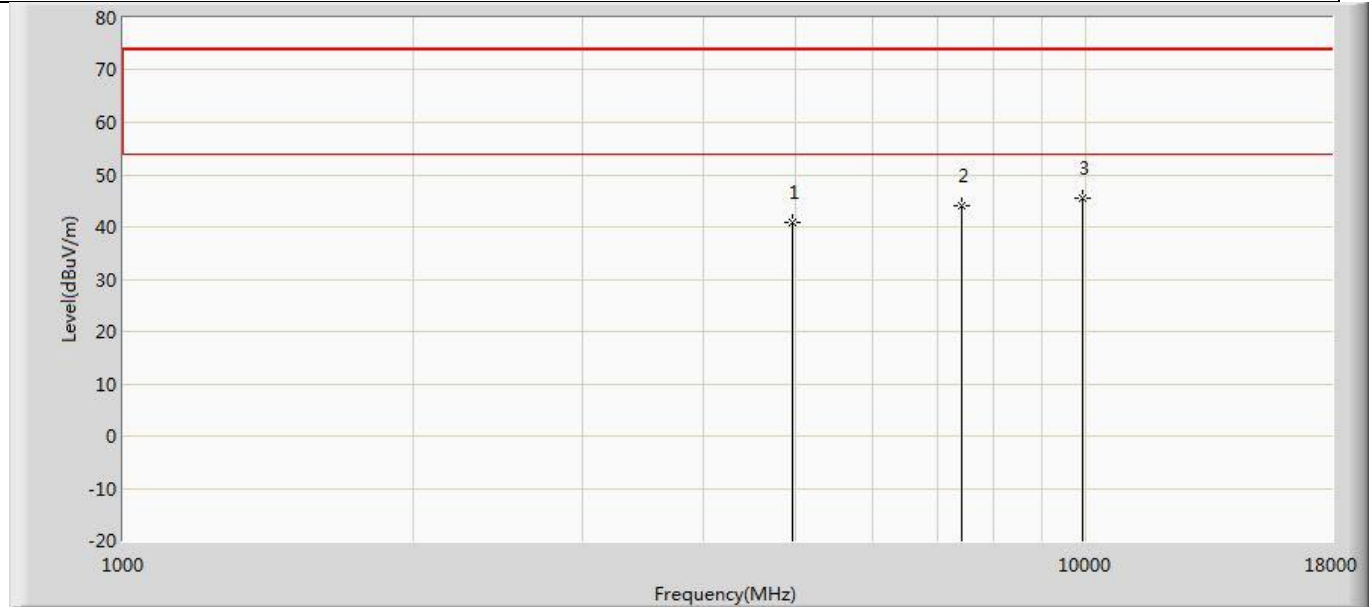


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	40.943	55.507	-33.057	74.000	-14.565	PK
2		7440.000	44.101	54.832	-29.899	74.000	-10.731	PK
3	*	9920.000	45.524	53.101	-28.476	74.000	-7.578	PK

Profile: 22B0213R	Page No.: 34
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_1Mbps	

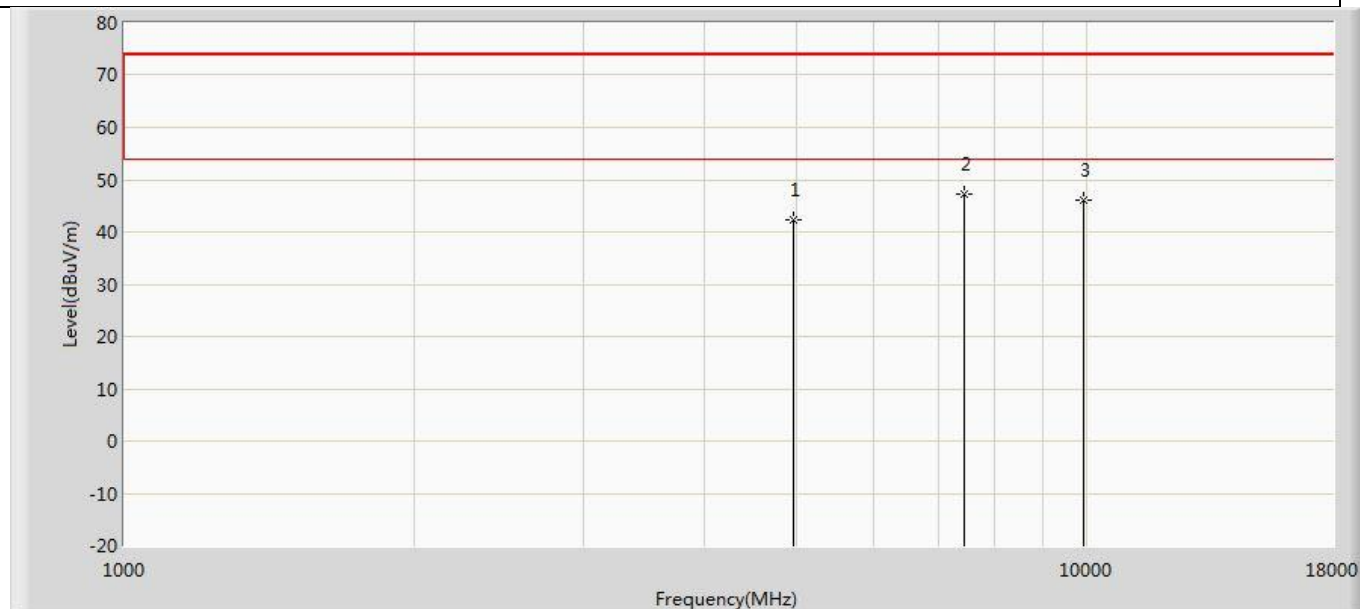


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	42.281	56.845	-31.719	74.000	-14.565	PK
2	*	7443.000	47.323	58.097	-26.677	74.000	-10.774	PK
3		9920.000	46.227	53.804	-27.773	74.000	-7.578	PK

Profile: 22B0213R	Page No.: 35
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_2Mbps	

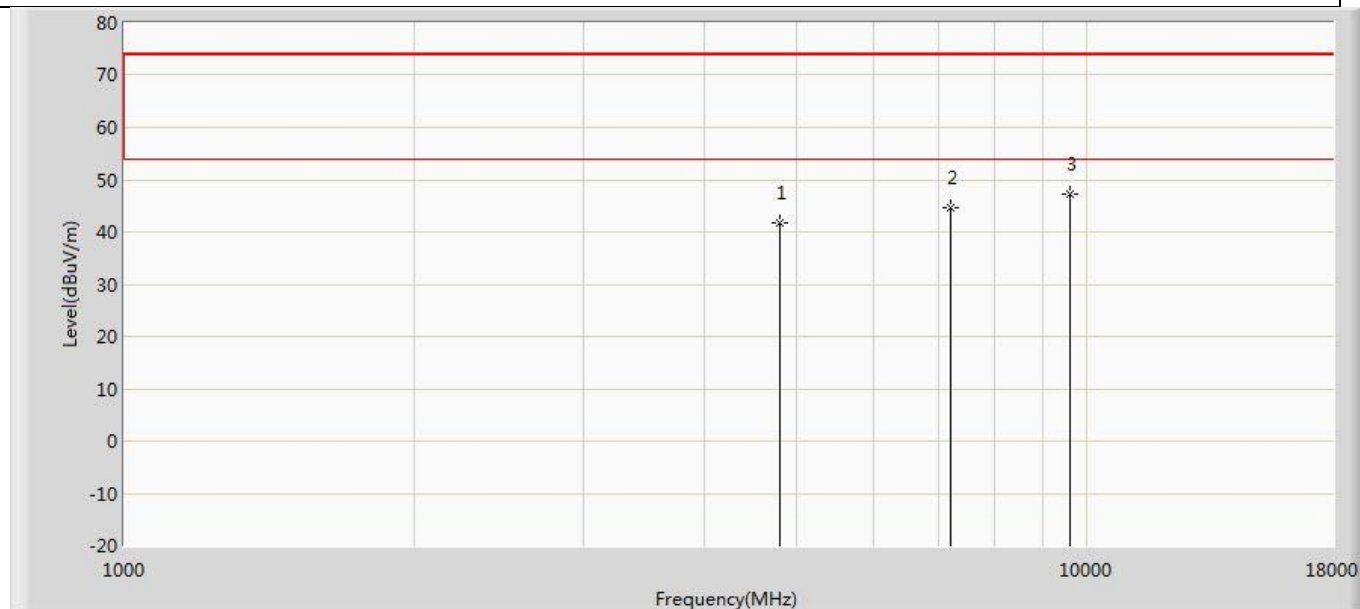


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.854	56.834	-32.146	74.000	-14.981	PK
2		7206.000	44.746	55.566	-29.254	74.000	-10.820	PK
3	*	9608.000	47.120	55.214	-26.880	74.000	-8.094	PK

Profile: 22B0213R	Page No.: 36
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_2Mbps	

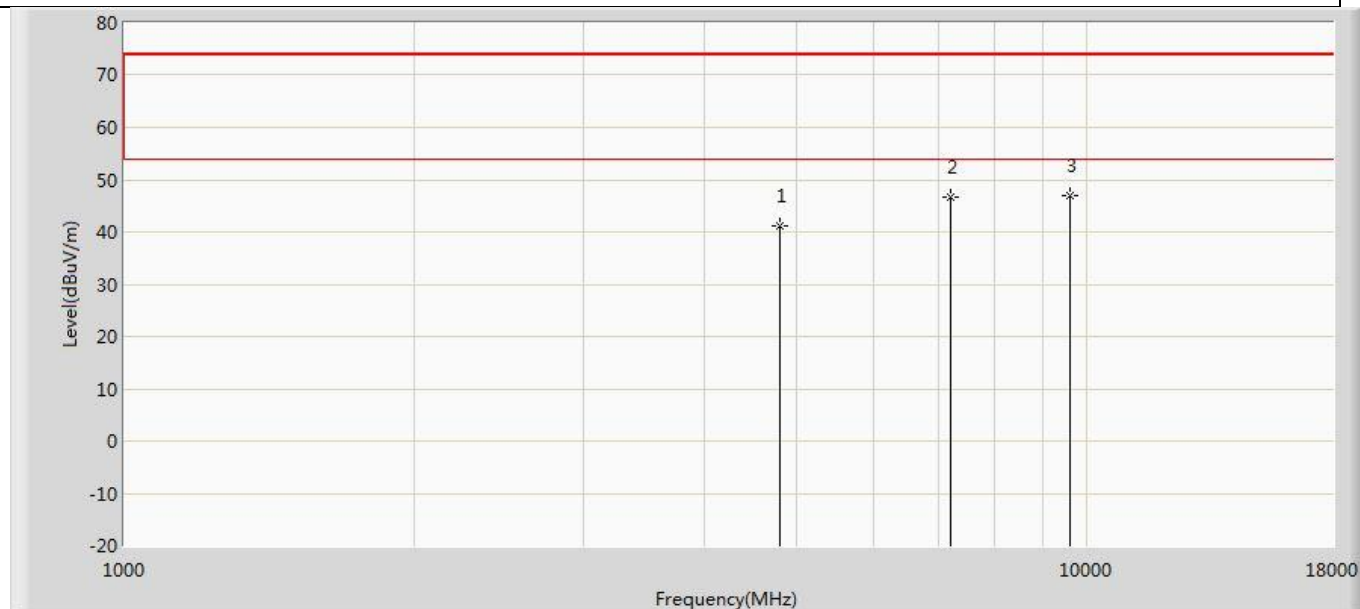


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4804.000	41.287	56.267	-32.713	74.000	-14.981	PK
2		7205.000	46.572	57.384	-27.428	74.000	-10.813	PK
3	*	9608.000	46.881	54.975	-27.119	74.000	-8.094	PK

Profile: 22B0213R	Page No.: 37
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2440MHz by LE_2Mbps	

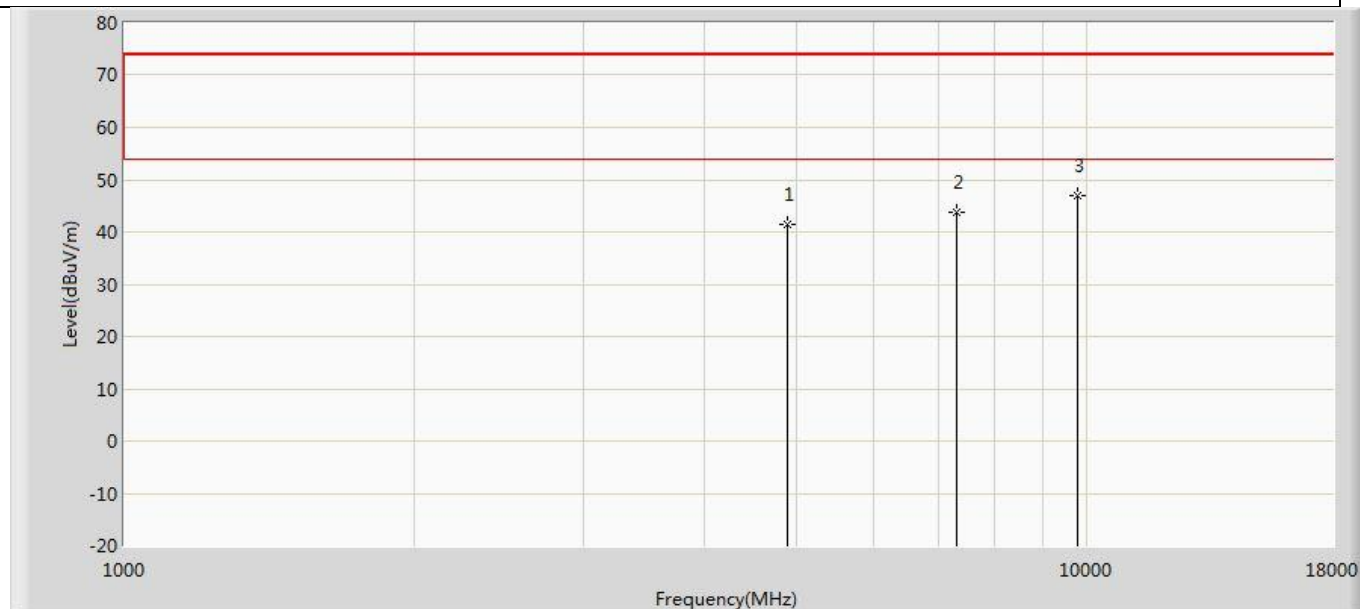


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	41.576	56.176	-32.424	74.000	-14.600	PK
2		7320.000	43.630	54.498	-30.370	74.000	-10.868	PK
3	*	9760.000	46.946	54.743	-27.054	74.000	-7.797	PK

Profile: 22B0213R	Page No.: 38
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2440MHz by LE_2Mbps	

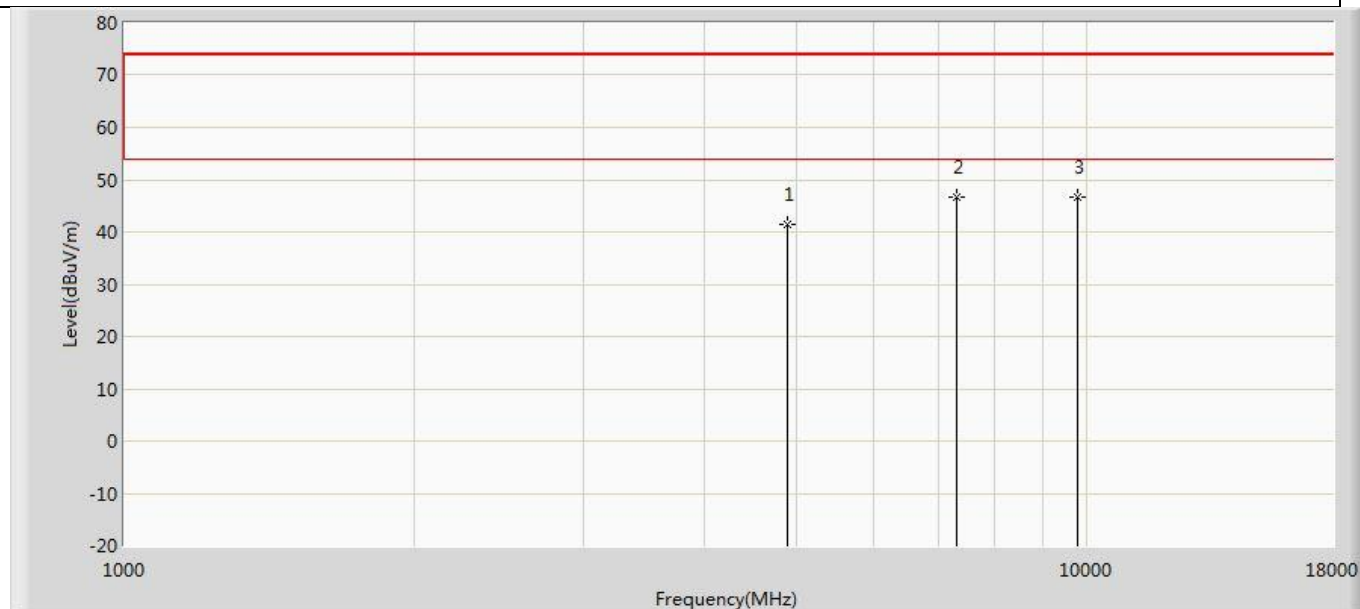


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4880.000	41.392	55.992	-32.608	74.000	-14.600	PK
2		7324.000	46.528	57.407	-27.472	74.000	-10.879	PK
3	*	9760.000	46.719	54.516	-27.281	74.000	-7.797	PK

Profile: 22B0213R	Page No.: 39
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_2Mbps	

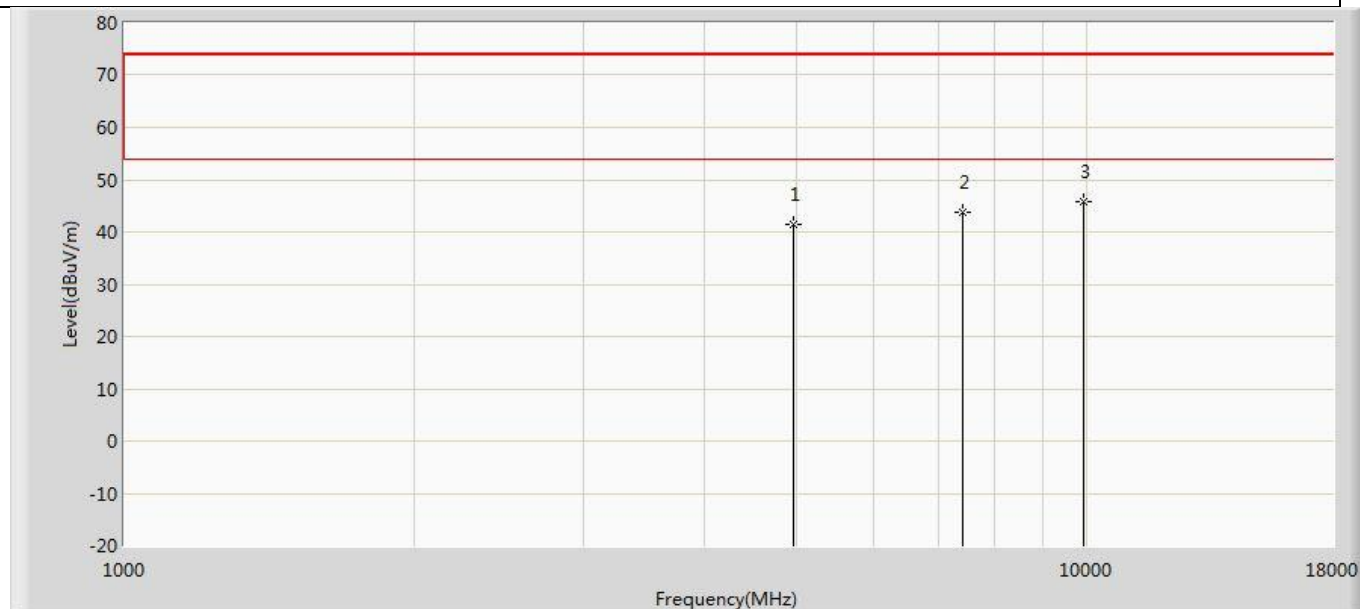

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.349	55.913	-32.651	74.000	-14.565	PK
2		7440.000	43.648	54.379	-30.352	74.000	-10.731	PK
3	*	9920.000	45.879	53.456	-28.121	74.000	-7.578	PK


Profile: 22B0213R	Page No.: 40
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:53
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_2Mbps	

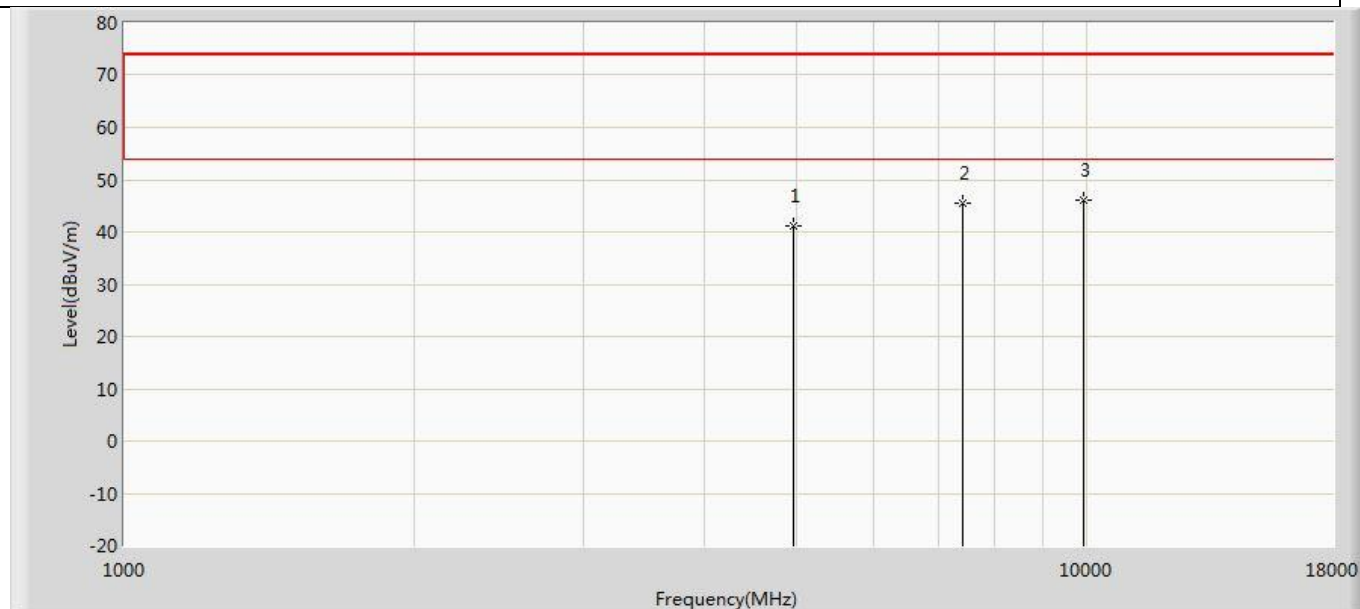

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		4960.000	41.133	55.697	-32.867	74.000	-14.565	PK
2		7440.000	45.505	56.236	-28.495	74.000	-10.731	PK
3	*	9920.000	46.011	53.588	-27.989	74.000	-7.578	PK


The worst case of Radiated Emission below 1GHz:

Profile: 22B0213R	Page No.: 58
Engineer: Yu Liu	
Site: AC2	Time: 2022/11/30 - 20:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Horizontal
EUT: Geolocation Module	Power: DC 3.3V
Note: Mode 1: Transmit at 2440MHz by LE_1Mbps	

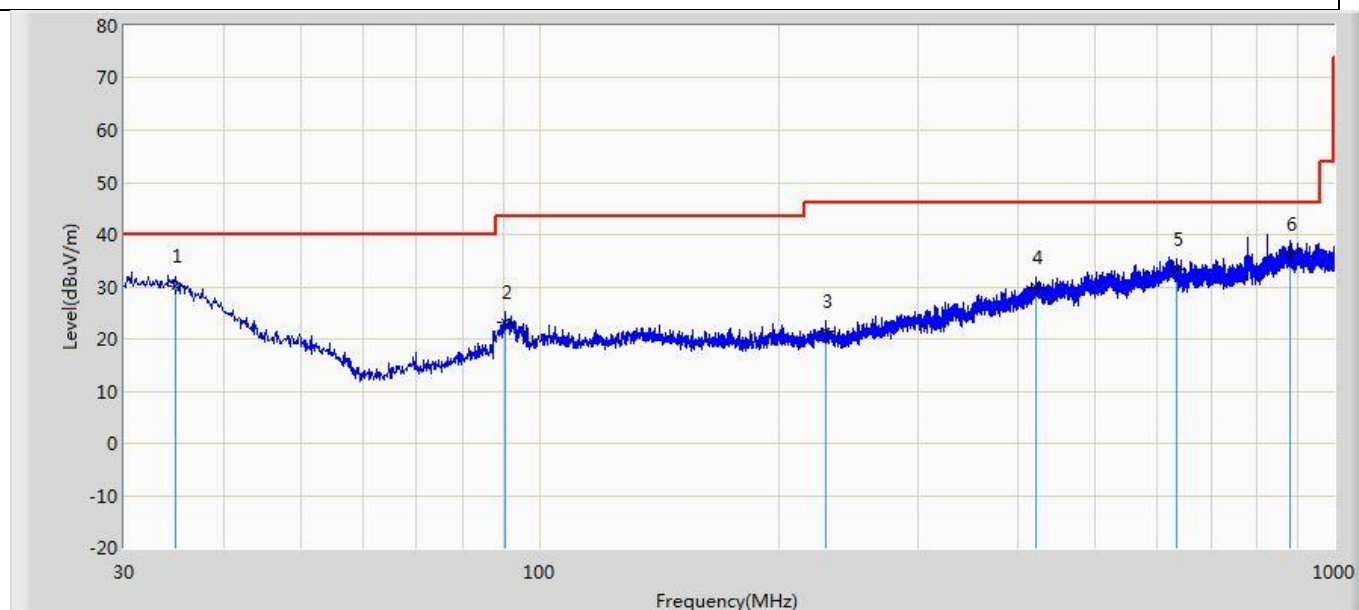

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		34.850	30.008	2.963	-9.992	40.000	27.045	QP
2		90.504	23.313	9.657	-20.187	43.500	13.655	QP
3		229.577	21.477	3.370	-24.523	46.000	18.106	QP
4		422.122	29.866	2.656	-16.134	46.000	27.210	QP
5		634.310	33.416	4.056	-12.584	46.000	29.360	QP
6	*	879.720	36.306	3.779	-9.694	46.000	32.527	QP


Profile: 22B0213R	Page No.: 59
Engineer: Yu Liu	
Site: AC2	Time: 2022/11/30 - 21:00
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: AC2_3M(30-1000M)	Polarity: Vertical
EUT: Geolocation Module	Power: DC 3.3V
Note: Mode 1: Transmit at 2440MHz by LE_1Mbps	

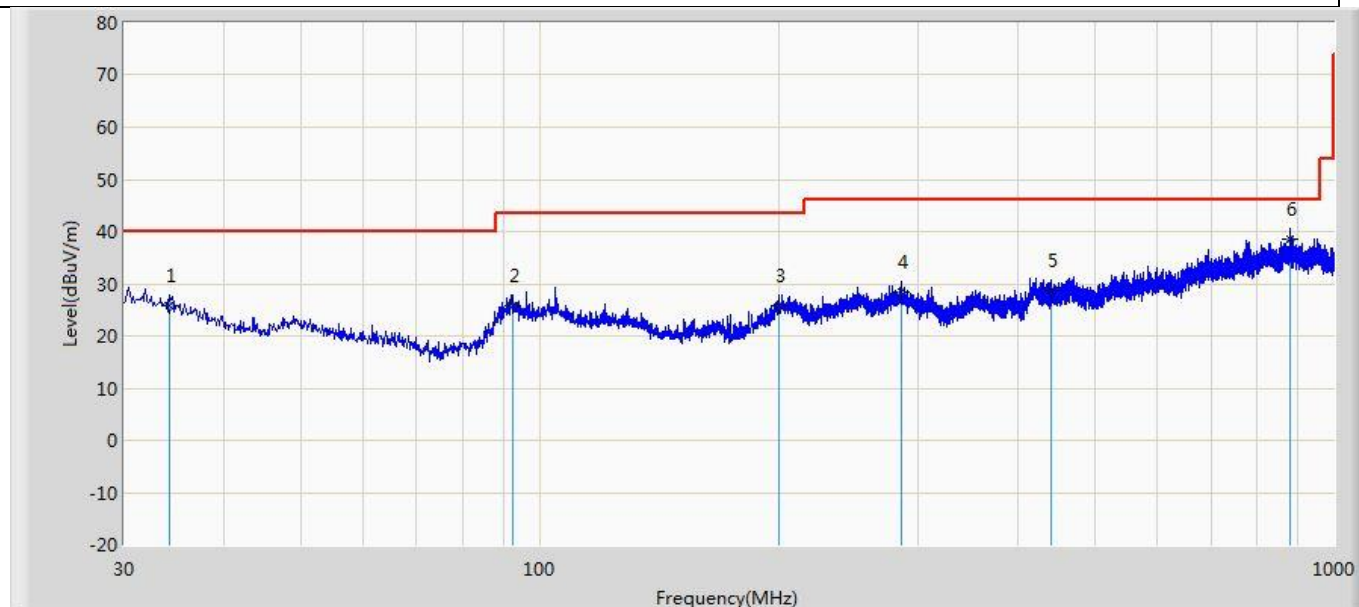

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		34.244	25.926	3.118	-14.074	40.000	22.808	QP
2		92.444	25.850	7.593	-17.650	43.500	18.257	QP
3		200.599	25.694	2.212	-17.806	43.500	23.482	QP
4		284.989	28.441	3.255	-17.559	46.000	25.186	QP
5		440.310	28.611	2.443	-17.389	46.000	26.168	QP
6	*	879.841	38.562	5.144	-7.438	46.000	33.418	QP


The worst case of Radiated Emission above 18GHz:

Profile: 22B0213R	Page No.: 97
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/03 - 20:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Vertical
EUT: Geolocation Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by LE_1Mbps	

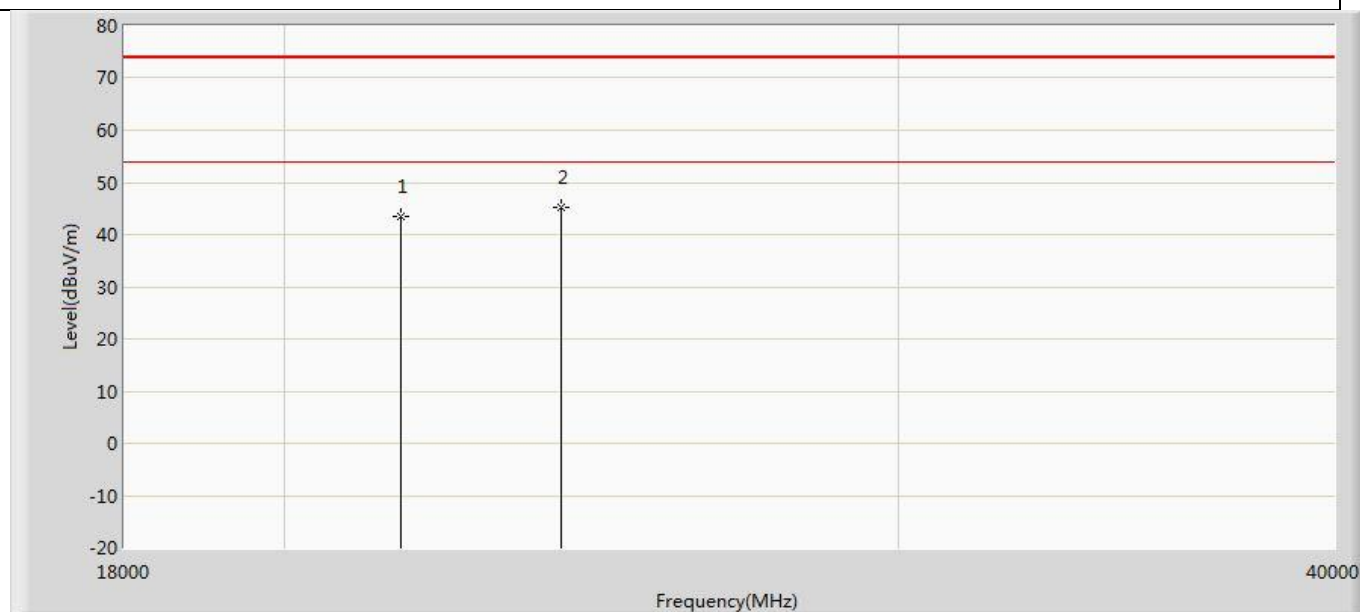

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21618.000	43.477	44.193	-30.523	74.000	-0.716	PK
2	*	24020.000	45.193	44.375	-28.807	74.000	0.818	PK

Profile: 22B0213R	Page No.: 98
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/03 - 20:25
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: BBHA 9170_294(18-40GHz)	Polarity: Horizontal
EUT: Geolocation Module	Power: DC 3.3V
Note: Mode 1:Transmit at 2402MHz by LE_1Mbps	

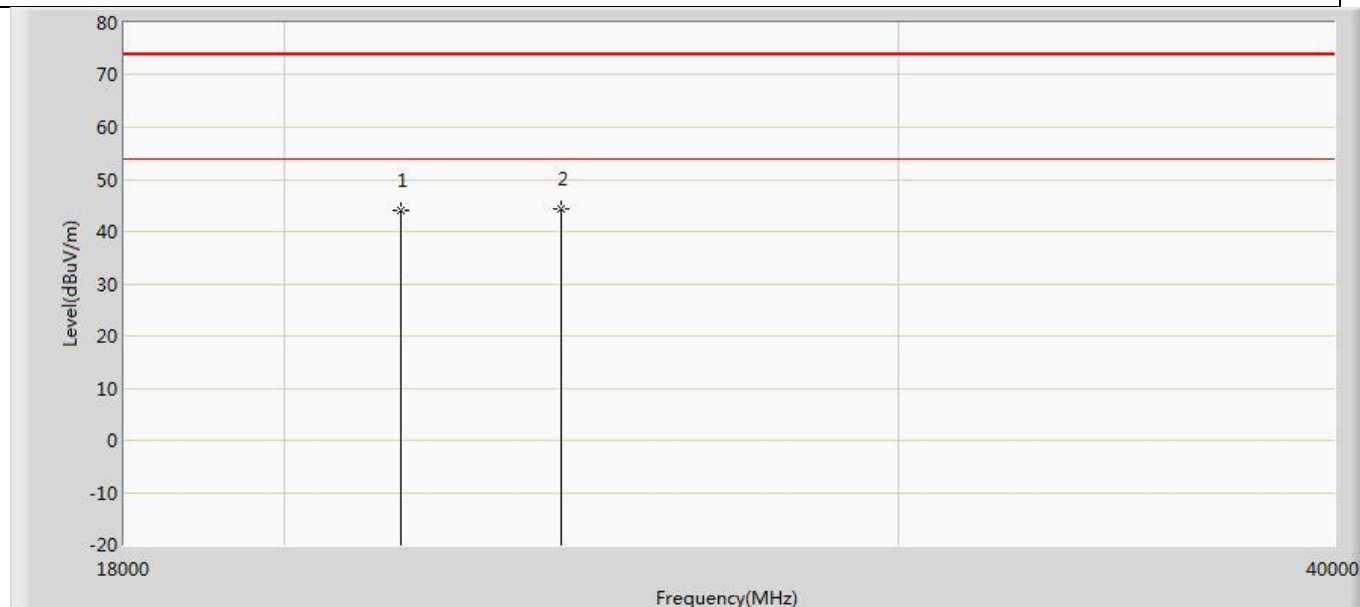

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		21618.000	43.950	44.666	-30.050	74.000	-0.716	PK
2	*	24020.000	44.488	43.670	-29.512	74.000	0.818	PK

Note:


1. Measured Level = Reading Level + Factor.
2. The test frequency range, 9kHz~30MHz, worst case are at least 20dB below the limits, therefore no data appear in the report.
3. This limit applies for both peak and average detector, if the test result on peak is lower than average limit, then average measurement needn't be performed.
4. The points in graph are the highest data in test frequency range.

4.3 Emissions in non-restricted frequency band**VERDICT: PASS****4.3.1 Limit**

Standard	FCC Part 15 Subpart C Paragraph 15.247(d)
RF Output power (Detection methods)	Limit(dB)
RF Output power(Average detector)	30dBc(Note1)
RF Output power(PK detector)	20dBc(Note2)

Note 1: If maximum conducted (average) output power was used to demonstrate compliance as described in 9.2, then the peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 30 dBc).


Note 2: If the maximum peak conducted output power procedure was used, then the peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz (i.e., 20 dBc).

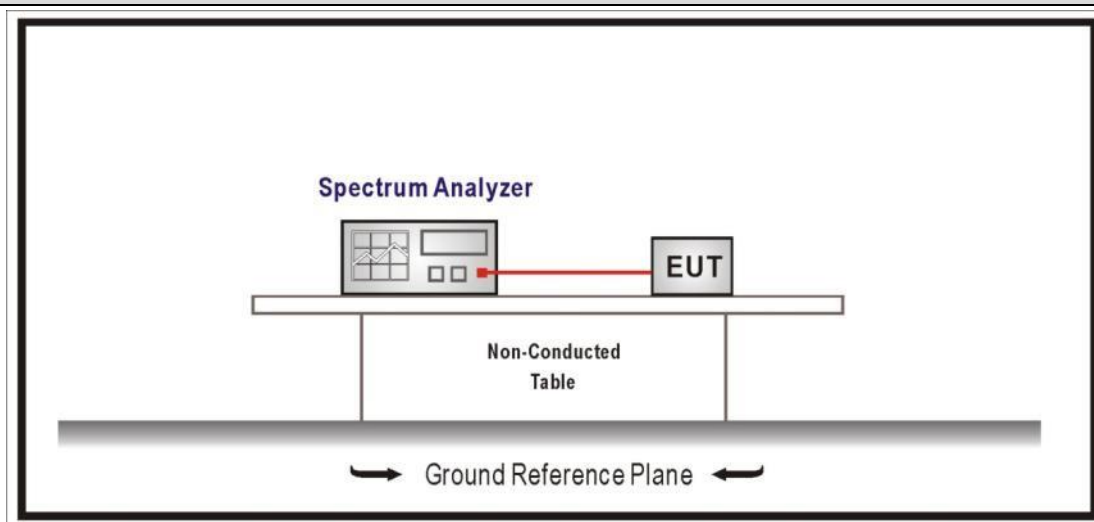4.3.2 Test Setup**4.3.3 Test Procedure**

References Rule	Chapter	Description
☒ ANSI C63.10	11.11	Emissions in non-restricted frequency bands
☒ ANSI C63.10	11.11.1	General
☒ ANSI C63.10	11.11.2	Reference level measurement
☒ ANSI C63.10	11.11.3	Emission level measurement

4.3.4 Test Data


BLE_1M_Ant1_Low_2402

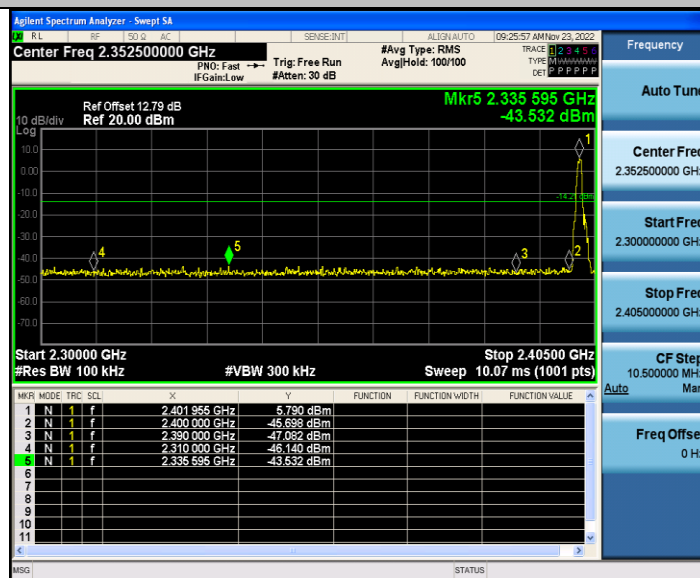


BLE_1M_Ant1_2402_0~Reference



BLE_1M_Ant1_2402_30~1000

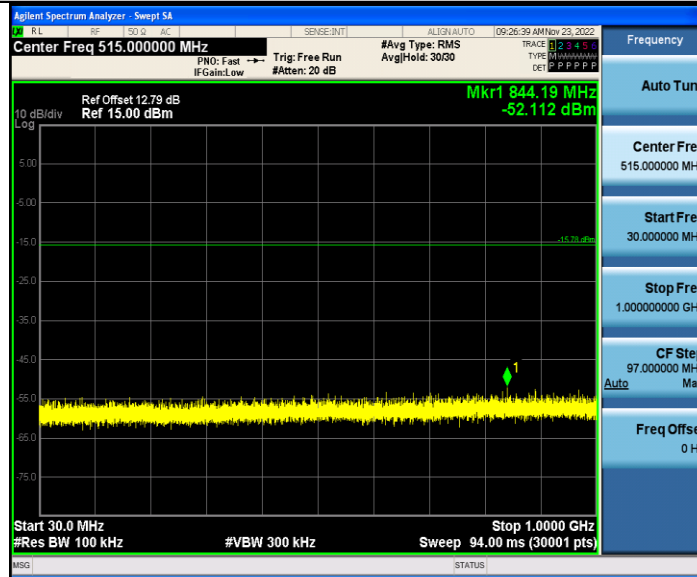


BLE_1M_Ant1_2402_1000~26500

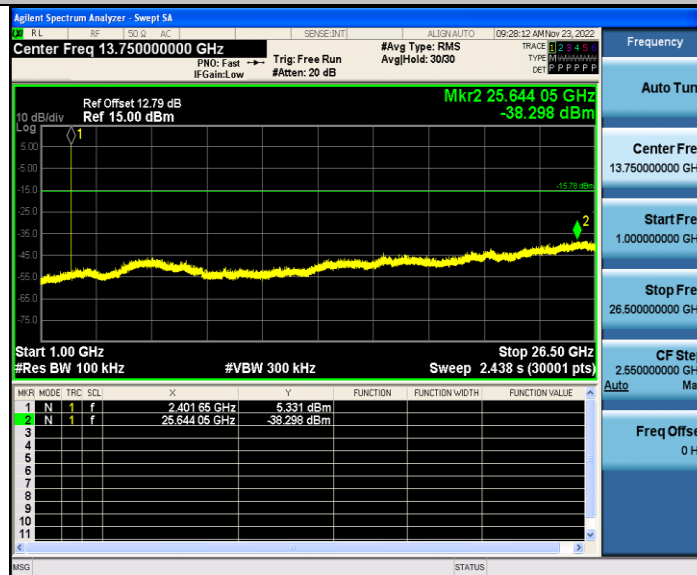


BLE_1M_Ant1_2440_0~Reference




BLE_1M_Ant1_2440_30~1000

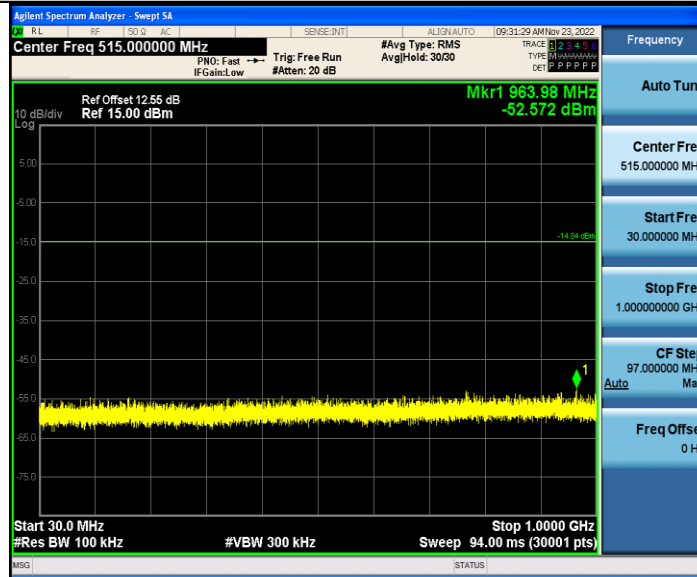

BLE_1M_Ant1_2440_1000~26500

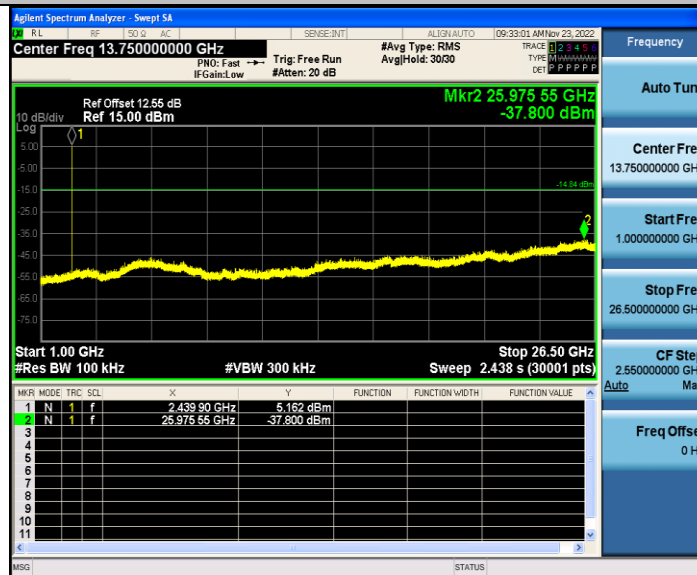


BLE_1M_Ant1_High_2480

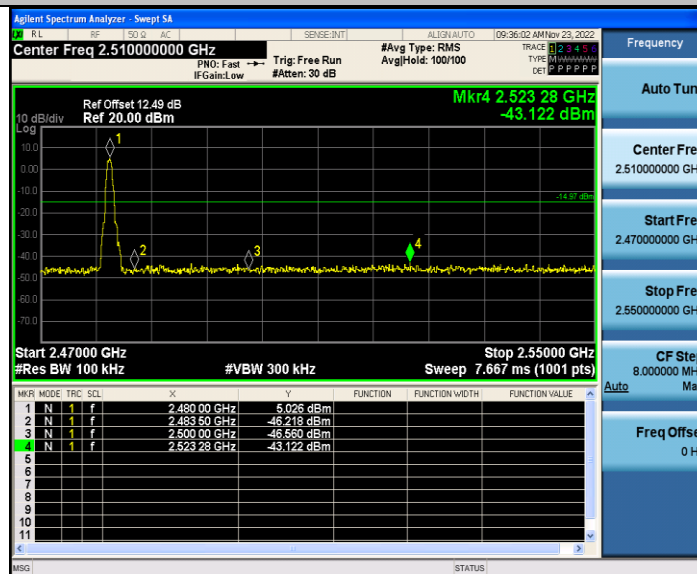

BLE_1M_Ant1_2480_0~Reference




BLE_1M_Ant1_2480_30~1000

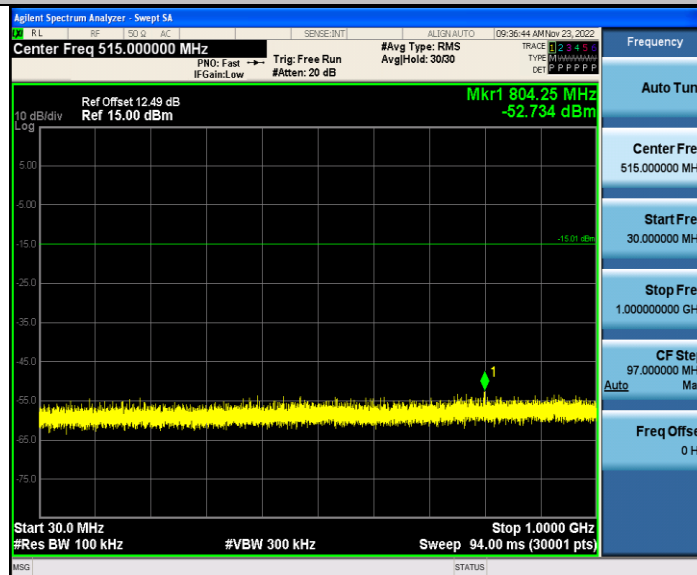


BLE_1M_Ant1_2480_1000~26500




BLE_2M_Ant1_Low_2402

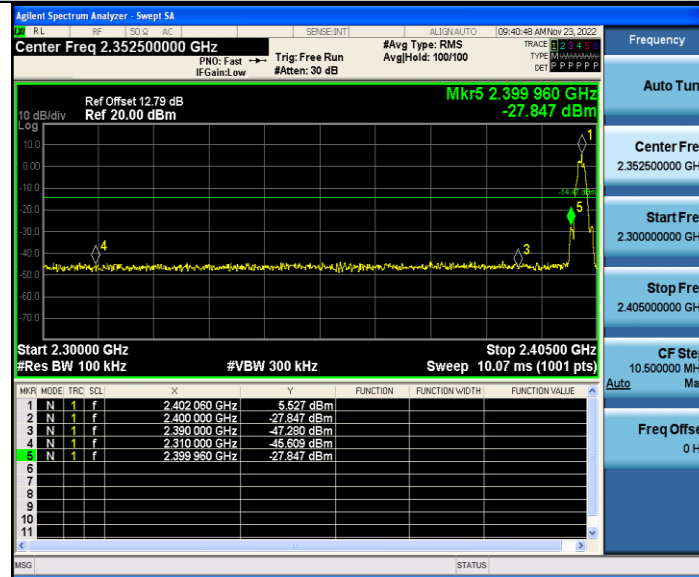

BLE_2M_Ant1_2402_0~Reference

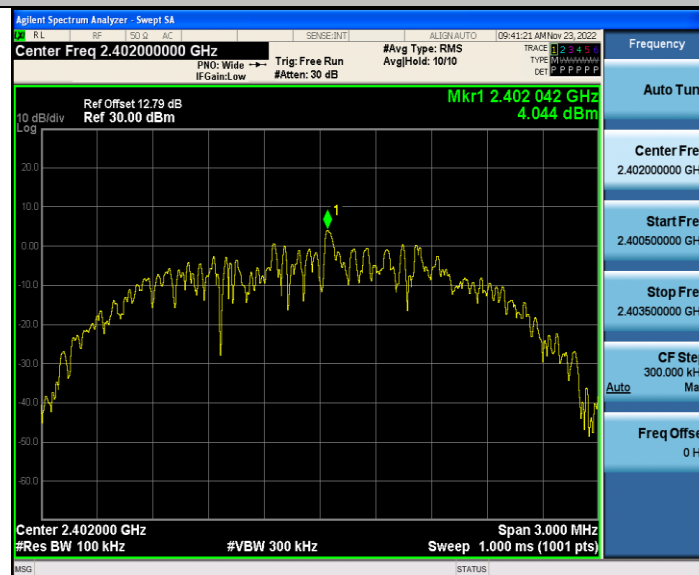

BLE_2M_Ant1_2402_30~1000

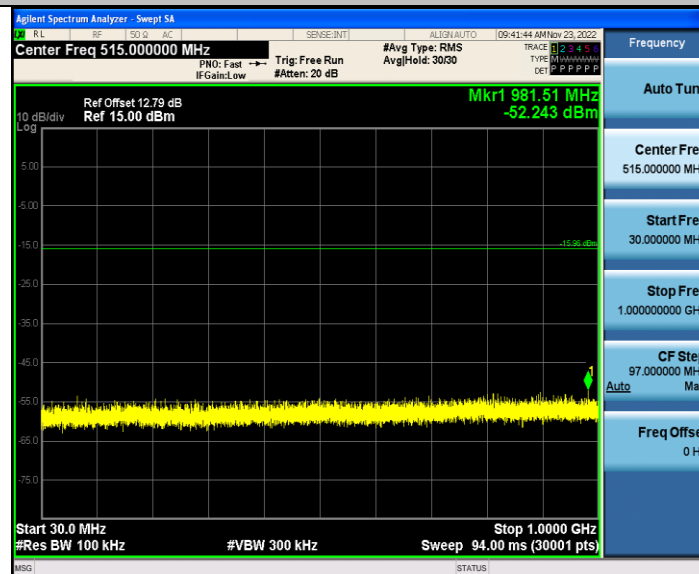


BLE_2M_Ant1_2402_1000~26500



BLE_2M_Ant1_2440_0~Reference




BLE_2M_Ant1_2440_30~1000

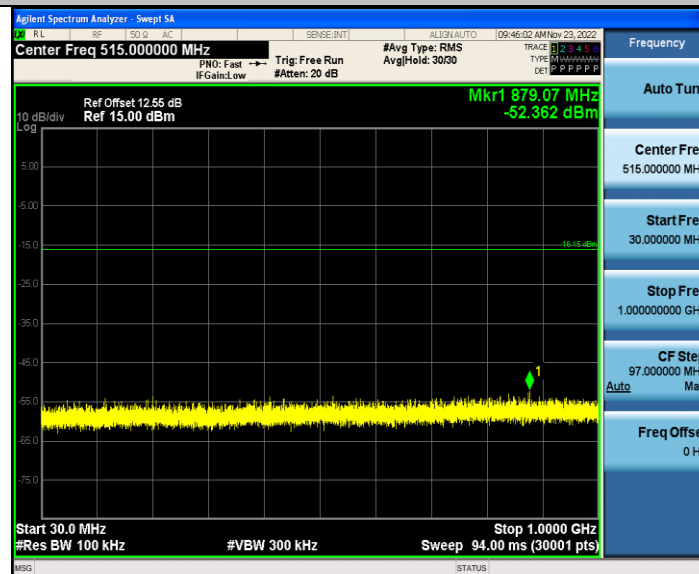


BLE_2M_Ant1_2440_1000~26500




BLE_2M_Ant1_High_2480

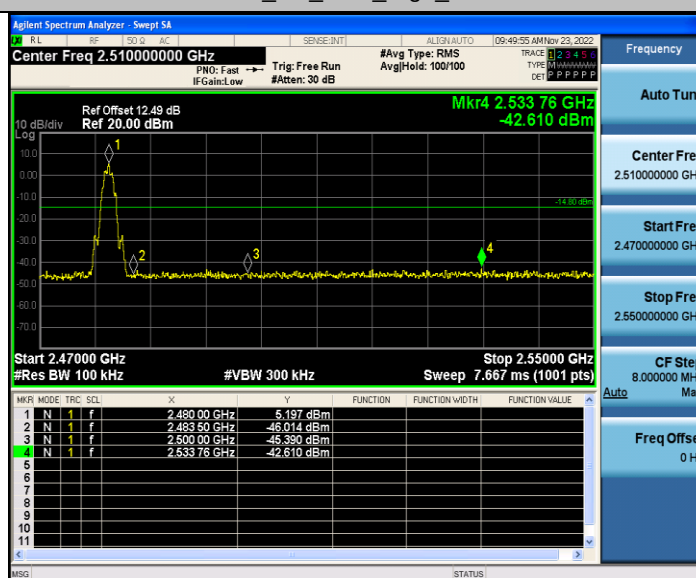

BLE_2M_Ant1_2480_0~Reference

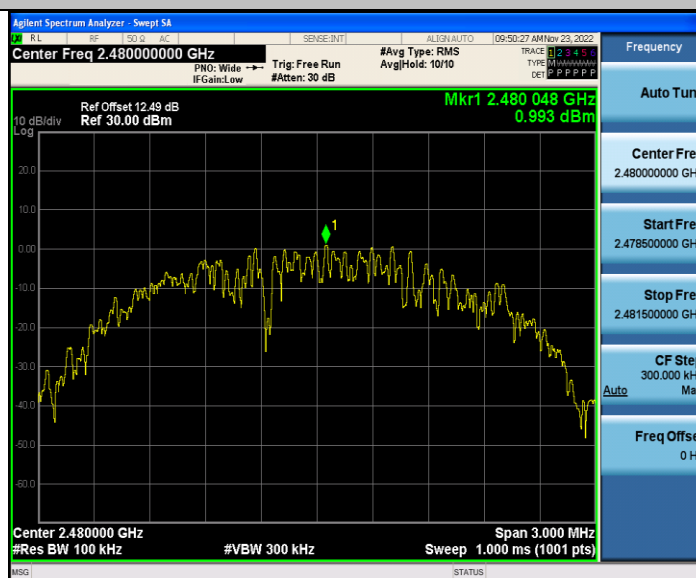

BLE_2M_Ant1_2480_30~1000

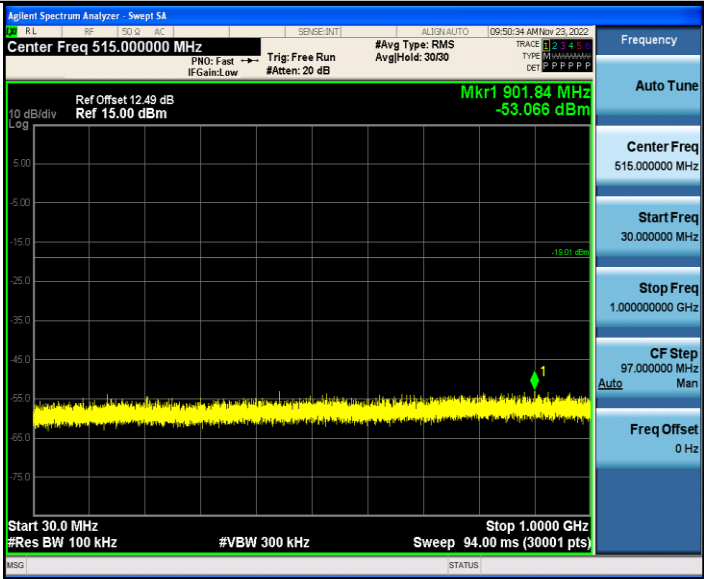


BLE_2M_Ant1_2480_1000~26500



4.4 Duty cycle**VERDICT: PASS****4.4.1 Limit**

N/A

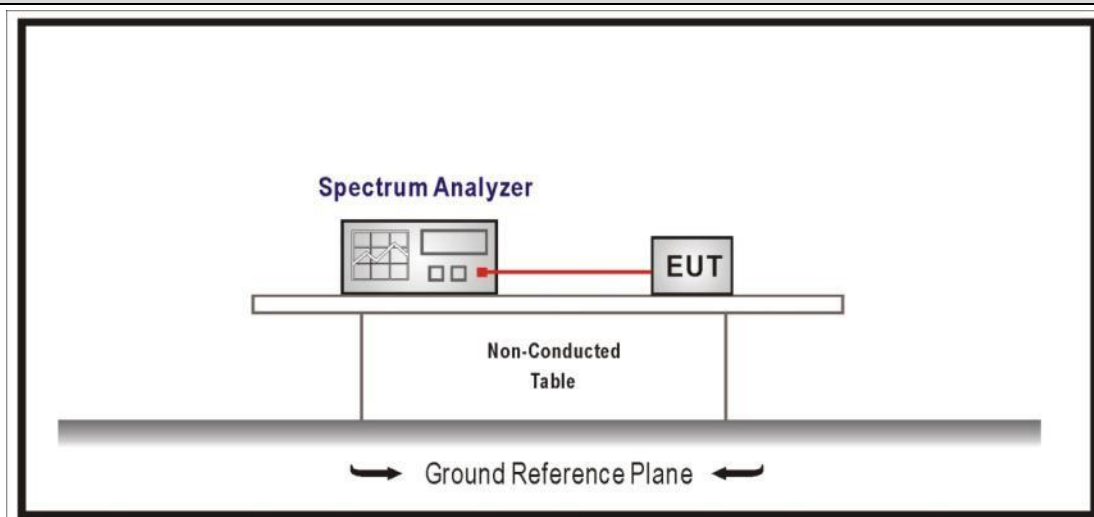4.4.2 Test Setup**4.4.3 Test Procedure**

References Rule		Chapter	Description
☒	ANSI C63.10	11.6	Duty cycle (D), transmission duration (T), and maximum power control level


4.4.4 Test Data

Test Mode	Tx On (us)	Tx Off (us)	VBW (kHz)	Tx On + Tx Off (us)	Duty Cycle (%)
Mode 1	412	212	2.5	624	66.02
Mode 2	226	396	4.5	622	36.33


Note 1: T means the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Note 2: According to KDB 558074, when test for Radiated Emission Band Edge and Radiated Emission, for average detector set: $VBW \geq 1/T$ will be used.

Mode 1 CH19 2440MHz

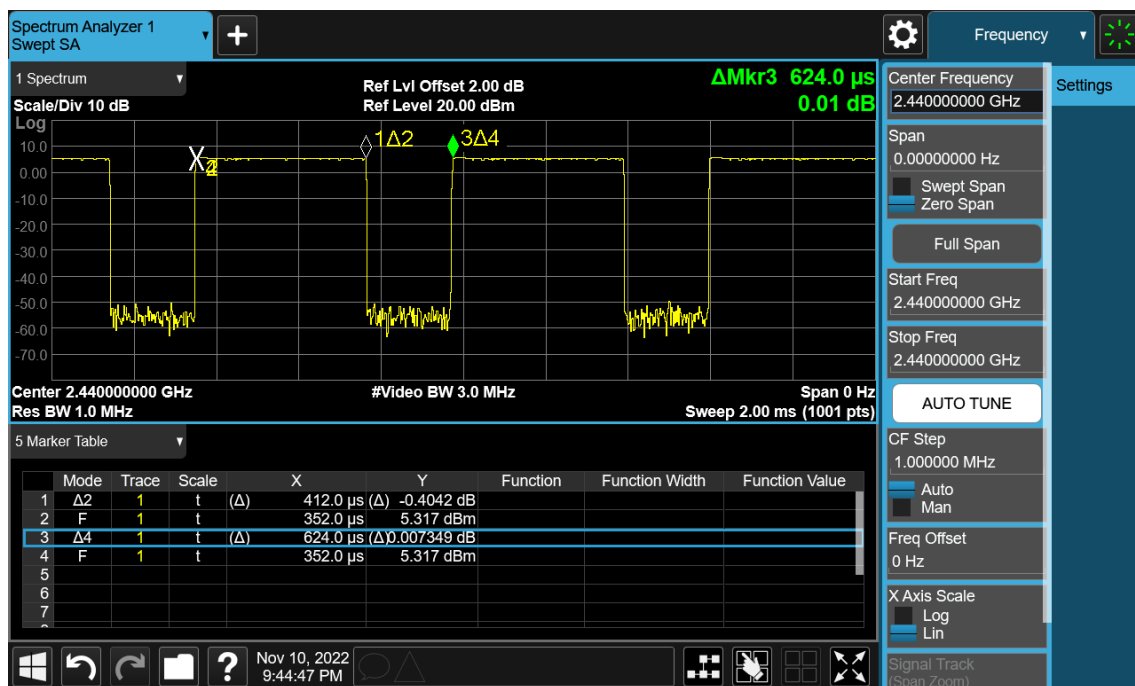

Mode 2 CH19 2440MHz

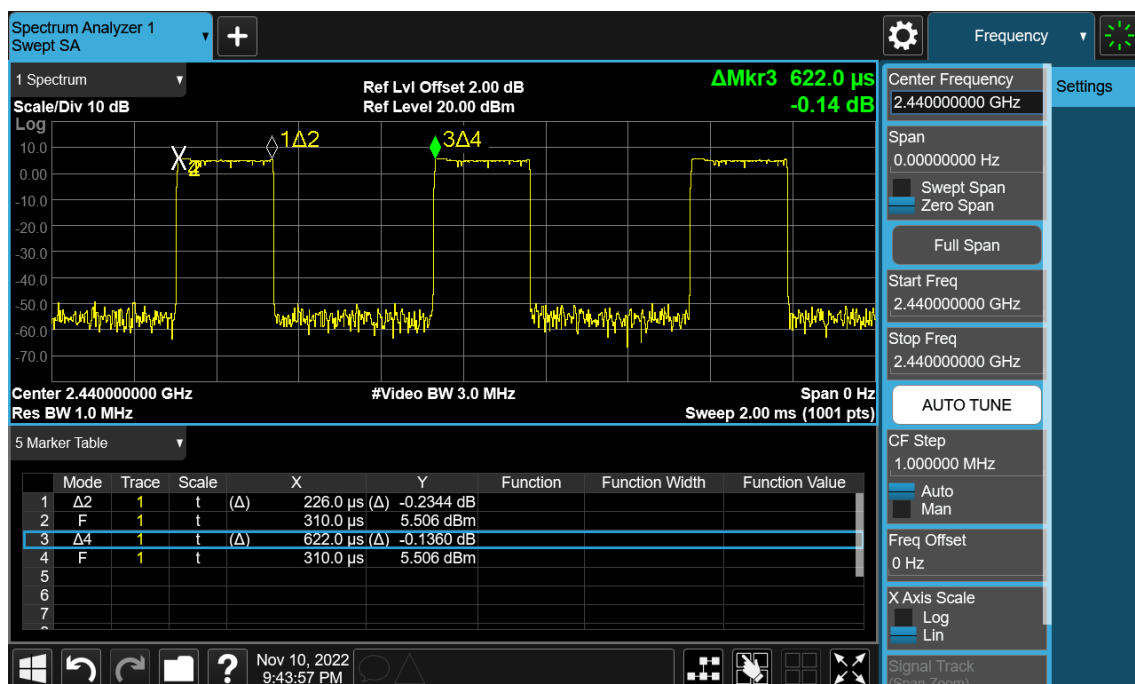

4.5 Band Edge


VERDICT: PASS

4.5.1 Limit

Standard		FCC Part 15 Subpart C Paragraph 15.247(d) ,15.209		
Frequency bands (MHz)	Detector	Limit (dB μ V/m)	RBW (MHz)	Distance (m)
2310-2390	PK	74	1	3
2483.5-2500	AV	54	1	3

Note: The field strength of emissions appearing within these frequency bands shall not exceed the limits.

4.5.2 Test Setup

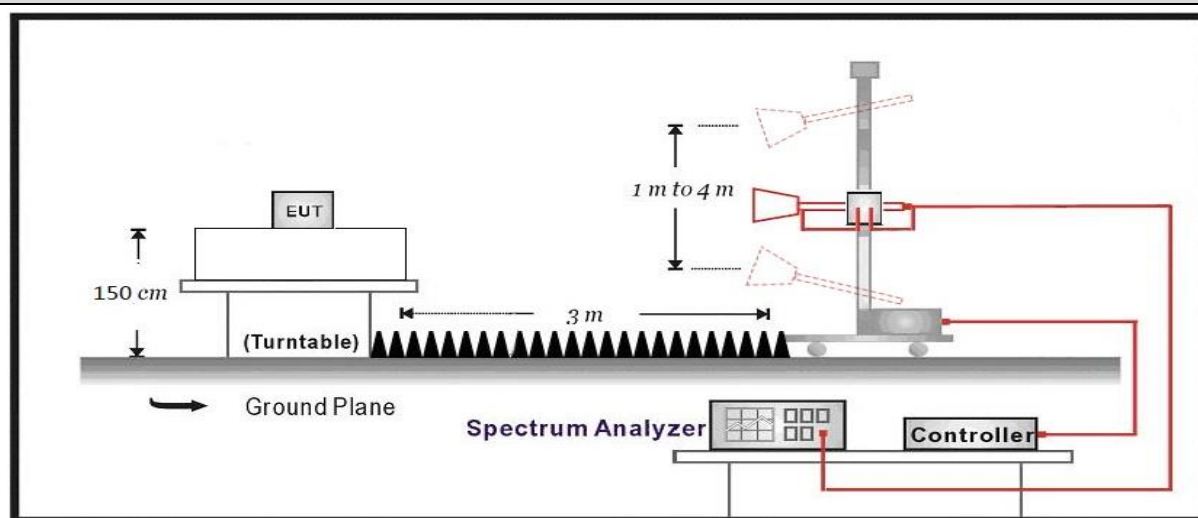


4.5.3 Test Procedure

	References Rule	Chapter	Description
☒	ANSI C63.10	6.10	Band-edge testing
	☒ ANSI C63.10	6.10.5	Restricted-band band-edge measurements
	☐ ANSI C63.10	6.10.6	Marker-delta method
☒	ANSI C63.10	11.12	Emissions in restricted frequency bands
	☒ ANSI C63.10	11.12.2	Antenna-port conducted measurements
	☐ ANSI C63.10	11.12.2.3	Quasi-peak measurement procedure
	☒ ANSI C63.10	11.12.2.4	Peak power measurement procedure
	☒ ANSI C63.10	11.12.2.5	Average power measurement procedures


4.5.4 Test Data

Profile: 22B0213R	Page No.: 1
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/01 - 23:29
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Mode1:Transmit at 2402MHz by LE_1Mbps	

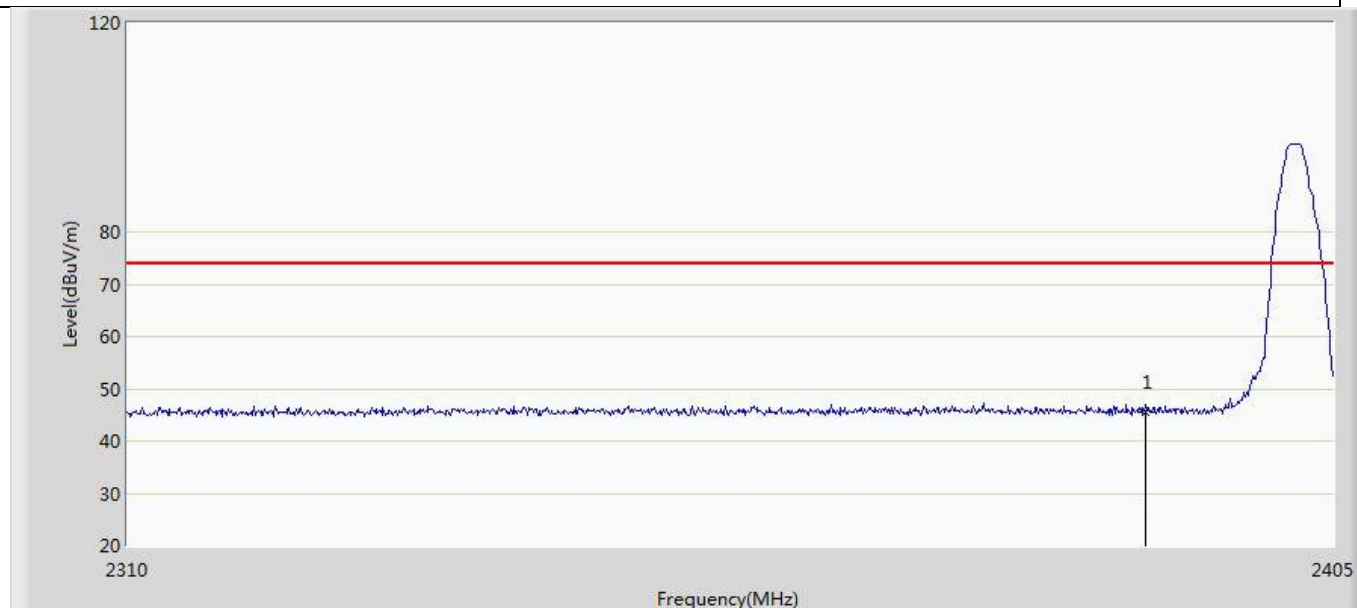


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	45.555	11.471	-28.445	74.000	34.084	PK

Profile: 22B0213R	Page No.: 2
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/01 - 23:46
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_1Mbps	

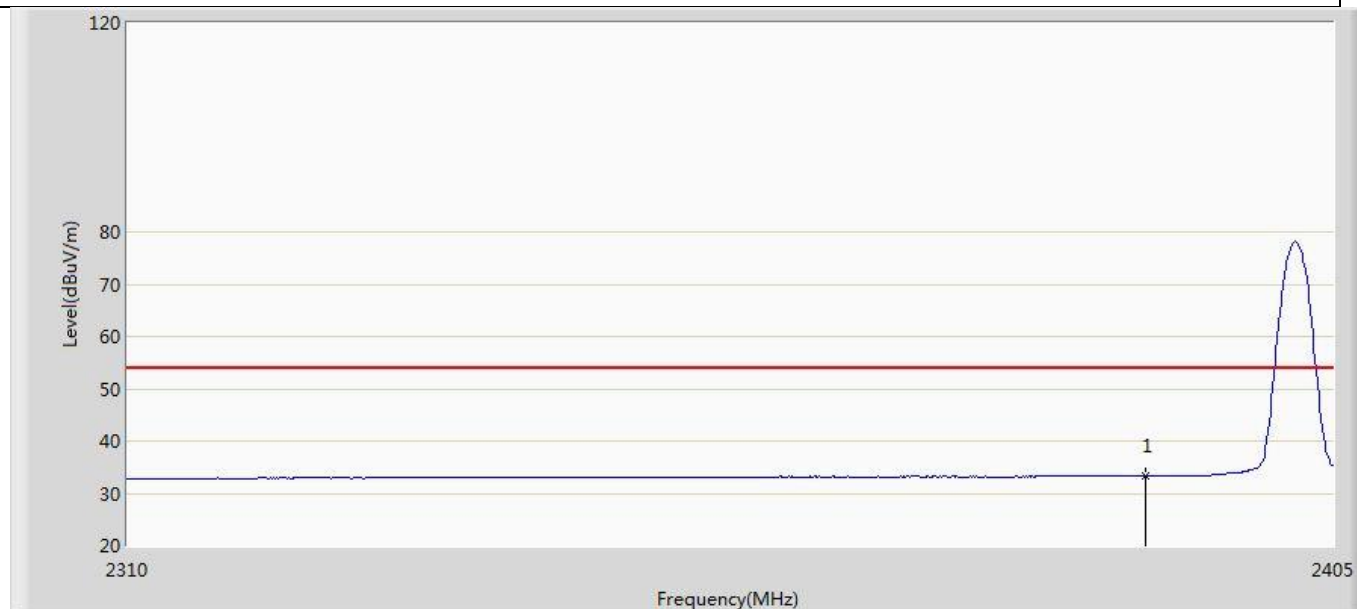


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.276	-0.808	-20.724	54.000	34.084	AV

Profile: 22B0213R	Page No.: 3
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/01 - 23:48
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_1Mbps	

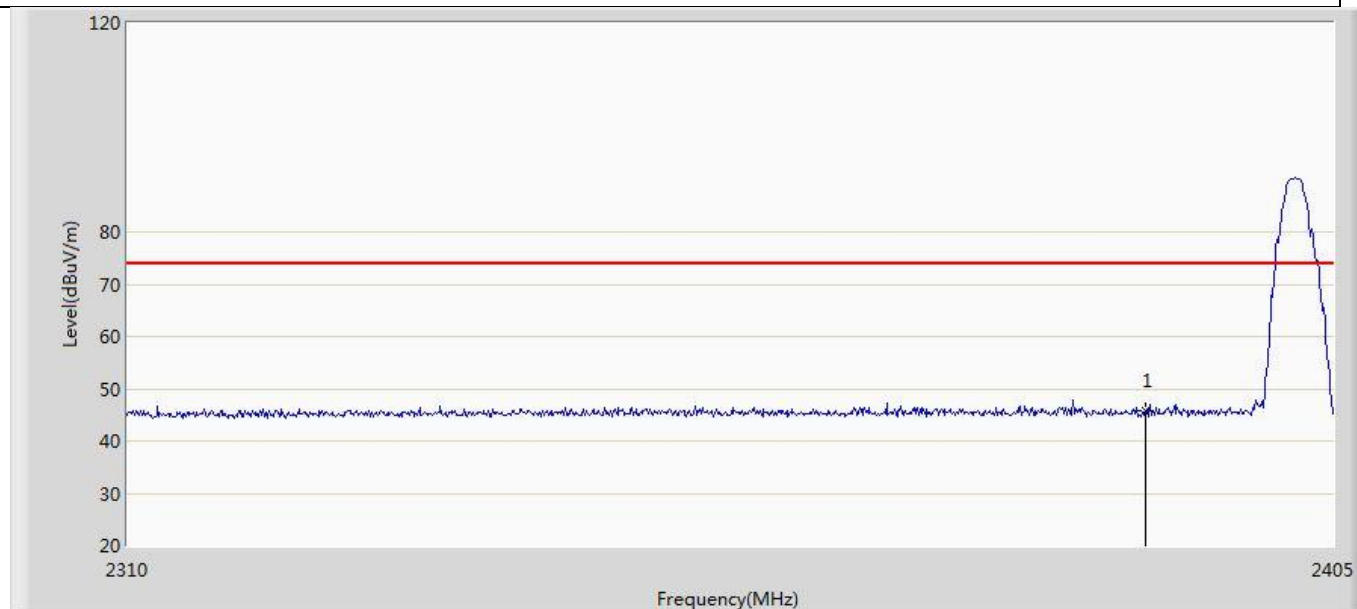


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	45.736	11.652	-28.264	74.000	34.084	PK

Profile: 22B0213R	Page No.: 4
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/01 - 23:50
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_1Mbps	

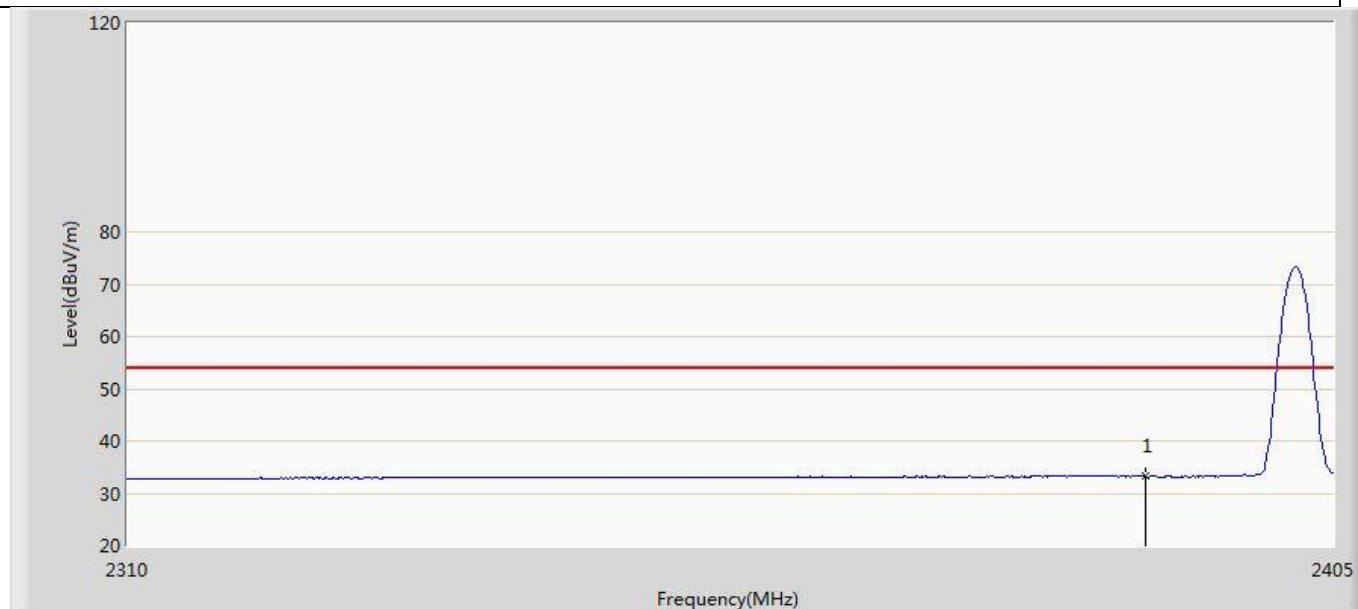


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.206	-0.878	-20.794	54.000	34.084	AV

Profile: 22B0213R	Page No.: 5
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/01 - 23:52
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_1Mbps	

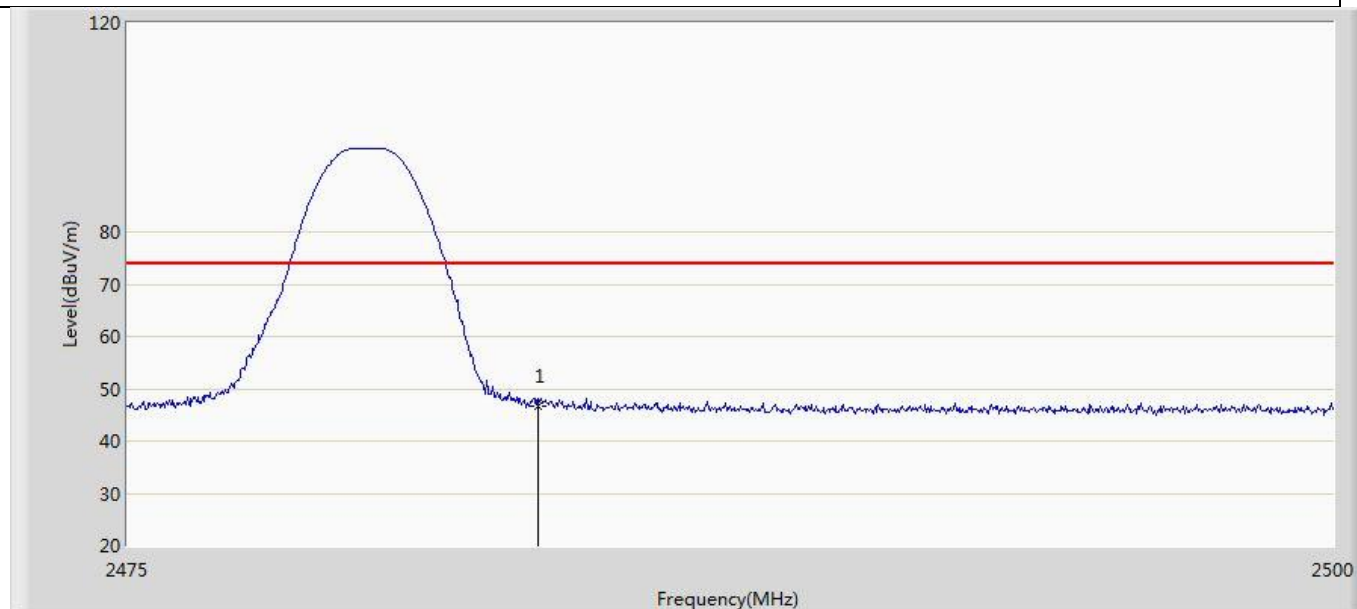


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.797	12.306	-27.203	74.000	34.491	PK

Profile: 22B0213R	Page No.: 6
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/01 - 23:54
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_1Mbps	

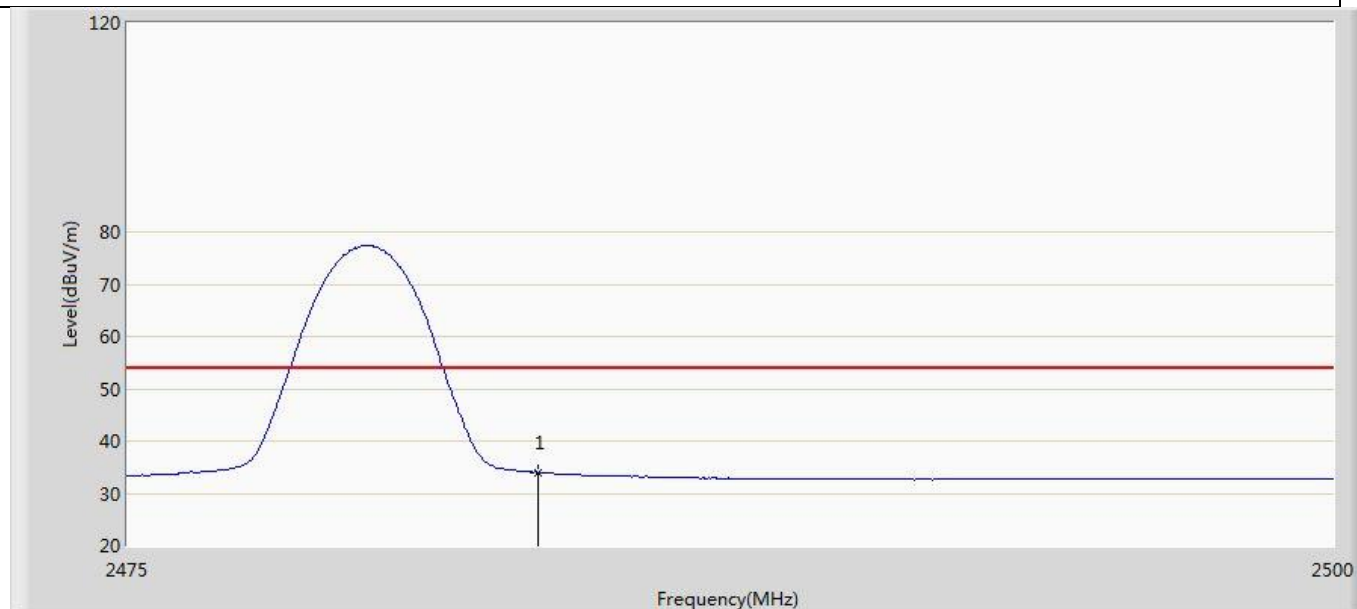


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	33.945	-0.546	-20.055	54.000	34.491	AV

Profile: 22B0213R	Page No.: 7
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/01 - 23:56
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_1Mbps	

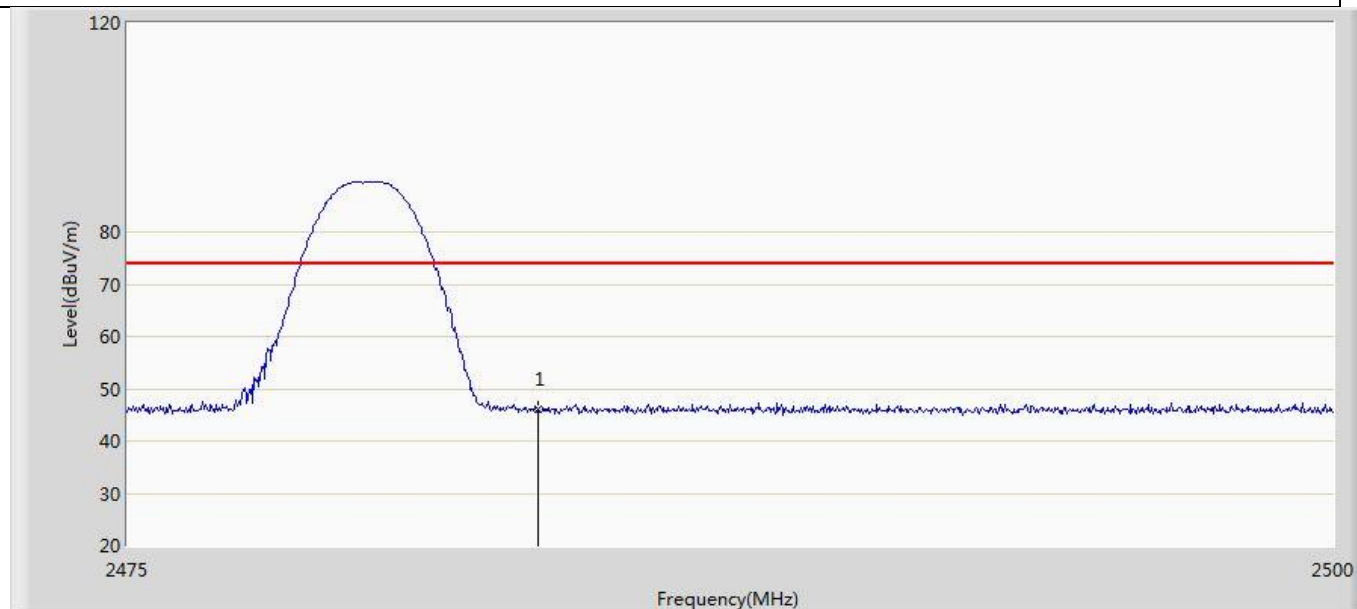


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	46.140	11.649	-27.860	74.000	34.491	PK

Profile: 22B0213R	Page No.: 8
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/01 - 23:58
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_1Mbps	

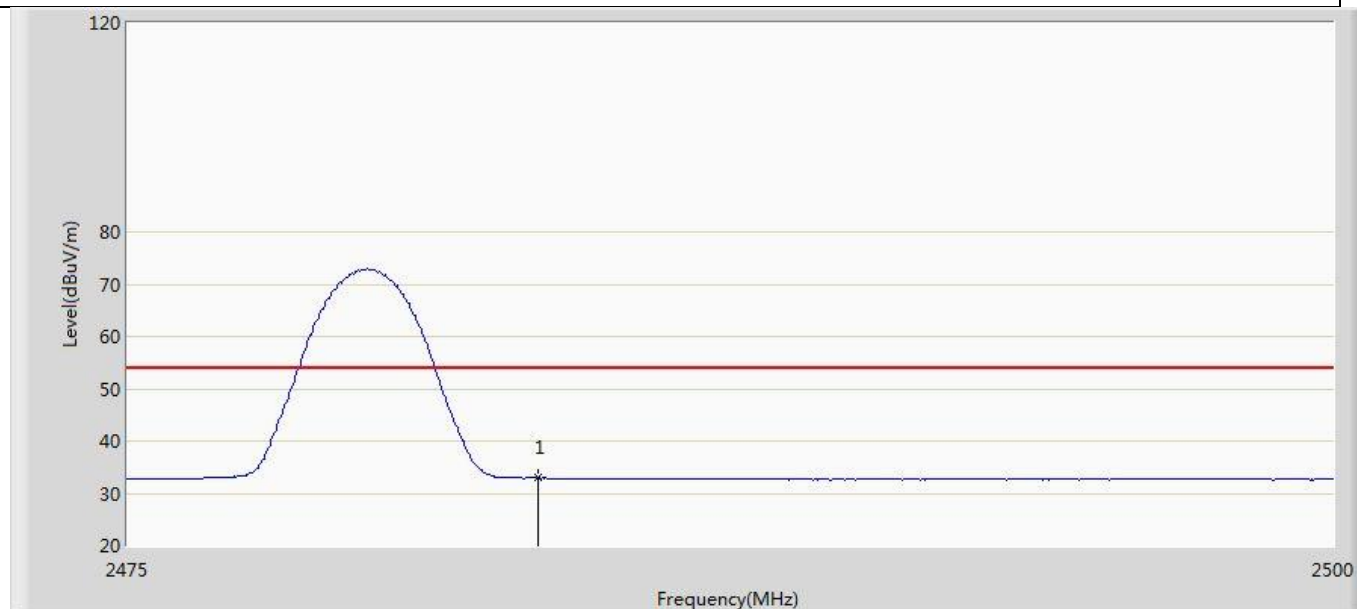


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	32.936	-1.555	-21.064	54.000	34.491	AV

Profile: 22B0213R	Page No.: 9
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/01 - 23:59
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_2Mbps	

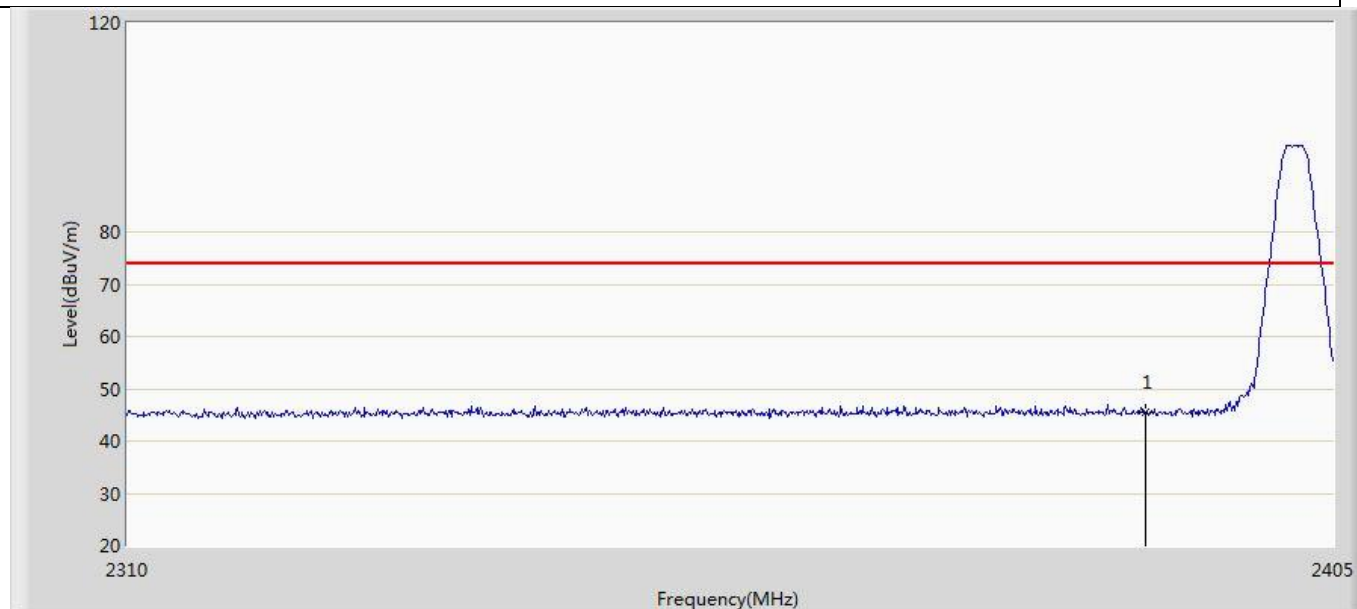


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	45.373	11.289	-28.627	74.000	34.084	PK

Profile: 22B0213R	Page No.: 10
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:02
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_2Mbps	

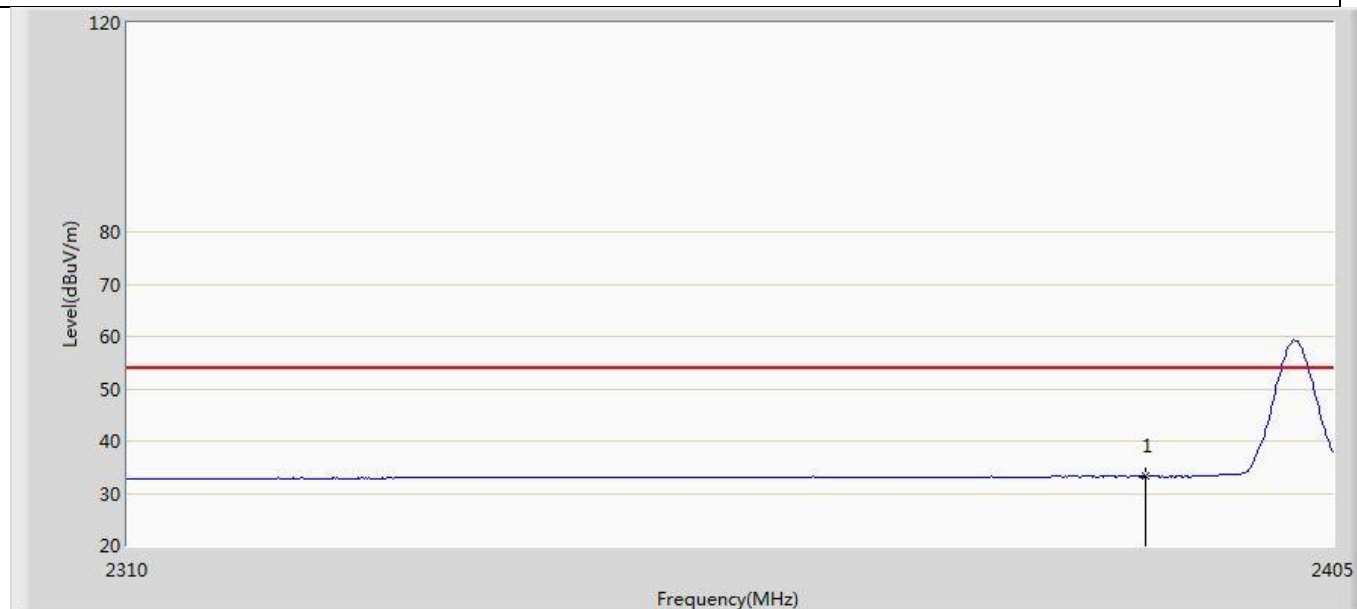


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.199	-0.885	-20.801	54.000	34.084	AV

Profile: 22B0213R	Page No.: 11
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:03
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_2Mbps	

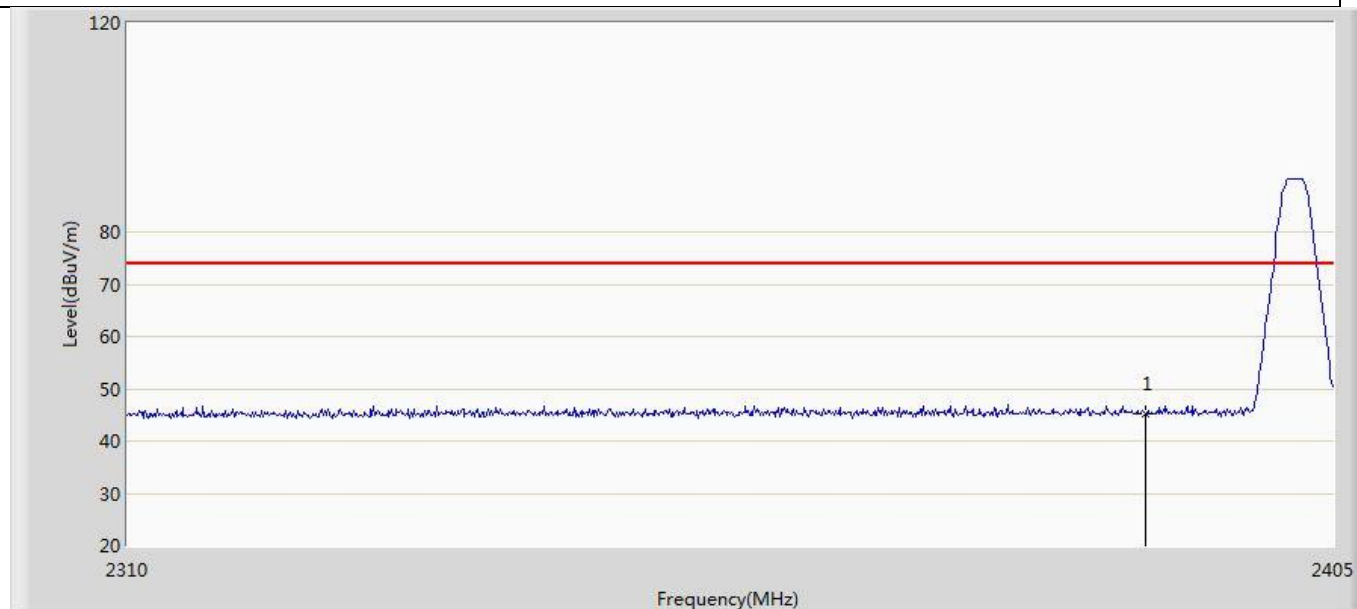


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	45.233	11.149	-28.767	74.000	34.084	PK

Profile: 22B0213R	Page No.: 12
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:06
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2402MHz by LE_2Mbps	

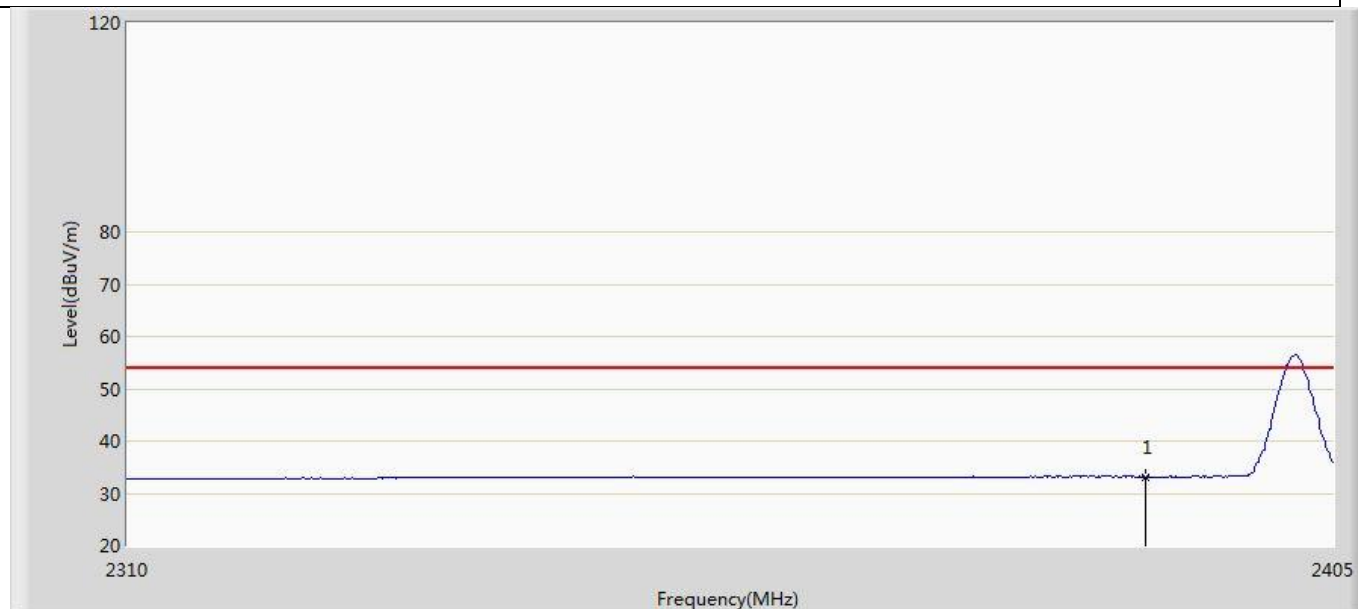


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2390.000	33.182	-0.902	-20.818	54.000	34.084	AV

Profile: 22B0213R	Page No.: 13
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:11
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_2Mbps	

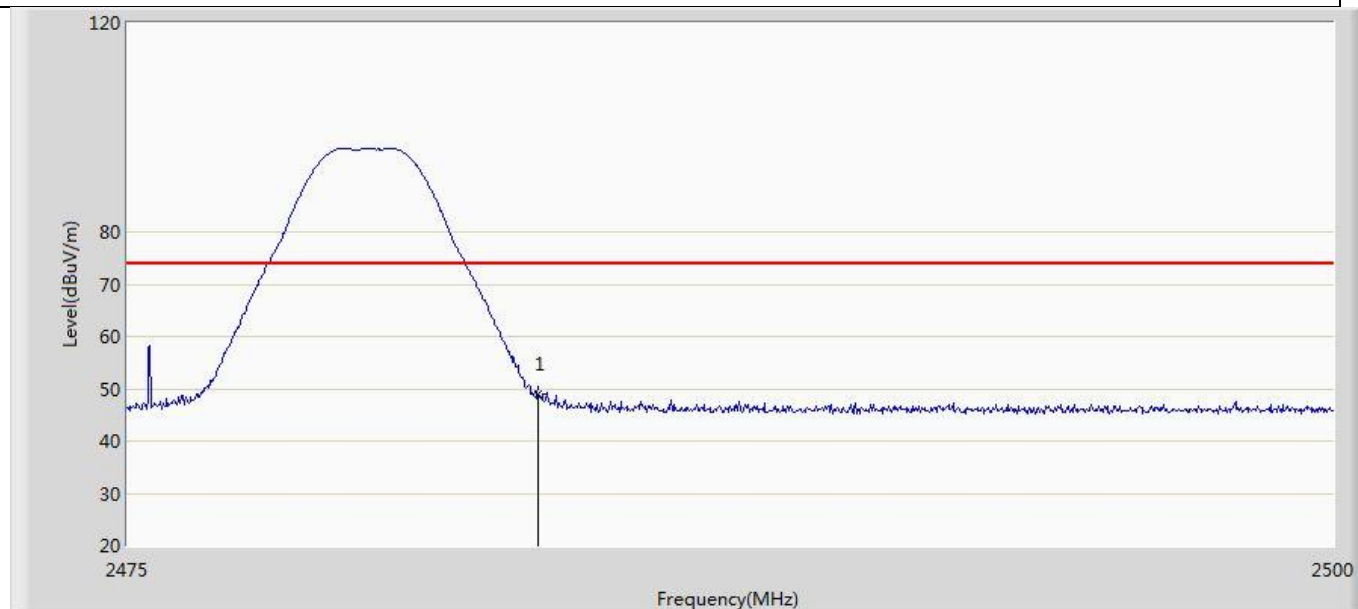


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	48.871	14.380	-25.129	74.000	34.491	PK

Profile: 22B0213R	Page No.: 14
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:13
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Horizontal
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_2Mbps	

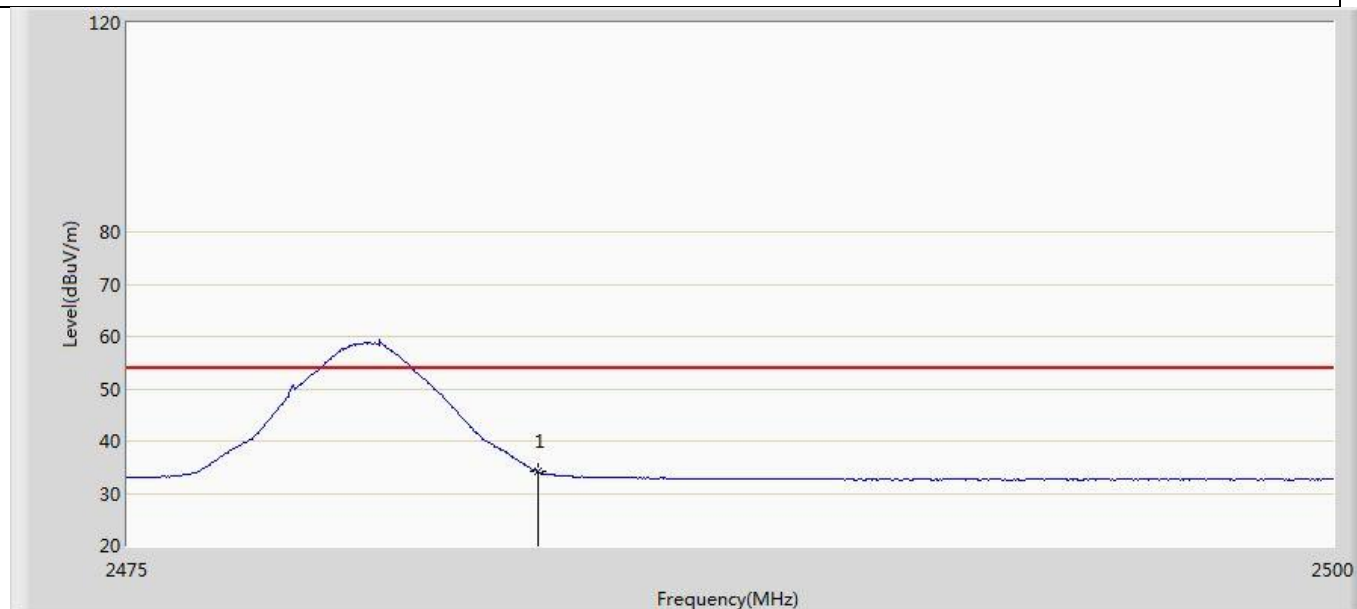


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	34.112	-0.379	-19.888	54.000	34.491	AV

Profile: 22B0213R	Page No.: 15
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:15
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_2Mbps	

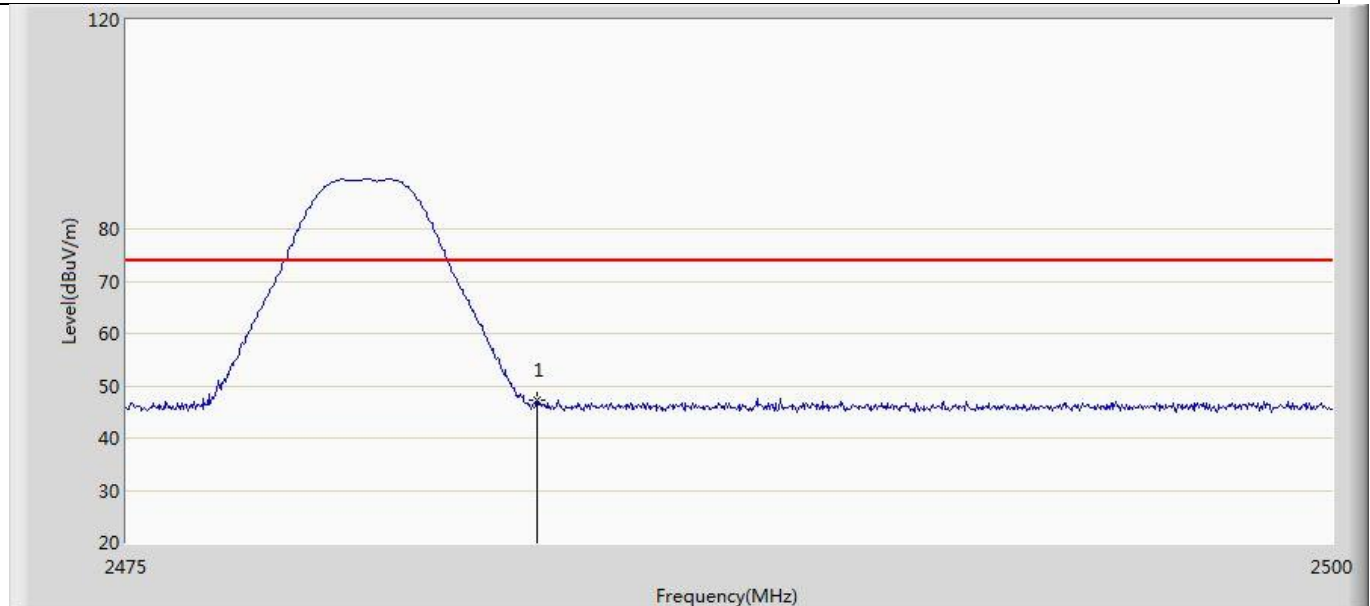

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	47.200	12.709	-26.800	74.000	34.491	PK

Profile: 22B0213R	Page No.: 16
Engineer: Yu Liu	
Site: AC5	Time: 2022/12/02 - 00:17
Limit: FCC_Part15.209_RE(3m)	Margin: 0
Probe: Horn_3117_00167055(1-18GHz)2022	Polarity: Vertical
EUT: Geolocation Module	Power:DC 3.3V
Note: Model1:Transmit at 2480MHz by LE_2Mbps	

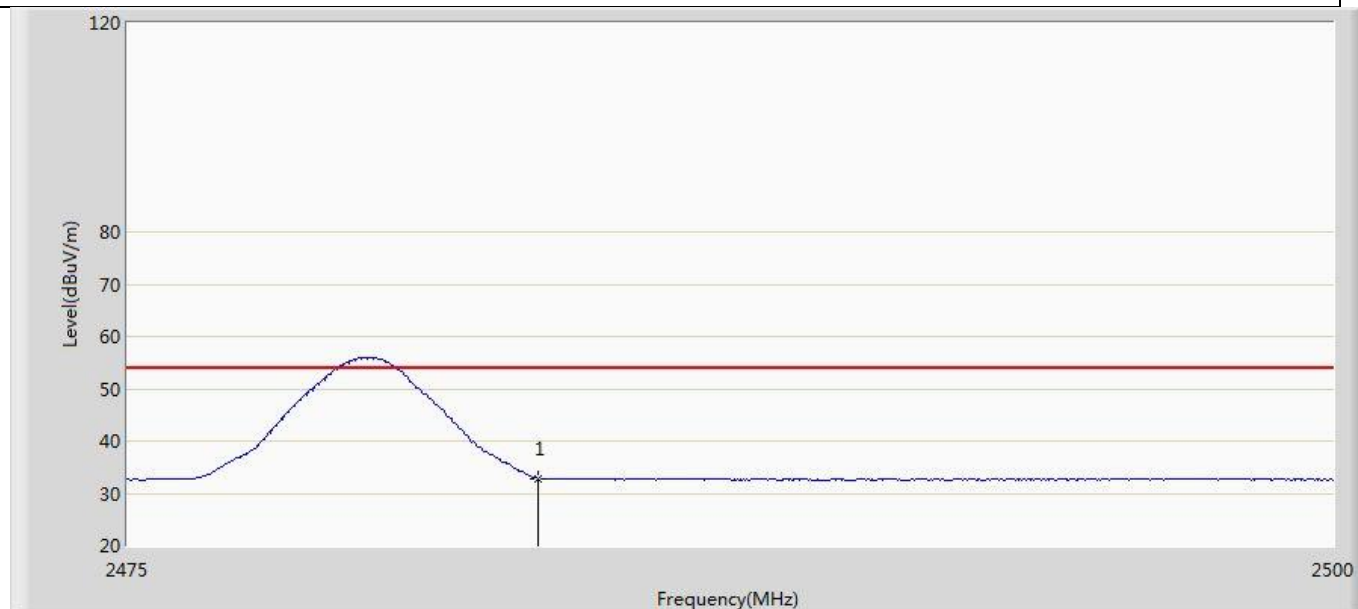

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Over Limit (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	2483.500	32.884	-1.607	-21.116	54.000	34.491	AV


Note:

1. " * ", means this data is the worst emission level.
2. Measurement Level = Reading Level + Factor(Probe+Cable-Amp)

4.6 DTS Bandwidth**VERDICT: PASS****4.6.1 Limit****Standard**

FCC Part 15 Subpart C Paragraph 15.247 (a)(2)

Systems using digital modulation techniques operate in the 2400-2483.5 MHz. The minimum 6 dB bandwidth shall be at least 500 kHz

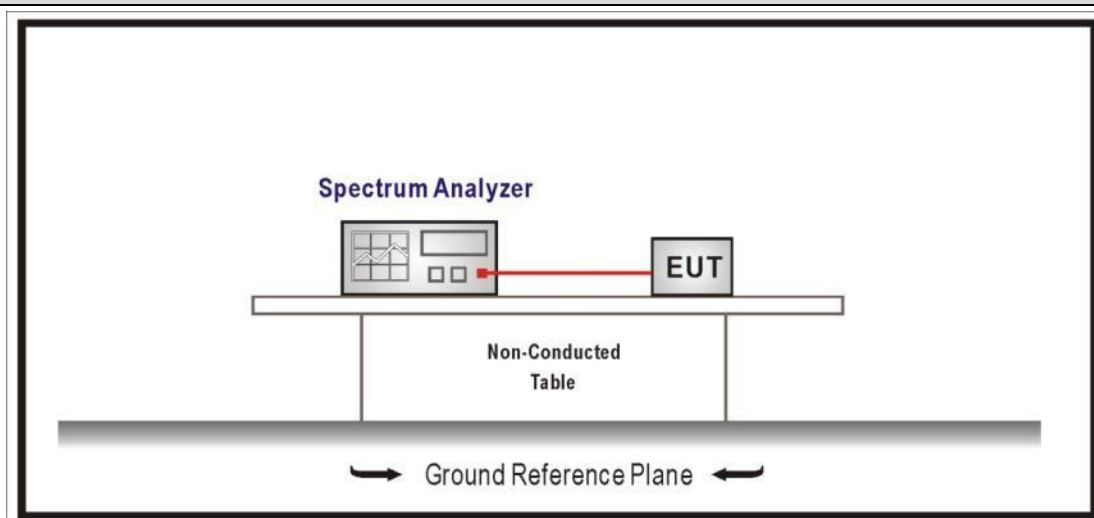4.6.2 Test Setup**4.6.3 Test Procedure**

	Reference Rule	Chapter	Description
☒	ANSI C63.10	11.8	DTS bandwidth
☐	ANSI C63.10	11.8.1	Option 1
☒	ANSI C63.10	11.8.2	Option 2

4.6.4 Test Data

Mode	CH.	Test Freq. (MHz)	99% Occupied Bandwidth (MHz)	6dB Occupied Bandwidth (MHz)	Limit (kHz)	Result
1	00	2402	1.0271	0.652	>500	Pass
	19	2440	1.0245	0.648	>500	Pass
	39	2480	1.0240	0.660	>500	Pass
2	00	2402	2.0410	1.108	>500	Pass
	19	2440	2.0312	1.104	>500	Pass
	39	2480	2.0481	1.104	>500	Pass

Note : The worst case of Occupied Bandwidth as below:

99% Occupied Bandwidth

Mode 2 CH39 (2480MHz)



6dB Occupied Bandwidth


Mode 1 CH19(2440MHz)



4.7 Fundamental emission output power**VERDICT: PASS****4.7.1 Limit**

Standard		FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
☒	GTX < 6dBi	Pout ≤ 30dBm
☐	GTX > 6dBi	
☐	Non-Fix point-point	Pout ≤ 30 - (GTX - 6)
☐	Fix point-point	Pout ≤ 30 - [(GTX - 6)]/3
☐	Point-to-multipoint	Pout ≤ 30 - (GTX - 6)
☐	Overlap Beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	Aggregate power transmitted simultaneously on all beams	Pout ≤ 30 - [(GTX - 6)]/3
☐	single directional beam	Pout ≤ 30 - [(GTX - 6)]/3 + 8dB

Note 1 : GTX directional gain of transmitting antennas.
 Note 2 : Pout is maximum peak conducted output power .

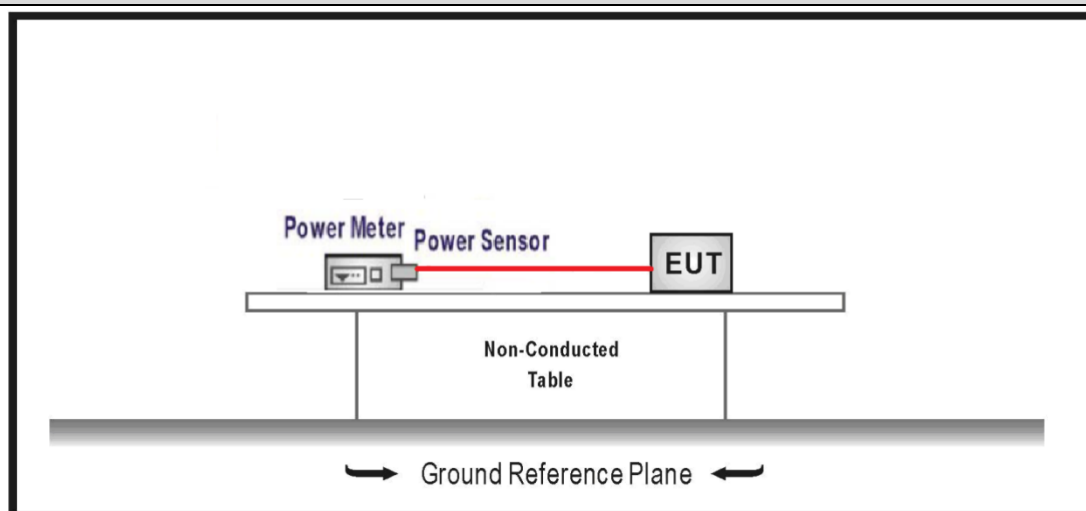4.7.2 Test Setup

4.7.3 Test Procedure

	References Rule			Chapter	Description	
☒	ANSI C63.10			11.9	Fundamental emission output power	
	☒	ANSI C63.10			11.9.1	Maximum peak conducted output power
		☒	ANSI C63.10		11.9.1.1	RBW ≥ DTS bandwidth
		☐	ANSI C63.10		11.9.1.2	Integrated band power method
		☐	ANSI C63.10		11.9.1.3	PKPM1 Peak power meter method
	☐	ANSI C63.10			11.9.2	Maximum conducted (average) output power
		☐	ANSI C63.10		11.9.2.2	Measurement using a spectrum analyzer (SA)
			☐	ANSI C63.10	11.9.2.2.2	Method AVGSA-1(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.3	Method AVGSA-1A(Duty cycle≥98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-2(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-2A(Duty cycle≤98%)
			☐	ANSI C63.10	11.9.2.2.4	Method AVGSA-3
			☐	ANSI C63.10	11.9.2.2.5	Method AVGSA-3A
		☐	ANSI C63.10		11.9.2.3	Measurement using a power meter (PM)
		☐	ANSI C63.10	11.9.2.3.1	Method AVGPM	
		☐	ANSI C63.10	11.9.2.3.2	Method AVGPM-G	

4.7.4 Test Data

Mode	Channel	Test Frequency (MHz)	Conducted Power (dBm)	EIRP (dBm)	Conducted Power Limit (dBm)	EIRP Limit (dBm)	Result
Mode 1	00	2402	5.79	7.49	≤30	≤36	Pass
	19	2440	5.55	7.25	≤30	≤36	Pass
	39	2480	5.37	7.07	≤30	≤36	Pass
Mode 2	00	2402	5.80	7.50	≤30	≤36	Pass
	19	2440	5.57	7.27	≤30	≤36	Pass
	39	2480	5.39	7.09	≤30	≤36	Pass

4.8 Power Density


VERDICT: PASS

4.8.1 Limit:

Standard	FCC Part 15 Subpart C Paragraph 15.247 (b)(3)
-----------------	---

Power Spectral Density $\leq 8\text{dBm}/3\text{kHz}$

4.8.2 Test Setup

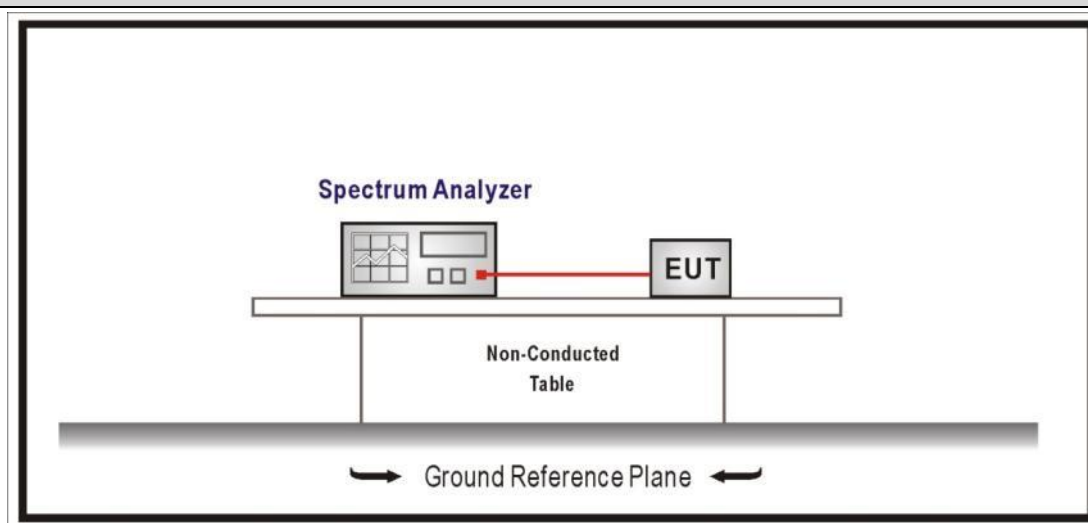

4.8.3 Test Procedure

	References Rule	Chapter	Description
☒	ANSI C63.10	11.10	Maximum power spectral density level in the fundamental emission
☒	ANSI C63.10	11.10.2	Method PKPSD (peak PSD)
☐	ANSI C63.10	11.10.3	Method AVGPS-1(Duty cycle $\geq 98\%$)
☐	ANSI C63.10	11.10.4	Method AVGPS-1A(Duty cycle $\geq 98\%$)
☐	ANSI C63.10	11.10.5	Method AVGPS-2(Duty cycle $< 98\%$)
☐	ANSI C63.10	11.10.6	Method AVGPS-2A(Duty cycle $< 98\%$)
☐	ANSI C63.10	11.10.7	Method AVGPS-3
☐	ANSI C63.10	11.10.8	Method AVGPS-3A

4.8.4 Test Data

Mode	Channel	Test Frequency (MHz)	Measurement PSD (dBm/3kHz)	Limit (dBm/3kHz)	Result
Mode 1	00	2402	-8.64	≤8	Pass
	19	2440	-9.14	≤8	Pass
	39	2480	-9.43	≤8	Pass
Mode 2	00	2402	-8.83	≤8	Pass
	19	2440	-8.87	≤8	Pass
	39	2480	-9.02	≤8	Pass

Note : The worst case of PSD as below:

Mode 1 CH00(2402MHz)



4.9 Antenna Requirement**VERDICT: PASS****4.9.1 Limit:****Standard**

FCC Part 15 Subpart C Paragraph 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Antenna Connector Construction:

- | | |
|-------------------------------------|--|
| ☐ | The use of a permanently attached antenna |
| ☐ | The antenna use of a unique coupling to the intentional radiator |
| ☐ | The use of a nonstandard antenna jack or electrical connector |
| ☒ | The antenna use standard connector with non-standard thread dimensions |

Please refer to the attached document "Internal Photograph" to show the antenna connector.

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

_____ The End _____