




Test Mode	Channel	Verdict
11N HT20	2427 MHz	PASS

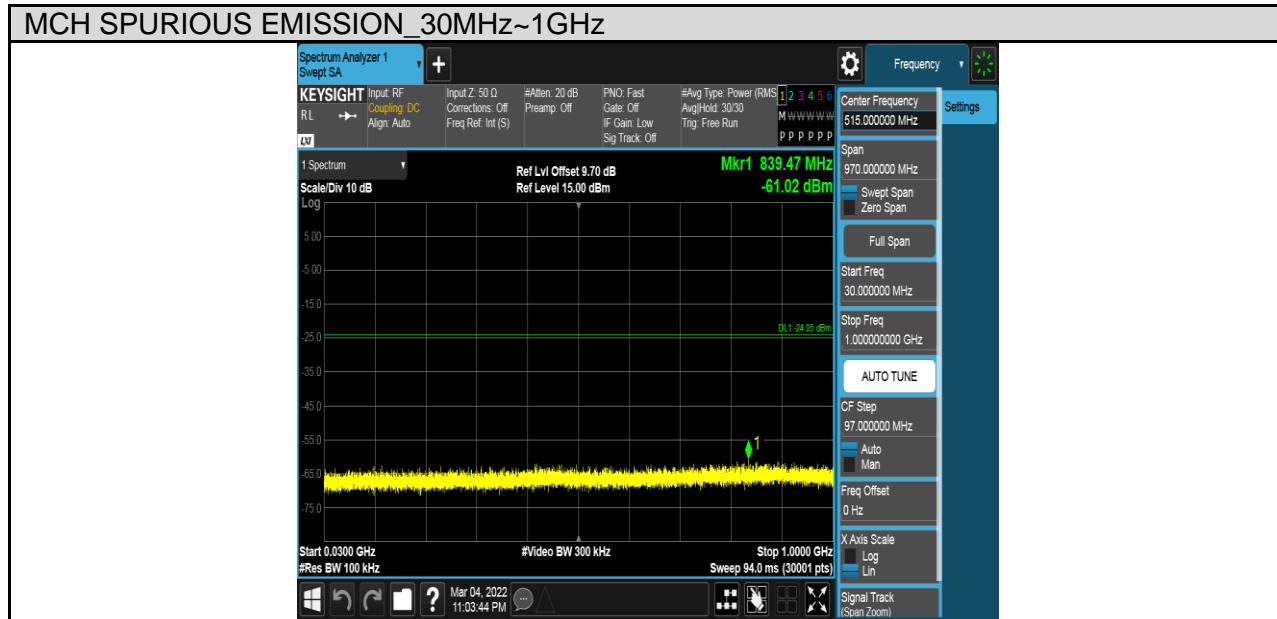



Test Mode	Channel	Verdict
11N HT20	2437 MHz	PASS

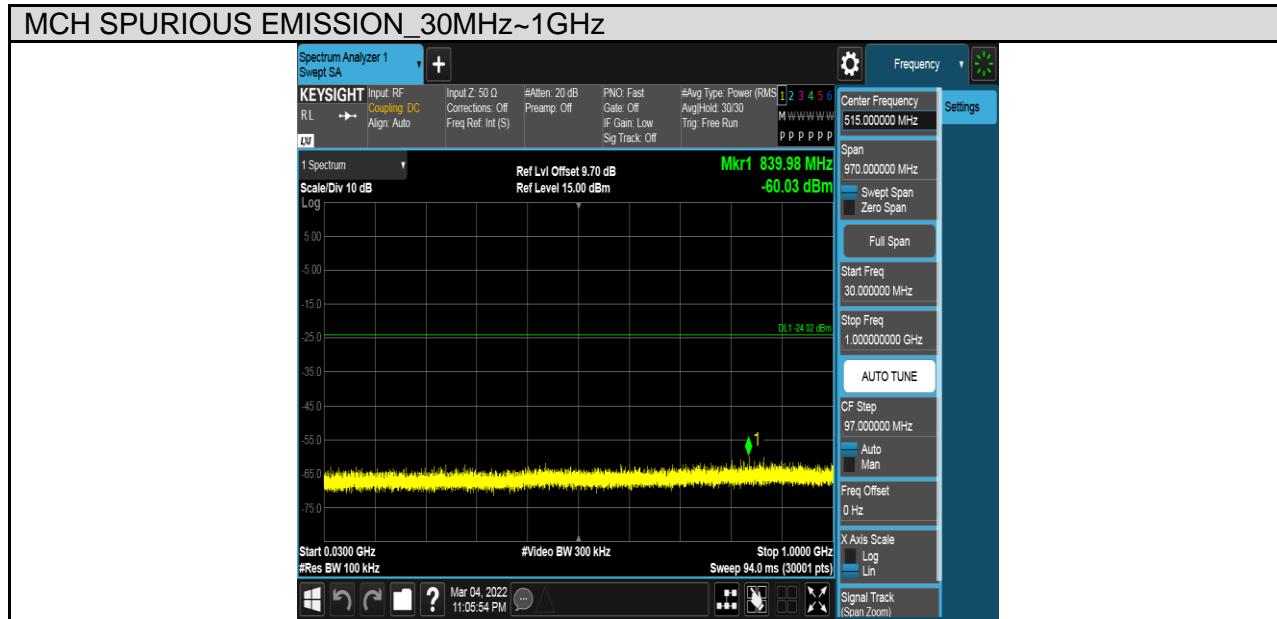

Test Mode	Channel	Verdict
11N HT20	2447 MHz	PASS

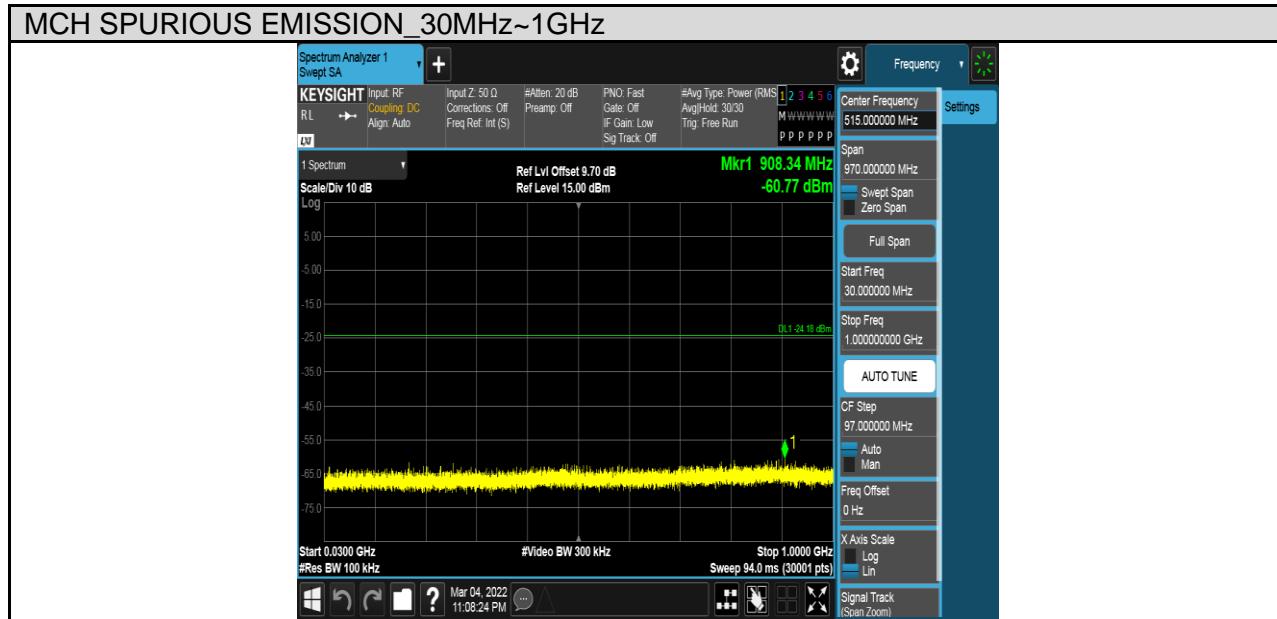

Test Mode	Channel	Verdict
11N HT20	2462 MHz	PASS

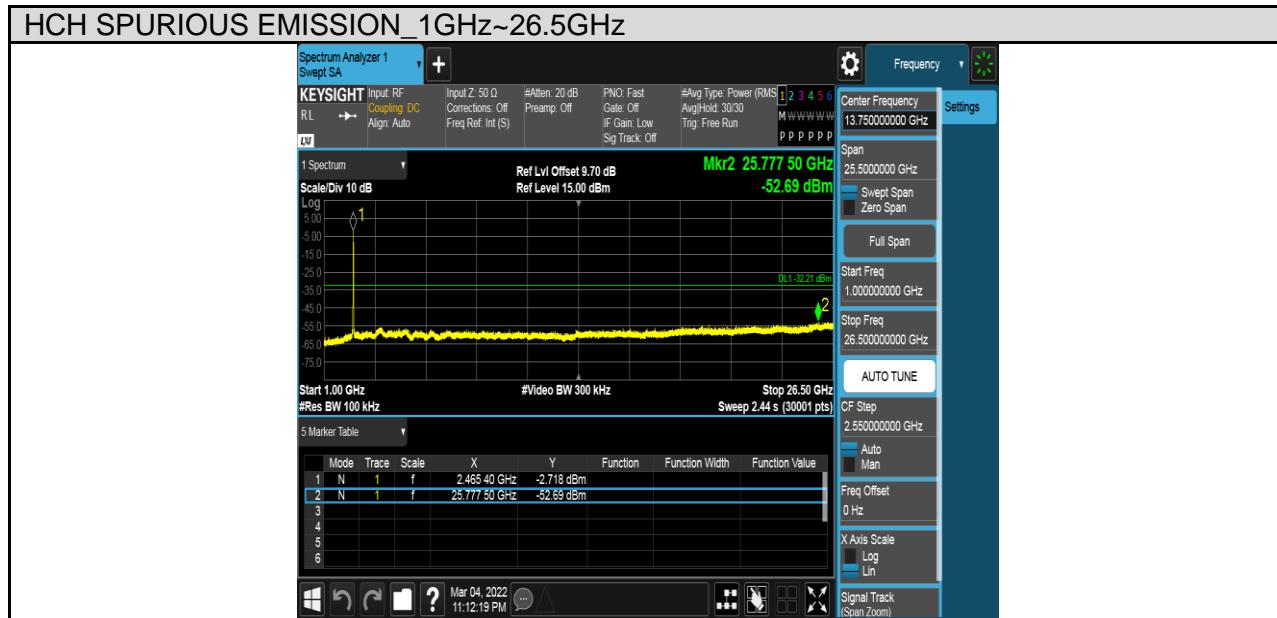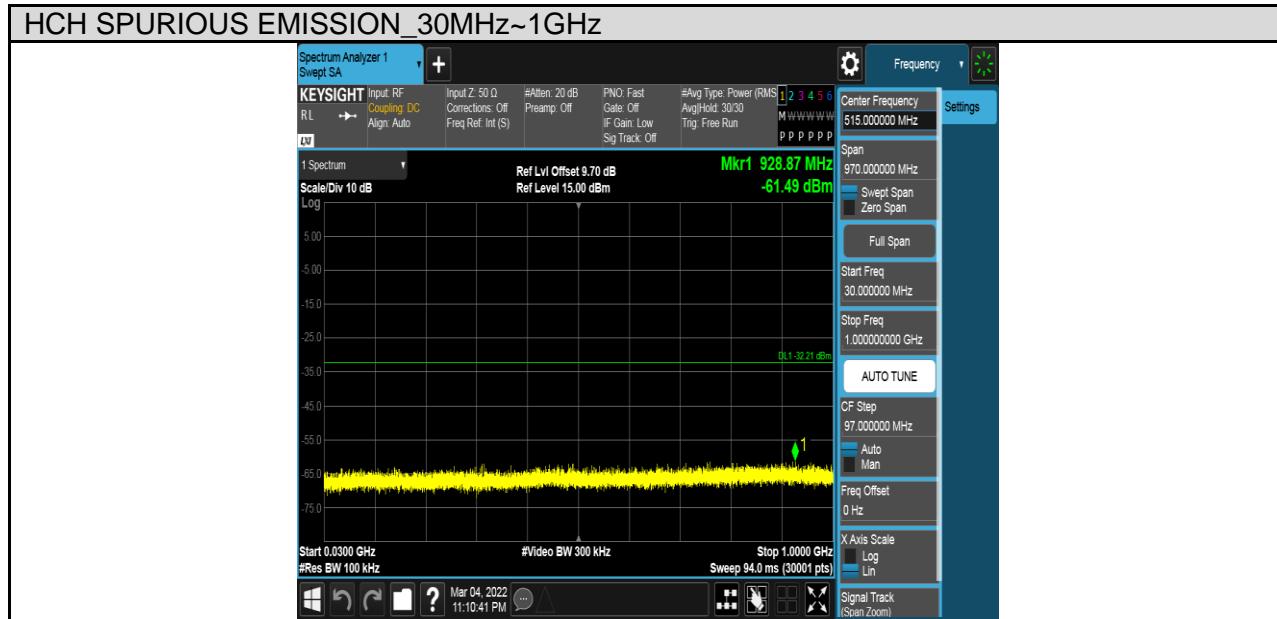

7.6. RADIATED TEST RESULTS

7.6.1. LIMITS AND PROCEDURE

LIMITS

Please refer to FCC §15.205 and §15.209, ISED RSS-247 Clause 5.5, ISED RSS-GEN Clause 8.9&6.13 (Transmitter)

Radiation Disturbance Test Limit for ISED (9kHz-1GHz)

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

Table 5 – General field strength limits at frequencies above 30 MHz

Frequency (MHz)	Field strength (μ V/m at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

Table 6 – General field strength limits at frequencies below 30 MHz

Frequency	Magnetic field strength (H-Field) (μ A/m)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B) (9KHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54


Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30MHz

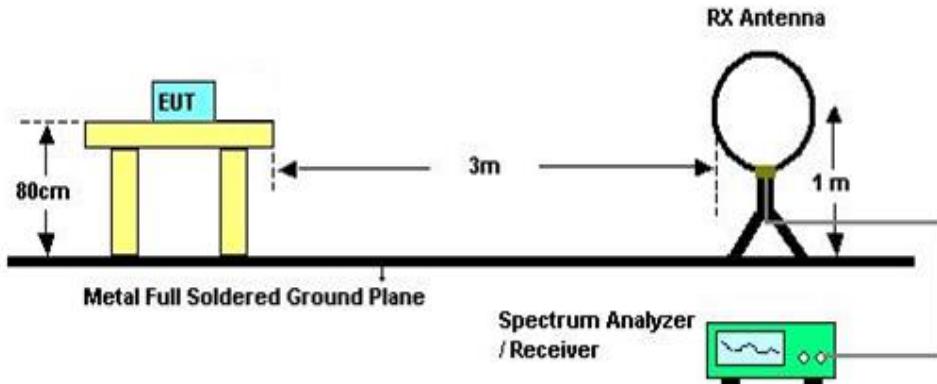


The setting of the spectrum analyser

RBW	200 Hz (From 9kHz to 0.15MHz) / 9kHz (From 0.15MHz to 30MHz)
VBW	200 Hz (From 9kHz to 0.15MHz) / 9kHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1G

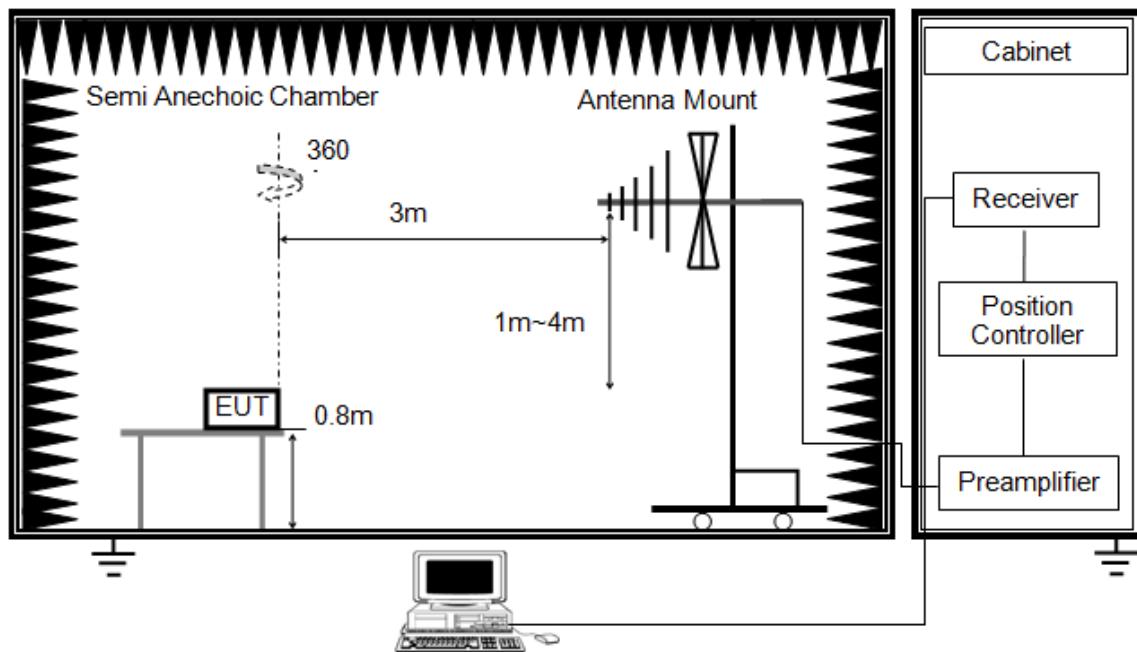


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Above 1G

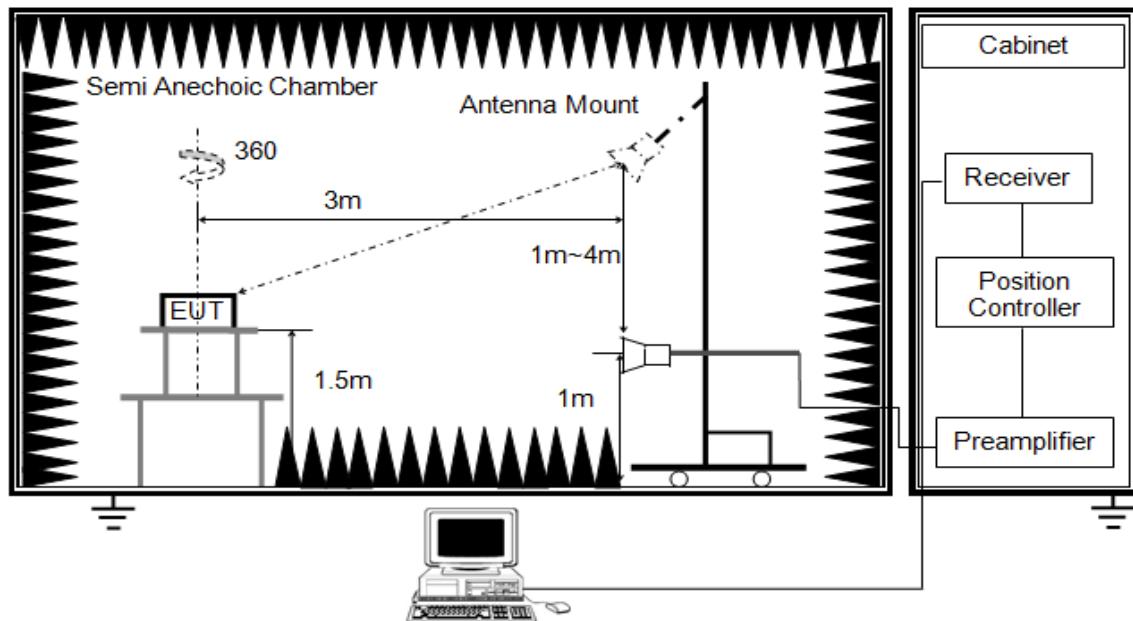


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK:3 MHz AVG: See note6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements; and 1 MHz resolution bandwidth with video bandwidth $\geq 1/T$ but not less than the setting list in section 7.1 when use peak detector, max hold to be run for at least $[50 * (1/\text{Duty Cycle})]$ traces for average measurements. For the Duty Cycle need to refer the results in section 7.1.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:

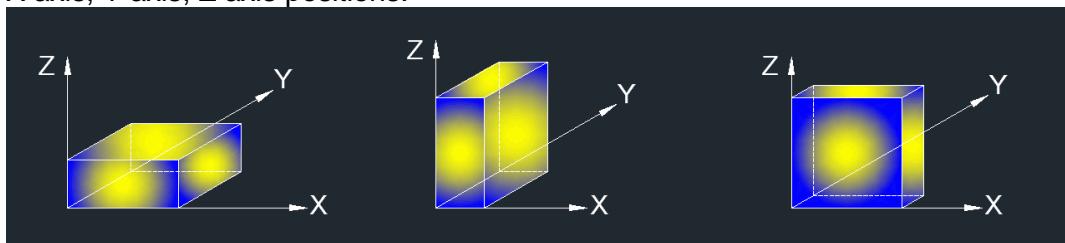

Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worse case (X axis) data recorded in the report.

7.6.2. TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	DC 3.3V

7.6.3. RESTRICTED BANDEDGE


TEST RESULT TABLE

Test Mode		Channel	Puw(dBm)	Verdict
PCB Antenna & External Dipole Antenna	11B	2412	<Limit	PASS
		2417	<Limit	PASS
		2457	<Limit	PASS
		2462	<Limit	PASS
	11G	2412	<Limit	PASS
		2427	<Limit	PASS
		2447	<Limit	PASS
		2462	<Limit	PASS
	11N HT20	2412	<Limit	PASS
		2427	<Limit	PASS
		2447	<Limit	PASS
		2462	<Limit	PASS

TEST GRAPHS

Antenna Type 2: External Dipole Antenna

Test Mode	Channel	Polarization	Verdict
11B	2412 MHz	Horizontal	PASS

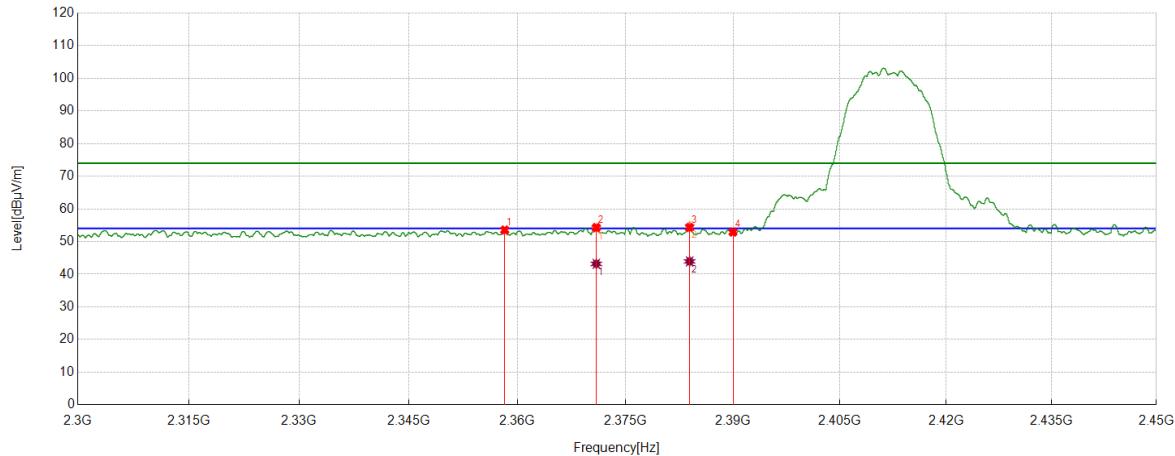

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2358.2635	40.76	12.76	53.52	74.00	-20.48	Horizontal
2	2370.9401	41.15	12.94	54.09	74.00	-19.91	Horizontal
3	2383.9355	41.62	13.06	54.68	74.00	-19.32	Horizontal
4	2390	39.84	13.07	52.91	74.00	-21.09	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2370.9401	30.24	12.94	43.18	54.00	-10.82	Horizontal
2	2383.9355	30.86	13.06	43.92	54.00	-10.08	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2412 MHz	Vertical	PASS

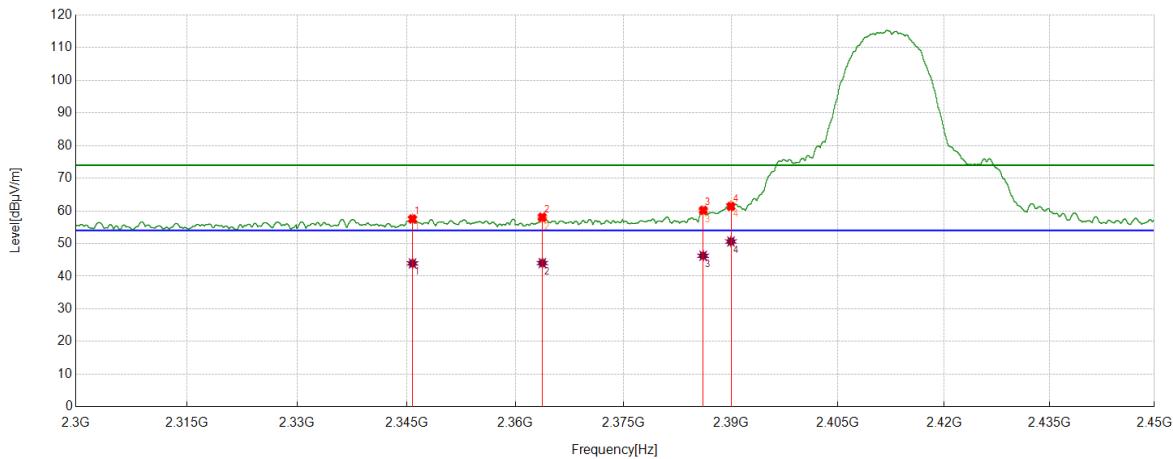
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2345.8307	44.97	12.65	57.62	74.00	-16.38	Vertical
2	2363.7385	44.79	12.83	57.62	74.00	-16.38	Vertical
3	2386.1022	46.89	13.06	59.95	74.00	-14.05	Vertical
4	2390.0000	48.62	13.07	61.69	74.00	-12.31	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2345.8307	31.27	12.65	43.92	54.00	-10.08	Vertical
2	2363.7385	31.20	12.83	44.03	54.00	-9.97	Vertical
3	2386.1022	33.20	13.06	46.26	54.00	-7.74	Vertical
4	2390.0000	37.56	13.07	50.63	54.00	-3.37	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2417 MHz	Horizontal	PASS

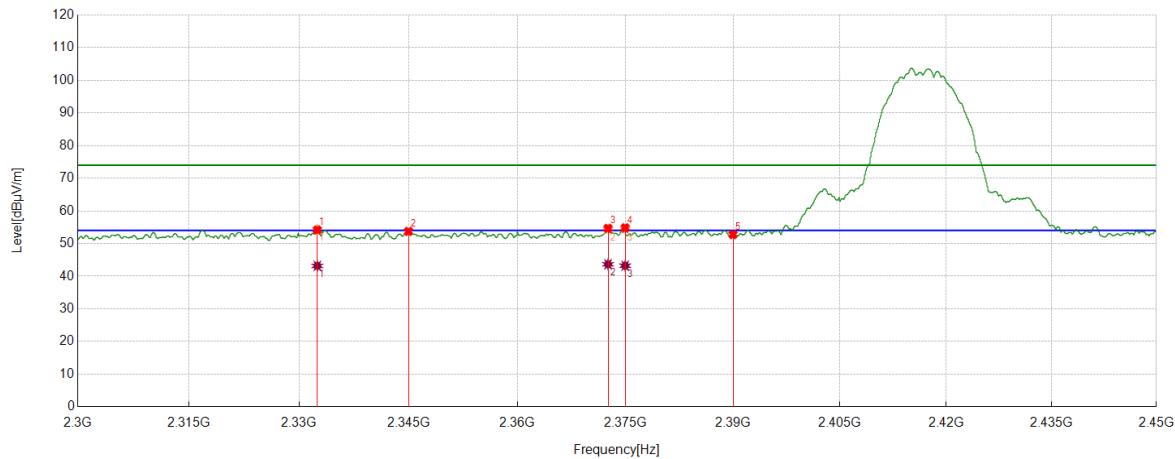
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2332.5166	41.65	12.50	54.15	74.00	-19.85	Horizontal
2	2345.0056	41.10	12.64	53.74	74.00	-20.26	Horizontal
3	2372.5716	41.44	12.96	54.40	74.00	-19.60	Horizontal
4	2374.9531	41.51	12.99	54.50	74.00	-19.50	Horizontal
5	2390	39.67	13.07	52.74	74.00	-21.26	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2332.5166	30.66	12.50	43.16	54.00	-10.84	Horizontal
2	2372.5716	30.70	12.96	43.66	54.00	-10.34	Horizontal
3	2374.9531	30.23	12.99	43.22	54.00	-10.78	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2417 MHz	Vertical	PASS

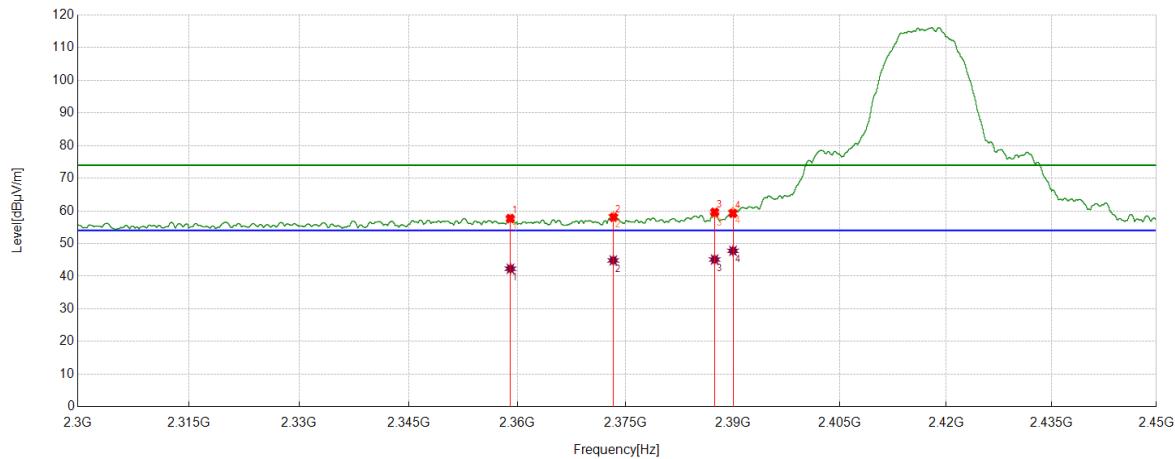

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2359.0324	44.91	12.77	57.68	74.00	-16.32	Vertical
2	2373.3404	45.04	12.97	58.01	74.00	-15.99	Vertical
3	2387.4422	46.55	13.06	59.61	74.00	-14.39	Vertical
4	2390	46.15	13.07	59.22	74.00	-14.78	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2359.0324	29.52	12.77	42.29	54.00	-11.71	Vertical
2	2373.3404	31.86	12.98	44.84	54.00	-9.16	Vertical
3	2387.4422	32.05	13.06	45.11	54.00	-8.89	Vertical
4	2390	34.70	13.07	47.77	54.00	-6.23	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2457 MHz	Horizontal	PASS

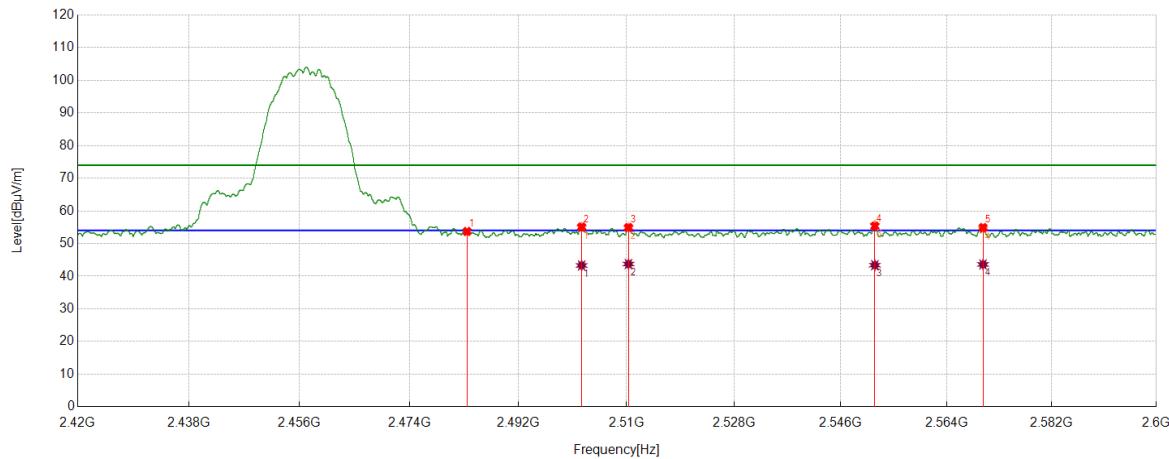

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	40.73	12.97	53.70	74.00	-20.30	Horizontal
2	2502.4953	41.83	13.16	54.99	74.00	-19.01	Horizontal
3	2510.3038	41.57	13.20	54.77	74.00	-19.23	Horizontal
4	2551.7765	42.29	13.36	55.65	74.00	-18.35	Horizontal
5	2570.2063	41.06	13.45	54.51	74.00	-19.49	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2502.4953	30.14	13.16	43.30	54.00	-10.70	Horizontal
2	2510.3038	30.54	13.20	43.74	54.00	-10.26	Horizontal
3	2551.7765	30.02	13.36	43.38	54.00	-10.62	Horizontal
4	2570.2063	30.16	13.45	43.61	54.00	-10.39	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2457 MHz	Vertical	PASS

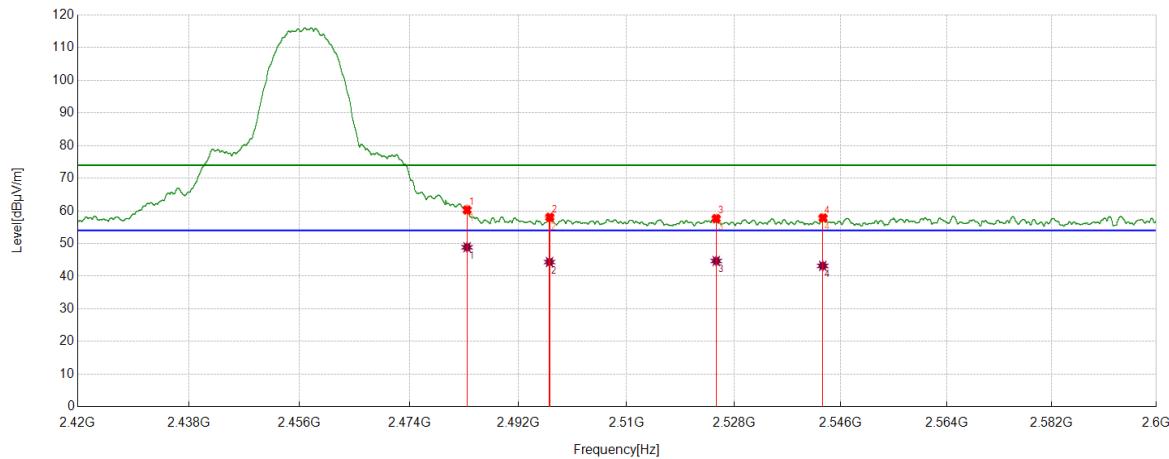
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	47.46	12.97	60.43	74.00	-13.57	Vertical
2	2497.1573	44.65	13.09	57.74	74.00	-16.26	Vertical
3	2524.9981	44.24	13.32	57.56	74.00	-16.44	Vertical
4	2542.9505	44.33	13.40	57.73	74.00	-16.27	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	35.89	12.97	48.86	54.00	-5.14	Vertical
2	2497.1573	31.25	13.09	44.34	54.00	-9.66	Vertical
3	2524.9981	31.35	13.32	44.67	54.00	-9.33	Vertical
4	2542.9505	29.77	13.40	43.17	54.00	-10.83	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2462 MHz	Horizontal	PASS

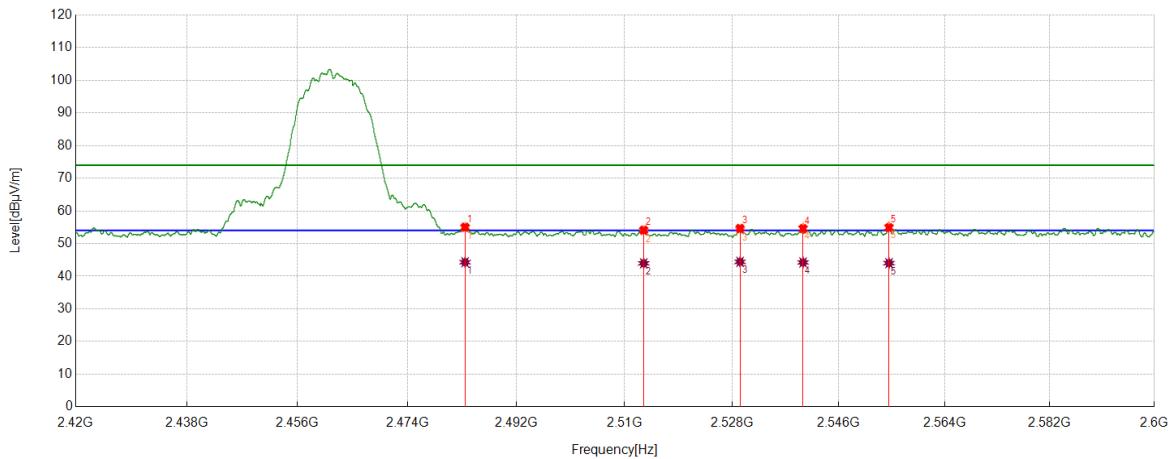

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	41.99	12.97	54.96	74.00	-19.04	Horizontal
2	2513.1841	40.77	13.21	53.98	74.00	-20.02	Horizontal
3	2529.3412	40.9	13.41	54.31	74.00	-19.69	Horizontal
4	2539.9625	41.41	13.42	54.83	74.00	-19.17	Horizontal
5	2554.5218	41.85	13.38	55.23	74.00	-18.77	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	31.32	12.97	44.29	54.00	-9.71	Horizontal
2	2513.1841	30.74	13.21	43.95	54.00	-10.05	Horizontal
3	2529.3412	30.99	13.41	44.40	54.00	-9.60	Horizontal
4	2539.9625	30.80	13.42	44.22	54.00	-9.78	Horizontal
5	2554.5218	30.63	13.38	44.01	54.00	-9.99	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2462 MHz	Vertical	PASS

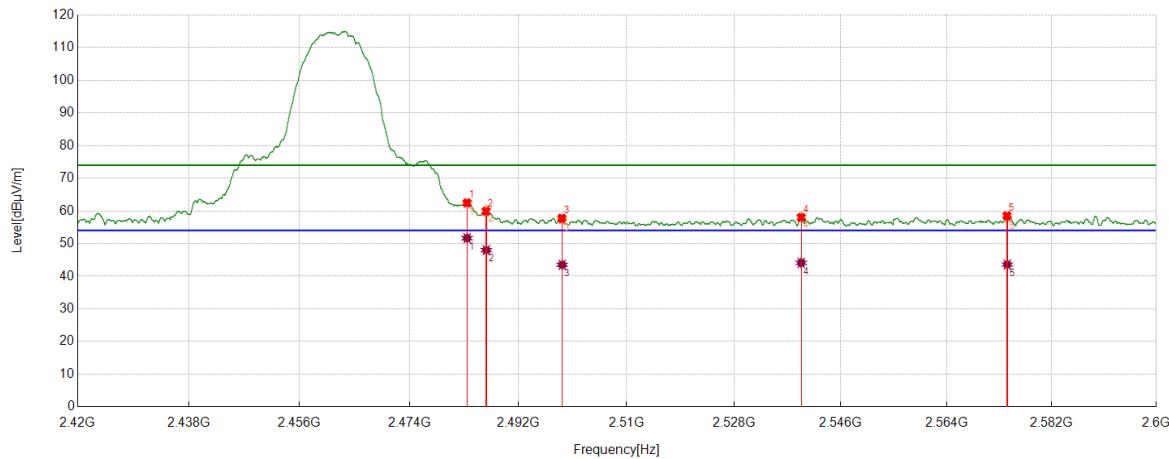

PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	49.33	12.97	62.30	74.00	-11.70	Vertical
2	2486.6807	47.26	12.98	60.24	74.00	-13.76	Vertical
3	2499.2598	44.17	13.13	57.30	74.00	-16.70	Vertical
4	2539.3099	44.78	13.42	58.20	74.00	-15.80	Vertical
	2574.3517	44.48	13.45	57.93	74.00	-16.07	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	38.68	12.97	51.65	54.00	-2.35	Vertical
2	2486.6807	35.00	12.98	47.98	54.00	-6.02	Vertical
3	2499.2598	30.35	13.13	43.48	54.00	-10.52	Vertical
4	2539.3099	30.68	13.42	44.10	54.00	-9.90	Vertical
5	2574.3517	30.13	13.45	43.58	54.00	-10.42	Vertical

Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
 2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2412 MHz	Horizontal	PASS

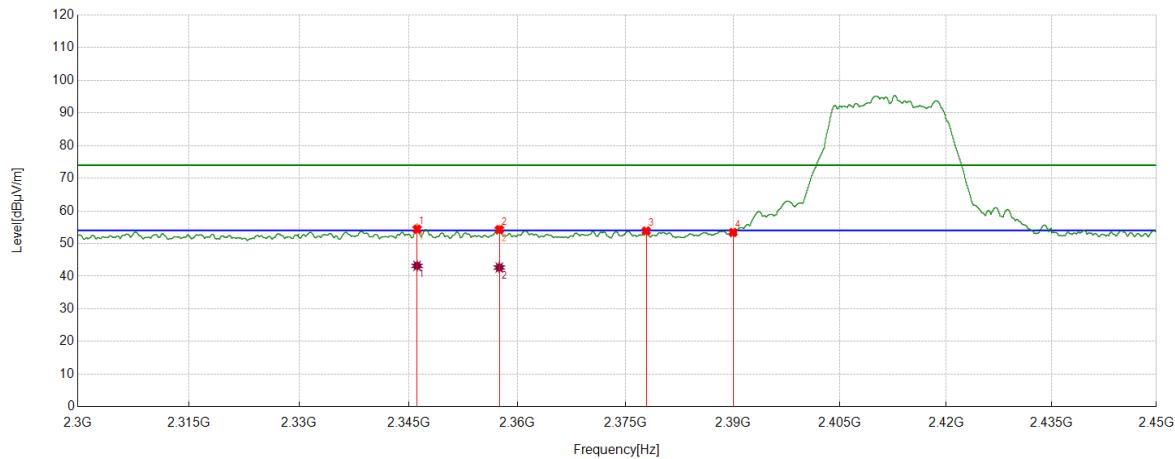
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2346.187	42.02	12.65	54.67	74.00	-19.33	Horizontal
2	2357.5134	41.42	12.75	54.17	74.00	-19.83	Horizontal
3	2377.8785	40.82	13.03	53.85	74.00	-20.15	Horizontal
4	2390	40.33	13.07	53.40	74.00	-20.60	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2346.187	30.53	12.65	43.18	54.00	-10.82	Horizontal
2	2357.5134	29.91	12.75	42.66	54.00	-11.34	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2412 MHz	Vertical	PASS

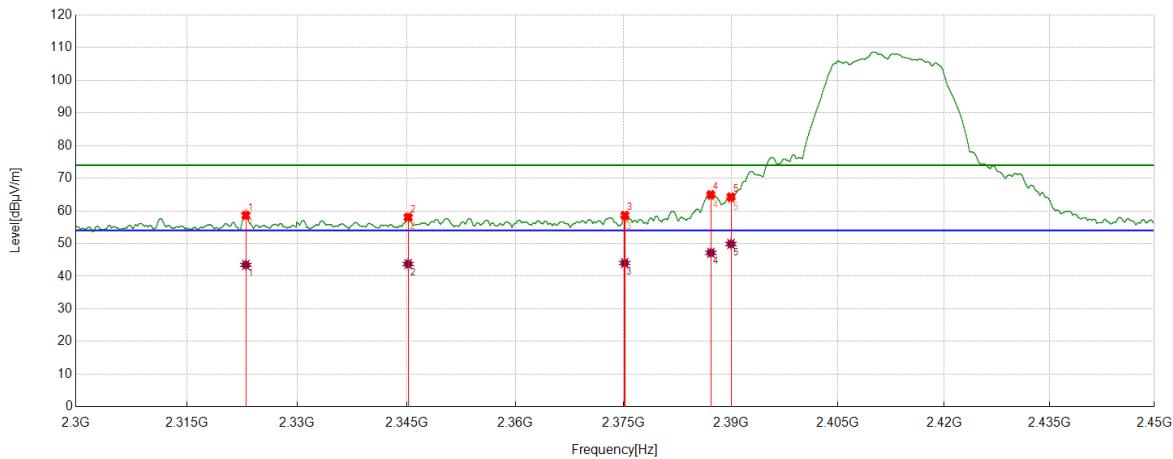
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2323.0466	46.55	12.39	58.94	74.00	-15.06	Vertical
2	2345.2307	45.38	12.65	58.03	74.00	-15.97	Vertical
3	2375.1643	44.98	13.00	57.98	74.00	-16.02	Vertical
4	2387.1899	51.53	13.06	64.59	74.00	-9.41	Vertical
5	2390.0000	50.68	13.07	63.75	74.00	-10.25	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2323.0466	31.08	12.39	43.47	54.00	-10.53	Vertical
2	2345.2307	31.10	12.65	43.75	54.00	-10.25	Vertical
3	2375.1643	31.04	13.00	44.04	54.00	-9.96	Vertical
4	2387.1899	34.11	13.06	47.17	54.00	-6.83	Vertical
5	2390.0000	36.82	13.07	49.89	54.00	-4.11	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2427 MHz	Horizontal	PASS

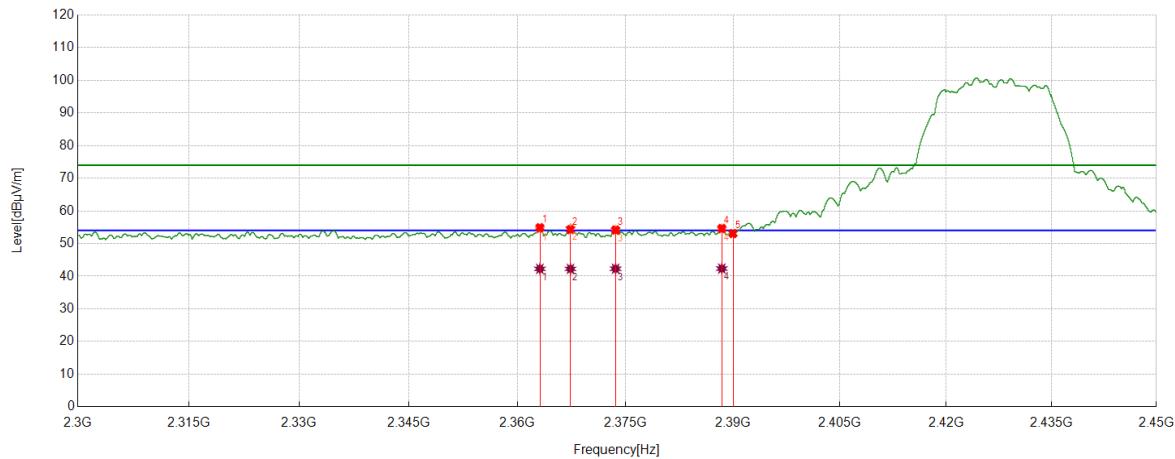

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2363.1204	41.67	12.82	54.49	74.00	-19.51	Horizontal
2	2367.3584	41.73	12.89	54.62	74.00	-19.38	Horizontal
3	2373.6217	41.05	12.98	54.03	74.00	-19.97	Horizontal
4	2388.4361	41.35	13.07	54.42	74.00	-19.58	Horizontal
5	2390	39.98	13.07	53.05	74.00	-20.95	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2363.1204	29.44	12.82	42.26	54.00	-11.74	Horizontal
2	2367.3584	29.36	12.89	42.25	54.00	-11.75	Horizontal
3	2373.6217	29.31	12.98	42.29	54.00	-11.71	Horizontal
4	2388.4361	29.27	13.07	42.34	54.00	-11.66	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2427 MHz	Vertical	PASS

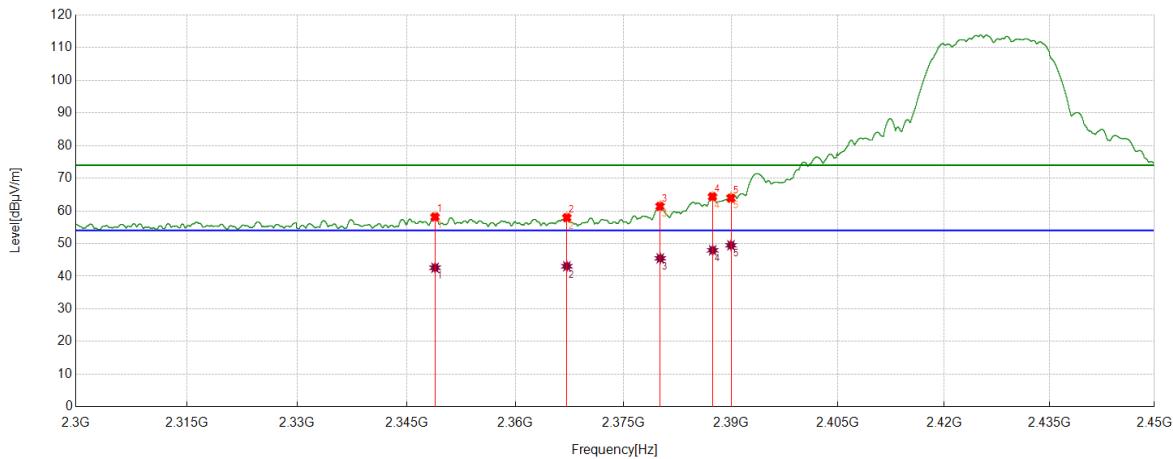
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2348.9311	45.47	12.68	58.15	74.00	-15.85	Vertical
2	2367.1334	45.13	12.88	58.01	74.00	-15.99	Vertical
3	2380.1185	48.57	13.06	61.63	74.00	-12.37	Vertical
4	2387.4397	51.24	13.06	64.30	74.00	-9.70	Vertical
5	2390.0000	51.19	13.07	64.26	74.00	-9.74	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2348.9311	29.92	12.68	42.60	54.00	-11.40	Vertical
2	2367.1334	30.17	12.88	43.05	54.00	-10.95	Vertical
3	2380.1185	32.42	13.06	45.48	54.00	-8.52	Vertical
4	2387.4397	34.89	13.06	47.95	54.00	-6.05	Vertical
5	2390.0000	36.41	13.07	49.48	54.00	-4.52	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2447 MHz	Horizontal	PASS

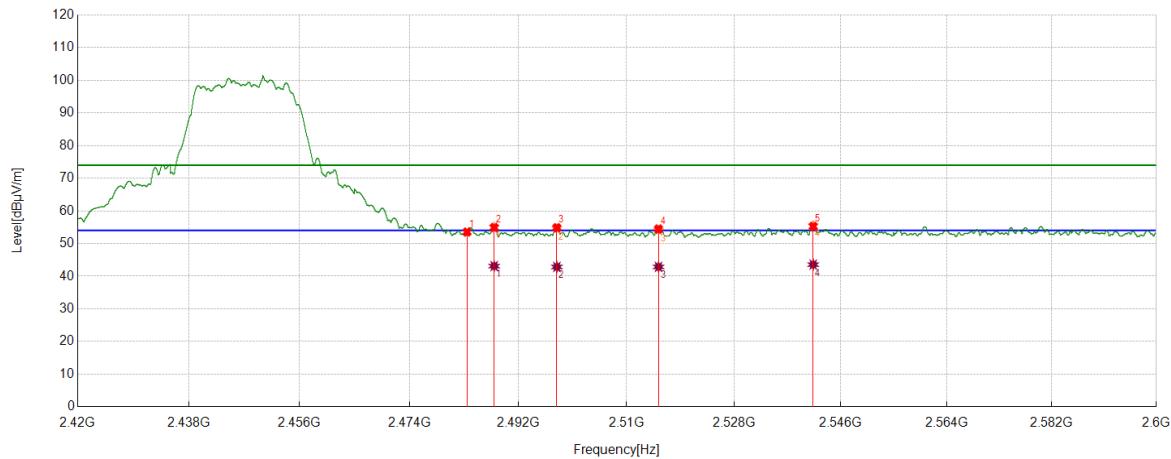
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	40.57	12.97	53.54	74.00	-20.46	Horizontal
2	2487.981	41.93	12.99	54.92	74.00	-19.08	Horizontal
3	2498.3773	41.72	13.12	54.84	74.00	-19.16	Horizontal
4	2515.3219	41.25	13.21	54.46	74.00	-19.54	Horizontal
5	2541.3352	41.84	13.41	55.25	74.00	-18.75	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2487.981	30.11	12.99	43.10	54.00	-10.90	Horizontal
2	2498.3773	29.73	13.12	42.85	54.00	-11.15	Horizontal
3	2515.3219	29.65	13.21	42.86	54.00	-11.14	Horizontal
4	2541.3352	30.15	13.41	43.56	54.00	-10.44	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2447 MHz	Vertical	PASS

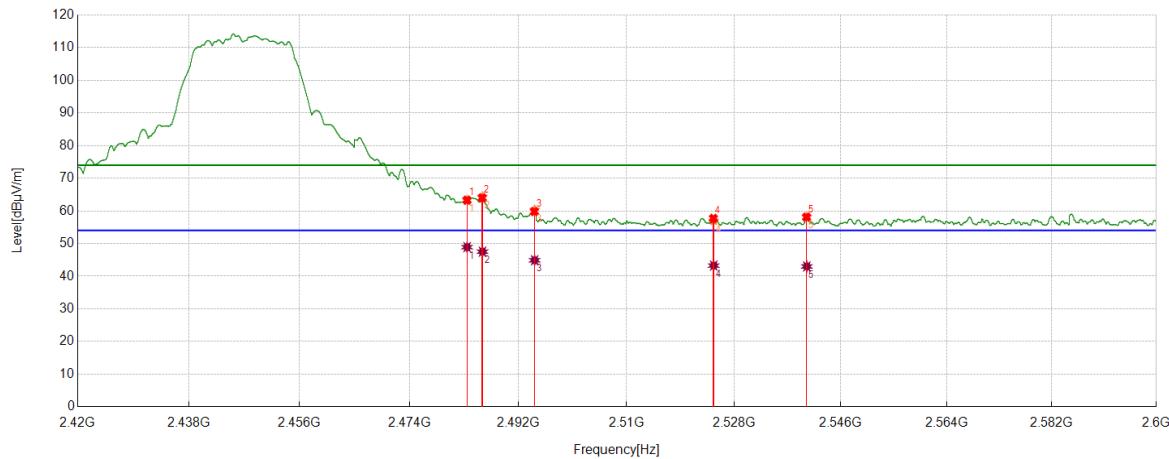
PK Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	50.36	12.97	63.33	74.00	-10.67	Vertical
2	2486.0507	51.34	12.97	64.31	74.00	-9.69	Vertical
3	2494.6857	47.24	13.06	60.30	74.00	-13.70	Vertical
4	2524.5755	43.69	13.31	57.00	74.00	-17.00	Vertical
5	2540.2533	44.65	13.42	58.07	74.00	-15.93	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	35.92	12.97	48.89	54.00	-5.11	Vertical
2	2486.0507	34.55	12.97	47.52	54.00	-6.48	Vertical
3	2494.6857	31.83	13.06	44.89	54.00	-9.11	Vertical
4	2524.5755	29.95	13.31	43.26	54.00	-10.74	Vertical
5	2540.2533	29.57	13.42	42.99	54.00	-11.01	Vertical

Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
 2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
 3. Measurement = Reading Level + Correct Factor.
 4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2462 MHz	Horizontal	PASS

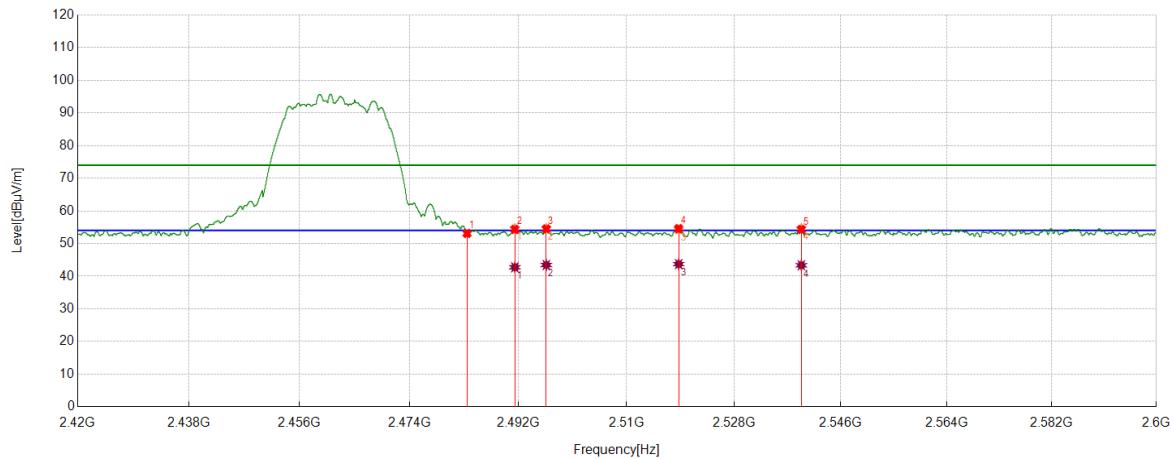

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	40.13	12.97	53.10	74.00	-20.90	Horizontal
2	2491.4014	41.59	13.02	54.61	74.00	-19.39	Horizontal
3	2496.6221	41.58	13.09	54.67	74.00	-19.33	Horizontal
4	2518.6973	41.06	13.22	54.28	74.00	-19.72	Horizontal
5	2539.3324	41.19	13.42	54.61	74.00	-19.39	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2491.4014	29.72	13.02	42.74	54.00	-11.26	Horizontal
2	2496.6221	30.35	13.09	43.44	54.00	-10.56	Horizontal
3	2518.6973	30.49	13.22	43.71	54.00	-10.29	Horizontal
4	2539.3324	29.93	13.42	43.35	54.00	-10.65	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2462 MHz	Vertical	PASS

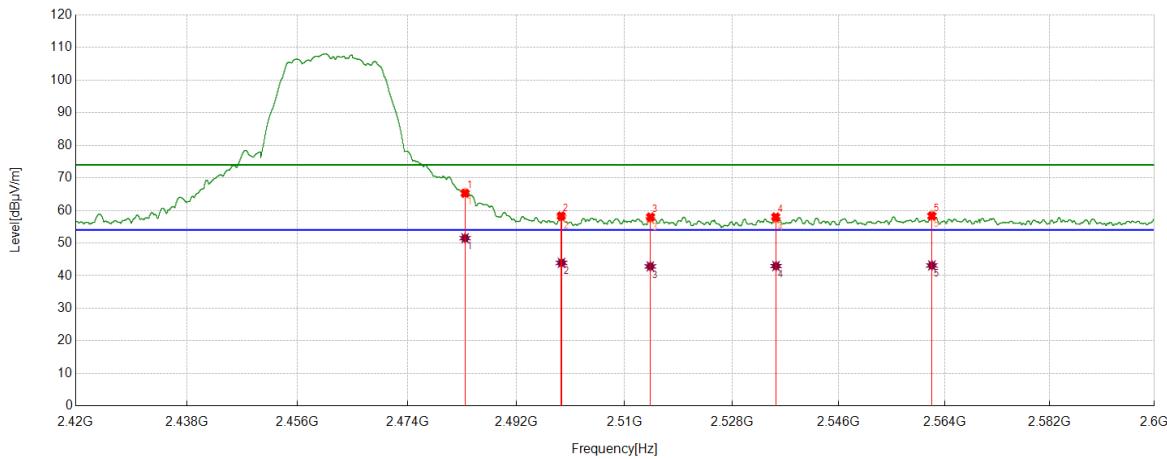

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	52.41	12.97	65.38	74.00	-8.62	Vertical
2	2499.4848	44.81	13.14	57.95	74.00	-16.05	Vertical
3	2514.2819	44.20	13.21	57.41	74.00	-16.59	Vertical
4	2535.3993	43.91	13.41	57.32	74.00	-16.68	Vertical
5	2561.8127	45.12	13.42	58.54	74.00	-15.46	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	38.53	12.97	51.50	54.00	-2.50	Vertical
2	2499.4848	30.79	13.14	43.93	54.00	-10.07	Vertical
3	2514.2819	29.63	13.21	42.84	54.00	-11.16	Vertical
4	2535.3993	29.54	13.41	42.95	54.00	-11.05	Vertical
5	2561.8127	29.71	13.42	43.13	54.00	-10.87	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2412 MHz	Horizontal	PASS

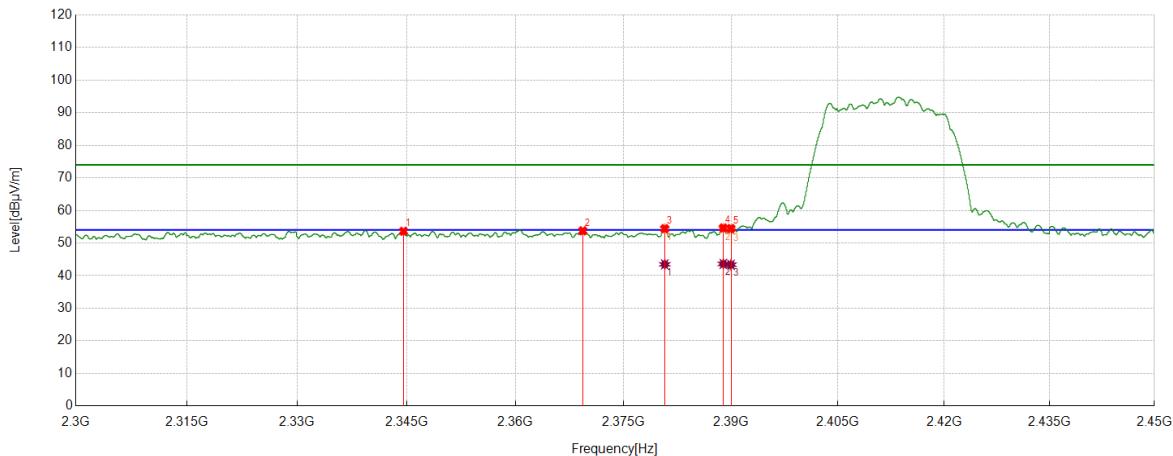
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2344.5931	40.97	12.64	53.61	74.00	-20.39	Horizontal
2	2369.3462	40.84	12.92	53.76	74.00	-20.24	Horizontal
3	2380.7476	41.35	13.06	54.41	74.00	-19.59	Horizontal
4	2388.9236	41.37	13.07	54.44	74.00	-19.56	Horizontal
5	2390	41.01	13.07	54.08	74.00	-19.92	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2380.7476	30.41	13.06	43.47	54.00	-10.53	Horizontal
2	2388.9236	30.54	13.07	43.61	54.00	-10.39	Horizontal
3	2390	30.29	13.07	43.36	54.00	-10.64	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2412 MHz	Vertical	PASS

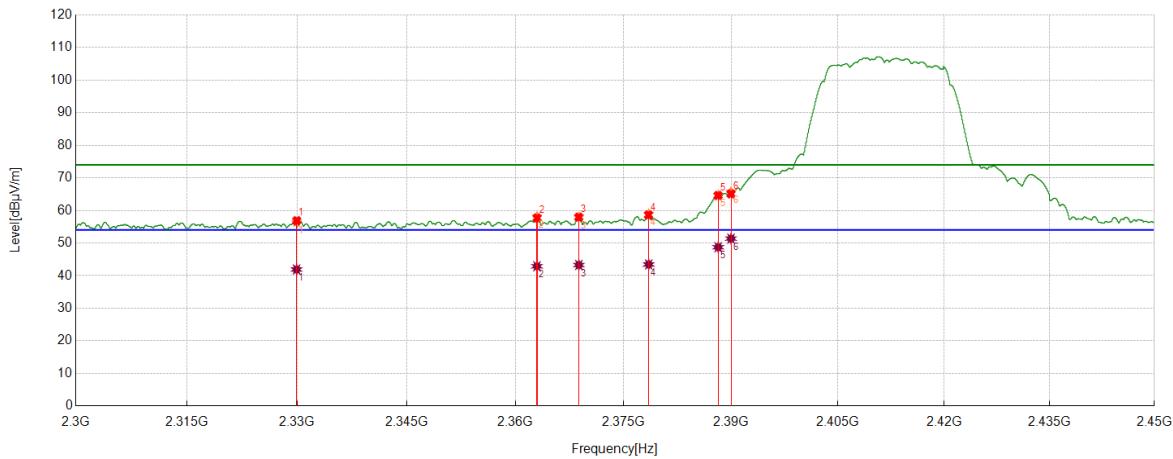

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2329.9543	43.94	12.47	56.41	74.00	-17.59	Vertical
2	2362.9914	45.27	12.82	58.09	74.00	-15.91	Vertical
3	2368.7982	45.08	12.91	57.99	74.00	-16.01	Vertical
4	2378.5087	45.90	13.04	58.94	74.00	-15.06	Vertical
5	2388.2056	51.62	13.07	64.69	74.00	-9.31	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2329.9543	29.43	12.47	41.90	54.00	-12.10	Vertical
2	2362.9914	30.06	12.82	42.88	54.00	-11.12	Vertical
3	2368.7982	30.36	12.91	43.27	54.00	-10.73	Vertical
4	2378.5087	30.40	13.04	43.44	54.00	-10.56	Vertical
5	2388.2056	35.65	13.07	48.72	54.00	-5.28	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2427 MHz	Horizontal	PASS

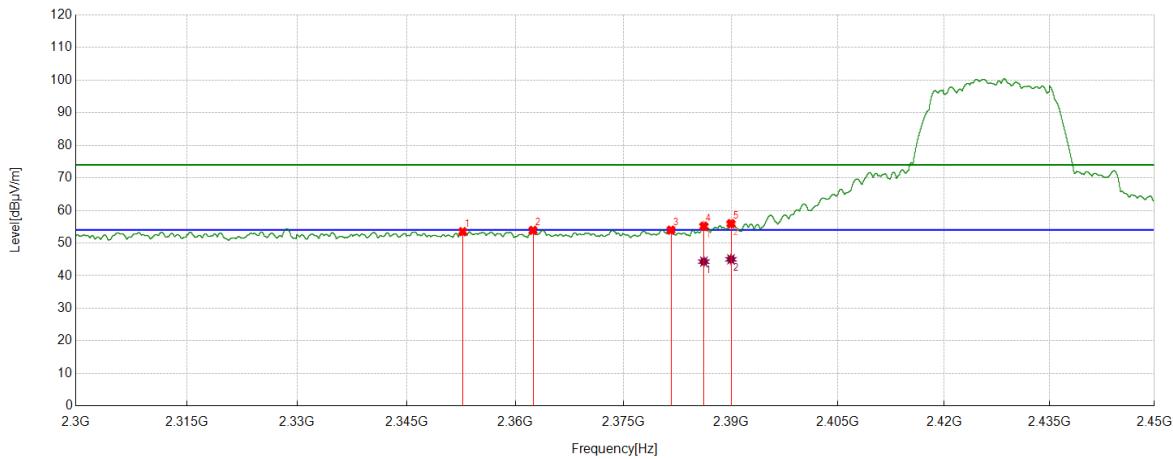
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2352.7316	40.79	12.71	53.50	74.00	-20.50	Horizontal
2	2362.4453	41.08	12.81	53.89	74.00	-20.11	Horizontal
3	2381.6102	40.92	13.06	53.98	74.00	-20.02	Horizontal
4	2386.2045	42.14	13.06	55.20	74.00	-18.80	Horizontal
5	2390	42.73	13.07	55.80	74.00	-18.20	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2386.2045	31.24	13.06	44.30	54.00	-9.70	Horizontal
2	2390	31.94	13.07	45.01	54.00	-8.99	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2427 MHz	Vertical	PASS

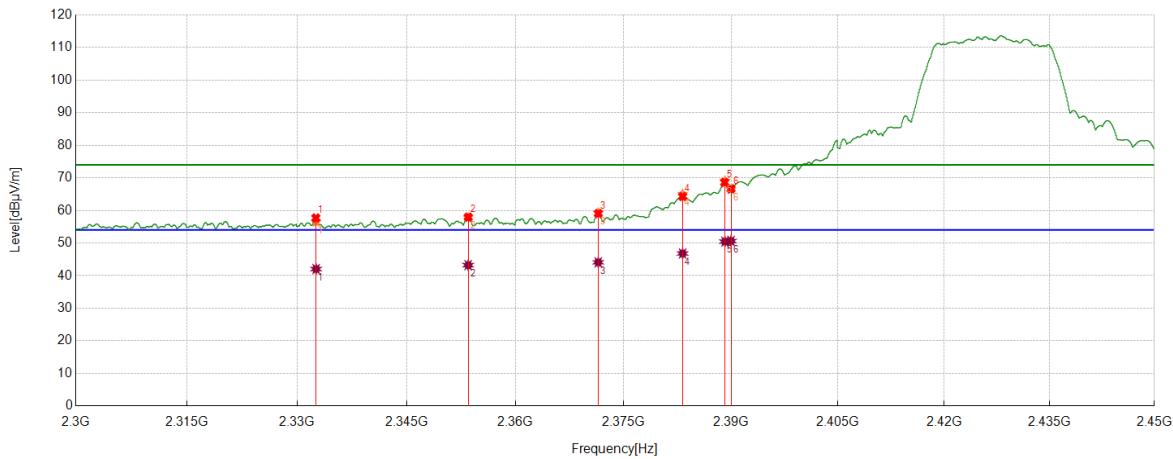

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2332.6214	43.95	12.51	56.46	74.00	-17.54	Vertical
2	2353.4907	45.09	12.72	57.81	74.00	-16.19	Vertical
3	2371.4874	46.31	12.95	59.26	74.00	-14.74	Vertical
4	2383.2356	51.94	13.06	65.00	74.00	-9.00	Vertical
5	2389.1541	56.02	13.06	69.08	74.00	-4.92	Vertical
6	2390.0000	53.36	13.07	66.43	74.00	-7.57	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2332.6214	29.52	12.51	42.03	54.00	-11.97	Vertical
2	2353.4907	30.50	12.72	43.22	54.00	-10.78	Vertical
3	2371.4874	31.14	12.95	44.09	54.00	-9.91	Vertical
4	2383.2356	33.74	13.06	46.80	54.00	-7.20	Vertical
5	2389.1541	37.39	13.06	50.45	54.00	-3.55	Vertical
6	2390.0000	37.56	13.07	50.63	54.00	-3.37	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2447 MHz	Horizontal	PASS

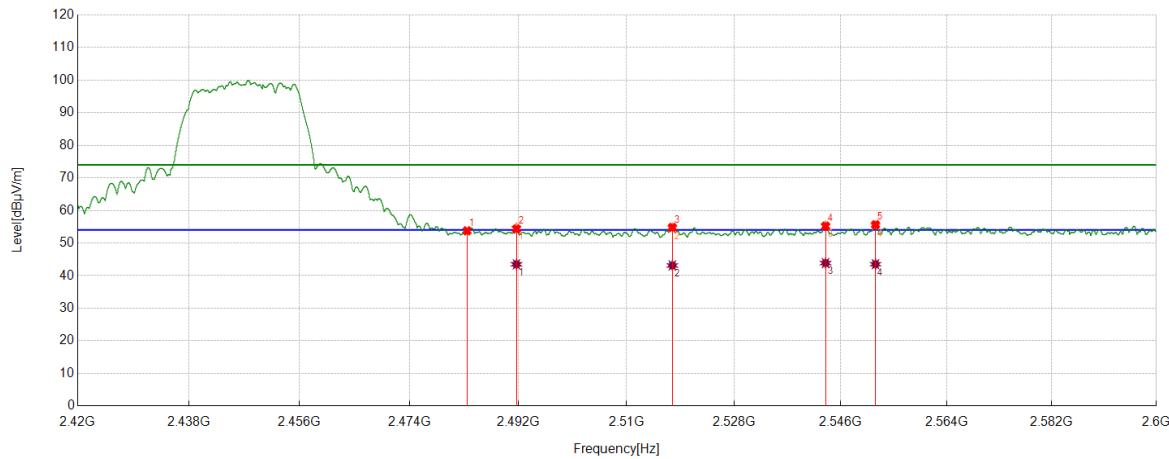

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	40.78	12.97	53.75	74.00	-20.25	Horizontal
2	2491.6715	41.66	13.02	54.68	74.00	-19.32	Horizontal
3	2517.6397	41.47	13.21	54.68	74.00	-19.32	Horizontal
4	2543.4279	41.89	13.39	55.28	74.00	-18.72	Horizontal
5	2551.889	42.02	13.36	55.38	74.00	-18.62	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2491.6715	30.46	13.02	43.48	54.00	10.52	Horizontal
2	2517.6397	29.92	13.21	43.13	54.00	-10.87	Horizontal
3	2543.4279	30.47	13.39	43.86	54.00	-10.14	Horizontal
4	2551.889	30.16	13.36	43.52	54.00	-10.48	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2447 MHz	Vertical	PASS

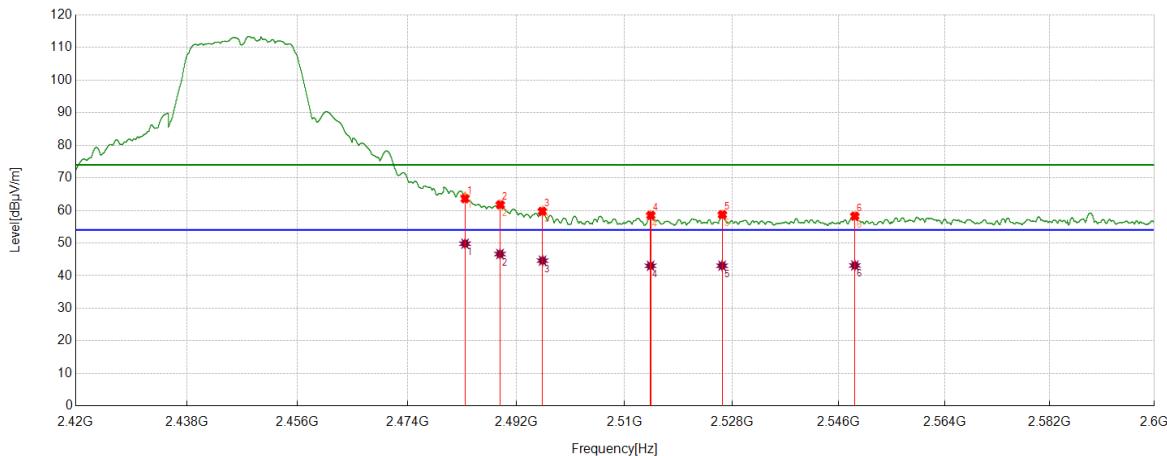

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	51.25	12.97	64.22	74.00	-9.78	Vertical
2	2489.2813	48.75	12.99	61.74	74.00	-12.26	Vertical
3	2496.3344	47.16	13.09	59.85	74.00	-13.75	Vertical
4	2514.3269	45.86	13.21	58.47	74.00	-14.93	Vertical
5	2526.3209	45.96	13.35	58.61	74.00	-14.69	Vertical
6	2548.7271	45.57	13.36	58.23	74.00	-15.07	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	36.84	12.97	49.81	54.00	-4.19	Vertical
2	2489.2813	33.65	12.99	46.64	54.00	-7.36	Vertical
3	2496.3344	31.52	13.09	44.61	54.00	-9.39	Vertical
4	2514.3269	29.81	13.21	43.02	54.00	-10.98	Vertical
5	2526.3209	29.70	13.35	43.05	54.00	-10.95	Vertical
6	2548.7271	29.77	13.36	43.13	54.00	-10.87	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2462 MHz	Horizontal	PASS

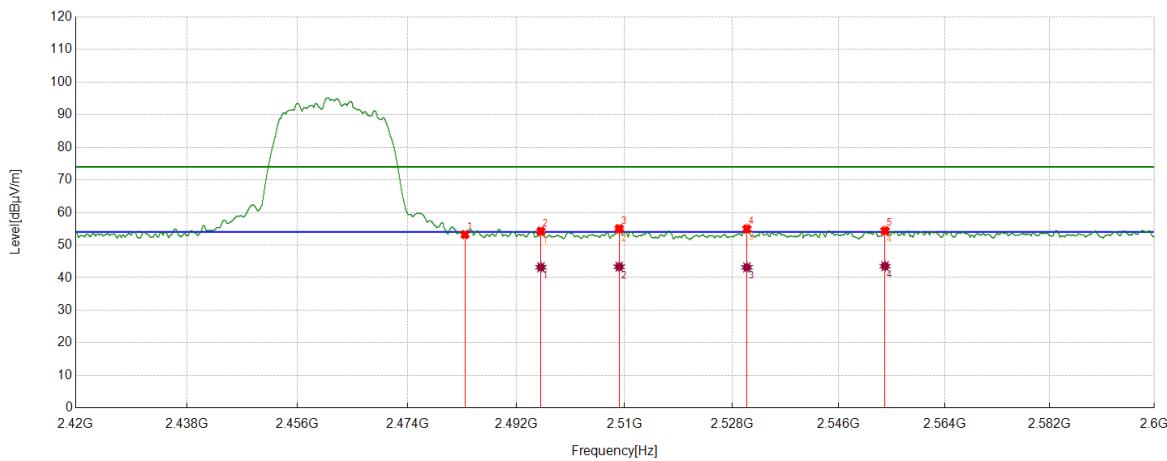
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	40.26	12.97	53.23	74.00	-20.77	Horizontal
2	2496.0595	40.85	13.08	53.93	74.00	-20.07	Horizontal
3	2509.0886	41.44	13.20	54.64	74.00	-19.36	Horizontal
4	2530.4888	41.71	13.42	55.13	74.00	-18.87	Horizontal
5	2553.8467	41.02	13.37	54.39	74.00	-19.61	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2496.0595	30.11	13.08	43.19	54.00	-10.81	Horizontal
2	2509.0886	30.15	13.20	43.35	54.00	-10.65	Horizontal
3	2530.4888	29.73	13.42	43.15	54.00	-10.85	Horizontal
4	2553.8467	30.15	13.37	43.52	54.00	-10.48	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2462 MHz	Vertical	PASS

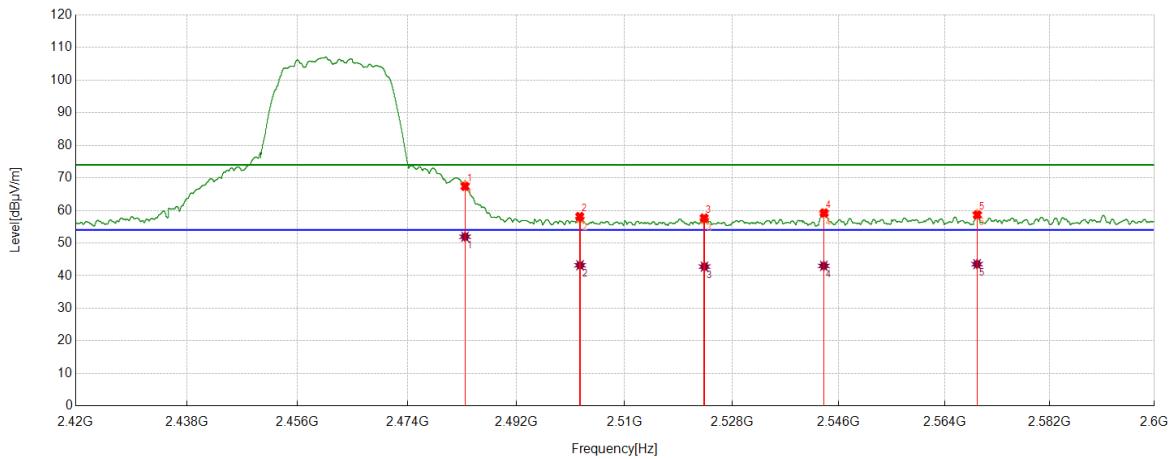

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	54.91	12.97	67.88	74.00	-6.12	Vertical
2	2502.5677	44.28	13.16	57.44	74.00	-16.56	Vertical
3	2523.3603	43.85	13.29	57.14	74.00	-16.86	Vertical
4	2543.4680	45.63	13.40	59.03	74.00	-14.97	Vertical
5	2569.5263	45.42	13.45	58.87	74.00	-15.13	Vertical

AV Result:


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	38.96	12.97	51.93	54.00	-2.07	Vertical
2	2502.5677	30.03	13.16	43.19	54.00	-10.81	Vertical
3	2523.3603	29.48	13.29	42.77	54.00	-11.23	Vertical
4	2543.4680	29.60	13.40	43.00	54.00	-11.00	Vertical
5	2569.5263	30.08	13.45	43.53	54.00	-10.47	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Antenna Type 1: PCB Antenna

Test Mode	Channel	Polarization	Verdict
11B	2412 MHz	Horizontal	PASS

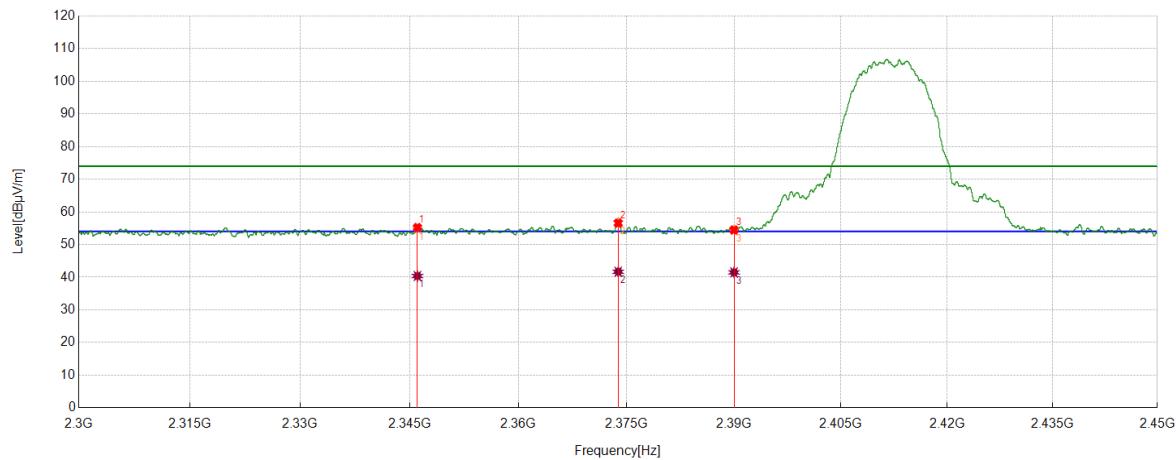

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2346.0933	43.79	11.14	54.93	74.00	-19.07	Horizontal
2	2373.8467	45.45	11.29	56.74	74.00	-17.26	Horizontal
3	2390	43.22	11.25	54.47	74.00	-19.53	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2346.0933	29.23	11.14	40.37	54.00	-13.63	Horizontal
2	2373.8467	30.38	11.29	41.67	54.00	-12.33	Horizontal
3	2390	30.23	11.25	41.48	54.00	-12.52	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2412 MHz	Vertical	PASS

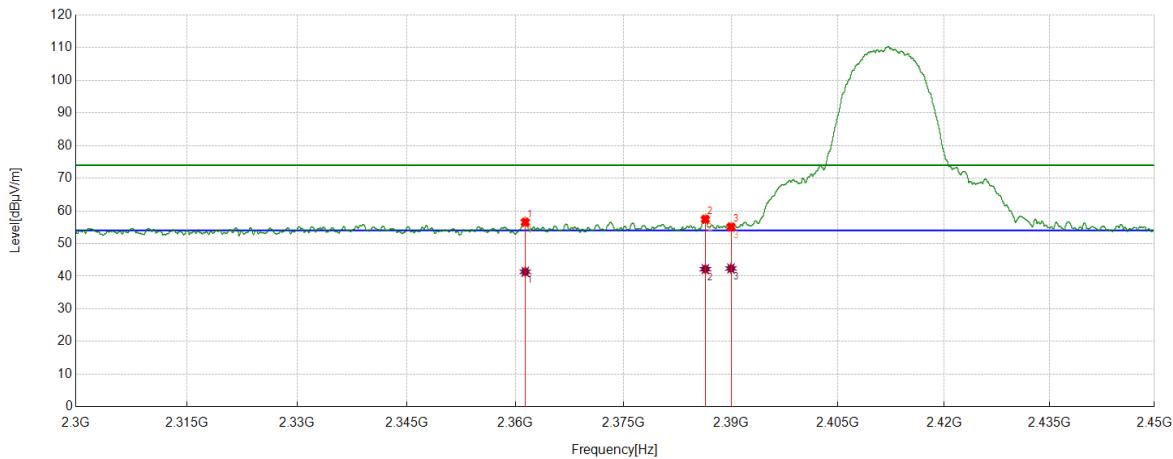

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2361.3764	45.58	11.17	56.75	74.00	-17.25	Vertical
2	2386.4108	46.21	11.28	57.49	74.00	-16.51	Vertical
3	2390	43.76	11.25	55.01	74.00	-18.99	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2361.3764	30.18	11.17	41.35	54.00	-12.65	Vertical
2	2386.4108	30.89	11.28	42.17	54.00	-11.83	Vertical
3	2390	31.12	11.25	42.37	54.00	-11.63	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2417 MHz	Horizontal	PASS

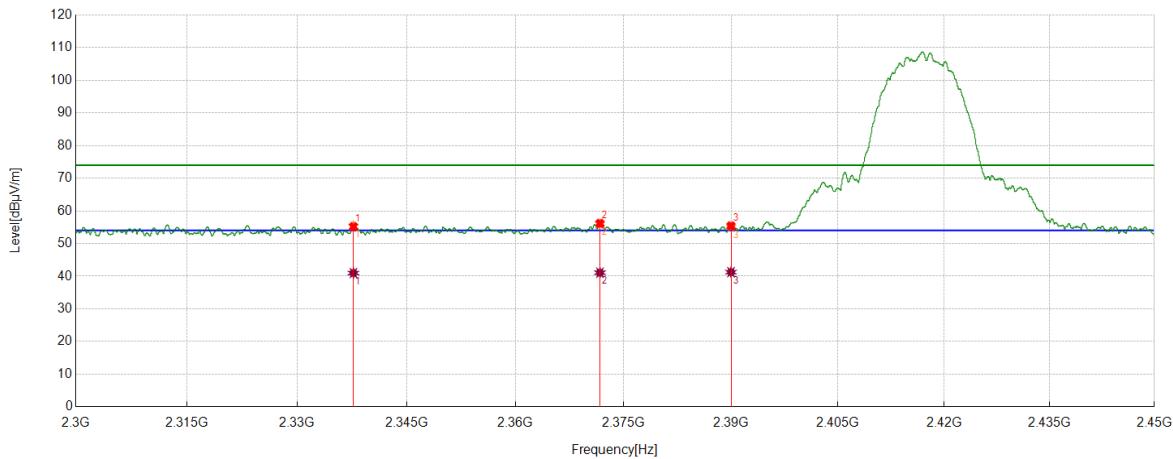
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2337.7297	44.36	11.09	55.45	74.00	-18.55	Horizontal
2	2371.7277	44.81	11.28	56.09	74.00	-17.91	Horizontal
3	2390	43.93	11.25	55.18	74.00	-18.82	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2337.7297	29.88	11.09	40.97	54.00	-13.03	Horizontal
2	2371.7277	29.80	11.28	41.08	54.00	-12.92	Horizontal
3	2390	30.00	11.25	41.25	54.00	-12.75	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2417 MHz	Vertical	PASS

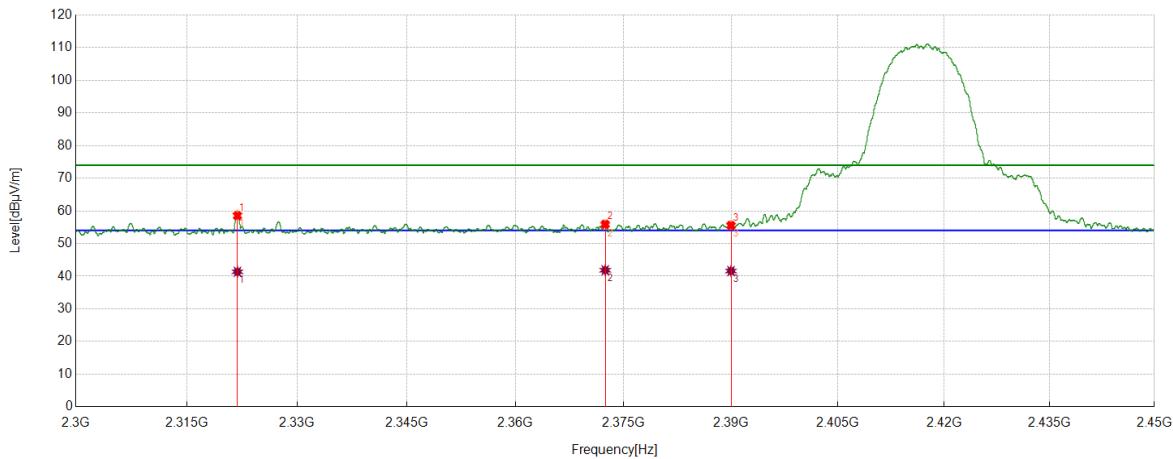
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2321.9027	47.89	10.87	58.76	74.00	-15.24	Vertical
2	2372.4591	44.48	11.28	55.76	74.00	-18.24	Vertical
3	2390	44.33	11.25	55.58	74.00	-18.42	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2321.9027	30.49	10.87	41.36	54.00	-12.64	Vertical
2	2372.4591	30.56	11.28	41.84	54.00	-12.16	Vertical
3	2390	30.35	11.25	41.60	54.00	-12.40	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2457 MHz	Horizontal	PASS

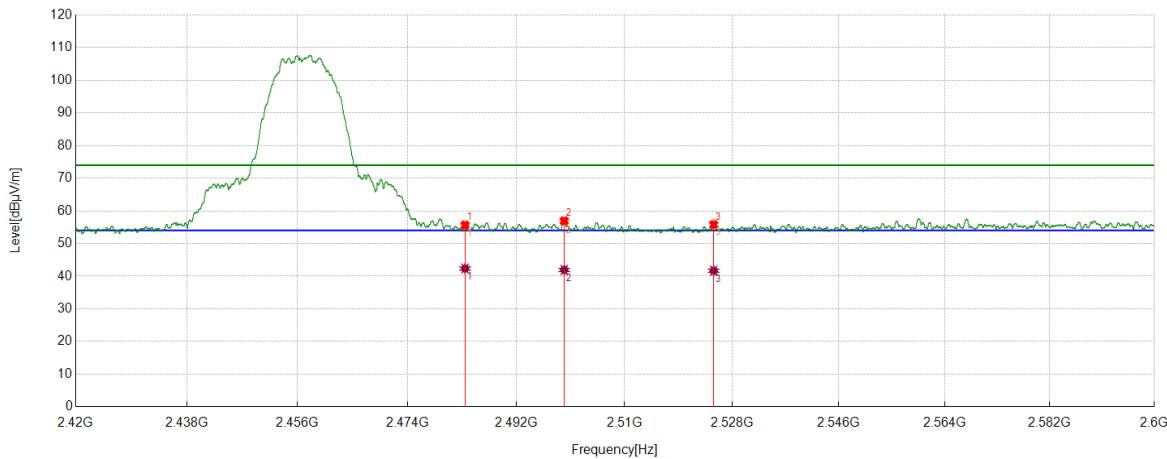

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	44.24	11.28	55.52	74.00	-18.48	Horizontal
2	2499.93	45.29	11.47	56.76	74.00	-17.24	Horizontal
3	2524.9081	44.31	11.73	56.04	74.00	-17.96	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	31.07	11.28	42.35	54.00	-11.65	Horizontal
2	2499.93	30.46	11.47	41.93	54.00	-12.07	Horizontal
3	2524.9081	29.96	11.73	41.69	54.00	-12.31	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2457 MHz	Vertical	PASS

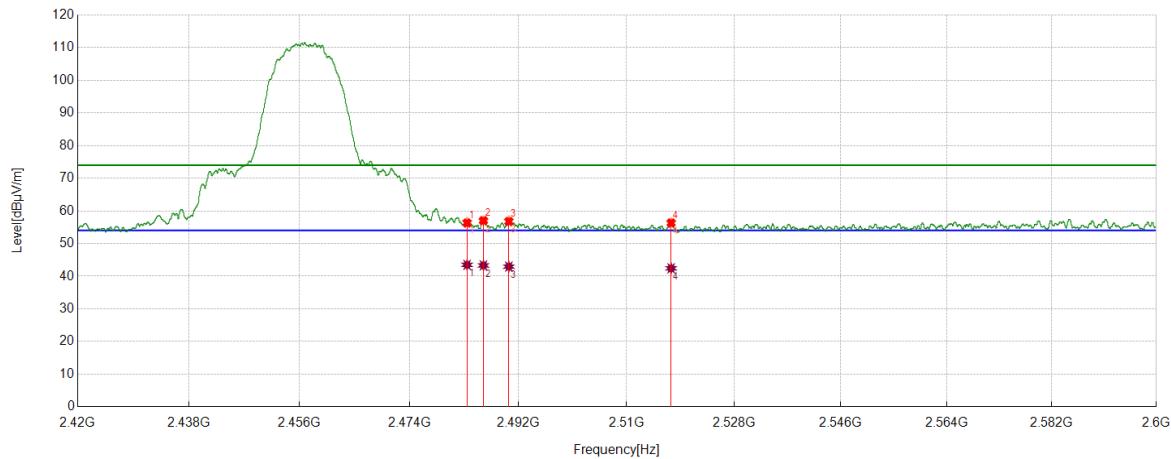
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	45.25	11.28	56.53	74.00	-17.47	Vertical
2	2486.2033	45.56	11.33	56.89	74.00	-17.11	Vertical
3	2490.4113	45.58	11.39	56.97	74.00	-17.03	Vertical
4	2517.4372	44.82	11.56	56.38	74.00	-17.62	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	32.20	11.28	43.48	54.00	-10.52	Vertical
2	2486.2033	31.98	11.33	43.31	54.00	-10.69	Vertical
3	2490.4113	31.55	11.39	42.94	54.00	-11.06	Vertical
4	2517.4372	30.86	11.56	42.42	54.00	-11.58	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2462 MHz	Horizontal	PASS

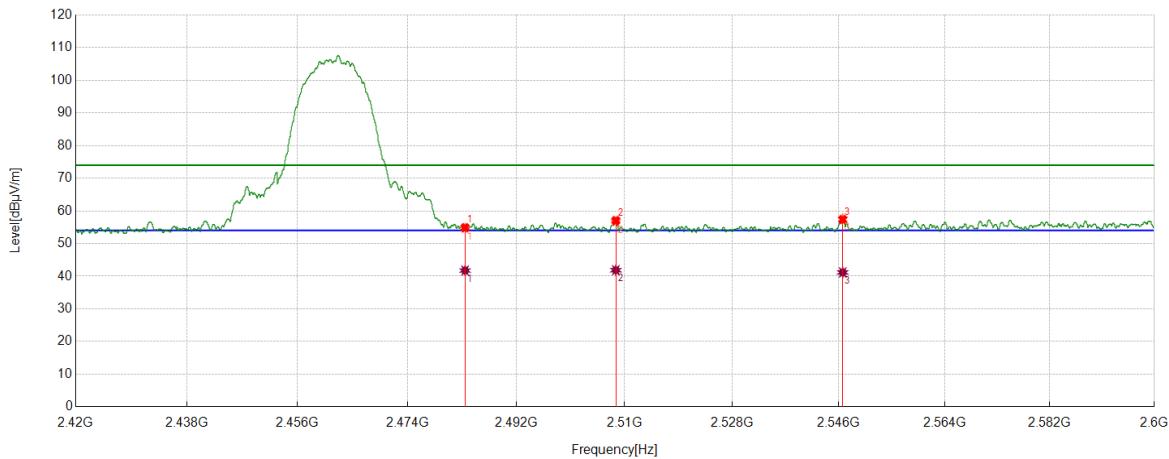

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	43.46	11.28	54.74	74.00	-19.26	Horizontal
2	2508.5261	45.27	11.49	56.76	74.00	-17.24	Horizontal
3	2546.6683	45.83	11.82	57.65	74.00	-16.35	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	30.47	11.28	41.75	54.00	-12.25	Horizontal
2	2508.5261	30.36	11.49	41.85	54.00	-12.15	Horizontal
3	2546.6683	29.34	11.82	41.16	54.00	-12.84	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2462 MHz	Vertical	PASS

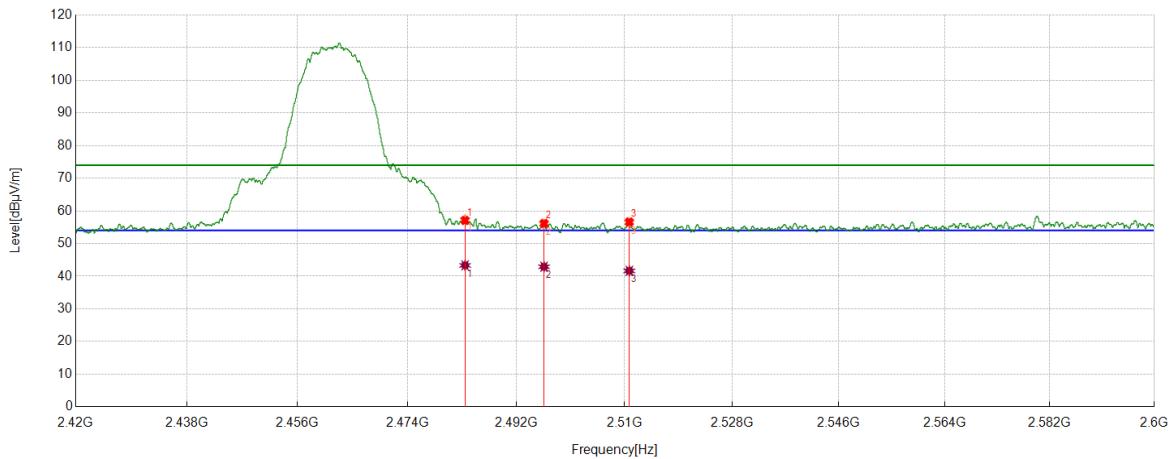
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	46.08	11.28	57.36	74.00	-16.64	Vertical
2	2496.5771	44.63	11.44	56.07	74.00	-17.93	Vertical
3	2510.7763	44.97	11.50	56.47	74.00	-17.53	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	32.04	11.28	43.32	54.00	-10.68	Vertical
2	2496.5771	31.46	11.44	42.90	54.00	-11.10	Vertical
3	2510.7763	30.15	11.50	41.65	54.00	-12.35	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2412 MHz	Horizontal	PASS

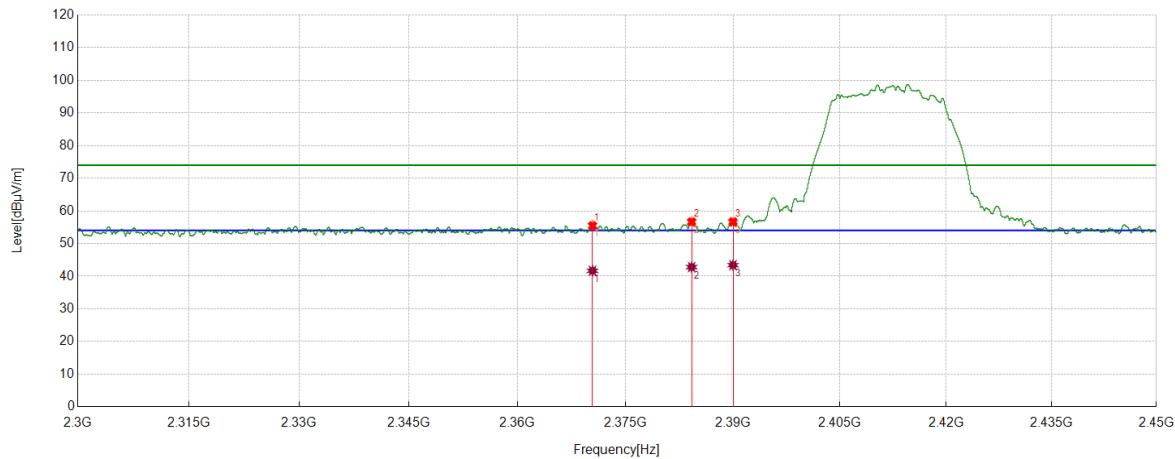
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2370.4151	44.44	11.27	55.71	74.00	-18.29	Horizontal
2	2384.2168	45.47	11.29	56.76	74.00	-17.24	Horizontal
3	2390	45.28	11.25	56.53	74.00	-17.47	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2370.4151	30.40	11.27	41.67	54.00	-12.33	Horizontal
2	2384.2168	31.51	11.29	42.80	54.00	-11.20	Horizontal
3	2390	32.14	11.25	43.39	54.00	-10.61	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2412 MHz	Vertical	PASS

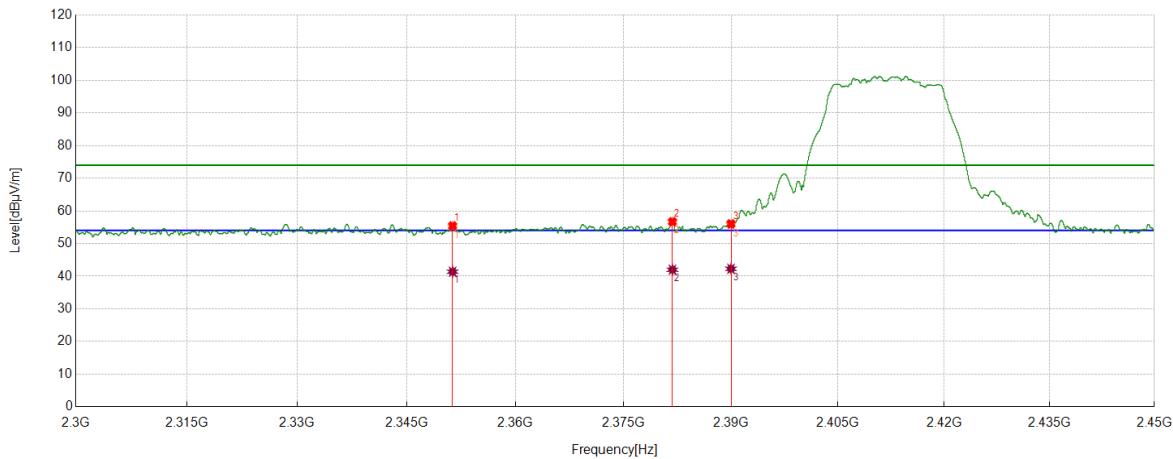

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2351.3439	44.08	11.15	55.23	74.00	-18.77	Vertical
2	2381.8165	45.25	11.31	56.56	74.00	-17.44	Vertical
3	2390	44.51	11.25	55.76	74.00	-18.24	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2351.3439	30.23	11.15	41.38	54.00	-12.62	Vertical
2	2381.8165	30.68	11.31	41.99	54.00	-12.01	Vertical
3	2390	31.02	11.25	42.27	54.00	-11.73	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2427 MHz	Horizontal	PASS

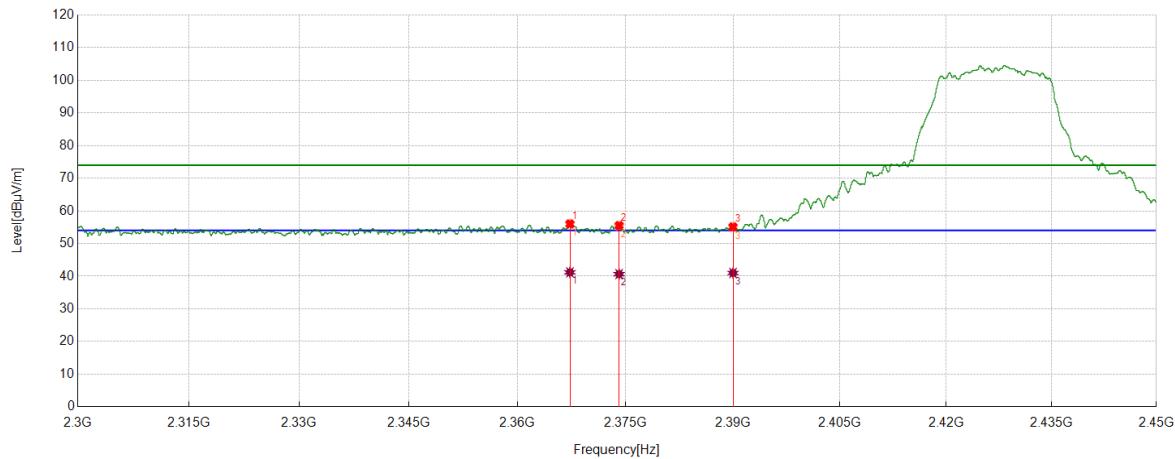
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2367.2834	44.71	11.24	55.95	74.00	-18.05	Horizontal
2	2374.1093	44.03	11.29	55.32	74.00	-18.68	Horizontal
3	2390	43.73	11.25	54.98	74.00	-19.02	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2367.2834	29.95	11.24	41.19	54.00	-12.81	Horizontal
2	2374.1093	29.35	11.29	40.64	54.00	-13.36	Horizontal
3	2390	29.74	11.25	40.99	54.00	-13.01	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2427 MHz	Vertical	PASS

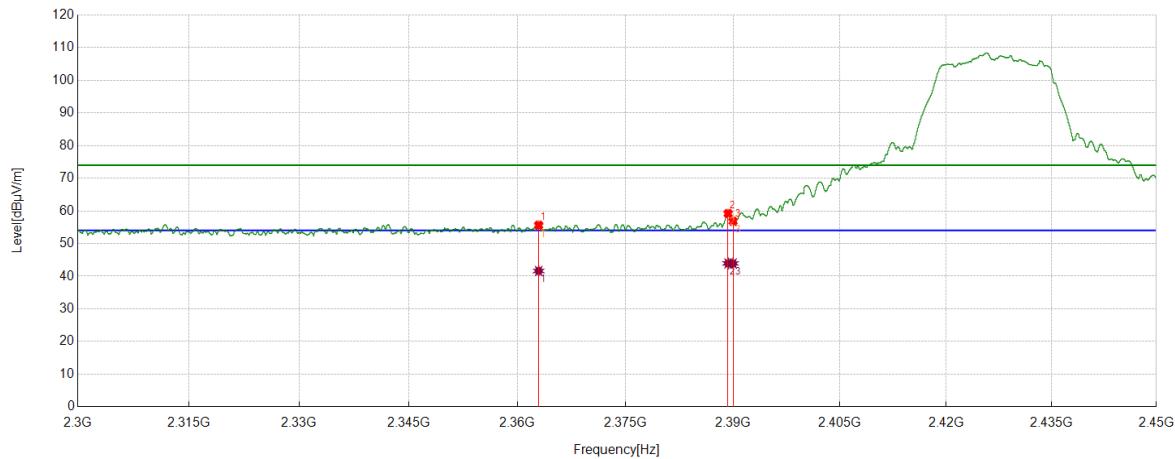

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2362.9516	44.31	11.19	55.50	74.00	-18.50	Vertical
2	2389.3174	47.89	11.25	59.14	74.00	-14.86	Vertical
3	2390	45.59	11.25	56.84	74.00	-17.16	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2362.9516	30.42	11.19	41.61	54.00	-12.39	Vertical
2	2389.3174	32.68	11.25	43.93	54.00	-10.07	Vertical
3	2390	32.66	11.25	43.91	54.00	-10.09	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2447 MHz	Horizontal	PASS

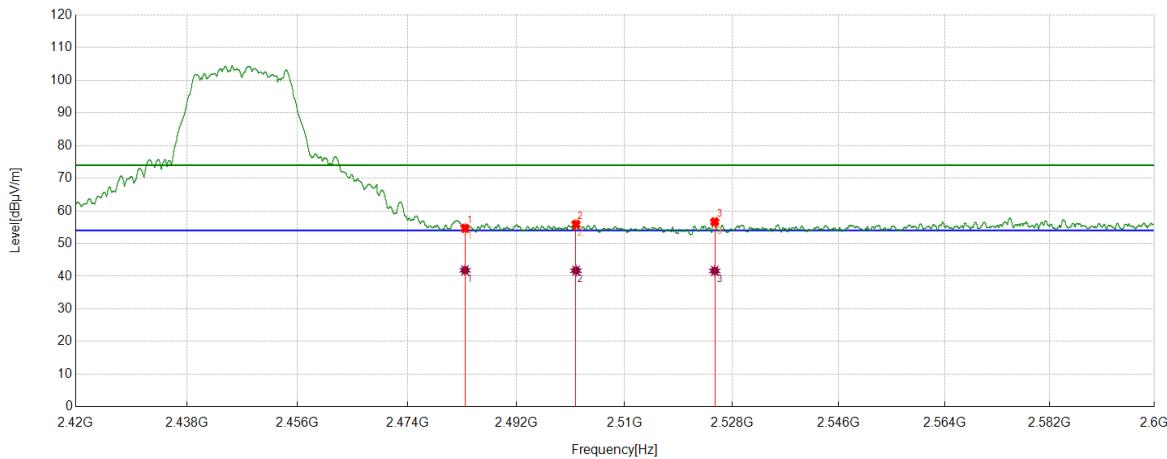

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	43.5	11.28	54.78	74.00	-19.22	Horizontal
2	2501.8877	44.48	11.47	55.95	74.00	-18.05	Horizontal
3	2525.0881	44.73	11.73	56.46	74.00	-17.54	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	30.53	11.28	41.81	54.00	-12.19	Horizontal
2	2501.8877	30.25	11.47	41.72	54.00	-12.28	Horizontal
3	2525.0881	29.92	11.73	41.65	54.00	-12.35	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2447 MHz	Vertical	PASS

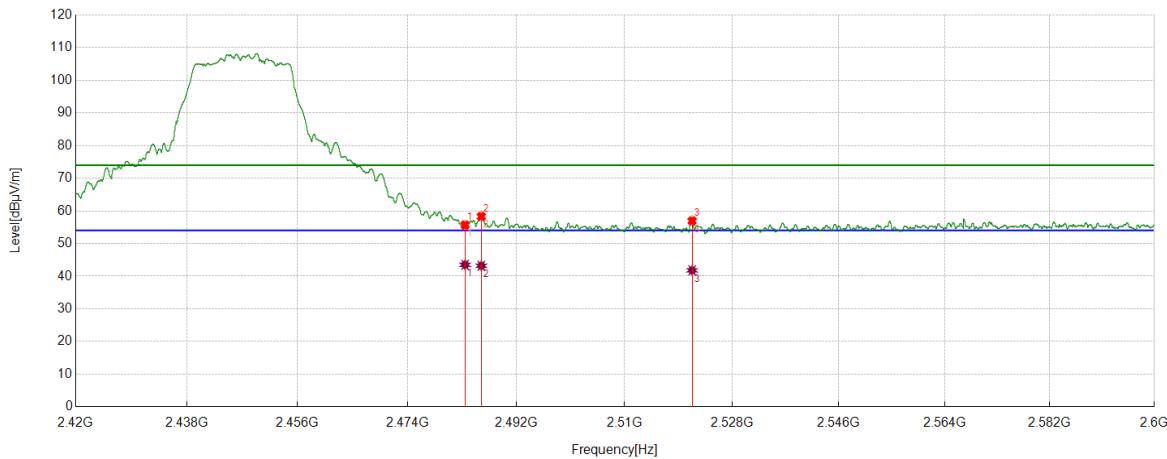

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	44.38	11.28	55.66	74.00	-18.34	Vertical
2	2486.1808	47.17	11.33	58.50	74.00	-15.50	Vertical
3	2521.2852	45.37	11.63	57.00	74.00	-17.00	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	32.21	11.28	43.49	54.00	-10.51	Vertical
2	2486.1808	31.88	11.33	43.21	54.00	-10.79	Vertical
3	2521.2852	30.17	11.63	41.80	54.00	-12.20	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2462 MHz	Horizontal	PASS

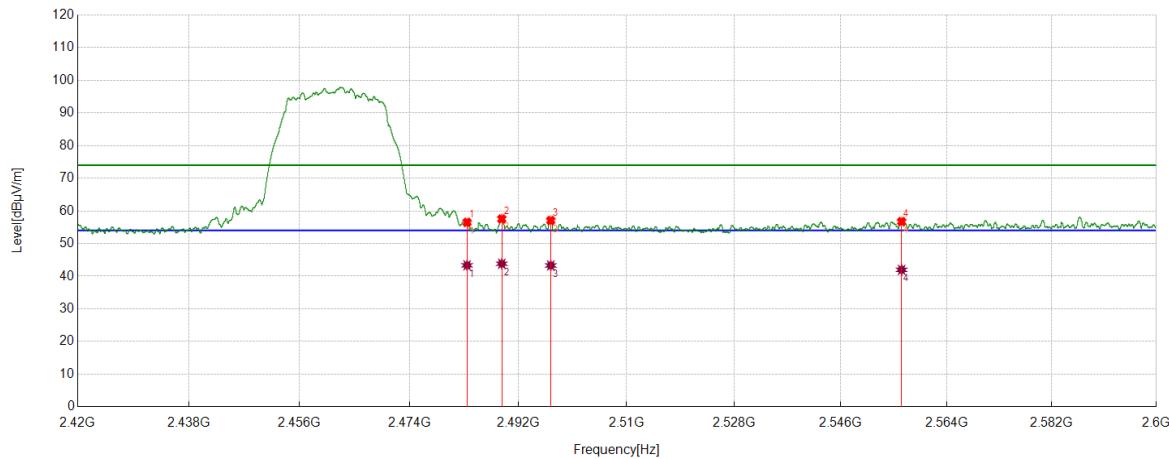

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	45.02	11.28	56.30	74.00	-17.70	Horizontal
2	2489.2412	46.26	11.38	57.64	74.00	-16.36	Horizontal
3	2497.3647	45.58	11.45	57.03	74.00	-16.97	Horizontal
4	2556.322	44.8	11.87	56.67	74.00	-17.33	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	32.06	11.28	43.34	54.00	-10.66	Horizontal
2	2489.2412	32.45	11.38	43.83	54.00	-10.17	Horizontal
3	2497.3647	31.85	11.45	43.30	54.00	-10.70	Horizontal
4	2556.322	30.09	11.87	41.96	54.00	-12.04	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2462 MHz	Vertical	PASS

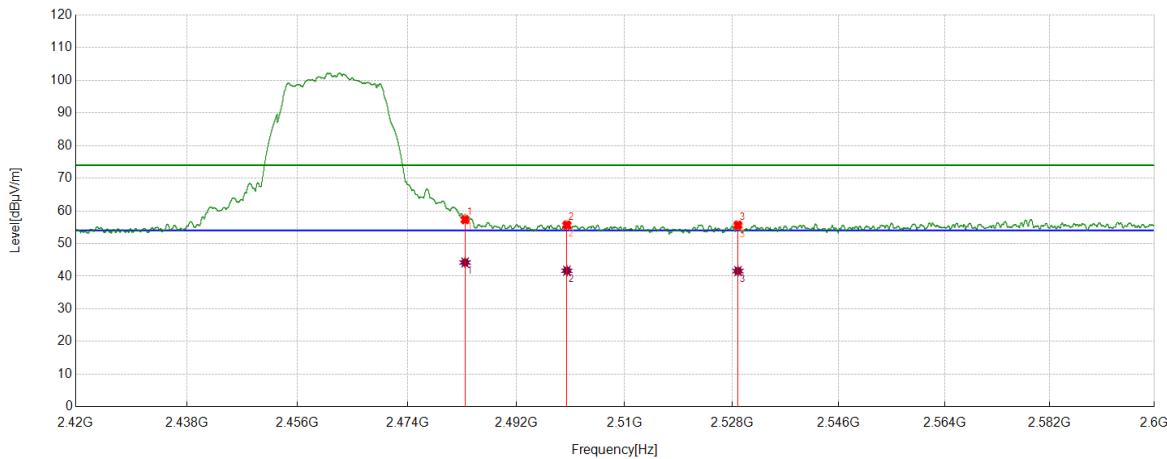

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	46.31	11.28	57.59	74.00	-16.41	Vertical
2	2500.38	44.12	11.47	55.59	74.00	-18.41	Vertical
3	2528.9811	43.57	11.84	55.41	74.00	-18.59	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	32.92	11.28	44.20	54.00	-9.80	Vertical
2	2500.38	30.21	11.47	41.68	54.00	-12.32	Vertical
3	2528.9811	29.74	11.84	41.58	54.00	-12.42	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2412 MHz	Horizontal	PASS

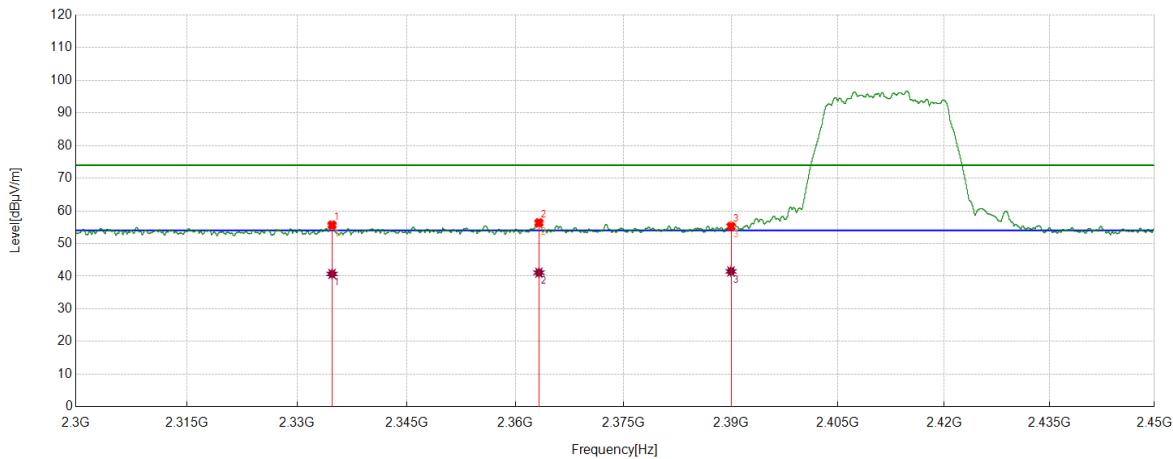
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2334.8044	44.46	11.04	55.50	74.00	-18.50	Horizontal
2	2363.2704	44.95	11.19	56.14	74.00	-17.86	Horizontal
3	2390	44.21	11.25	55.46	74.00	-18.54	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2334.8044	29.67	11.04	40.71	54.00	-13.29	Horizontal
2	2363.2704	29.90	11.19	41.09	54.00	-12.91	Horizontal
3	2390	30.24	11.25	41.49	54.00	-12.51	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2412 MHz	Vertical	PASS

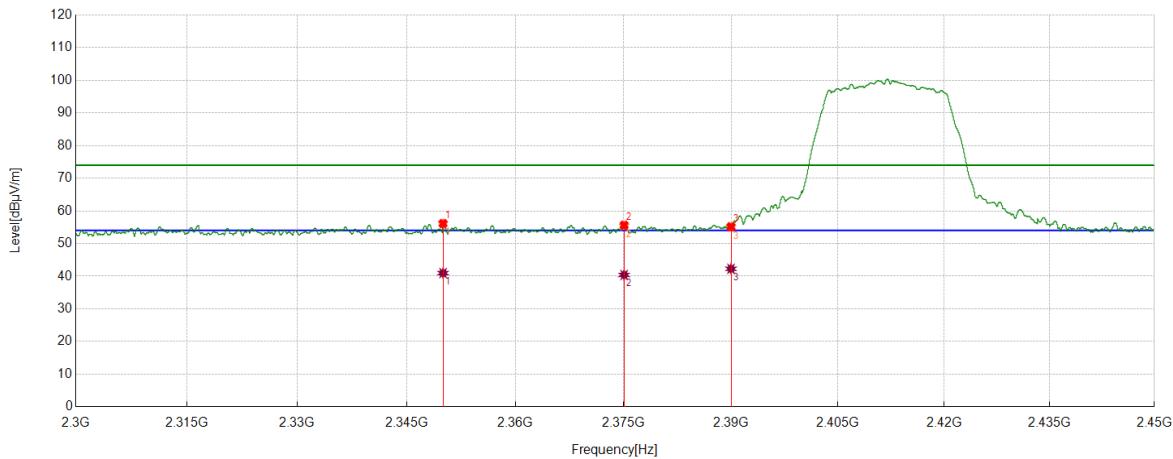
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2350.0313	44.89	11.15	56.04	74.00	-17.96	Vertical
2	2375.0844	44.08	11.30	55.38	74.00	-18.62	Vertical
3	2390	43.72	11.25	54.97	74.00	-19.03	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2350.0313	29.81	11.15	40.96	54.00	-13.04	Vertical
2	2375.0844	29.10	11.30	40.40	54.00	-13.60	Vertical
3	2390	31.02	11.25	42.27	54.00	-11.73	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2427 MHz	Horizontal	PASS

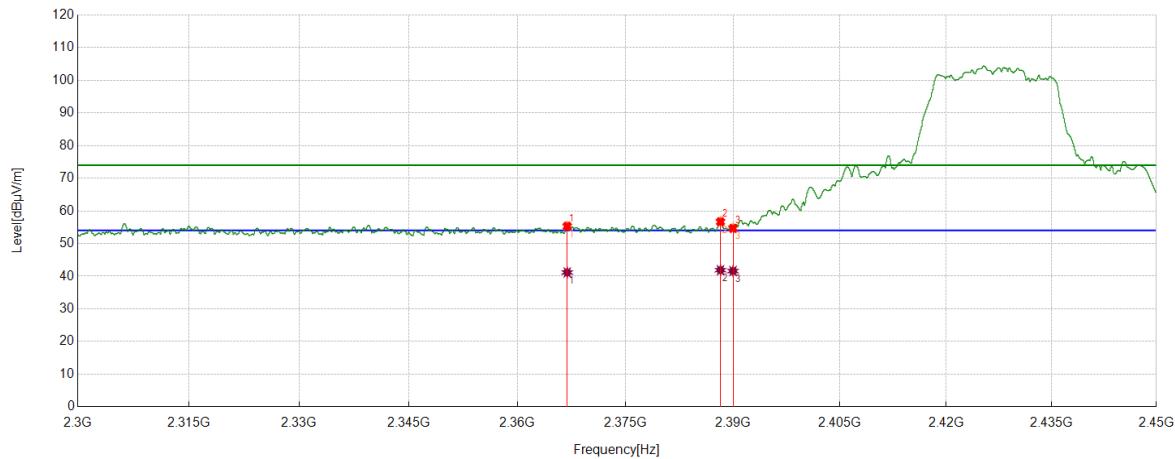
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2366.9084	44.08	11.23	55.31	74.00	-18.69	Horizontal
2	2388.2485	45.48	11.26	56.74	74.00	-17.26	Horizontal
3	2390	43.53	11.25	54.78	74.00	-19.22	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2366.9084	29.93	11.23	41.16	54.00	-12.84	Horizontal
2	2388.2485	30.60	11.26	41.86	54.00	-12.14	Horizontal
3	2390	30.34	11.25	41.59	54.00	-12.41	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2427 MHz	Vertical	PASS

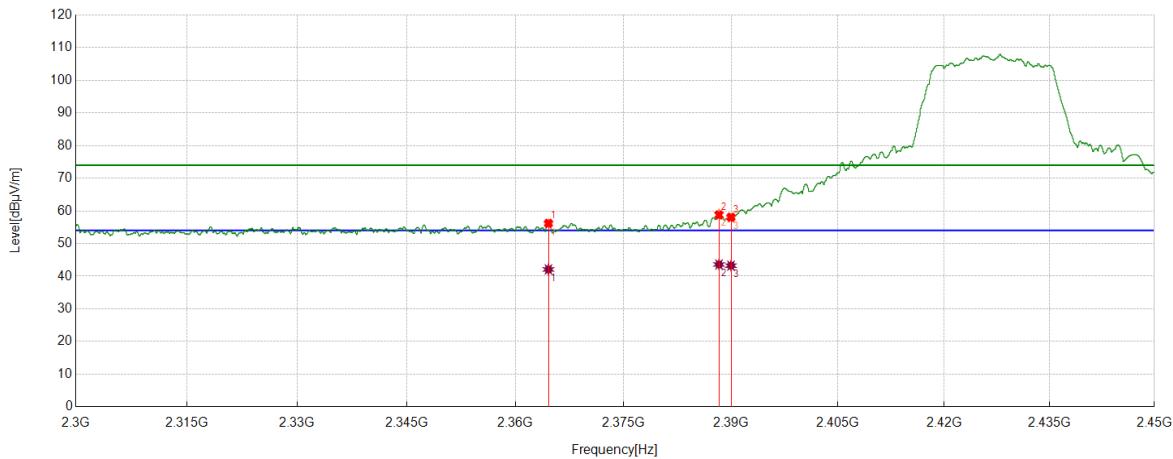

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2364.5831	44.82	11.20	56.02	74.00	-17.98	Vertical
2	2388.3235	47.79	11.26	59.05	74.00	-14.95	Vertical
3	2390	46.56	11.25	57.81	74.00	-16.19	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2364.5831	30.88	11.20	42.08	54.00	-11.92	Vertical
2	2388.3235	32.33	11.26	43.59	54.00	-10.41	Vertical
3	2390	31.99	11.25	43.24	54.00	-10.76	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2447 MHz	Horizontal	PASS

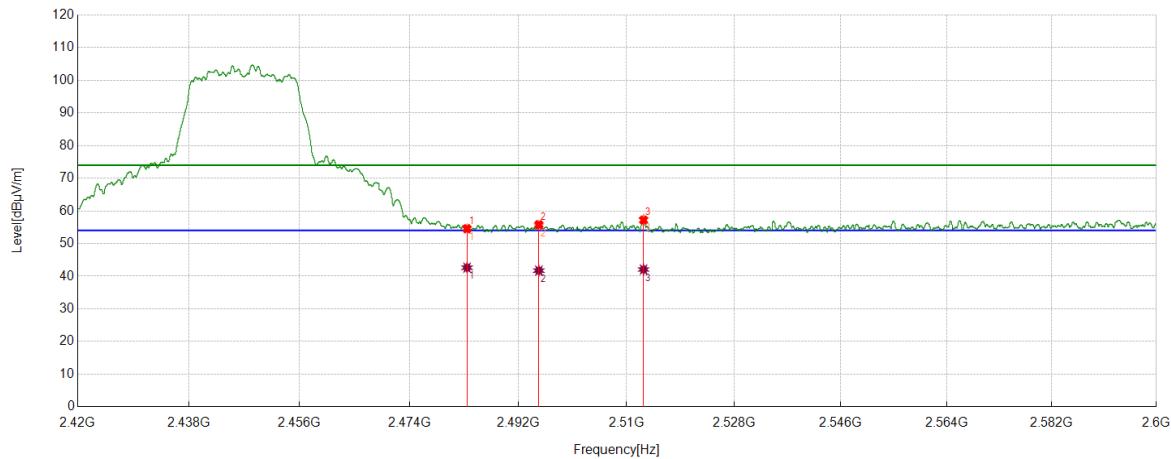
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	43.32	11.28	54.60	74.00	-19.40	Horizontal
2	2495.3844	44.15	11.43	55.58	74.00	-18.42	Horizontal
3	2512.8241	45.91	11.52	57.43	74.00	-16.57	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	31.33	11.28	42.61	54.00	-11.39	Horizontal
2	2495.3844	30.29	11.43	41.72	54.00	-12.28	Horizontal
3	2512.8241	30.54	11.52	42.06	54.00	-11.94	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2447 MHz	Vertical	PASS

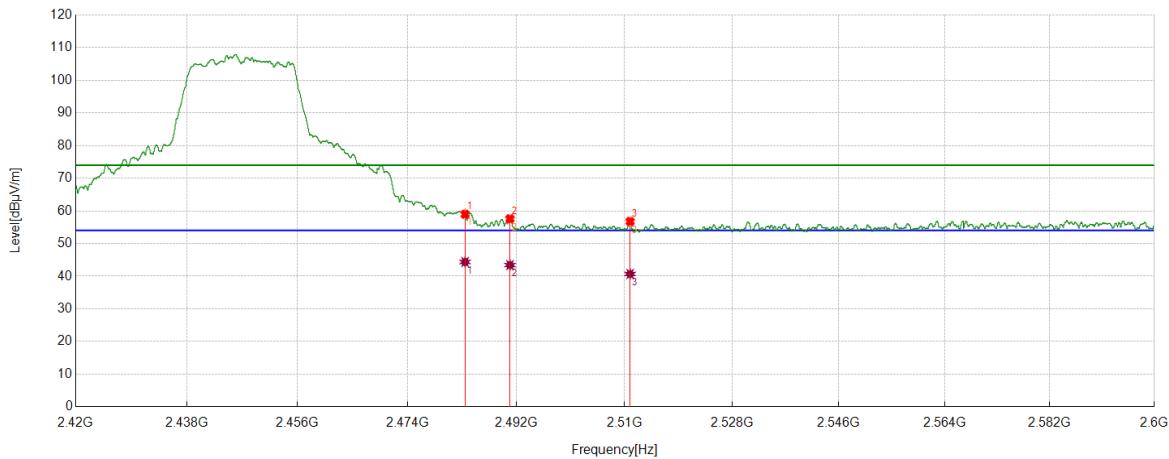
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	47.84	11.28	59.12	74.00	-14.88	Vertical
2	2490.9289	45.96	11.40	57.36	74.00	-16.64	Vertical
3	2510.9114	45.21	11.50	56.71	74.00	-17.29	Vertical


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	33.08	11.28	44.36	54.00	-9.64	Vertical
2	2490.9289	32.01	11.40	43.41	54.00	-10.59	Vertical
3	2510.9114	29.19	11.50	40.69	54.00	-13.31	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2462 MHz	Horizontal	PASS

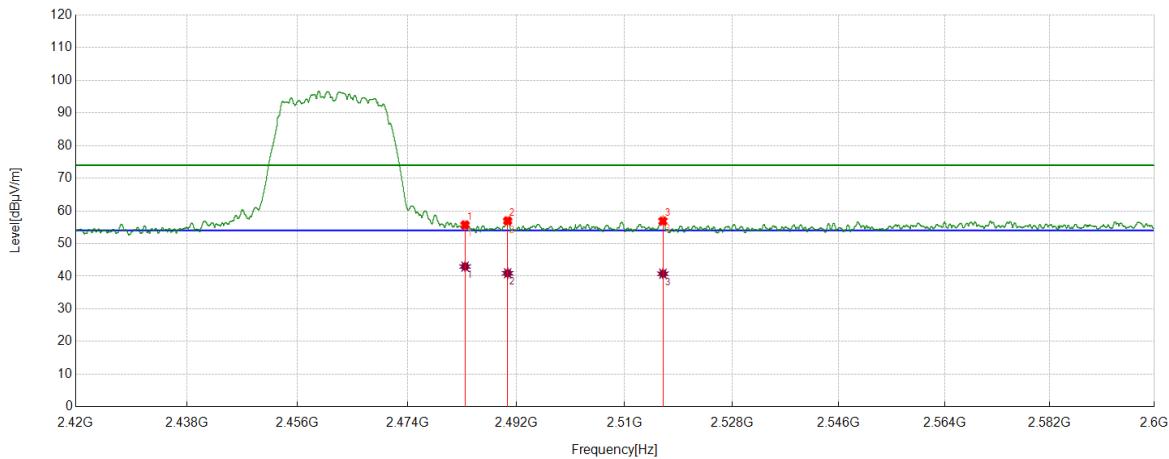
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	44.27	11.28	55.55	74.00	-18.45	Horizontal
2	2490.5463	45.36	11.39	56.75	74.00	-17.25	Horizontal
3	2516.402	45.56	11.55	57.11	74.00	-16.89	Horizontal


AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	31.68	11.28	42.96	54.00	-11.04	Horizontal
2	2490.5463	29.51	11.39	40.90	54.00	-13.10	Horizontal
3	2516.402	29.20	11.55	40.75	54.00	-13.25	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11N HT20	2462 MHz	Vertical	PASS

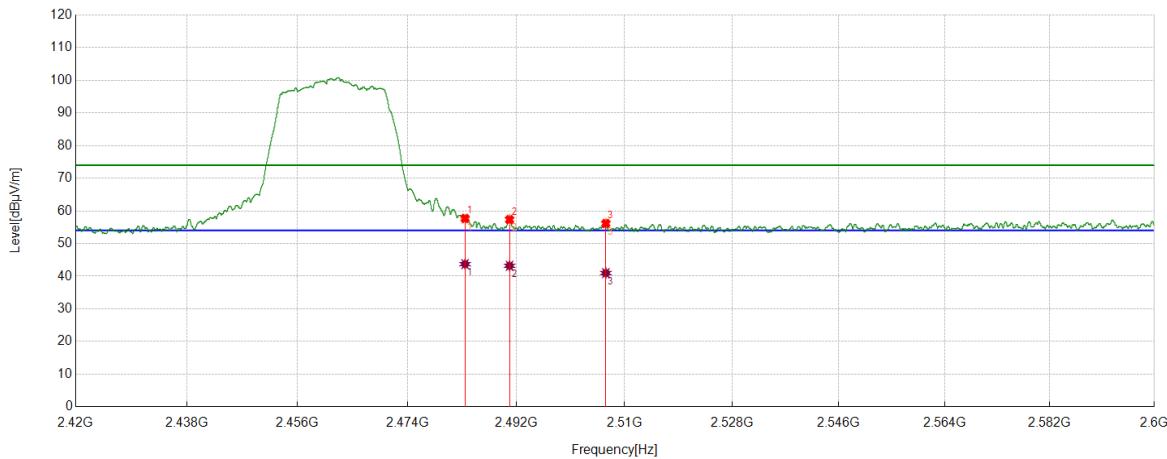
PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	46.23	11.28	57.51	74.00	-16.49	Vertical
2	2490.8614	46.06	11.40	57.46	74.00	-16.54	Vertical
3	2506.8609	44.67	11.48	56.15	74.00	-17.85	Vertical

AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5	32.42	11.28	43.70	54.00	-10.30	Vertical
2	2490.8614	31.80	11.40	43.20	54.00	-10.80	Vertical
3	2506.8609	29.48	11.48	40.96	54.00	-13.04	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

7.6.4. SPURIOUS EMISSIONS

TEST RESULTS TABLE

1) For 1GHz~18GHz

Antenna Type 2: External Dipole Antenna

Test Mode	Channel	Puw(dBm)	Verdict
11B	2412 MHz	<Limit	PASS
	2417 MHz	<Limit	PASS
	2437 MHz	<Limit	PASS
	2457 MHz	<Limit	PASS
	2462 MHz	<Limit	PASS
11G	2412 MHz	<Limit	PASS
	2427 MHz	<Limit	PASS
	2437 MHz	<Limit	PASS
	2447 MHz	<Limit	PASS
	2462 MHz	<Limit	PASS
11N HT20	2412 MHz	<Limit	PASS
	2427 MHz	<Limit	PASS
	2437 MHz	<Limit	PASS
	2447 MHz	<Limit	PASS
	2462 MHz	<Limit	PASS

Antenna Type 1: PCB Antenna

Test Mode	Channel	Puw(dBm)	Verdict
11B	2412 MHz	<Limit	PASS
	2417 MHz	<Limit	PASS
	2437 MHz	<Limit	PASS
	2457 MHz	<Limit	PASS
	2462 MHz	<Limit	PASS
11G	2412 MHz	<Limit	PASS
	2427 MHz	<Limit	PASS
	2437 MHz	<Limit	PASS
	2447 MHz	<Limit	PASS
	2462 MHz	<Limit	PASS
11N HT20	2412 MHz	<Limit	PASS
	2427 MHz	<Limit	PASS
	2437 MHz	<Limit	PASS
	2447 MHz	<Limit	PASS
	2462 MHz	<Limit	PASS

2) For 9kHz~30MHz

Test Mode	Antenna Type	Channel	Puw(dBm)	Verdict
11B	External Dipole Antenna	HCH	<Limit	PASS
	PCB Antenna	HCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

3) For 30MHz~1GHz

Test Mode	Antenna Type	Channel	Puw(dBm)	Verdict
11B	External Dipole Antenna	HCH	<Limit	PASS
	PCB Antenna	HCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

4) For 18GHz~26.5GHz


Test Mode	Antenna Type	Channel	Puw(dBm)	Verdict
11B	External Dipole Antenna	HCH	<Limit	PASS
	PCB Antenna	HCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

Part 1: 1GHz~3GHz
Antenna Type 2: External Dipole Antenna
HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
11B	2412 MHz	Horizontal	PASS

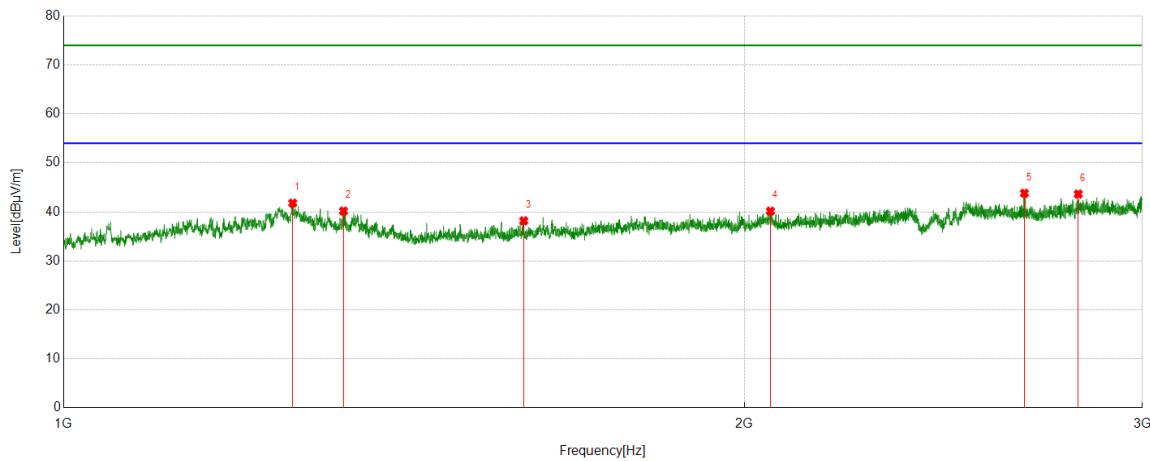

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1262.7410	47.42	-5.63	41.79	74.00	-32.21	Horizontal
2	1329.7841	45.85	-5.68	40.17	74.00	-33.83	Horizontal
3	1597.7465	43.31	-5.13	38.18	74.00	-35.82	Horizontal
4	2054.1965	42.64	-2.48	40.16	74.00	-33.84	Horizontal
5	2660.4217	44.48	-0.67	43.81	74.00	-30.19	Horizontal
6	2810.5156	43.87	-0.23	43.64	74.00	-30.36	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2412 MHz	Vertical	PASS

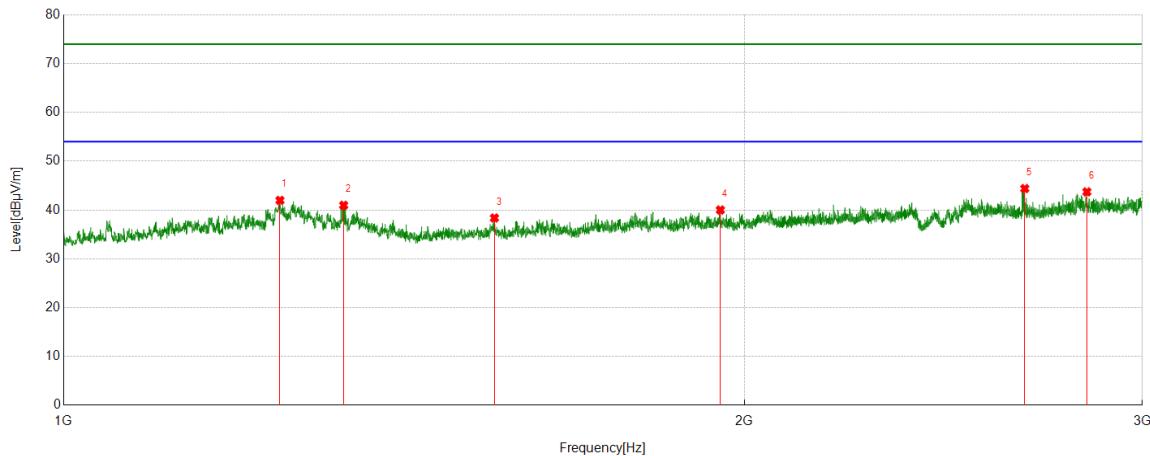


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1246.5274	47.61	-5.63	41.98	74.00	-32.02	Vertical
2	1330.7913	46.65	-5.68	40.97	74.00	-33.03	Vertical
3	1550.7565	43.78	-5.41	38.37	74.00	-35.63	Vertical
4	1952.0515	42.95	-2.94	40.01	74.00	-33.99	Vertical
5	2661.5665	45.07	-0.68	44.39	74.00	-29.61	Vertical
6	2835.2465	43.71	0.01	43.72	74.00	-30.28	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2417 MHz	Horizontal	PASS

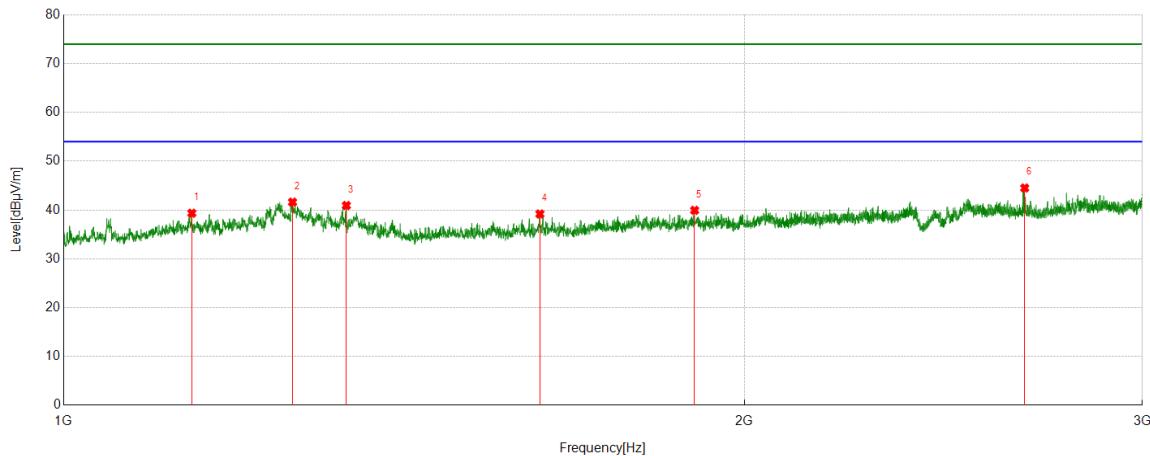


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1139.5267	44.89	-5.54	39.35	74.00	-34.65	Horizontal
2	1262.5496	47.25	-5.63	41.62	74.00	-32.38	Horizontal
3	1333.7313	46.60	-5.67	40.93	74.00	-33.07	Horizontal
4	1624.5596	44.23	-5.04	39.19	74.00	-34.81	Horizontal
5	1901.5696	43.22	-3.28	39.94	74.00	-34.06	Horizontal
6	2661.2177	45.19	-0.68	44.51	74.00	-29.49	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2417 MHz	Vertical	PASS

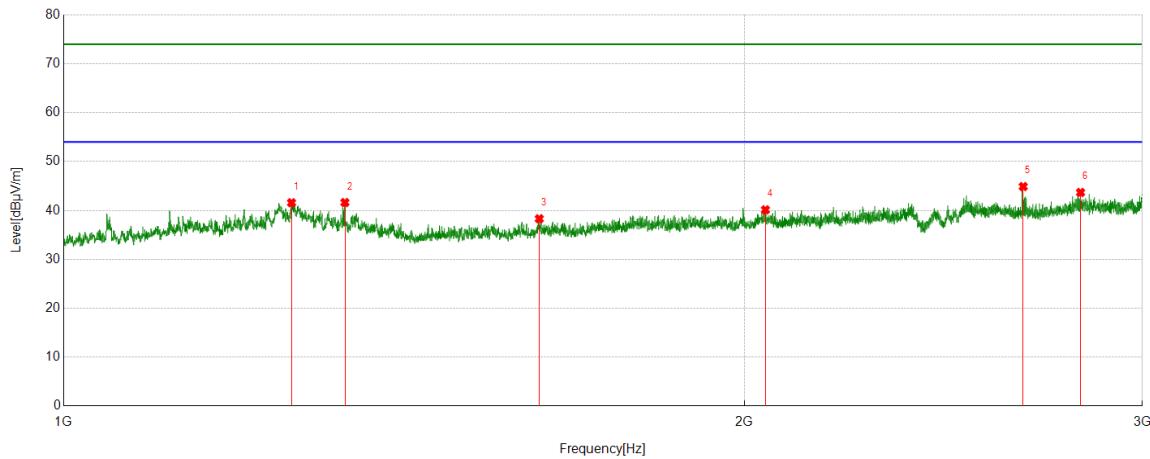


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1261.2414	47.25	-5.67	41.58	74.00	-32.42	Vertical
2	1331.7015	47.31	-5.68	41.63	74.00	-32.37	Vertical
3	1623.2325	43.34	-5.03	38.31	74.00	-35.69	Vertical
4	2043.7512	42.52	-2.39	40.13	74.00	-33.87	Vertical
5	2657.2909	45.59	-0.70	44.89	74.00	-29.11	Vertical
6	2817.1996	43.87	-0.19	43.68	74.00	-30.32	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2437 MHz	Horizontal	PASS

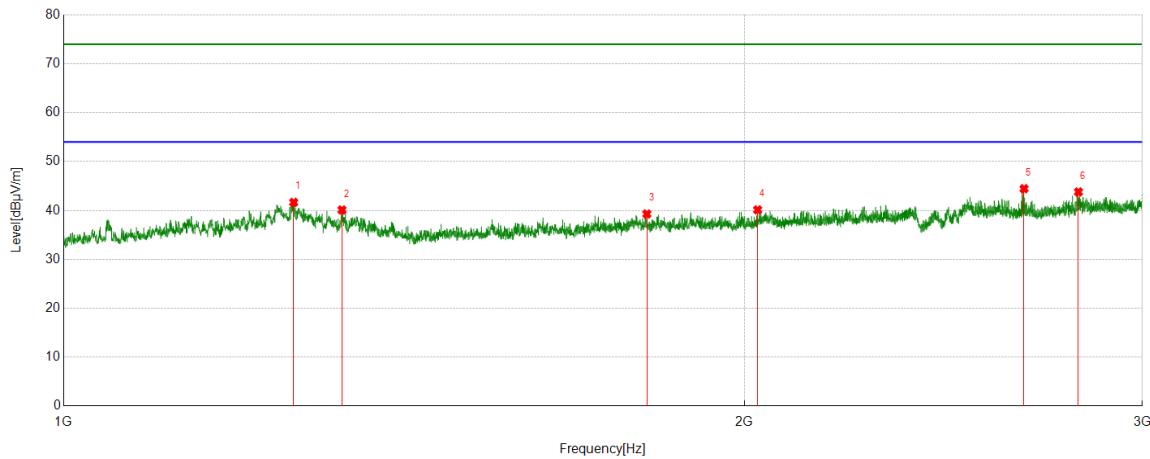


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1264.1127	47.25	-5.59	41.66	74.00	-32.34	Horizontal
2	1327.9127	45.77	-5.66	40.11	74.00	-33.89	Horizontal
3	1811.3443	43.34	-4.06	39.28	74.00	-34.72	Horizontal
4	2027.7563	42.89	-2.76	40.13	74.00	-33.87	Horizontal
5	2659.5428	45.12	-0.68	44.44	74.00	-29.56	Horizontal
6	2811.2198	44.02	-0.23	43.79	74.00	-30.21	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2437 MHz	Vertical	PASS

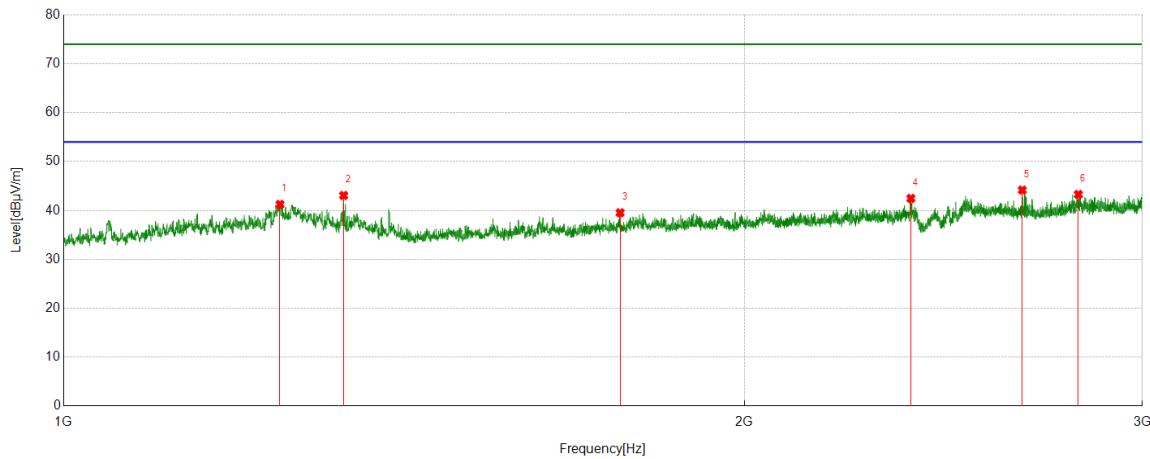


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1246.43969	46.88	-5.63	41.25	74.00	-32.75	Vertical
2	1330.0201	48.75	-5.68	43.07	74.00	-30.93	Vertical
3	1762.5127	43.63	-4.10	39.53	74.00	-34.47	Vertical
4	2370.0910	43.60	-1.13	42.47	74.00	-31.53	Vertical
5	2654.7515	44.90	-0.73	44.17	74.00	-29.83	Vertical
6	2810.7572	43.50	-0.23	43.27	74.00	-30.73	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2457 MHz	Horizontal	PASS

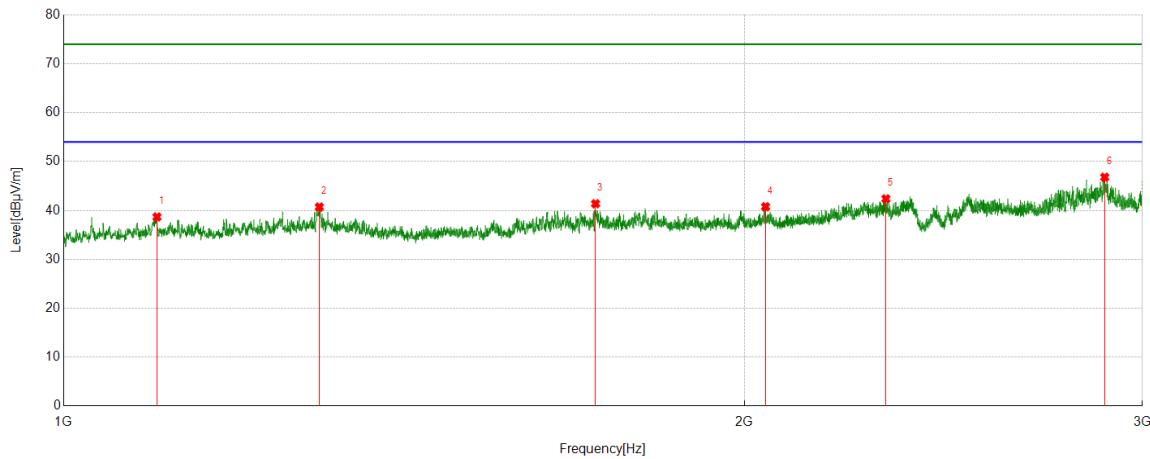


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1099.7465	44.26	-5.58	38.68	74.00	-35.32	Horizontal
2	1297.5208	46.52	-5.81	40.71	74.00	-33.29	Horizontal
3	1719.1309	45.69	-4.31	41.38	74.00	-32.62	Horizontal
4	2044.0348	43.15	-2.39	40.76	74.00	-33.24	Horizontal
5	2310.4965	44.03	-1.65	42.38	74.00	-31.62	Horizontal
6	2887.25504	46.32	0.48	46.80	74.00	-27.20	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2457 MHz	Vertical	PASS

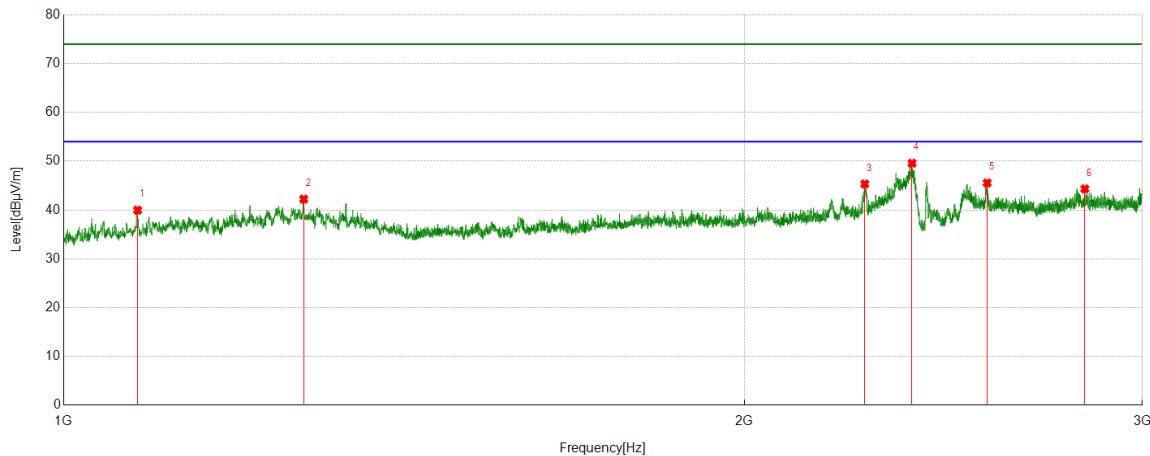


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1078.2465	45.38	-5.41	39.97	74.00	-34.03	Vertical
2	1277.1665	47.80	-5.56	42.24	74.00	-31.76	Vertical
3	2261.2465	47.46	-2.12	45.34	74.00	-28.66	Vertical
4	2372.7525	50.70	-1.12	49.58	74.00	-24.42	Vertical
5	2561.5246	46.49	-0.95	45.54	74.00	-28.46	Vertical
6	2829.5135	44.45	-0.12	44.33	74.00	-29.67	Vertical

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2462 MHz	Horizontal	PASS

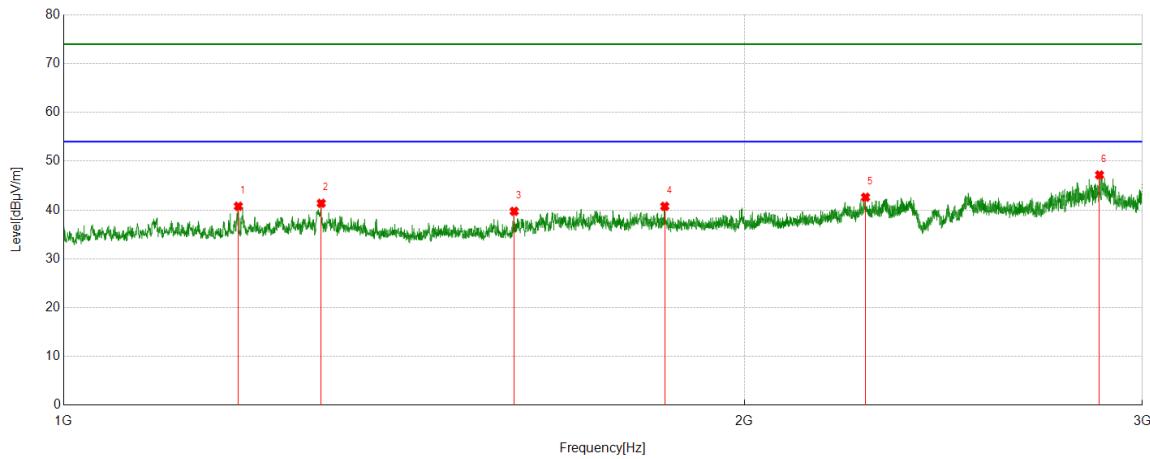


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1194.7496	46.34	-5.57	40.77	74.00	-33.23	Horizontal
2	1300.1196	47.22	-5.84	41.38	74.00	-32.62	Horizontal
3	1582.2641	45.09	-5.34	39.75	74.00	-34.25	Horizontal
4	1844.5904	44.47	-3.71	40.76	74.00	-33.24	Horizontal
5	2263.0899	44.73	-2.11	42.62	74.00	-31.38	Horizontal
6	2872.5907	47.02	0.17	47.19	74.00	-26.81	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11B	2462 MHz	Vertical	PASS

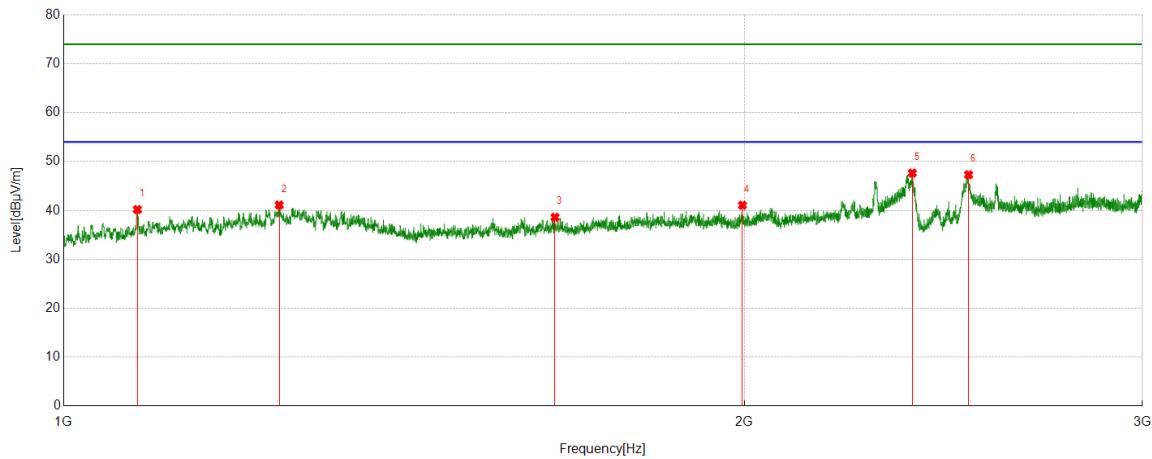


PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1078.1996	45.59	-5.41	40.18	74.00	-33.82	Vertical
2	1245.5159	46.73	-5.62	41.11	74.00	-32.89	Vertical
3	1649.4754	43.58	-4.98	38.60	74.00	-35.40	Vertical
4	1996.5986	44.09	-3.02	41.07	74.00	-32.93	Vertical
5	2373.0155	48.75	-1.11	47.64	74.00	-26.36	Vertical
6	2513.7705	47.66	-0.36	47.30	74.00	-26.70	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
11G	2412 MHz	Horizontal	PASS

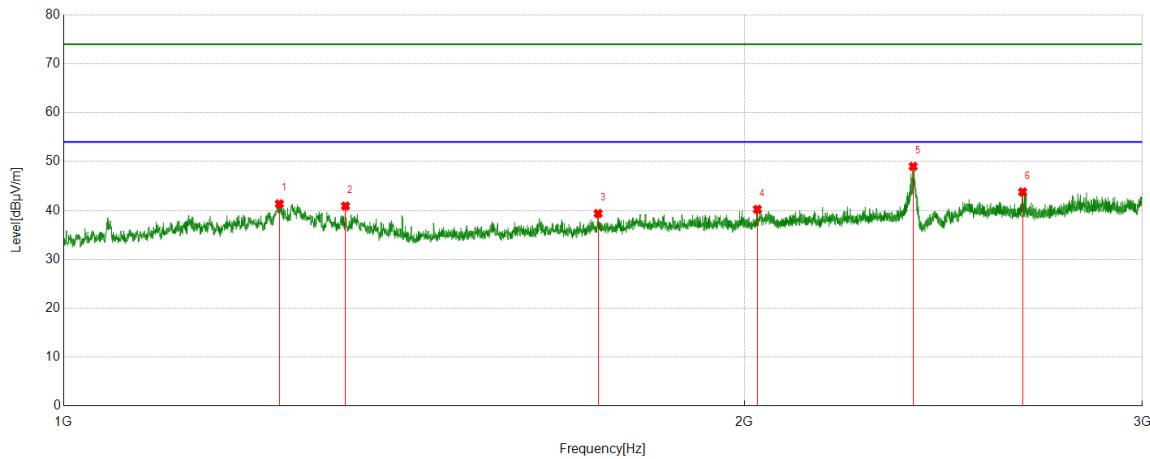

PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1245.7127	46.97	-5.62	41.35	74.00	-32.65	Horizontal
2	1332.4568	46.57	-5.67	40.90	74.00	-33.10	Horizontal
3	1723.5634	43.71	-4.34	39.37	74.00	-34.63	Horizontal
4	2027.0897	42.99	-2.76	40.23	74.00	-33.77	Horizontal
5	2375.5592	50.11	-1.10	49.01	74.00	-24.99	Horizontal
6	2655.7253	44.50	-0.72	43.78	74.00	-30.22	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.
 2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
 3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
 4. Peak: Peak detector.
 5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
 6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.