



EMI - T E S T R E P O R T

- FCC Part 15.247, RSS247 -

Type / Model Name : EBI10 System

Product Description : Wireless data logger system

Applicant : Xylem Analytics Germany GmbH

Address : Dr.-Karl-Slevogt-Strasse 1
82362 WEILHEIM, GERMANY

Manufacturer : Xylem Analytics Germany GmbH

Address : Dr.-Karl-Slevogt-Strasse 1
82362 WEILHEIM, GERMANY

Licence holder : Xylem Analytics Germany GmbH

Address : Dr.-Karl-Slevogt-Strasse 1
82362 WEILHEIM, GERMANY

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. :

T41595-02-04HS

03. July 2018

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-01
D-PL-12030-01-02

The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test results
without the written permission of the test laboratory.

Contents

1 TEST STANDARDS	3
2 EQUIPMENT UNDER TEST	4
2.1 Photo documentation of the EUT – Detailed photos see ATTACHMENT B	4
2.2 General remarks	4
2.3 Equipment type	4
2.4 Short description of the equipment under test (EUT)	4
2.5 Variants of the EUT	4
2.6 Operation frequency and channel plan	5
2.7 Transmit operating modes	5
2.8 Antenna	5
2.9 Power supply system utilised	5
2.10 Peripheral devices and interface cables	5
2.11 Determination of worst case conditions for final measurement	5
3 TEST RESULT SUMMARY	7
3.1 Final assessment	7
4 TEST ENVIRONMENT	8
4.1 Address of the test laboratory	8
4.2 Environmental conditions	8
4.3 Statement of the measurement uncertainty	9
4.4 Measurement protocol for FCC and ISED	10
5 TEST CONDITIONS AND RESULTS	12
5.1 AC power line conducted emissions	12
5.2 Maximum peak conducted output power	13
5.3 Unwanted emissions	15
6 USED TEST EQUIPMENT AND ACCESSORIES	27

ATTACHMENT_B as separate supplement

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15, Subpart A - General (September 2017)

Part 15, Subpart A, Section 15.31	Measurement standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart A, Section 15.35	Measurement detector functions and bandwidths

FCC Rules and Regulations Part 15, Subpart C - Intentional Radiators (September 2017)

Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.207	Conducted limits
Part 15, Subpart C, Section 15.209	Radiated emission limits, general requirements
Part 15, Subpart C, Section 15.247	Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz

ANSI C63.10: 2013

Testing Unlicensed Wireless Devices

ETSI TR 100 028 V1.3.1: 2001-03

Electromagnetic Compatibility and Radio Spectrum Matters (ERM);
Uncertainties in the Measurement of Mobile Radio Equipment
Characteristics—Part 1 and Part 2

KDB 558074 D01 v04

Guidance for performing compliance measurements on DTS
operating under §15.247, April 5, 2017.

2 EQUIPMENT UNDER TEST

2.1 Photo documentation of the EUT – Detailed photos see ATTACHMENT B

2.2 General remarks

The data logger is fully tested and certified by the test report T32050-00-12HS by mikes testingpartners gmbh. The logger has been modified by a PCB antenna in the RFID part. This test report shows the further compliance to FCC 15.247 after modification. New variants of the logger has been added. Therfore the related requirements

- Maximum peak out put power
- Spuriuos emission

are re-measured only.

2.3 Equipment type

ZigBee device

2.4 Short description of the equipment under test (EUT)

Data logger for temperature and pressure. Up to 4 mobile data logger can be used by one interface. The interface identifies a logger in the programming slot via 13.56 MHz RFID-Transceiver. In the mobile data logger is a RFID-Tag only. A 2.4 GHz "ZIGBEE" port (Chipset according IEEE 802.15.4) is used for data exchange, communication and programming the data logger, if the logger is enabled for communication via 13.56 MHz signal. This enable signal is necessary to activate the 2.4 GHz interface, otherwise no communication is possible.

Number of tested samples: 1
 Serial number: 17460014
 Firmware number: 4.05

EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

2.5 Variants of the EUT

Variants	Device-Name	Comment	Antenna
T01	EBI 10-Txxx	temperature sensor	integrated
T02	EBI 10-THxxx	humidity sensor	integrated
T03	EBI 10-TPxxx	pressure sensor	integrated
T04	EBI 100-Txxx	temperature sensor	integrated
T05	EBI 100-THxxx	humidity sensor	integrated
T06	EBI 100-TPxxx	pressure sensor	integrated
T07	EBI 12-Txxx	temperature sensor	integrated
T08	EBI 12-TTxxx	low temperature sensor	integrated
T09	EBI 12-THxxx	humidity sensor	integrated
T10	EBI 12-TPxxx	pressure sensor	integrated
T11	EBI 12-TLPxxx	low pressure sensor	integrated
T12	EBI 12-TCxxx	conductivity sensor	integrated
T13	EBI 16	pressure sensor	integrated

Note: The logger EBI12-TTxxx is selected for test.

2.6 Operation frequency and channel plan

The operating frequency is 2400 MHz to 2483.5 MHz.

Channel plan WLAN Standard 802.15.4:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
11	2405	19	2445
12	2410	20	2450
13	2415	21	2455
14	2420	22	2460
15	2425	23	2465
16	2430	24	2470
17	2435	25	2475
18	2440	26	2480

Note: the marked frequencies are determined for final testing.

2.7 Transmit operating modes

The EUT uses O-QPSK modulation and may provide following data rates:

- 250 kbps (kbps = kilobits per second)

2.8 Antenna

The following antenna shall be used with the EUT:

Antenna type logger:	PCB meander antenna
----------------------	---------------------

2.9 Power supply system utilised

Power supply voltage, V_{nom} : 3.6 VDC lithium ion battery

2.10 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- _____ Model : _____

- _____ Model : _____

2.11 Determination of worst case conditions for final measurement

Measurements are made in all three orthogonal axes and the settings of the EUT are changed to locate at which position and at what setting of the EUT produce the maximum of the emissions. For the further measurement the EUT is set in X position.

For the final test the following channels and test modes are selected:

IEEE Standard	Available channel	Tested channels	Power setting	Modulation	Modulation type	Data rate
802.15.4	11 to 26	11, 18, 26	Pmax	DSSS	O-QPSK	250 kbps

Note: The 802.15.4 is only used physically. No other common device may connect to.

2.11.1 Test jig

No test jig is used.

2.11.2 Test software

Special test software is used for the TX-continuous mode.

3 TEST RESULT SUMMARY

Operating in the 2400 MHz – 2483.5 MHz:

FCC Rule Part	RSS Rule Part	Description	Result
15.207(a)	RSS Gen, 8.8	AC power line conducted emissions	not applicable
15.247(a)(2)	RSS247, 5.2(1)	-6 dB EBW	Not tested
15.247(b)(3)	RSS247, 5.4(4)	Maximum peak conducted output power	passed
15.247(b)(4)	RSS247, 5.4(4)	Defacto limit	Not tested
15.247(d)	RSS247, 5.5	Unwanted emission	Not tested
15.247(d)	RSS-Gen, 8.10	Emissions in restricted bands	passed
15.247(e)	RSS247, 5.2(2)	PSD	Not tested
15.35(c)	RSS-Gen, 6.10	Pulsed operation	not applicable
15.247(b)(4)	-	Antenna requirement	not applicable
	RSS-Gen, 6.11	Transmitter frequency stability	Not tested
	RSS-Gen, 6.6	99 % Bandwidth	Not tested

The mentioned RSS Rule Parts in the above table are related to:

RSS Gen, Issue 4, November 2014

RSS 247, Issue 2, February 2017

3.1 Final assessment

The equipment under test fulfills the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 19 July 2016

Testing concluded on : 26 June 2018

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Hermann Smetana
Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 / 11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, CSA Group Bayern GmbH, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level	Calculated Uncertainty
AC power line conducted emissions	0.15 MHz to 30 MHz	95%	± 3.29 dB
EBW and OBW	2400 MHz to 3000 MHz	95%	$\pm 2.5 \times 10^{-7}$
Maximum peak conducted output power	2400 MHz to 3000 MHz	95%	± 0.62 dB
Power spectral density	2400 MHz to 3000 MHz	95%	± 0.62 dB
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	± 2.15 dB
Conducted Spurious Emissions	10000 MHz to 40000 MHz	95%	± 3.47 dB
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	± 3.53 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	± 3.71 dB
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	± 2.34 dB
Field strength of the fundamental	100 kHz to 100 MHz	95%	± 3.53 dB

4.4 Measurement protocol for FCC and ISED

4.4.1 General information

The Open Area test site is a listed Open Site under the Canadian Test-Sites File-No:

IC 3009A-1

The Anechoic chamber is a listed test site under the Canadian Test-Sites File-No:

IC 3009A-2

4.4.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".

4.4.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.4.2.2 Radiated emission (electrical field 30 MHz - 1 GHz)

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The setup of the equipment under test is established in accordance with ANSI C63.10. The interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so that they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees.

The final level in dB μ V/m is calculated by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:

30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency Delta (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	-	Limit (dB μ V/m)	=	(dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4

4.4.2.3 Radiated emission (electrical field 1 GHz - 40 GHz)

Radiated emissions from the EUT are measured in the frequency range 1 GHz up to the maximum frequency as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 metre non-conducting table, 1.5 metre above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The setup of the equipment under test is following set out in ANSI C63.10. The interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. Measurements are made in both the horizontal and vertical polarization planes in a fully anechoic room using a spectrum analyzer set to max peak detector function and a resolution 1 MHz and video bandwidth 3 MHz for peak measurement. The conditions determined as worst case will then be used for the final measurements. When the EUT is larger than the beam width of the measuring antenna it will be moved over the surface for the four sides of the equipment. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty and are calculated at the specified test distance.

5 TEST CONDITIONS AND RESULTS

5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part **A 4**.

5.1.1 Description of the test location

Test location: NONE

Remarks: Not applicable, the EUT is battery powered.

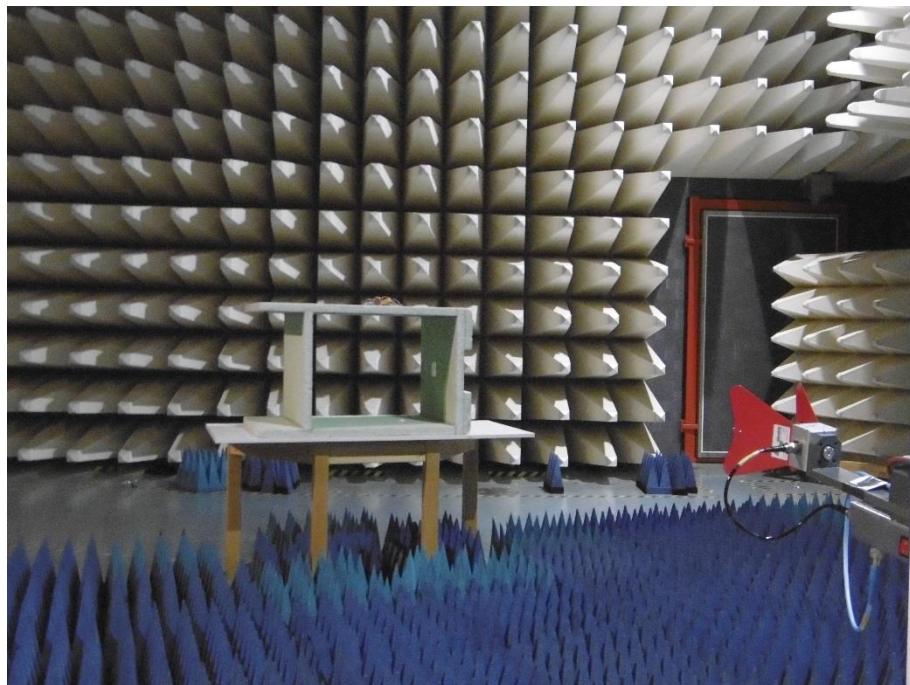
5.2 Maximum peak conducted output power

For test instruments and accessories used see section 6 Part **CPR 3**.

5.2.1 Description of the test location

Test location: Anechoic chamber 1
Test distance: 3 m

5.2.2 Photo documentation of the test set-up



5.2.3 Applicable standard

According to FCC Part 15, Section 15.247(b)(3):

For systems using digital modulation in the 2400 – 2483.5 MHz and 5725 – 5850 MHz bands, the maximum peak output power of the transmitter shall not exceed 1 Watt. The limit is based on transmitting antennas of directional gain that do not exceed 6 dBi.

5.2.4 Description of Measurement

The maximum peak conducted output power is measured using a peak power meter following the procedure set out in KDB 558074, item 9.1.2. The EUT is set in TX continuous mode while measuring.

5.2.5 Test result

		Test results radiated			
		Fieldstrength E (dB μ V/m)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Lowest frequency: CH11					
T_{nom}	V_{nom}	75.2	-20.1	36.0	-56.1
Middle frequency: CH18					
T_{nom}	V_{nom}	69.7	-25.6	36.0	-61.6
Highest frequency: CH26					
T_{nom}	V_{nom}	77.8	-17.5	36.0	-53.5

Peak Power Limit according to FCC Part 15, Section 15.247(b)(3):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(Watt)
902-928	30	1.0
2400-2483.5	30	1.0
5725-5850	30	1.0

The requirements are **FULFILLED**.

Remarks:

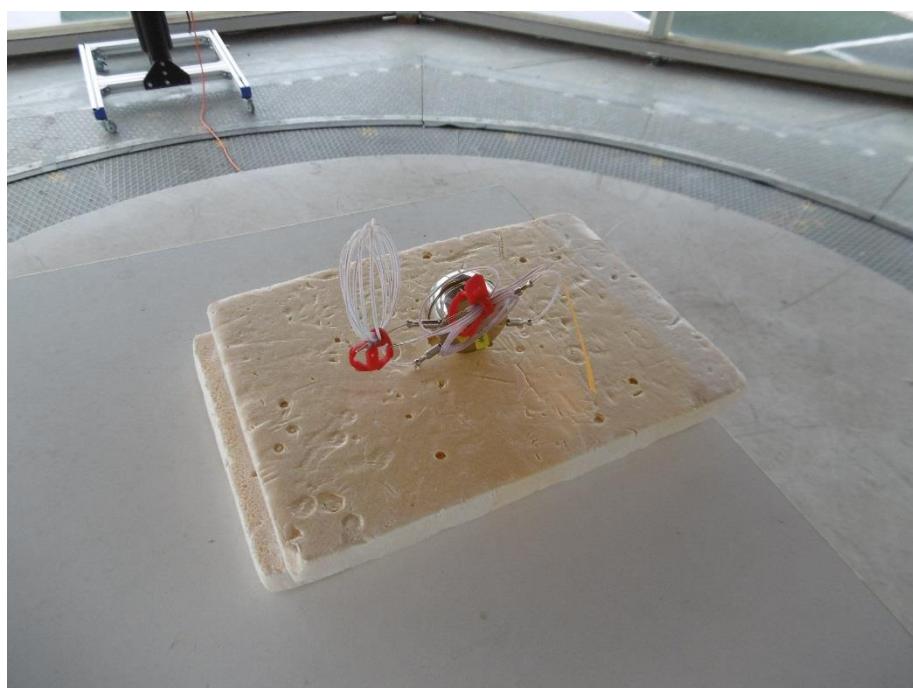
5.3 Unwanted emissions

For test instruments and accessories used see section 6 Part **SER 2, SER 3**.



5.3.1 Description of the test location

Test location: OATS 1
Test location: Anechoic chamber 1
Test distance: 3 m


5.3.2 Photo documentation of the test set-up



1 GHz – 18 GHz

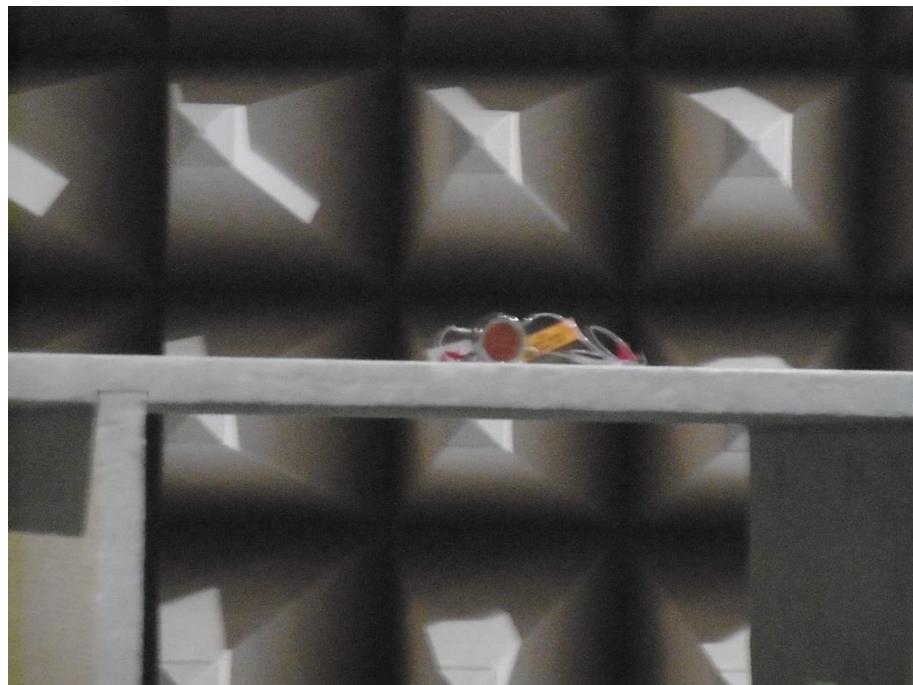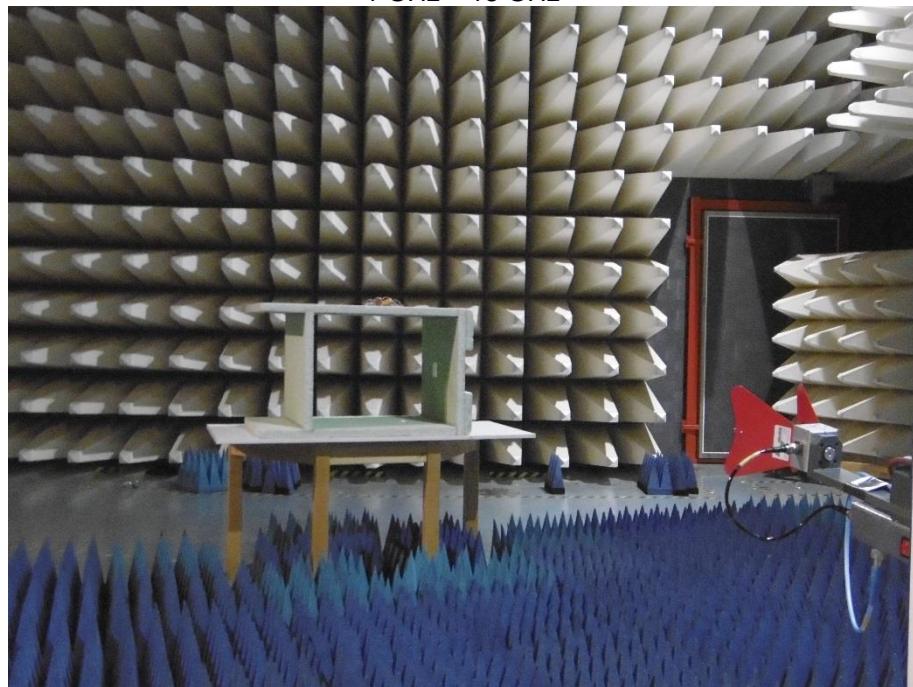

18 GHZ – 26 GHz

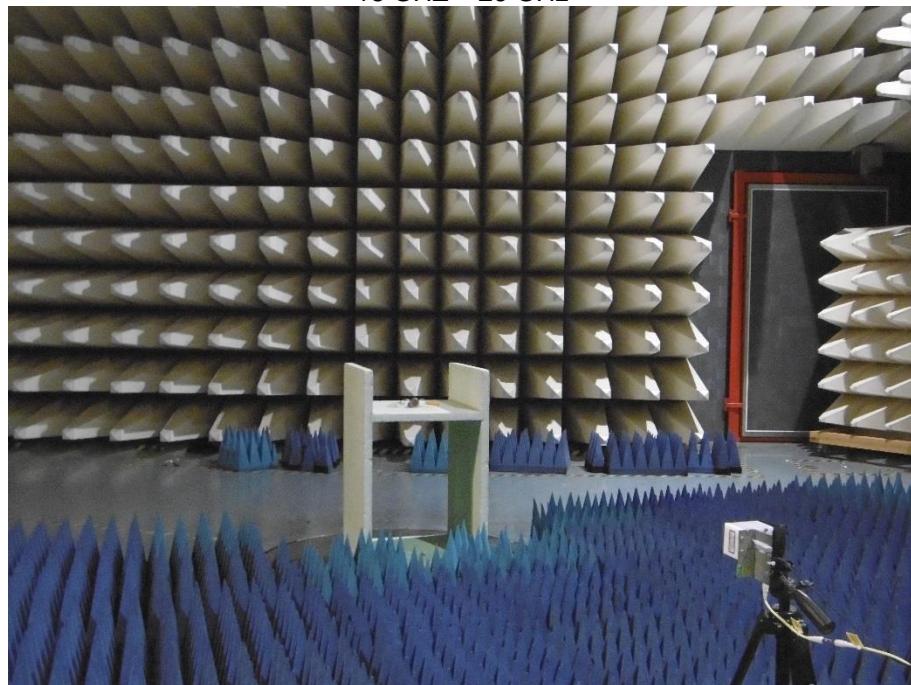

5.3.3 According to FCC Part 15, Section 15.205(a):

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

5.3.4 Description of Measurement


The restricted bands are measured radiated. The span of the spectrum analyser is set wide enough to capture the restricted band and measure the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The restricted bands are measured falling emissions into it and the nearest restricted band are checked for emissions also the restricted band for the harmonics of the carrier.



Spectrum analyser settings:


30 MHz – 1000 MHz: RBW: 120 kHz
 1000 MHz – 25 GHz: RBW: 1 MHz, VBW: 3 MHz, Sweep: Auto, Detector function: Peak



5.3.1 Test result

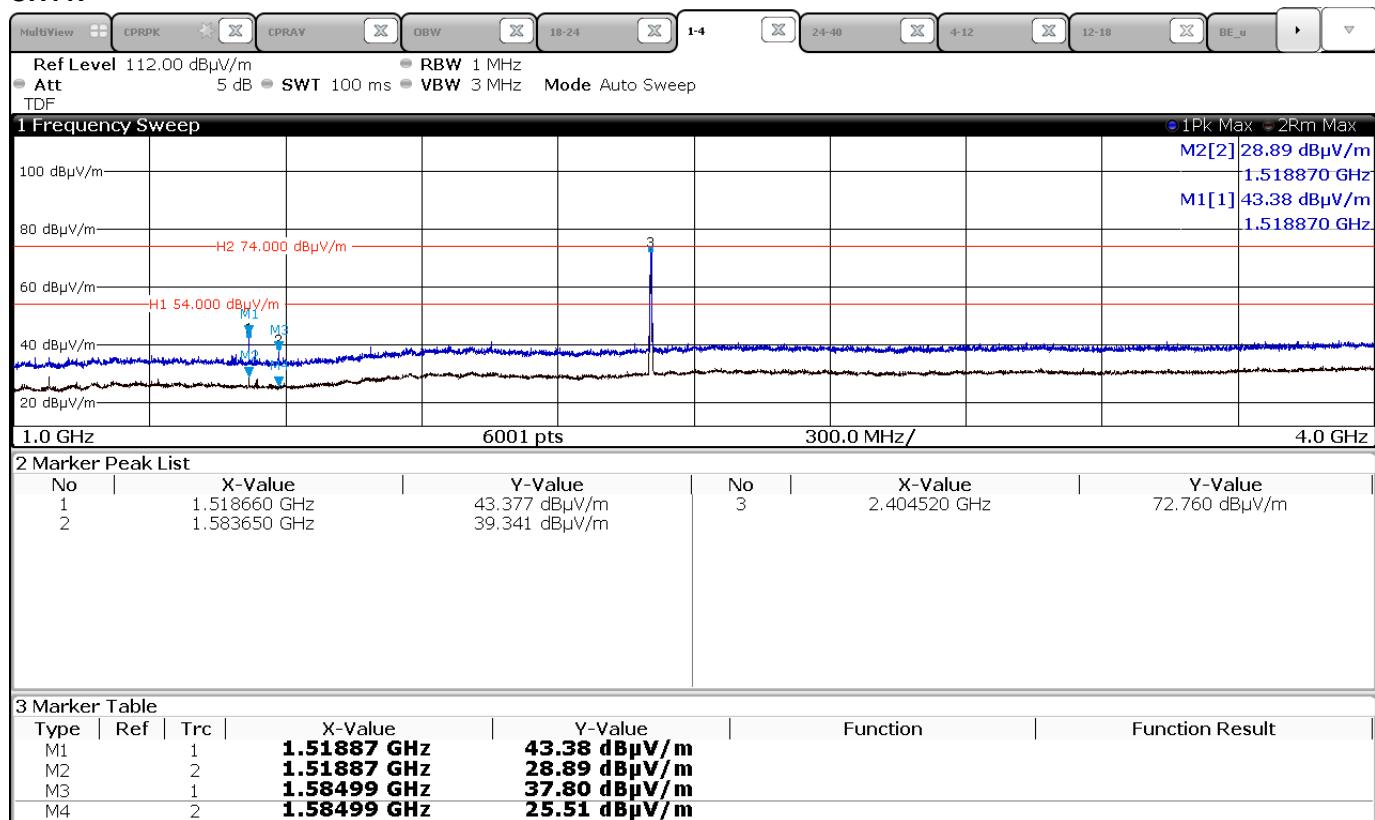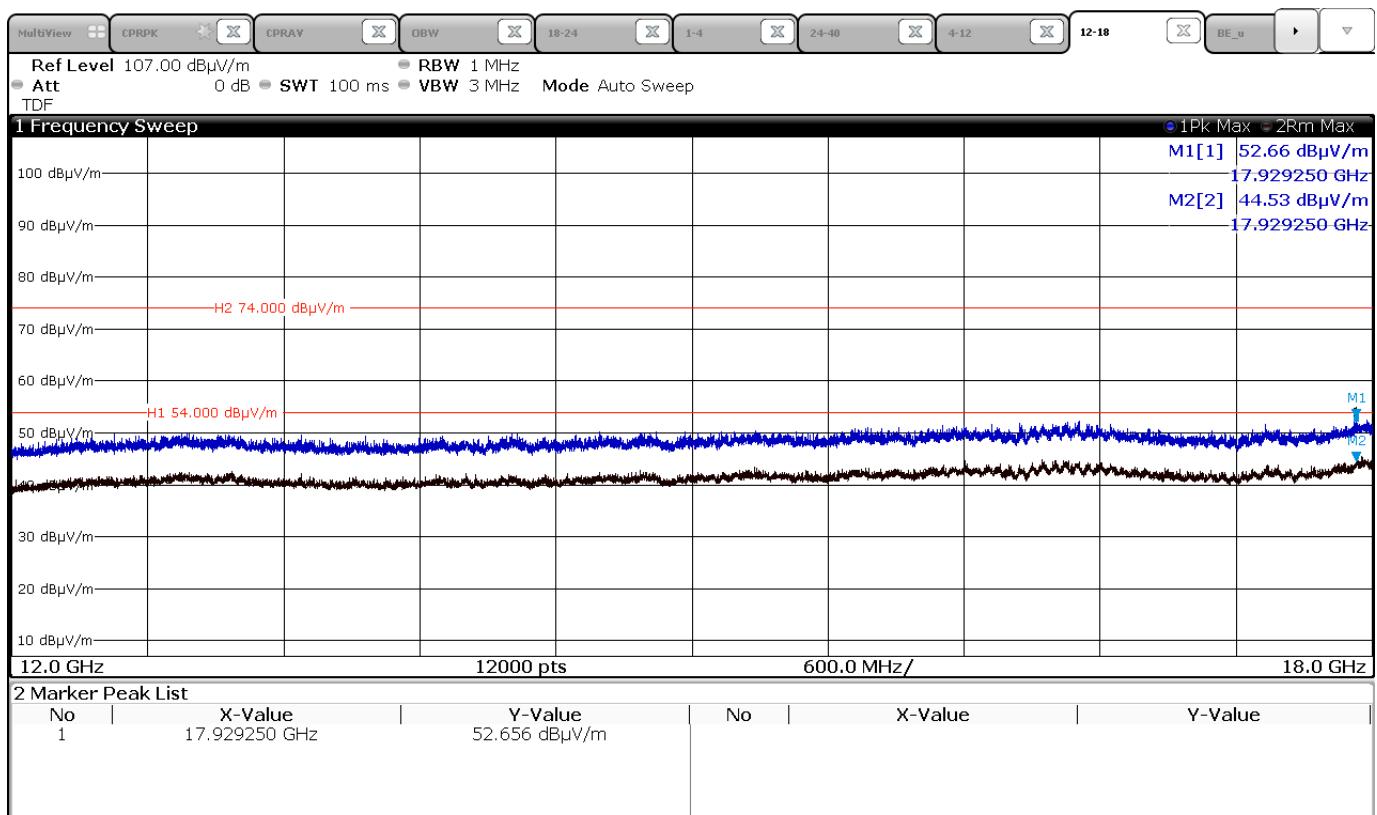
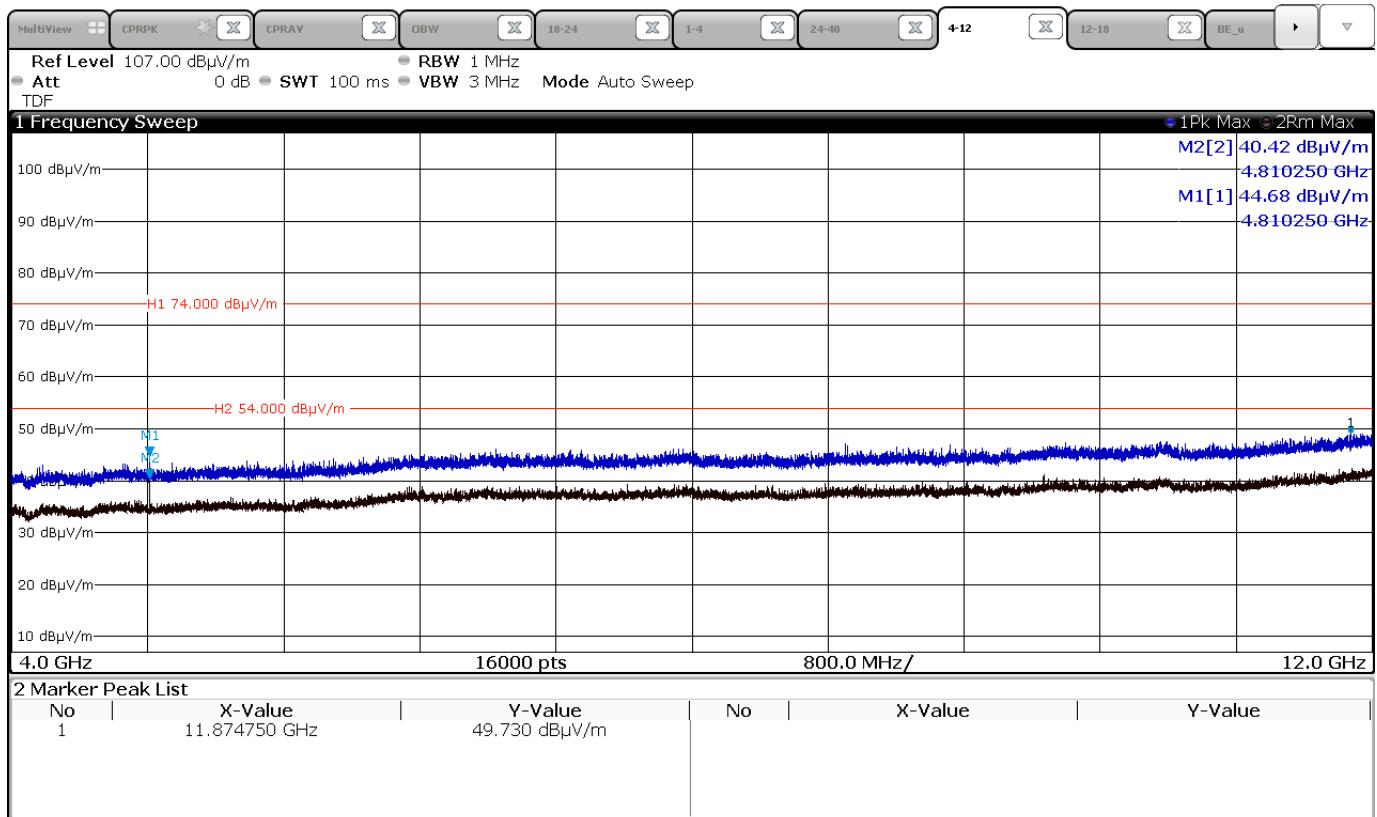
CH11:







FCC ID: VQ5-EBI10
IC: 7412-EBI10

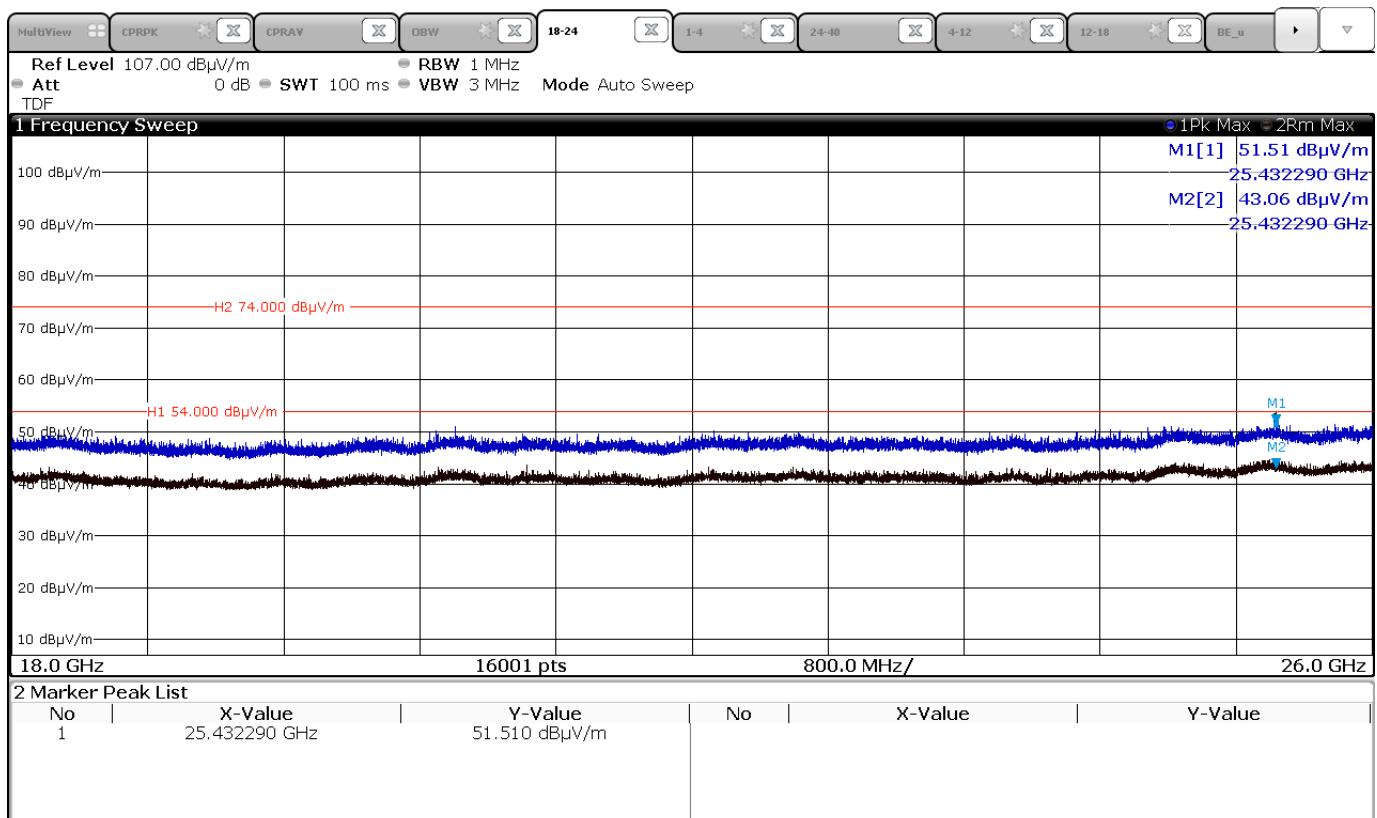

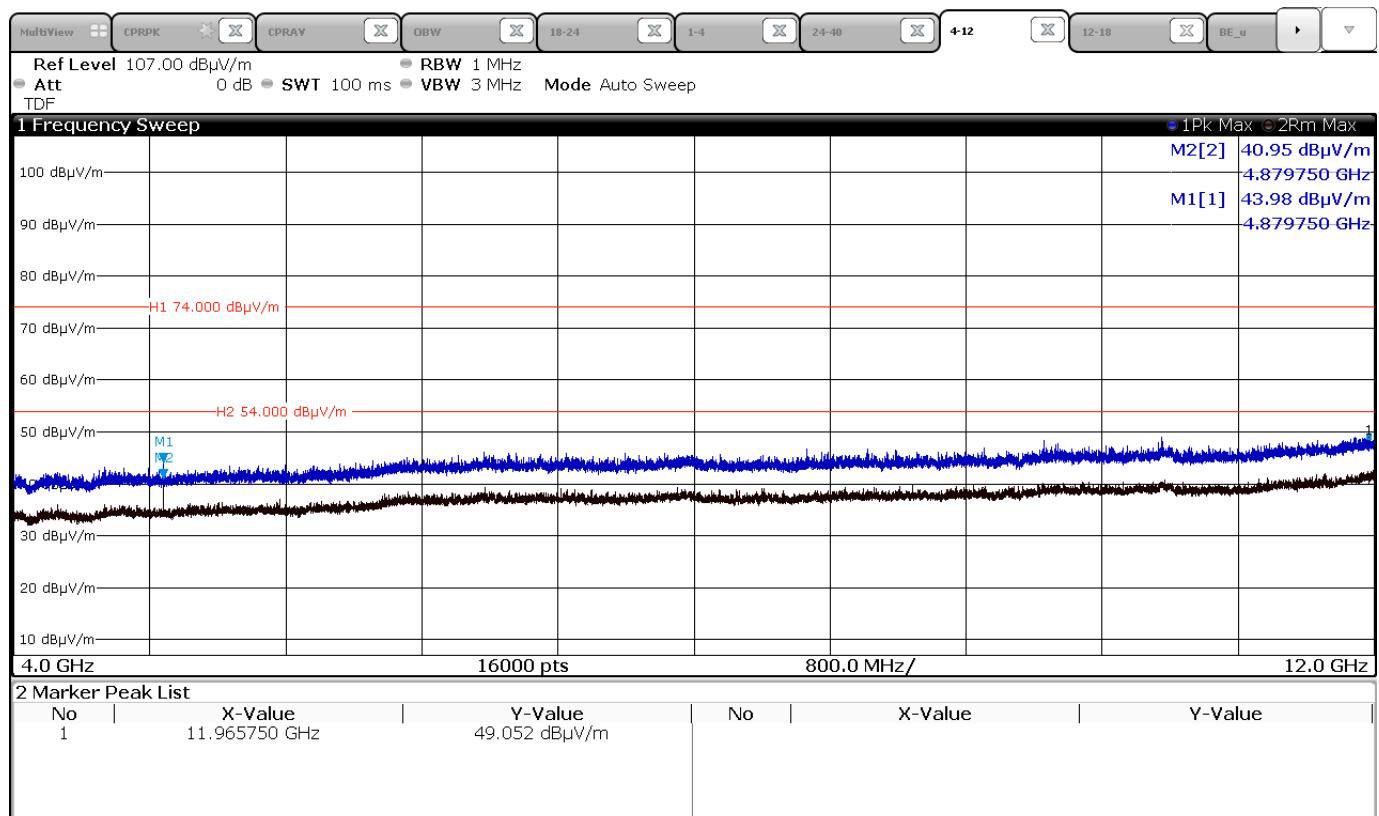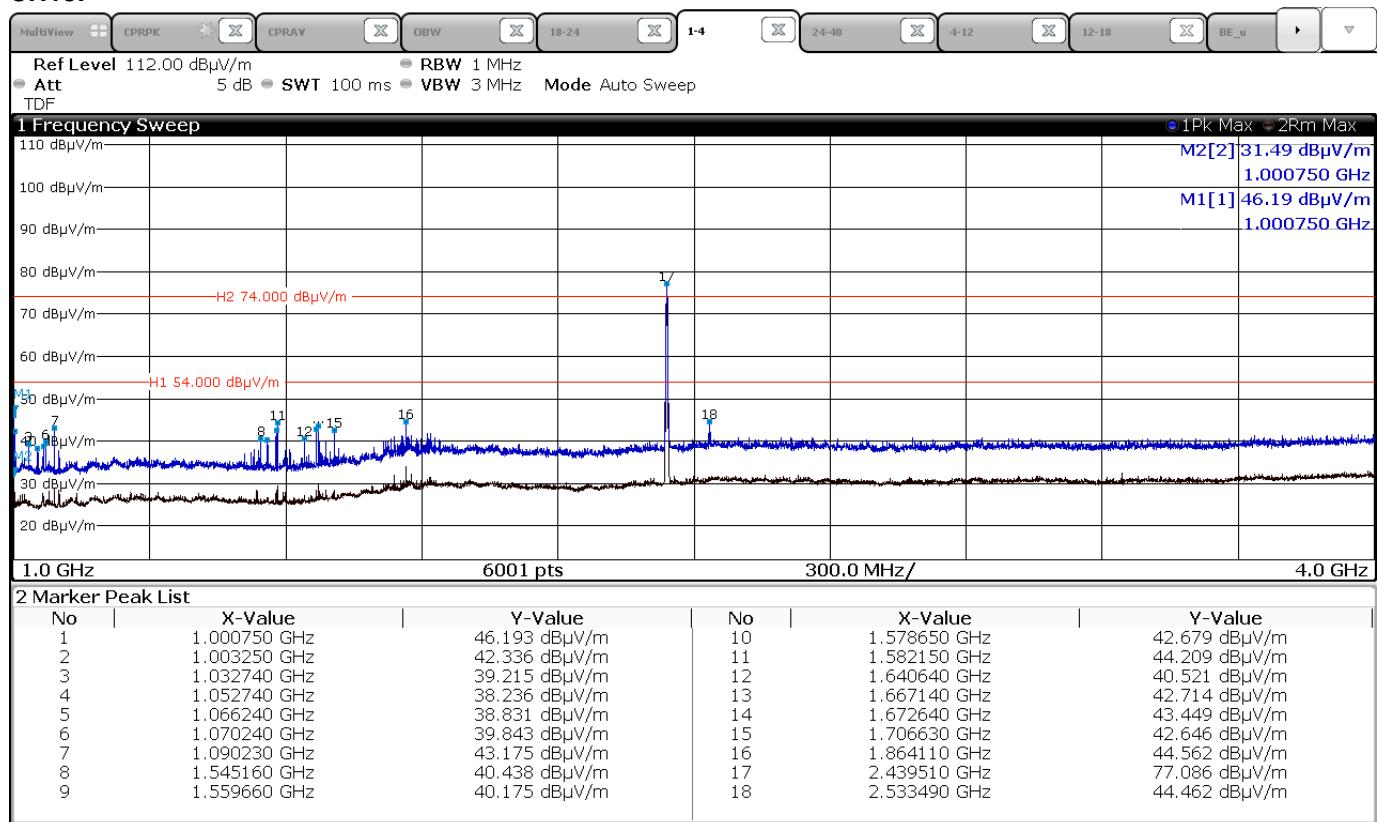
FCC ID: VQ5-EBI10
IC: 7412-EBI10
CH18:

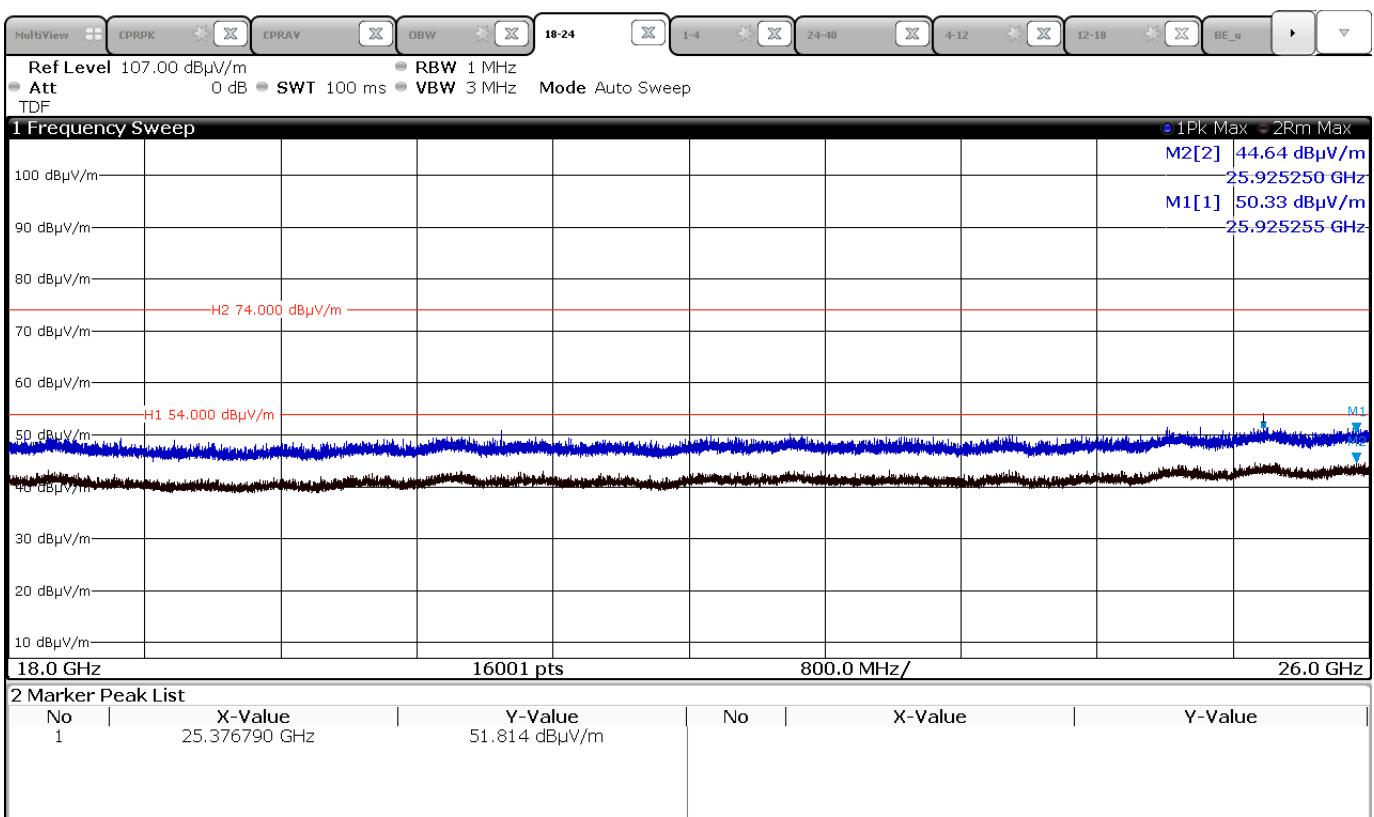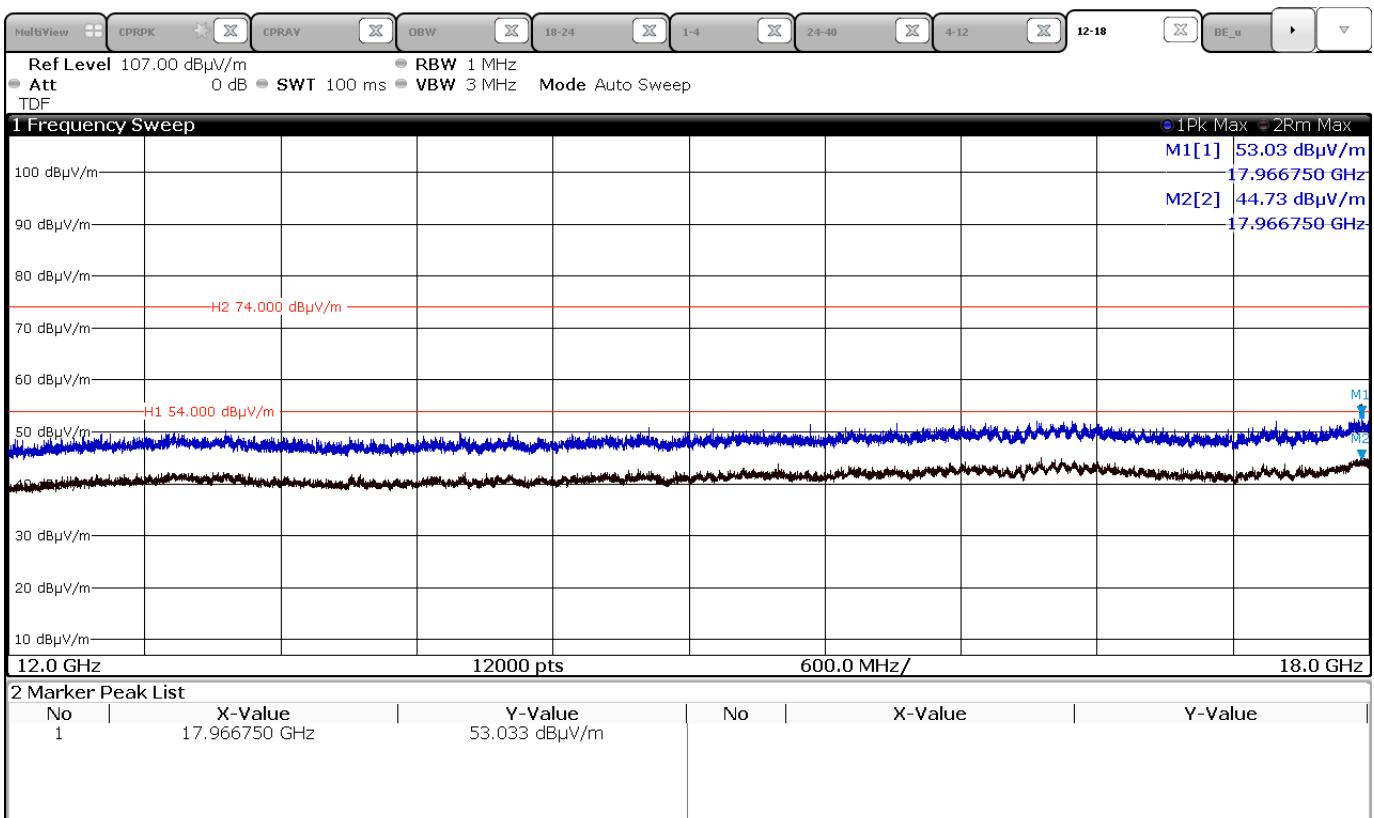
FCC ID: VQ5-EBI10
IC: 7412-EBI10

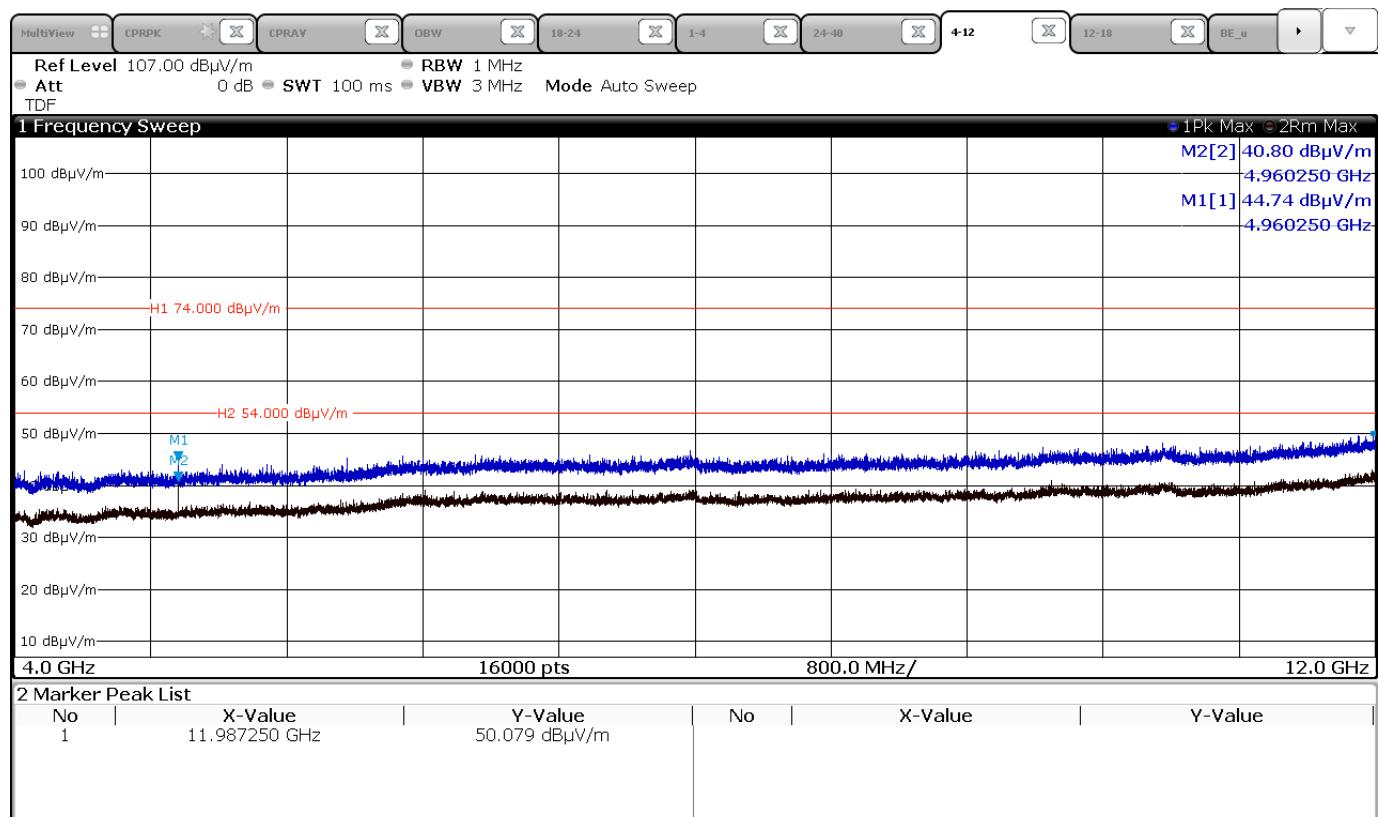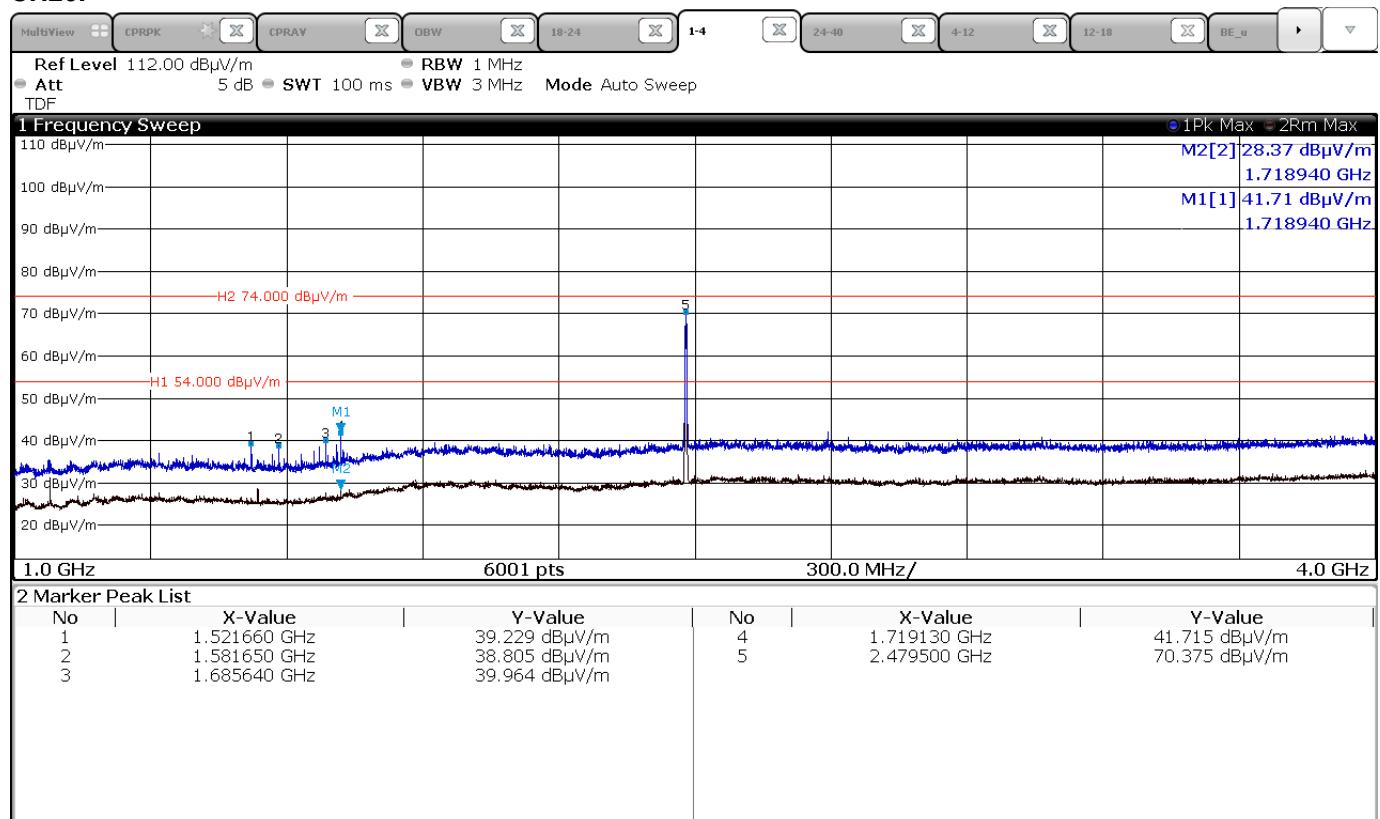
FCC ID: VQ5-EBI10
IC: 7412-EBI10
CH26:

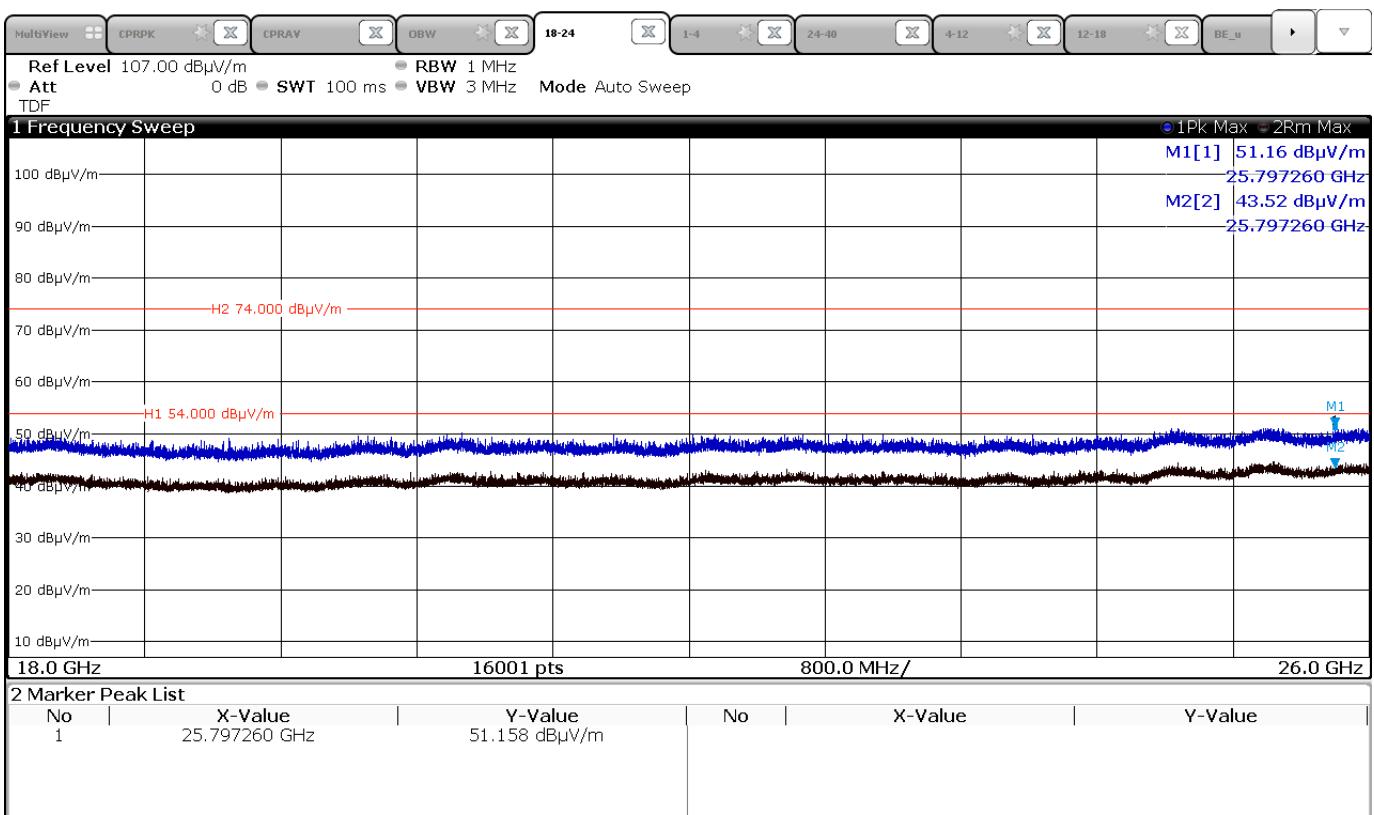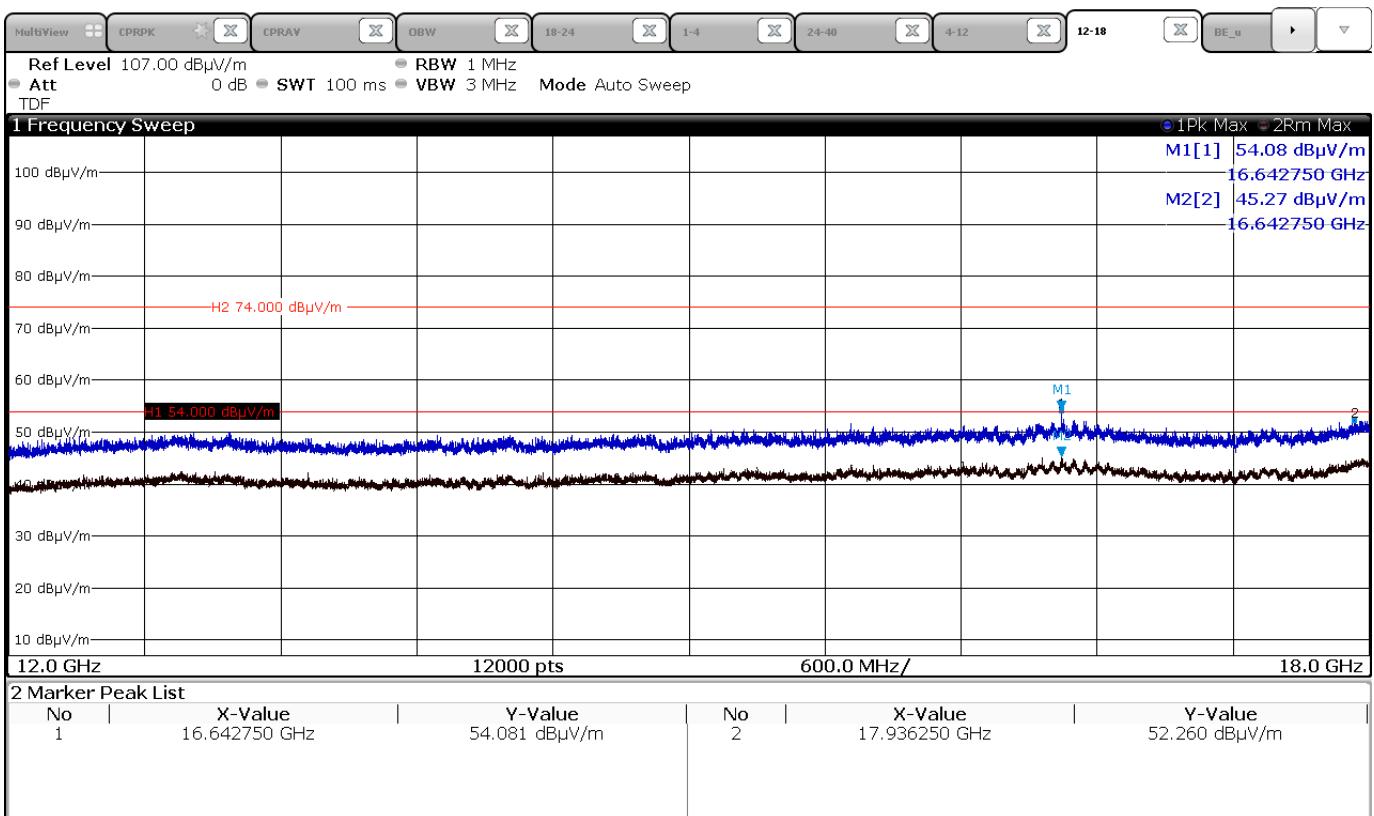
FCC ID: VQ5-EBI10
IC: 7412-EBI10


Radiated limits according to FCC Part 15 Section 15.209(a) for spurious emissions which fall in restricted bands:

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (metres)
	(μ V/m)	dB(μ V/m)	
0.009-0.490	2400/F (kHz)		300 30 30 3 3 3 3
0.490-1.705	24000/F (kHz)		
1.705-30	30	29.5	
30-88	100	40	
88-216	150	43.5	
216-960	200	46	
Above 960	500	54	

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

Restricted frequency bands according RSS-gen:

MHz	MHz	MHz	GHz
0.090 - 0.110	12.57675 - 12.57725	399.9 - 410	7.250 - 7.750
0.495 - 0.505	13.36 - 13.41	608 - 614	8.025 - 8.500
2.1735 - 2.1905	16.42 - 16.423	960 - 1427	9.0 - 9.2
3.020 - 3.026	16.69475 - 16.69525	1435 - 1626.5	9.3 - 9.5
4.125 - 4.128	16.80425 - 16.80475	1645.5 - 1646.5	10.6 - 12.7
4.17725 - 4.17775	25.5 - 25.67	1660 - 1710	13.25 - 13.4
4.20725 - 4.20775	37.5 - 38.25	1718.8 - 1722.2	14.47 - 14.5
5.677 - 5.683	73 - 74.6	2200 - 2300	15.35 - 16.2
6.215 - 6.218	74.8 - 75.2	2310 - 2390	17.7 - 21.4
6.26775 - 6.26825	108 - 138	2483.5 - 2500	22.01 - 23.12
6.31175 - 6.31225	149.9 - 150.05	2655 - 2900	23.6 - 24.0
8.291 - 8.294	156.52475 - 156.52525	3260 - 3267	31.2 - 31.8
8.362 - 8.366	156.7 - 156.9	3332 - 3339	36.43 - 36.5
8.37625 - 8.38675	162.0125 - 167.17	3345.8 - 3358	Above 38.6
8.41425 - 8.41475	167.72 - 173.2	3500 - 4400	
12.29 - 12.293	240 - 285	4500 - 5150	
12.51975 - 12.52025	322 - 335.4	5350 - 5460	

The requirements are **FULFILLED**.

FCC ID: VQ5-EBI10

IC: 7412-EBI10

Remarks: The measurement was performed up to the 10th harmonic. For detailed test results please see to following test protocols.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
CPR 3	FSW43	02-02/11-15-001	19/03/2019	19/03/2018		
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	3117	02-02/24-05-009	08/05/2019	08/05/2018		
	18N-20	02-02/50-17-003				
	NMS111-GL200SC01-NMS11	02-02/50-17-012				
	BAM 4.5-P	02-02/50-17-024				
	NCD	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	02-02/50-18-016				
SER 2	ESVS 30	02-02/03-05-006	06/06/2019	06/06/2018		
	VULB 9168	02-02/24-05-005	18/04/2019	18/04/2018	21/09/2018	21/03/2018
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
SER 3	FSW43	02-02/11-15-001	19/03/2019	19/03/2018		
	JS4-18004000-30-5A	02-02/17-05-017				
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	3117	02-02/24-05-009	08/05/2019	08/05/2018		
	BBHA 9170	02-02/24-05-014	12/06/2021	12/06/2018	12/06/2019	12/06/2018
	KMS102-0.2 m	02-02/50-11-020				
	18N-20	02-02/50-17-003				
	NMS111-GL200SC01-NMS11	02-02/50-17-012				
	BAM 4.5-P	02-02/50-17-024				
	NCD	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	02-02/50-18-016				