

FCC ID: VQ5-EBIIIF

EMI -- TEST REPORT

Test Report No. :

T32050-00-10HS

11 December 2007

Date of issue

Type / Model Name : EBI IF200

Product Description : Interface (13.56 MHz, 2.4 GHz)

Applicant : Ebro Electronic GmbH & Co. KG

Address : Peringerstr. 10

DE-85055 Ingolstadt

Manufacturer : Ebro Electronic GmbH & Co. KG

Address : Peringerstr. 10

DE-85055 Ingolstadt

Licence holder : Ebro Electronic GmbH & Co. KG

Address : Peringerstr. 10

DE-85055 Ingolstadt

Test Result according to the
standards listed in clause 1 test
standards:

Positive



The test report merely corresponds to the test sample.
It is not permitted to copy extracts of these test
results without the written permission of the test
laboratory.

FCC ID: VQ5-EBIIIF

Contents

1 TEST STANDARDS	3
2 SUMMARY	4
3 EQUIPMENT UNDER TEST	5
3.1 PHOTO DOCUMENTATION OF THE EUT	5
3.2 POWER SUPPLY SYSTEM UTILISED	12
3.3 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	12
4 TEST ENVIRONMENT	13
4.1 ADDRESS OF THE TEST LABORATORY	13
4.2 ENVIRONMENTAL CONDITIONS	13
4.3 STATEMENT OF THE MEASUREMENT UNCERTAINTY	13
4.4 MEASUREMENT PROTOCOL FOR FCC, VCCI AND AUSTEL	13
4.5 DISCOVERY OF WORST CASE MEASUREMENT CONDITIONS	14
5 TEST CONDITIONS AND RESULTS	15
5.1 CONDUCTED EMISSIONS	15
5.2 MAXIMUM PEAK OUTPUT POWER CONDUCTED	19
5.3 RADIATED EMISSIONS 9 KHz – 40 GHz	21
5.4 6 dB BANDWIDTH	29
5.5 BAND EDGE TEST	34
5.6 PEAK POWER DENSITY	38
5.7 ANTENNA APPLICATION	39
5.8 RECEIVER CONDUCTED DISTURBANCES 0.15 - 30 MHz	40
5.9 RECEIVER RADIATED EMISSIONS 9 KHz - 40 GHz	44
5.10 MAXIMUM PERMISSIBLE EXPOSURE (MPE)	48
6 USED TEST EQUIPMENT AND ACCESSORIES	50

FCC ID: VQ5-EBIIIF

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 Subpart C - Intentional Radiators (May 04, 2007)

Part 1, Section 1.1310	Radio frequency exposure limits
Part 2, Section 2.1093	RFE portable device
Part 15, Subpart A, Section 15.31	Measuring standards
Part 15, Subpart A, Section 15.33	Frequency range of radiated measurements
Part 15, Subpart C, Section 15.203	Antenna requirement
Part 15, Subpart C, Section 15.204	External radio frequency power amplifiers and antenna modifications
Part 15, Subpart C, Section 15.205	Restricted bands of operation
Part 15, Subpart C, Section 15.212	Modular transmitter
Part 15, Subpart C, Section 15.207(a)	AC Line conducted emissions
Part 15, Subpart C, Section 15.209(a)	Radiated emissions, general requirements
Part 15, Subpart C, Section 15.247(d)	Radiated emissions, outside the used frequency band
Part 15, Subpart C, Section 15.247(a)(2)	Bandwidth requirement
Part 15, Subpart C, Section 15.247(b)(3)	Maximum Peak conducted output Power
Part 15, Subpart C, Section 15.247(i)	Exposure of radio frequency energy levels

FCC Rules and Regulations Part 15 Subpart B - Unintentional Radiators (May 04, 2007)

Part 15, Subpart B, Section 15.107(a)	AC Line conducted emissions
Part 15, Subpart B, Section 15.109(a)	Radiated emissions, general requirements

FCC ID: VQ5-EBIIIF

2 SUMMARY

GENERAL REMARKS:

The EUT works at 13.56 MHz and 2.400 GHz – 2.4835 GHz. The transmitter 13.56 MHz passed the tests according FCC 15.225 by mikes-testingpartners gmbh. For the measurements results please refer to the testreport T32050-00-09HS.

The frequency range was scanned from 30 MHz to 25000 MHz. All emissions not reported in this test report are more than 10 dB below the specified limit.

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 24. September 2007

Testing concluded on : 10. December 2007

Checked by:

Klaus Gegenfurtner
Dipl.-Ing.(FH)
Manager: Radio Group

Tested by:

Hermann Smetana
Dipl.-Ing.(FH)
Radio Expert

FCC ID: VQ5-EBIIIF

3 EQUIPMENT UNDER TEST

3.1 Photo documentation of the EUT

External Views:

Data logging System assemble, top view



Top view, interface unit



FCC ID: VQ5-EBIIF

Rear view



Front view




FCC ID: VQ5-EBIIF

Left side view




Internal views:

PCB Top view

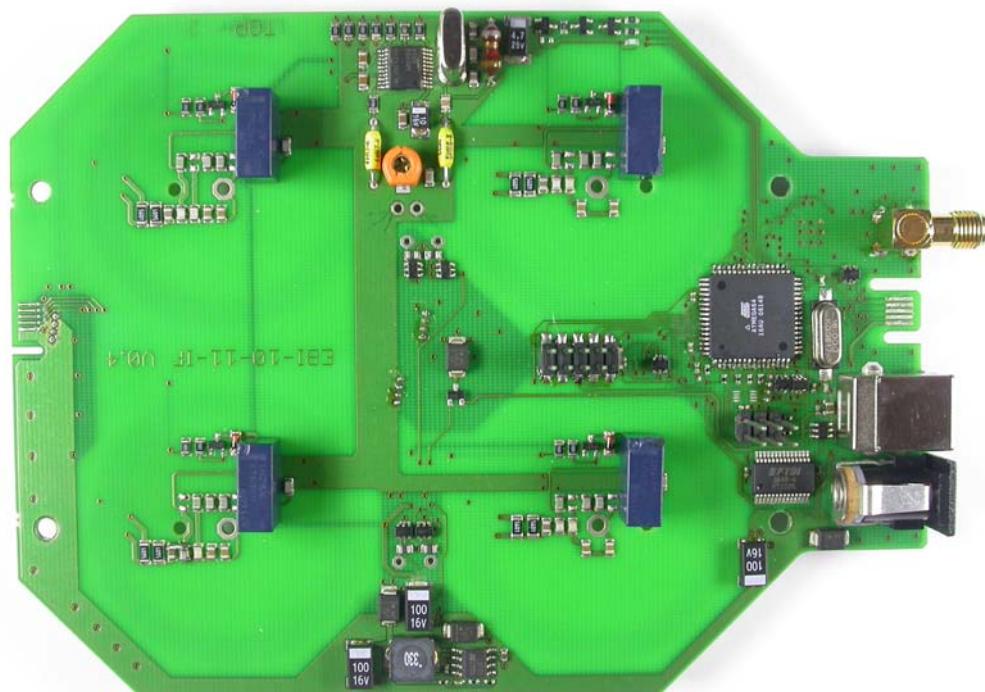

FCC ID: VQ5-EBIIF

PCB Rear view

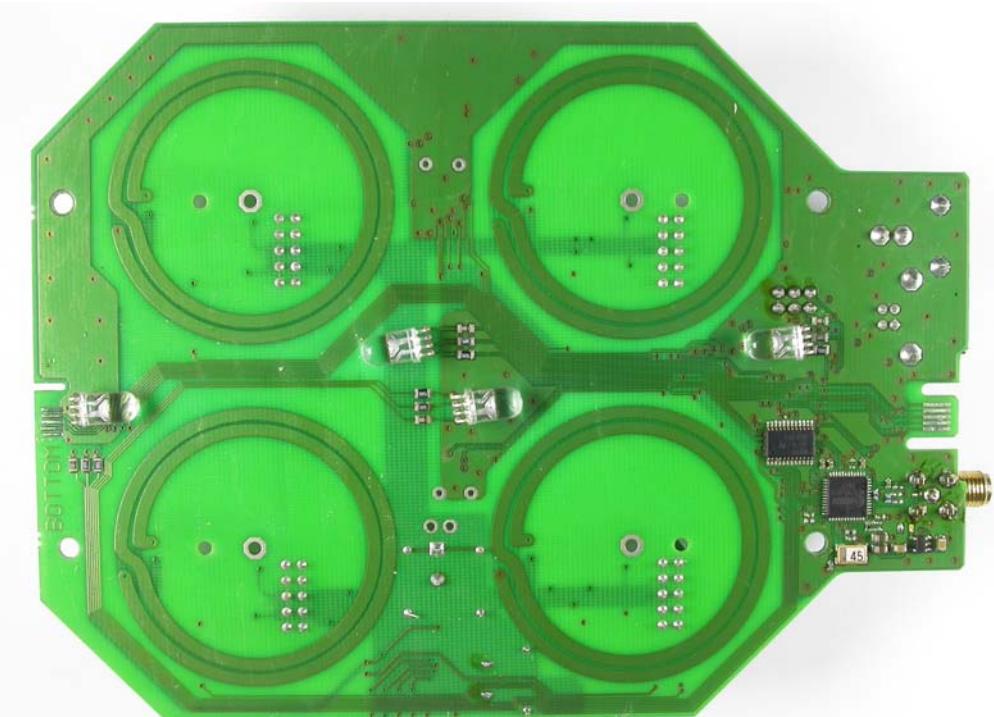

Optional Antennas:

Antenna AN2400-1901RS, 5 dBi



FCC ID: VQ5-EBIIF

Antenna AN2400-5701RS, 2 dBi




Custom made Antenna, Steri, 5 dBi

External view:




FCC ID: VQ5-EBIIIF

Internal views:

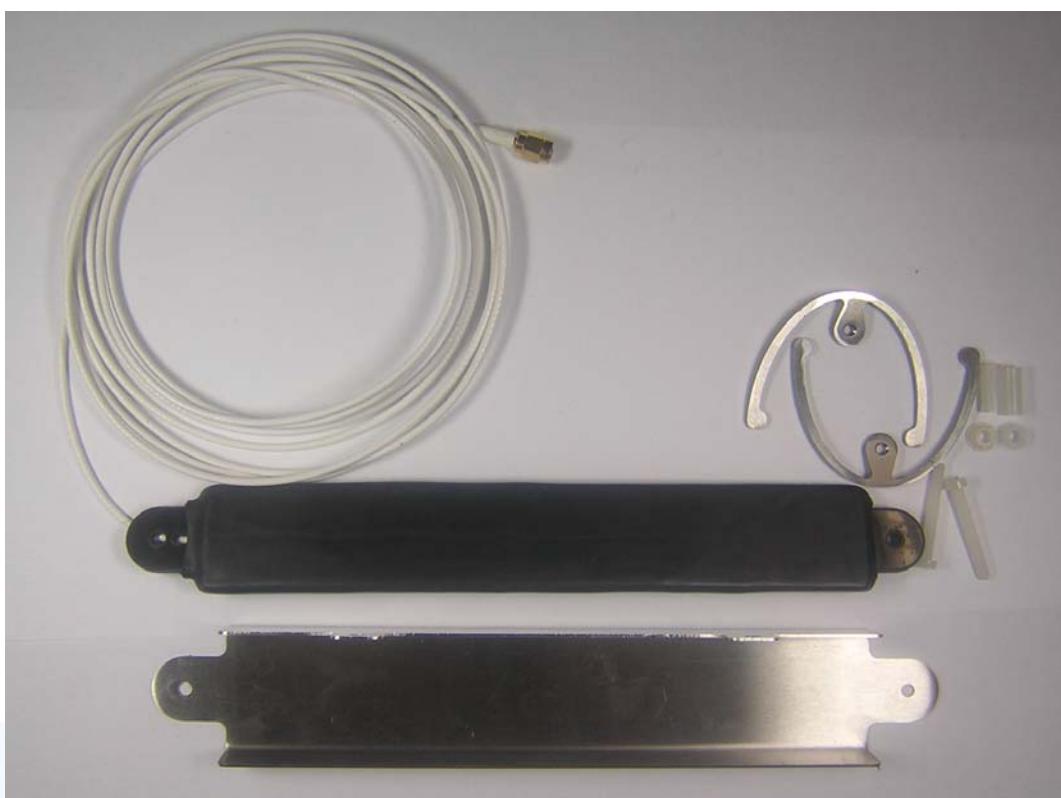

PCB top view of special antenna, EBRO

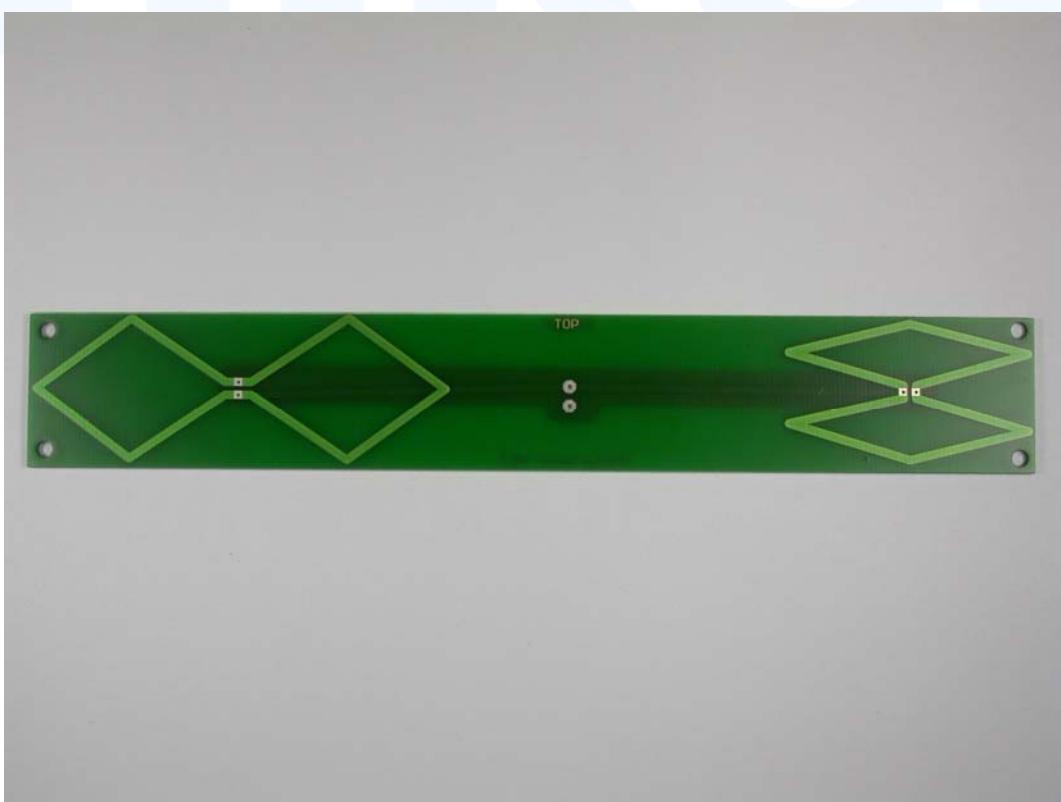

FCC ID: VQ5-EBIIIF

PCB bottom view of special antenna, EBRO



REIMAGINED

FCC ID: VQ5-EBIIIF

3.2 Power supply system utilised

Power supply voltage : 6 V / DC

3.3 Short description of the Equipment under Test (EUT)

Interface for data logging system. The system consists of a fixed interface and one up to 4 mobile data logger. The interface identifies a logger in the programming slot via 13.56 MHz RFID-Transceiver. In the mobile data logger is a RFID-Tag only. A 2.4 GHz "ZIGBEE" port (Chipset according IEEE 802.15.4) is used for data exchange, communication and programming the data logger. The power supply as stand alone system is normally via USB, cascaded up to max. 3 systems the 6 V DC power supply have to be used.

Number of tested samples: 1
Serial number: Prototype

EUT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- TX-Mode
- RX-Mode
- Stand by

EUT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurements:

- USB-Cable (host to client) Model : As usual in trade
- Note book for control Model : Dell
- Power supply, 6 V DC Model : CP92A0060V2100
- _____ Model : _____
- _____ Model : _____
- _____ Model : _____

FCC ID: VQ5-EBIIIF

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

mikes-testingpartners gmbh
Ohmstrasse 2-4
94342 Strasskirchen
Germany

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16-4-2 /11.2003 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurements“ and is documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.4 Measurement Protocol for FCC, VCCI and AUSTEL

4.4.1 GENERAL INFORMATION

4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures in International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

In compliance with 47 CFR Part 15 Subpart A Section 15.38 testing for FCC compliance may be done following the ANSI C63.4-2003 procedures and using the CISPR 22 Limits.

FCC ID: VQ5-EBIIF

4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.4.2 DETAILS OF TEST PROCEDURES

4.4.2.1 General Standard Information

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4-2003 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

4.5 Discovery of worst case measurement conditions

For evaluating the worst case the the base station was driven in maximum output power mode and measured in X, Y and Z-Position. The data logger and the interface use the same chipset for the communication in the 2.4 GHz band according to IEEE 802.15.4. The maximum output power was found at the interface in combination with the 5 dBi Rod Antenna (AN2400-1901RS). The position of the antenna can be changed from vertical to horizontal but do not influence the output power. So the measurements were performed in the same direction as the output antenna, if actual possible. The antennas (AN2400-5701RS) 2 dBi and Steri Antenna 5 dBi were tested too and in the worst case decision included.

FCC ID: VQ5-EBIIIF

5 TEST CONDITIONS AND RESULTS


5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Photo documentation of the test set-up

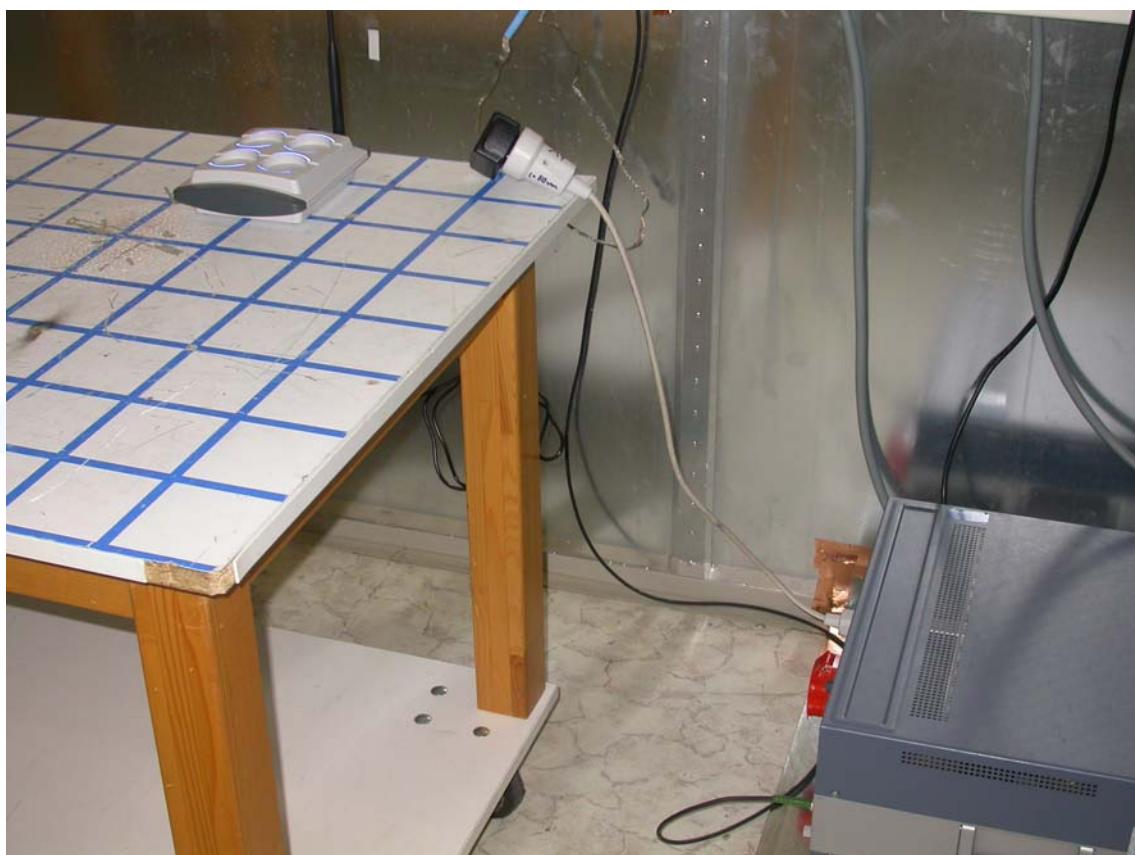

5.1.3 Description of Measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

FCC ID: VQ5-EBIIIF

5.1.4 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin -16.3 dB at 11.995 MHz

The requirements are **FULFILLED**.

Remarks: The measurement was performed with AC (115V, 60 Hz) at the side of the power supply.


The TX-Mode at 2400 MHz means the worst case.

mikes

FCC ID: VQ5-EBIIF

5.1.5 Test protocol

Test point L1
Operation mode: TX-Mode
Remarks:

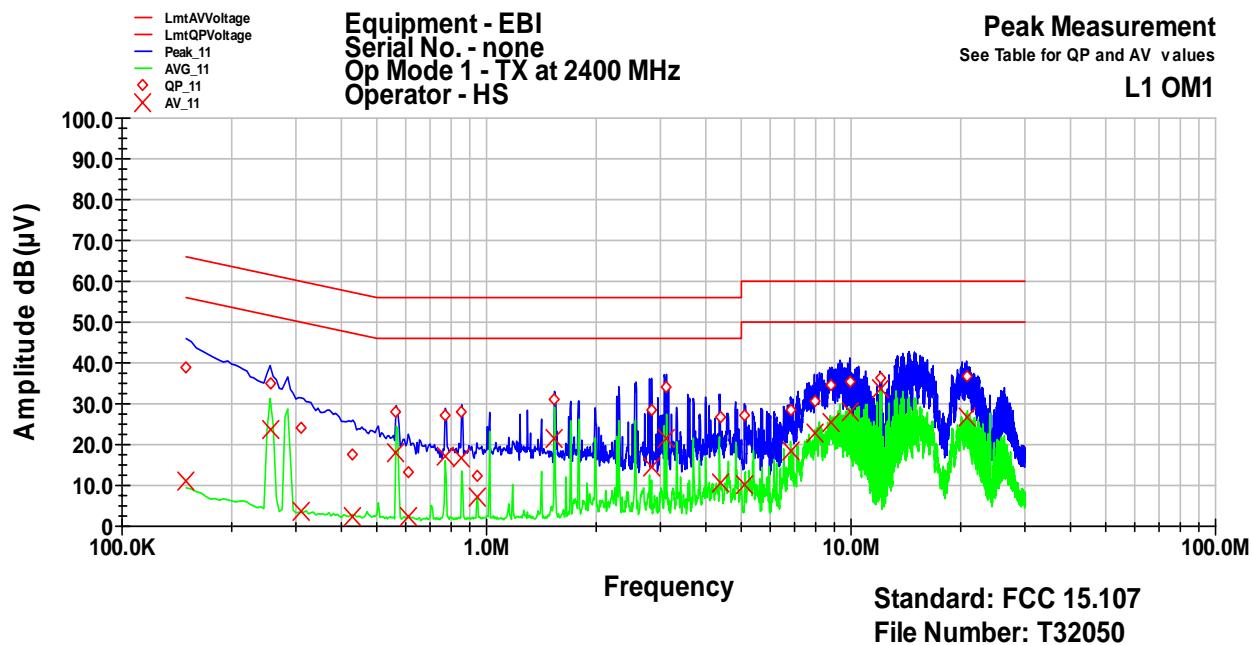


Frequency MHz	QP Level dB(μV)	QP Margin dB	QP Limit dB	AV Level dB(μV)	AV Margin dB	AV Limit dB
0.15	38.7	-27.3	66.0	10.9	-45.1	56.0
0.255	35.1	-26.5	61.6	23.6	-28.0	51.6
0.31	24.0	-36.0	60.0	3.7	-46.3	50.0
0.43	17.5	-39.7	57.3	2.4	-44.8	47.3
0.565	28.2	-27.8	56.0	18.0	-28.0	46.0
0.61	13.2	-42.8	56.0	2.2	-43.8	46.0
0.77	27.2	-28.8	56.0	17.0	-29.0	46.0
0.855	28.0	-28.0	56.0	16.7	-29.3	46.0
0.94	12.2	-43.8	56.0	7.3	-38.8	46.0
1.535	30.9	-25.1	56.0	21.5	-24.5	46.0
2.835	28.5	-27.5	56.0	14.6	-31.4	46.0
3.12	34.2	-21.8	56.0	21.7	-24.3	46.0
4.37	26.8	-29.2	56.0	10.6	-35.3	46.0
5.095	27.0	-33.0	60.0	10.3	-39.8	50.0
6.815	28.7	-31.3	60.0	18.5	-31.5	50.0
7.925	30.8	-29.3	60.0	22.8	-27.2	50.0
8.85	34.5	-25.5	60.0	25.5	-24.5	50.0
9.915	35.5	-24.5	60.0	28.1	-21.9	50.0
11.995	36.1	-23.9	60.0	33.7	-16.3	50.0
20.735	36.8	-23.2	60.0	26.7	-23.3	50.0

FCC ID: VQ5-EBIIF

Test point: N
Operation mode: TX-Mode
Remarks:

Result: passed

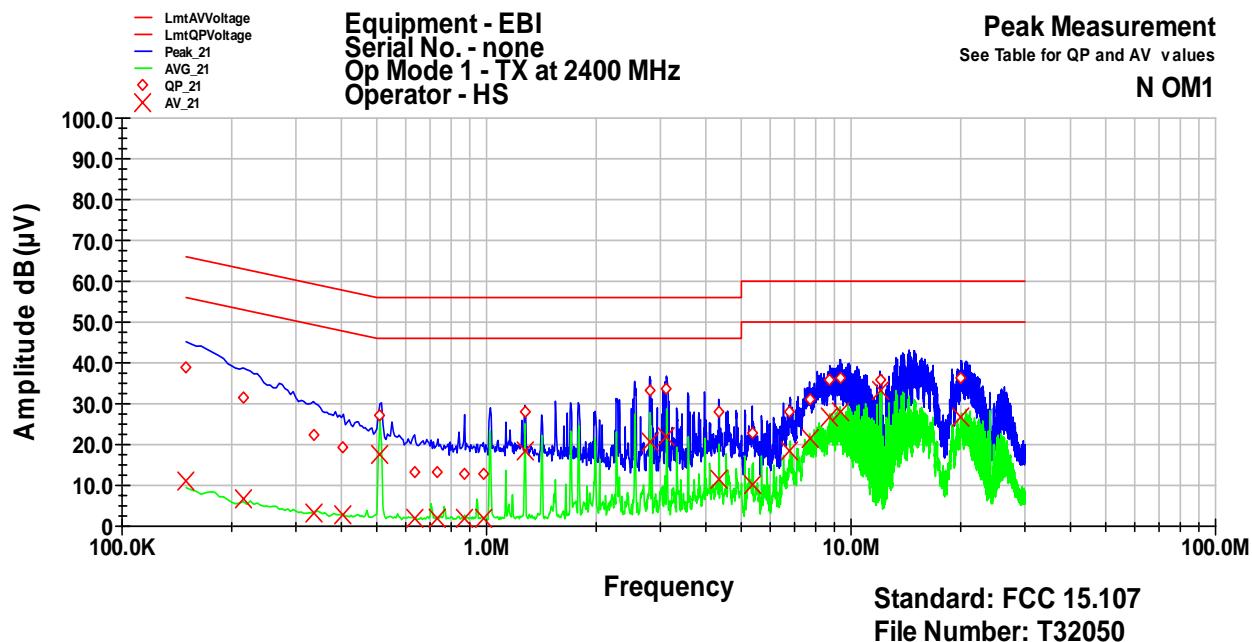

Frequency MHz	QP Level dB(µV)	QP Margin dB	QP Limit dB	AV Level dB(µV)	AV Margin dB	AV Limit dB
0.15	39.0	-27.0	66.0	10.9	-45.0	56.0
0.215	31.5	-31.5	63.0	6.6	-46.4	53.0
0.335	22.3	-37.0	59.3	3.4	-46.0	49.3
0.405	19.3	-38.4	57.8	2.7	-45.0	47.8
0.51	27.2	-28.8	56.0	17.8	-28.3	46.0
0.635	13.4	-42.6	56.0	2.0	-44.0	46.0
0.735	13.4	-42.6	56.0	2.0	-44.0	46.0
0.87	12.7	-43.3	56.0	1.9	-44.1	46.0
0.98	12.9	-43.1	56.0	1.9	-44.1	46.0
1.275	28.0	-28.0	56.0	18.3	-27.7	46.0
2.81	33.3	-22.7	56.0	20.7	-25.3	46.0
3.12	33.8	-22.3	56.0	21.8	-24.2	46.0
4.33	28.0	-28.0	56.0	11.5	-34.5	46.0
5.355	22.8	-37.2	60.0	10.1	-39.8	50.0
6.805	27.8	-32.2	60.0	18.6	-31.4	50.0
7.69	31.2	-28.8	60.0	21.3	-28.7	50.0
8.735	35.8	-24.2	60.0	26.7	-23.3	50.0
9.345	36.5	-23.5	60.0	27.9	-22.1	50.0
12	36.0	-24.0	60.0	33.2	-16.8	50.0
20.075	36.1	-23.9	60.0	26.5	-23.5	50.0

FCC ID: VQ5-EBIIF

5.2 Maximum Peak Output Power Conducted

For test instruments and accessories used see section 6 Part CPC 3.

5.2.1 Description of the test location

Test location: AREA4

5.2.2 Photo documentation of the test set-up



5.2.3 Description of Measurement

Maximum conducted peak output power:

A spectrum analyzer / EMI test receiver is connected to the output of the transmitter via a suitable attenuator while EUT was operating in transmit mode using the assigned frequency.

Analyzer Settings:

- Detector: Max hold
- RBW: greater than 20 dB Bandwidth
- VBW: \geq RBW
- Sweep Time: Coupled

FCC ID: VQ5-EBIIIF

5.2.4 Test result

Channel	Frequency [GHz]	Peak Power Output (dBm)	Correct. [dB]	Corr. Peak Power Output (dBm)	Peak Power Limit (dBm)	Delta [dB]
11	2.4050	-10.4	-	-10.4	30	-40.4
18	2.4400	-8.5	-	-8.5	30	-38.5
26	2.4825	-8.7	-	-8.7	30	-38.7

Peak Power Limit according to FCC Subpart 15.247(b)(3):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(Watt)
902-928	30	1,0
2400-2483.5	30	1,0
5725-5850	30	1,0

The requirements are **FULFILLED**.

Remarks: This test has been performed conducted at antenna jack.

FCC ID: VQ5-EBIIIF

5.3 Radiated emissions 9 kHz – 40 GHz

For test instruments and accessories used see section 6 Part **SER1, SER 2 and SER 3**.

5.3.1 Description of the test location

Test location: OATS1
Test location: Anechoic Chamber2

Test distance: 3 metres
Test distance: 3 metres

5.3.2 Photo documentation of the test set-up



FCC ID: VQ5-EBIIF



FCC ID: VQ5-EBIIIF



5.3.3 Description of Measurement

The spurious emissions from the EUT will be measured on an open area test site in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EUT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in $\text{dB}\mu\text{V}/\text{m}$, is arrived at by taking the reading from the EMI receiver (Level $\text{dB}\mu\text{V}$) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

Radiated spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EUT are rotated 360 degrees.

FCC ID: VQ5-EBIIF

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EUT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment Under Test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators / testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3m horizontally from the EUT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz and for any spurious emission or modulation product that falls in Restricted Band, as defined in Section 15.205, set the resolution and video bandwidth to 1 MHz.

All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EUT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

Analyzer Settings (EMI receiver) for spurious emissions which fall not in Restricted Band:

- Detector: Max hold
- RBW: 100 kHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: \geq RBW
- Sweep Time: Coupled
- Detector function: Peak

Analyzer Settings (EMI receiver) for spurious emissions which fall in Restricted Band:

- Detector: Max hold
- RBW: 1 MHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: \geq RBW
- Sweep Time: Coupled
- Detector function: Peak for $f \geq 1\text{GHz}$, Quasi Peak for $f \leq 1\text{GHz}$

FCC ID: VQ5-EBIIIF

5.3.4 Test result

Testresult in detail: (<1GHz)

Corrected field strength of fundamental wave as reference for radiated emissions:

96.6 dB μ V/m

Frequency [MHz]	Restricted Band	Channel 11										Delta [dB]
		Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]	PK	QP
0.009-0.15					0.2		< 30					
0.15-30					9		< 30					
30-1000												
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

Corrected field strength of fundamental wave as reference for radiated emissions:

98.5 dB μ V/m

Frequency [MHz]	Restricted Band	Channel 18										Delta [dB]
		Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]	PK	QP
0.009-0.15					0.2		< 30					
0.15-30					9		< 30					
30-1000												
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

Corrected field strength of fundamental wave as reference for radiated emissions:

98.3 dB μ V/m

Frequency [MHz]	Restricted Band	Channel 26										Delta [dB]
		Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]	PK	QP
0.009-0.15					0.2		< 30					
0.15-30					9		< 30					
30-1000												
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

FCC ID: VQ5-EBIIIF

Testresult in detail:(>1GHz)

Corrected field strength of fundamental wave as reference for radiated emissions:

96.6 dB μ V/m

Corrected field strength of fundamental wave as reference for radiated emissions:

98.5 dB μ V/m

Corrected field strength of fundamental wave as reference for radiated emissions:

98.3 dB μ V/m

*) Average values were measured with spectrum analyzer by taking the following Settings

RBW: 1 MHz

VBW: 10 Hz

Sweep: Auto

FCC ID: VQ5-EBIIF

Peak-Limit according to FCC Subpart 15.247(d):

In any 100 kHz bandwidth outside the frequency band 2400 – 2483.50 MHz, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

Final radiated limits for spurious emissions which fall not in restricted band:

Frequency [MHz]	Limits acc. 15.209 [dB μ V/m]	Measurement distance [metres]	Limits acc. 15.247(c) [dB μ V/m]			Final Radiated Limits [dB μ V/m]		
			Ch 11	Ch 18	Ch 26	Ch 11	Ch 18	Ch 26
0,009-0,490	2400/F(kHz)	300	76.6	78.5	78.3	-3.4	-1.5	-1.7
0,490-1,705	24000/F(kHz)	30	76.6	78.5	78.3	36.6	38.5	38.3
1,705-30	30	30	76.6	78.5	78.3	36.6	38.5	38.3
30-88	40	3	76.6	78.5	78.3	76.6	78.5	78.3
88-216	43,5	3	76.6	78.5	78.3	76.6	78.5	78.3
216-960	46	3	76.6	78.5	78.3	76.6	78.5	78.3
Above 960	54	3	76.6	78.5	78.3	76.6	78.5	78.3

Radiated limits according to FCC Part 15 Subpart 15.209(a) for spurious emissions which fall in restricted band:

Frequency [MHz]	Field strength of spurious emissions		Measurement distance [metres])
	[μ V/m]	[dB μ V/m]	
0,009-0,490	2400/F(kHz)		300
0,490-1,705	24000/F(kHz)		30
1,705-30	30	29,5	30
30-88	100	40	3
88-216	150	43,5	3
216-960	200	46	3
Above 960	500	54	3

FCC ID: VQ5-EBIIF
Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	

The requirements are **FULFILLED**.

Remarks: During the test, the EUT was set into normal modulation mode as intended for use.

The measurement was performed up to the 10th harmonic (25000MHz).

FCC ID: VQ5-EBIIIF

5.4 6 dB Bandwidth

For test instruments and accessories used see section 6 Part **MB**.

5.4.1 Description of the test location

Test location: AREA4

5.4.2 Photo documentation of the test set-up



FCC ID: VQ5-EBIIF

5.4.3 Description of Measurement

The bandwidth is measured at an amplitude level reduced from the reference level by a specified ratio of -6 dB. The reference level is the level of the highest amplitude signal observed from the transmitter at either the fundamental frequency or the first-order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical.

The resolution bandwidth of measuring instrument was set to a value as shown in the following table below according to ANSI C63.4-2003.

Fundamental frequency	Minimum resolution bandwidth
9 kHz to 30 MHz	1kHz
30 to 1000 MHz	10 kHz
1000 MHz to 40 GHz	100 kHz

5.4.4 Test result

Channel number	Fundamental Frequency [MHz]	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)
11	2405	2.440	0,5
18	2440	2.520	0,5
26	2480	2.520	0,5

Limit according to FCC Subpart 15.247 (a)(2):

The minimum 6 dB bandwidth shall be at least 500 kHz


The requirements are **FULFILLED**.

Remarks: For detailed test result please refer to following test protocol.

FCC ID: VQ5-EBIIF

5.4.5 Test protocol

6dB Bandwidth Measurement
FCC Part 15 Subpart 15.247(a)(2)

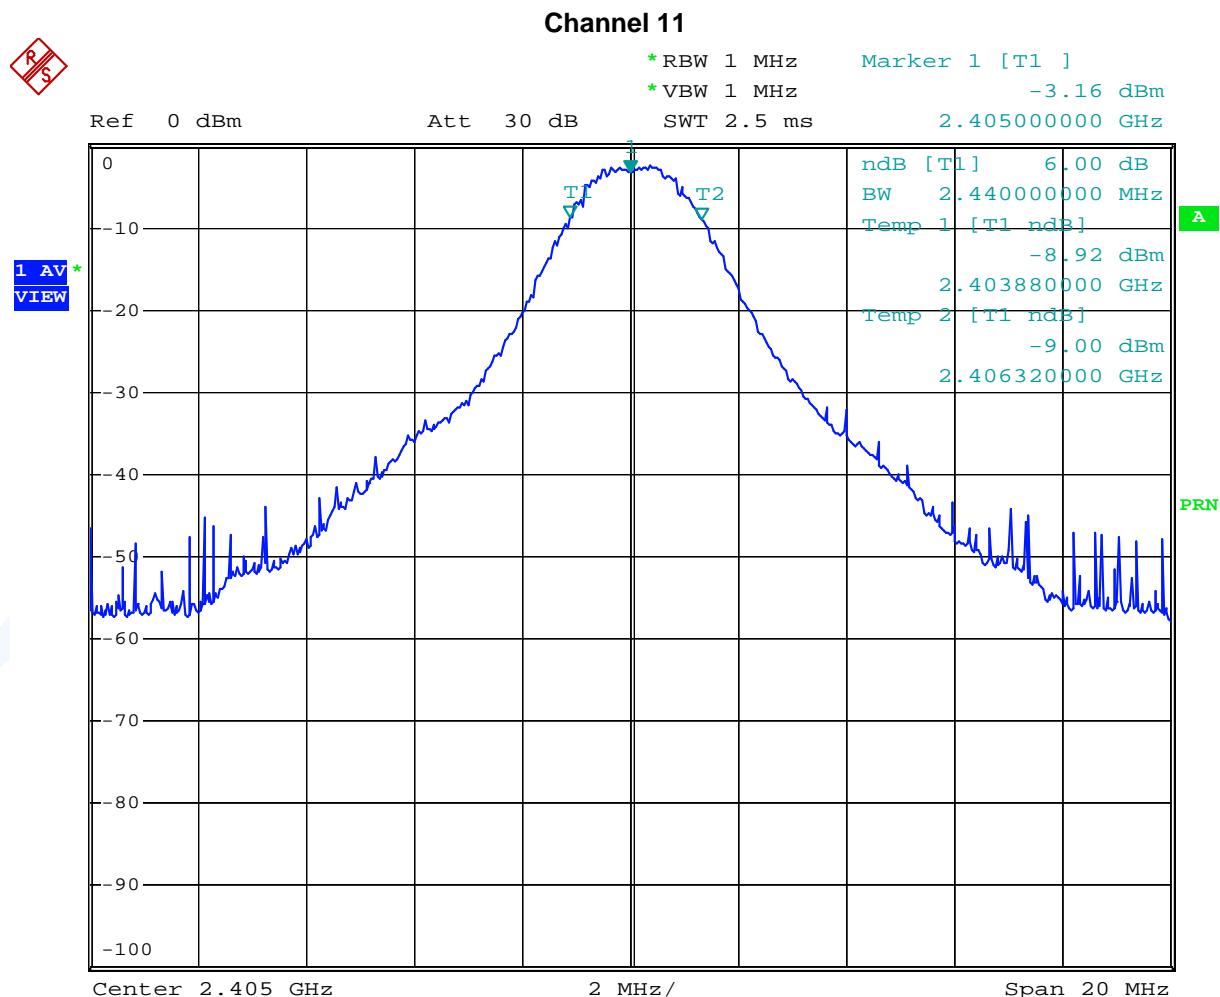


Comment: T32050_base station, BW6dB, conduct., K11
 Date: 6.DEC.2007 08:12:13

FCC ID: VQ5-EBIIF

6dB Bandwidth Measurement
FCC Part 15 Subpart 15.247(a)(2)

Channel 18

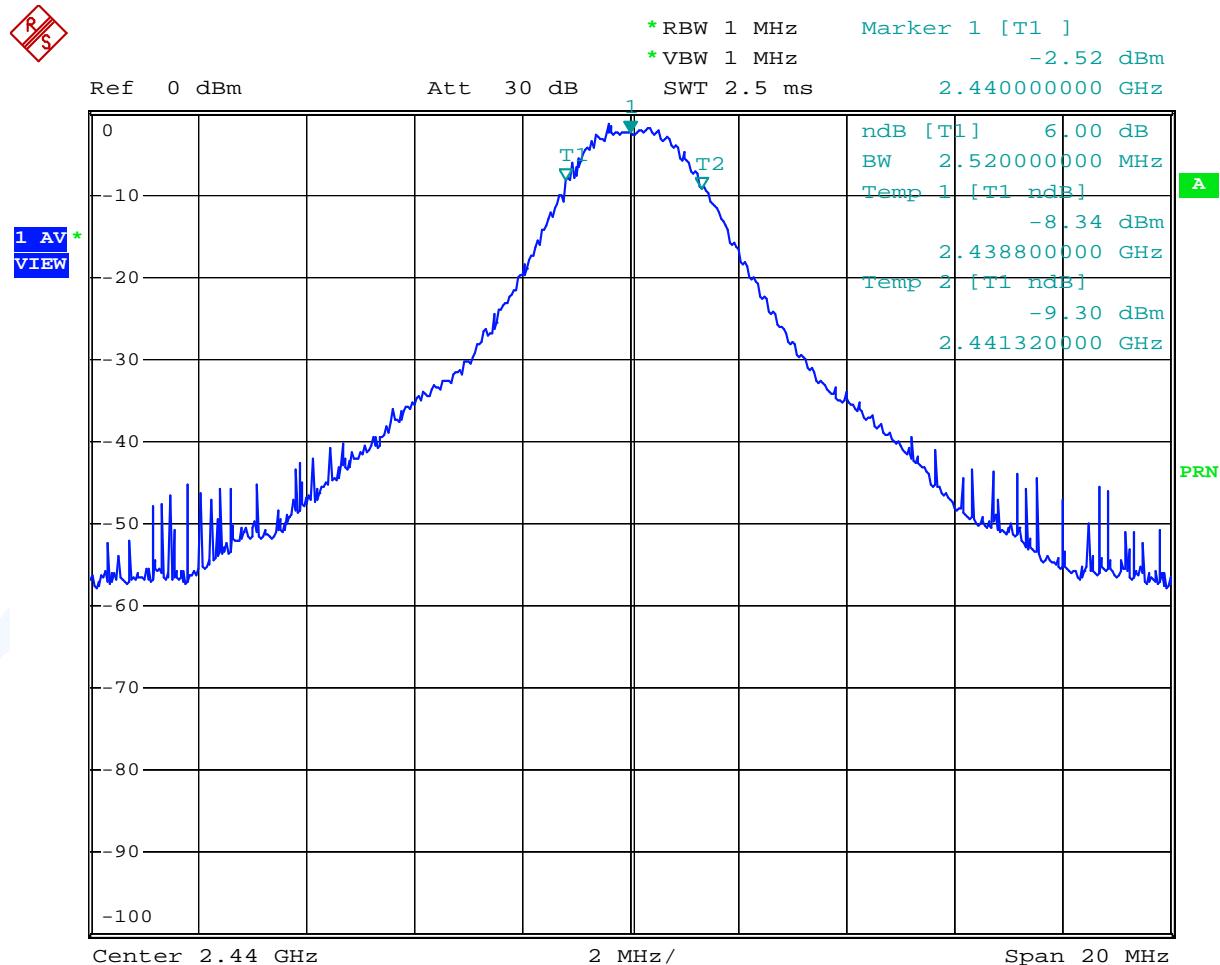


Comment: T32050_base station, BW6dB, conduct., K18
 Date: 6.DEC.2007 08:14:14

FCC ID: VQ5-EBIIF

6dB Bandwidth Measurement
FCC Part 15 Subpart 15.247(a)(2)

Channel 26

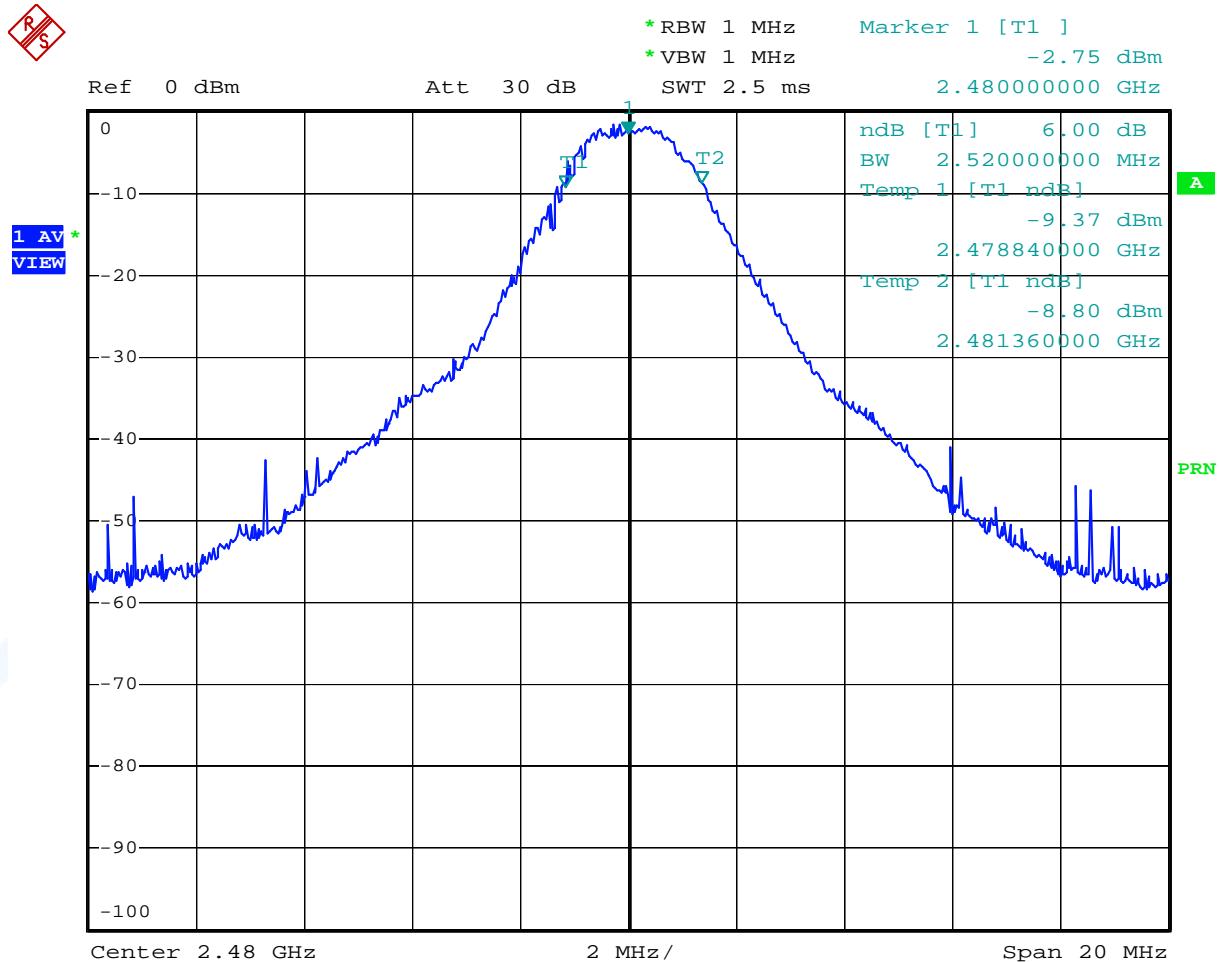

Comment: T32050_base station, BW6dB, conduct., K26
Date: 6.DEC.2007 08:19:29

FCC ID: VQ5-EBIIIF

5.5 Band edge test

For test instruments and accessories used see section 6 Part **MB**.

5.5.1 Description of the test location

Test location: AREA4

5.5.2 Photo documentation of the test set-up



FCC ID: VQ5-EBIIF

5.5.3 Description of Measurement

The EUT was connected to the spectrum analyzer with a suitable attenuator. The span of the spectrum analyzer was set wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation. The highest amplitude appearing on sprectal display was measured and it was set as the reference level for the emission mask. It was allowed the trace to stabilize and after then it was set the emission mask on the reference level to show the compliance with the bandedge requirements.

Further settings on the spectrum analyzer:

RBW: $\geq 1\%$ of the span
 VBW: \geq RBW
 Sweep: Auto
 Detector function: Peak

5.5.4 Test result

Frequency [MHz]	Peak Power Output [dB μ V]	Spurious emission read value [dB μ V]	Result of Band edge [dBc]	Band edge LIMIT [dBc]
< 2400	96.6	45	51.6	≥ 20
> 2483,5	98.3	50	48.3	≥ 20

Peak-Limit according to FCC Subpart 15.247(d):

In any 100 kHz bandwidth outside the frequency band 2400 – 2483.5 MHz, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

Attenuation below the general limits specified in §15.209(a) is not required.

In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limit specified in §15.209(a) (see §15.205(c)).

Additional requirement according to 15.205(a) restricted band (2.4835 GHz – 2.5000 GHz):

Frequency [MHz]	Reading Level PK [dB μ V]	Corr. Duty Cycle [dB]	Level AV [dB μ V] *)	Band-width [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
2483.5	50.0	-		30	-10.2	39.8		74.0	54.0	-34.8


The requirements are **FULFILLED**.

Remarks: For detailed test results please refer to following test protocol.

FCC ID: VQ5-EBIIIF

5.5.5 Test protocol

Lower Channel 2405 MHz

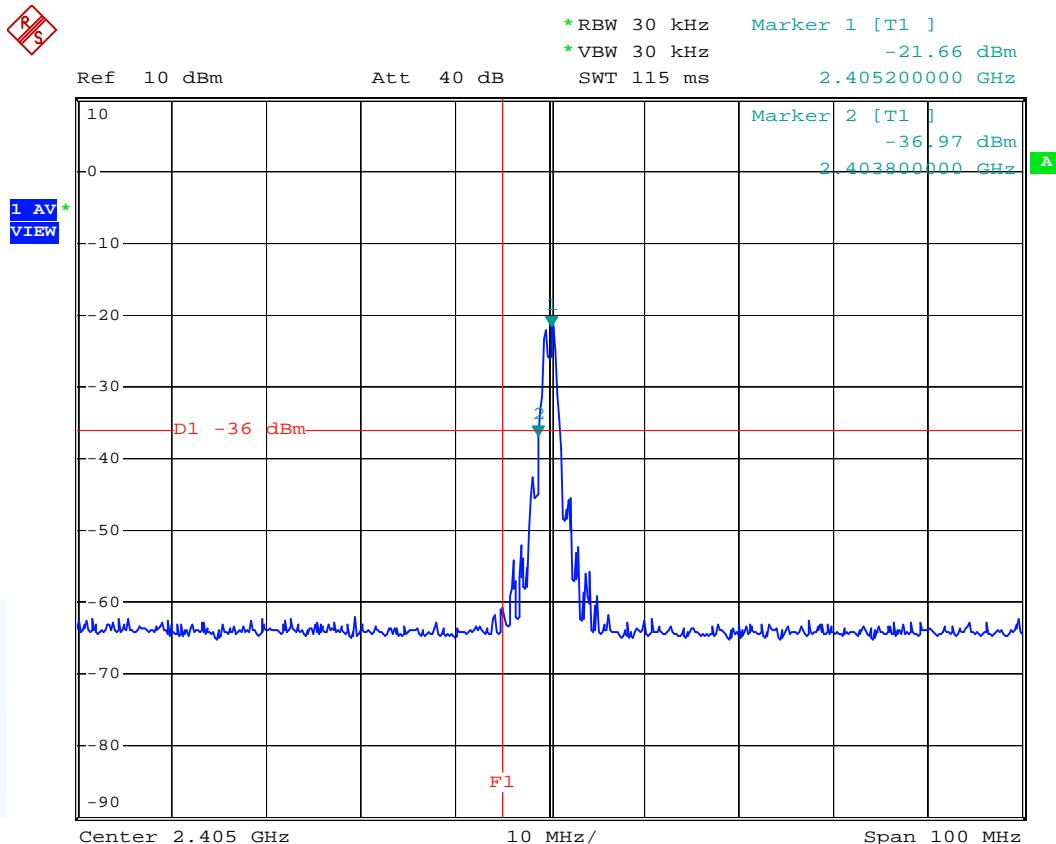


Comment: ixp, EBRO,
 Comment: FR, File 58, 55C, +15V, K11
 Date: 10.OCT.2007 15:45:40

FCC ID: VQ5-EBIIF

Higher Channel
2480 MHz

R
S

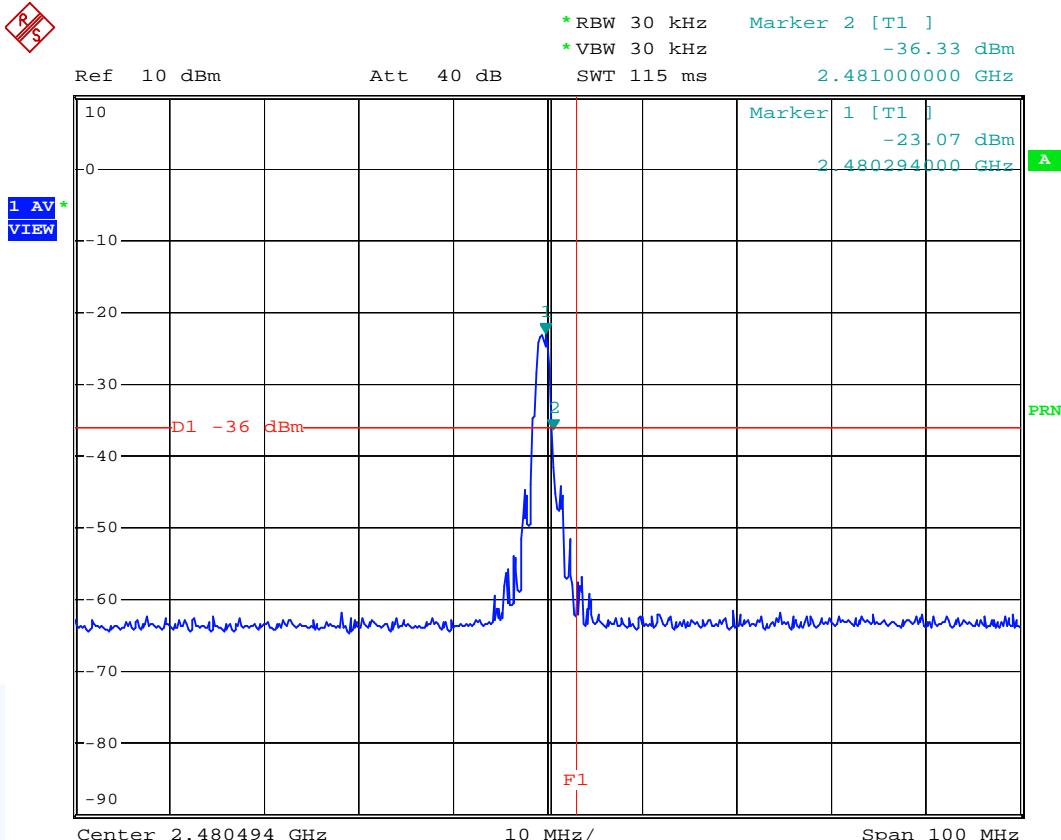

Comment: ixp, EBRO,
Comment: FR, File 55, 55C, +15V, K26
Date: 10.OCT.2007 15:07:53

FCC ID: VQ5-EBIIF

5.6 Peak Power Density

For test instruments and accessories used see section 6 Part CPC 3.

5.6.1 Description of the test location

Test location: AREA4

5.6.2 Photo documentation of the test set-up



5.6.3 Description of Measurement

The EUT was connected to the spectrum analyzer with a suitable attenuator. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time equal to span/3 kHz. The power spectral density was measured and recorded.

Settings on the spectrum analyzer:

RBW: 3 kHz
VBW: 30 kHz
Sweep: auto
Detector function: Peak

FCC ID: VQ5-EBIIIF

5.6.4 Test result

Channel	Fundamental Frequency [MHz]	Peak Power density (dBm / MHz)
11	2.405	-9.03
18	2.440	-7.45
26	2.480	-6.83

Limit according to FCC Subpart 15.247 (e)

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band.

The requirements are **FULFILLED**.

Remarks: _____

5.7 Antenna application

5.7.1 Antenna requirements

The EUT's antenna is met the requirement of FCC part 15C section 15.203 and 15.204.

FCC part 15C section 15.247(c) requirement:

Systems operating in the 2400-2483,5 MHz band that are used exclusively for fixed, point to point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dbi.

5.7.2 Result

Interface:

The antenna connector is outside and a unique connector. For an application following antennas shall be used:

- All available antennas for 2.4 GHz Applications are AN2400-5701RS and AN2400-1901RS, means in no case more than +5 dBi.
Therefore the requirements are fulfilled.
- A customised Steri-Antenna. It is used a patch antenna integrated on an own PCB. The antenna gain is +5 dBi and therefore the requirements are fulfilled.

FCC ID: VQ5-EBIIF


5.8 Receiver conducted disturbances 0.15 - 30 MHz

For test instruments and accessories used see section 6 Part A 4.

5.8.1 Description of the test location

location: Shielded Room S2

5.8.2 Photo documentation of the test set-up

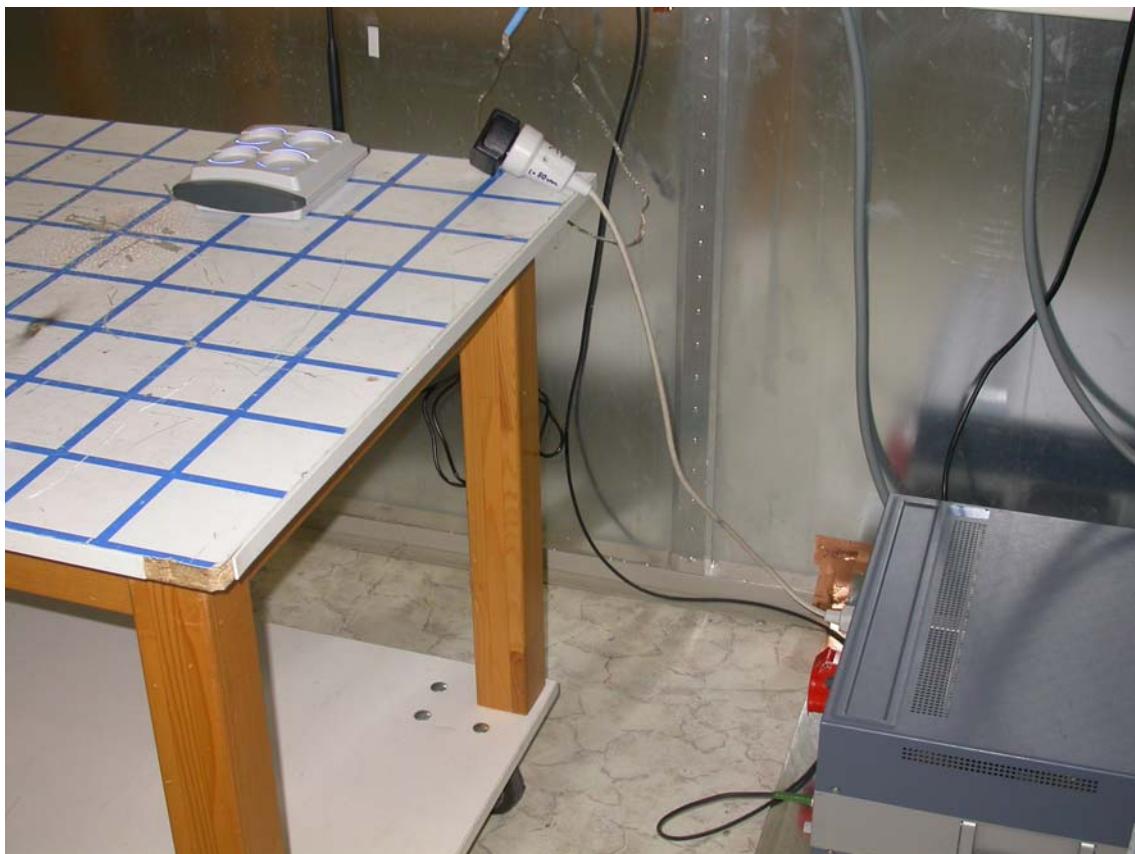

5.8.3 Description of Measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\begin{aligned} \text{dB}\mu\text{V} &= 20(\log \mu\text{V}) \\ \mu\text{V} &= \text{Inverse log}(\text{dB}\mu\text{V}/20) \end{aligned}$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with $50\Omega/50 \mu\text{H}$ (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

FCC ID: VQ5-EBIIF

5.8.4 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin -1.8 dB at 27.12 MHz

The requirements are **FULFILLED**.


Remarks: The measurement was performed with AC (115V, 60 Hz) at the side of the power supply.

FCC ID: VQ5-EBIIF

5.8.5 Test protocol

Test point: L1
 Operation mode: RX-Mode
 Remarks: In RX-Mode 2400 MHz is the transmitter 13.56 MHz active.


Result: passed

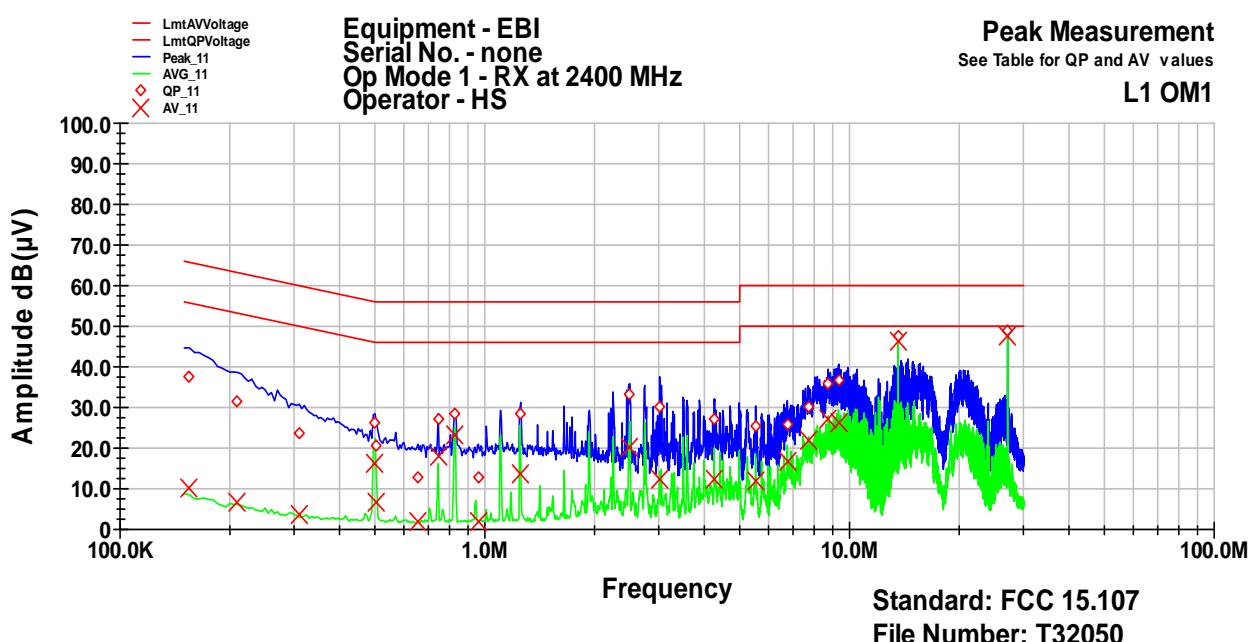

Frequency	QP Level	QP Margin	QP Limit	AV Level	AV Margin	AV Limit
MHz	dB(μV)	dB	dB	dB(μV)	dB	dB
0.155	37.7	-28.0	65.7	10.1	-45.6	55.7
0.21	31.4	-31.8	63.2	6.7	-46.6	53.2
0.31	23.6	-36.3	60.0	3.6	-46.4	50.0
0.5	26.4	-29.6	56.0	16.1	-29.9	46.0
0.505	20.8	-35.2	56.0	6.7	-39.3	46.0
0.655	12.7	-43.3	56.0	1.9	-44.1	46.0
0.745	27.1	-28.9	56.0	18.1	-27.9	46.0
0.825	28.4	-27.6	56.0	23.4	-22.6	46.0
0.96	13.0	-43.0	56.0	1.9	-44.1	46.0
1.25	28.2	-27.8	56.0	13.8	-32.2	46.0
2.495	33.2	-22.8	56.0	20.3	-25.8	46.0
3.015	30.0	-26.0	56.0	12.3	-33.7	46.0
4.25	27.3	-28.7	56.0	12.4	-33.6	46.0
5.525	25.5	-34.5	60.0	11.9	-38.1	50.0
6.75	25.7	-34.3	60.0	16.9	-33.2	50.0
7.695	30.4	-29.6	60.0	22.1	-27.9	50.0
8.735	35.9	-24.1	60.0	27.3	-22.7	50.0
9.345	36.8	-23.3	60.0	26.5	-23.5	50.0
13.56	47.5	-12.5	60.0	46.2	-3.8	50.0
27.12	48.8	-11.3	60.0	47.8	-2.2	50.0

FCC ID: VQ5-EBIIF

Test point: N
Operation mode: RX-Mode
Remarks: In RX-Mode 2400 MHz is the transmitter 13.56 MHz active.

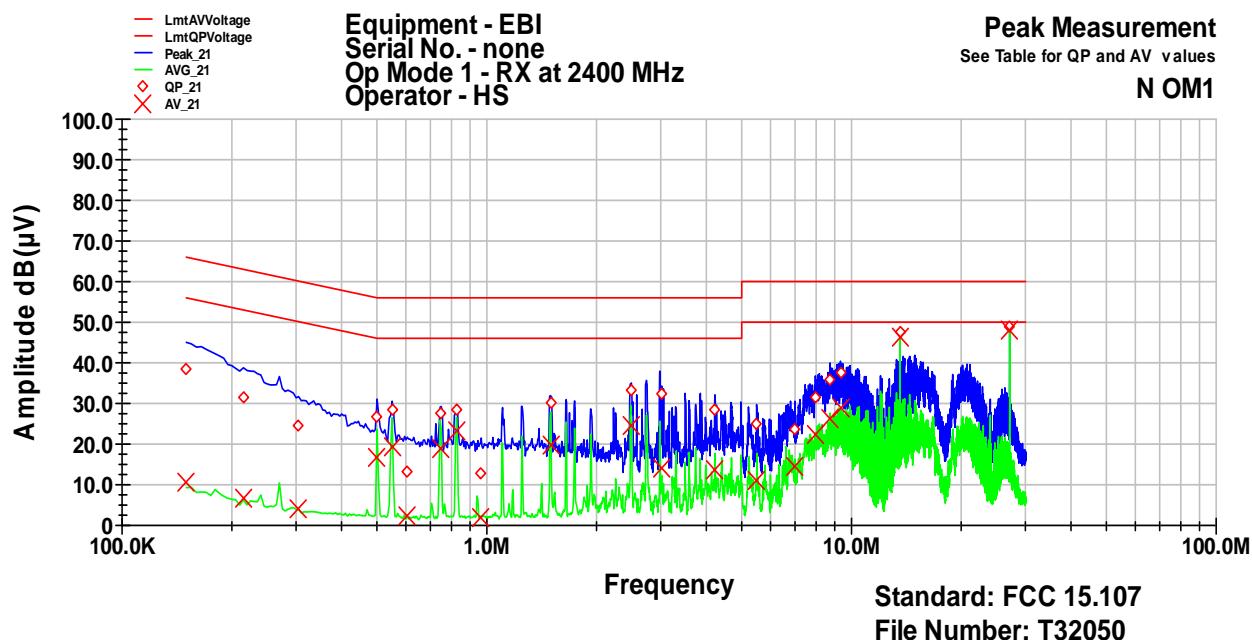

Frequency MHz	QP Level dB(µV)	QP Margin dB	QP Limit dB	AV Level dB(µV)	AV Margin dB	AV Limit dB
0.15	38.7	-27.3	66.0	10.8	-45.2	56.0
0.215	31.3	-31.7	63.0	6.6	-46.4	53.0
0.305	24.4	-35.8	60.1	3.9	-46.2	50.1
0.5	26.5	-29.5	56.0	16.5	-29.5	46.0
0.55	28.6	-27.4	56.0	19.3	-26.7	46.0
0.605	13.4	-42.6	56.0	2.2	-43.8	46.0
0.745	27.6	-28.4	56.0	18.8	-27.2	46.0
0.825	28.5	-27.5	56.0	23.4	-22.6	46.0
0.965	12.9	-43.1	56.0	1.9	-44.1	46.0
1.495	30.2	-25.8	56.0	19.8	-26.2	46.0
2.48	33.3	-22.8	56.0	24.5	-21.5	46.0
3.015	32.4	-23.6	56.0	14.1	-31.9	46.0
4.22	28.6	-27.4	56.0	13.7	-32.3	46.0
5.49	24.9	-35.1	60.0	10.9	-39.1	50.0
6.99	23.7	-36.3	60.0	14.6	-35.4	50.0
7.96	31.3	-28.7	60.0	22.4	-27.6	50.0
8.735	35.7	-24.3	60.0	26.4	-23.6	50.0
9.32	37.5	-22.5	60.0	29.1	-20.9	50.0
13.56	47.5	-12.5	60.0	46.3	-3.7	50.0
27.12	49.1	-10.9	60.0	48.2	-1.8	50.0

FCC ID: VQ5-EBIIIF

5.9 Receiver radiated emissions 9 kHz - 40 GHz

For test instruments and accessories used see section 6 Part **SER1**, **SER2** and **SER3**.

5.9.1 Description of the test location

Test location: OATS1
Anechoic Chamber2

Test distance: 3 metres
Test distance: 3 metres

5.9.2 Photo documentation of the test set-up



FCC ID: VQ5-EBIIF



FCC ID: VQ5-EBIIIF

5.9.3 Description of Measurement

Radiated spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EUT are rotated 360 degrees.

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The radiated emissions from the EUT are measured in the frequency range of 1 GHz to maximum frequency as specified in section 15.33, using a tuned receiver (Spectrum Analyser) and appropriate linearly polarized antennas. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003.

The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3m horizontally from the EUT.

Measurement are made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution as well as video bandwidth set to 100 kHz and for any spurious emission or modulation product that falls in Restricted Band, as defined in Section 15.205, set the resolution and video bandwidth to 1 MHz.

All tests are performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration procedure the highest emission relative the limit and therefore shall be used for final testing. During the tests the EUT is rotated all around to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions. When the EUT is larger than the beamwidth of the measuring antenna, the measurement antenna will be moved over the surfaces for the four sides or the test distance will be reduced to demonstrate that emissions were at maximum at the limit distance.

Analyzer Settings (EMI receiver) for spurious emissions which fall not in Restricted Band:

- Detector: Max hold
- RBW: 100 kHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: \geq RBW
- Sweep Time: Coupled
- Detector function: Peak

Analyzer Settings (EMI receiver) for spurious emissions which fall in Restricted Band:

- Detector: Max hold
- RBW: 1 MHz for $f \geq 1\text{GHz}$, 120 kHz for $f \leq 1\text{GHz}$
- VBW: \geq RBW
- Sweep Time: Coupled
- Detector function: Peak for $f \geq 1\text{GHz}$, Quasi Peak for $f \leq 1\text{GHz}$

FCC ID: VQ5-EBIIIF
5.9.4 Test result
Testresult in detail: (<1GHz)

Frequency [MHz]	Restricted Band	Reading Level QP [dB μ V]	Reading Level AV [dB μ V]	Reading Level PK [dB μ V]	Bandwidth [kHz]	Correct. factor [dB]	Corrected Level QP [dB μ V/m]	Corrected Level AV [dB μ V/m]	Corrected Level PK [dB μ V/m]	Limit [dB μ V/m]		Delta [dB]
										PK	QP	
0.009-0.15					0.2		< 30					
0.15-30					9		< 30					
30-1000												
30-88	■				120		< 30				40	> -10,0
88-216	■				120		< 30				43,5	> -13,5
216-960	■				120		< 30				46	> -16,0
960-1000	■				120		< 30				54	> -24,0

Test result >1GHz

Frequency [MHz]	Reading Level PK [dB μ V]	Reading Level AV [dB μ V] *)	Bandwidth [kHz]	Correct. Factor [dB]	Corrected Level PK [dB μ V/m]	Corrected Level AV [dB μ V/m]	Limit PK [dB μ V/m]	Limit AV [dB μ V/m]	Delta [dB]
1000 - 12500			1000		< 50		74	54	> -20

*) Average values were measured with suitable measuring receiver.

*) Average values were calculated from the subtraction of peak values minus correction duty cycle factor.

*) Average values were measured with spectrum analyzer by taking the following Settings

RBW: 1 MHz

VBW: 10 Hz

Sweep: Auto

Limit according to FCC Subpart 15.109(a)

Frequency of emission [MHz]	Field strength Limits [μ V/m]	Field strength Limits [dB μ V/m]
0,009-0,490	2400/F(kHz)	
0,490-1,705	24000/F(kHz)	
1,705-30	30	
30-88	100	40
88-216	150	44
216-960	200	46
Above 960	500	54

The requirements are **FULFILLED**.

Remarks: During the test, the EUT was set into continuous receiving mode.

The measurement was performed up to the 5th harmonic (12500 MHz).

FCC ID: VQ5-EBIIF

5.10 Maximum Permissible Exposure (MPE)

For test instruments and accessories used see section 6 Part **CPC3**.

5.10.1 Description of the test location

Test location: AREA4

5.10.2 Photo documentation of the test set-up



5.10.3 Calculation of MPE

Conducted maximum output power:

a) Frequency range from 2400.0 to 2483.5 MHz: 11.9 dBm

The conducted output power has been measured at the input to the antenna with the maximum power setting of the WLAN-Modul.

For MPE-Calculation the following formula has been used:

Friis transmission formula:
$$P_d = \frac{P_{out} * G}{4 * \pi * r^2}$$

FCC ID: VQ5-EBIIF

Limit for Maximum Permissible Exposure according §1.1310 table 1,

Frequency range from 2400 to 2483.5 MHz

Limit for general population / uncontrolled exposures: 1.0 mW/cm²

The EUT is according to FCC Rules 47CFR 2.1093(b) no portable device. The EUT is designed to be used that radiating structures are outside of 20 cm of the body of the user.

Test result:

Maximum output power to the antenna: $P_{out} = 0.135 \text{ mW} (-8.7 \text{ dBm})$

Antenna gain: $G = 3.16 \text{ (5 dBi, worst case)}$

Distance r: $r = 20 \text{ cm}$

Power density: $P_d = 0.003 \text{ mW/cm}^2$

The requirements for a non harmful use are **FULFILLED**.

Remarks: _____

FCC ID: VQ5-EBIIF

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

The calibration intervals and the calibration history will be given out on request.

Test ID	Model / Type	Kind of Equipment	Manufacturer	Equipment No.
A 4	ESHS 30 NNLK 8129 ESH 2 - Z 5 N-4000-BNC N-1500-N ESH 3 - Z 2	EMI Test Receiver LISN LISN RF Cable RF Cable Pulse Limiter	Rohde & Schwarz München Schwarzbeck Mess-Elektron Rohde & Schwarz München mikes-testingpartners gmbh mikes-testingpartners gmbh Rohde & Schwarz München	02-02/03-05-002 02-02/20-05-001 02-02/20-05-004 02-02/50-05-138 02-02/50-05-140 02-02/50-05-155
CPC 3	FSP 30 WK-340/40 50 Ohm / 10 dB / 18 GHz Sucoflex N-2000-SMA 6543A	Spectrum Analyzer Climatic Chamber Attenuator RF Cable Power Supply	Rohde & Schwarz München Weiss Umwelttechnik GmbH Huber + Suhner novotronik Signalverarbeit HP Hewelett-Packard	02-02/11-05-001 02-02/45-05-001 02-02/50-05-078 02-02/50-05-083 02-02/50-05-157
MB	FSP 30 WK-340/40 50 Ohm / 10 dB / 18 GHz Sucoflex N-2000-SMA 6543A	Spectrum Analyzer Climatic Chamber Attenuator RF Cable Power Supply	Rohde & Schwarz München Weiss Umwelttechnik GmbH Huber + Suhner novotronik Signalverarbeit HP Hewelett-Packard	02-02/11-05-001 02-02/45-05-001 02-02/50-05-078 02-02/50-05-083 02-02/50-05-157
SER 1	FMZB 1516 ESVS 30 S10162-B/+11N-50-10-5/+1 KK-EF393-21N-16 NW-2000-NB	Magnetic Field Antenna EMI Test Receiver RF Cable 33m RF Cable 20m RF Cable	Schwarzbeck Mess-Elektron Rohde & Schwarz München Huber + Suhner Huber + Suhner Huber + Suhner	01-02/24-01-018 02-02/03-05-003 02-02/50-05-031 02-02/50-05-033 02-02/50-05-113
SER 2	ESVS 30 VULB 9168 S10162-B/+11N-50-10-5/+1 KK-EF393-21N-16 NW-2000-NB	EMI Test Receiver Trilog-Broadband Anten RF Cable 33m RF Cable 20m RF Cable	Rohde & Schwarz München Schwarzbeck Mess-Elektron Huber + Suhner Huber + Suhner Huber + Suhner	02-02/03-05-006 02-02/24-05-005 02-02/50-05-031 02-02/50-05-033 02-02/50-05-113
SER 3	AFS4-01000400-10-10P-4 AMF-4F-04001200-15-10P AFS5-12001800-18-10P-6 BBHA 9120 E 251 WBH218H N Sucoflex N-2000-SMA Sucoflex N-2000-SMA Sucoflex N-2000-SMA	RF Amplifier 1-4 GHz RF Amplifier 4-12 GHz RF Amplifier 12-18 GHz Broad-Band Horn Anten Horn Antenna 2-18 GHz RF Cable RF Cable RF Cable	PARZICH GMBH PARZICH GMBH PARZICH GMBH Schwarzbeck Mess-Elektron Q-par Angus Ltd novotronik Signalverarbeit novotronik Signalverarbeit novotronik Signalverarbeit	02-02/17-05-003 02-02/17-05-004 02-02/17-06-002 02-02/24-05-006 02-02/24-05-007 02-02/50-05-075 02-02/50-05-083 02-02/50-05-088

FCC ID: VQ5-EBIIF

Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
02-02/03-05-002	04/20/2008	04/20/2007		
02-02/20-05-001	12.08.2007	06.08.2007		
02-02/20-05-004	03.11.2008	04.11.2005	12.08.2007	06.08.2007
02-02/50-05-138				
02-02/50-05-140				
02-02/50-05-155	03/25/2008	09/25/2007		
02-02/11-05-001	12.06.2007	12.06.2006		
02-02/45-05-001	09.01.2008	09.01.2005	12.06.2007	06.06.2007
02-02/50-05-078				
02-02/50-05-083				
02-02/50-05-157				
02-02/11-05-001	12.06.2007	12.06.2006		
02-02/45-05-001	09.01.2008	09.01.2005	12.06.2007	06.06.2007
02-02/50-05-078				
02-02/50-05-083				
02-02/50-05-157				
01-02/24-01-018	12.04.2007	12.04.2006		
02-02/03-05-003	04/26/2008	04/26/2007		
02-02/50-05-031				
02-02/50-05-033				
02-02/50-05-113				
02-02/03-05-006	07/24/2008	07/24/2007		
02-02/24-05-005	04/15/2008	04/15/2005	21.10.2008	21.09.2007
02-02/50-05-031				
02-02/50-05-033				
02-02/50-05-113				
02-02/17-05-003				
02-02/17-05-004				
02-02/17-06-002				
02-02/24-05-006	04/15/2008	04/15/2005	10/23/2007	04/23/2007
02-02/24-05-007	10/23/2007	04/23/2007		
02-02/50-05-075				
02-02/50-05-083				
02-02/50-05-088				