

FCC ID: VQ5-EBIIF IC: 7412-EBIIF

# 5 TEST CONDITIONS AND RESULTS

## 5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part A 4.

## 5.1.1 Description of the test location

Test location: Shielded Room S2

#### 5.1.2 Photo documentation of the test set-up



## 5.1.3 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

#### 5.1.4 Description of Measurement

The measurements are performed following the procedures set out in ANSI C63.10 described under item 6.2. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

File No. **T40058-00-10HS**, page **11** of 39

CSA Group Bayern GmbH

Ohmstrasse 1-4 · 94342 STRASSKIRCHEN · GERMANY
Tel.: +49(0)9424-94810 · Fax: +49(0)9424-9481440



**FCC ID: VQ5-EBIIF** IC: 7412-EBIIF

## 5.2 EBW and OBW

For test instruments and accessories used see section 6 Part MB.

#### **Description of the test location**

AREA4 Test location:

#### 5.2.2 Photo documentation of the test set-up



#### 5.2.3 Applicable standard

According to FCC Part 15, Section 15.247(a)(2):

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 – 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 5.2.4 **Description of Measurement**

The bandwidth was measured at an amplitude level reduced from the reference level of a modulated channel by a ratio of -6 dB. The reference level is the level of the highest signal amplitude observed at the transmitted bandwidth at either the fundamental frequency or the first order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. An alternative is to use the bandwidth measurement of the analyser.

Spectrum analyser settings for EBW 6dB:

RBW: 100 kHz, VBW: 300 kHz, Detector: Max peak, Sweep time: 5 s, Span: 2 EBW;

Spectrum analyser settings for OBW:

Tel.: +49(0)9424-94810 · Fax: +49(0)9424-9481440

RBW: 1-5% OBW. VBW: 3 RBW, Detector: Max peak, Sweep time: 5 s, Span: 2 OBW;

File No. **T40058-00-10HS**, page **17** of 39 CSA Group Bayern GmbH Ohmstrasse 1-4 · 94342 STRASSKIRCHEN · GERMANY



FCC ID: VQ5-EBIIF IC: 7412-EBIIF


## 5.3 Maximum peak conducted output power

For test instruments and accessories used see section 6 Part CPC 3.

## 5.3.1 Description of the test location

Test location: AREA4

## 5.3.2 Photo documentation of the test set-up

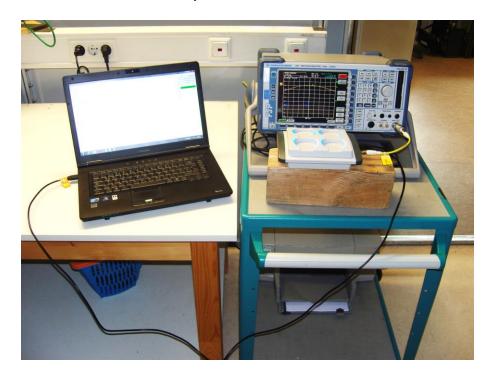

#### 5.3.3 Applicable standard

According to FCC Part 15, Section 15.247(b)(3):

For systems using digital modulation in the 2400-2483.5 MHz the maximum peak conducted output power of the transmitter shall not exceed 1 Watt.

## 5.3.4 Description of Measurement

The maximum peak conducted output power is measured using a spectrum analyser following the procedure set out in KDB 558074, item 9.1.1. The EUT is set in TX continuous mode while measuring.

## 5.3.5 Test result

802.15.4, 250 kbps, TX		Test results		
		A (dBm)	EIRP Limit	Margin
			(dBm)	(dB)
Lowest frequency: CH11				
$T_{nom}$	$V_{nom}$	-2.6	30.0	-32.6
Middle frequency: CH18				
$T_{nom}$	$V_{nom}$	-2.2	30.0	-32.2
Highest frequency: CH26				
$T_{nom}$	$V_{nom}$	-1.4	30.0	-31.4

CSA Group Bayern GmbH
Ohmstrasse 1-4 · 94342 STRASSKIRCHEN · GERMANY
Tel.: +49(0)9424-94810 · Fax: +49(0)9424-9481440



FCC ID: VQ5-EBIIF IC: 7412-EBIIF

## 5.6 Radiated emissions in restricted bands

For test instruments and accessories used see section 6 Part SER 2, SER 3.

## 5.6.1 Description of the test location


Test location: OATS 1

Test location: Anechoic Chamber 1

Test distance: 3 m

## 5.6.2 Photo documentation of the test set-up




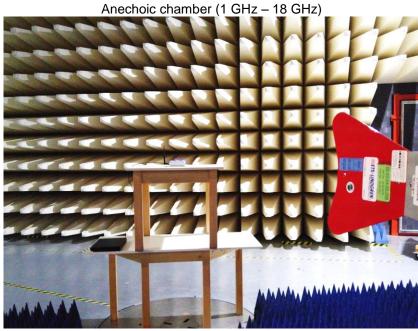

CSA Group Bayern GmbH Ohmstrasse 1-4 · 94342 STRASSKIRCHEN · GERMANY Tel.: +49(0)9424-94810 · Fax: +49(0)9424-9481440



FCC ID: VQ5-EBIIF

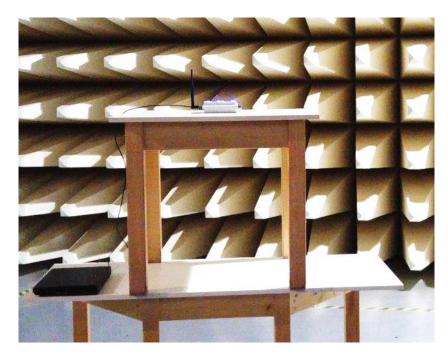

IC: 7412-EBIIF

According to FCC Part 15, Section 15.205(a):

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

#### 5.6.3 Description of Measurement

The restricted bands are measured radiated. The span of the spectrum analyser is set wide enough to capture the restricted band and measure the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The restricted bands are measured falling emissions into it and the nearest restricted band are checked for emissions also the restricted band for the harmonics of the carrier.

EMC Test receiver settings for SER2:

RBW: 120 MHz, Detector: Quasi peak, Mes. Time: 1 s,

Spectrum analyser settings for SER3:

RBW: 1 MHz, VBW: 3 MHz, Detector: Max. peak, Trace: Max. hold, Sweep: Auto

Due to the small output power the spurious emissions are measured > 1 GHz RBW 1 MHz and against the general limit.